



SAR Test Report

Report No.: STS2601248H02

Issued for

HONG KONG LELEGAO TECHNOLOGY CO., LIMITED

19H Maxgrand Plaza, No.3 Tai Yau Street, San Po Kong,
Kowloon, HongKong, China

Product Name: 4G Smart phone

Brand Name: Blackview

Model Name: WAVE 10

Series Model(s): N/A

FCC ID: 2BSW8-WAVE10

Test Standard: ANSI/IEEE Std. C95.1
FCC 47 CFR Part 2 (2.1093)
IEEE Std. 1528-2013

Head: 1.486 W/kg(1g)

Max. Report SAR Body: 1.273 W/kg(1g)

Limbs: 2.301 W/kg(10g)

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT CERTIFICATION****Applicant's name** : HONG KONG LELEGAO TECHNOLOGY CO.,LIMITEDAddress : 19H Maxgrand Plaza, No.3 Tai Yau Street, San Po Kong,
Kowloon, HongKong, China**Manufacturer's Name** : Shenzhen Doke Electronic Co., LTDAddress : 801, Building3, 7th Industrial Zone, Yulv Community, Yutang
Road, Guangming District, Shenzhen, China**Product description**

Product name : 4G Smart phone

Brand name : Blackview

Model name : WAVE 10

Series Model..... : N/A

Standards..... : RSS-102 Issue 6, December 15, 2023
IEC/IEEE 62209-1528:2020

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in EN IEC/IEEE 62209-1528 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test..... :

Date (s) of performance of tests..... : 23 Jan. 2026 ~ 29 Jan. 2026

Date of Issue..... : 09 Feb. 2026

Test Result..... : **Pass**

Testing Engineer : _____

(Xin.Liu)

Technical Manager : _____

(Shifan. Long)

Authorized Signatory : _____

(Bovey Yang)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
3.3 DASY5 E-field Probe System	11
3.4 Phantoms	12
3.5 Device Holder	12
3.6 Scanning Procedure	13
3.7 Data Storage and Evaluation	14
4. Tissue Simulating Liquids	16
4.1 Simulating Liquids Parameter Check	16
5. SAR System Validation	20
5.1 Validation System	20
5.2 Validation Result	20
6. SAR Evaluation Procedures	22
7. EUT Antenna Location Sketch	23
7.1 SAR test exclusion consider table	24
8. EUT Test Position	29
8.1 Define Two Imaginary Lines on the Handset	29
8.2 Hotspot mode exposure position condition	30
9. Uncertainty	31
9.1 Measurement Uncertainty	31
10. Conducted Power Measurement	34
10.1 Test Result	34
11. EUT and Test Setup Photo	57
11.1 EUT Photo	57
11.2 Setup Photo	60
12. SAR Result Summary	69
12.1 Head SAR	69
12.2 Body-worn and Hotspot SAR	73
12.3 Limbs SAR	77
12.3 Repeated SAR	81



12.4 Repeated SAR measurement	82
12.5 Simultaneous Multi-band Transmission Evaluation	83
13. Equipment List	86
Appendix A. System Validation Plots	87
Appendix B. SAR Test Plots	97
Appendix C. Probe Calibration and Dipole Calibration Report.....	145

Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	09 Feb. 2026	STS2601248H02	ALL	Initial Issue



1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name/PMN	4G Smart phone
Brand Name	Blackview
Model Name/HVIN	WAVE 10
Series Model	N/A
Model Difference	N/A
Battery	Model: FHPV466495PNJ Rated Voltage: 3.85 V Charge Limit Voltage: 4.4V Capacity: 5000mAh
Device Category	Portable
Product stage	Production unit
RF Exposure Environment	General Population / Uncontrolled
Hardware Version	J567F_9230SMB_D4UFU_V1.0
Software Version/FVIN	WAVE10_NEU_J567F_V1.0_A16
Frequency Range	GSM 850: 824 MHz ~ 849 MHz PCS1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 17100 MHz ~ 1780 MHz WLAN 802.11b/g/n/20: 2412 MHz ~ 2462 MHz WLAN 802.11n/40: 2422 MHz ~ 2452 MHz WLAN 802.11a/n/20/n/40/ac/20/ac/40/ac/80: 5150 ~ 5250 MHz WLAN 802.11a/n/20/n/40/ac/20/ac/40/ac/80: 5725 ~ 5850 MHz Bluetooth: 2402 MHz to 2480 MHz



Max. Reported SAR(1g/10g): (Limit: 1.6W/kg 4.0W/kg) Test distance: Head:0mm Body:10mm Limbs:0mm	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)	Limbs (W/kg)
	GSM 850	0.154	0.157	0.365
	GSM 1900	1.054	0.343	0.752
	WCDMA Band II	0.950	0.684	1.383
	WCDMA Band V	1.122	0.380	0.904
	WCDMA Band IV	0.143	0.141	0.247
	LTE Band 2	0.954	0.962	2.071
	LTE Band 4	0.637	0.421	0.935
	LTE Band 5	0.135	0.140	0.235
	LTE Band 7	0.575	0.209	0.649
	LTE Band 12	0.165	0.219	0.338
	LTE Band 17	0.150	0.199	0.311
	LTE Band 41	0.300	0.090	0.292
	LTE Band 66	0.691	0.514	1.330
	2.4G WLAN	0.080	0.051	0.228
	BT	0.059	0.029	0.059
	5.2G WLAN	0.364	0.258	0.144
5.8G WLAN	0.265	0.311	0.230	
1-g Sum SAR		1.486	1.273	N/A
10-g Sum SAR		N/A	N/A	2.301
Operating Mode:	GSM: GSM Voice; GPRS/EGPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM 2.4G WLAN : 802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 5G WLAN: 802.11a(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM):BPSK,QPSK,16-QAM,64-QAM,256-QAM Bluetooth: GFSK + π /4DQPSK+8DPSK BLE: GFSK			
Antenna Specification:	GSM/WCDMA/LTE: PIFA Antenna Bluetooth: PIFA Antenna WLAN: PIFA Antenna			
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time			
Hotspot Mode	Support			
DTM Mode	Not Support			
Note: 1. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active) 2. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests. 3. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power				



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	IEEE Std C95.1, 2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

4.0W/kg



3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.

Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.



Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.



3.3 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

Probe Specification

Construction Symmetrical design with triangular core
Interleaved sensors
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.


Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY5, DASY52 SAR and higher, EASY4/MRI



Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

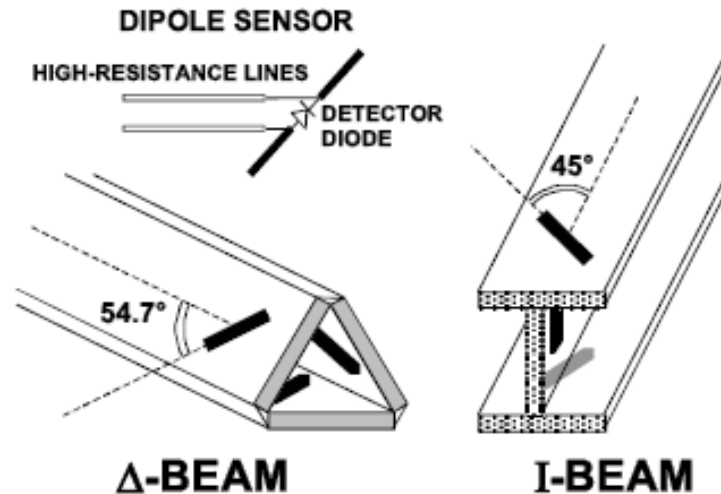

3.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm). System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

3.5 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

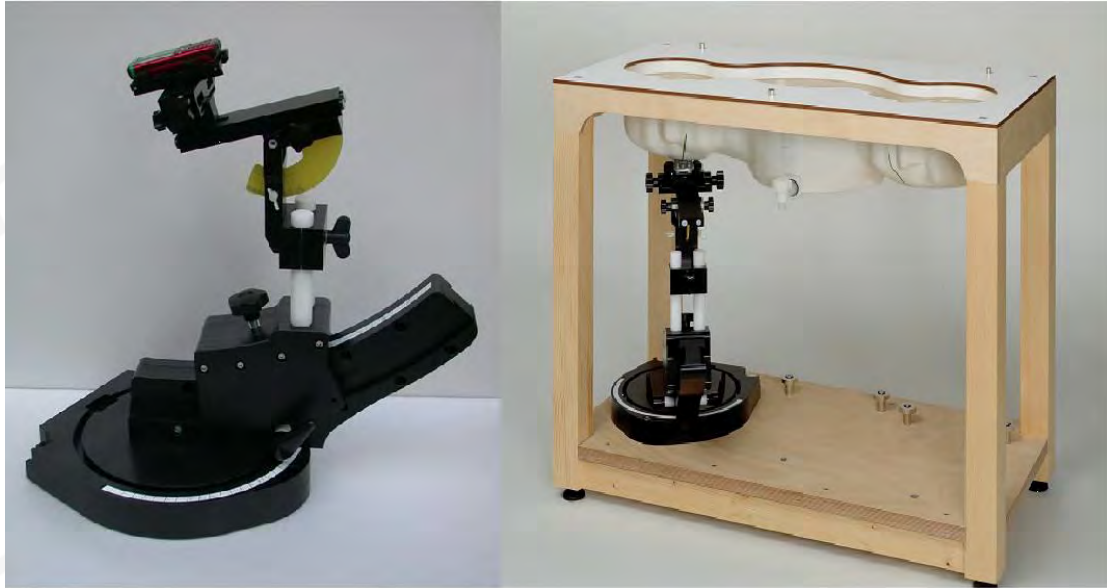

Device holder supplied by SPEAG

3.6 Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of $15\text{ mm} \times 15\text{ mm}$ is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by $7 \times 7 \times 7$ points within a cube whose base is centered around the maxima found in the preceding area scan.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at



least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.7 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.



The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcpi}$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 $dcpi$ = diode compression point (DASY parameter)

From the compensated input signals the priMayy field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)
 [mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The priMayy field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max _ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r	σ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

**LIQUID MEASUREMENT RESULTS**

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2026-01-23	22.1	56	704	21.9	Permittivity	42.15	42.41	0.63	±5
					Conductivity	0.89	0.86	-3.04	±5
2026-01-23	22.1	56	709	21.9	Permittivity	42.12	41.97	-0.35	±5
					Conductivity	0.89	0.89	0.31	±5
2026-01-23	22.1	56	711	21.9	Permittivity	42.11	42.21	0.24	±5
					Conductivity	0.89	0.85	-4.21	±5
2026-01-23	22.1	56	750	21.9	Permittivity	41.90	41.57	-0.79	±5
					Conductivity	0.89	0.88	-1.12	±5
2026-01-24	22.4	54	824.2	22.1	Permittivity	41.55	42.24	1.66	±5
					Conductivity	0.90	0.89	-0.97	±5
2026-01-24	22.4	54	829	22.1	Permittivity	41.53	41.46	-0.16	±5
					Conductivity	0.90	0.90	0.08	±5
2026-01-24	22.4	54	835	22.1	Permittivity	41.50	41.46	-0.10	±5
					Conductivity	0.90	0.92	2.22	±5
2026-01-24	22.4	54	836.5	22.1	Permittivity	41.49	42.30	1.95	±5
					Conductivity	0.90	0.91	1.09	±5
2026-01-24	22.4	54	836.6	22.1	Permittivity	41.49	41.73	0.57	±5
					Conductivity	0.90	0.91	1.09	±5
2026-01-27	22.5	48	1712.6	22.2	Permittivity	40.12	39.99	-0.34	±5
					Conductivity	1.35	1.35	0.00	±5
2026-01-27	22.5	48	1740	22.2	Permittivity	40.09	40.12	0.09	±5
					Conductivity	1.37	1.36	-0.42	±5
2026-01-27	22.5	48	1745	22.2	Permittivity	40.08	40.22	0.35	±5
					Conductivity	1.37	1.36	-0.63	±5
2026-01-27	22.5	48	1752.4	22.2	Permittivity	40.07	41.07	2.50	±5
					Conductivity	1.37	1.37	-0.20	±5
2026-01-27	22.5	48	1800	22.2	Permittivity	40.00	40.84	2.10	±5
					Conductivity	1.40	1.40	0.00	±5
2026-01-26	23.5	49	1770	23.1	Permittivity	40.04	40.55	1.27	±5
					Conductivity	1.38	1.36	-1.65	±5
2026-01-26	23.5	49	1800	23.1	Permittivity	40.00	40.61	1.53	±5
					Conductivity	1.40	1.40	0.00	±5
2026-01-25	23.2	57	1850.2	21.8	Permittivity	40.00	39.64	-0.90	±5
					Conductivity	1.40	1.40	0.00	±5
2026-01-25	23.2	57	1860	21.8	Permittivity	40.00	40.26	0.65	±5
					Conductivity	1.40	1.42	1.43	±5
2026-01-25	23.2	57	1880	21.8	Permittivity	40.00	39.45	-1.37	±5
					Conductivity	1.40	1.38	-1.43	±5
2026-01-25	23.2	57	1900	21.8	Permittivity	40.00	39.55	-1.13	±5
					Conductivity	1.40	1.38	-1.43	±5
2026-01-25	23.2	57	1909.8	21.8	Permittivity	40.00	40.36	0.90	±5
					Conductivity	1.40	1.40	0.00	±5
2026-01-26	23.5	49	1852.4	23.1	Permittivity	40.00	39.69	-0.78	±5
					Conductivity	1.40	1.39	-0.71	±5
2026-01-26	23.5	49	1880	23.1	Permittivity	40.00	40.05	0.12	±5
					Conductivity	1.40	1.41	0.71	±5
2026-01-26	23.5	49	1900	23.1	Permittivity	40.00	40.44	1.10	±5
					Conductivity	1.40	1.40	0.00	±5




2026-01-26	23.5	49	1907.6	23.1	Permittivity	40.00	41.15	2.88	±5
					Conductivity	1.40	1.41	0.71	±5
2026-01-29	23.3	47	2462	23.1	Permittivity	39.18	38.93	-0.63	±5
					Conductivity	1.81	1.79	-1.14	±5
2026-01-29	23.3	47	2450	23.1	Permittivity	39.20	39.65	1.15	±5
					Conductivity	1.80	1.81	0.56	±5
2026-01-28	22.8	52	2510	22.5	Permittivity	39.12	39.04	-0.20	±5
					Conductivity	1.86	1.88	0.86	±5
2026-01-28	22.8	52	2600	22.5	Permittivity	39.00	39.20	0.51	±5
					Conductivity	1.96	1.97	0.51	±5
2026-01-28	22.8	52	2680	22.5	Permittivity	38.90	38.98	0.21	±5
					Conductivity	2.05	2.04	-0.39	±5
2026-01-29	23.3	47	5200	23.1	Permittivity	36.00	35.60	-1.11	±5
					Conductivity	4.66	4.67	0.21	±5
2026-01-29	23.3	47	5240	23.1	Permittivity	35.96	36.00	0.11	±5
					Conductivity	4.70	4.71	0.17	±5
2026-01-29	23.3	47	5800	23.1	Permittivity	35.30	35.87	1.61	±5
					Conductivity	5.27	5.28	0.19	±5
2026-01-29	23.3	47	5825	23.1	Permittivity	35.28	35.38	0.30	±5
					Conductivity	5.30	5.31	0.26	±5

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

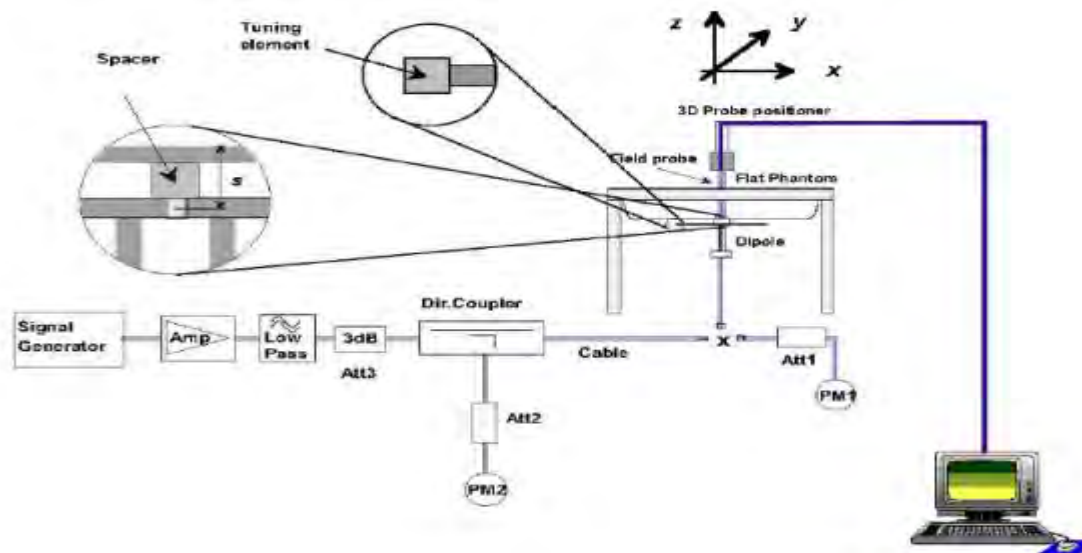

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (%)	1W Target		Difference percentage		Limited %
						SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	1g	10g	
2026-01-23	750	100 mW	0.873	0.514	1.22	8.49	5.53	2.83%	-7.05%	10
		Normalize to 1 Watt	8.73	5.14						
2026-01-24	835	100 mW	0.964	0.663	2.07	9.63	6.15	0.10%	7.80%	10
		Normalize to 1 Watt	9.64	6.63						
2026-01-27	1800	100 mW	3.746	2.041	-3.81	37.95	20.49	-1.29%	-0.39%	10
		Normalize to 1 Watt	37.46	20.41						
2026-01-26	1800	100 mW	3.860	2.029	1.34	37.95	20.49	1.71%	-0.98%	10
		Normalize to 1 Watt	38.60	20.29						
2026-01-25	1900	100 mW	3.908	2.015	1.20	39.84	20.20	-1.91%	-0.25%	10
		Normalize to 1 Watt	39.08	20.15						
2026-01-26	1900	100 mW	3.969	2.068	-2.40	39.84	20.20	-0.38%	2.38%	10
		Normalize to 1 Watt	39.69	20.68						
2026-01-29	2450	100 mW	5.496	2.420	-2.13	54.70	24.11	0.48%	0.37%	10
		Normalize to 1 Watt	54.96	24.20						
2026-01-28	2600	100 mW	5.579	2.456	0.17	56.19	24.08	-0.71%	1.99%	10
		Normalize to 1 Watt	55.79	24.56						
	5200	10 mW	1.550	0.569	3.82	163.88	57.29	-5.42%	-0.68%	10



2026-01-29		Normalize to 1 Watt	155.00	56.90						
2026-01-29	5800	10 mW	1.955	0.638	0.41	188.95	63.45	3.47%	0.55%	10
		Normalize to 1 Watt	195.50	63.80						

Note:

(1) We use a CW signal of 20dBm(750,835,1800,1900,2450,2600MHz) and 10dBm(5000-6000MHz) for system check, and then all SAR values are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below. When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.


7. EUT Antenna Location Sketch

It is a Smart phone, support GSM/WCDMA/LTE/WLAN/BT mode.

Top side

Left side

Right side

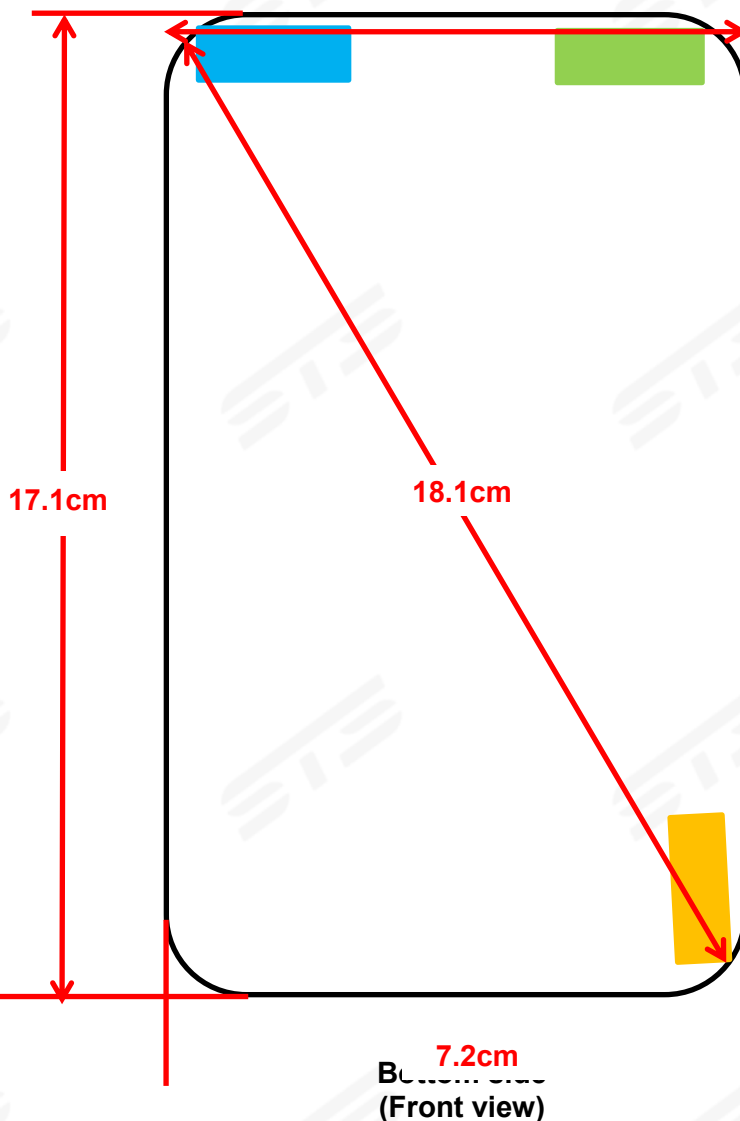

- WLAN/BT Antenna
- WWAN-Main Antenna
- WWAN-Aux Antenna

Antenna Separation Distance(cm)						
ANT	Back Side	Front Side	Left Side	Right Side	Top Side	Bottom Side
WLAN/BT	≤0.5	≤0.5	6.3	≤0.5	≤0.5	15.4
WWAN-Main	≤0.5	≤0.5	≤0.5	6.2	≤0.5	16.5
WWAN-Aux	≤0.5	≤0.5	6.7	≤0.5	15.2	≤0.5

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	GSM850	PCS1900	WCDMA II	WCDMA IV	WCDMA V
Exposure Position	Calculated Frequency(GHz)	0.8488	1.88	1.88	1.7524	0.8366
	Maximum Turn-up power (dBm)	34	31	23	23.5	24
	Maximum rated power(mW)	2511.89	1258.93	199.53	223.87	251.19
Back Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	9.04	3.39	3.39	3.27	6.49
	Testing required?	YES	YES	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	9.04	3.39	3.39	3.27	6.49
	Testing required?	YES	YES	YES	YES	YES
Left Side	Separation distance (cm)	6.7	0.5	0.5	0.5	6.7
	exclusion threshold(mW)	364.56	3.39	3.39	3.27	493.29
	Testing required?	YES	YES	YES	YES	NO
Right Side	Separation distance (cm)	0.5	6.2	6.2	6.2	0.5
	exclusion threshold(mW)	9.04	352.75	352.75	387.63	6.49
	Testing required?	YES	YES	NO	NO	YES
Top Side	Separation distance (cm)	15.2	0.5	0.5	0.5	15.2
	exclusion threshold(mW)	1171.20	3.39	3.39	3.27	1935.62
	Testing required?	YES	YES	YES	YES	NO
Bottom Side	Separation distance (cm)	0.5	16.5	16.5	16.5	0.5
	exclusion threshold(mW)	9.04	2145.89	2145.89	2481.89	6.49
	Testing required?	YES	NO	NO	NO	YES



Exposure Position	Wireless Interface	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12
	Calculated Frequency(GHz)	1.8575	1.7107	0.8247	2.5075	0.6997
	Maximum Turn-up power (dBm)	25.5	24	25	23.5	25.5
	Maximum rated power(mW)	354.81	251.19	316.23	223.87	354.81
Back Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	3.43	3.66	9.41	2.69	11.85
	Testing required?	YES	YES	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	3.43	3.66	9.41	2.69	11.85
	Testing required?	YES	YES	YES	YES	YES
Left Side	Separation distance (cm)	0.5	0.5	6.7	0.5	6.7
	exclusion threshold(mW)	3.43	3.66	361.56	2.69	344.86
	Testing required?	YES	YES	NO	YES	YES
Right Side	Separation distance (cm)	6.2	6.2	0.5	6.2	0.5
	exclusion threshold(mW)	353.83	361.31	9.41	327.83	11.85
	Testing required?	YES	NO	YES	NO	YES
Top Side	Separation distance (cm)	0.5	0.5	15.2	0.5	15.2
	exclusion threshold(mW)	3.43	3.66	1143.82	2.69	999.39
	Testing required?	YES	YES	NO	YES	NO
Bottom Side	Separation distance (cm)	16.5	16.5	0.5	16.5	0.5
	exclusion threshold(mW)	2146.97	2154.37	9.41	2120.23	11.85
	Testing required?	NO	NO	YES	NO	YES



Exposure Position	Wireless Interface	LTE Band 17	LTE Band 41	LTE Band 66	BT	2.4G WLAN	5.2G WLAN	5.8G WLAN
	Calculated Frequency(GHz)	0.709	2.68	1.7725	2.48	2.437	5.24	5.825
	Maximum Turn-up power (dBm)	25	23	24	1.5	18	13	13
	Maximum rated power(mW)	316.23	199.53	251.19	1.41	63.10	19.95	19.95
Back Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	11.63	2.55	3.56	2.72	2.76	1.49	1.37
	Testing required?	YES	YES	YES	NO	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	11.63	2.55	3.56	2.72	2.76	1.49	1.37
	Testing required?	YES	YES	YES	NO	YES	YES	YES
Left Side	Separation distance (cm)	6.7	0.5	0.5	6.3	6.3	6.3	6.3
	exclusion threshold(mW)	346.18	2.55	3.56	338.93	340.42	280.94	273.58
	Testing required?	NO	YES	YES	NO	NO	NO	NO
Right Side	Separation distance (cm)	0.5	6.2	6.2	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	11.63	322.33	358.07	2.72	2.76	1.49	1.37
	Testing required?	YES	NO	NO	NO	YES	YES	YES
Top Side	Separation distance (cm)	15.2	0.5	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	1010.29	2.55	3.56	2.72	2.76	1.49	1.37
	Testing required?	NO	YES	YES	NO	YES	YES	YES
Bottom Side	Separation distance (cm)	0.5	16.5	16.5	15.4	15.4	15.4	15.4
	exclusion threshold(mW)	11.63	2114.35	2151.18	1859.98	1861.83	1782.67	1771.99
	Testing required?	YES	NO	NO	NO	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, if the maximum time-averaged power available does not exceed 1 mW. This stand-alone SAR exemption test.



4. Per KDB 447498 D04, the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

5. Per KDB 447498 D04, An alternative to the SAR-based exemption is using below table and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in below table to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

RF Source frequency (MHz)	Threshold ERP(watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.



6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.
8. Per KDB 248227, as maximum rated power for U-NII-2A > U-NII-1, U-NII-2A was chosen for SAR evaluation. Based on the measurements obtained, SAR measurements on U-NII-1 are not required as highest reported SAR from U-NII-2A band is $\leq 1.2\text{W/Kg}$.

8. EUT Test Position


This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face, Rear Face, Left Side, Right Side, Top Side, Bottom Side.

8.1 Define Two Imaginary Lines on the Handset

(1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.

(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.


(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

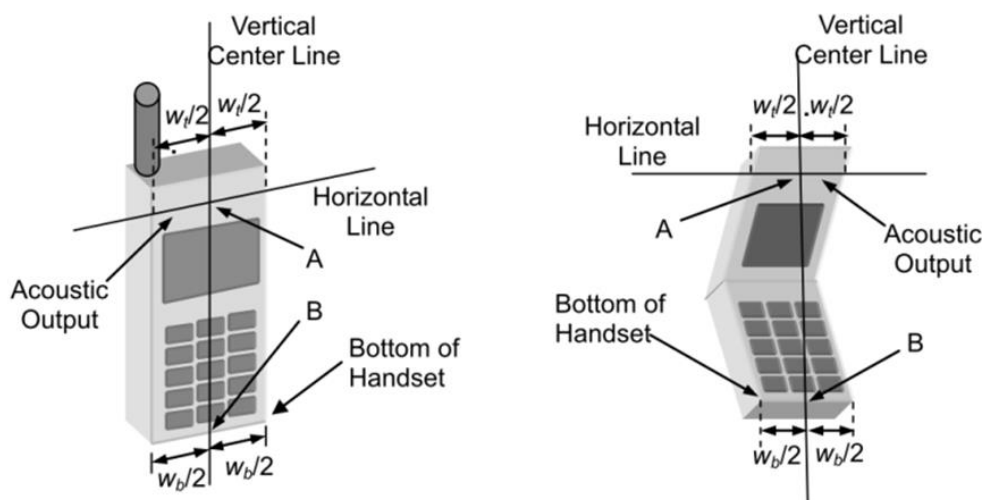

Cheek Position


1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

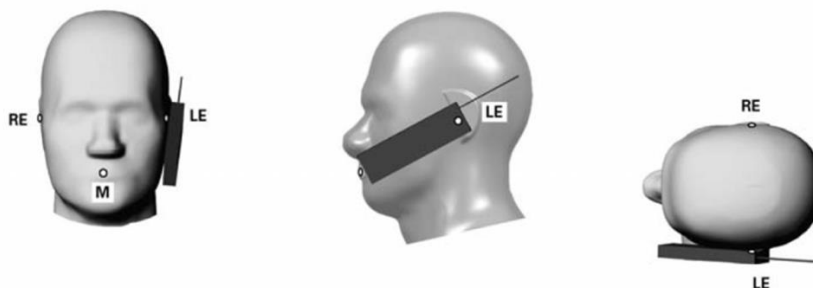

Title Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

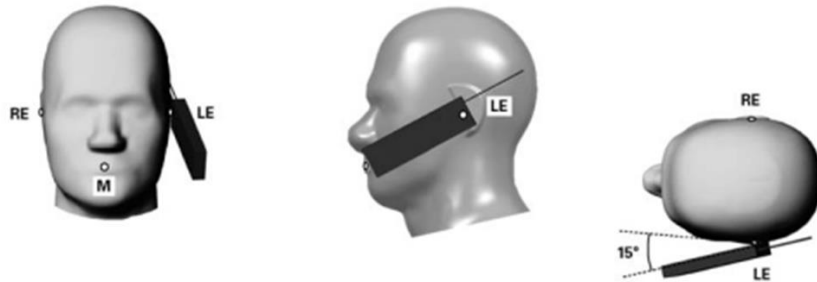


Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.



8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

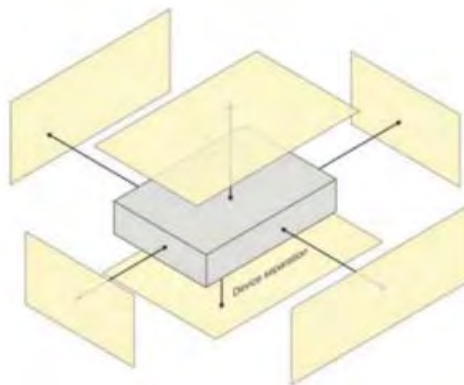



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

SATIMO Uncertainty- SN 08/21 EPGO352									
Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/- %)	10g Ui (+/- %)	vi
Measurement System									
Probe calibration	E.2.1	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	0.71	0.71	0.07	0.07	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.71	0.71	0.42	0.42	∞
Boundary effect	E.2.3	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Linearity	E.2.4	1.25	R	1.73	1.00	1.00	0.72	0.72	∞
System detection limits	E.2.4	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Modulation response	E.2.5	3.42	R	1.73	1.00	1.00	1.97	1.97	∞
Readout Electronics	E.2.6	0.26	N	1.00	1.00	1.00	0.26	0.26	∞
Response Time	E.2.7	0.17	R	1.73	1.00	1.00	0.10	0.10	∞
Integration Time	E.2.8	1.43	R	1.73	1.00	1.00	0.83	0.83	∞
RF ambient conditions-Noise	E.6.1	3.51	R	1.73	1.00	1.00	2.03	2.03	∞
RF ambient conditions-reflections	E.6.1	3.15	R	1.73	1.00	1.00	1.82	1.82	∞
Probe positioner mechanical tolerance	E.6.2	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.40	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.10	R	1.73	1.00	1.00	1.21	1.21	∞
Test sample Related									
Test sample positioning	E.4.2	3.10	N	1.00	1.00	1.00	3.10	3.10	∞
Device holder uncertainty	E.4.1	3.80	N	1.00	1.00	1.00	3.80	3.80	∞
Output power variation—SAR drift measurement	E.2.9	4.50	R	1.73	1.00	1.00	2.60	2.60	∞
SAR scaling	E.6.5	1.80	R	1.73	1.00	1.00	1.04	1.04	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	3.70	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.90	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.40	R	1.73	0.78	0.71	1.08	0.98	M
Liquid permittivity measurement	E.3.3	4.10	N	1.00	0.78	0.71	3.20	2.91	M
Liquid conductivity—temperature uncertainty	E.3.4	2.70	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity—temperature uncertainty	E.3.4	4.80	N	1.00	0.23	0.26	1.10	1.25	∞
Combined Standard Uncertainty			RSS				10.08	9.59	
Expanded Uncertainty (95% Confidence interval)			K=2				19.58	19.18	

SATIMO Uncertainty- SN 08/21 EPGO352



System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	1.00	1.00	0.10	0.10	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.00	0.00	0.00	0.00	∞
Boundary effect	E.2.3	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Linearity	E.2.4	1.25	R	1.73	1.00	1.00	0.72	0.72	∞
System detection limits	E.2.4	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Modulation response	E.2.5	3.42	R	1.73	0.00	0.00	0.00	0.00	∞
Readout Electronics	E.2.6	0.26	N	1.00	1.00	1.00	0.26	0.26	∞
Response Time	E.2.7	0.17	R	1.73	0.00	0.00	0.00	0.00	∞
Integration Time	E.2.8	1.43	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions- Noise	E.6.1	3.51	R	1.73	1.00	1.00	2.03	2.03	∞
RF ambient conditions- reflections	E.6.1	3.15	R	1.73	1.00	1.00	1.82	1.82	∞
Probe positioner mechanical tolerance	E.6.2	1.20	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.40	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.10	R	1.73	1.00	1.00	1.21	1.21	∞
System validation source									
Deviation of experimental dipole from numerical dipole	E.6.4	4.80	N	1.00	1.00	1.00	4.80	4.80	∞
Input power and SAR drift measurement	8,6.6.4	5.10	R	1.73	1.00	1.00	2.94	2.94	∞
Dipole axis to liquid distance	8,E.6.6	2.40	R	1.73	1.00	1.00	1.39	1.39	∞
Phantom and set-up									
Phantom shell uncertainty— shape, thickness, and permittivity	E.3.1	3.70	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.90	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	E.3.3	2.40	R	1.73	0.78	0.71	1.08	0.98	∞
Liquid conductivity (measured)	E.3.3	4.10	N	1.00	0.78	0.71	3.20	2.91	M
Liquid permittivity (temperature uncertainty)	E.3.4	2.70	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity (measured)	E.3.4	4.80	N	1.00	0.23	0.26	1.10	1.25	M
Combined Standard Uncertainty			RSS				9.72	9.52	
Expanded Uncertainty (95% Confidence interval)			K=2				19.44	19.03	

SATIMO Uncertainty- SN 08/21 EPG0352									
。 System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi



		(+ - %)							
Measurement System									
Probe calibration drift	E.2.1.3	5.72	N	1.00	1.00	1.00	5.72	5.72	∞
Axial Isotropy	E.2.2	0.18	R	1.73	0.00	0.00	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	1.04	R	1.73	0.00	0.00	0.00	0.00	∞
Boundary effect	E.2.3	0.8	R	1.73	0.00	0.00	0.00	0.00	∞
Linearity	E.2.4	1.25	R	1.73	0.00	0.00	0.00	0.00	∞
System detection limits	E.2.4	1.20	R	1.73	0.00	0.00	0.00	0.00	∞
Modulation response	E.2.5	3.42	R	1.73	0.00	0.00	0.00	0.00	∞
Readout Electronics	E.2.6	0.26	N	1.00	0.00	0.00	0.00	0.00	∞
Response Time	E.2.7	0.17	R	1.73	0.00	0.00	0.00	0.00	∞
Integration Time	E.2.8	1.43	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.51	R	1.73	0.00	0.00	0.00	0.00	∞
RF ambient conditions-reflections	E.6.1	3.15	R	1.73	0.00	0.00	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.2	R	1.73	1.00	1.00	0.69	0.69	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	1.73	1.00	1.00	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	3.9	R	1.73	0.00	0.00	0.00	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	4.8	N	1.00	1.00	1.00	4.80	4.80	∞
Input power and SAR drift measurement	8,6.6.4	5.1	R	1.73	1.00	1.00	2.94	2.94	∞
Dipole axis to liquid distance	8,E.6.6	2.4	R	1.73	1.00	1.00	1.39	1.39	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	3.7	R	1.73	1.00	1.00	2.14	2.14	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1.00	1.00	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.4	R	1.73	0.78	0.71	1.08	0.98	∞
Liquid permittivity measurement	E.3.3	4.1	N	1.00	0.78	0.71	3.20	2.91	M
Liquid conductivity—temperature uncertainty	E.3.4	2.7	R	1.73	0.23	0.26	0.36	0.41	∞
Liquid permittivity—temperature uncertainty	E.3.4	4.8	N	1.00	0.23	0.26	1.10	1.25	M
Combined Standard Uncertainty			RSS				5.56	5.20	
Expanded Uncertainty (95% Confidence interval)			K=2				11.12	10.41	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	33.40	33.61	33.62	30.63	30.63	30.59
GPRS (GMSK, 1-Slot)	33.33	33.53	33.54	30.32	30.45	30.35
GPRS (GMSK, 2-Slot)	31.21	31.17	31.16	28.03	27.74	27.22
GPRS (GMSK, 3-Slot)	29.22	29.13	29.11	26.44	26.12	25.39
GPRS (GMSK, 4-Slot)	27.08	26.89	26.82	24.09	23.75	23.17
EGPRS(8PSK, 1-Slot)	26.54	26.64	26.16	25.12	25.89	25.36
EGPRS(8PSK, 2-Slot)	24.74	24.79	24.30	24.02	24.84	24.26
EGPRS(8PSK, 3-Slot)	22.64	22.64	22.45	21.77	21.82	21.76
EGPRS(8PSK, 4-Slot)	19.91	20.24	19.98	18.77	19.01	18.93
Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme. Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link						

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	24.37	24.58	24.59	21.60	21.60	21.56
GPRS (GMSK, 1-Slot)	24.30	24.50	24.51	21.29	21.42	21.32
GPRS (GMSK, 2-Slot)	25.19	25.15	25.14	22.01	21.72	21.20
GPRS (GMSK, 3-Slot)	24.96	24.87	24.85	22.18	21.86	21.13
GPRS (GMSK, 4-Slot)	24.07	23.88	23.81	21.08	20.74	20.16
EGPRS(8PSK, 1-Slot)	17.51	17.61	17.13	16.09	16.86	16.33
EGPRS(8PSK, 2-Slot)	18.72	18.77	18.28	18.00	18.82	18.24
EGPRS(8PSK, 3-Slot)	18.38	18.38	18.19	17.51	17.56	17.50
EGPRS(8PSK, 4-Slot)	16.90	17.23	16.97	15.76	16.00	15.92
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum Burst - averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB						

**WCDMA**

Band	WCDMA Band 2			WCDMA Band 5			WCDMA Band 4		
Channel	9262	9400	9538	4132	4183	4233	1312	1413	1513
Frequency (MHz)	1852.4	1880	1907.6	826.4	836.6	846.6	1712.6	1740	1752.4
RMC 12.2Kbps	22.98	22.99	22.85	21.90	22.57	23.13	23.66	23.66	23.61
HSDPA Subtest-1	22.00	21.76	21.46	21.32	20.98	21.01	23.54	22.98	22.87
HSDPA Subtest-2	21.26	22.11	21.90	20.49	21.85	21.57	22.45	23.25	22.80
HSDPA Subtest-3	21.64	21.40	21.95	21.38	21.18	22.40	22.29	22.47	23.11
HSDPA Subtest-4	21.76	21.38	21.46	22.13	21.79	22.21	22.86	22.57	22.41
HSUPA Subtest-1	21.95	21.92	21.73	20.96	21.24	20.74	23.21	23.34	22.99
HSUPA Subtest-2	21.83	21.36	22.02	21.28	21.01	21.68	23.28	22.92	22.96
HSUPA Subtest-3	22.06	21.73	22.01	21.75	21.73	21.78	23.13	22.97	23.12
HSUPA Subtest-4	21.69	21.62	21.87	21.70	22.24	22.28	22.99	22.90	23.03
HSUPA Subtest-5	21.68	21.90	21.84	21.78	22.34	21.89	22.81	23.01	22.99

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**2.4G WLAN**

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Conducted Power (dBm)	Output Power (mW)
802.11b	1	2412	16.53	44.98
	7	2437	16.55	45.19
	11	2462	16.83	48.19
802.11g	1	2412	17.33	54.08
	7	2437	17.66	58.34
	11	2462	17.78	59.98
802.11 n-HT20	1	2412	17.43	55.34
	7	2437	17.28	53.46
	11	2462	17.65	58.21
802.11 n-HT40	3	2422	17.74	59.43
	6	2437	17.84	60.81
	9	2452	17.75	59.57

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Conducted Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	1.12	1.29
	39	2441	1.44	1.39
	78	2480	1.45	1.40
$\pi/4$ -QPSK(2Mbps)	0	2402	0.52	1.13
	39	2441	0.72	1.18
	78	2480	0.71	1.18
8DPSK(3Mbps)	0	2402	0.45	1.11
	39	2441	0.76	1.19
	78	2480	0.75	1.19

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Conducted Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-1.79	0.66
	19	2440	-1.56	0.70
	39	2480	-1.61	0.69
GFSK(2Mbps)	0	2402	-1.79	0.66
	19	2440	-1.55	0.70
	39	2480	-1.58	0.70

**WLAN (5.2Gband)**

5.2G WLAN				
Mode	Channel Number	Frequency (MHz)	Total Power (dBm)	Output Power (mW)
802.11a	36	5180	11.58	14.39
	40	5200	11.36	13.68
	48	5240	11.87	15.38
802.11 n-HT20	36	5180	11.43	13.90
	40	5200	12.32	17.06
	48	5240	12.88	19.41
802.11 n-HT40	38	5190	11.65	14.62
	46	5230	12.11	16.26
802.11ac-VHT20	36	5180	11.5	14.13
	40	5200	12.27	16.87
	48	5240	12.78	18.97
802.11ac-VHT40	38	5190	11.85	15.31
	46	5230	12.14	16.37
802.11ac-VHT80	42	5210	11.85	15.31

WLAN (5.8Gband)

5.8G WLAN				
Mode	Channel Number	Frequency (MHz)	Total Power (dBm)	Output Power (mW)
802.11a	149	5745	11.21	13.21
	157	5785	11.77	15.03
	165	5825	11.6	14.45
802.11 n-HT20	149	5745	11.57	14.35
	157	5785	11.64	14.59
	165	5825	12.68	18.54
802.11 n-HT40	151	5755	11.35	13.65
	159	5795	11.56	14.32
802.11ac-VHT20	149	5745	11.05	12.74
	157	5785	11.73	14.89
	165	5825	12.27	16.87
802.11ac-VHT40	151	5755	12.01	15.89
	159	5795	11.8	15.14
802.11ac-VHT80	155	5775	11.13	12.97



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.99	24.11	24.01
1.4	1	2		25	24.15	24.11
1.4	1	5		24.98	24.37	23.96
1.4	3	0		24.81	24.11	24.02
1.4	3	1		24.81	24.13	24.05
1.4	3	2		24.72	24.32	23.98
1.4	6	0		24.15	23.61	23.59
1.4	1	0	16-QAM	24.31	23.2	23.59
1.4	1	2		24.38	23.11	23.61
1.4	1	5		24.32	23.38	23.59
1.4	3	0		23.7	23.12	23.85
1.4	3	1		23.71	23.09	23.8
1.4	3	2		23.7	23.42	23.82
1.4	6	0		22.81	22.23	22.82
3	1	0	QPSK	24.99	24.14	23.99
3	1	7		25	24.13	23.93
3	1	14		24.94	24.47	23.79
3	8	0		24.22	23.71	23.49
3	8	4		24.22	23.69	23.46
3	8	7		24.15	23.9	23.41
3	15	0		24.31	23.53	23.47
3	1	0	16-QAM	23.53	23.23	23.4
3	1	7		23.47	23.14	23.61
3	1	14		23.45	23.4	23.67
3	8	0		22.86	22	22.47
3	8	4		22.93	21.99	22.69
3	8	7		22.75	22.35	22.73
3	15	0		22.69	22.07	22.73



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.58	24.29	23.98
5	1	12		24.61	24.26	24.02
5	1	24		24.56	24.89	23.52
5	12	0		24.27	23.71	23.63
5	12	6		24.24	23.64	23.57
5	12	11		24.18	23.85	23.31
5	25	0		24.25	23.72	23.47
5	1	0	16-QAM	23.59	23.19	23.18
5	1	12		23.53	23.15	23.39
5	1	24		23.51	23.81	23.49
5	12	0		22.71	21.96	22.39
5	12	6		22.66	21.93	22.4
5	12	11		22.63	22.28	22.61
5	25	0		22.81	21.99	22.41
10	1	0	QPSK	24.87	24.18	23.96
10	1	24		24.96	24.16	24.25
10	1	49		24.77	24.66	24.02
10	25	0		24.12	23.66	23.56
10	25	12		24.21	23.71	23.77
10	25	24		24.09	24.23	23.77
10	50	0		24.19	23.71	23.78
10	1	0	16-QAM	23.49	23.82	23.04
10	1	24		23.42	23.69	23.5
10	1	49		23.33	24.11	23.84
10	25	0		22.72	22.13	22.07
10	25	12		22.68	22.11	22.26
10	25	24		22.65	22.71	22.43
10	50	0		22.66	22.07	22.26



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	25.01	24.26	24.19
15	1	37		24.85	24.1	24.29
15	1	74		24.58	24.55	23.85
15	36	0		24.19	23.69	23.23
15	36	18		24.1	23.51	23.53
15	36	39		24.02	24.12	23.78
15	75	0		24.12	23.55	23.52
15	1	0	16-QAM	23.52	23.8	23.37
15	1	38		23.34	23.61	23.36
15	1	75		23.16	23.94	23.58
15	36	0		22.62	22.29	21.8
15	36	18		22.63	22.14	22.07
15	36	39		22.51	22.78	22.44
15	75	0		22.59	22.07	22.06
20	1	0	QPSK	25.01	24.36	24.38
20	1	49		24.71	24.29	23.85
20	1	99		24.37	24.54	24
20	50	0		24.27	23.77	23.4
20	50	24		24.05	23.72	23.28
20	50	49		23.89	24	23.72
20	100	0		24.12	23.54	23.21
20	1	0	16-QAM	23.86	23.33	23.78
20	1	49		23.63	23.21	23.24
20	1	99		23.42	23.53	23.89
20	50	0		22.8	22.19	22.46
20	50	24		22.61	22.11	21.79
20	50	49		22.47	22.61	22.27
20	100	0		22.53	22.03	21.78



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.49	23.06	23.24
1.4	1	2		23.48	23.05	23.24
1.4	1	5		23.52	23.2	23.28
1.4	3	0		23.16	23.04	23.22
1.4	3	1		23.16	23.1	23.28
1.4	3	2		23.11	23.03	23.24
1.4	6	0		22.58	22.51	22.68
1.4	1	0	16-QAM	23.25	23.1	22.96
1.4	1	2		23.31	23.09	22.91
1.4	1	5		23.28	23.09	22.97
1.4	3	0		22	22.11	22.24
1.4	3	1		22.09	22.08	22.28
1.4	3	2		22.08	22.12	22.3
1.4	6	0		21.1	21.74	21.65
3	1	0	QPSK	23.4	23.03	23.27
3	1	7		23.38	23.22	23.19
3	1	14		23.29	23.07	23.32
3	8	0		22.64	22.6	22.57
3	8	4		22.71	22.64	22.65
3	8	7		22.56	22.6	22.66
3	15	0		22.67	22.58	22.65
3	1	0	16-QAM	22.34	23.01	22.98
3	1	7		22.3	23.06	22.91
3	1	14		22.29	23.03	22.92
3	8	0		21.18	21.09	21.9
3	8	4		21.18	21.59	21.88
3	8	7		21.6	21.63	21.67
3	15	0		20.88	21.6	21.6



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.01	23.25	23.25
5	1	12		22.95	23.17	23.33
5	1	24		22.91	23.19	23.29
5	12	0		22.64	22.58	22.66
5	12	6		22.55	22.52	22.66
5	12	11		22.55	22.61	22.62
5	25	0		22.54	22.59	22.65
5	1	0	16-QAM	22.57	22.69	22.55
5	1	12		22.54	22.63	22.47
5	1	24		22.48	22.72	22.6
5	12	0		21.07	20.97	21.24
5	12	6		21.52	21.45	21.76
5	12	11		21.56	21.41	21.7
5	25	0		21.67	21.46	21.63
10	1	0	QPSK	23.35	22.97	23.41
10	1	24		23.2	23.03	23.47
10	1	49		23.16	23.06	23.43
10	25	0		22.56	22.62	22.66
10	25	12		22.53	22.5	22.64
10	25	24		22.65	22.69	22.64
10	50	0		22.66	22.56	22.64
10	1	0	16-QAM	22.36	23.27	23.02
10	1	24		22.3	23.28	23.04
10	1	49		22.38	23.3	23.01
10	25	0		21.58	21.19	21.21
10	25	12		21.12	21.72	21.23
10	25	24		21.14	21.18	21.74
10	50	0		21.08	21.65	21.17



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.37	23	23.12
15	1	37		23.28	22.98	23.27
15	1	74		23.25	23.03	23.29
15	36	0		22.57	22.59	22.63
15	36	18		22.61	22.54	22.71
15	36	39		22.65	22.64	22.57
15	75	0		22.61	22.59	22.72
15	1	0	16-QAM	22.43	23.29	22.95
15	1	38		22.34	23.25	22.92
15	1	75		22.39	23.27	22.9
15	36	0		21.08	21.25	21.27
15	36	18		21.19	21.69	21.17
15	36	39		21.11	21.28	21.28
15	75	0		21.13	21.47	21.25
20	1	0	QPSK	23.23	23.15	23.32
20	1	49		23.09	23.18	23.37
20	1	99		23.14	23.24	23.34
20	50	0		22.62	22.57	22.52
20	50	24		22.58	22.64	22.56
20	50	49		22.57	22.59	22.75
20	100	0		22.61	22.59	22.72
20	1	0	16-QAM	22.71	22.96	22.66
20	1	49		22.77	22.97	22.69
20	1	99		22.77	23.07	22.76
20	50	0		21.13	21.13	21.16
20	50	24		21.21	21.65	21.29
20	50	49		21.15	21.2	21.21
20	100	0		21.13	21.66	21.24



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.95	24.58	24.53
1.4	1	2		24.93	24.57	24.52
1.4	1	5		24.95	24.51	24.51
1.4	3	0		24.73	24.53	24.55
1.4	3	1		24.73	24.59	24.62
1.4	3	2		24.69	24.56	24.59
1.4	6	0		24.24	24.11	24.02
1.4	1	0	16-QAM	24.4	24.49	24.25
1.4	1	2		24.31	24.46	24.22
1.4	1	5		24.3	24.6	24.23
1.4	3	0		23.75	23.63	23.6
1.4	3	1		23.78	23.57	23.57
1.4	3	2		23.77	23.53	23.54
1.4	6	0		22.7	22.57	22.68
3	1	0	QPSK	24.86	24.56	24.6
3	1	7		24.87	24.56	24.5
3	1	14		24.84	24.7	24.48
3	8	0		24.27	24.04	23.97
3	8	4		24.25	24.11	23.97
3	8	7		24.15	24.13	23.93
3	15	0		24.36	24.08	23.92
3	1	0	16-QAM	23.92	24.48	24.28
3	1	7		23.96	24.52	24.22
3	1	14		23.95	24.58	24.13
3	8	0		22.92	22.5	22.73
3	8	4		22.85	22.58	22.67
3	8	7		22.67	22.58	22.51
3	15	0		22.63	22.59	22.64



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.51	24.77	24.53
5	1	12		24.57	24.83	24.58
5	1	24		24.5	24.57	24.64
5	12	0		24.2	24.04	23.93
5	12	6		24.09	24.08	24.04
5	12	11		24.18	24.07	24.02
5	25	0		24.15	24.23	24.07
5	1	0	16-QAM	24.52	24.1	24.05
5	1	12		24.43	24.17	24.01
5	1	24		24.4	24.17	24.04
5	12	0		22.63	22.39	22.46
5	12	6		22.44	22.41	22.51
5	12	11		22.45	22.37	22.59
5	25	0		22.71	22.59	22.6
10	1	0	QPSK	24.88	24.63	24.79
10	1	24		24.87	24.61	24.56
10	1	49		24.84	24.45	24.66
10	25	0		24.07	24.16	24.05
10	25	12		24.03	24.14	23.97
10	25	24		24.13	24.1	24.02
10	50	0		24.1	24.22	24.04
10	1	0	16-QAM	23.9	24.52	24.33
10	1	24		23.91	24.64	24.27
10	1	49		23.93	24.62	24.17
10	25	0		22.64	22.56	22.49
10	25	12		22.62	22.63	22.48
10	25	24		22.56	22.5	22.63
10	50	0		22.6	22.67	22.57



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.28	22.1	22.09
5	1	12		23.29	22.02	22
5	1	24		23.11	21.98	22
5	12	0		22.87	21.61	21.62
5	12	6		22.7	21.56	21.59
5	12	11		22.69	21.57	21.57
5	25	0		22.78	21.6	21.6
5	1	0	16-QAM	22.75	21.23	21.55
5	1	12		22.69	21.15	21.51
5	1	24		22.61	21.22	21.48
5	12	0		21.36	20.24	20.06
5	12	6		21.37	20.19	20.01
5	12	11		21.34	20.2	20.16
5	25	0		21.21	20.01	20.34
10	1	0	QPSK	23.4	22.18	22.27
10	1	24		23.28	22.18	22.25
10	1	49		23.07	22.07	22.33
10	25	0		22.76	21.64	21.77
10	25	12		22.53	21.65	21.68
10	25	24		22.59	21.67	21.75
10	50	0		22.63	21.55	21.67
10	1	0	16-QAM	22.57	22.36	21.95
10	1	24		22.24	22.19	21.91
10	1	49		22.13	22.23	21.9
10	25	0		21.3	20.35	20.23
10	25	12		21.13	20.22	20.26
10	25	24		21.06	20.28	20.32
10	50	0		21.18	20.29	20.23



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.46	22.3	22.14
15	1	37		23.15	21.97	22.23
15	1	74		22.86	22.12	22.2
15	36	0		22.55	21.81	21.73
15	36	18		22.52	21.57	21.63
15	36	39		22.27	21.69	21.8
15	75	0		22.56	21.67	21.64
15	1	0	16-QAM	22.46	22.51	21.45
15	1	37		22.13	22.19	21.47
15	1	74		21.85	22.32	21.45
15	36	0		21.08	20.29	20.19
15	36	18		20.98	20.12	20.11
15	36	39		20.79	20.18	20.22
15	75	0		20.96	20.29	20.34
20	1	0	QPSK	23.28	22.48	22.33
20	1	49		22.86	22.1	22.44
20	1	99		22.52	22.18	22.44
20	50	0		22.57	21.85	21.69
20	50	24		22.33	21.58	21.78
20	50	49		22.21	21.6	21.73
20	100	0		22.27	21.62	21.77
20	1	0	16-QAM	23.11	22.46	22.12
20	1	49		22.67	22.22	22.25
20	1	99		22.32	22.27	22.33
20	50	0		21.13	20.31	20.18
20	50	24		20.94	20.22	20.26
20	50	49		20.71	20.21	20.35
20	100	0		20.81	20.15	20.33



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	25.05	24.46	24.77
1.4	1	2		25.03	24.53	24.7
1.4	1	5		25.08	24.49	24.61
1.4	3	0		24.82	24.5	24.84
1.4	3	1		24.86	24.49	24.65
1.4	3	2		24.82	24.48	24.58
1.4	6	0		24.32	24.02	24.17
1.4	1	0	16-QAM	24.47	23.83	23.87
1.4	1	2		24.39	24.02	23.89
1.4	1	5		24.44	23.96	23.84
1.4	3	0		23.8	23.58	23.79
1.4	3	1		23.77	23.51	23.69
1.4	3	2		23.81	23.5	23.67
1.4	6	0		23.28	23.13	22.83
3	1	0	QPSK	25.07	24.5	24.79
3	1	7		25.01	24.52	24.7
3	1	14		25	24.47	24.64
3	8	0		24.33	24.04	24.1
3	8	4		24.34	24.11	23.87
3	8	7		24.28	23.98	24.08
3	15	0		24.31	23.99	24.14
3	1	0	16-QAM	23.46	23.86	23.94
3	1	7		23.42	24	23.9
3	1	14		23.52	23.97	23.89
3	8	0		23.2	22.38	22.79
3	8	4		23.23	22.88	22.84
3	8	7		23.35	22.9	22.75
3	15	0		23.09	22.87	22.71



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.73	24.67	24.64
5	1	12		24.79	24.6	24.7
5	1	24		24.51	24.85	24.66
5	12	0		24.25	24.01	24.11
5	12	6		24.29	24.05	24.13
5	12	11		24.4	24.03	24.15
5	25	0		24.5	24.12	24.16
5	1	0	16-QAM	23.76	23.67	23.6
5	1	12		23.69	23.74	23.73
5	1	24		23.43	23.8	23.56
5	12	0		23.22	22.44	22.99
5	12	6		23.15	22.87	22.66
5	12	11		23.12	22.82	22.69
5	25	0		23.32	22.96	22.8
10	1	0	QPSK	25.01	24.75	24.72
10	1	24		24.77	24.57	24.81
10	1	49		24.8	24.69	24.82
10	25	0		24.46	24.06	23.98
10	25	12		24.04	24.05	24.07
10	25	24		24	24.01	24.2
10	50	0		24.13	24.2	24.03
10	1	0	16-QAM	23.56	24.19	23.76
10	1	24		23.32	23.96	23.76
10	1	49		23.31	24.06	23.96
10	25	0		23.19	22.54	22.97
10	25	12		22.96	23.06	22.6
10	25	24		22.58	22.65	22.69
10	50	0		22.95	23.07	22.62



LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.66	24.49	24.54
5	1	12		24.6	24.61	24.54
5	1	24		24.77	24.44	24.57
5	12	0		24.03	24.04	24.01
5	12	6		23.97	23.91	24.1
5	12	11		24.08	24.08	24.12
5	25	0		24.03	24.02	24.08
5	1	0	16-QAM	23.38	22.96	23.79
5	1	12		23.37	23.02	23.95
5	1	24		23.38	23.14	23.87
5	12	0		22.5	22.85	22.79
5	12	6		22.47	22.42	22.51
5	12	11		22.96	22.98	22.52
5	25	0		22.42	22.29	22.65
10	1	0	QPSK	24.72	24.51	24.69
10	1	24		24.70	24.57	24.77
10	1	49		24.90	24.62	24.78
10	25	0		23.97	23.99	24.10
10	25	12		23.95	24.03	24.04
10	25	24		24.07	24.1	24.17
10	50	0		24.08	24.04	24.08
10	1	0	16-QAM	23.27	24.01	23.73
10	1	24		23.27	23.92	23.73
10	1	49		23.49	24.19	23.71
10	25	0		22.42	22.89	22.93
10	25	12		22.91	22.48	22.50
10	25	24		22.91	22.93	22.65
10	50	0		22.92	22.49	22.43



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.48	22.2	22.34
5	1	12		22.52	22.19	22.19
5	1	24		22.53	22.3	22.25
5	12	0		21.8	21.7	21.77
5	12	6		21.92	21.75	21.75
5	12	11		21.81	21.56	21.72
5	25	0		21.82	21.66	21.75
5	1	0	16-QAM	22.01	21.54	21.87
5	1	12		21.94	21.57	21.77
5	1	24		21.54	21.57	21.57
5	12	0		20.42	20.04	20.33
5	12	6		20.41	20.09	20.26
5	12	11		20.24	20.09	20.27
5	25	0		20.51	20.29	20.23
10	1	0	QPSK	22.24	22.14	22.32
10	1	24		22.38	22.08	22.16
10	1	49		22.32	22.27	22.13
10	25	0		21.79	21.72	21.73
10	25	12		21.91	21.59	21.71
10	25	24		21.82	21.6	21.7
10	50	0		21.97	21.66	21.79
10	1	0	16-QAM	21.75	21.86	21.84
10	1	24		21.75	22	21.84
10	1	49		21.83	21.87	21.75
10	25	0		20.31	20.18	20.48
10	25	12		20.45	20.28	20.46
10	25	24		20.45	20.3	20.41
10	50	0		20.49	20.21	20.42



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.29	22.26	22.35
15	1	37		22.31	22.25	22.37
15	1	74		22.35	22.07	22.23
15	36	0		21.85	21.71	21.9
15	36	18		21.8	21.66	21.96
15	36	39		21.85	21.63	21.85
15	75	0		21.85	21.71	21.87
15	1	0	16-QAM	21.77	21.94	22.34
15	1	37		21.74	21.92	22.15
15	1	74		21.8	21.79	22.17
15	36	0		20.39	20.23	20.42
15	36	18		20.39	20.21	20.32
15	36	39		20.43	20.26	20.3
15	75	0		20.38	20.38	20.53
20	1	0	QPSK	22.22	22.19	22.66
20	1	49		22.37	22.19	22.48
20	1	99		22.34	22.25	22.42
20	50	0		21.77	21.75	21.97
20	50	24		21.88	21.61	21.89
20	50	49		21.88	21.56	21.92
20	100	0		21.96	21.74	22.05
20	1	0	16-QAM	21.76	21.64	22.19
20	1	49		21.76	21.68	21.92
20	1	99		21.83	21.61	22.28
20	50	0		20.4	20.32	20.7
20	50	24		20.56	20.31	20.61
20	50	49		20.54	20.27	20.63
20	100	0		20.5	20.24	20.68



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.67	23.19	23.59
1.4	1	2		23.73	23.2	23.7
1.4	1	5		23.67	23.25	23.73
1.4	3	0		23.46	23.36	23.62
1.4	3	1		23.37	23.42	23.63
1.4	3	2		23.45	23.48	23.5
1.4	6	0		22.79	22.88	22.98
1.4	1	0	16-QAM	22.97	22.56	22.59
1.4	1	2		23.08	22.6	22.61
1.4	1	5		22.92	22.57	22.54
1.4	3	0		22.2	22.33	22.72
1.4	3	1		22.23	22.36	22.71
1.4	3	2		22.26	22.36	22.74
1.4	6	0		21.39	21.7	21.82
3	1	0	QPSK	23.69	23.3	23.72
3	1	7		23.69	23.23	23.68
3	1	14		23.7	23.32	23.65
3	8	0		22.86	22.97	23.02
3	8	4		22.85	23.02	22.99
3	8	7		22.95	23	23.05
3	15	0		22.94	22.98	23.05
3	1	0	16-QAM	22.07	22.59	22.59
3	1	7		22.02	22.68	22.58
3	1	14		22.09	22.67	22.61
3	8	0		21.5	21.42	21.7
3	8	4		21.47	21.46	21.68
3	8	7		21.57	21.44	21.71
3	15	0		21.32	21.52	21.73



LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.32	23.65	23.64
5	1	12		23.35	23.59	23.57
5	1	24		23.35	23.68	23.62
5	12	0		22.84	23.03	23.1
5	12	6		22.95	22.97	23.1
5	12	11		22.91	23.13	23.06
5	25	0		23.03	23.09	23.04
5	1	0	16-QAM	22.32	22.6	22.55
5	1	12		22.74	22.58	22.5
5	1	24		22.73	22.58	22.6
5	12	0		21.31	21.39	21.56
5	12	6		21.32	21.42	21.56
5	12	11		21.32	21.41	21.59
5	25	0		21.57	21.45	21.57
10	1	0	QPSK	23.65	23.33	23.73
10	1	24		23.64	23.35	23.71
10	1	49		23.63	23.43	23.78
10	25	0		22.97	23.07	22.95
10	25	12		22.87	22.98	23
10	25	24		22.99	23.13	22.99
10	50	0		22.95	23.03	23.11
10	1	0	16-QAM	22.09	23.24	22.74
10	1	24		22.23	23.3	22.93
10	1	49		22.31	23.3	22.87
10	25	0		21.52	21.56	21.5
10	25	12		21.5	21.53	21.58
10	25	24		21.92	21.51	21.59
10	50	0		21.45	21.57	21.56




LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.64	23.36	23.84
15	1	37		23.62	23.43	23.8
15	1	74		23.68	23.47	23.76
15	36	0		22.97	23.08	23.12
15	36	18		23.03	22.99	23.08
15	36	39		23	23.02	23.1
15	75	0		23.03	22.98	23.07
15	1	0	16-QAM	22.14	23.22	22.99
15	1	38		22.22	23.24	23
15	1	75		22.33	23.22	23.05
15	36	0		21.52	21.47	21.59
15	36	18		21.91	21.66	21.5
15	36	39		21.51	21.6	21.57
15	75	0		21.91	21.5	21.52
20	1	0	QPSK	23.56	23.46	23.69
20	1	49		23.56	23.51	23.71
20	1	99		23.58	23.59	23.8
20	50	0		22.94	23.08	23.05
20	50	24		23.03	22.98	23.08
20	50	49		23.05	23	23.08
20	100	0		23.01	23	23.08
20	1	0	16-QAM	22.48	22.7	23.1
20	1	49		22.68	22.68	23.11
20	1	99		22.64	22.79	23.16
20	50	0		21.51	21.47	21.58
20	50	24		21.54	21.5	21.6
20	50	49		21.5	21.59	21.57
20	100	0		21.38	21.42	21.54


11. EUT and Test Setup Photo

11.1 EUT Photo

Front side

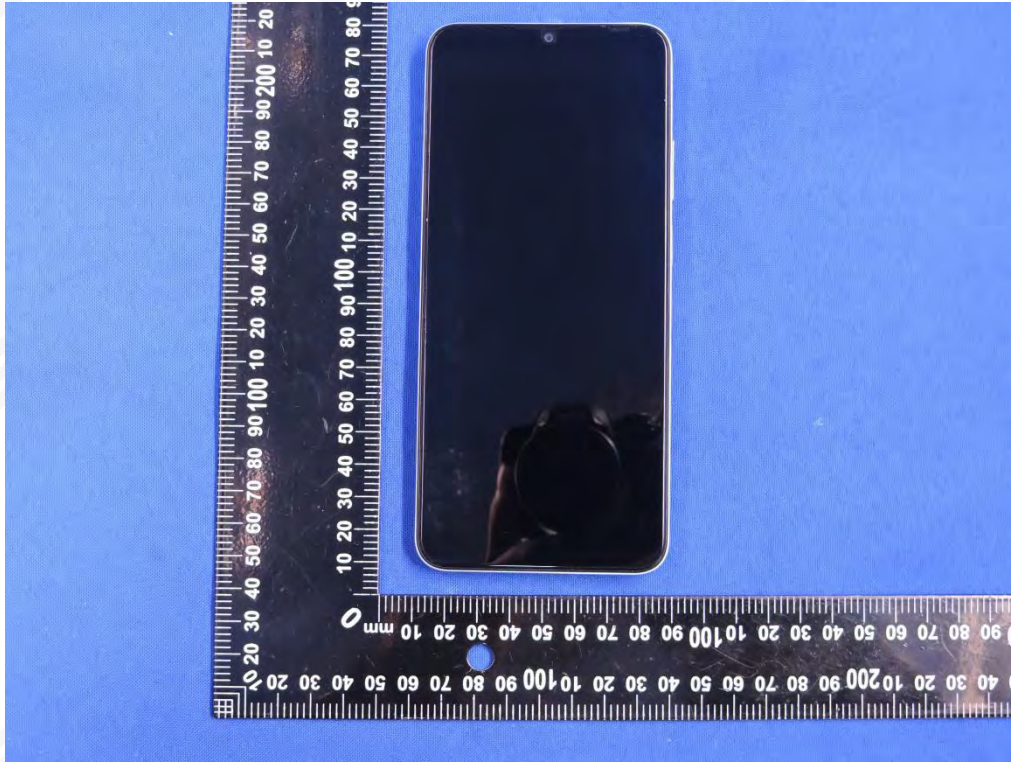


Back side

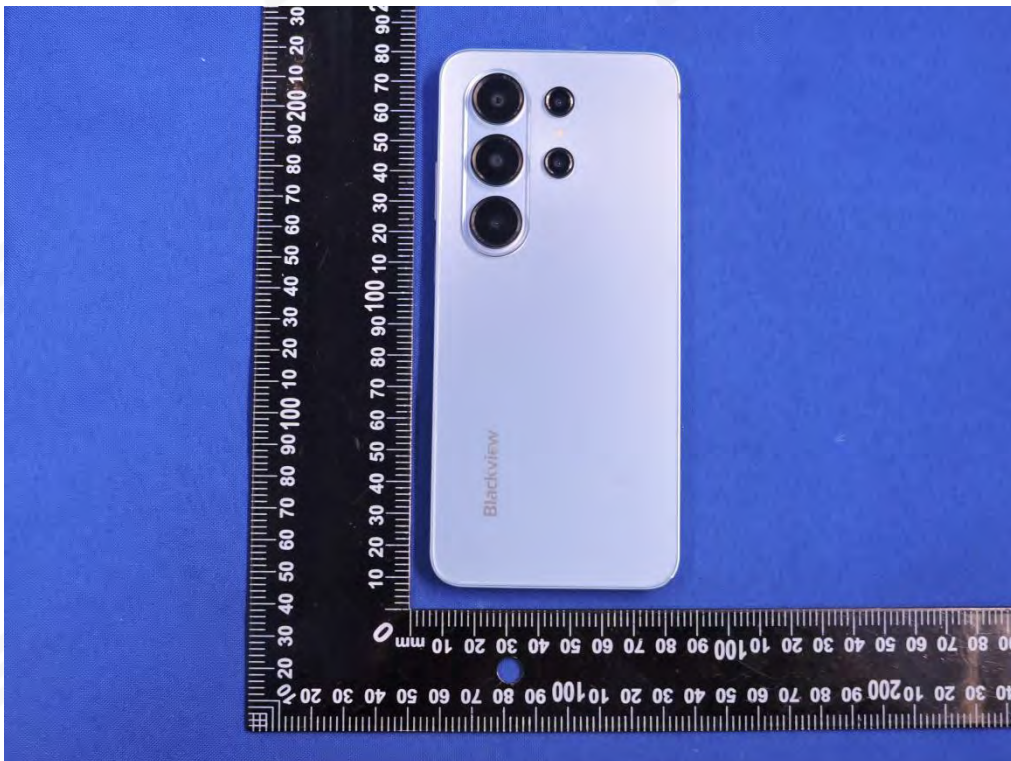


Top side




Bottom side

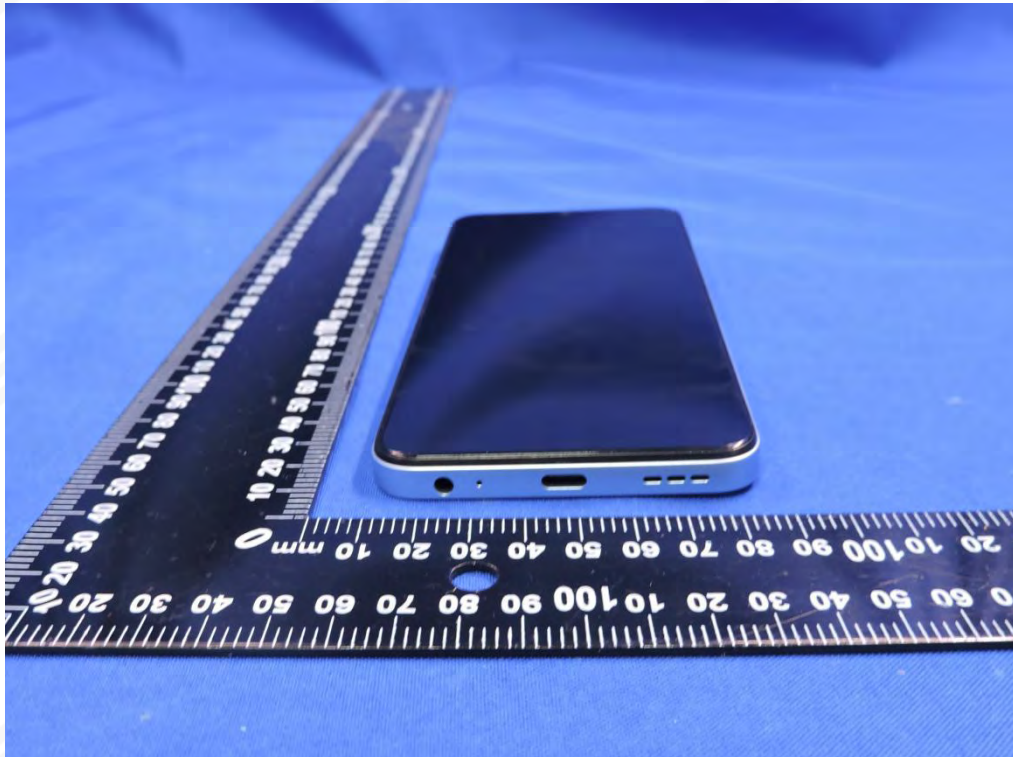


Left side

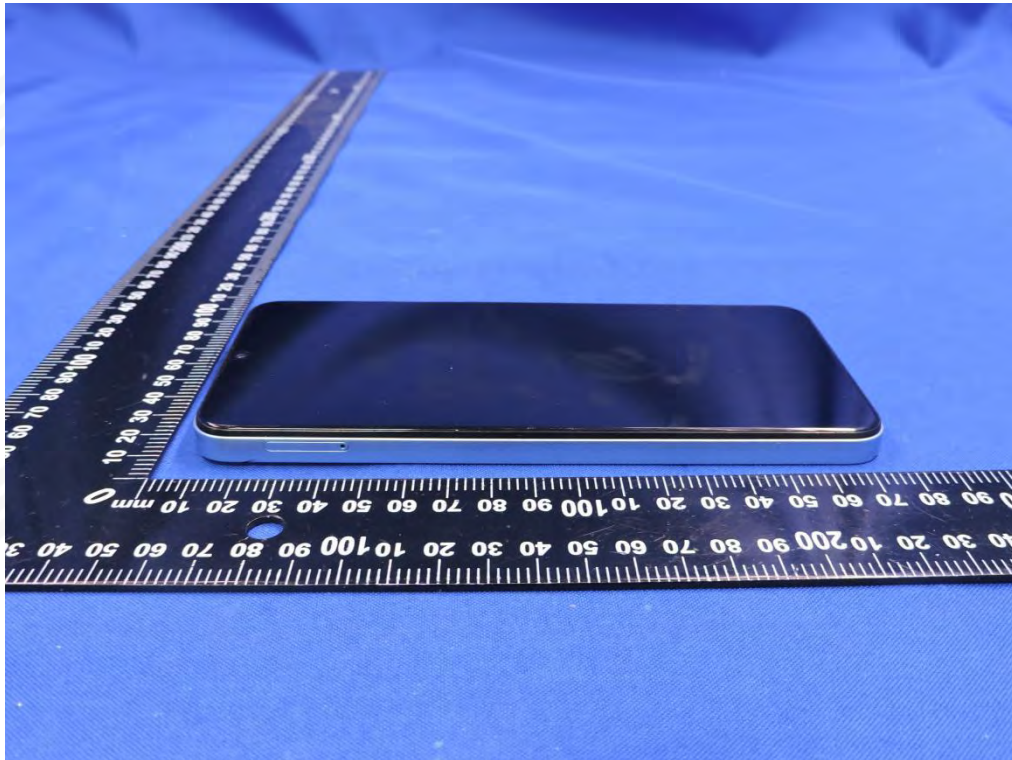

Right side

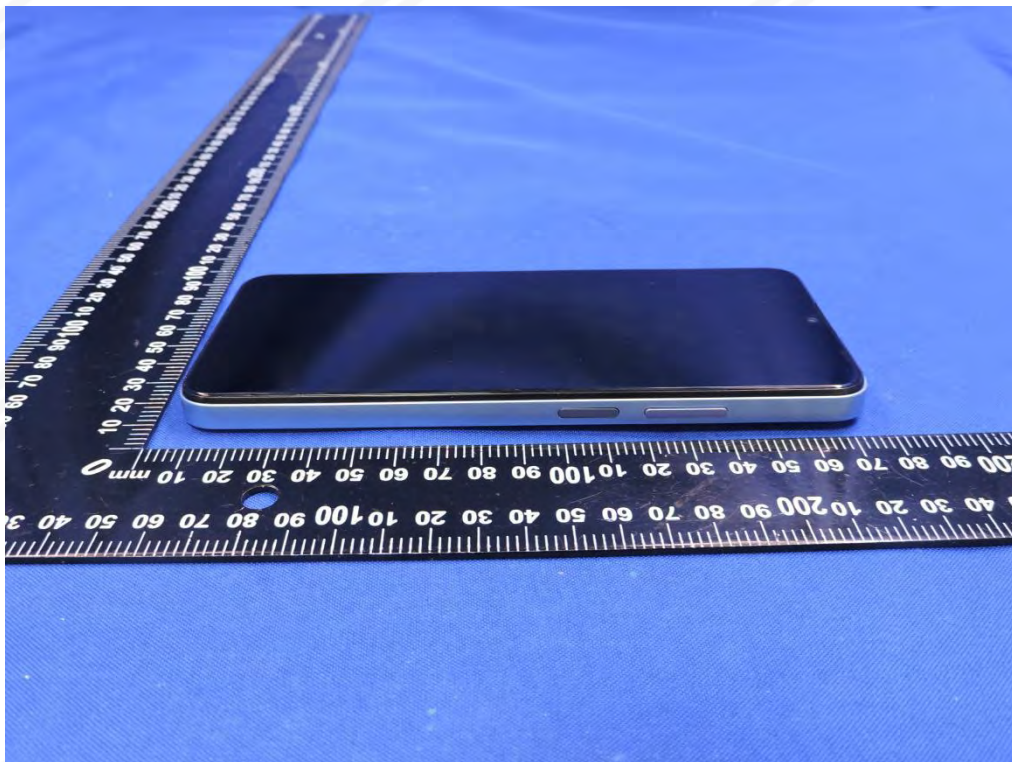

Right Touch

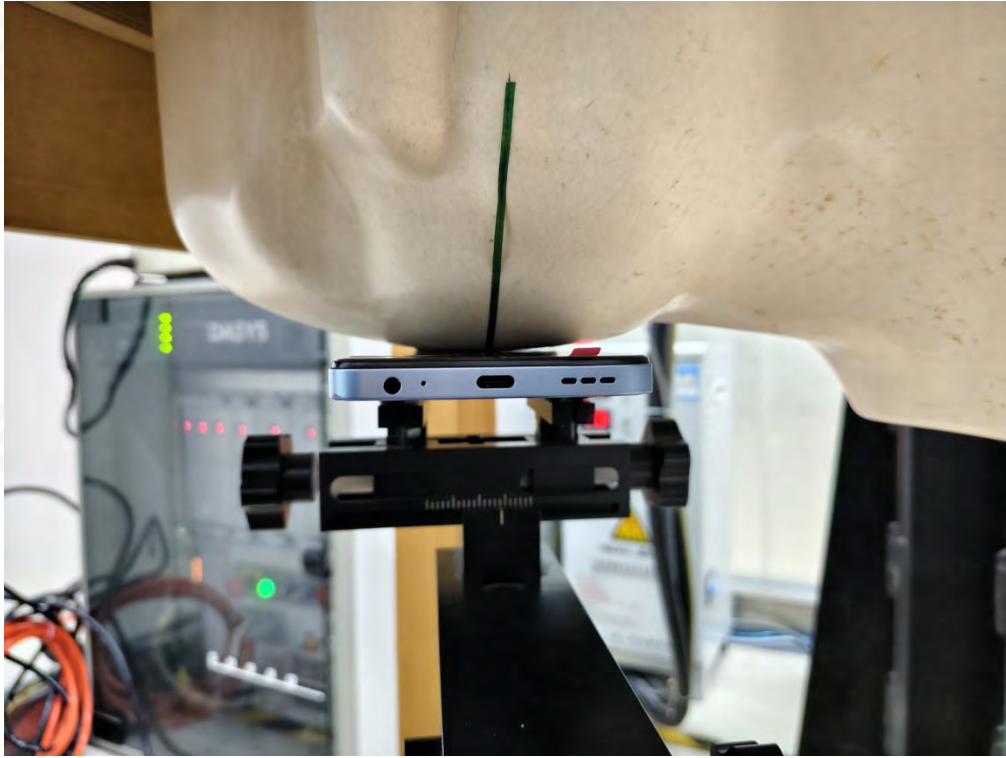

Right Tilt



Left Touch



Left Tilt



Limbs Front side(separation distance is 0mm)



Limbs Back side(separation distance is 0mm)



Limbs Left side(separation distance is 0mm)



Limbs Right side(separation distance is 0mm)



Limbs Bottom side(separation distance is 0mm)



Limbs Top side(separation distance is 0mm)



Body Front side(separation distance is 10mm)



Body Back side(separation distance is 10mm)



Body Left side(separation distance is 10mm)



Body Right side(separation distance is 10mm)



Body Bottom side(separation distance is 10mm)




Body Top side(separation distance is 10mm)





Liquid depth (15 cm)

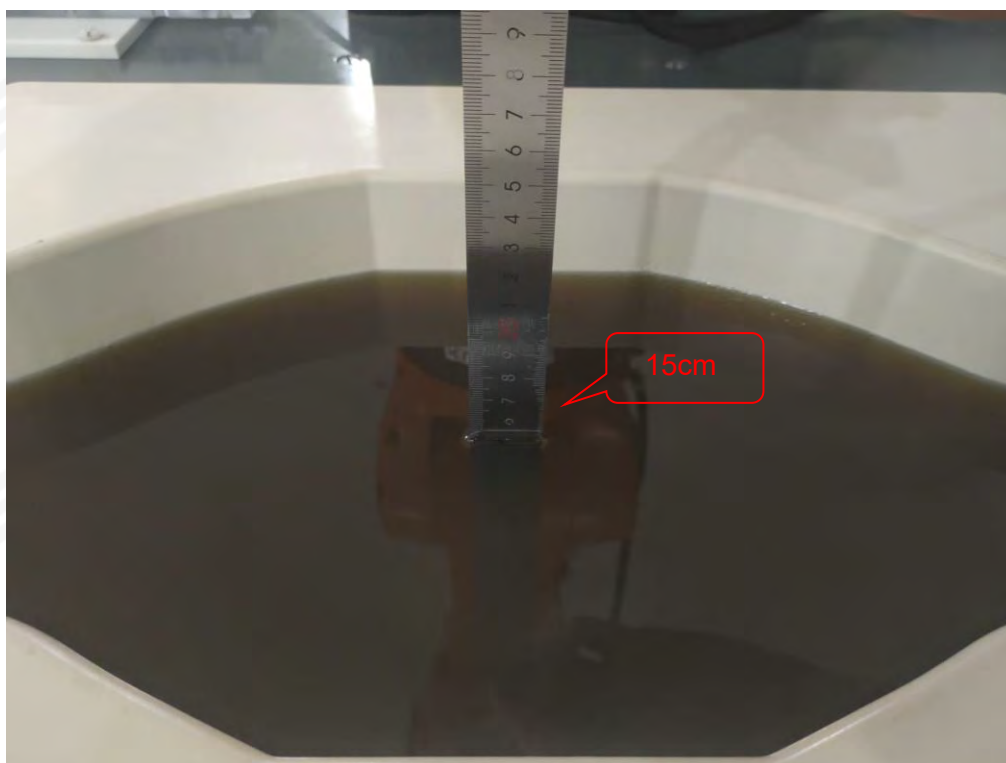



12. SAR Result Summary

12.1 Head SAR

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas. No.
GSM850	N/A	GPRS Data-4 Slot	N/A	N/A	Right Cheek	824.2	0.144	1.48	31.50	31.21	1.069	0.154	1
					Right Tilt	824.2	0.081	1.77	31.50	31.21	1.069	0.087	/
					Left Cheek	824.2	0.135	0.17	31.50	31.21	1.069	0.144	/
					Left Tilt	824.2	0.078	-3.35	31.50	31.21	1.069	0.083	/
GSM1900	N/A	GPRS Data-4 Slot	N/A	N/A	Right Cheek	1850.2	1.040	-3.39	26.50	26.44	1.014	1.054	4
					Right Cheek	1880	0.963	2.10	26.50	26.12	1.091	1.051	/
					Right Cheek	1909.8	0.947	-2.84	25.50	25.39	1.026	0.971	/
					Right Tilt	1850.2	0.452	-0.01	26.50	26.44	1.014	0.458	/
					Left Cheek	1850.2	0.761	-3.39	26.50	26.44	1.014	0.772	/
					Left Tilt	1850.2	0.425	-1.24	26.50	26.44	1.014	0.431	/
WCDMA Band II	N/A	RMC	N/A	N/A	Right Cheek	1852.4	0.913	1.85	23.00	22.98	1.005	0.917	/
					Right Cheek	1880	0.948	2.09	23.00	22.99	1.002	0.950	7
					Right Cheek	1907.6	0.879	-1.75	23.00	22.85	1.035	0.910	/
					Right Tilt	1880	0.505	-1.24	23.00	22.99	1.002	0.506	/
					Left Cheek	1880	0.778	-2.69	23.00	22.99	1.002	0.780	/
					Left Tilt	1880	0.481	1.98	23.00	22.99	1.002	0.482	/
WCDMA Band IV	N/A	RMC	N/A	N/A	Right Cheek	1712.6	0.971	-2.14	22.00	21.90	1.023	0.994	/
					Right Cheek	1740	0.963	1.84	23.00	22.57	1.104	1.063	/
					Right Cheek	1752.4	1.030	-2.98	23.50	23.13	1.089	1.122	10
					Right Tilt	1752.4	0.546	3.69	23.50	23.13	1.089	0.595	/
					Left Cheek	1752.4	0.723	-0.91	23.50	23.13	1.089	0.787	/
					Left Tilt	1752.4	0.410	2.63	23.50	23.13	1.089	0.446	/
WCDMA Band V	N/A	RMC	N/A	N/A	Right Cheek	836.6	0.132	-1.25	24.00	23.66	1.081	0.143	13
					Right Tilt	836.6	0.062	0.82	24.00	23.66	1.081	0.067	/
					Left Cheek	836.6	0.113	-1.27	24.00	23.66	1.081	0.122	/
					Left Tilt	836.6	0.058	1.95	24.00	23.66	1.081	0.063	/
2.4G WLAN	N/A	802.11b	N/A	N/A	Right Cheek	2462	0.077	-3.01	17.00	16.83	1.040	0.080	16
					Right Tilt	2462	0.031	1.46	17.00	16.83	1.040	0.032	/
					Left Cheek	2462	0.069	-0.39	17.00	16.83	1.040	0.072	/
					Left Tilt	2462	0.035	3.95	17.00	16.83	1.040	0.036	/
5.2G WLAN	N/A	802.11 n-HT20	N/A	N/A	Right Cheek	5240	0.354	-1.91	13.00	12.88	1.028	0.364	19



					Right Tilt	5240	0.188	0.44	13.00	12.88	1.028	0.193	/
					Left Cheek	5240	0.329	1.23	13.00	12.88	1.028	0.338	/
					Left Tilt	5240	0.162	2.35	13.00	12.88	1.028	0.167	/
5.8G WLAN	N/A	802.11 n-HT20	N/A	N/A	Right Cheek	5825	0.246	-3.66	13.00	12.68	1.076	0.265	22
					Right Tilt	5825	0.128	-2.02	13.00	12.68	1.076	0.138	/
					Left Cheek	5825	0.201	0.26	13.00	12.68	1.076	0.216	/
					Left Tilt	5825	0.105	3.80	13.00	12.68	1.076	0.113	/
LTE Band 2	20M	QPSK	1	0	Right Cheek	1860	0.852	0.22	25.5	25.01	1.119	0.954	25
			1	0	Right Cheek	1880	0.821	-2.12	24.5	24.36	1.033	0.848	/
			1	0	Right Cheek	1900	0.817	1.98	24.5	24.38	1.028	0.840	/
			50	0	Right Cheek	1860	0.756	1.77	24.5	24.27	1.054	0.797	/
			1	0	Right Tilt	1860	0.445	-3.60	25.5	25.01	1.119	0.498	/
			50	0	Right Tilt	1860	0.421	1.99	24.5	24.27	1.054	0.444	/
			1	0	Left Cheek	1860	0.766	-1.02	25.5	25.01	1.119	0.857	/
			1	0	Left Cheek	1880	0.751	-2.68	24.5	24.36	1.033	0.776	/
			1	0	Left Cheek	1900	0.769	1.98	24.5	24.38	1.028	0.791	/
			50	0	Left Cheek	1860	0.737	3.61	24.5	24.27	1.054	0.777	/
			1	0	Left Tilt	1860	0.418	-2.83	25.5	25.01	1.119	0.468	/
			50	0	Left Tilt	1860	0.402	-0.24	24.5	24.27	1.054	0.424	/
LTE Band 4	20M	QPSK	1	49	Right Cheek	1745	0.618	1.05	23.5	23.37	1.030	0.637	28
			50	49	Right Cheek	1745	0.607	-0.14	23	22.75	1.059	0.643	/
			1	49	Right Tilt	1745	0.385	-3.74	23.5	23.37	1.030	0.397	/
			50	49	Right Tilt	1745	0.361	3.49	23	22.75	1.059	0.382	/
			1	49	Left Cheek	1745	0.591	2.47	23.5	23.37	1.030	0.609	/
			50	49	Left Cheek	1745	0.584	3.80	23	22.75	1.059	0.619	/
			1	49	Left Tilt	1745	0.336	-3.67	23.5	23.37	1.030	0.346	/
			50	49	Left Tilt	1745	0.327	-2.06	23	22.75	1.059	0.346	/
LTE Band 5	10M	QPSK	1	0	Right Cheek	829	0.131	3.55	25	24.88	1.028	0.135	31
			25	0	Right Cheek	836.5	0.116	2.58	24.5	24.16	1.081	0.125	/
			1	0	Right Tilt	829	0.071	-1.73	25	24.88	1.028	0.073	/
			25	0	Right Tilt	836.5	0.053	-3.61	24.5	24.16	1.081	0.057	/
			1	0	Left Cheek	829	0.106	-0.04	25	24.88	1.028	0.109	/
			25	0	Left Cheek	836.5	0.093	2.86	24.5	24.16	1.081	0.101	/
			1	0	Left Tilt	829	0.044	1.90	25	24.88	1.028	0.045	/
			25	0	Left Tilt	836.5	0.031	2.84	24.5	24.16	1.081	0.034	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	2510	0.547	-3.14	23.5	23.28	1.052	0.575	34



			50	0	Right Cheek	2510	0.518	3.44	23	22.57	1.104	0.572	/
			1	0	Right Tilt	2510	0.330	-1.90	23.5	23.28	1.052	0.347	/
			50	0	Right Tilt	2510	0.305	1.36	23	22.57	1.104	0.337	/
			1	0	Left Cheek	2510	0.521	-2.57	23.5	23.28	1.052	0.548	/
			50	0	Left Cheek	2510	0.506	2.88	23	22.57	1.104	0.559	/
			1	0	Left Tilt	2510	0.311	-2.50	23.5	23.28	1.052	0.327	/
			50	0	Left Tilt	2510	0.286	-1.44	23	22.57	1.104	0.316	/
LTE Band 12	10M	QPSK	1	0	Right Cheek	704	0.147	-2.23	25.5	25.01	1.119	0.165	37
			25	0	Right Cheek	704	0.116	2.12	24.5	24.46	1.009	0.117	/
			1	0	Right Tilt	704	0.071	-1.46	25.5	25.01	1.119	0.079	/
			25	0	Right Tilt	704	0.063	3.06	24.5	24.46	1.009	0.064	/
			1	0	Left Cheek	704	0.125	1.32	25.5	25.01	1.119	0.140	/
			25	0	Left Cheek	704	0.108	-2.05	24.5	24.46	1.009	0.109	/
			1	0	Left Tilt	704	0.055	-2.65	25.5	25.01	1.119	0.062	/
			25	0	Left Tilt	704	0.042	-0.83	24.5	24.46	1.009	0.042	/
LTE Band 17	10M	QPSK	1	49	Right Cheek	709	0.147	-3.03	25	24.9	1.023	0.150	40
			25	24	Right Cheek	711	0.135	-0.69	24.5	24.17	1.079	0.146	/
			1	49	Right Tilt	709	0.088	-1.17	25	24.9	1.023	0.090	/
			25	24	Right Tilt	711	0.065	-3.09	24.5	24.17	1.079	0.070	/
			1	49	Left Cheek	709	0.117	3.66	25	24.9	1.023	0.120	/
			25	24	Left Cheek	711	0.099	1.02	24.5	24.17	1.079	0.107	/
			1	49	Left Tilt	709	0.042	-2.46	25	24.9	1.023	0.043	/
			25	24	Left Tilt	711	0.038	-0.05	24.5	24.17	1.079	0.041	/
LTE Band 41	20M	QPSK	1	0	Right Cheek	2680	0.277	3.50	23	22.66	1.081	0.300	43
			50	0	Right Cheek	2680	0.236	2.59	22	21.97	1.007	0.238	/
			1	0	Right Tilt	2680	0.146	-3.62	23	22.66	1.081	0.158	/
			50	0	Right Tilt	2680	0.130	2.19	22	21.97	1.007	0.131	/
			1	0	Left Cheek	2680	0.256	1.96	23	22.66	1.081	0.277	/
			50	0	Left Cheek	2680	0.210	1.96	22	21.97	1.007	0.211	/
			1	0	Left Tilt	2680	0.150	-0.03	23	22.66	1.081	0.162	/
			50	0	Left Tilt	2680	0.132	2.01	22	21.97	1.007	0.133	/
LTE Band 66	20M	QPSK	1	99	Right Cheek	1770	0.660	-2.93	24	23.8	1.047	0.691	46
			50	49	Right Cheek	1770	0.623	-1.10	23.5	23.08	1.102	0.686	/
			1	99	Right Tilt	1770	0.410	-2.53	24	23.8	1.047	0.429	/
			50	49	Right Tilt	1770	0.385	2.53	23.5	23.08	1.102	0.424	/
			1	99	Left Cheek	1770	0.593	1.70	24	23.8	1.047	0.621	/



			50	49	Left Cheek	1770	0.556	-1.54	23.5	23.08	1.102	0.612	/
			1	99	Left Tilt	1770	0.334	-0.10	24	23.8	1.047	0.350	/
			50	49	Left Tilt	1770	0.327	1.32	23.5	23.08	1.102	0.360	/

Note:

1. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.096** W/Kg for Head)
3. Per EN IEC/IEEE 62209-1528 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg

**12.2 Body-worn and Hotspot SAR**

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas. No.
GSM850	N/A	GPRS Data-4 Slot	N/A	N/A	Front Side	824.2	0.120	-0.10	31.50	31.21	1.069	0.128	/
					Back Side	824.2	0.147	3.66	31.50	31.21	1.069	0.157	2
					Left Side	824.2	0.038	3.33	31.50	31.21	1.069	0.041	/
					Right Side	824.2	0.105	-1.00	31.50	31.21	1.069	0.112	/
					Top Side	824.2	0.061	-2.28	31.50	31.21	1.069	0.065	/
					Bottom Side	824.2	0.105	-2.30	31.50	31.21	1.069	0.112	/
GSM1900	N/A	GPRS Data-4 Slot	N/A	N/A	Front Side	1850.2	0.305	0.43	26.50	26.44	1.014	0.309	/
					Back Side	1850.2	0.338	-0.59	26.50	26.44	1.014	0.343	5
					Left Side	1850.2	0.281	0.65	26.50	26.44	1.014	0.285	/
					Right Side	1850.2	0.094	3.39	26.50	26.44	1.014	0.095	/
					Top Side	1850.2	0.225	0.90	26.50	26.44	1.014	0.228	/
WCDMA Band II	N/A	RMC	N/A	N/A	Front Side	1880	0.625	-0.22	23.00	22.99	1.002	0.626	/
					Back Side	1880	0.682	3.85	23.00	22.99	1.002	0.684	8
					Left Side	1880	0.513	-0.69	23.00	22.99	1.002	0.514	/
					Top Side	1880	0.521	3.37	23.00	22.99	1.002	0.522	/
WCDMA Band IV	N/A	RMC	N/A	N/A	Front Side	1752.4	0.318	1.54	23.50	23.13	1.089	0.346	/
					Back Side	1752.4	0.349	3.39	23.50	23.13	1.089	0.380	11
					Left Side	1752.4	0.302	-1.86	23.50	23.13	1.089	0.329	/
					Top Side	1752.4	0.283	-3.62	23.50	23.13	1.089	0.308	/
WCDMA Band V	N/A	RMC	N/A	N/A	Front Side	836.6	0.115	0.99	24.00	23.66	1.081	0.124	/
					Back Side	836.6	0.130	3.71	24.00	23.66	1.081	0.141	14
					Right Side	836.6	0.108	-3.38	24.00	23.66	1.081	0.117	/
					Bottom Side	836.6	0.084	1.68	24.00	23.66	1.081	0.091	/
2.4GHz WLAN	N/A	802.11b	N/A	N/A	Front Side	2462	0.044	2.29	17.00	16.83	1.040	0.046	/
					Back Side	2462	0.049	1.88	17.00	16.83	1.040	0.051	17
					Right Side	2462	0.036	-3.48	17.00	16.83	1.040	0.037	/
					Top Side	2462	0.033	3.26	17.00	16.83	1.040	0.034	/
5.2GHz WLAN	N/A	802.11 n-HT20	N/A	N/A	Front Side	5240	0.231	2.95	13.00	12.88	1.028	0.237	/
					Back Side	5240	0.251	-3.34	13.00	12.88	1.028	0.258	20
					Right Side	5240	0.213	1.71	13.00	12.88	1.028	0.219	/
					Top Side	5240	0.190	-1.37	13.00	12.88	1.028	0.195	/



5.8GHz WLAN	N/A	802.11 n-HT20	N/A	N/A	Front Side	5825	0.267	-0.58	13.00	12.68	1.076	0.287	/
					Back Side	5825	0.289	1.58	13.00	12.68	1.076	0.311	23
					Right Side	5825	0.235	-3.49	13.00	12.68	1.076	0.253	/
					Top Side	5825	0.208	-3.29	13.00	12.68	1.076	0.224	/
LTE Band 2	20M	QPSK	1	0	Front side	1860	0.763	3.49	25.5	25.01	1.119	0.854	/
			1	0	Front side	1880	0.735	-3.69	24.5	24.36	1.033	0.759	/
			1	0	Front side	1900	0.742	-1.39	24.5	24.38	1.028	0.763	/
			50	0	Front side	1860	0.725	-2.77	24.5	24.27	1.054	0.764	/
			1	0	Back Side	1860	0.859	3.79	25.5	25.01	1.119	0.962	26
			1	0	Back Side	1880	0.833	-3.61	24.5	24.36	1.033	0.860	/
			1	0	Back Side	1900	0.84	3.88	24.5	24.38	1.028	0.864	/
			50	0	Back Side	1860	0.726	-3.43	24.5	24.27	1.054	0.765	/
			1	0	Left Side	1860	0.693	-3.27	25.5	25.01	1.119	0.776	/
			50	0	Left Side	1860	0.681	0.54	24.5	24.27	1.054	0.718	/
			1	0	Right Side	1860	0.86	-0.82	25.5	25.01	1.119	0.963	/
			50	0	Right Side	1860	0.831	0.95	24.5	24.27	1.054	0.876	/
			1	0	Top Side	1860	0.676	-1.07	25.5	25.01	1.119	0.757	/
			50	0	Top Side	1860	0.651	-0.95	24.5	24.27	1.054	0.686	/
LTE Band 4	20M	QPSK	1	0	Front side	1745	0.363	-2.29	23.5	23.37	1.030	0.374	/
			50	0	Front side	1745	0.350	-2.94	23	22.75	1.059	0.371	/
			1	0	Back Side	1745	0.409	2.28	23.5	23.37	1.030	0.421	29
			50	0	Back Side	1745	0.387	0.84	23	22.75	1.059	0.410	/
			1	0	Left Side	1745	0.349	-1.27	23.5	23.37	1.030	0.360	/
			50	0	Left Side	1745	0.327	3.69	23	22.75	1.059	0.346	/
			1	0	Top Side	1745	0.320	-1.74	23.5	23.37	1.030	0.330	/
			50	0	Top Side	1745	0.302	3.77	23	22.75	1.059	0.320	/
LTE Band 5	10M	QPSK	1	0	Front side	829	0.105	-0.27	25	24.88	1.028	0.108	/
			25	0	Front side	836.5	0.093	1.73	24.5	24.16	1.081	0.101	/
			1	0	Back Side	829	0.136	3.75	25	24.88	1.028	0.140	32
			25	0	Back Side	836.5	0.115	1.13	24.5	24.16	1.081	0.124	/
			1	0	Right Side	829	0.095	-1.40	25	24.88	1.028	0.098	/
			25	0	Right Side	836.5	0.088	0.81	24.5	24.16	1.081	0.095	/
			1	0	Bottom Side	829	0.090	-1.84	25	24.88	1.028	0.093	/
			25	0	Bottom Side	836.5	0.076	-1.81	24.5	24.16	1.081	0.082	/



LTE Band 7	10M	QPSK	1	0	Front side	2510	0.163	-2.76	23.5	23.28	1.052	0.171	/
			50	0	Front side	2510	0.150	-2.64	23	22.57	1.104	0.166	/
			1	0	Back Side	2510	0.199	3.47	23.5	23.28	1.052	0.209	35
			50	0	Back Side	2510	0.170	0.54	23	22.57	1.104	0.188	/
			1	0	Left Side	2510	0.152	4.00	23.5	23.28	1.052	0.160	/
			50	0	Left Side	2510	0.137	2.07	23	22.57	1.104	0.151	/
			1	0	Top Side	2510	0.149	0.15	23.5	23.28	1.052	0.157	/
			50	0	Top Side	2510	0.130	-3.85	23	22.57	1.104	0.144	/
LTE Band 12	10M	QPSK	1	0	Front side	704	0.190	-1.95	25.5	25.01	1.119	0.213	/
			25	0	Front side	704	0.172	-0.90	24.5	24.46	1.009	0.174	/
			1	0	Back Side	704	0.196	3.12	25.5	25.01	1.119	0.219	38
			25	0	Back Side	704	0.188	-3.95	24.5	24.46	1.009	0.190	/
			1	0	Left Side	704	0.075	-2.67	25.5	25.01	1.119	0.084	/
			25	0	Left Side	704	0.066	2.32	24.5	24.46	1.009	0.067	/
			1	0	Right Side	704	0.183	-2.67	25.5	25.01	1.119	0.205	/
			25	0	Right Side	704	0.165	2.32	24.5	24.46	1.009	0.167	/
			1	0	Bottom Side	704	0.178	1.04	25.5	25.01	1.119	0.199	/
			25	0	Bottom Side	704	0.151	-0.47	24.5	24.46	1.009	0.152	/
LTE Band 17	10M	QPSK	1	0	Front side	709	0.181	0.35	25	24.9	1.023	0.185	/
			25	0	Front side	711	0.162	0.64	24.5	24.17	1.079	0.175	/
			1	0	Back Side	709	0.194	2.41	25	24.9	1.023	0.199	41
			25	0	Back Side	711	0.173	-1.31	24.5	24.17	1.079	0.187	/
			1	0	Right Side	709	0.170	3.59	25	24.9	1.023	0.174	/
			25	0	Right Side	711	0.153	-2.73	24.5	24.17	1.079	0.165	/
			1	0	Bottom Side	709	0.168	3.81	25	24.9	1.023	0.172	/
			25	0	Bottom Side	711	0.140	-1.17	24.5	24.17	1.079	0.151	/
LTE Band 41	20M	QPSK	1	0	Front side	2680	0.080	0.30	23	22.66	1.081	0.087	/
			50	0	Front side	2680	0.071	-2.49	22	21.97	1.007	0.071	/
			1	0	Back Side	2680	0.083	2.34	23	22.66	1.081	0.090	44
			50	0	Back Side	2680	0.079	-2.59	22	21.97	1.007	0.080	/
			1	0	Left Side	2680	0.075	2.24	23	22.66	1.081	0.081	/
			50	0	Left Side	2680	0.066	2.53	22	21.97	1.007	0.066	/
			1	0	Top Side	2680	0.069	-0.95	23	22.66	1.081	0.075	/
			50	0	Top Side	2680	0.047	2.64	22	21.97	1.007	0.047	/



LTE Band 66	20M	QPSK	1	0	Front side	1770	0.467	-3.82	24	23.8	1.047	0.489	/
			50	0	Front side	1770	0.449	2.94	23.5	23.08	1.102	0.495	/
			1	0	Back Side	1770	0.491	-2.63	24	23.8	1.047	0.514	47
			50	0	Back Side	1770	0.455	0.46	23.5	23.08	1.102	0.501	/
			1	0	Left Side	1770	0.460	2.92	24	23.8	1.047	0.482	/
			50	0	Left Side	1770	0.431	-3.96	23.5	23.08	1.102	0.475	/
			1	0	Top Side	1770	0.465	-3.16	24	23.8	1.047	0.487	/
			50	0	Top Side	1770	0.417	0.52	23.5	23.08	1.102	0.459	/

Note:

- The test separation of all above table is 10mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For DECT: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.061**W/Kg for Body)
- When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



12.3 Limbs SAR

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaling Factor	Scaled SAR (W/Kg)	Meas. No.
GSM850	N/A	GPRS Data-4 Slot	N/A	N/A	Front Side	824.2	0.319	-2.39	31.50	31.21	1.069	0.341	/
					Back Side	824.2	0.341	0.85	31.50	31.21	1.069	0.365	3
					Left Side	824.2	0.115	0.94	31.50	31.21	1.069	0.123	/
					Right Side	824.2	0.321	-3.92	31.50	31.21	1.069	0.343	/
					Top Side	824.2	0.042	2.54	31.50	31.21	1.069	0.045	/
					Bottom Side	824.2	0.305	-1.60	31.50	31.21	1.069	0.326	/
GSM1900	N/A	GPRS Data-4 Slot	N/A	N/A	Front Side	1850.2	0.715	4.00	26.50	26.44	1.014	0.725	/
					Back Side	1850.2	0.742	1.54	26.50	26.44	1.014	0.752	6
					Left Side	1850.2	0.707	-0.71	26.50	26.44	1.014	0.717	/
					Right Side	1850.2	0.335	2.94	26.50	26.44	1.014	0.340	/
					Top Side	1850.2	0.694	1.80	26.50	26.44	1.014	0.704	/
WCDMA Band II	N/A	RMC	N/A	N/A	Front Side	1880	1.027	3.62	23.00	22.99	1.002	1.029	/
					Back Side	1880	1.380	-2.81	23.00	22.99	1.002	1.383	9
					Left Side	1880	0.963	-2.87	23.00	22.99	1.002	0.965	/
					Top Side	1880	0.879	1.42	23.00	22.99	1.002	0.881	/
WCDMA Band IV	N/A	RMC	N/A	N/A	Front Side	1752.4	0.810	-1.00	23.50	23.13	1.089	0.882	/
					Back Side	1752.4	0.830	-0.57	23.50	23.13	1.089	0.904	12
					Left Side	1752.4	0.783	-2.18	23.50	23.13	1.089	0.853	/
					Top Side	1752.4	0.757	-1.14	23.50	23.13	1.089	0.824	/
WCDMA Band V	N/A	RMC	N/A	N/A	Front Side	836.6	0.201	-3.71	24.00	23.66	1.081	0.217	/
					Back Side	836.6	0.228	2.03	24.00	23.66	1.081	0.247	15
					Right Side	836.6	0.182	0.05	24.00	23.66	1.081	0.197	/
					Bottom Side	836.6	0.168	-2.40	24.00	23.66	1.081	0.182	/
2.4GHz WLAN	N/A	802.11b	N/A	N/A	Front Side	2462	0.202	-2.00	17.00	16.83	1.040	0.210	/
					Back Side	2462	0.219	3.45	17.00	16.83	1.040	0.228	18
					Right Side	2462	0.187	0.70	17.00	16.83	1.040	0.194	/
					Top Side	2462	0.190	2.76	17.00	16.83	1.040	0.198	/
5.2GHz WLAN	N/A	802.11 n-HT20	N/A	N/A	Front Side	5240	0.121	1.11	13.00	12.88	1.028	0.124	/
					Back Side	5240	0.140	2.65	13.00	12.88	1.028	0.144	21
					Right Side	5240	0.119	1.49	13.00	12.88	1.028	0.122	/
					Top Side	5240	0.103	3.61	13.00	12.88	1.028	0.106	/



5.8GHz WLAN	N/A	802.11 n-HT20	N/A	N/A	Front Side	5825	0.202	0.04	13.00	12.68	1.076	0.217	/
					Back Side	5825	0.214	-0.40	13.00	12.68	1.076	0.230	24
					Right Side	5825	0.174	3.02	13.00	12.68	1.076	0.187	/
					Top Side	5825	0.167	-1.88	13.00	12.68	1.076	0.180	/
LTE Band 2	20M	QPSK	1	0	Front side	1860	1.690	-1.16	25.5	25.01	1.119	1.892	/
			50	0	Front side	1860	1.48	3.91	24.5	24.27	1.054	1.560	/
			1	0	Back Side	1860	1.85	0.07	25.5	25.01	1.119	2.071	27
			1	0	Back Side	1880	1.77	0.29	24.5	24.36	1.033	1.828	/
			1	0	Back Side	1900	1.68	0.13	24.5	24.38	1.028	1.727	/
			50	0	Back Side	1860	1.560	2.21	24.5	24.27	1.054	1.645	/
			1	0	Left Side	1860	1.39	-0.82	25.5	25.01	1.119	1.556	/
			50	0	Left Side	1860	1.200	0.95	24.5	24.27	1.054	1.265	/
			1	0	Right Side	1860	0.86	-0.82	25.5	25.01	1.119	0.963	/
			50	0	Right Side	1860	0.831	0.95	24.5	24.27	1.054	0.876	/
			1	0	Top Side	1860	1.44	-0.46	25.5	25.01	1.119	1.612	/
			50	0	Top Side	1860	1.170	-1.71	24.5	24.27	1.054	1.234	/
LTE Band 4	20M	QPSK	1	0	Front side	1745	0.855	2.89	23.5	23.37	1.030	0.881	/
			50	0	Front side	1745	0.837	-0.62	23	22.75	1.059	0.887	/
			1	0	Back Side	1745	0.907	-1.67	23.5	23.37	1.030	0.935	30
			50	0	Back Side	1745	0.876	3.28	23	22.75	1.059	0.928	/
			1	0	Left Side	1745	0.868	-1.68	23.5	23.37	1.030	0.894	/
			50	0	Left Side	1745	0.824	3.52	23	22.75	1.059	0.873	/
			1	0	Top Side	1745	0.831	-3.30	23.5	23.37	1.030	0.856	/
			50	0	Top Side	1745	0.815	-0.44	23	22.75	1.059	0.863	/
LTE Band 5	10M	QPSK	1	0	Front side	829	0.205	-3.46	25	24.88	1.028	0.211	/
			25	0	Front side	836.5	0.183	1.52	24.5	24.16	1.081	0.198	/
			1	0	Back Side	829	0.229	0.96	25	24.88	1.028	0.235	33
			25	0	Back Side	836.5	0.217	-1.09	24.5	24.16	1.081	0.235	/
			1	0	Right Side	829	0.180	-3.73	25	24.88	1.028	0.185	/
			25	0	Right Side	836.5	0.165	1.77	24.5	24.16	1.081	0.178	/
			1	0	Bottom Side	829	0.177	2.35	25	24.88	1.028	0.182	/
			25	0	Bottom Side	836.5	0.154	-0.75	24.5	24.16	1.081	0.167	/
LTE Band 7	10M	QPSK	1	0	Front side	2510	0.557	-3.43	23.5	23.28	1.052	0.586	/
			50	0	Front side	2510	0.516	1.25	23	22.57	1.104	0.570	/



			1	0	Back Side	2510	0.617	0.40	23.5	23.28	1.052	0.649	36
			50	0	Back Side	2510	0.606	-0.26	23	22.57	1.104	0.669	/
			1	0	Left Side	2510	0.539	1.45	23.5	23.28	1.052	0.567	/
			50	0	Left Side	2510	0.523	-0.62	23	22.57	1.104	0.577	/
			1	0	Top Side	2510	0.505	-0.18	23.5	23.28	1.052	0.531	/
			50	0	Top Side	2510	0.481	1.91	23	22.57	1.104	0.531	/
LTE Band 12	10M	QPSK	1	0	Front side	704	0.271	0.90	25.5	25.01	1.119	0.303	/
			25	0	Front side	704	0.257	1.57	24.5	24.46	1.009	0.259	/
			1	0	Back Side	704	0.302	1.67	25.5	25.01	1.119	0.338	39
			25	0	Back Side	704	0.279	-0.92	24.5	24.46	1.009	0.282	/
			1	0	Left Side	704	0.113	0.14	25.5	25.01	1.119	0.126	/
			25	0	Left Side	704	0.102	-3.80	24.5	24.46	1.009	0.103	/
			1	0	Right Side	704	0.260	0.14	25.5	25.01	1.119	0.291	/
			25	0	Right Side	704	0.246	-3.80	24.5	24.46	1.009	0.248	/
			1	0	Bottom Side	704	0.250	1.41	25.5	25.01	1.119	0.280	/
			25	0	Bottom Side	704	0.225	-0.44	24.5	24.46	1.009	0.227	/
LTE Band 17	10M	QPSK	1	0	Front side	709	0.273	-1.22	25	24.9	1.023	0.279	/
			25	0	Front side	711	0.268	-2.85	24.5	24.17	1.079	0.289	/
			1	0	Back Side	709	0.304	3.57	25	24.9	1.023	0.311	42
			25	0	Back Side	711	0.299	0.00	24.5	24.17	1.079	0.323	/
			1	0	Right Side	709	0.267	-0.11	25	24.9	1.023	0.273	/
			25	0	Right Side	711	0.243	3.35	24.5	24.17	1.079	0.262	/
			1	0	Bottom Side	709	0.255	2.46	25	24.9	1.023	0.261	/
			25	0	Bottom Side	711	0.224	0.19	24.5	24.17	1.079	0.242	/
LTE Band 41	20M	QPSK	1	0	Front side	2680	0.242	-3.46	23	22.66	1.081	0.262	/
			50	0	Front side	2680	0.227	0.40	22	21.97	1.007	0.229	/
			1	0	Back Side	2680	0.270	-1.15	23	22.66	1.081	0.292	45
			50	0	Back Side	2680	0.251	-0.10	22	21.97	1.007	0.253	/
			1	0	Left Side	2680	0.231	2.39	23	22.66	1.081	0.250	/
			50	0	Left Side	2680	0.205	2.02	22	21.97	1.007	0.206	/
			1	0	Top Side	2680	0.218	-3.59	23	22.66	1.081	0.236	/
			50	0	Top Side	2680	0.196	0.42	22	21.97	1.007	0.197	/
LTE Band 66	20M	QPSK	1	0	Front side	1770	1.063	1.41	24	23.8	1.047	1.113	/
			50	0	Front side	1770	0.937	-3.96	23.5	23.08	1.102	1.032	/



			1	0	Back Side	1770	1.270	-0.12	24	23.8	1.047	1.330	48
			50	0	Back Side	1770	1.105	-3.60	23.5	23.08	1.102	1.217	/
			1	0	Left Side	1770	0.902	1.16	24	23.8	1.047	0.945	/
			50	0	Left Side	1770	0.864	-3.17	23.5	23.08	1.102	0.952	/
			1	0	Top Side	1770	0.858	-1.63	24	23.8	1.047	0.898	/
			50	0	Top Side	1770	0.821	-2.93	23.5	23.08	1.102	0.904	/

Note:

5. The test separation of all above table is 0mm.
6. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For DECT: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
7. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.284** W/Kg for Body)
8. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

**12.3 Repeated SAR**

Band	Mode	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
GSM1900	GPRS Data-4 Slot	Right Cheek	1850.2	1.014	-1.13	26.5	26.44	1.028	-
		Right Cheek	1880	0.945	3.21	26.5	26.12	1.031	-
		Right Cheek	1909.8	0.943	-0.03	25.5	25.39	0.968	-
GSM1900	GPRS Data-4 Slot	Right Cheek	1852.4	0.877	-3.61	23	22.98	0.881	-
		Right Cheek	1880	0.928	-2.92	23	22.99	0.930	-
		Right Cheek	1907.6	0.843	-3.58	23	22.85	0.873	-
WCDMA Band IV	RMC	Right Cheek	1712.6	0.971	-0.33	22	21.9	0.994	-
		Right Cheek	1740	0.963	0.92	23	22.57	1.063	-
		Right Cheek	1752.4	1.030	-2.44	23.5	23.13	1.122	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	1860	0.830	3.51	25.5	25.01	0.929	-
			1	0	Right Cheek	1880	0.809	-0.66	24.5	24.36	0.836	-
			1	0	Right Cheek	1900	0.799	2.71	24.5	24.38	0.821	-
			1	0	Left Cheek	1860	0.752	1.05	25.5	25.01	0.841	-
			1	0	Front side	1860	0.740	-1.96	25.5	25.01	0.829	-
			1	0	Back Side	1860	0.858	-2.89	25.5	25.01	0.960	-
			1	0	Back Side	1880	0.805	1.61	24.5	24.36	0.832	-
			1	0	Back Side	1900	0.820	-2.93	24.5	24.38	0.843	-
			1	0	Back Side	1860	1.740	-2.93	25.5	25.01	1.948	-

**12.4 Repeated SAR measurement**

Band	Mode	Test Position	Freq.	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(W/kg)	2nd Repeated SAR 1g	Ratio
GSM1900	GPRS Data-4 Slot	Right Cheek	1850.2	1.04	1.014	1.026	-	-	-
		Right Cheek	1880	0.963	0.945	1.020	-	-	-
		Right Cheek	1909.8	0.947	0.943	1.004	-	-	-
WCDMA Band II	RMC	Right Cheek	1852.4	0.913	0.877	1.041	-	-	-
		Right Cheek	1880	0.948	0.928	1.021	-	-	-
		Right Cheek	1907.6	0.879	0.843	1.042	-	-	-
WCDMA Band IV	RMC	Right Cheek	1712.6	0.971	0.934	1.040	-	-	-
		Right Cheek	1740	0.963	0.957	1.006	-	-	-
		Right Cheek	1752.4	1.03	0.983	1.048	-	-	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Measured SAR 1g(W/kg) 1g (W/Kg)	1 st Repeated SAR 1g	Ratio	Original Measured	2nd Repeated SAR 1g	Ratio
LTE Band 2	20M	QPSK	1	0	Right Cheek	1860	0.852	0.830	1.027	-	-	-
			1	0	Right Cheek	1880	0.821	0.809	1.015	-	-	-
			1	0	Right Cheek	1900	0.817	0.799	1.023	-	-	-
			1	0	Left Cheek	1860	0.766	0.752	1.019	-	-	-
			1	0	Front side	1860	0.763	0.740	1.031	-	-	-
			1	0	Back Side	1860	0.859	0.858	1.002	-	-	-
			1	0	Back Side	1880	0.833	0.805	1.034	-	-	-
			1	0	Back Side	1900	0.84	0.820	1.024	-	-	-
			1	0	Back Side	1860	1.85	1.740	1.063	-	-	-

**12.5 Simultaneous Multi-band Transmission Evaluation**

Application Simultaneous Transmission information:

Position	Simultaneous State
Head	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth
Body	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth
Limbs	1. GSM + 2.4GHz WLAN/5G WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN/5G WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN/5G WLAN
	6. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion: a) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f (GHz) /x] W/kg for test separation distances ≤ 50 mm; Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR. b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Estimated SAR		Maximum Average Power		Dis.	Frequency(GHz)	Stand alone SAR(1&10g) [W/kg]
		dBm	mW			
BT	Head	1.45	1.396	5	2.48	0.059
	Limbs			5	2.48	0.059
	Body			10	2.48	0.029



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Head	GSM	1.054	1.134
		2.4G WLAN	0.080	
	Body	GSM	0.343	0.394
		2.4G WLAN	0.051	
GSM + Bluetooth	Head	GSM	1.054	1.113
		Bluetooth	0.059	
	Body	GSM	0.343	0.372
		Bluetooth	0.029	
GSM + 5G WLAN	Head	GSM	1.054	1.418
		5G WLAN	0.364	
	Body	GSM	0.343	0.654
		5G WLAN	0.311	
WCDMA + 2.4G WLAN	Head	WCDMA	1.122	1.202
		2.4G WLAN	0.080	
	Body	WCDMA	0.684	0.735
		2.4G WLAN	0.051	
WCDMA + Bluetooth	Head	WCDMA	1.122	1.181
		Bluetooth	0.059	
	Body	WCDMA	0.684	0.713
		Bluetooth	0.029	
WCDMA + 5G WLAN	Head	WCDMA	1.122	1.486
		5G WLAN	0.364	
	Body	WCDMA	0.684	0.995
		5G WLAN	0.311	
LTE + 2.4G WLAN	Head	LTE	0.954	1.034
		2.4G WLAN	0.080	
	Body	LTE	0.962	1.013
		2.4G WLAN	0.051	
LTE + Bluetooth	Head	LTE	0.954	1.013
		Bluetooth	0.059	
	Body	LTE	0.962	0.991
		Bluetooth	0.029	
LTE + 5G WLAN	Head	LTE	0.954	1.318
		5G WLAN	0.364	
	Body	LTE	0.962	1.273
		5G WLAN	0.311	



Simultaneous Mode	Position	Mode	Max. 10-g SAR	10-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Limbs	GSM	0.752	0.971
		2.4G WLAN	0.219	
GSM + Bluetooth	Limbs	GSM	0.752	0.811
		Bluetooth	0.059	
GSM + 5G WLAN	Limbs	GSM	0.752	0.982
		5G WLAN	0.230	
WCDMA + 2.4G WLAN	Limbs	WCDMA	1.383	1.602
		2.4G WLAN	0.219	
WCDMA + Bluetooth	Limbs	WCDMA	1.383	1.442
		Bluetooth	0.059	
WCDMA + 5G WLAN	Limbs	WCDMA	1.383	1.613
		5G WLAN	0.230	
LTE + 2.4G WLAN	Limbs	LTE	2.071	2.290
		2.4G WLAN	0.219	
LTE + Bluetooth	Limbs	LTE	2.071	2.130
		Bluetooth	0.059	
LTE + 5G WLAN	Limbs	LTE	2.071	2.301
		5G WLAN	0.230	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2023.07.04	2026.07.03
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2023.07.04	2026.07.03
1800MHz Dipole	MVG	SID1800	5023-DIP1G800-747	2023.12.20	2026.12.19
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2023.09.14	2026.09.13
2450MHz Dipole	MVG	SID2450	SN 30/14 DIP2G450-335	2023.07.04	2026.07.03
2600MHz Dipole	MVG	SID2600	SN 30/14 DIP2G600-336	2023.07.04	2026.07.03
Waveguide	MVG	SWG5500	SN 13/14 WGA32	2023.07.04	2026.07.03
Data Acquisition Electronics DAE _x	SPEAG	DAE3	428	2025.09.08	2026.09.07
E-field Probe	SPEAG	EX3DV4	3806	2025-09-11	2025-09-10
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2025.09.15	2026.09.14
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Attenuator	Agilent	HXT-10-8-SMA	240327017	2025-02-22	2026-02-21
Directional coupler	Xi'an Xingbo	XBOH-OA08-20dB	211123-4-3	2025-02-22	2026-02-21
Network Analyzer	Agilent	E5071C	MY46520378	2025-09-26	2026-09-24
Multi Meter	Keithley	Multi Meter 2000	4050073	2025-09-22	2026-09-21
Signal Generator	Agilent	N5182A	MY50140530	2025-09-26	2026-09-25
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2025-02-22	2026-02-21
Wireless Communication Test Set	R&S	CMW500	156324	2025-09-25	2026-09-24
Power Amplifier	DESAY	WCS-DLNA50M8G50G1	CSKJLNA231227A	2025-09-29	2026-09-28
Power Meter	R&S	NRP	100510	2025-09-25	2026-09-24
Power Sensor	R&S	NRP-Z11	101919	2025-09-25	2026-09-24
Power Sensor	Keysight	U2021XA	MY56280002	2025-09-25	2026-09-24
Temperature hygrometer	TOPRIE	TP502V4-P	6700000124198	2025.10.09	2026.10.08
Thermograph	Elitech	RC-4	S/N EF7176501537	2025.10.17	2026.10.16

Appendix A. System Validation Plots

System Check 750MHz

Test Data:2026-01-23

DUT: Dipole 750 MHz

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.57$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 750 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.908 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.55 V/m; Power Drift = 1.22 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.8713 W/kg; SAR(10 g) = 0.514 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.2%

Maximum value of SAR (measured) = 1.05 W/kg

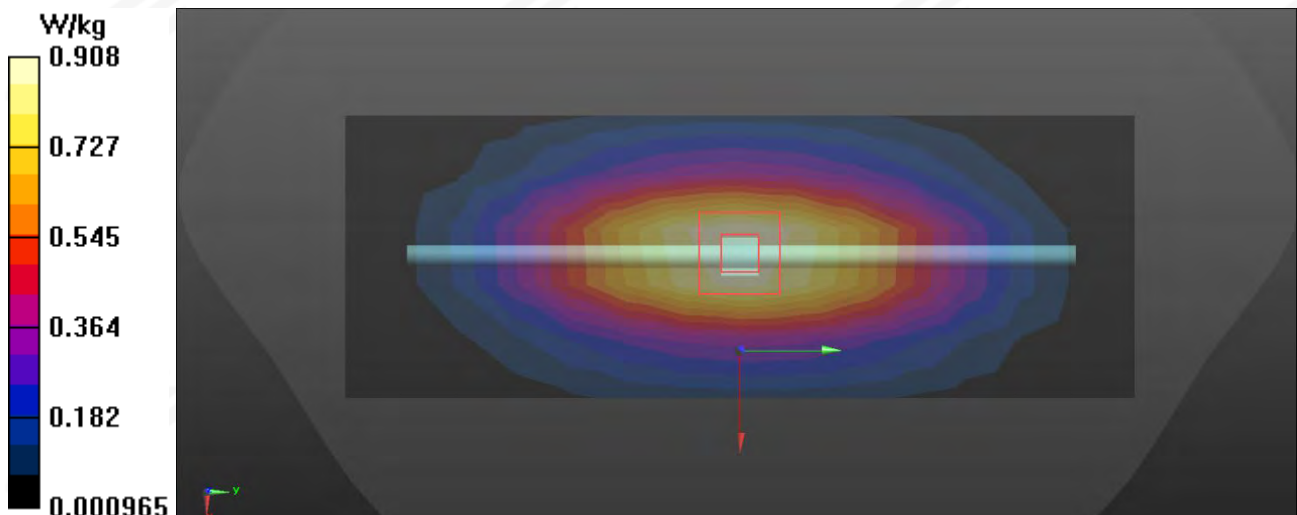



System Check 835MHz

Test Data:2026-01-24

DUT: Dipole 835 MHz

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.46$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 835 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.20 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 40.33 V/m; Power Drift = 2.07 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.663 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 1.21 W/kg

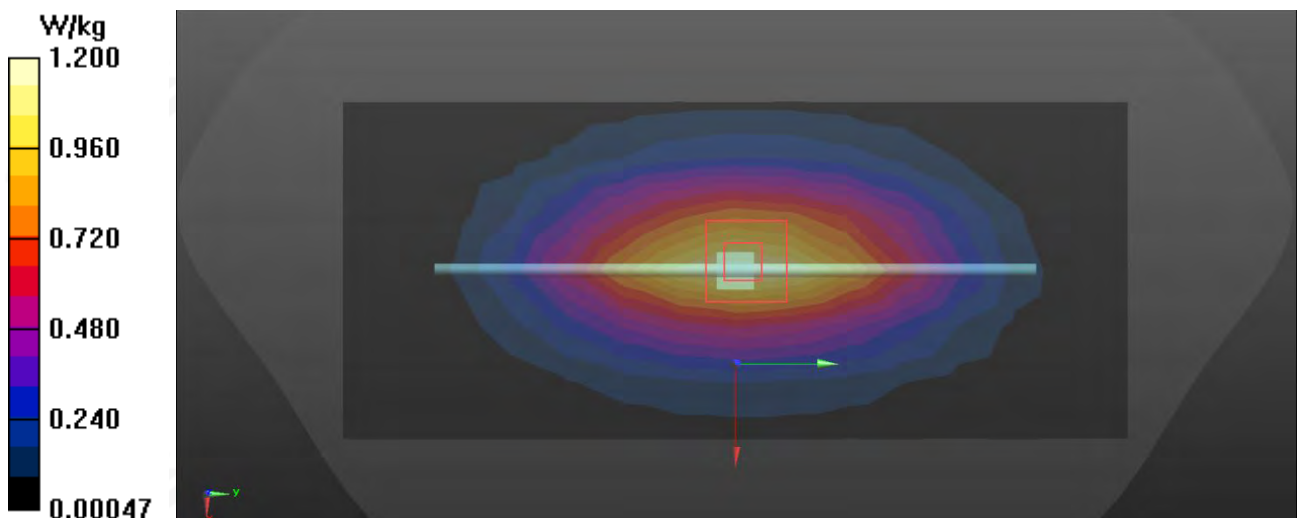



System Check 1800MHz

Test Data:2026-01-27

DUT: Dipole 1800 MHz

Communication System: UID 0, CW (0); Communication System Band: D1800 (1800.0 MHz); Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.84$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1800 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (7x13x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 4.96 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 67.12 V/m; Power Drift = 1.34 dB


Peak SAR (extrapolated) = 6.26 W/kg

SAR(1 g) = 3.86 W/kg; SAR(10 g) = 2.029 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 5.25 W/kg

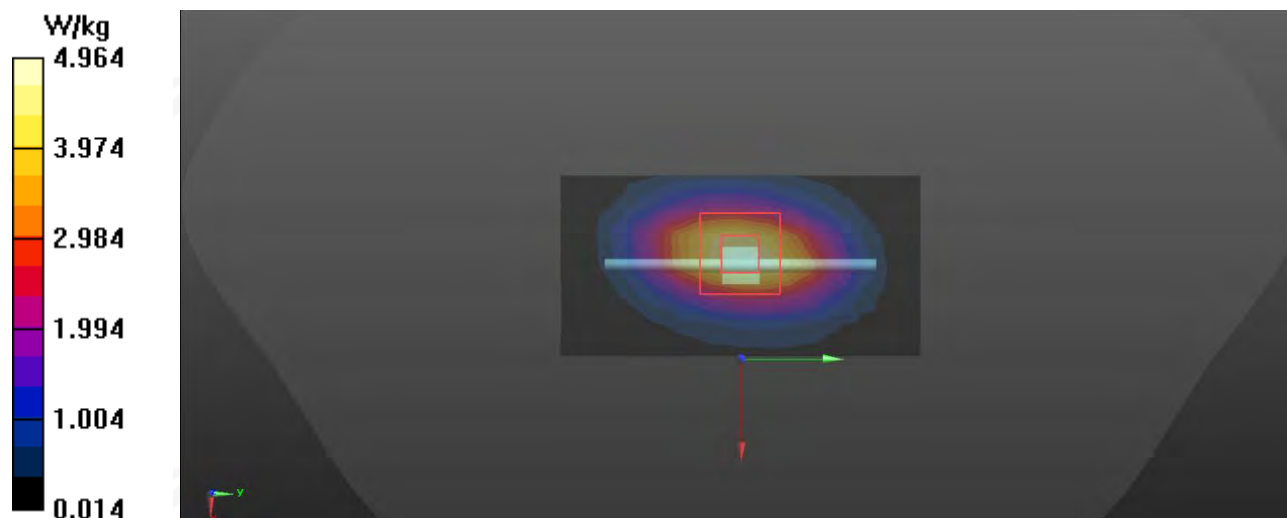

**DUT: Dipole 1800 MHz**

Communication System: UID 0, CW (0); Communication System Band: D1800 (1800.0 MHz); Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1800$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.61$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1800 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (7x13x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 4.79 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 64.72 V/m; Power Drift = -3.81 dB


Peak SAR (extrapolated) = 6.31 W/kg

SAR(1 g) = 3.746 W/kg; SAR(10 g) = 2.041 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 5.30 W/kg

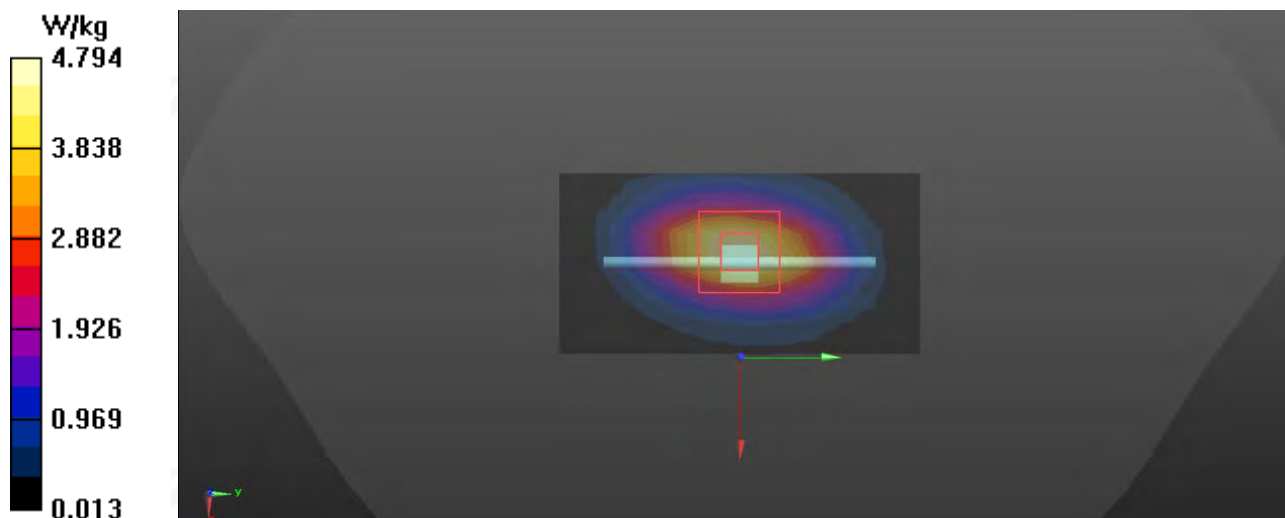



System Check 1900MHz

Test Data:2026-01-25

DUT: Dipole 1900 MHz

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.55$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 5.88 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 68.48 V/m; Power Drift = 1.20 dB


Peak SAR (extrapolated) = 7.22 W/kg

SAR(1 g) = 3.908 W/kg; SAR(10 g) = 2.015 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 5.94 W/kg

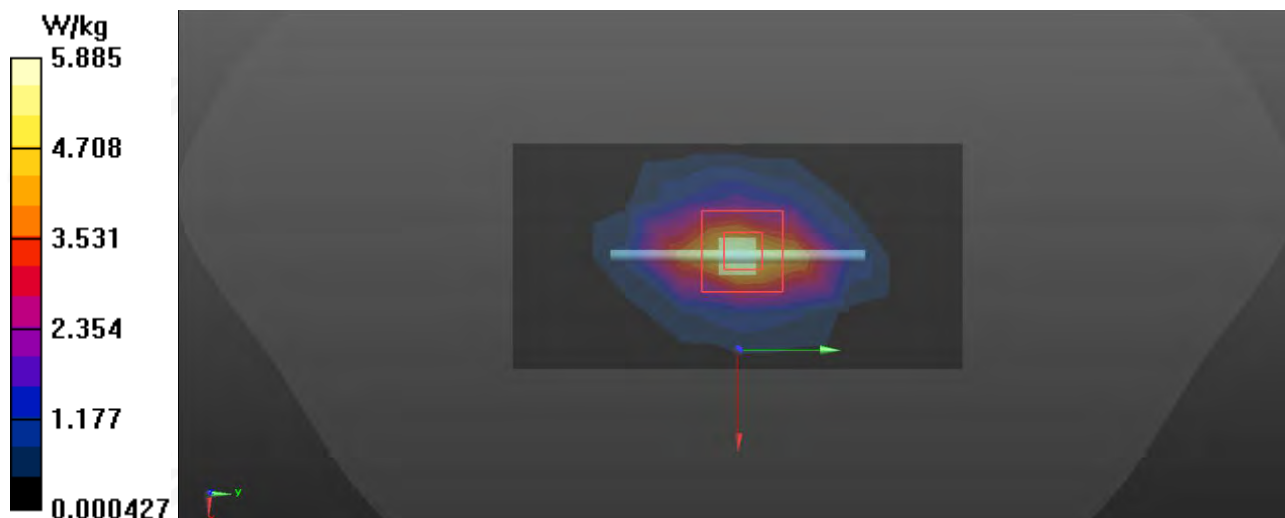



System Check 1900MHz

Test Data:2026-01-26

DUT: Dipole 1900 MHz

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.55$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1900 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 5.84 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 67.29 V/m; Power Drift = -2.40 dB


Peak SAR (extrapolated) = 7.05 W/kg

SAR(1 g) = 3.969 W/kg; SAR(10 g) = 2.068 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 5.80 W/kg

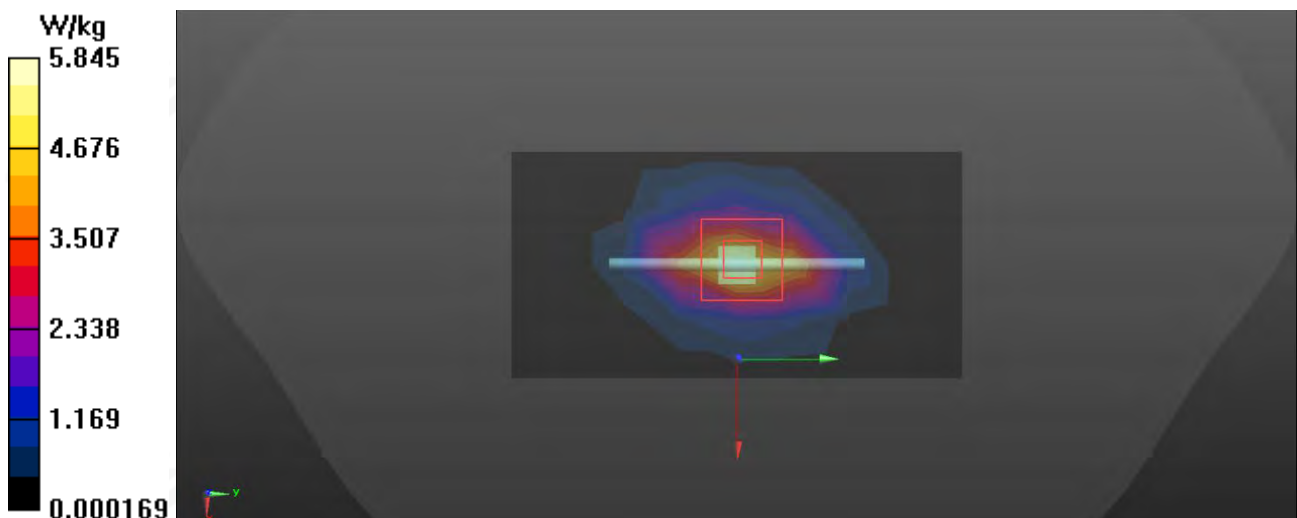



System Check 2450MHz

Test Data:2026-01-29

DUT: Dipole 2450 MHz

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.65$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.3, 6.71, 6.9) @ 2450 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (6x11x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 8.02 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 73.23 V/m; Power Drift = -2.13 dB



Peak SAR (extrapolated) = 10.0 W/kg

SAR(1 g) = 5.496 W/kg; SAR(10 g) = 2.420 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 7.96 W/kg

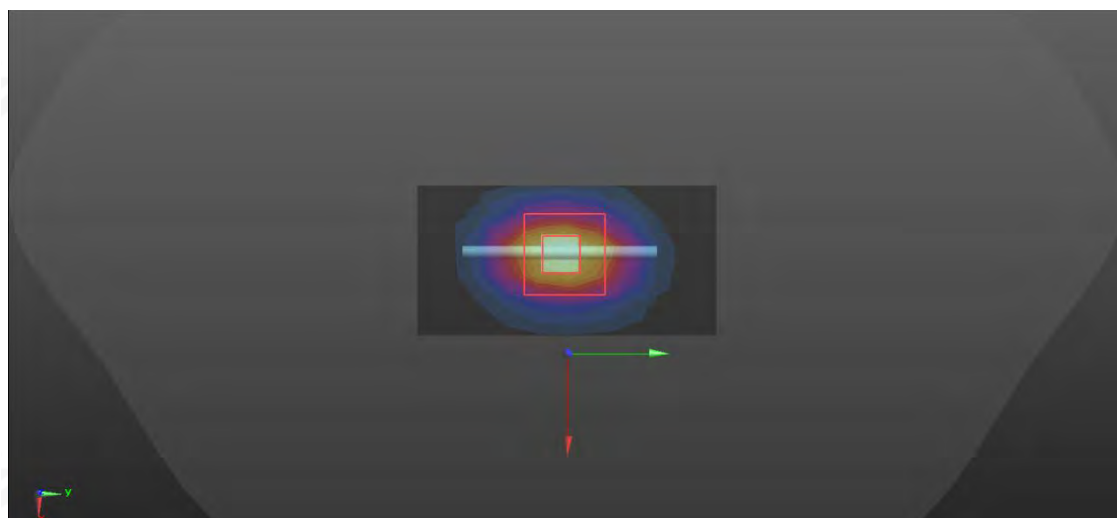

**DUT: Dipole 2600 MHz**

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600

MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.20$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.14, 6.54, 6.73) @ 2600 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x13x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 7.72 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 68.67 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.579 W/kg; SAR(10 g) = 2.456 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 8.63 W/kg

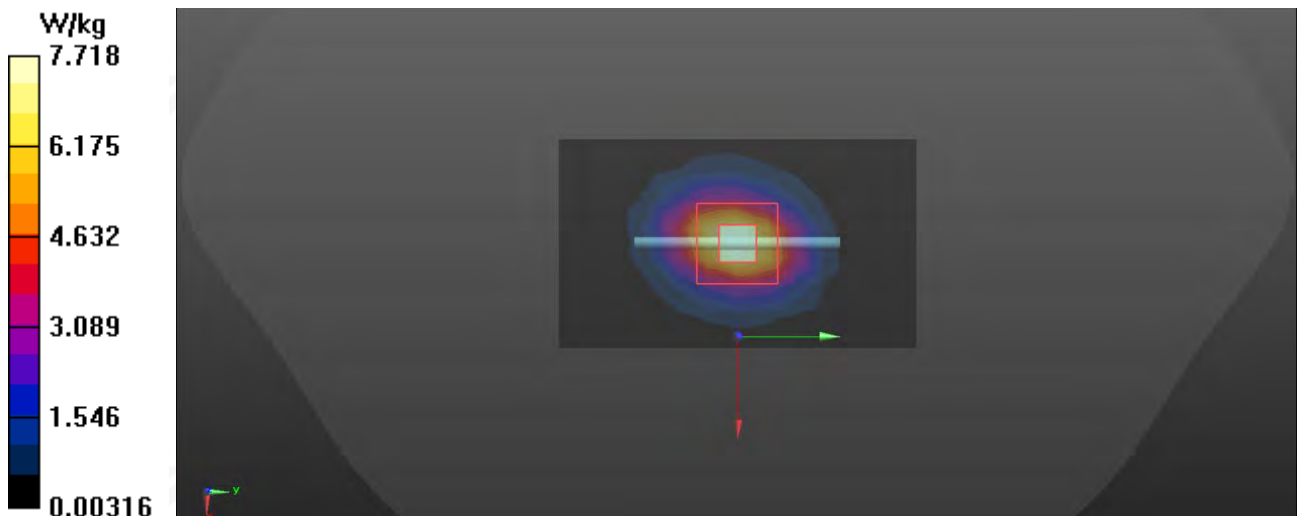

**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Communication System Band: ITD5500 (5000.0 - 5900.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 35.60$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.96, 5.28, 5.44) @ 5200 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (13x28x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.35 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 19.63 V/m; Power Drift = 3.82 dB


Peak SAR (extrapolated) = 7.17 W/kg

SAR(1 g) = 1.55 W/kg; SAR(10 g) = 0.569 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 25.3%

Maximum value of SAR (measured) = 3.44 W/kg

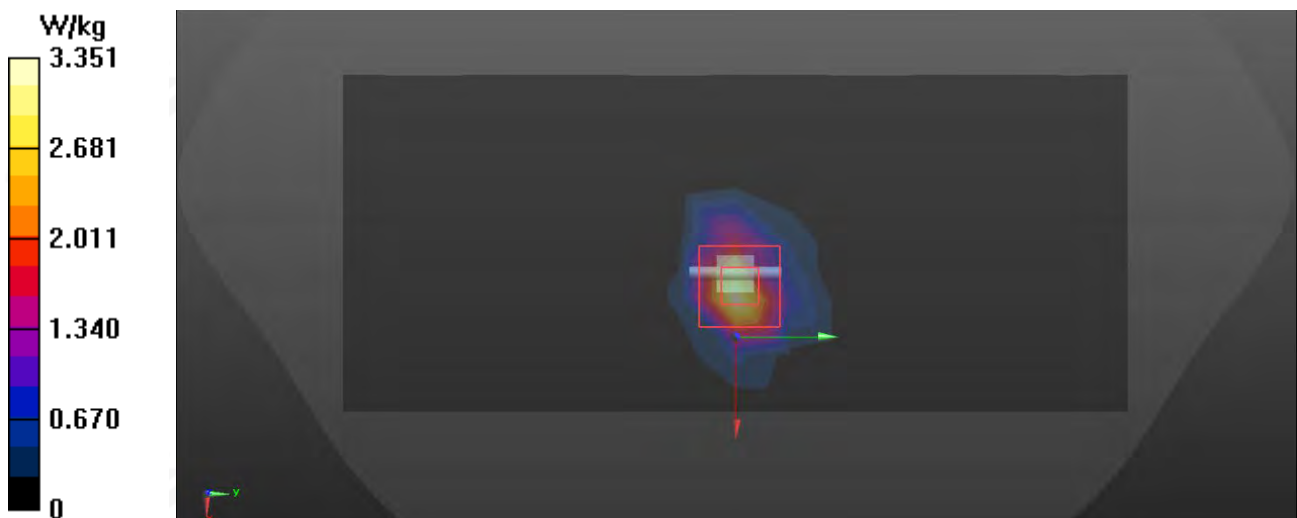

**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 35.87$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.59, 4.89, 5.03) @ 5800 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 1.8mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (5x5x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.72 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 28.08 V/m; Power Drift = 0.41 dB



Peak SAR (extrapolated) = 8.76 W/kg

SAR(1 g) = 1.955 W/kg; SAR(10 g) = 0.638 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 19.5%

Maximum value of SAR (measured) = 3.62 W/kg

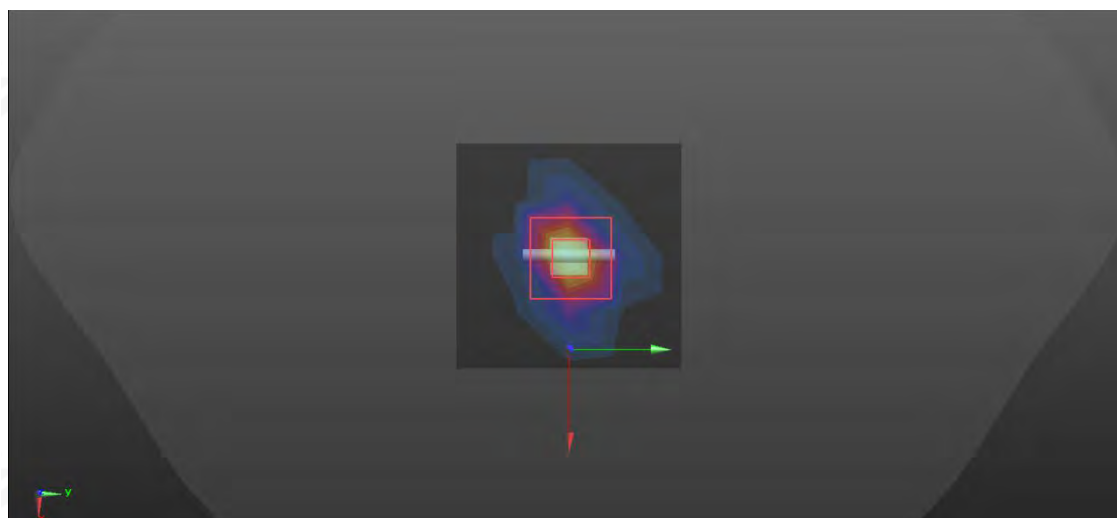

Appendix B. SAR Test Plots

Plot 1: GSM 850_Right Cheek

Test Data : 2026-01-24

DUT: 4G Smart phone

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.24$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 824.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.148 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.003 V/m; Power Drift = 1.48 dB


Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.3%

Maximum value of SAR (measured) = 0.149 W/kg

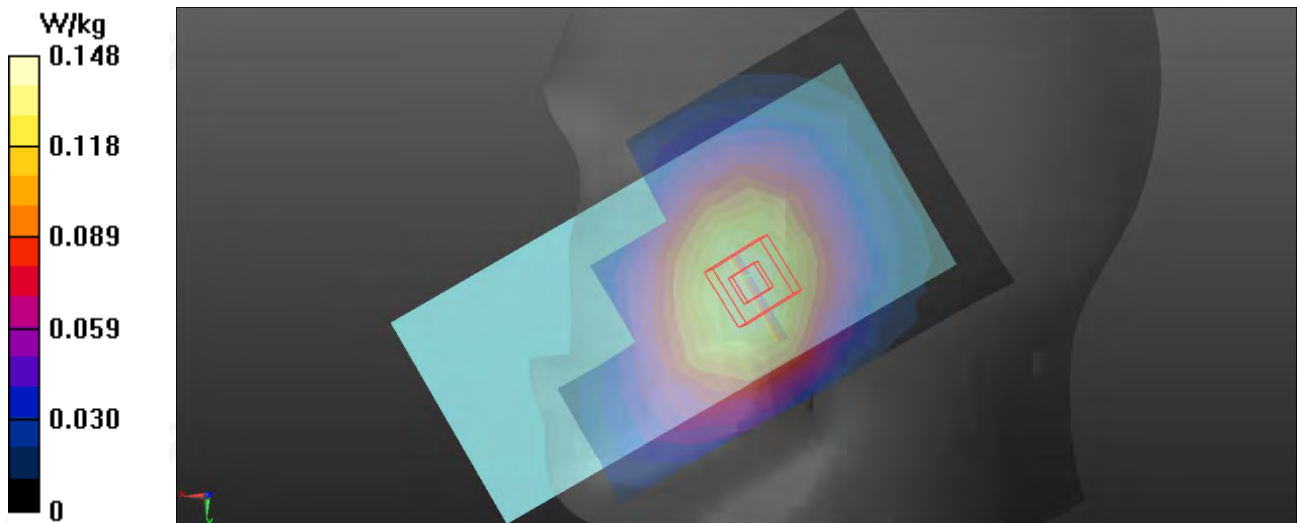

**DUT: 4G Smart phone**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM 850 (824.0 - 849.0

MHz); Frequency: 824.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.24$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 824.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.152 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.18 V/m; Power Drift = 3.66 dB


Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.7%

Maximum value of SAR (measured) = 0.154 W/kg

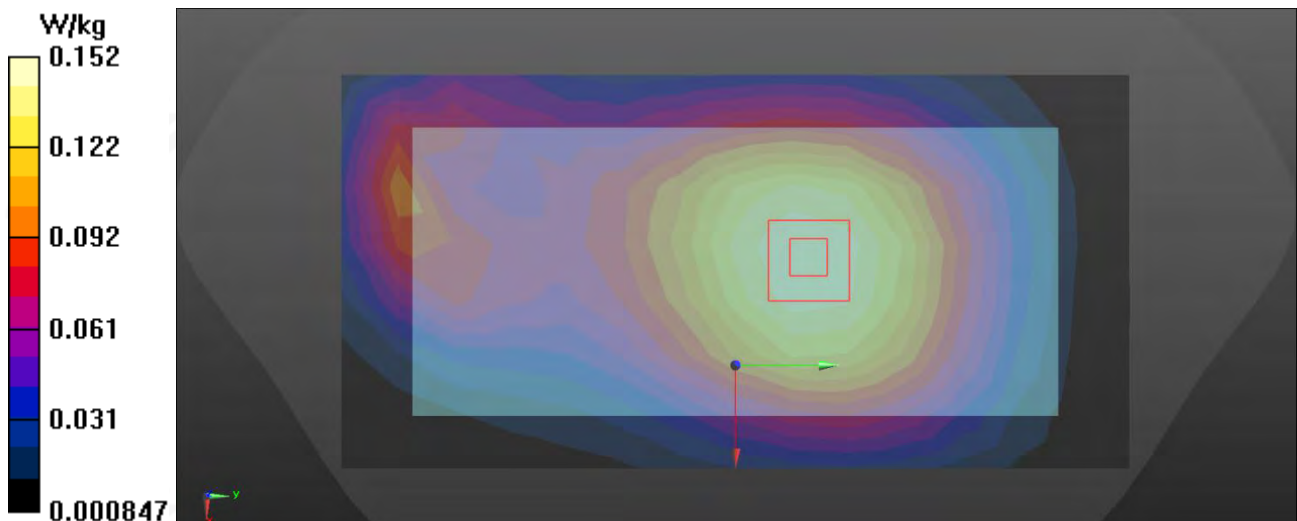

**DUT: 4G Smart phone**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM 850 (824.0 - 849.0

MHz); Frequency: 824.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.24$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 824.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.627 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.86 V/m; Power Drift = 0.85 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.633 W/kg

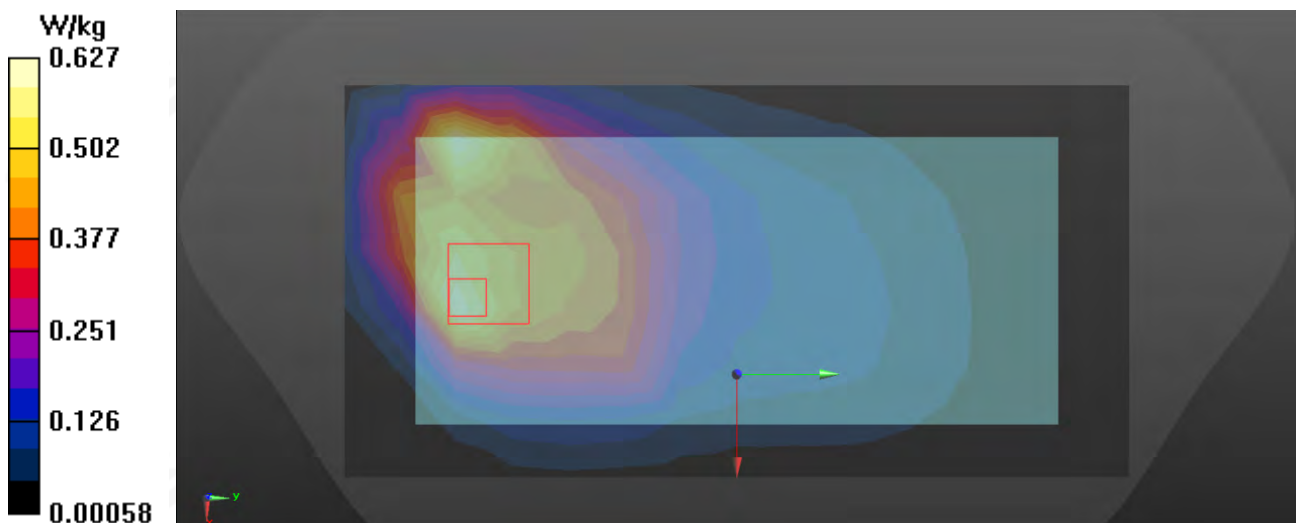

**DUT: 4G Smart phone**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1850.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.06 W/kg

/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.74 V/m; Power Drift = -3.39 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.602 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.4%

Maximum value of SAR (measured) = 1.10 W/kg

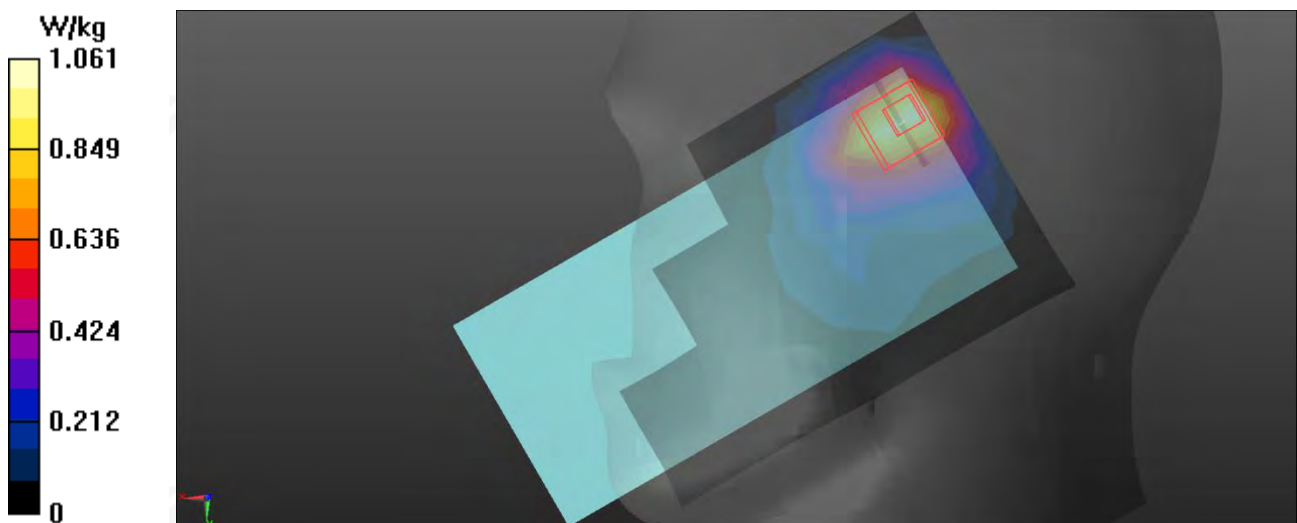

**DUT: 4G Smart phone**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS 1900 (1850.0 - 1910.0

MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1850.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.328 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.668 V/m; Power Drift = -0.59 dB


Peak SAR (extrapolated) = 0.618 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.366 W/kg

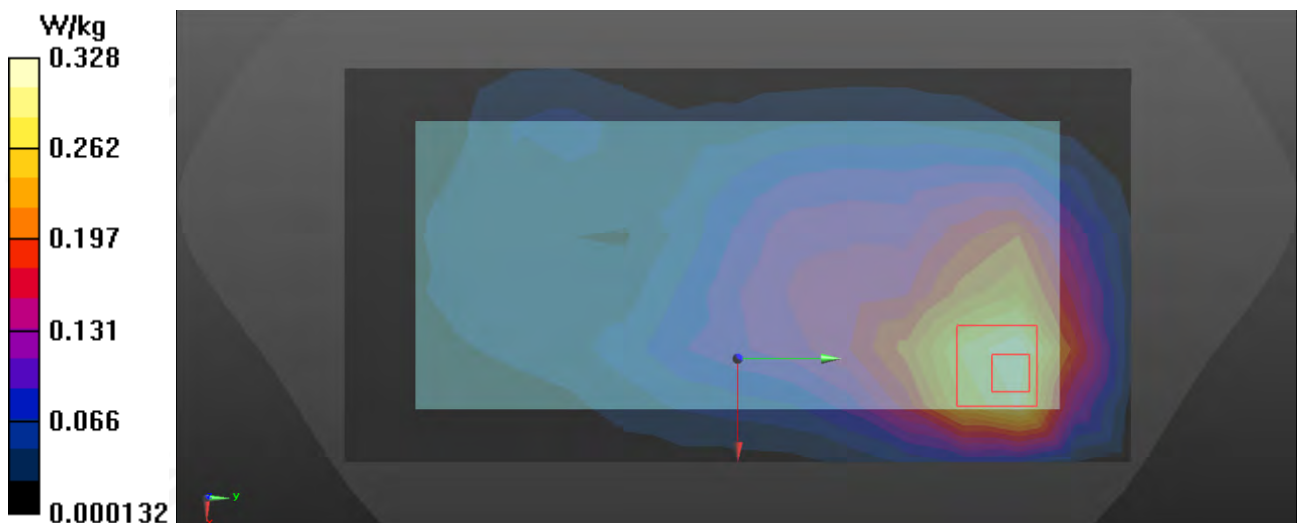

**DUT: 4G Smart phone**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS 1900 (1850.0 - 1910.0

MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1850.2 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.29 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.295 V/m; Power Drift = 1.54 dB


Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 1.55 W/kg; SAR(10 g) = 0.742 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 1.60 W/kg

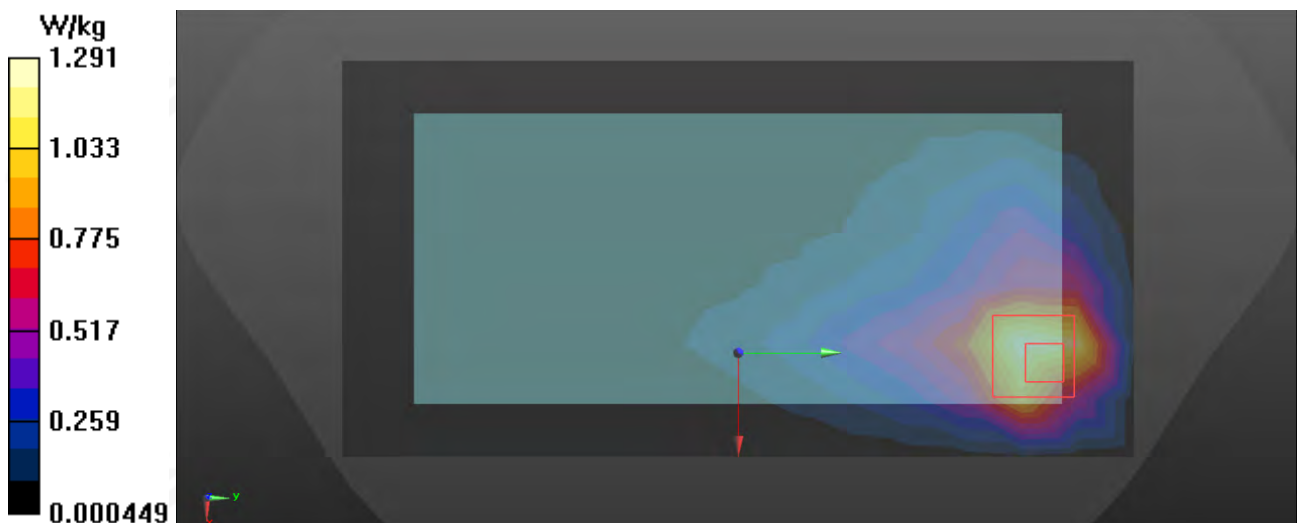



Plot 7: WCDMA B2_Right Cheek

Test Data : 2026-01-26

DUT: 4G Smart phone

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B2; Frequency:

1880 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.45$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1880 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.979 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.27 V/m; Power Drift = 2.09 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.537 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 1.02 W/kg

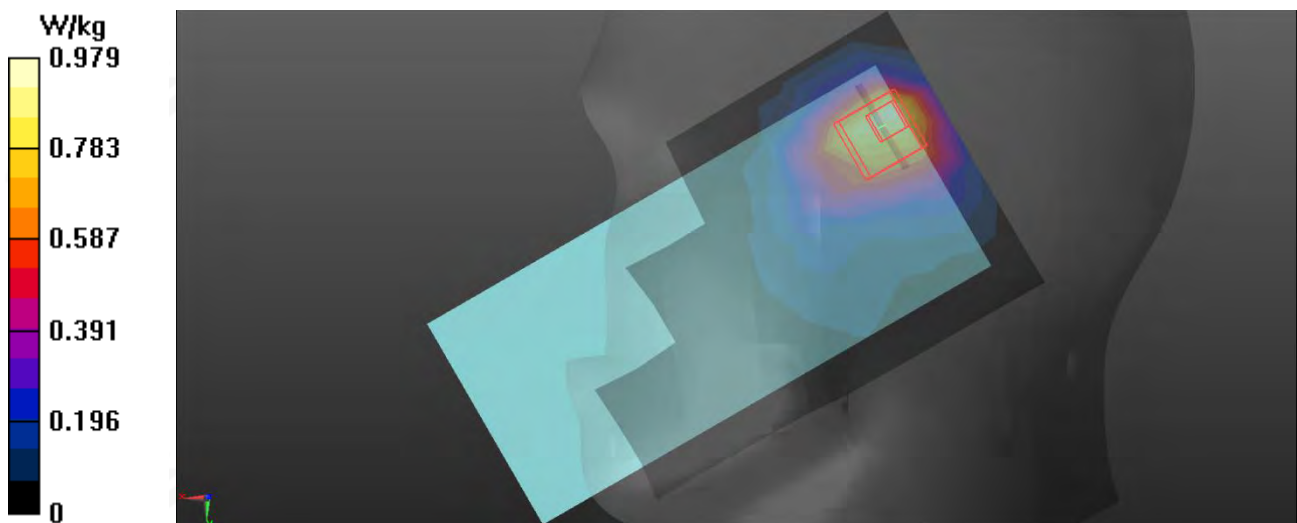



Plot 8: WCDMA B2_Back Side_10mm

Test Data : 2026-01-26

DUT: 4G Smart phone

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B2; Frequency:

1880 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.45$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1880 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.686 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.73 V/m; Power Drift = 3.85 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.735 W/kg

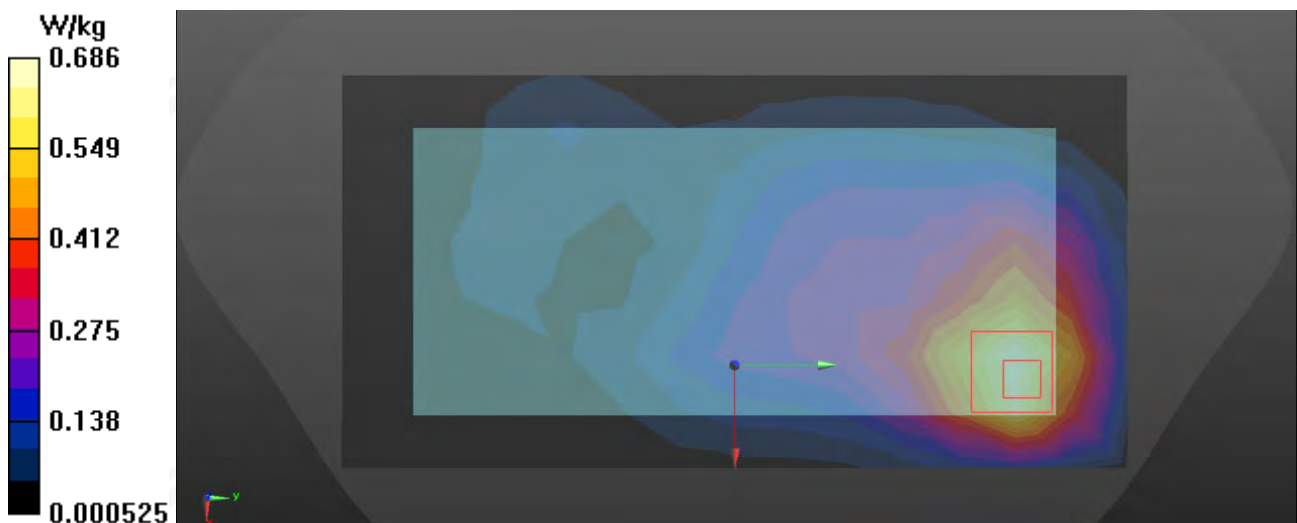



Plot 9: WCDMA B2_Back Side_0mm

Test Data : 2026-01-26

DUT: 4G Smart phone

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B2; Frequency:

1880 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.45$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1880 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.00 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.485 V/m; Power Drift = -2.81 dB


Peak SAR (extrapolated) = 6.90 W/kg

SAR(1 g) = 2.92 W/kg; SAR(10 g) = 1.38 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 3.13 W/kg

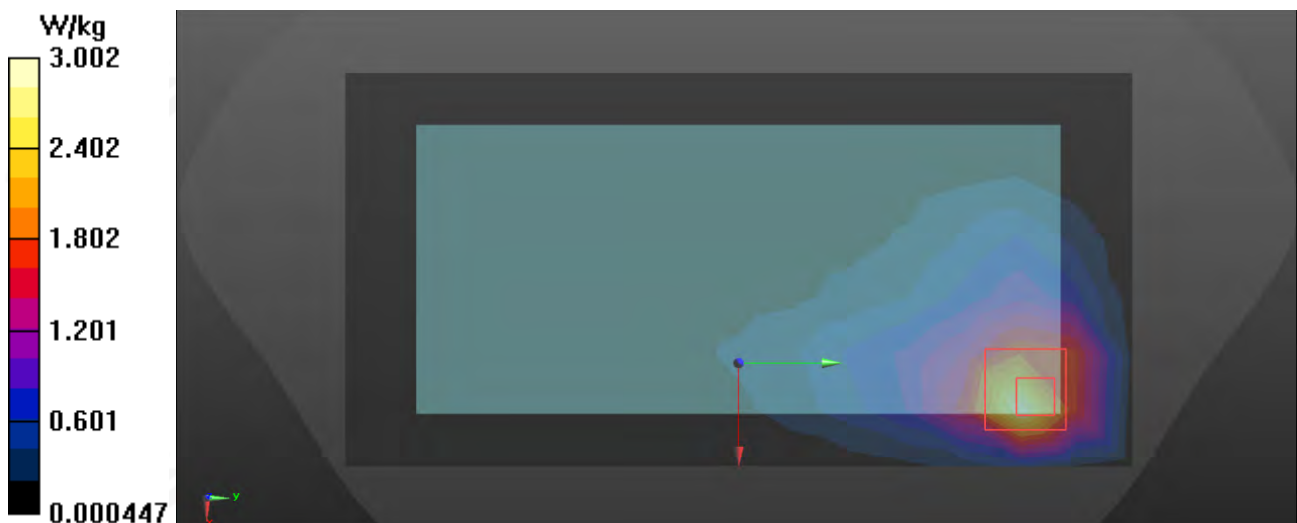

**DUT: 4G Smart phone**

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B4; Frequency: 1752.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 1752.4$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.07$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1752.4 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.07 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.92 V/m; Power Drift = -2.98 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.603 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 1.09 W/kg

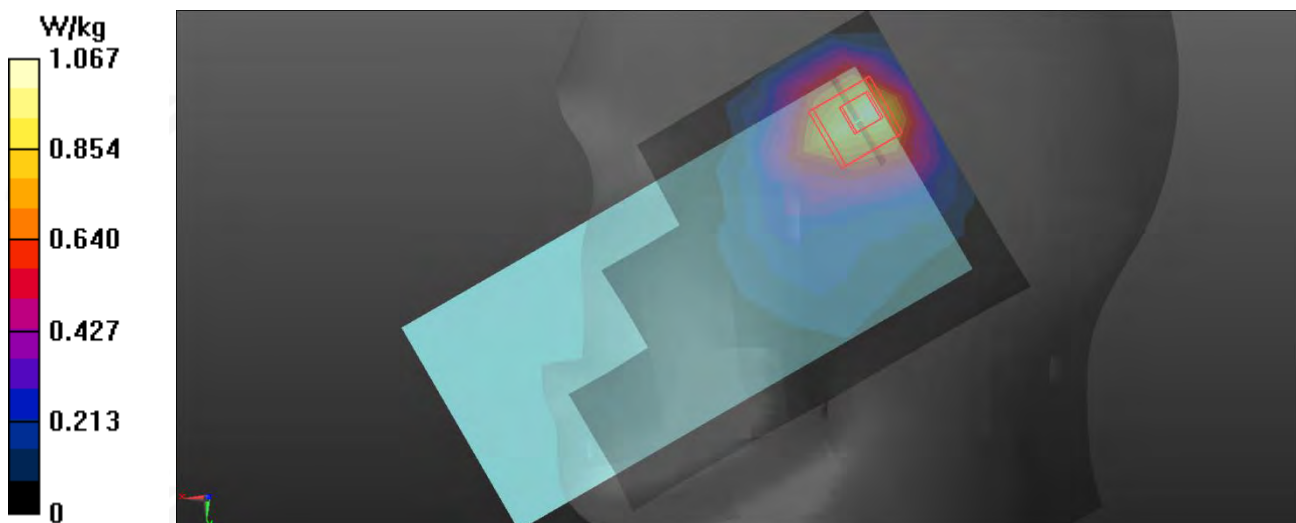



Plot 11: WCDMA B4_Back Side_10mm

Test Data : 2026-01-27

DUT: 4G Smart phone

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B4; Frequency:

1752.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 1752.4$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.07$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1752.4 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.335 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.400 V/m; Power Drift = 3.39 dB


Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.199 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.386 W/kg

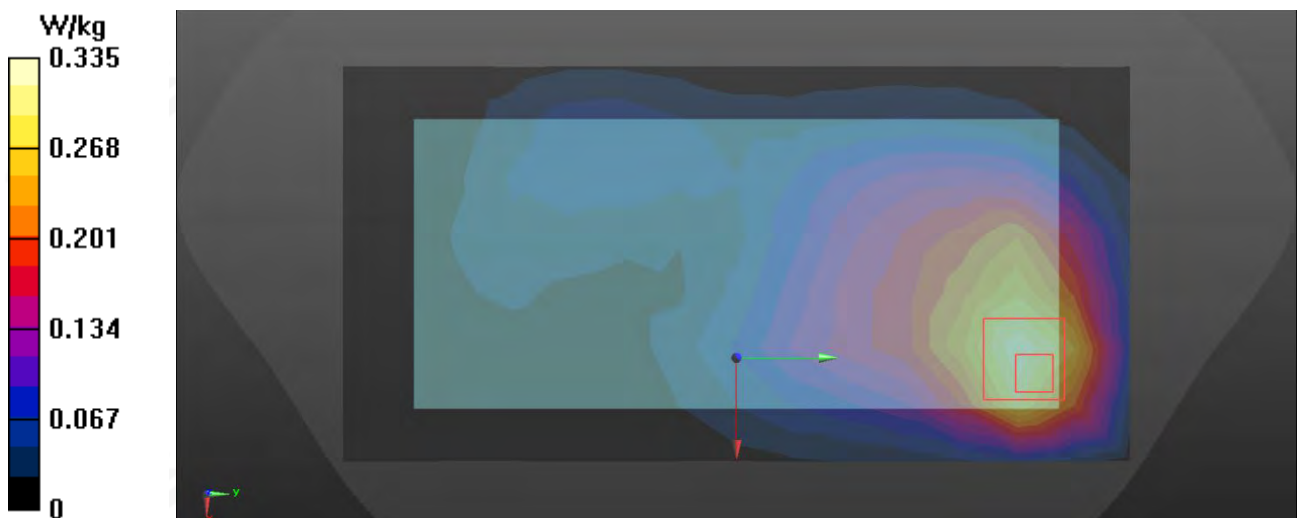

**DUT: 4G Smart phone**

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B4; Frequency: 1752.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 1752.4$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.07$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1752.4 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.71 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.352 V/m; Power Drift = -0.57 dB


Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 1.7 W/kg; SAR(10 g) = 0.830 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.83 W/kg

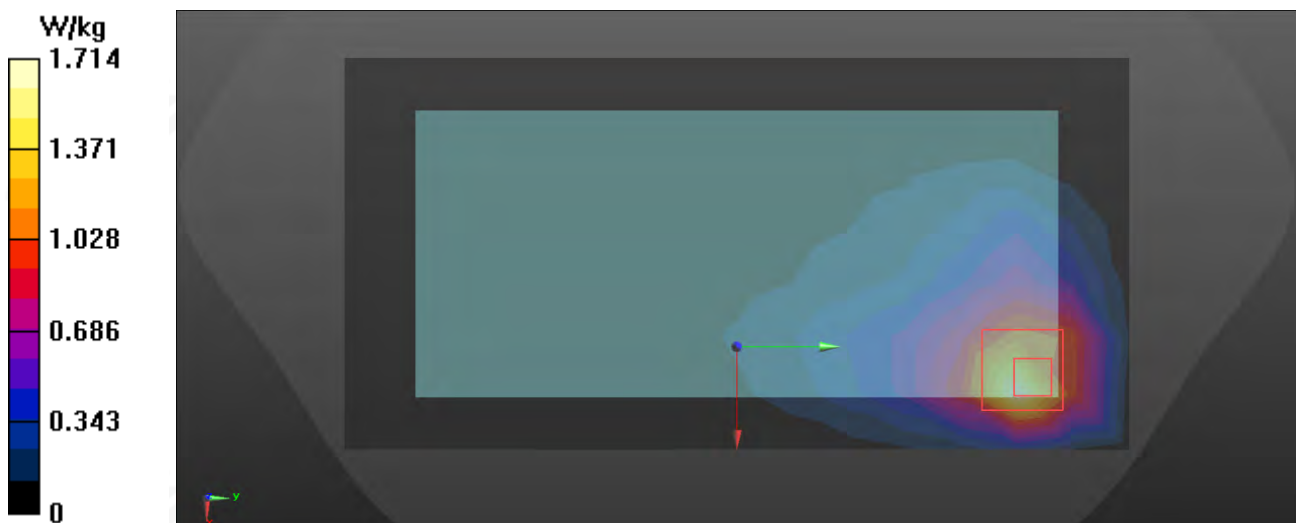

**DUT: 4G Smart phone**

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.73$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 836.6 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.146 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.750 V/m; Power Drift = -1.25 dB


Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.1%

Maximum value of SAR (measured) = 0.138 W/kg

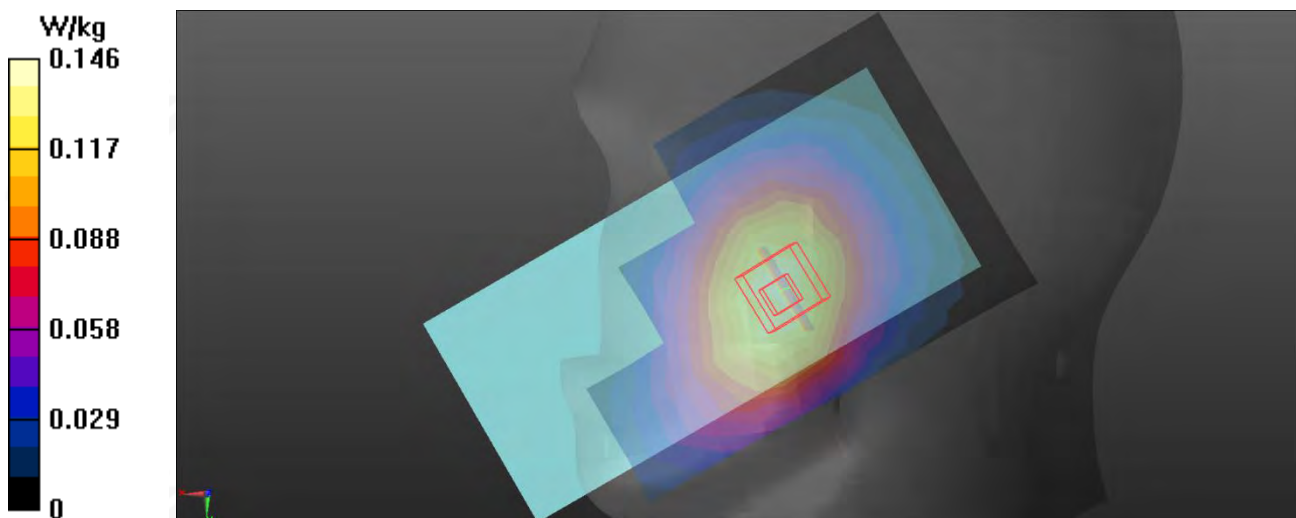



Plot 14: WCDMA B5_Back Side_10mm

Test Data : 2026-01-24

DUT: 4G Smart phone

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B5; Frequency:

836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.73$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 836.6 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.133 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.18 V/m; Power Drift = 3.71 dB


Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 78%

Maximum value of SAR (measured) = 0.137 W/kg

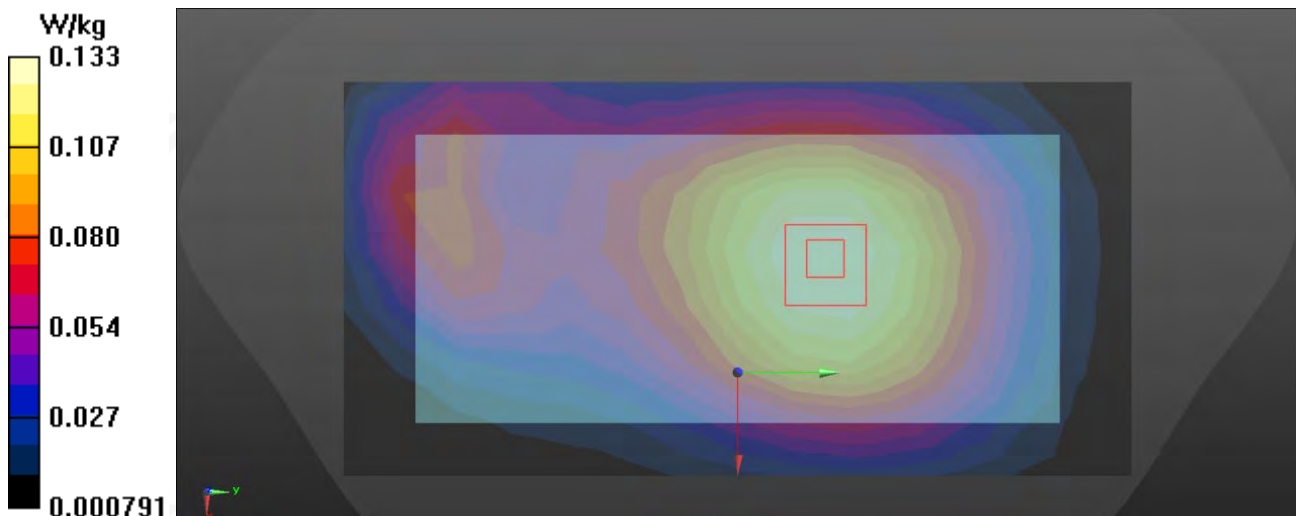

**DUT: 4G Smart phone**

Communication System: UID 0, Generic WCDMA (0); Communication System Band: WCDMA B5; Frequency: 836.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.73$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 836.6 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.416 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.69 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.663 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.412 W/kg

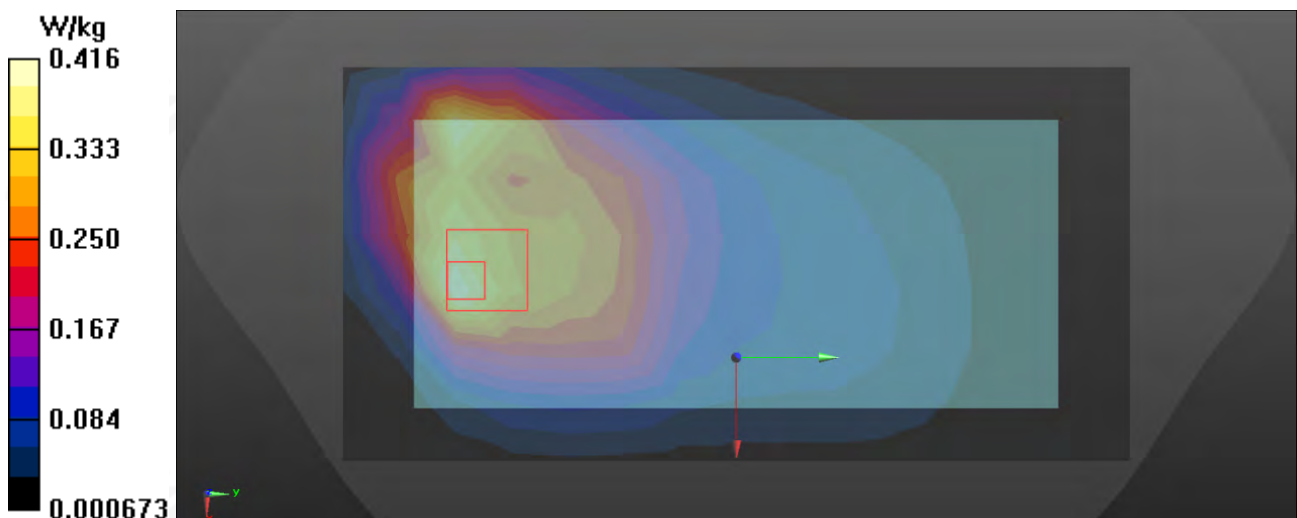

DUT: 4G Smart phone

Communication System: UID 0, WLAN 2.4G (0); Communication System Band: 2.4G BW20; Frequency: 2462

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.3, 6.71, 6.9) @ 2462 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x12x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0785 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.349 V/m; Power Drift = -3.01 dB


Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.0843 W/kg

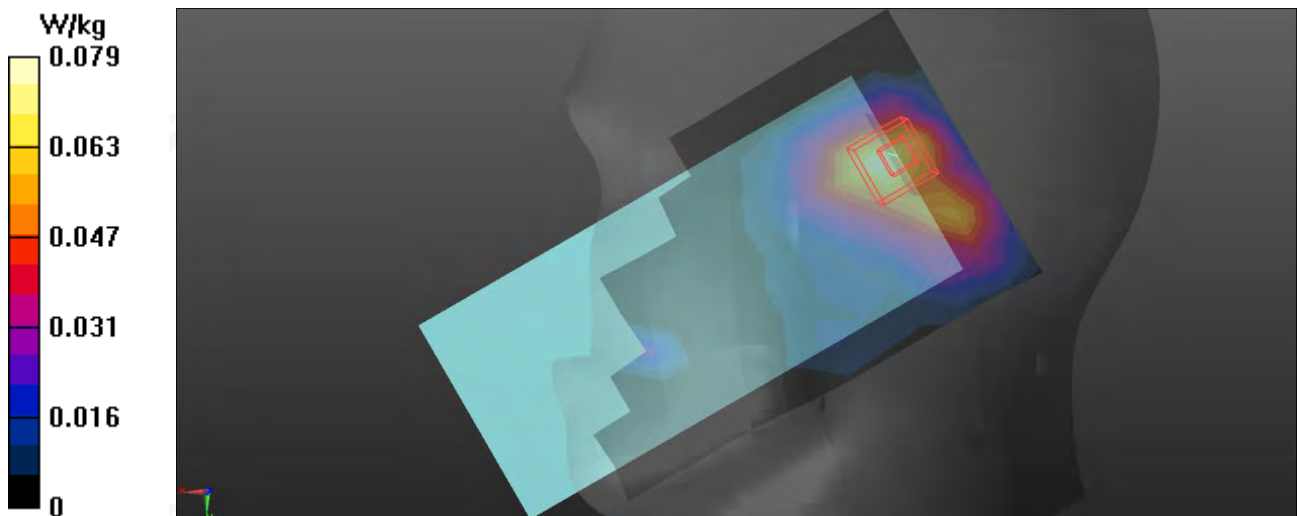

**DUT: 4G Smart phone**

Communication System: UID 0, WLAN 2.4G (0); Communication System Band: 2.4G BW20; Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.3, 6.71, 6.9) @ 2462 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (9x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0495 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.593 V/m; Power Drift = 1.88 dB


Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.0518 W/kg

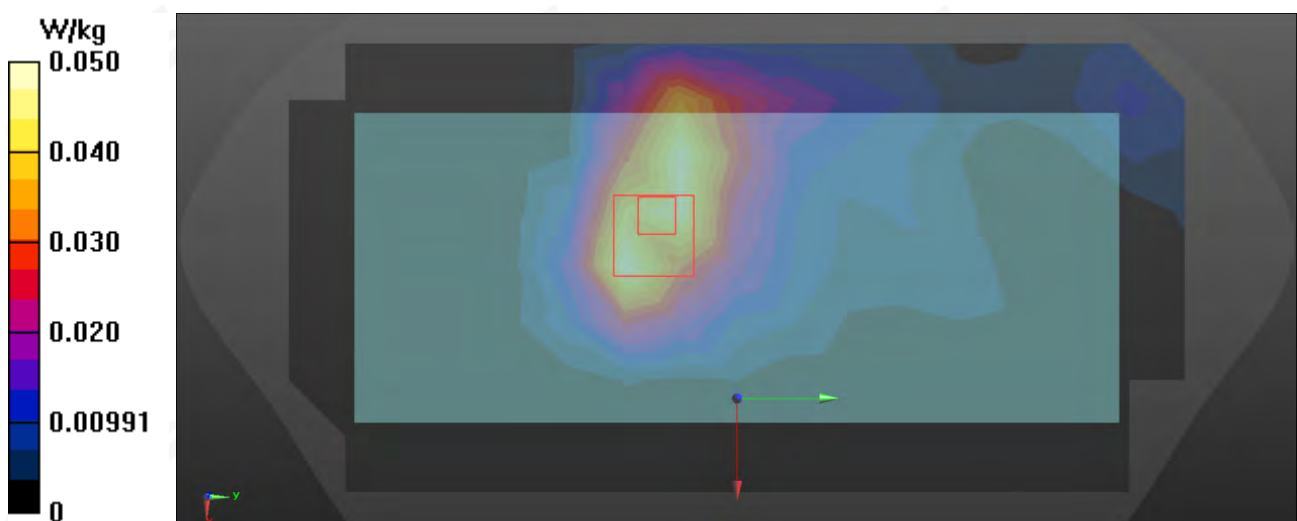



Plot 18: 2.4G_Back Side_0mm

Test Data : 2026-01-29

DUT: 4G Smart phone

Communication System: UID 0, WLAN 2.4G (0); Communication System Band: 2.4G BW20; Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.3, 6.71, 6.9) @ 2462 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (9x17x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.400 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.383 V/m; Power Drift = 3.45 dB


Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 0.474 W/kg

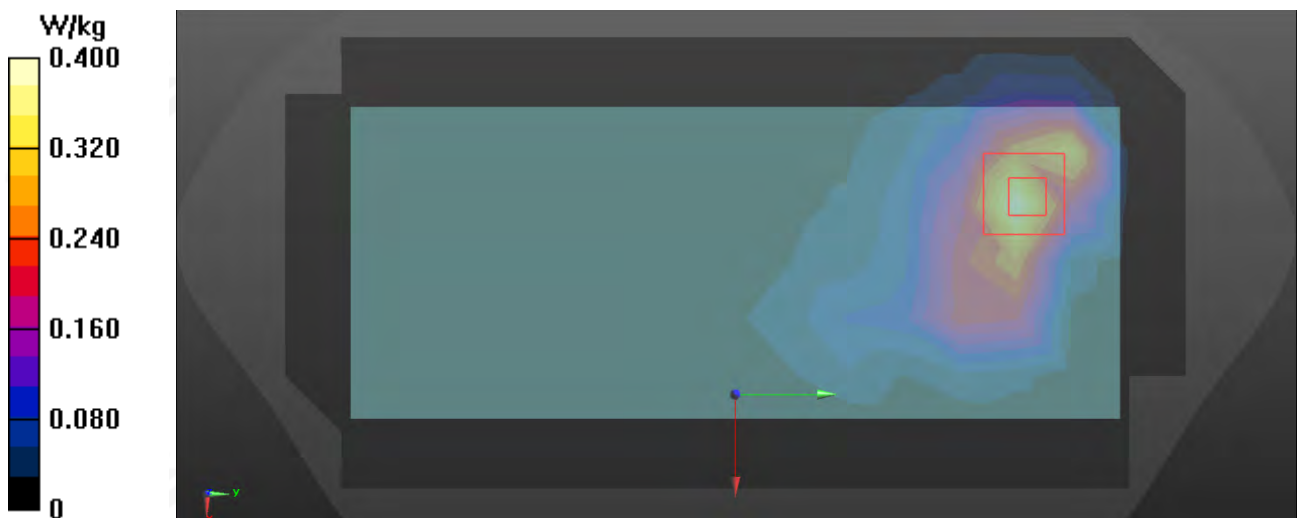

DUT: 4G Smart phone

Communication System: UID 0, WLAN 5G (0); Communication System Band: 5G 20M; Frequency: 5240

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.00$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.96, 5.28, 5.44) @ 5240 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (15x23x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 0.235 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.231 V/m; Power Drift = -1.91 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 23.5%

Maximum value of SAR (measured) = 0.300 W/kg

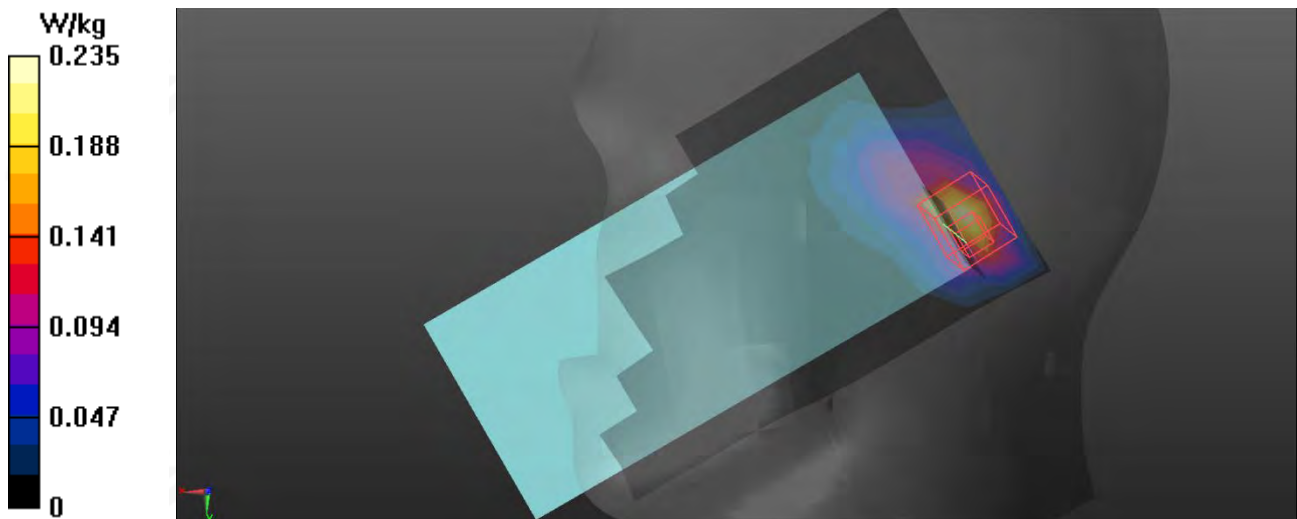



Plot 20: 5.2G_Back Side_10mm

Test Data : 2026-01-29

DUT: 4G Smart phone

Communication System: UID 0, WLAN 5G (0); Communication System Band: 5G 20M; Frequency: 5240

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.00$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.96, 5.28, 5.44) @ 5240 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (17x32x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 0.187 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.61 V/m; Power Drift = -3.34 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 21.4%

Maximum value of SAR (measured) = 0.231 W/kg

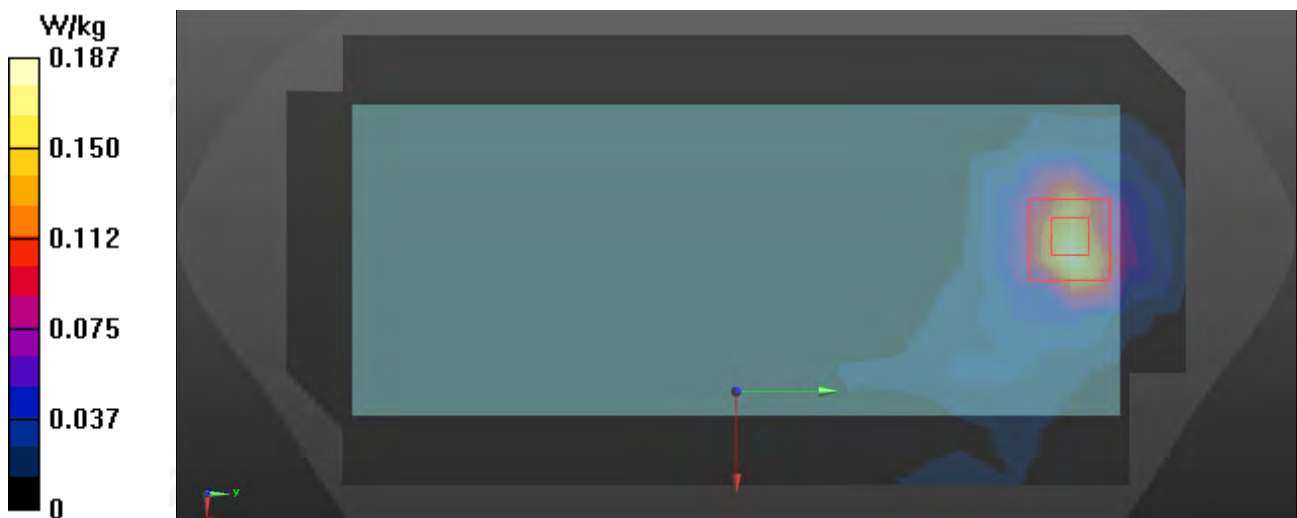



Plot 21: 5.2G_Back Side_0mm

Test Data : 2026-01-29

DUT: 4G Smart phone

Communication System: UID 0, WLAN 5G (0); Communication System Band: 5G 20M; Frequency: 5240

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.00$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.96, 5.28, 5.44) @ 5240 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (17x32x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 0.401 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.71 V/m; Power Drift = 2.65 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 18.8%

Maximum value of SAR (measured) = 0.658 W/kg

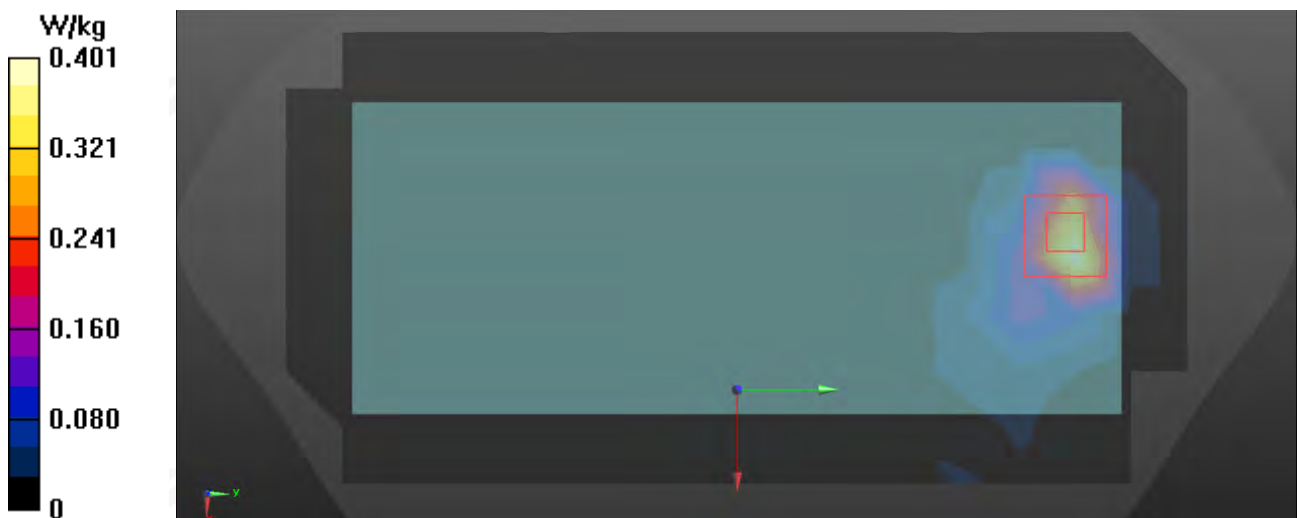



DUT: 4G Smart phone;

Communication System: UID 0, WLAN 5G (0); Communication System Band: 5G 20M; Frequency: 5825

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 35.38$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.59, 4.89, 5.03) @ 5825 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (15x23x1): Measurement grid: dx=8mm, dy=8mm

Maximum value of SAR (measured) = 0.288 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.486 V/m; Power Drift = -3.66 dB


Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 18.3%

Maximum value of SAR (measured) = 0.272 W/kg

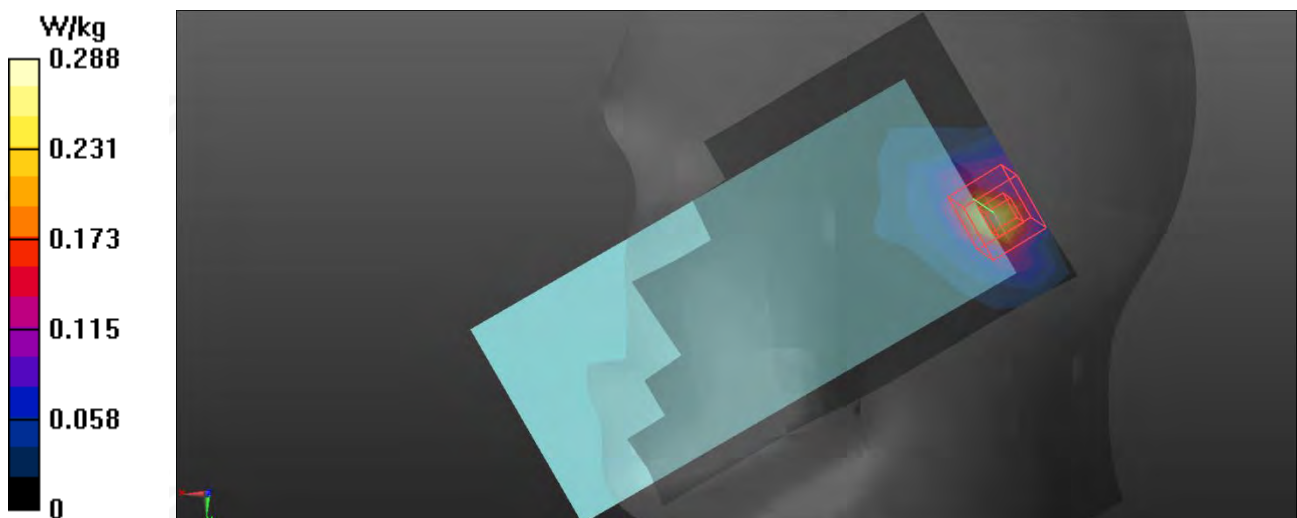



Plot 23: 5.8G_Back Side_10mm

Test Data : 2026-01-29

DUT: 4G Smart phone

Communication System: UID 0, WLAN 5G (0); Communication System Band: 5G 20M; Frequency: 5825

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 35.38$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.59, 4.89, 5.03) @ 5825 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (17x32x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 0.273 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.79 V/m; Power Drift = 1.58 dB


Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 19.4%

Maximum value of SAR (measured) = 0.338 W/kg

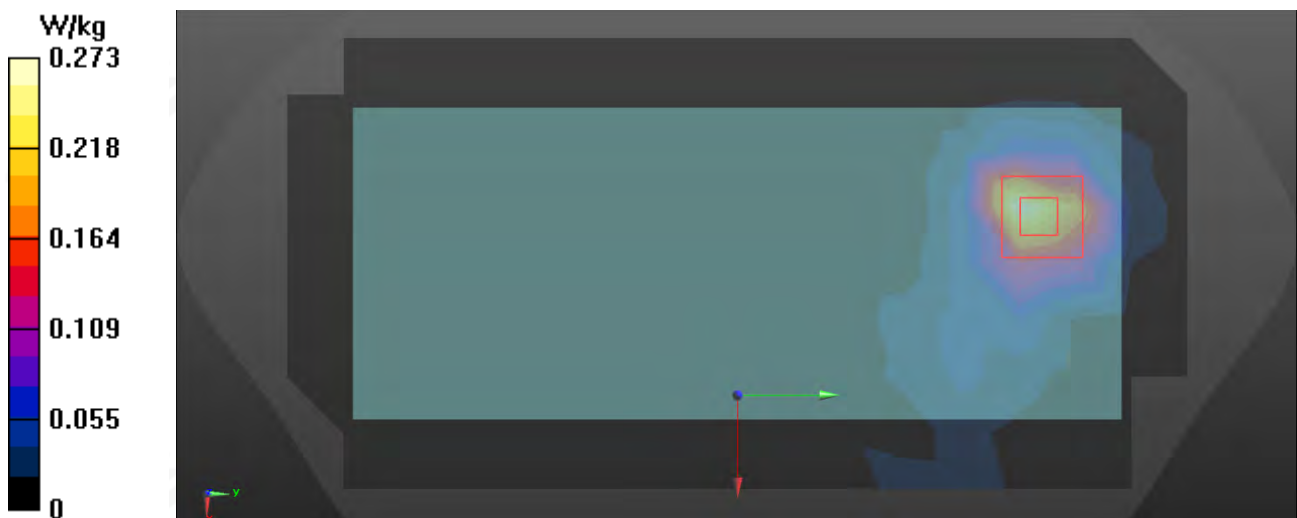



Plot 24: 5.8G_Back Side_0mm

Test Data : 2026-01-29

DUT: 4G Smart phone

Communication System: UID 0, WLAN 5G (0); Communication System Band: 5G 20M; Frequency: 5825

MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 35.38$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(4.59, 4.89, 5.03) @ 5825 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (17x32x1): Measurement grid: $dx=8$ mm, $dy=8$ mm

Maximum value of SAR (measured) = 0.907 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.77 V/m; Power Drift = -0.40 dB


Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 18.8%

Maximum value of SAR (measured) = 0.945 W/kg

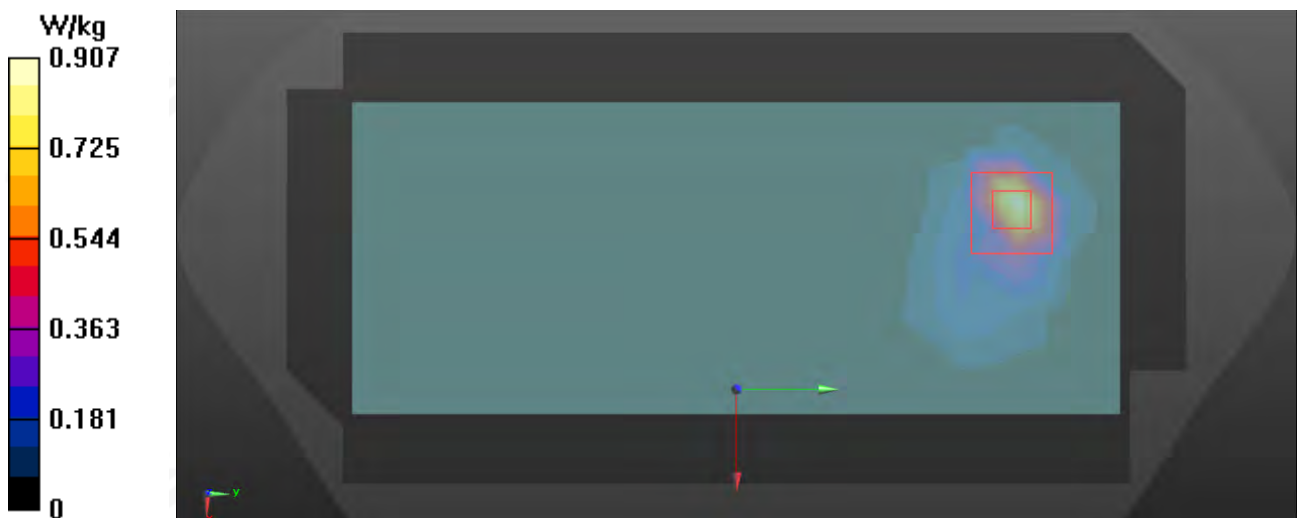

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0

- 1910.0 MHz); Frequency: 1860 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1860 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.991 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.84 V/m; Power Drift = 0.22 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.486 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 0.898 W/kg

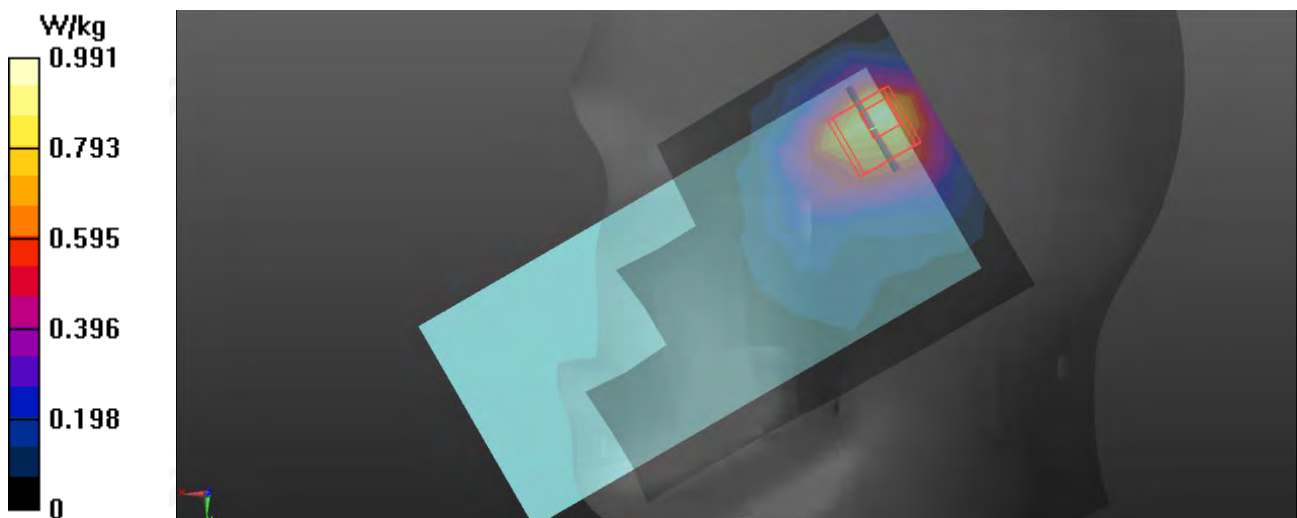

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1860 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.916 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.51 V/m; Power Drift = 3.79 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.498 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.920 W/kg

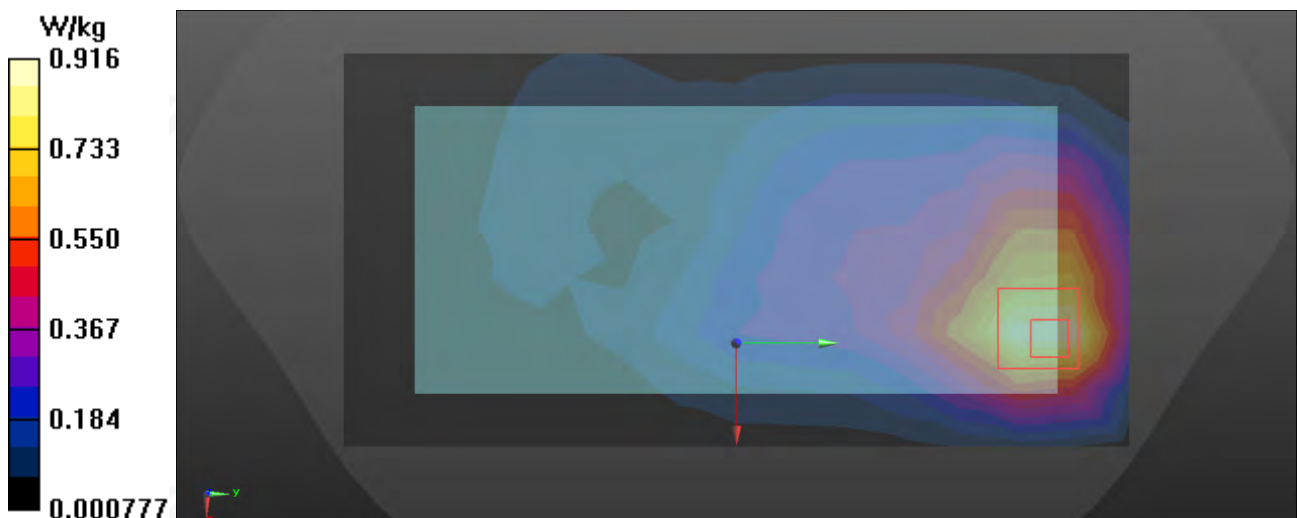

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.26$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.85, 7.3, 7.51) @ 1860 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.29 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.46 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 9.05 W/kg

SAR(1 g) = 3.87 W/kg; SAR(10 g) = 1.85 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 4.04 W/kg

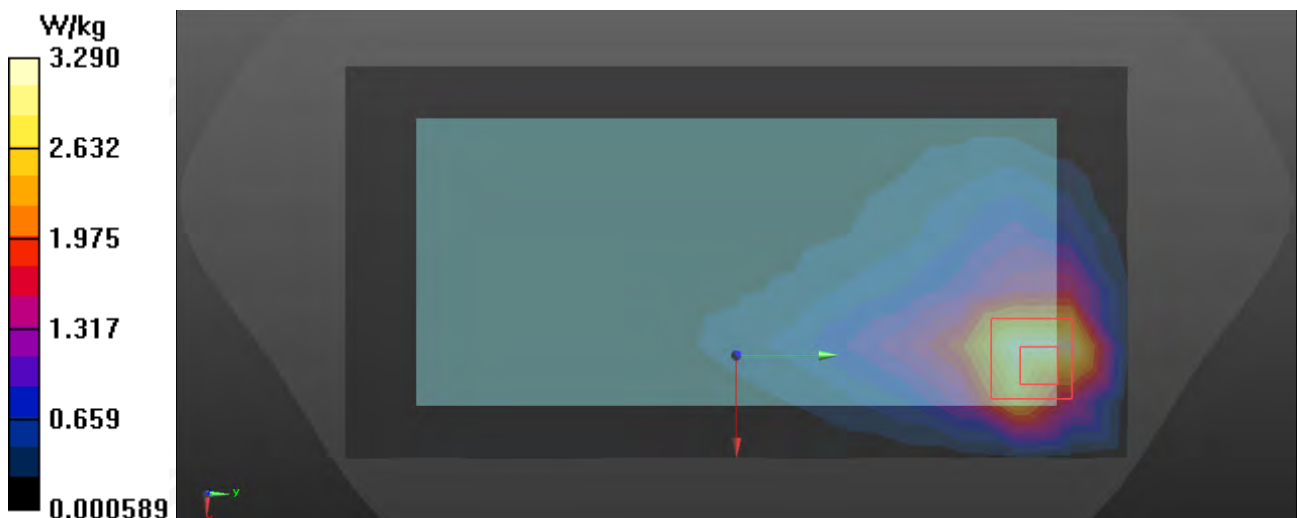



Plot 28: LTE B4_Right Cheek

Test Data : 2026-01-27

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.22$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1745 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.706 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.86 V/m; Power Drift = 1.05 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.5%

Maximum value of SAR (measured) = 0.659 W/kg

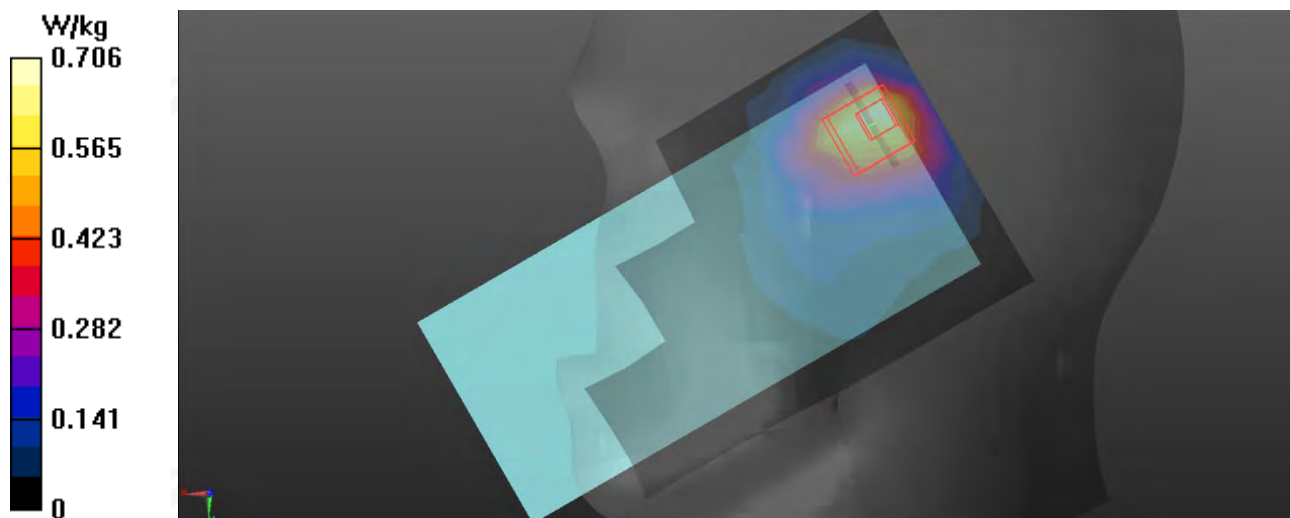



Plot 29: LTE B4_Back Side_10mm

Test Data : 2026-01-27

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 4, E-UTRA/FDD (1710.0

- 1755.0 MHz); Frequency: 1745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.22$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1745 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.438 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.377 V/m; Power Drift = 2.28 dB


Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.439 W/kg

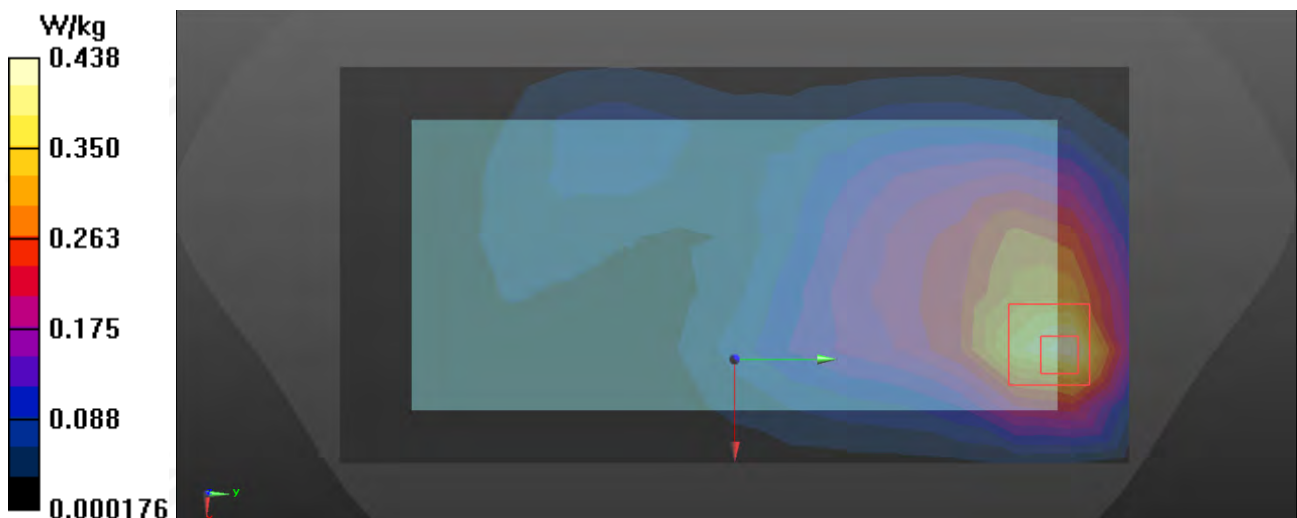

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 4, E-UTRA/FDD (1710.0

- 1755.0 MHz); Frequency: 1745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.22$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1745 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.58 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.340 V/m; Power Drift = -1.67 dB


Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 1.79 W/kg; SAR(10 g) = 0.907 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 1.92 W/kg

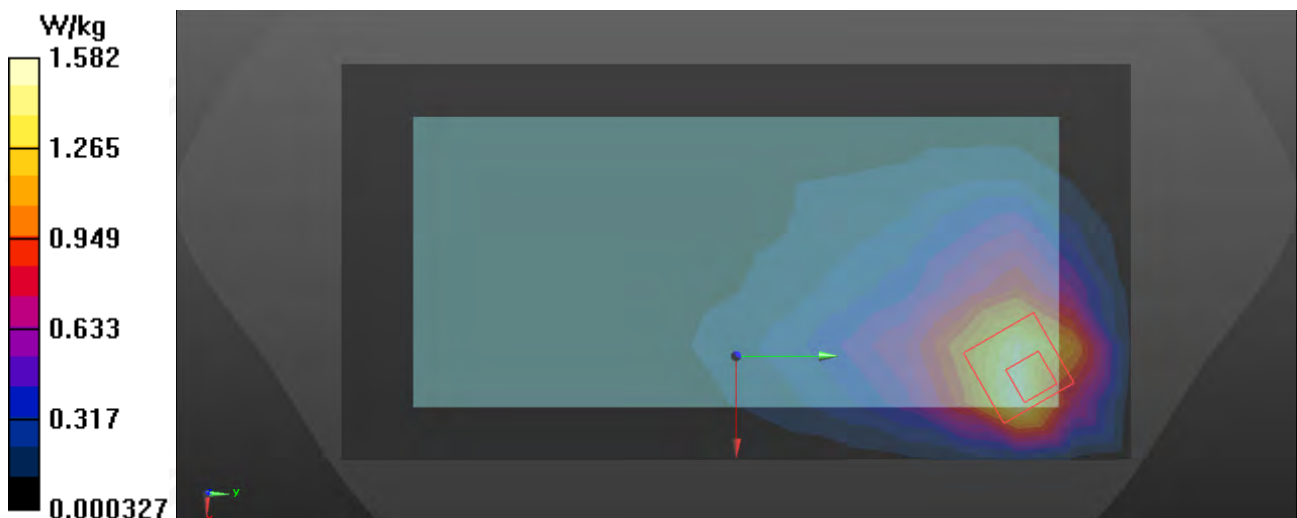

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 829 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.90$ S/m; $\epsilon_r = 41.46$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 829 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.138 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.370 V/m; Power Drift = 3.55 dB


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 25.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.2%

Maximum value of SAR (measured) = 0.137 W/kg

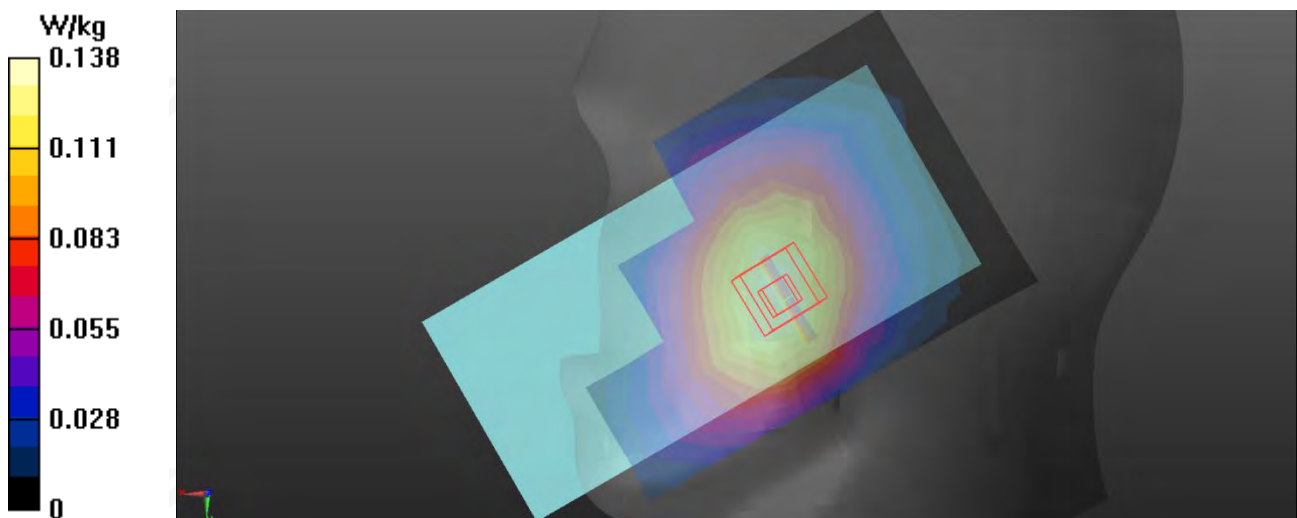

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 829 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.90$ S/m; $\epsilon_r = 41.46$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 829 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.142 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.27 V/m; Power Drift = 3.75 dB


Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.2%

Maximum value of SAR (measured) = 0.143 W/kg

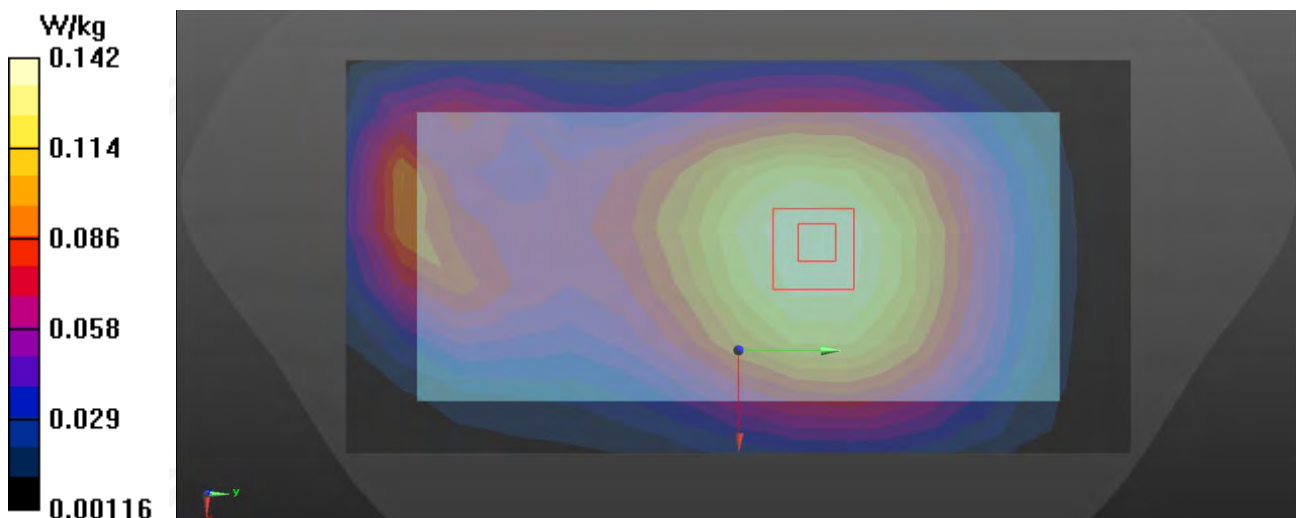

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 829 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.90$ S/m; $\epsilon_r = 41.46$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.2, 8.73, 8.98) @ 829 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.403 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.29 V/m; Power Drift = 0.96 dB


Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.423 W/kg

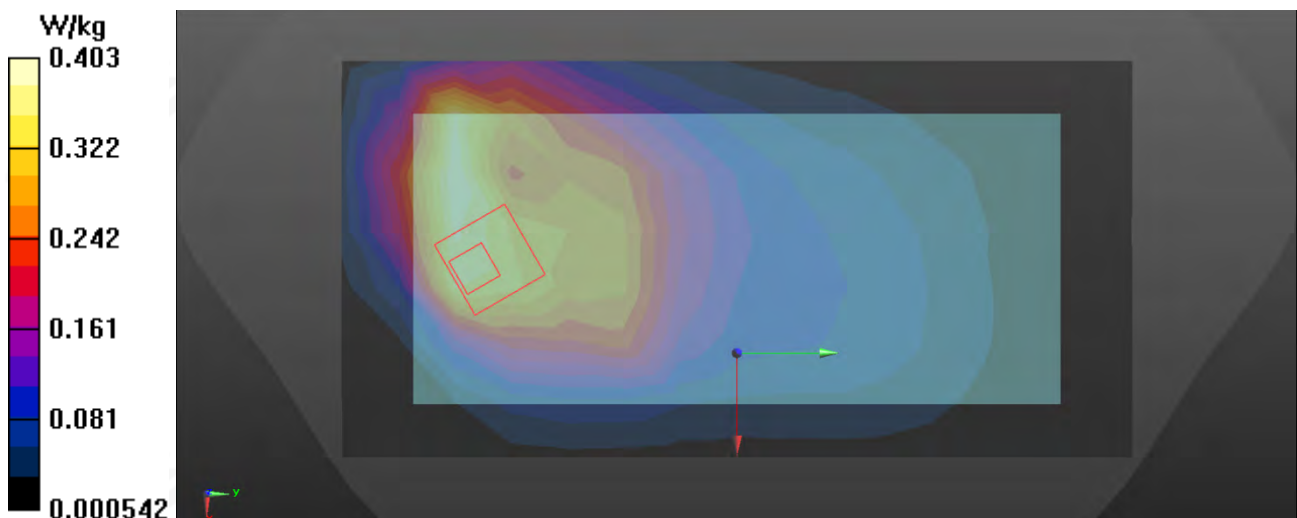

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0

- 2570.0 MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.14, 6.54, 6.73) @ 2510 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.616 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.56 V/m; Power Drift = -3.14 dB


Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.556 W/kg

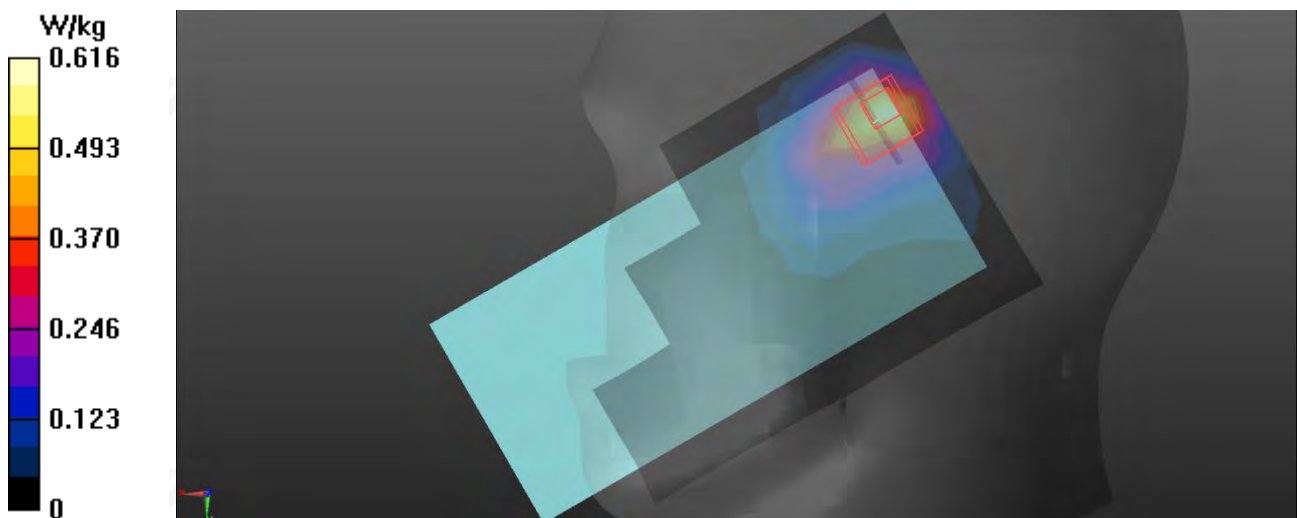

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.14, 6.54, 6.73) @ 2510 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.185 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.129 V/m; Power Drift = 3.47 dB


Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.219 W/kg

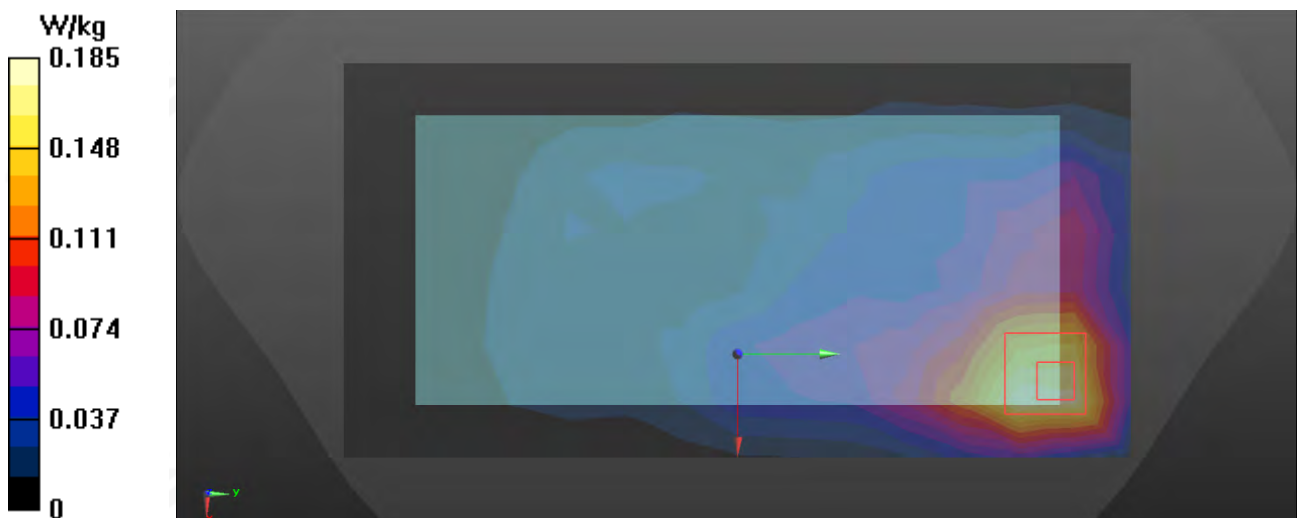

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0

- 2570.0 MHz); Frequency: 2510 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.3, 6.71, 6.9) @ 2510 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.10 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.067 V/m; Power Drift = 0.40 dB


Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.617 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 41.8%

Maximum value of SAR (measured) = 1.66 W/kg

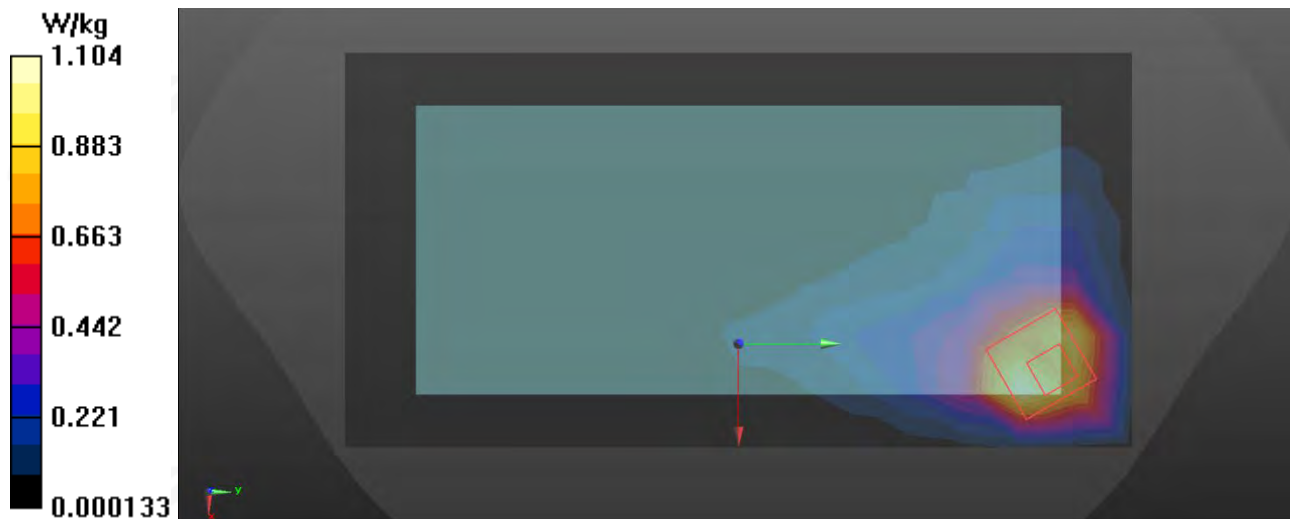

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 12, E-UTRA/FDD (698.0

- 716.0 MHz); Frequency: 704 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.41$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 704 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.150 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.488 V/m; Power Drift = -2.23 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.115 W/kg

Ratio of SAR at M2 to SAR at M1 = 81.4%

Maximum value of SAR (measured) = 0.154 W/kg

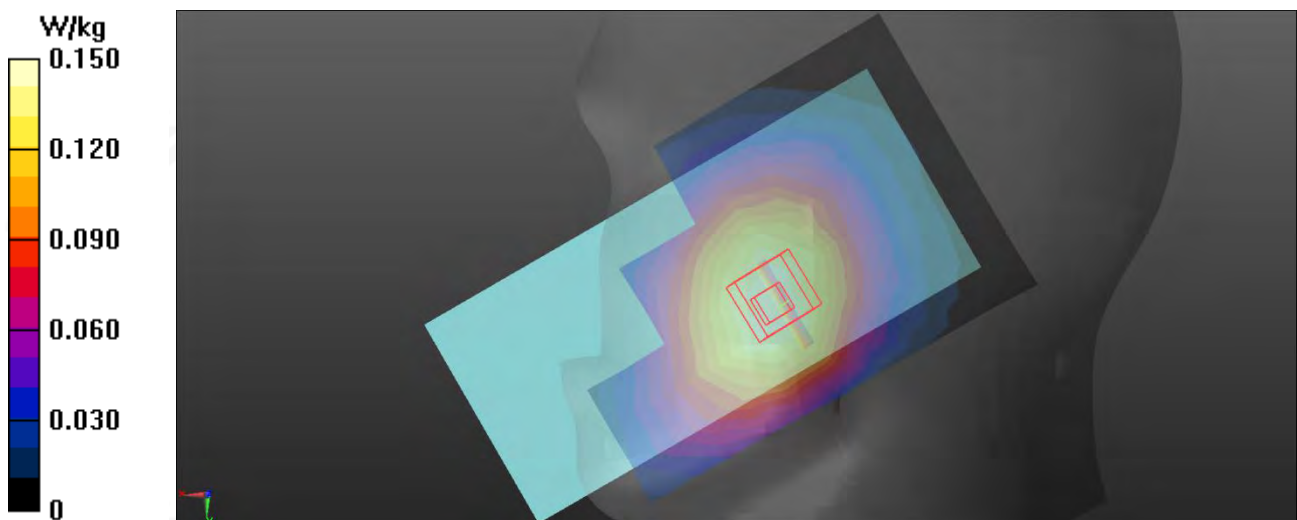



Plot 38: LTE B12_Back Side-10mm

Test Data : 2026-01-23

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 704 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.41$; $\rho = 1000$ kg/m³

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 704 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASYS 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.202 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.81 V/m; Power Drift = 3.12 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.149 W/kg

Ratio of SAR at M2 to SAR at M1 = 79.1%

Maximum value of SAR (measured) = 0.205 W/kg

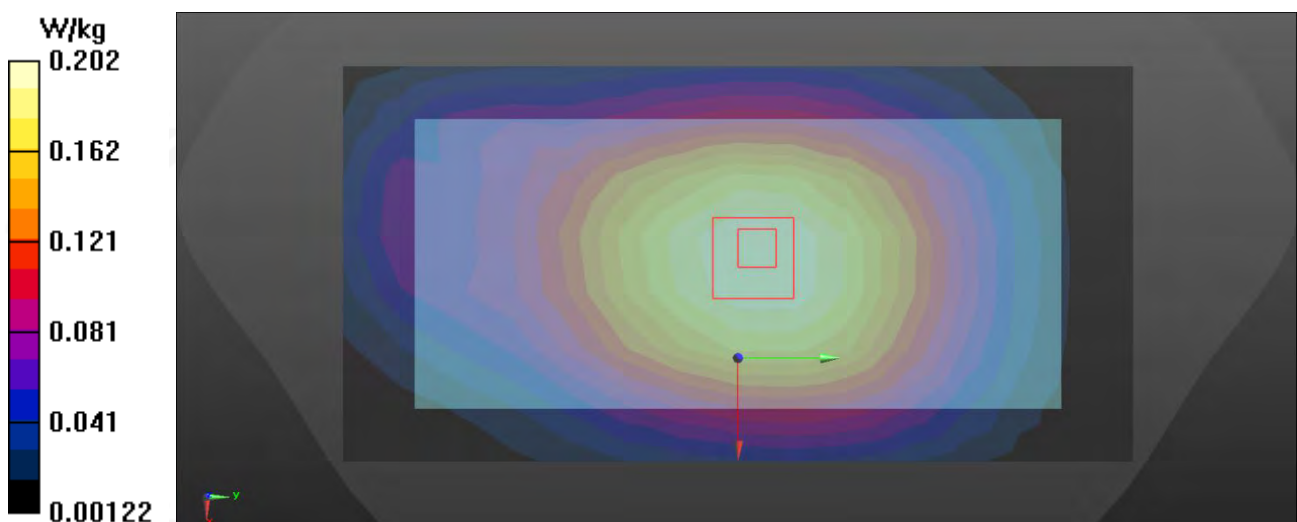

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 704 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 704$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.41$; $\rho = 1000$ kg/m³

Measurement Standard: DASy5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 704 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASy52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.296 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.28 V/m; Power Drift = 1.67 dB


Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.342 W/kg

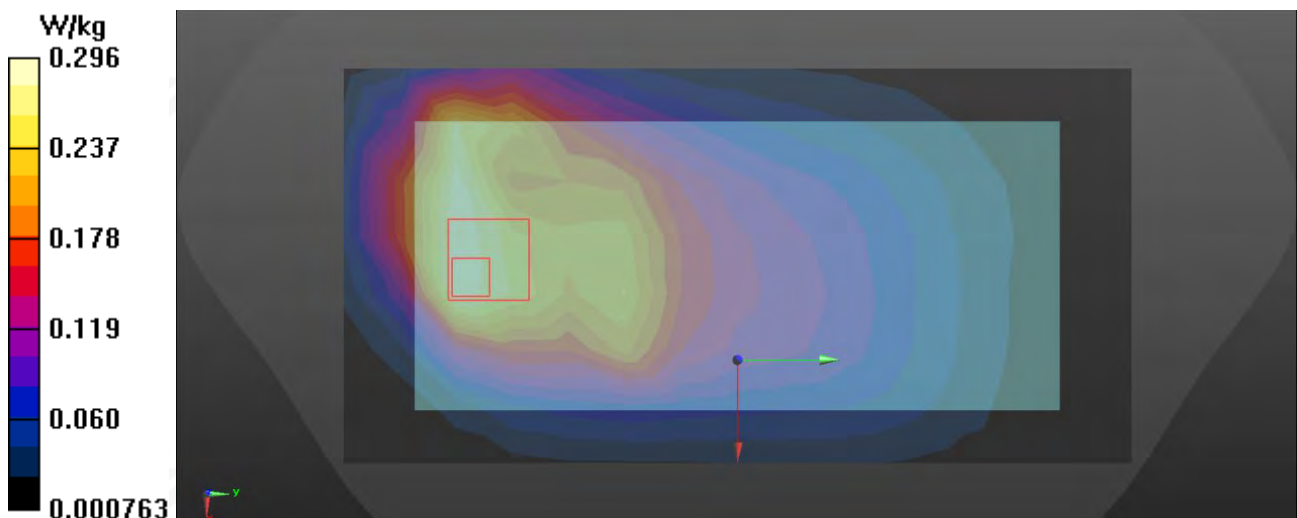

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0

- 716.0 MHz); Frequency: 709 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.97$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 709 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.158 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.299 V/m; Power Drift = -3.03 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.116 W/kg

Ratio of SAR at M2 to SAR at M1 = 81.5%

Maximum value of SAR (measured) = 0.156 W/kg

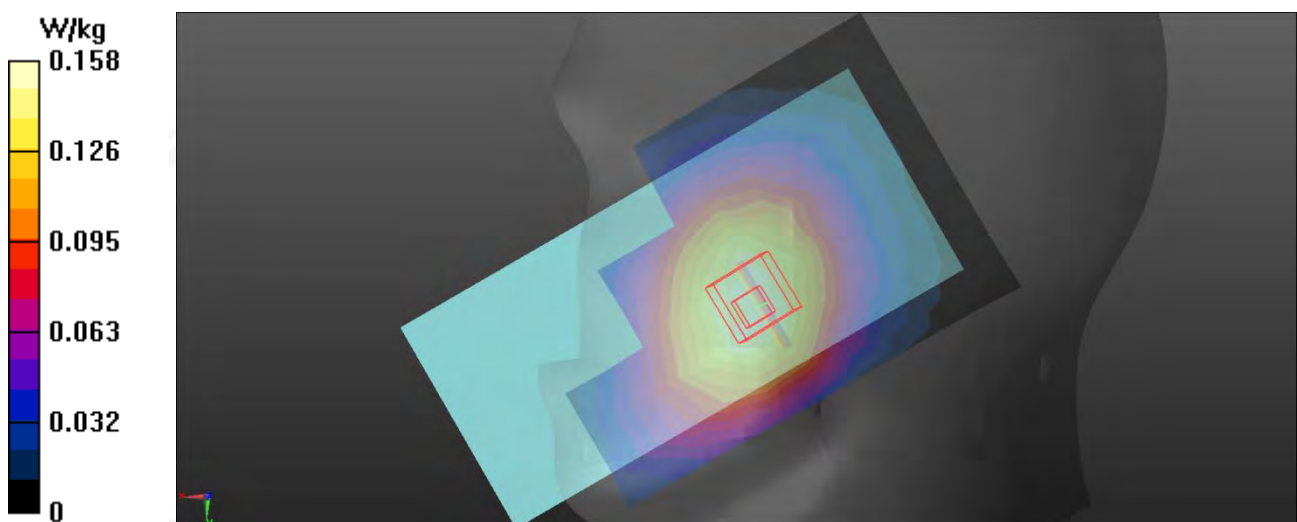



Plot 41: LTE B17_Back Side-10mm

Test Data : 2026-01-23

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.97$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 709 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.199 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.98 V/m; Power Drift = 2.41 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.149 W/kg

Ratio of SAR at M2 to SAR at M1 = 78.9%

Maximum value of SAR (measured) = 0.203 W/kg

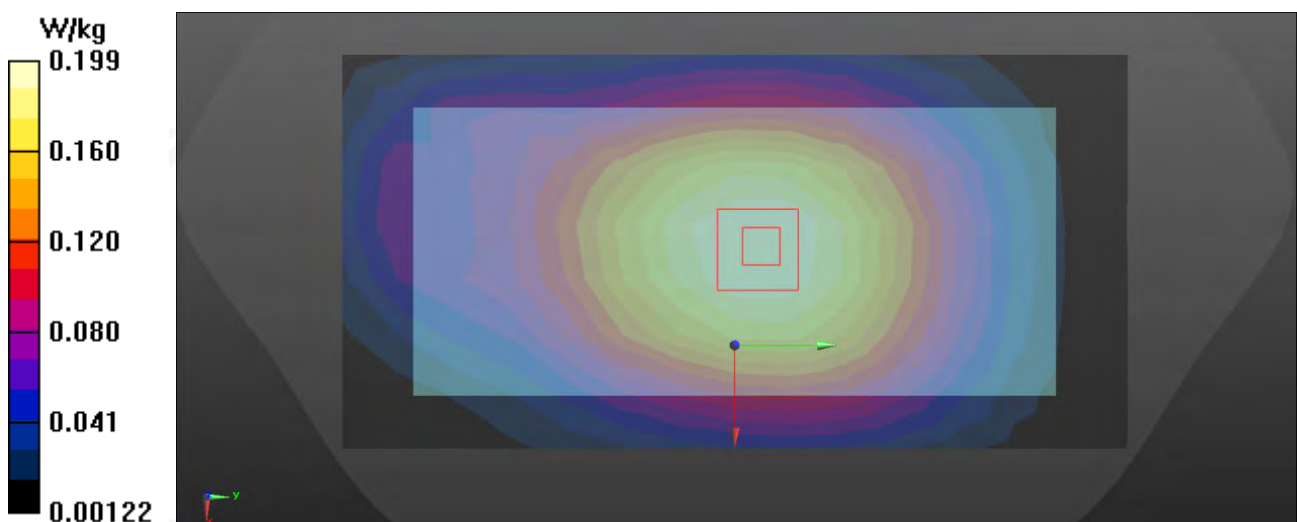



Plot 42: LTE B17_Back Side_0mm

Test Data : 2026-01-23

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 709 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 709$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.97$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(8.35, 8.89, 9.14) @ 709 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.297 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.68 V/m; Power Drift = 3.57 dB


Peak SAR (extrapolated) = 0.565 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.345 W/kg

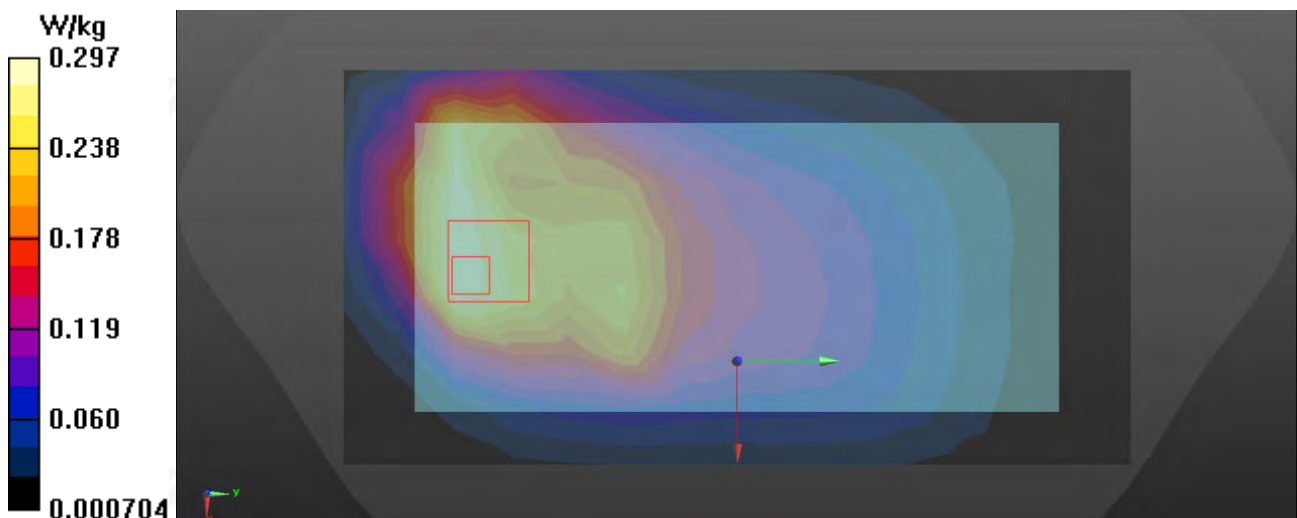

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 38.98$; $\rho = 1000$ kg/m³
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.14, 6.54, 6.73) @ 2680 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.292 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.538 V/m; Power Drift = 3.50 dB


Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.286 W/kg

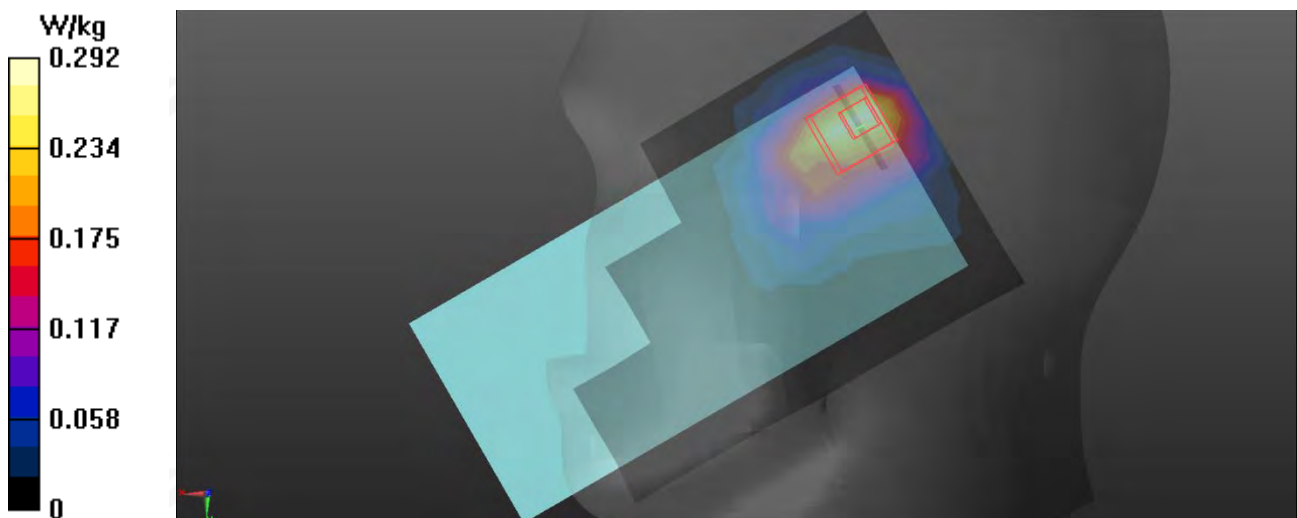

**DUT: 4G Smart phone**

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 38.98$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.14, 6.54, 6.73) @ 2680 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.0832 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 1.641 V/m; Power Drift = 2.34 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.042 W/kg

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 0.0883 W/kg

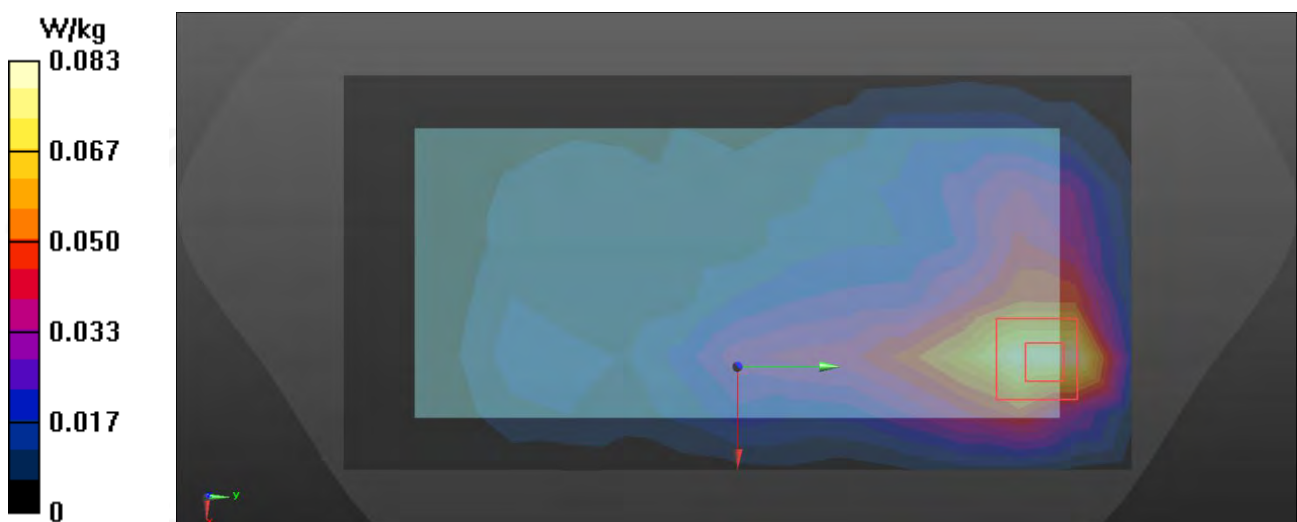



Plot 45: LTE B41_Back Side_0mm

Test Data : 2026-01-28

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 38.98$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(6.14, 6.54, 6.73) @ 2680 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.491 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.669 V/m; Power Drift = -1.15 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.675 W/kg

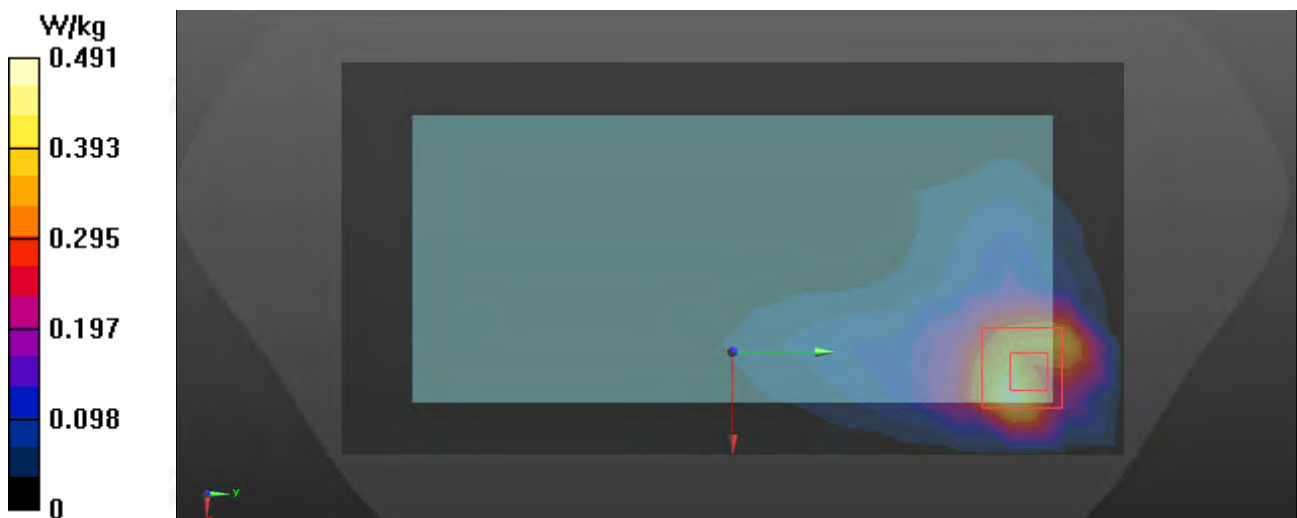



Plot 46: LTE B66_Right Cheek

Test Data : 2026-01-26

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 66, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1770 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.55$; $\rho = 1000$ kg/m³
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1770 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.701 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.62 V/m; Power Drift = -2.93 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.660 W/kg; SAR(10 g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 0.689 W/kg

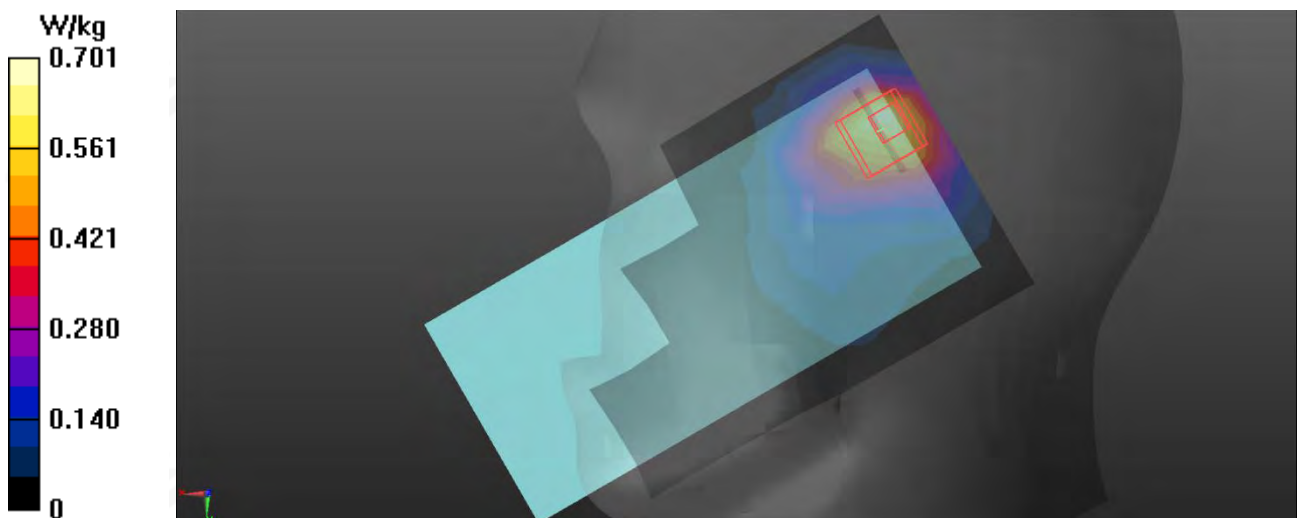



Plot 47:LTE B66_Back Side-10mm

Test Data : 2026-01-26

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 66, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1770 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.55$; $\rho = 1000$ kg/m³
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1770 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.493 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.475 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.525 W/kg

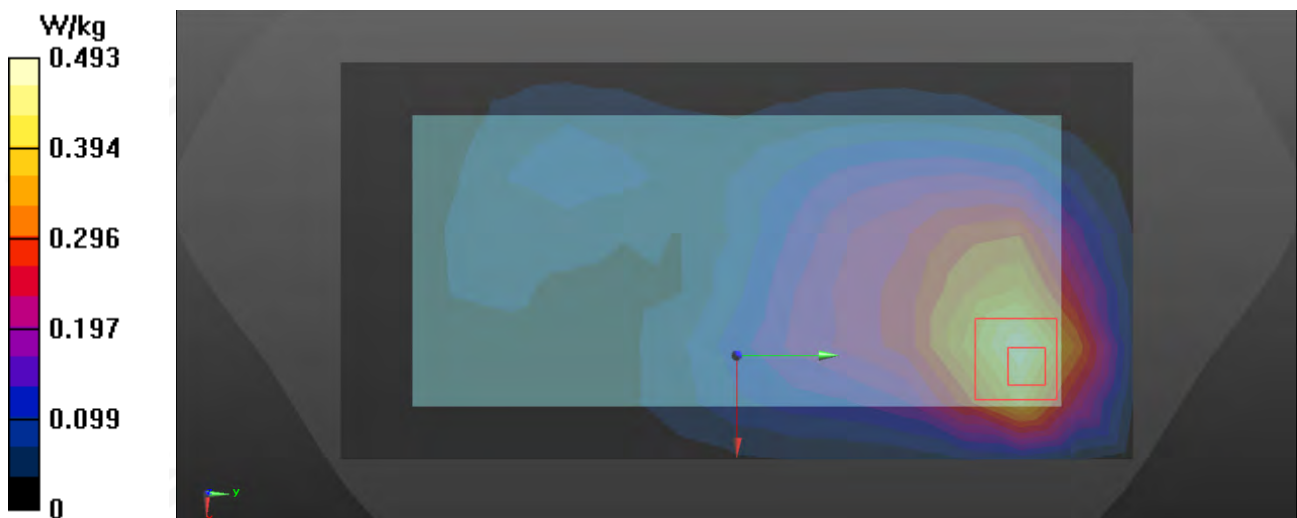



Plot 48: LTE B66_Back Side_0mm

Test Data : 2026-01-26

DUT: 4G Smart phone

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 66, E-UTRA/FDD (1920.0 - 1980.0 MHz); Frequency: 1770 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 1770$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.55$; $\rho = 1000$ kg/m³
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3806; ConvF(7.06, 7.52, 7.74) @ 1770 MHz; Calibrated: 2025/9/11
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE3 Sn428; Calibrated: 2025/9/8
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: xxxx
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

Area Scan (8x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.23 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.536 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 5.76 W/kg

SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.27 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 2.87 W/kg

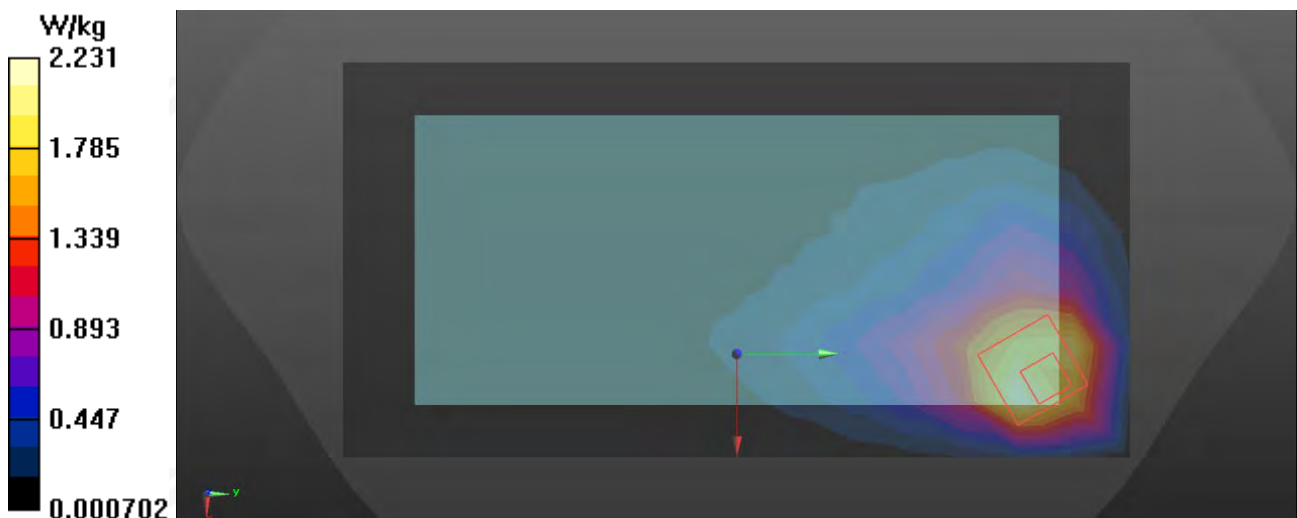



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※