


FCC Statement:
Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

SAR tests are conducted using standard operating positions accepted by FCC with the device transmitting at its highest certified power level in all tested frequency bands although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC. Tests for each product are performed in positions and locations as required by the FCC. For body worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with and accessory designated for this product or when used with and accessory that contains no metal. To maintain compliance with FCC RF exposure guidelines hold the transmitter and antenna at least 1 inch (2.5 centimeters) from your face and speak in a normal voice, with the antenna pointed up and away from the face.


Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

Reset
Terminal restore factory settings




About 4G LTE POC RADIO
View model-software version
kernel version, Android version.




Intercom settings
This function does not require operational settings.

System settings
Language
Chinese, English selection





Mobile network
Telecom card-Mobile card-Unicom card 4G network selection.


Brightness
Screen brightness adjustment settings



Sleep
Screen blackout time setting

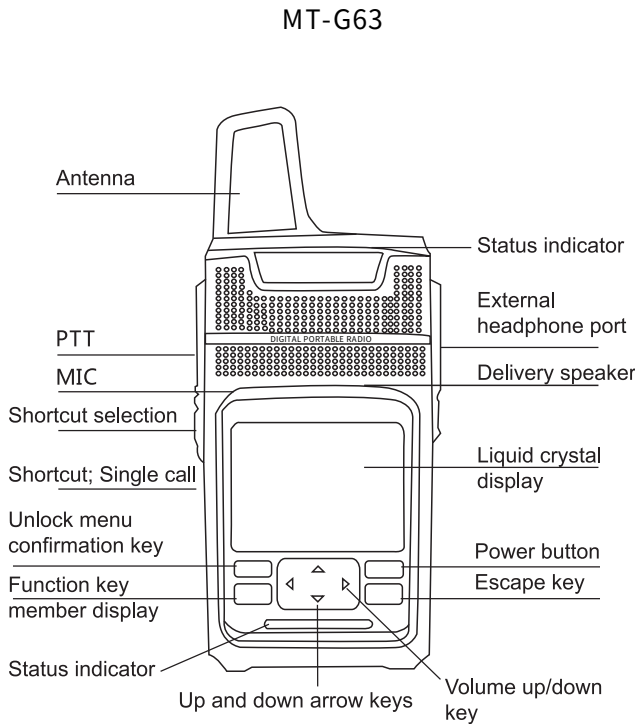


Intercom
Introduction to the main interface




Main interface: Display normal 4G signal, group, number, date according to the configuration of normal card.

Intercom record
Intercom record inquiry function

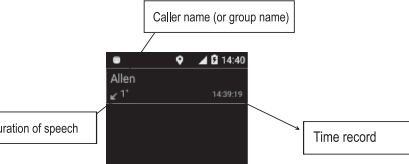


Select to enter the intercom record by pressing the confirm key: display the name of the corresponding call person (group name) speech duration, time

Group
Group display and selection function



Select to group function enter: display all groups where the terminal is located, and you can select the corresponding group to enter the intercom.

Contact list
Single call temporary group call function

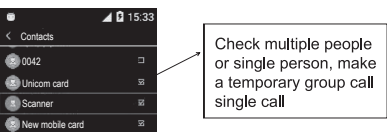

Select to Directory function: display all personnel names (numbers) in the same unit, press the confirm key to select a single person, (single call) multiple (temporary group call), press PPT to initiate the call.

Listen group
multi-group communication function



Select to listen to the group function to enter: check the group that needs to be listened to, and after checking, return, you can hear the intercom of the selected intercom test group under multiple groups.

Department
Department structure display single call function



Select the department function to enter: you can see the unit department classification, and you can also find the corresponding personnel in the department to call singly according to PPT.