



Fire Humidifier Audio User Manual

model: LR-K52

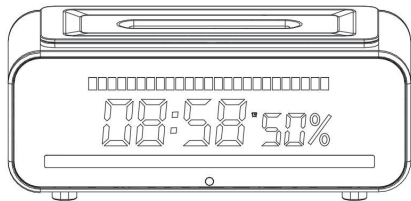

Product schematic diagram

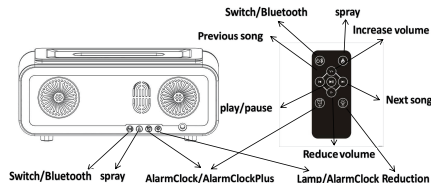

Remote control function settings

1. ON/OFF button, short press to turn on/off Bluetooth when turned on.
2. Fireplace lamp button, in the startup state, long press on/off atomization, short press to switch the spray light.
3. Alarm button, in the power on state, long press to enter the alarm setting, short press to increase the alarm time.
4. Press and hold the Light button to turn on and off the colorful gradient light and music rhythm light, and press and hold the alarm to reduce the alarm.
5. Play/House button. When turned on, press this button briefly to pause/play music.
6. Press the Prevbutton to switch to the previous song when the device is turned on.
7. Press the Next button to switch to the next song when the device is turned on.
8. VOL button, when turned on, short press to decrease the volume.
9. When the VOL button is turned on, short press to increase the volume.

Host key function settings

1. Press and hold the power/Bluetooth button for 2 seconds to turn on the power. Click on the Bluetooth switch, open your phone and search for the Bluetooth device name [LR-K52] to connect.
2. Spray button, long press the switch of spray and fan. Short press cycle to switch the spray light color.
3. Alarm button, in the power on state, long press to enter the alarm setting, the alarm symbol flashes, double-click the clock minute to switch settings, short press the alarm time plus, after setting, double-click to confirm the alarm setting, the alarm symbol stays on. If there is no operation within 6 seconds after entering the alarm setting, the current setting will be automatically exited without saving the modifications.
4. Light button, when turned on and in state, long press to turn on the rainbow gradient light and music rhythm light, short press to reduce the alarm, double-click to turn on the alarm.
5. The default volume is 60% when powered on, and the current volume is remembered when turned off without power loss.
6. When reconnected, the volume is maintained for the most recent use, and the volume is controlled through a phone or remote control.
7. The clock is automatically calibrated through Bluetooth connection to the phone. If the machine loses power, it needs to be recalibrated.
7. The humidity display shows the indoor humidity.

Spray flame light setting

1. Yellow flame light appears when turned on
2. Short press for the first time to switch the flame orange light
3. Short press for the second time to switch... Purple light
4. Short press for the third time to switch... Red light
5. Short press for the 4th time to switch... Green light
6. Short press for the 5th time to switch... Blue light
7. Short press for the 6th time to switch... Colorful automatic gradient
8. Press briefly for the seventh time, and the atomization light will go out.

Accessories&Maintenance

The accessories of this product include one main unit, one remote control, one adapter, and one copy of the instruction manual and certificate of conformity.

1. Turn off the power, unplug the power cord, and open the product cover.
2. Drain the remaining water from the water tank and be careful to pour it out from the right side to avoid water entering through the air outlet.
3. Wipe the inside of the water tank with a cleaning cloth or tissue to keep it clean.
4. When adding water, please make sure to open the product cover and use a water cup to add water to the water tank. Do not use the faucet to add water to the water tank to avoid causing malfunctions.

matters needing attention

1. Unauthorized modification or disassembly of this product is prohibited. If maintenance is required, please contact the sales office of this product and have professional technicians repair it for you.
2. Do not use this product in unstable places such as high altitude, slopes, or inside cars.
3. Do not intentionally damage the power cord, and do not place the power cord in a high temperature area.
4. If the machine is not used for a long time, please unplug the power, clean up any remaining water stains, and store it in a dry and cool environment.
5. To ensure hygiene, the water in the water tank must be completely emptied and cleaned after each use, and then the machine surface must be wiped dry with a soft cloth.

6. Please do not place this product in the air conditioner, fan outlet or the place with large air flow, otherwise the spray molding effect will be affected.
7. Do not cover the fog outlet of the product to avoid damage caused by water accumulation in the machine.
8. Do not allow spray to spray directly on furniture, clothes or walls.
9. Do not move the product during use, and do not touch the product when your hands are wet.

Troubleshooting during use

Malfunctions caused by incorrect machine settings or improper maintenance during use can be resolved by referring to the following methods.

When the machine malfunctions, please refer to the table below

Unable to open spray	● Is there enough or too much water in the water tank? --Check the water level ● Is the power cord connected correctly? --Disconnect, check the power cord and connect carefully
No fog or abnormal spray	● Insufficient or too much water? --Add water to the water tank, but do not fill it beyond the maximum water level ● Is there dirt inside the water tank of the ultrasonic atomizer? Please refer to the maintenance instructions to clean the equipment ● Is the air inlet too dirty? --Please clean the air inlet with a brush
The product is leaking	● Is product leakage caused by low temperature or high humidity? --Under these conditions, fog may quickly condense into water droplets. If you notice this phenomenon, please drain the machine water from the back side and invert it in a dry environment for 3 hours to air dry before use
The button is not functioning.	● Check if there is water overflowing from the machine? --If you find these, please immediately disconnect the power and pour out the water from the right side, then invert the machine and air dry it in a dry environment for 3 hours before use (note that the cover must be tightly closed during use to prevent water from spraying into the machine and causing permanent damage)

Conventional technical parameters

Product Name: Fireplace Aromatherapy Humidifier Sound System

Bluetooth version: 5.0

Speaker specification: Diameter 40mm, 4 ohms and 5 watts

Color: Black, White

Product size: 1250 * 105 * 105

Water tank capacity: 400ML

Rated voltage: DC24V

Rated current: 650mA

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction