

TEST REPORT

Applicant : Dongguan luck-Toon Electronic Technology Co.,Ltd
Address : Room 901, Building 3, No. 86, Yinguang Road, Hengli Town,
Dongguan City, Guangdong Province, China
Manufacturer : Dongguan luck-Toon Electronic Technology Co.,Ltd
Address : Room 901, Building 3, No. 86, Yinguang Road, Hengli Town,
Dongguan City, Guangdong Province, China
Product Name : 4 in 1 wireless charger
Model Number : SM20CQ-R1
Trademark : N/A

FCC ID : 2BSY8-SM20CQR1

Test Date : Jan. 28, 2026 – Feb. 03, 2026

Date of Report : Feb. 03, 2026

Test Result : This device described above has been tested by BKC, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.

Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C
ANSI C63.10:2020
RSS-216 Issue 3 September 3, 2024
RSS-Gen Issue 5, Amendment 2 (February 2021)

Prepared by(Test Engineer):
Carey Zheng



Reviewer(Supervisor):
Casey Wang



Approved(Manager):
Jerry Liao




TABLE OF CONTENT

1. General Information	4
1.1. Description of Device (EUT)	4
1.2. Channel List	4
1.3. Summary of test result	4
1.4. Special Accessories and Auxiliary Equipment	5
1.5. Test mode	5
1.6. Block Diagram	5
1.7. Test Conditions	5
1.8. Independent Operation Modes	6
1.9. Test Mode	7
1.10. Measurement Uncertainty (95% confidence levels, k=2)	7
1.11. Test Facility	8
1.12. Test Equipment	8
2. Conducted emission at the mains terminals test	10
2.1. Limit	10
2.2. Test Setup	10
2.3. Test Procedure	10
2.4. Test Result	11
3. Radiated Spurious Emissions	13
3.1. Limit	13
3.2. Test Setup	14
3.3. Test Procedure	16
3.4. Test Result	17
4. -20 dB Bandwidth Measurement	20
4.1. Limit	20
4.2. Test Setup	20
4.3. Test Procedure	20
4.4. Test Result	20
5. Antenna Requirement	22
6. Test Photographs	23
7. Appendix I: Photos of the EUT	23

Revision History of This Test Report

[illegible]

1. General Information

1.1. Description of Device (EUT)

EUT Name : 4 in 1 wireless charger

Model No. : SM20CQ-R1

Model Difference : /

Power supply : Type-C Input: 5V= 3A, 9V= 3.5A
Power Output:
Mobile phone output:5W;7.5W;10W;15W
Earphone output: 5W (max)
iWatch output:2W (max)
Night lamp output:1W(max)

Operation frequency : 111-205 KHz for Phone and Earbuds
111-365KHz for Watch

Modulation : MSK

Antenna Type : Coil Antenna, Maximum Gain is 0dBi

Intend use environment : Residential, commercial and light industrial environment

1.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	/	/	/	/

1.3. Summary of test result

RF PART		
Test Items	Test Requirement	Result
Antenna requirement	15.203 RSS-Gen 7.1.2	PASS
AC Power Line Conducted Emission	15.207 RSS-216 5.3.2	PASS
Spurious Emission	15.209(a)(f) RSS-216 5.3.3	PASS
20dB Bandwidth	15.215 RSS-Gen Section 6.7	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.4.Special Accessories and Auxiliary Equipment


Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	4 in 1 wireless charger	N/A	SM20CQ-R1	N/A	EUT
E-2	iPhone		iPhone 13	N/A	Auxiliary
E-3	Adapter	OMIX	X2903	N/A	Auxiliary
E-4	AirPods		AirPods 2	N/A	Auxiliary
E-5	iWatch		iWatch S2	N/A	Auxiliary

1.5.Test mode


Test mode	Low channel	Middle channel	High channel
MSK	/	/	/
Note: /			

1.6.Block Diagram

Conducted Emission



Radiated Emission



Conducted Spurious



1.7.Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35°C	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	AC 120V/60Hz for adapter	N/A
Note: N/A is an abbreviation for Not Applicable.		

1.8.Independent Operation Modes

Input	Mode	Description	Remark(Power for AE)
5V= 3A	1.	EUT + iPhone(5W)	5%
	2.		50%
	3.		95%
	4.	EUT + iPhone(7.5W)	5%
	5.		50%
	6.		95%
	7.	EUT + iPhone(10W)	5%
	8.		50%
	9.		95%
	10.	EUT + iPhone(15W)	5%
	11.		50%
	12.		95%
	13.	EUT + iWatch(2W)	5%
	14.		50%
	15.		95%
	16.	EUT + AirPods(5W)	5%
	17.		50%
	18.		95%
	19.	EUT + iPhone(15W) + iWatch(2W)	5%
	20.		50%
	21.		95%
	22.	EUT + iPhone(15W) + AirPods(5W)	5%
	23.		50%
	24.		95%
	25.	EUT + AirPods(5W) + iWatch(2W)	5%
	26.		50%
	27.		95%
	28.	EUT + iPhone(15W) + iWatch(2W) + AirPods(5W)	5%
	29.		50%
	30.		95%
Remark: All the modes have tested and recorded the worst mode (Mode 58-5% electricity) in the report			

	Mode	Description	Remark(Power for AE)
9V $\approx$ 3.5A	31.	EUT + iPhone(5W)	5%
	32.		50%
	33.		95%
	34.	EUT + iPhone(7.5W)	5%
	35.		50%
	36.		95%
	37.	EUT + iPhone(10W)	5%
	38.		50%
	39.		95%
	40.	EUT + iPhone(15W)	5%
	41.		50%
	42.		95%
	43.	EUT + iWatch(2W)	5%
	44.		50%
	45.		95%
	46.	EUT + AirPods(5W)	5%

47.		50%
48.		95%
49.	EUT + iPhone(15W) + iWatch(2W)	5%
50.		50%
51.		95%
52.	EUT + iPhone(15W) + AirPods(5W)	5%
53.		50%
54.		95%
55.	EUT + AirPods(5W) + iWatch(2W)	5%
56.		50%
57.		95%
58.	EUT + iPhone(15W) + iWatch(2W) + AirPods(5W)	5%
59.		50%
60.		95%

Remark: All the modes have tested and recorded the worst mode (Mode 58-5% electricity) in the report

1.9.Test Mode

Test Items	Test Voltage	Operation Modes
RE	Adapter input AC 120V/60Hz	Mode 58
CE	Adapter input AC 120V/60Hz	Mode 58

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

1.10.Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for radio frequency	$\pm 7 \times 10^{-8}$	
Conducted Emissions (150kHz~30MHz)	$\pm 2.54\text{dB}$	
Radiated Emission(9KHz~30MHz)	$\pm 1.6\text{ dB}$	
Radiated Emission(30MHz~1GHz)	Vertical: $\pm 4.14\text{dB}$ Horizontal: $\pm 4.25\text{dB}$	
Radiated Emission(1GHz~6GHz)	$\pm 3.9\text{dB}$	
Radiated Emission(6GHz~18GHz)	$\pm 4.3\text{dB}$	
Radiated Emission(18GHz~40GHz)	$\pm 3.38\text{dB}$	
Uncertainty for conducted RF Power	$\pm 0.20\text{dB}$	
Conducted spurious emissions	$\pm 0.24\text{dB}$	
Uncertainty for temperature	0.6°C	
Uncertainty for humidity	1%	
Bandwidth	$\pm 1.5 \times 10^{-6}$	
Time	$\pm 2\%$	
Duty Cycle	$\pm 2\%$	

Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%

1.11. Test Facility

Site Description		
Name of Firm	:	Shenzhen BKC Testing Co., Ltd.
Site Location	:	Room 103, 1/F, Huaya Building, Huaya Industrial Park, Longhua Community, Longhua District, Shenzhen, Guangdong, China.
ISED CAB identifier	:	CN0188
ISED Company Number	:	34333
FCC Designation Number	:	CN1416
FCC Test Firm Registration Number	:	701543

1.12. Test Equipment

Conducted Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	102762	Mar. 10. 2025	Mar. 09. 2026
2	EMI Test Receiver	R&S	ESCI	101424	Mar. 10. 2025	Mar. 09. 2026
3	Rf cables	HTEC	HCE 2M-CE	N/A	Mar. 10. 2025	Mar. 09. 2026
4	Coupling/ Decoupling Network	Diamond	CX210	N/A	Mar. 10. 2025	Mar. 09. 2026
5	CE Testing software	EZ	EZ-EMC	/	/	/

Radiated Test Site (Below 1G and Above 1G)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Antenna	Schwarzbeck	VULB 9168	01321	Mar. 20. 2025	Mar. 19. 2028
2	EMI Test Receiver	R&S	ESRP	101478	Mar. 10. 2025	Mar. 09. 2026
3	Preamplifier	HP	8447D	2727A05345	Mar. 10. 2025	Mar. 09. 2026
4	Double Ridged Broadband	SCHWARZBECK	BBHA 9120D	02621	Mar. 10. 2025	Mar. 19. 2028
5	Preamplifier	Schwarzbeck	BBV 9718D	00041	Mar. 10. 2025	Mar. 09. 2026
6	Rf cables	HUBER+SUHNER	8M-RE	N/A	Mar. 10. 2025	Mar. 09. 2026
7	Rf cables	HUBER+SUHNER	1.5M-RE	N/A	Mar. 10. 2025	Mar. 09. 2026
8	Rf cables	HUBER+SUHNER	1.5M-AP-RE	N/A	Mar. 10. 2025	Mar. 09. 2026
9	Loop antenna	ANRF	ANRF-6603	091802	Mar. 09. 2025	Mar. 10. 2026
10	Spectrum analyzer	R&S	FSP40	200061	Feb. 13. 2025	Feb. 12. 2026

11	Double Ridged Broadband Horn Antenna	COM-POWER	AH-1840	10100009	Mar. 10. 2025	Mar. 09. 2026
12	Spectrum	Agilent	N9020A	MY50510311	Mar. 09. 2025	Mar. 10. 2026
13	High Pass Filter	Bafang	BSF5G	2024052610	Mar. 09. 2025	Mar. 10. 2026
14	RE Testing software	EZ	EZ-EMC	/		/

RF Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum	Agilent	N9020A	MY50510311	Mar. 09. 2025	Mar. 10. 2026
2	Vector source	Agilent	N5182A	MY47420223	Mar. 09. 2025	Mar. 10. 2026
3	All instrument	Rohde & Schwarz	CMW 500	101131	Mar. 09. 2025	Mar. 10. 2026
4	control unit	MW	MW100-RFCB	MW200411BK-34	Mar. 09. 2025	Mar. 10. 2026
5	RF Testing software	MW	MTS 8310	/	Mar. 09. 2025	/
6	Spectrum analyzer	R&S	FSP40	200061	Feb. 13. 2025	Feb. 12. 2026

Test software

Software name	RF Testing software
Software version	2.0.0.0
Software name	RE Testing software
Software version	EMEC-03A2 RE+
Software name	CE Testing software
Software version	EMEC-3A1+

2. Conducted emission at the mains terminals test


2.1.Limit

Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen 8.8&RSS-216 5.3.2
Test Method:	ANSI C63.10:2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.2. Test Setup

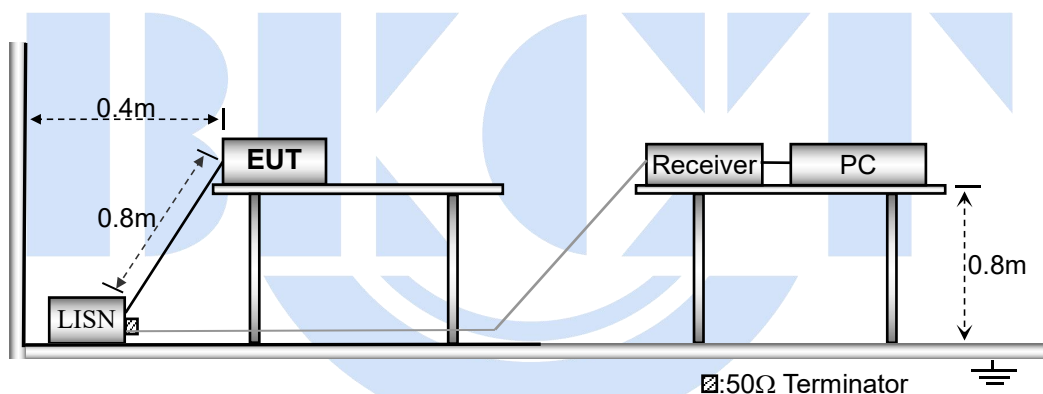


2.3. Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item – EUT Test Photos.

2.4.Test Result

Conducted Emission at The Mains Terminals Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 58

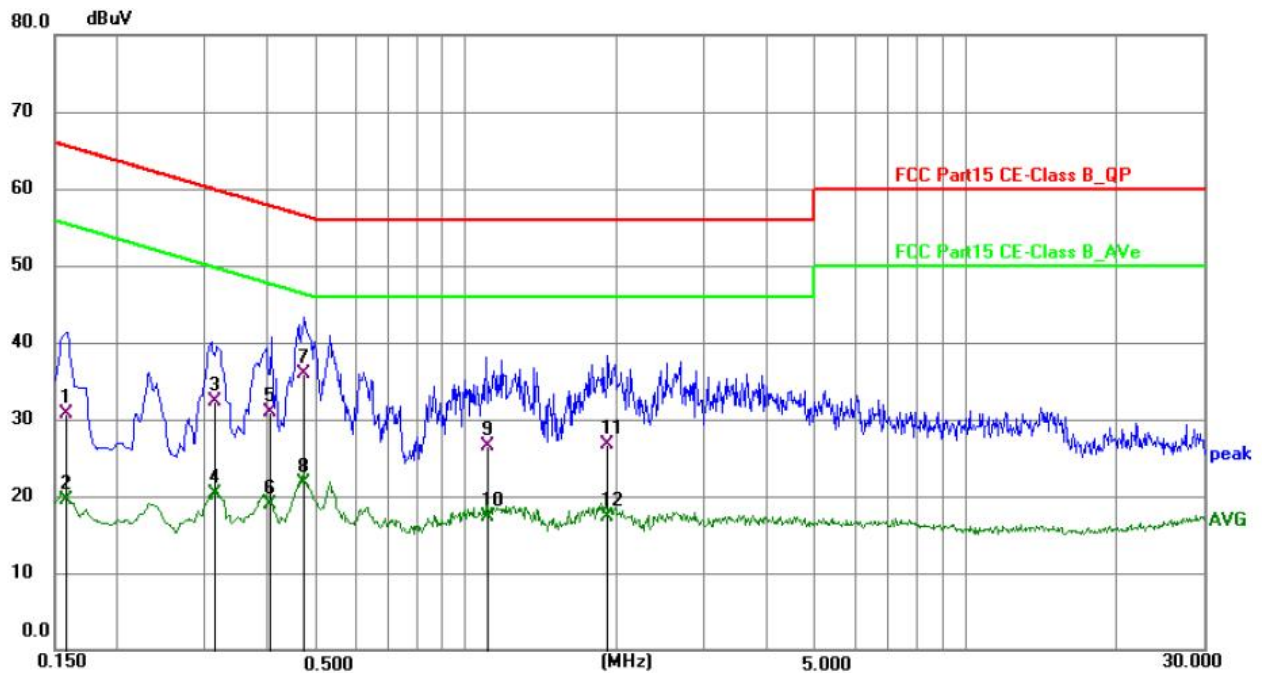


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	11.29	19.49	30.78	65.57	-34.79	QP
2	0.1580	-0.02	19.49	19.47	55.57	-36.10	AVG
3	0.3125	12.92	19.48	32.40	59.90	-27.50	QP
4	0.3125	0.80	19.48	20.28	49.90	-29.62	AVG
5	0.4021	11.43	19.49	30.92	57.81	-26.89	QP
6	0.4021	-0.62	19.49	18.87	47.81	-28.94	AVG
7 *	0.4712	16.51	19.49	36.00	56.49	-20.49	QP
8	0.4712	2.16	19.49	21.65	46.49	-24.84	AVG
9	1.1121	6.95	19.51	26.46	56.00	-29.54	QP
10	1.1121	-2.18	19.51	17.33	46.00	-28.67	AVG
11	1.9272	7.21	19.55	26.76	56.00	-29.24	QP
12	1.9272	-2.17	19.55	17.38	46.00	-28.62	AVG

Notes:

- 1.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission
2. Margin = Reading level + Correct Factor - Llimit

Conducted Emission at The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 58

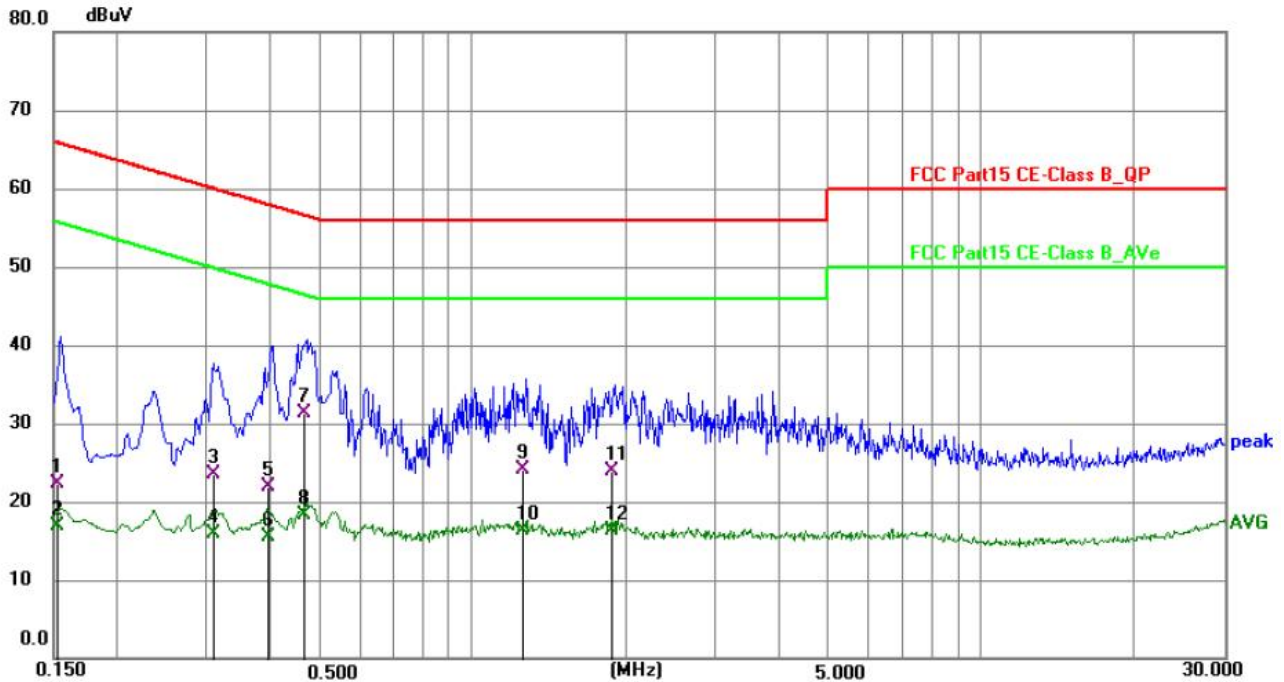

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1528	2.88	19.49	22.37	65.85	-43.48	QP
2	0.1528	-2.58	19.49	16.91	55.85	-38.94	AVG
3	0.3093	4.07	19.48	23.55	59.99	-36.44	QP
4	0.3093	-3.63	19.48	15.85	49.99	-34.14	AVG
5	0.3967	2.50	19.49	21.99	57.92	-35.93	QP
6	0.3967	-3.90	19.49	15.59	47.92	-32.33	AVG
7 *	0.4659	11.80	19.49	31.29	56.59	-25.30	QP
8	0.4659	-1.28	19.49	18.21	46.59	-28.38	AVG
9	1.2631	4.52	19.52	24.04	56.00	-31.96	QP
10	1.2631	-3.13	19.52	16.39	46.00	-29.61	AVG
11	1.8878	4.33	19.55	23.88	56.00	-32.12	QP
12	1.8878	-3.32	19.55	16.23	46.00	-29.77	AVG

Notes:

- 1.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission
- 2.Margin = Reading level + Correct Factor - Llimit

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 ,RSS-216 5.3.3& RSS GEN 8.9

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2020

Test Result: PASS

Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


3.2. Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

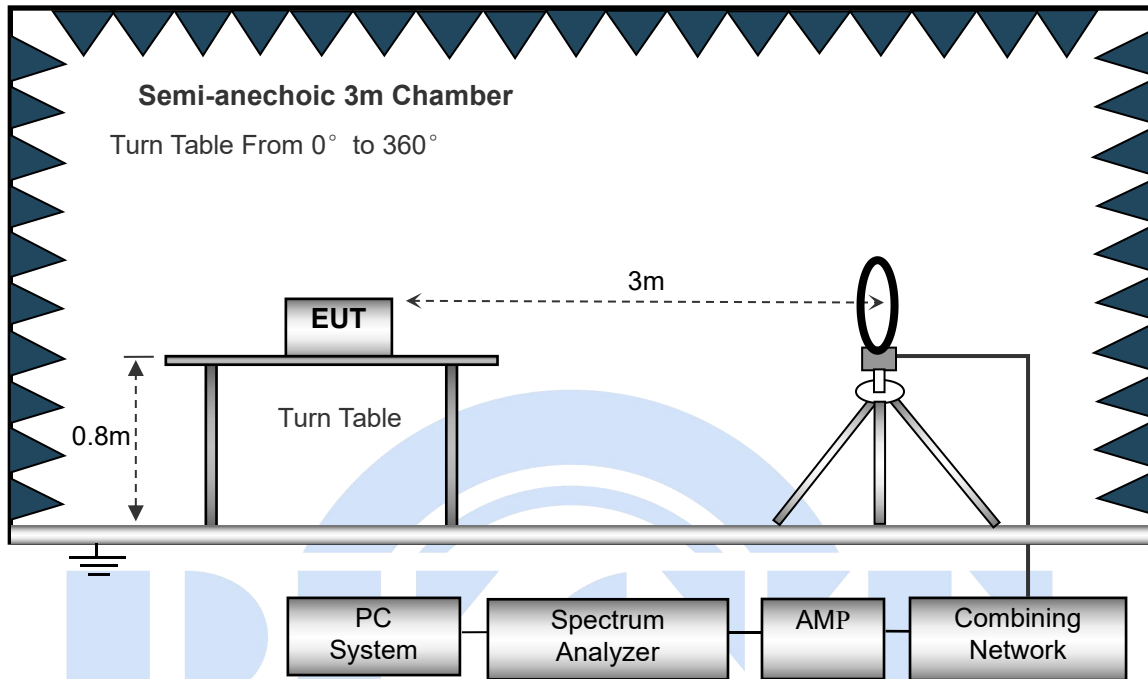

The test setup for emission measurement from 30 MHz to 1 GHz.

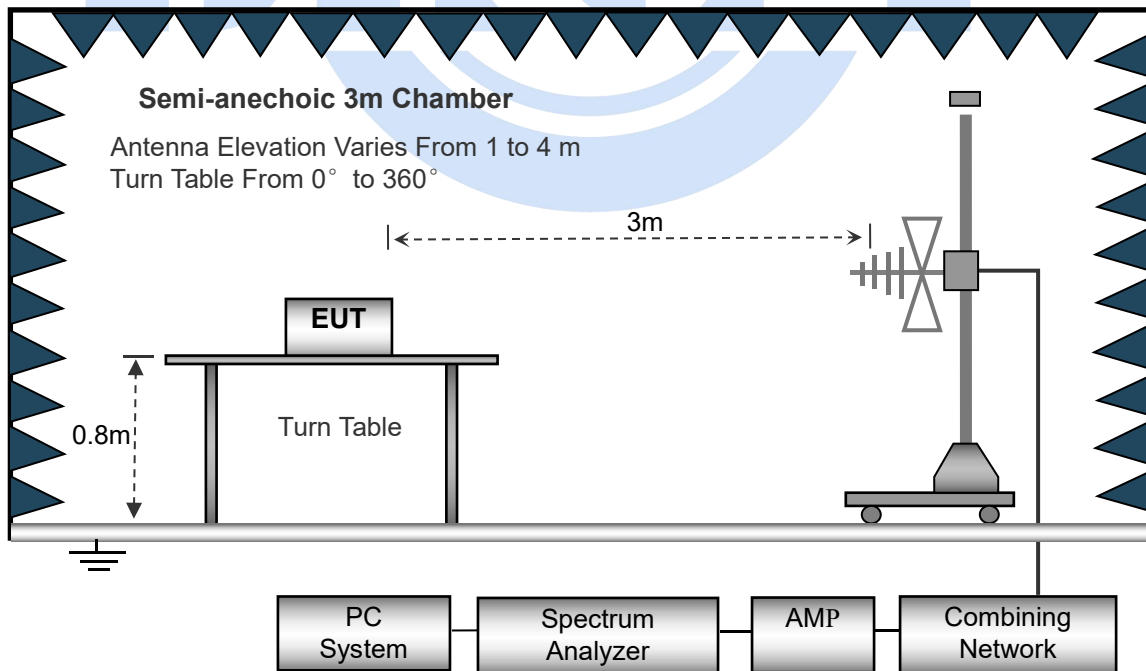

The test setup for emission measurement above 1 GHz.

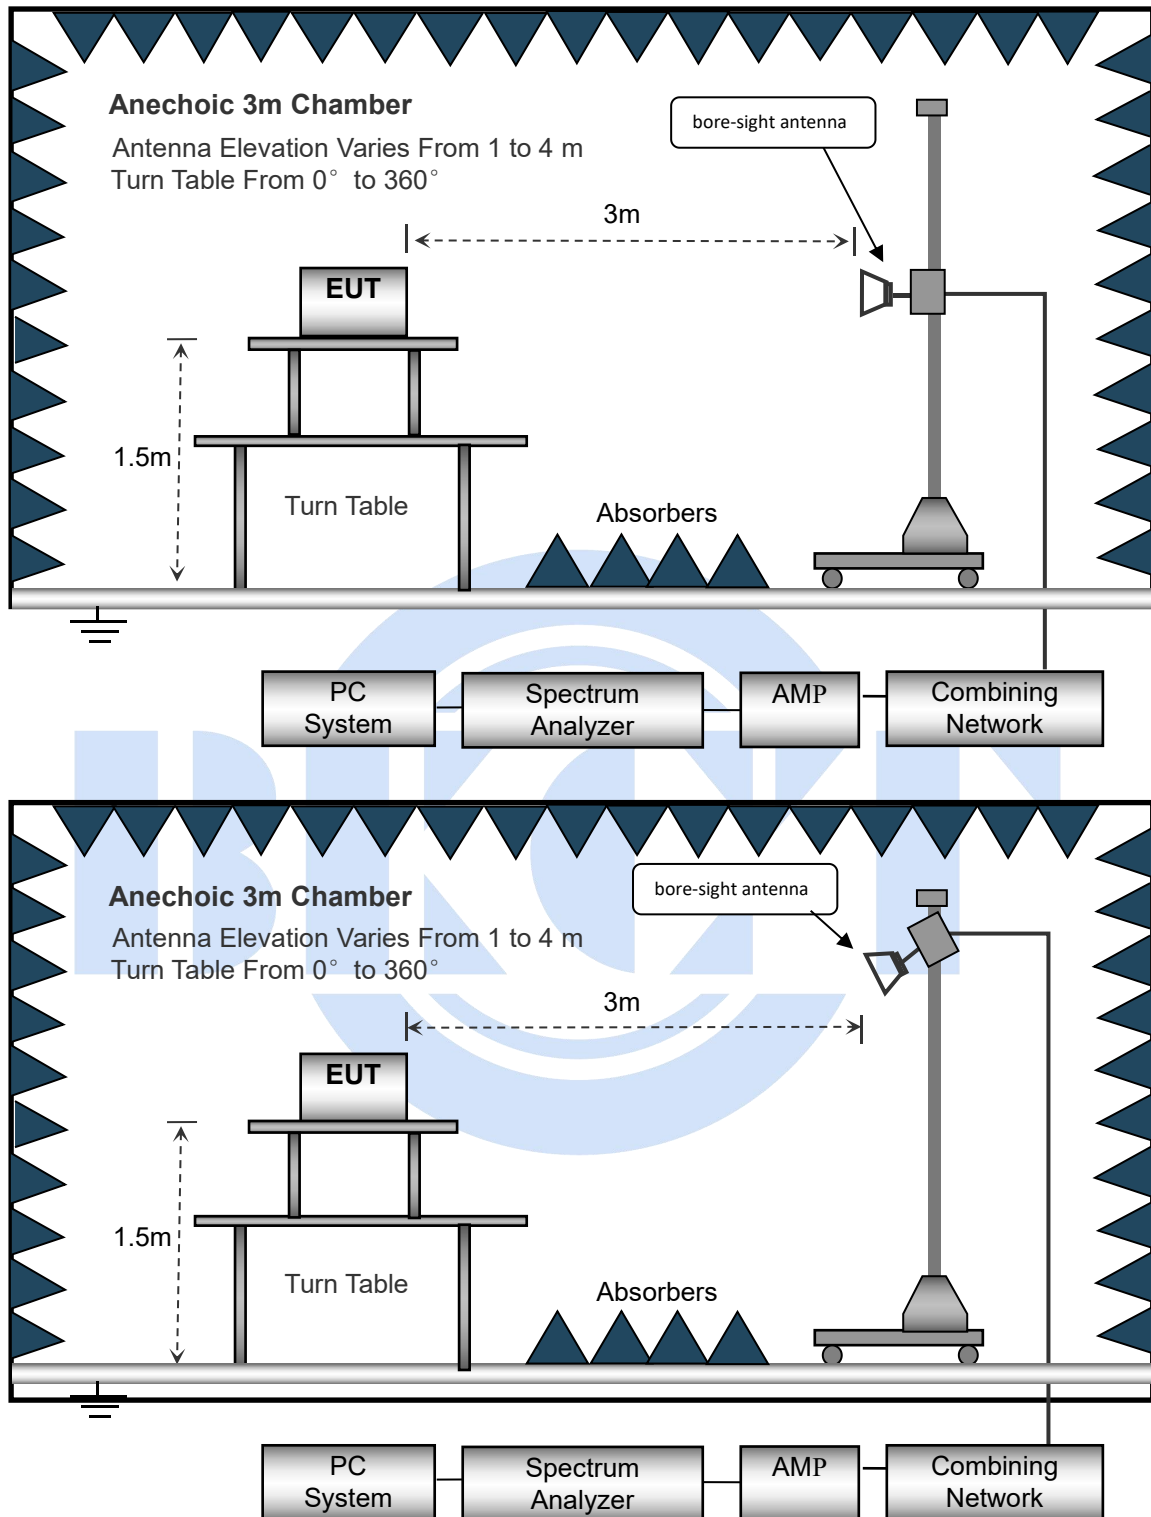

3.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.



3.4. Test Result

Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

$\text{dBuV/m} = 20 \log (\mu\text{V/m})$

9 kHz~30 MHz

Temperature:		25.1℃		Relative Humidity:		54%
Pressure:		1008hPa		Polarization:		Coaxial
Test Voltage:		AC 120V/60Hz		Mode:		Mode 58
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(kHz)	(dBμV/m)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
158.8	73.3	20.3	93.6	123.59	-29.99	peak
158.8	56.73	20.3	77.03	103.59	-26.56	AV
268.58	68.14	20.24	88.38	119.02	-30.64	peak
268.58	54.87	20.24	75.11	99.02	-23.91	AV
441	65.65	20.02	85.67	114.72	-29.05	peak
441	47.02	20.02	67.04	94.72	-27.68	AV
1571.5	27.05	20.59	47.64	63.68	-16.04	QP
3317.8	25.95	21.41	47.36	69.54	-22.18	QP
6234.42	23.02	22.14	45.16	69.54	-24.38	QP
Temperature:		25.1℃		Relative Humidity:		54%
Pressure:		1008hPa		Polarization:		Coplanar
Test Voltage:		AC 120V/60Hz		Mode:		Mode 4
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(kHz)	(dBμV/m)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	
158.8	73.68	20.3	93.98	123.59	-29.61	peak
158.8	55.47	20.3	75.77	103.59	-27.82	AV
267.84	66.47	20.24	86.71	119.05	-32.34	peak
267.84	52.73	20.24	72.97	99.05	-26.08	AV
440.8	65.04	20.02	85.06	114.72	-29.66	peak
440.8	48.14	20.02	68.16	94.72	-26.56	AV
1570.69	26.48	20.59	47.07	63.68	-16.61	QP
3317.51	25.39	21.41	46.8	69.54	-22.74	QP
6234.87	20.46	22.14	42.6	69.54	-26.94	QP

Note:


Pre-scan in all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.

Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 58

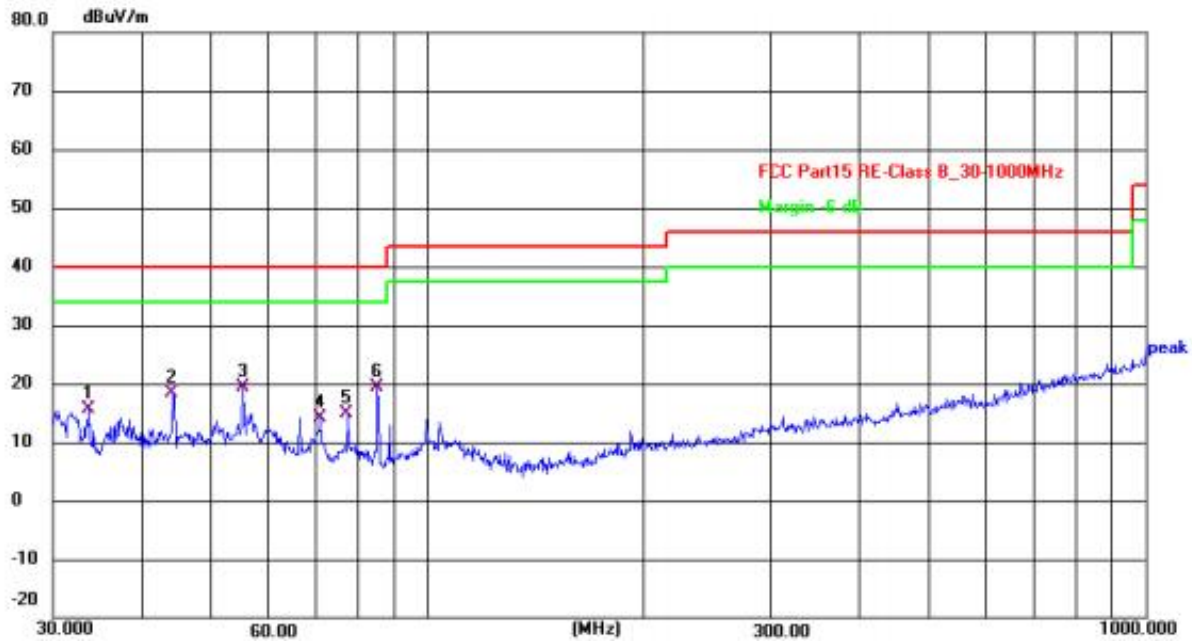

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.6802	32.08	-16.33	15.75	40.00	-24.25	QP
2	44.1200	32.72	-14.45	18.27	40.00	-21.73	QP
3	55.2207	34.12	-14.64	19.48	40.00	-20.52	QP
4	70.8315	32.39	-18.26	14.13	40.00	-25.87	QP
5	77.3210	34.38	-19.55	14.83	40.00	-25.17	QP
6	84.9993	38.50	-19.17	19.33	40.00	-20.67	QP


Note:

Pre-scan in all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Reading Level + Factor - Limit.

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 58

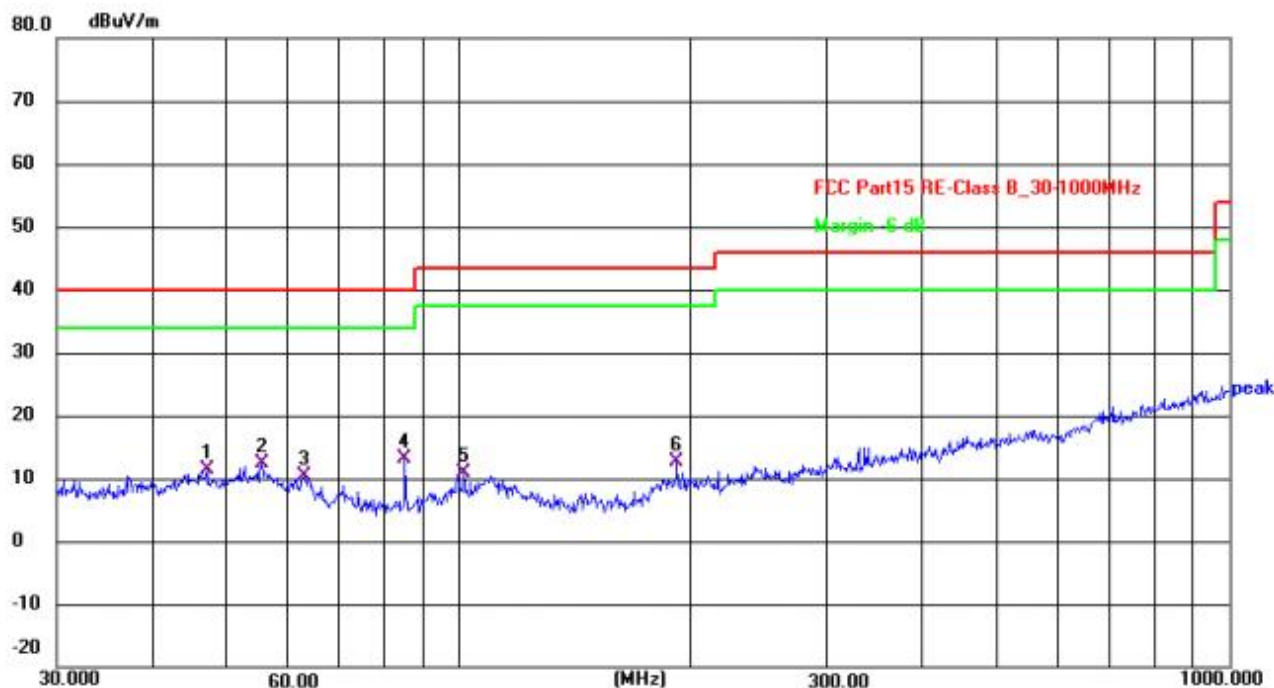

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	46.9947	25.59	-14.28	11.31	40.00	-28.69	QP
2	55.4147	27.01	-14.66	12.35	40.00	-27.65	QP
3	62.8706	26.17	-15.91	10.26	40.00	-29.74	QP
4	84.9993	32.41	-19.17	13.24	40.00	-26.76	QP
5	101.2883	26.78	-15.86	10.92	43.50	-32.58	QP
6	191.7450	29.43	-16.79	12.64	43.50	-30.86	QP

Note:

Pre-scan in all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Reading Level + Factor - Limit.


4. -20 dB Bandwidth Measurement

4.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.215&RSS-Gen Section 6.7

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018; ANSI C63.10:2020

4.2.Test Setup



4.3.Test Procedure

1. Set the spectrum analyzer: RBW = 1%-5% OBW
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by -20 dB relative to the maximum level measured in the fundamental emission


4.4.Test Result

Mode	Frequency (KHz)	20dB bandwidth (Hz)	99% bandwidth (Hz)	Result
For Earbuds	158.8	101	233	Pass
For Phone	144.2	177	202	Pass
For Watch	321.5	462	488	Pass


For Earbuds



For Phone

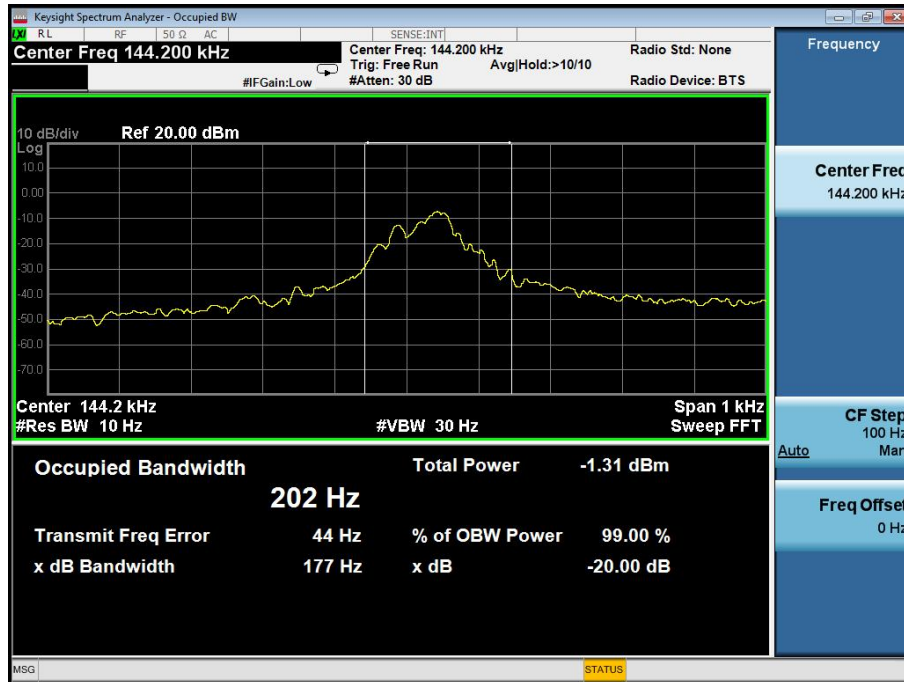

For Watch

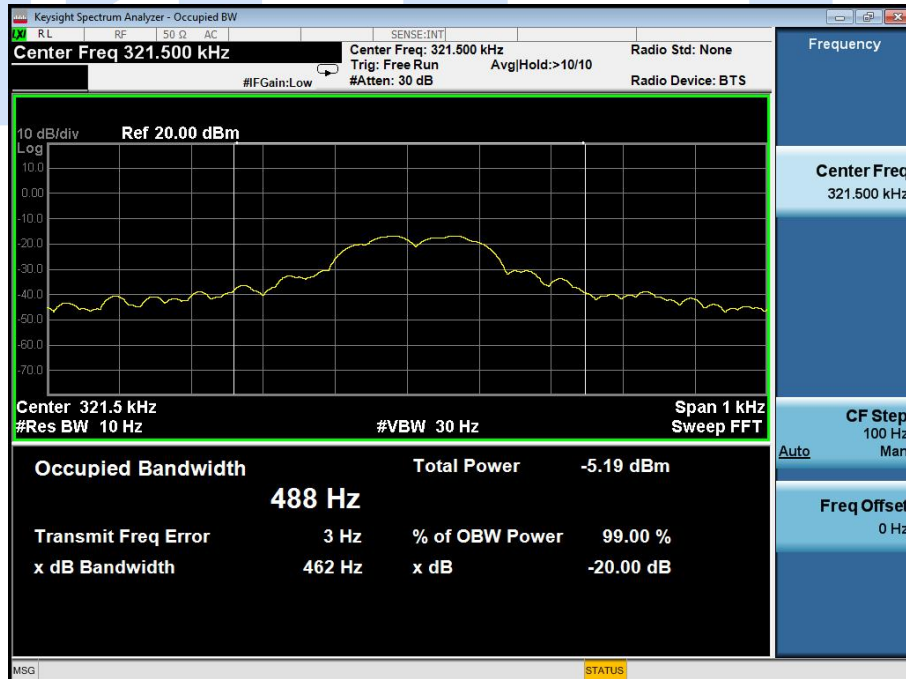

5. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

According to the RSS-Gen Section 7.1.2, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.



6. Test Photographs

Please see the attachment for details.

7. Appendix I: Photos of the EUT

Please see the attachment for details.

