


Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8

Test Graph

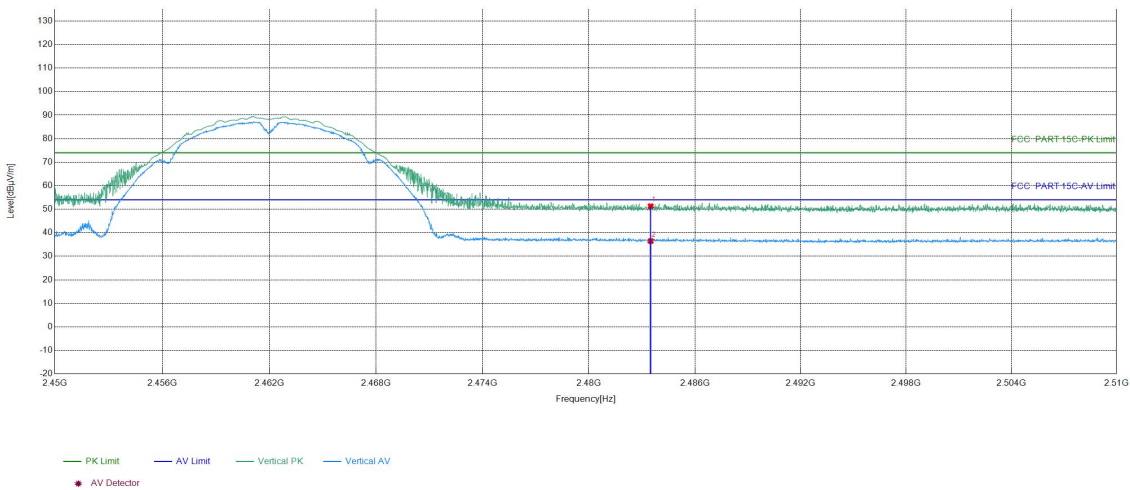

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.01	51.30	74.00	22.70	PASS	Vertical	PK
2	2483.5	16.29	20.19	36.48	54.00	17.52	PASS	Vertical	AV


Test Graph



Hotline:400-6788-333 www.cti-cert.com E-mail:info@cti-cert.com Complaint call:0755-33681700 Complaint E-mail:complaint@cti-cert.com

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

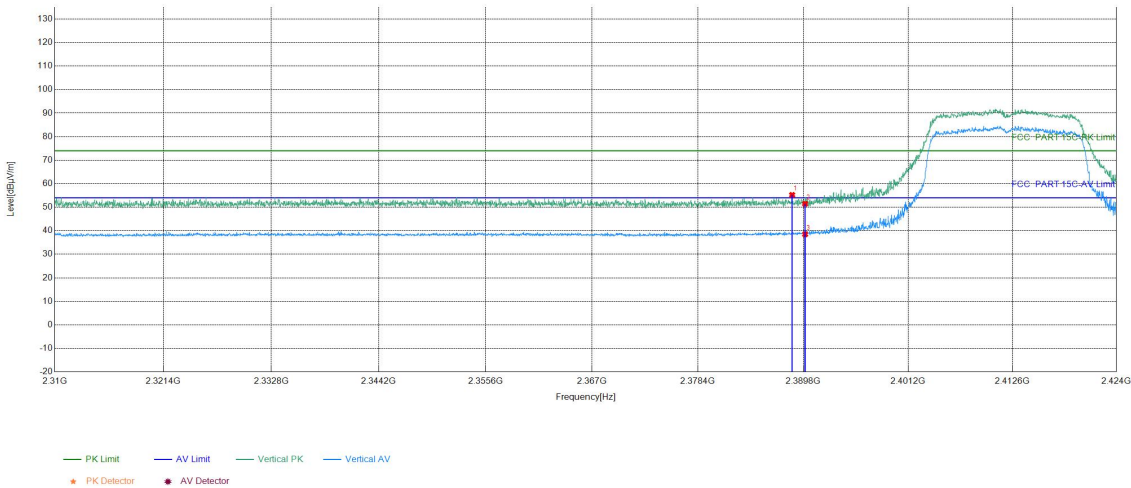

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2388.594	15.90	39.34	55.24	74.00	18.76	PASS	Vertical	PK
2	2390	15.96	35.52	51.48	74.00	22.52	PASS	Vertical	PK
3	2390	15.96	22.54	38.50	54.00	15.50	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

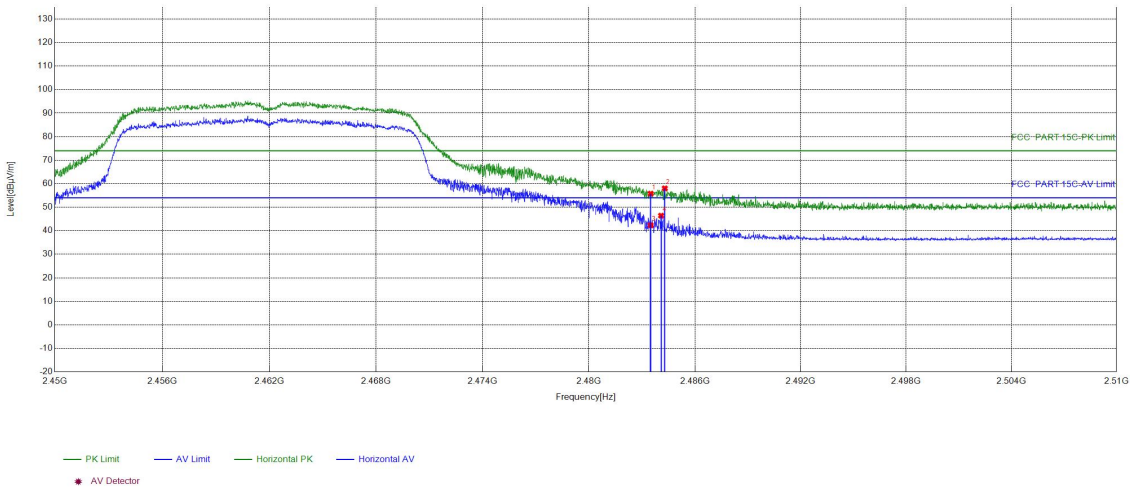

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.49	55.78	74.00	18.22	PASS	Horizontal	PK
2	2484.298	16.27	41.75	58.02	74.00	15.98	PASS	Horizontal	PK
3	2483.5	16.29	26.05	42.34	54.00	11.66	PASS	Horizontal	AV
4	2484.088	16.28	30.14	46.42	54.00	7.58	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

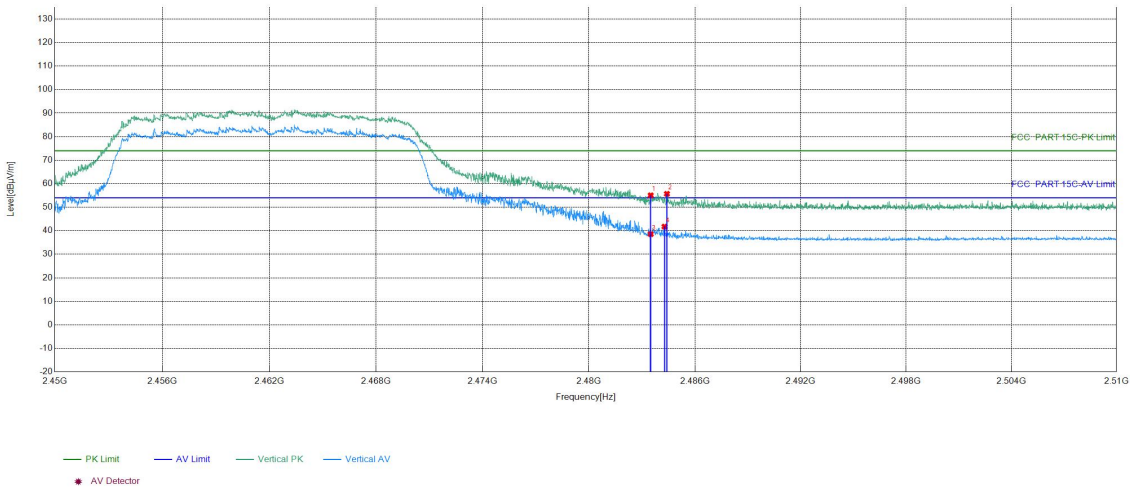

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Readin g [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.76	55.05	74.00	18.95	PASS	Vertical	PK
2	2484.418	16.27	39.42	55.69	74.00	18.31	PASS	Vertical	PK
3	2483.5	16.29	22.28	38.57	54.00	15.43	PASS	Vertical	AV
4	2484.283	16.27	25.49	41.76	54.00	12.24	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

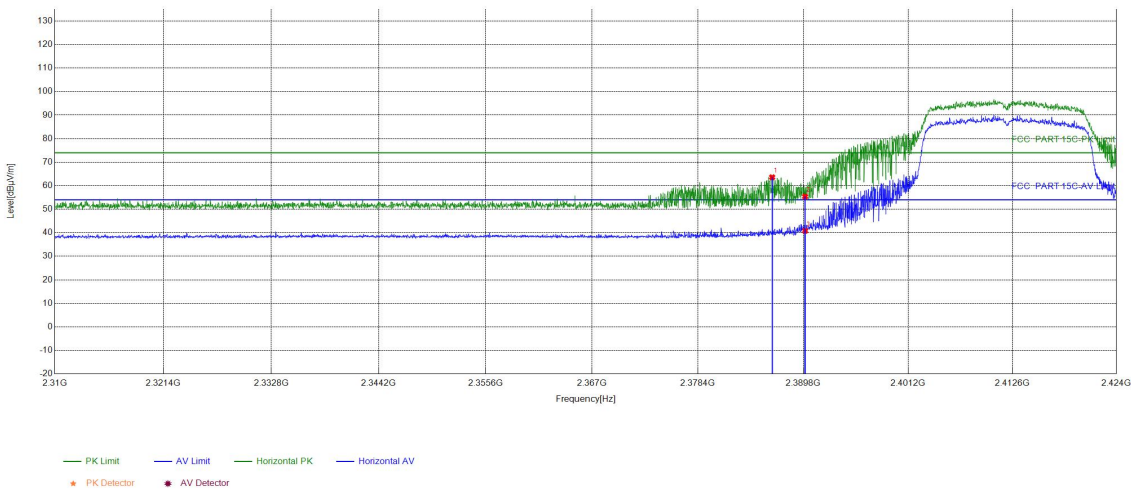

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2386.427	15.83	47.76	63.59	74.00	10.41	PASS	Horizontal	PK
2	2390	15.96	39.43	55.39	74.00	18.61	PASS	Horizontal	PK
3	2390	15.96	24.87	40.83	54.00	13.17	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

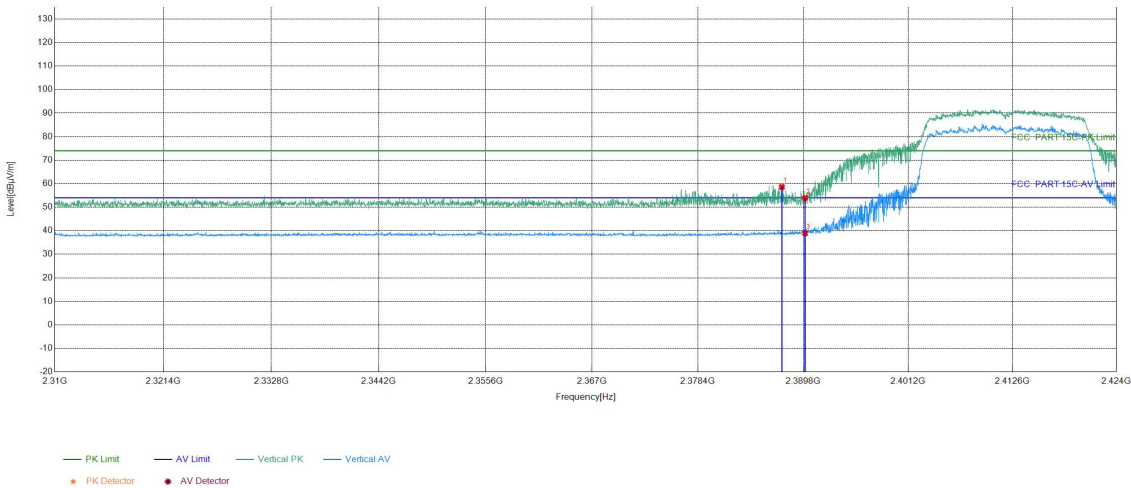

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2387.482	15.87	42.78	58.65	74.00	15.35	PASS	Vertical	PK
2	2390	15.96	37.99	53.95	74.00	20.05	PASS	Vertical	PK
3	2390	15.96	22.97	38.93	54.00	15.07	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

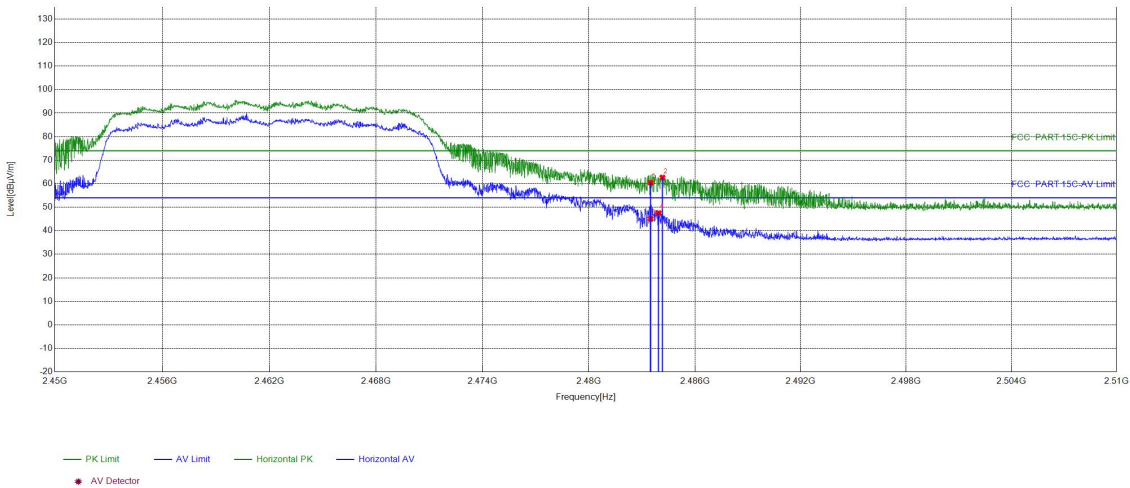

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	44.12	60.41	74.00	13.59	PASS	Horizontal	PK
2	2484.163	16.27	46.35	62.62	74.00	11.38	PASS	Horizontal	PK
3	2483.5	16.29	28.81	45.10	54.00	8.90	PASS	Horizontal	AV
4	2483.953	16.28	31.23	47.51	54.00	6.49	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

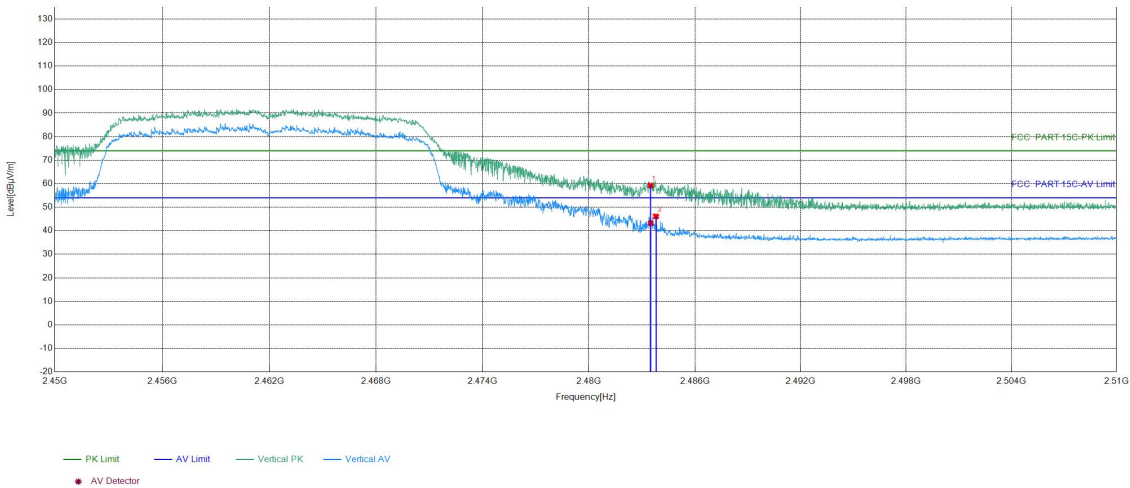

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	42.95	59.24	74.00	14.76	PASS	Vertical	PK
2	2483.5	16.29	26.95	43.24	54.00	10.76	PASS	Vertical	AV
3	2483.803	16.28	29.83	46.11	54.00	7.89	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

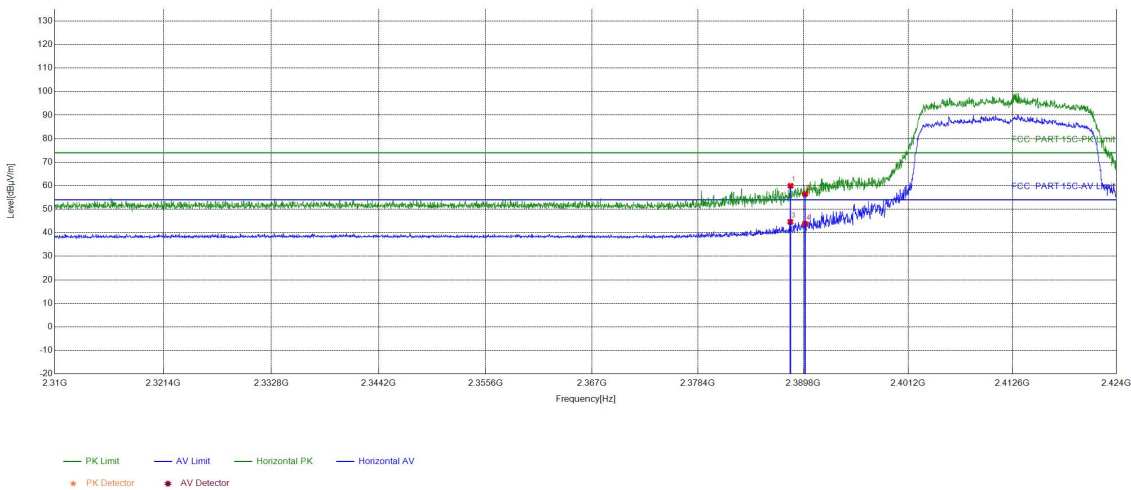

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2388.423	15.90	44.06	59.96	74.00	14.04	PASS	Horizontal	PK
2	2390	15.96	40.53	56.49	74.00	17.51	PASS	Horizontal	PK
3	2388.394	15.90	28.70	44.60	54.00	9.40	PASS	Horizontal	AV
4	2390	15.96	27.83	43.79	54.00	10.21	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

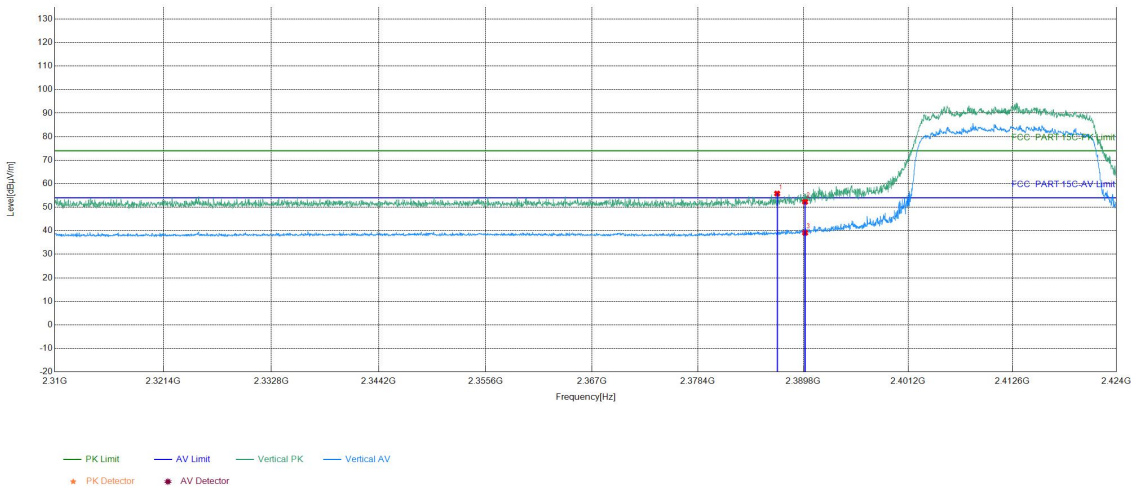

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2386.969	15.85	39.96	55.81	74.00	18.19	PASS	Vertical	PK
2	2390	15.96	36.32	52.28	74.00	21.72	PASS	Vertical	PK
3	2390	15.96	23.18	39.14	54.00	14.86	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8


Test Graph

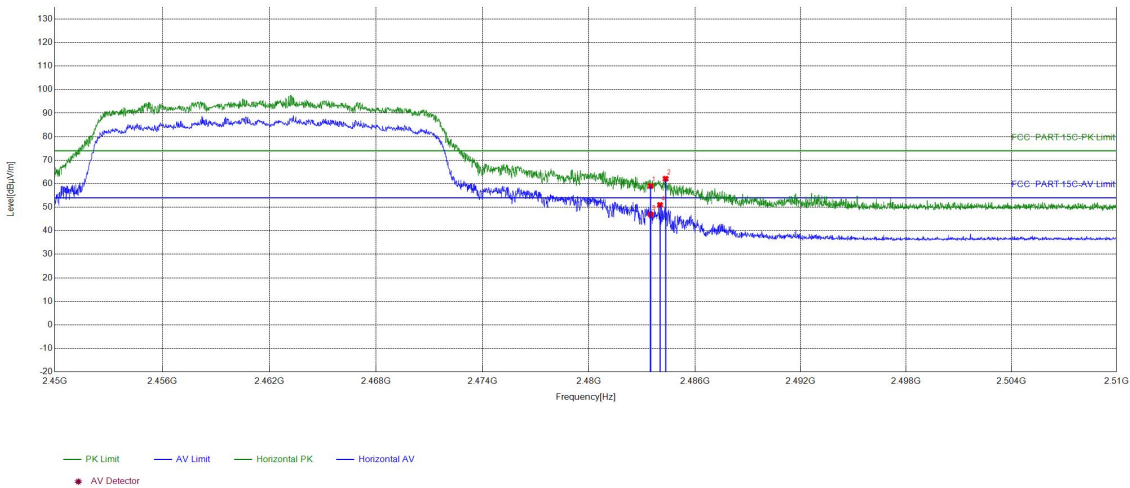

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	42.72	59.01	74.00	14.99	PASS	Horizontal	PK
2	2484.343	16.27	45.85	62.12	74.00	11.88	PASS	Horizontal	PK
3	2483.5	16.29	30.63	46.92	54.00	7.08	PASS	Horizontal	AV
4	2484.028	16.28	34.68	50.96	54.00	3.04	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Remark:	\	Test_Date	2026/7/8

Test Graph

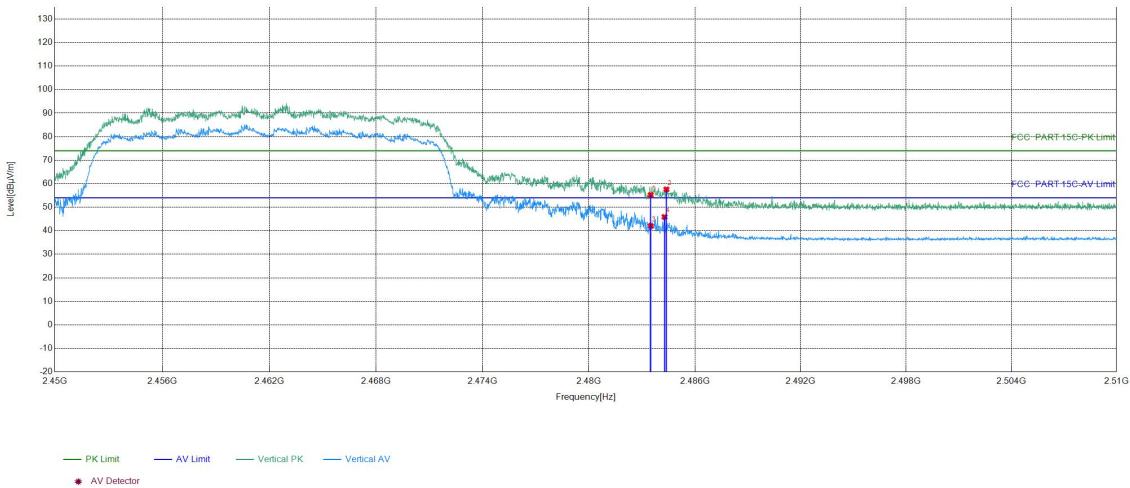

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.92	55.21	74.00	18.79	PASS	Vertical	PK
2	2484.388	16.27	41.32	57.59	74.00	16.41	PASS	Vertical	PK
3	2483.5	16.29	25.77	42.06	54.00	11.94	PASS	Vertical	AV
4	2484.283	16.27	29.61	45.88	54.00	8.12	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S814754

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S814753.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***