

FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

Intel BE200

MODEL NUMBER: BE200NGW

REPORT NUMBER: 4792146700.1-RF-1

ISSUE DATE: Feb 25, 2026

FCC ID: 2BSYS-A2515

Prepared for

**Financial Future(Beijing) Information Technology Co., Ltd.
Room 12-01, 10th Floor, Building 38, Haidian Street, Haidian District, Beijing**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	2/25/2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2020+Cor 1-2023, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e),	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)/KDB 789033 D02 v02r01 Section E.3.a (Method PM) Section E.2.d (Method SA-2)	FCC 15.407 (a)	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020+Cor 1-2023, Clause 6.2.	FCC 15.207	Pass
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
FREQUENCY STABILITY	ANSI C63.10-2020+Cor 1-2023, Clause 6.8	FCC 15.407 (g)	Pass
Dynamic Frequency Selection (Slave)	KDB 905462 D03 Client Without DFS New Rules v01r02	FCC Part 15.407 (h),	Pass
Dynamic Frequency Selection (Master)	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	FCC Part 15.407 (h),	N/A
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/15.407(a)(1) (2)	Pass

Note:N/A: In this whole report not applicable.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART E

Note: The antenna gain of EUT is smaller than that of the RF module(FCC ID: 2BSYS-A2515). So in this report the Radiated Spurious Emission, Output power , DFS were tested and recorded in the report. For the test results of all other test items please refer to module test reports.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	8
3. FACILITIES AND ACCREDITATION.....	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
4.2. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. CHANNEL LIST	11
5.3. MAXIMUM POWER	13
5.4. TEST CHANNEL CONFIGURATION.....	14
5.5. THE WORSE CASE POWER SETTING PARAMETER	17
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	20
5.7. SUPPORT UNITS FOR SYSTEM TEST	21
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	22
7. ANTENNA PORT TEST RESULTS	25
7.1. CONDUCTED OUTPUT POWER	25
7.2. DYNAMIC FREQUENCY SELECTION (SLAVE)	27
7.3. POWER SPECTRAL DENSITY	31
8. RADIATED TEST RESULTS.....	33
8.1. RESTRICTED BANDEDGE	41
8.2. SPURIOUS EMISSIONS	249
8.3. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	281
9. ANTENNA REQUIREMENT	283
10. TEST DATA.....	284
10.1. APPENDIX A: MAXIMUM CONDUCTED OUTPUT POWER.....	284
10.1.1. Test Result-SU Mode.....	284
10.2. APPENDIX B: DFS	287
10.2.1. Calibration.....	287
10.2.2. Shutdown Time	288
10.2.3. Non-Occupancy	289
10.3. APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY.....	290
10.3.1. Test Result-SU Mode.....	290

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Financial Future(Beijing) Information Technology Co., Ltd.
Address: Room 12-01, 10th Floor, Building 38, Haidian Street, Haidian District, Beijing

Manufacturer Information

Company Name: Financial Future(Beijing) Information Technology Co., Ltd.
Address: Room 12-01, 10th Floor, Building 38, Haidian Street, Haidian District, Beijing

EUT Information

EUT Name: Intel BE200
Model: BE200NGW
Sample Received Date: Feb 10, 2026
Sample Status: Normal
Sample ID: 9445241
Date of Tested: Feb 10, 2026- Feb 25, 2026

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART E ISED RSS-247 Issue 4	Pass


Prepared By:



Johnson Liu

Laboratory Engineer


Checked By:



Fanny Huang

Project Engineer

Approved By:



Kebo Zhang

Operations Leader

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART E, ANSI C63.10-2020+Cor 1-2023, FCC 47 CFR Part 2, KDB 789033 D02 v02r01, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02, KDB 905462 D04 Operational Modes for DFS Testing New Rules v01 and KDB 905462 D06 802 11 Channel Plans New Rules v02.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Intel BE200
Model	BE200NGW
Frequency Range:	5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5720 MHz 5 745 MHz to 5 825 MHz 5 850 MHz to 5 895 MHz
DFS Operational mode:	Slave without radar detection
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA(1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11be: OFDMA(4096QAM, 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Radio Technology:	IEEE802.11a 20 IEEE802.11n HT20/n HT40 IEEE802.11ac VHT20/VHT40/VHT80/ VHT160 IEEE802.11ax HE20/HE40/HE80/ HE160 IEEE802.11be EHT20/EHT40/EHT80/ EHT160
Normal Test Voltage:	DC 20V powered by an external adapter

5.2. CHANNEL LIST

UNII-1 (For Bandwidth=20MHz)		UNII-1 (For Bandwidth=40MHz)		UNII-1 (For Bandwidth=80MHz)		UNII-1 (For Bandwidth=160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210	50	5250 (Straddle)
40	5200	46	5230				
44	5220						
48	5240						

UNII-2A (For Bandwidth=20MHz)		UNII-2A (For Bandwidth=40MHz)		UNII-2A (For Bandwidth=80MHz)		UNII-2A (For Bandwidth=160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290	50	5250 (Straddle)
56	5280	62	5310				
60	5300						
64	5320						

UNII-2C (For Bandwidth=20MHz)		UNII-2C (For Bandwidth=40MHz)		UNII-2C (For Bandwidth=80MHz)		UNII-2C (For Bandwidth=160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530	50	5250 (Straddle)
104	5520	110	5550	122	5610	114	5570
108	5540	118	5590	/	/		
112	5560	126	5630				
116	5580	134	5670				
120	5600	/	/				
124	5620						
128	5640						
132	5660						
136	5680						
140	5700						
/	/						

UNII-3 (For Bandwidth=20MHz)		UNII-3 (For Bandwidth=40MHz)		UNII-3 (For Bandwidth=80MHz)		UNII-3 (For Bandwidth=160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775	/	/
153	5765	159	5795				
157	5785						
161	5805						
165	5825						

UNII-4 (For Bandwidth=20MHz)		UNII-4 (For Bandwidth=40MHz)		UNII-4 (For Bandwidth=80MHz)		UNII-4 (For Bandwidth=160MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
169	5845	167	5835	171	5855	163	5815
173	5865	175	5875				
177	5885						

Straddle Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 144	5720 MHz
802.11n HT20	CH 144	5720 MHz
802.11ac VHT20	CH 144	5720 MHz
802.11ax HE20	CH 144	5720 MHz
802.11be EHT20	CH 144	5720 MHz
802.11n HT40	CH 142	5710 MHz
802.11ac VHT40	CH 142	5710 MHz
802.11ax HE40	CH 142	5710 MHz
802.11be EHT40	CH 142	5710 MHz
802.11ac VHT80	CH 138	5690 MHz
802.11ac VHT160	CH 50	5250 MHz
802.11ax HE80	CH 138	5690 MHz
802.11ax HE160	CH 50	5250 MHz
802.11be EHT80	CH 138	5690 MHz
802.11be EHT160	CH 50	5250 MHz

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a	5180-5895	23.89
n HT20		26.14
n HT40		23.87
ac VHT80		23.49
ac VHT160		20.38
ax HE20		26.28
ax HE40		23.64
ax HE80		23.50
ax HE160		20.53

5.4. TEST CHANNEL CONFIGURATION

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz
802.11ac VHT160	CH 50(Low Channel)	5250 MHz
802.11ax HE20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11ax HE40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ax HE80	CH 42(Low Channel)	5210 MHz
802.11ax HE160	CH 50(Low Channel)	5250 MHz
802.11be EHT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11be EHT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11be EHT80	CH 42(Low Channel)	5210 MHz
802.11 be EHT160	CH 50(Low Channel)	5250 MHz

UNII-2A Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ac VHT80	CH 58(Low Channel)	5290 MHz
802.11ac VHT160	CH 50(Low Channel)	5250 MHz
802.11ax HE20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11ax HE40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ax HE80	CH 58(Low Channel)	5290 MHz
802.11 ax HE160	CH 50(Low Channel)	5250 MHz
802.11be EHT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11be EHT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11be EHT80	CH 58(Low Channel)	5290 MHz
802.11be EHT160	CH 50(Low Channel)	5250 MHz

UNII-2C Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz

802.11n HT20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11n HT40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11ac VHT80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz
802.11ac VHT160	CH114	5570 MHz
802.11ax HE20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11ax HE40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11ax HE80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz
802.11ax HE160	CH114	5570 MHz
802.11be EHT20	CH 100(Low Channel), CH 116(MID Channel), CH 140(High Channel)	5500 MHz, 5580 MHz, 5700 MHz
802.11be EHT40	CH 102(Low Channel), CH 110(MID Channel), CH 134(High Channel)	5510 MHz, 5550 MHz, 5670 MHz
802.11be EHT80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz
802.11be EHT160	CH114	5570 MHz

UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz
802.11ax HE20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11ax HE40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ax HE80	CH 155(Low Channel)	5775 MHz
802.11be EHT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11be EHT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11be EHT80	CH 155	5775 MHz

UNII-4 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 169(Low Channel), CH 173(MID Channel), CH 177(High Channel)	5845 MHz, 5865 MHz, 5885 MHz
802.11n HT20	CH 169(Low Channel), CH 173(MID Channel), CH 177(High Channel)	5845 MHz, 5865 MHz, 5885 MHz
802.11n HT40	CH 167(Low Channel), CH 175(High Channel)	5835MHz, 5875MHz
802.11ac VHT80	CH 171	5855 MHz
802.11ac VHT160	CH 163	5815 MHz
802.11ax HE20	CH 169(Low Channel), CH 173(MID Channel), CH 177(High Channel)	5845 MHz, 5865 MHz, 5885 MHz

802.11ax HE40	CH 167(Low Channel), CH 175(High Channel)	5835MHz, 5875MHz
802.11ax HE80	CH 171	5855 MHz
802.11 ax HE160	CH 163	5815 MHz
802.11be EHT20	CH 169(Low Channel), CH 173(MID Channel), CH 177(High Channel)	5845 MHz, 5865 MHz, 5885 MHz
802.11be EHT40	CH 167(Low Channel), CH 175(High Channel)	5835MHz, 5875MHz
802.11be EHT80	CH 171	5855 MHz
802.11be EHT160	CH 163	5815 MHz

Straddle Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 144	5720 MHz
802.11n HT20	CH 144	5720 MHz
802.11n HT40	CH 142	5710 MHz
802.11ac VHT80	CH 138	5690 MHz
802.11ac VHT160	CH 50	5250 MHz
802.11ax HE20	CH 144	5720 MHz
802.11ax HE40	CH 142	5710 MHz
802.11ax HE80	CH 138	5690 MHz
802.11ax HE160	CH 50	5250 MHz
802.11be EHT20	CH 144	5720 MHz
802.11be EHT40	CH 142	5710 MHz
802.11be EHT80	CH 138	5690 MHz
802.11be EHT160	CH 50	5250 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter	
Test Software	DRTU
Power Setting	Default

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT20 mode: MCS0
802.11ac VHT40 mode: MCS0
802.11ac VHT80 mode: MCS0
802.11ac VHT160 mode: MCS0
802.11ax HE20 mode: MCS0
802.11ax HE40 mode: MCS0
802.11ax HE80 mode: MCS0
802.11ax HE160 mode: MCS0
802.11be EHT20 mode: MCS0
802.11be EHT40 mode: MCS0
802.11be EHT80 mode: MCS0
802.11be EHT160 mode: MCS0

802.11a only support SISO mode.

802.11n HT20/HT40/ac VHT20/VHT40/VHT80/ HT160/ax HE20/HE40/HE80/ HE160/be EHT20/be EHT40/be EHT80//be EHT160 support SISO and MIMO mode.

802.11a SISO mode, Antenna 0 and Antenna 1 have the same power setting, EIRP of Antenna 0 is greater than Antenna 1, so only Antenna 0 worst case test data were recorded in the report.

802.11n/ac/ax/be SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

802.11ac VHT20 and VHT40 mode are different from 802.11n HT20 and HT40 only in control messages, so for these 4 modes, only 802.11n HT20 and 802.11n HT40 worst case power modes test data are recorded in the report.

The measured additional path loss was included in any path loss calculations for all RF cables used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Duty cycle and 26/6dB DTS bandwidth/occupied channel bandwidth tests, only SISO mode and one chain were tested since the duty cycle and bandwidth does not change depending on chains used.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

For RU test configuration:

802.11ax/be mode support OFDMA partial RU mode.

802.11be supports Multiple RU mode and Channel Punching mode:

	52-tone + 26-tone	106-tone + 26-tone	484-tone + 242-tone
5G - 20MHz	O	O	
5G - 40MHz	O	O	
5G - 80MHz	O	O	O

Note: O means support this mode.

Preliminary Investigation was performed for 802.11ax/be partial RU modes were determined by the following:

Channel Bandwidth	26 Tone	52 Tone	106 Tone	242 Tone	484 Tone	996 Tone	SU
20 MHz	Test	Test	Test	Covered by SU	Not supported		Test
40 MHz	Covered by 20 MHz channel				Covered by SU	Not supported	Test
80 MHz	Covered by 20 MHz channel and 40 MHz channel					Covered by SU	Test

Note: Because the SU (Single User) case is slightly different to the equivalent fully loaded channel RU (e.g. 242 Tone occupies the full 20MHz channel but is slightly different to the fully loaded 20 MHz channel RU), after preliminary investigation that we compared the power of Full RU mode and SU mode and determined that SU mode was the worst mode in all cases. Therefore, the RU size 242/484/996 tone power PSD and the other data was omitted from testing, only the worst SU mode data was recorded in the report.

Preliminary Investigation was performed for 802.11be Multiple RU and Channel Punching modes were determined by the following:

Channel Bandwidth	52+26 Tone	106+26 Tone	484+242 Tone	20MHz Punching
20 MHz	Test	Test	Not supported	Not supported
40 MHz	Covered by 20 MHz channel		Not supported	Not supported
80 MHz	Covered by 20 MHz channel		Covered by Punching	Test
Note: For 802.11be large-size MRU (484-tone + 242-tone) and Channel Punching mode, preliminary investigations revealed that the two modes were almost same in terms of power, bandwidth, band edge, etc. Therefore, we determined only Channel Punching mode test data were recorded in the report.				

For 26dB & 99% bandwidth, it performed to test each RU configurations to calculate the FCC&ISED power limit. For Punching Mode, based on preliminary investigations, the 26dB bandwidth and 99% bandwidth do not affect the corresponding channel's FCC and ISED power limits since the calculated limits using bandwidth is higher than the fixed limits (e.g., 23.98dBm). Therefore, the 26dB bandwidth and 99% bandwidth for Punching Mode were omitted from testing, only the worst 80M SU Mode bandwidth test results are recorded in the report.

6dB bandwidth was performed to measure the minimum 6dB bandwidth to make sure that each RU configurations 6dB bandwidth was greater than 500kHz. Therefore, for 6dB bandwidth, only the RU configuration with the minimum 6dB bandwidth from the 26-tone mode was recorded in the report.

Radiated band edge was performed to measure the emission impact outside the working channel when the EUT is operational. Therefore, after preliminary investigation, we determined the lowest index of each RU tone type for measuring low channels and the highest index of each RU tone type for high channels as the worst case. For Channel Punching mode, preliminary investigations revealed that the lowest index of the Punching mode's low band edge would be better than other modes because it would punch the lowest frequency 20MHz bandwidth. So, we determined the highest index of Punching mode type for measuring low channels and the lowest index of Punching mode type for high channels as the worst case.

Radiated spurious emission between were perform with the EUT set to transmit at the highest Power and PSD modes. So, for this item, only the maximum Power and PSD mode 802.11ax EHT20 RU26 tone test data were recorded in the report.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band	Antenna 1 Gain Max (dBi)	Antenna 2 Gain Max (dBi)	Antenna Type
UNII 1	4.21	4.43	PIFA Antenna
UNII 2A	4.21	4.43	
UNII 2C	4.21	4.43	
UNII 3	4.21	4.43	
UNII 4	4.21	4.43	

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01.

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT160	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE20	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE40	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE80	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE160	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT20	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT40	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT80	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT160	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customers.
2. The antenna can not transmit simultaneously.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
/	/	/	/	/


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

SETUP DIAGRAM FOR TESTS

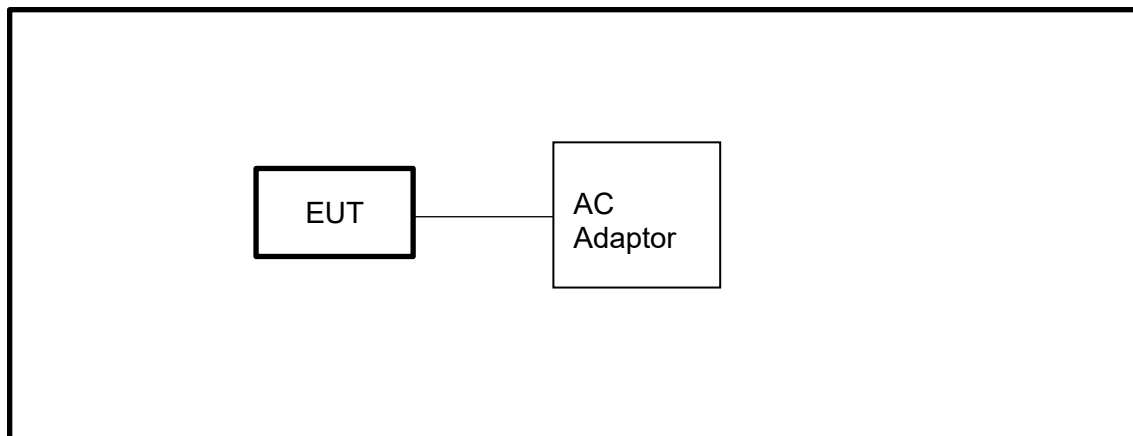

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name		Version
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32		10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
EMI Measurement Receiver	R&S	ESR26	101377	Sep.12, 2025	Sep.11, 2026
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Sep.12, 2025	Sep.11, 2026
Software					

Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

FCC 47 CFR Part15 Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Outdoor Access Point: 1 W (30 dBm) ☐ Indoor Access Point: 1 W (30 dBm) ☐ Fixed Point-To-Point Access Points: 1 W (30 dBm) ☒ Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-2 (trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.):

- Measure the duty cycle D of the transmitter output signal.
- Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq$ RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- Do not use sweep triggering. Allow the sweep to “free run.”
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average

over both the ON and OFF times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Method PM (Measurement using an RF average power meter):

(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:

- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
- The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.


(ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Note: Method SA-2 was used for straddle channel output power test, and Method PM was used for testing rest channels

TEST SETUP

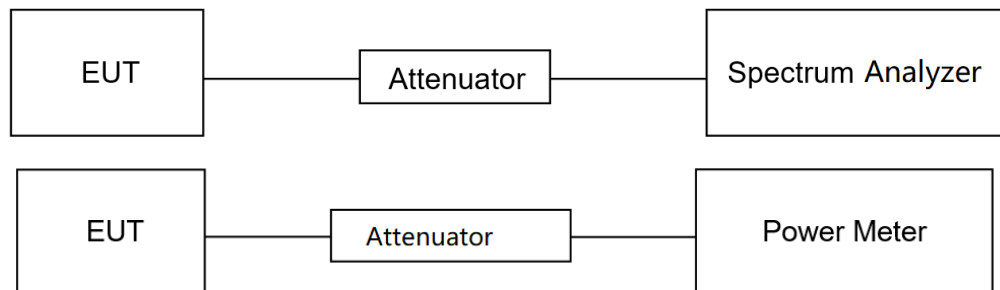

TEST ENVIRONMENT

Temperature	25.0°C	Relative Humidity	56.8%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V

TEST DATE / ENGINEER

Test Date	Feb 24, 2026	Test By	Bairong Liu
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.2. DYNAMIC FREQUENCY SELECTION (SLAVE)

LIMITS

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

APPLICABILITY OF DFS REQUIREMENTS

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	☐ Master	☒ Client Without Radar Detection	☐ Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

PARAMETERS OF RADAR TEST WAVEFORMS


This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \frac{1}{\left(\frac{360}{\text{PRI}_{\mu\text{sec}}} \right)} \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4.

TEST SETUP

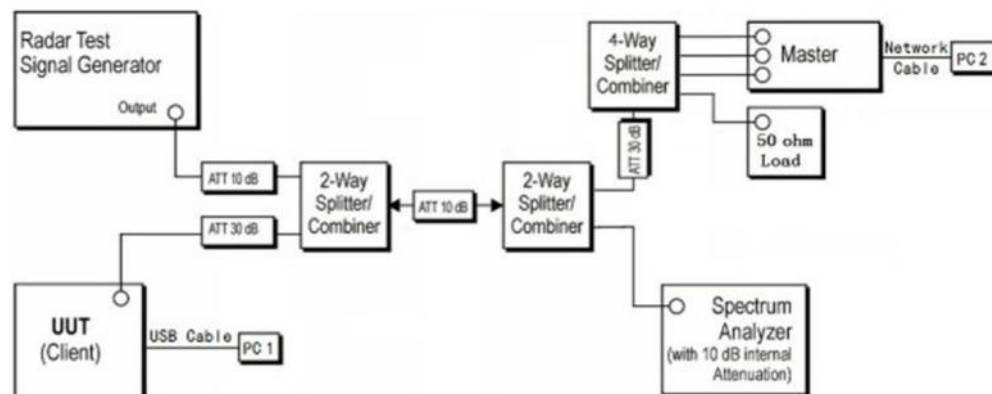

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	53.1%
-------------	--------	-------------------	-------

Atmosphere Pressure	101kPa	Test Voltage	DC 20V
---------------------	--------	--------------	--------

TEST DATE / ENGINEER

Test Date	Feb 10, 2026	Test By	Johnson Liu
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.3. POWER SPECTRAL DENSITY

LIMITS

FCC 47 CFR Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	☐ Outdoor Access Point: 17 dBm/MHz ☐ Indoor Access Point: 17 dBm/MHz ☐ Fixed Point-To-Point Access Points: 17 dBm/MHz ☒ Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

ISED RSS-247 ISSUE 4		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	5150 ~ 5250
	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.	5250 ~ 5350 5470 ~ 5725
	30 dBm / 500 kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

TEST SETUP

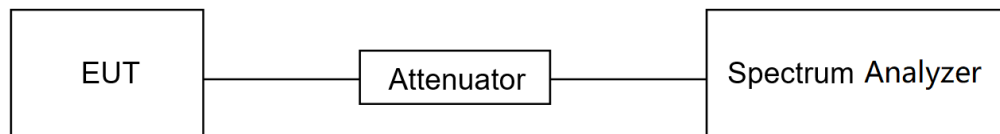

TEST ENVIRONMENT

Temperature	24.8°C	Relative Humidity	56.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V

TEST DATE / ENGINEER

Test Date	Feb 10, 2026	Test By	Bairong Liu
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

8. RADIATED TEST RESULTS

LIMITS

Refer to FCC 47 CFR §15.205, §15.209 and §15.407 (b).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-247 7.3.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to FCC 47 CFR §15.407 (b) and ISSED RSS-247 7.3.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
Note: *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the

applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

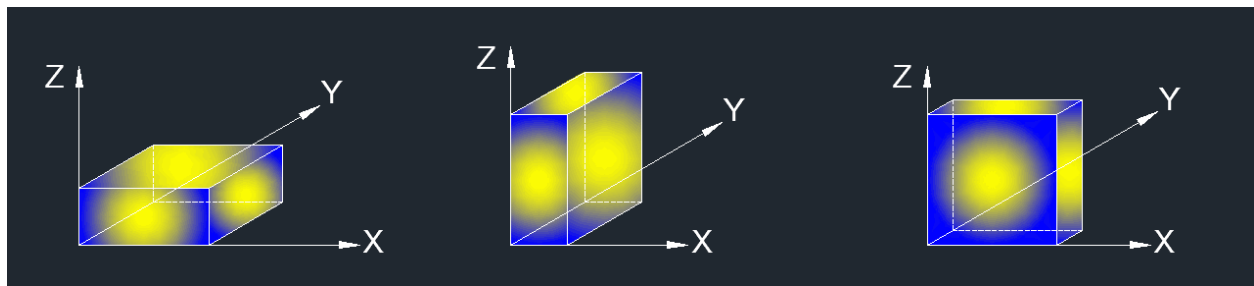

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

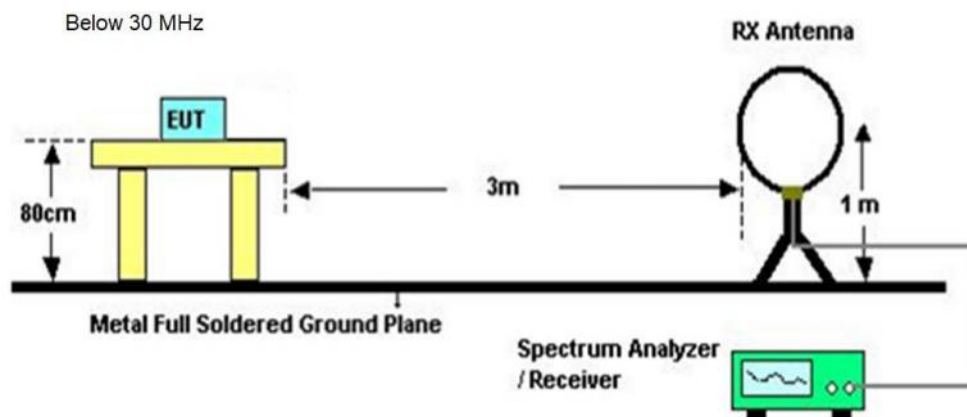

Below 1 GHz and above 30 MHz

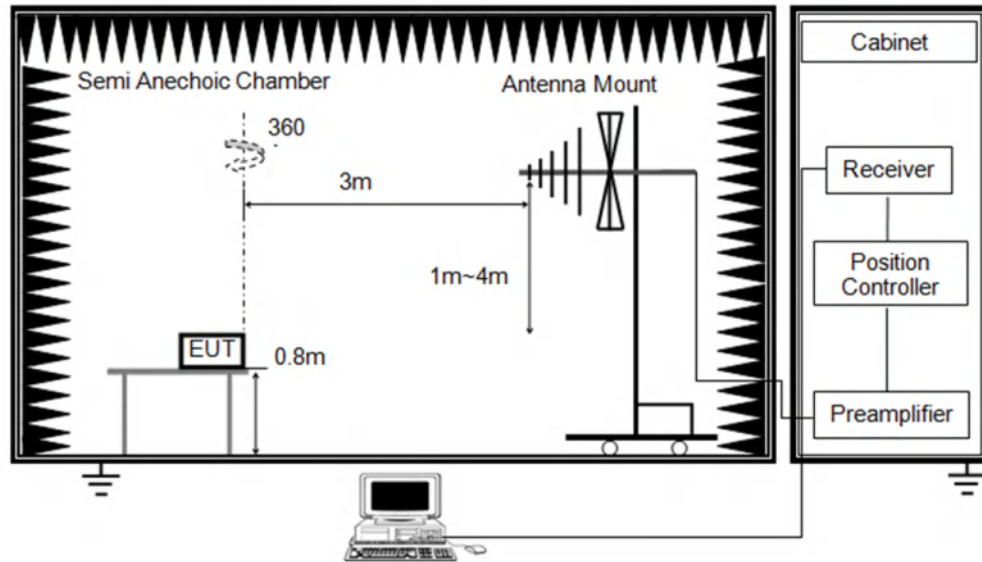

Above 1GHz

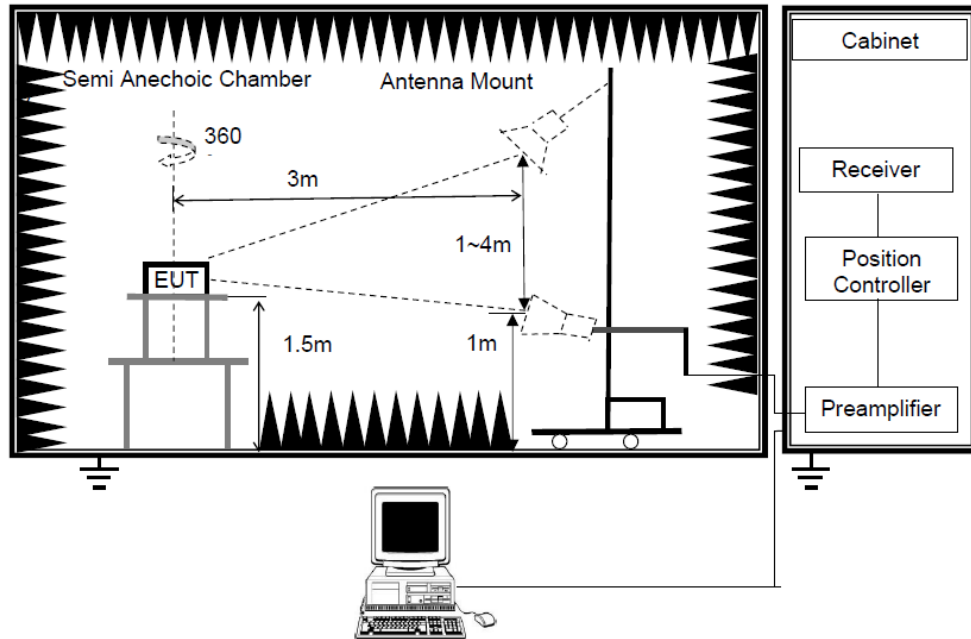

TEST ENVIRONMENT

Temperature	22.3℃	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V


TEST DATE / ENGINEER

Test Date	Feb 10, 2026	Test By	Stipe Zheng
-----------	--------------	---------	-------------

TEST RESULTS

8.1. RESTRICTED BANDEDGE

Test Mode:	802. 11A Ant1	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

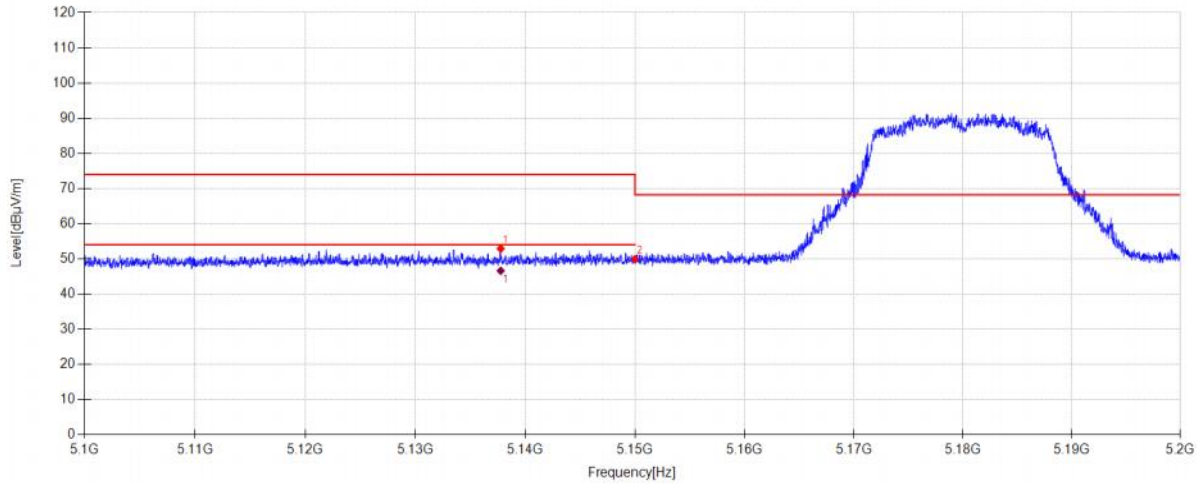


Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5137.760	44.85	32.80	5.03	-29.77	52.91	74.00	21.09	PK	Horizontal
2	5150.000	41.77	32.90	5.04	-29.77	49.94	68.20	18.26	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5137.760	38.56	32.80	5.03	46.62	54.00	7.38	AV	Horizontal


Test Mode:	802. 11A Ant1	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

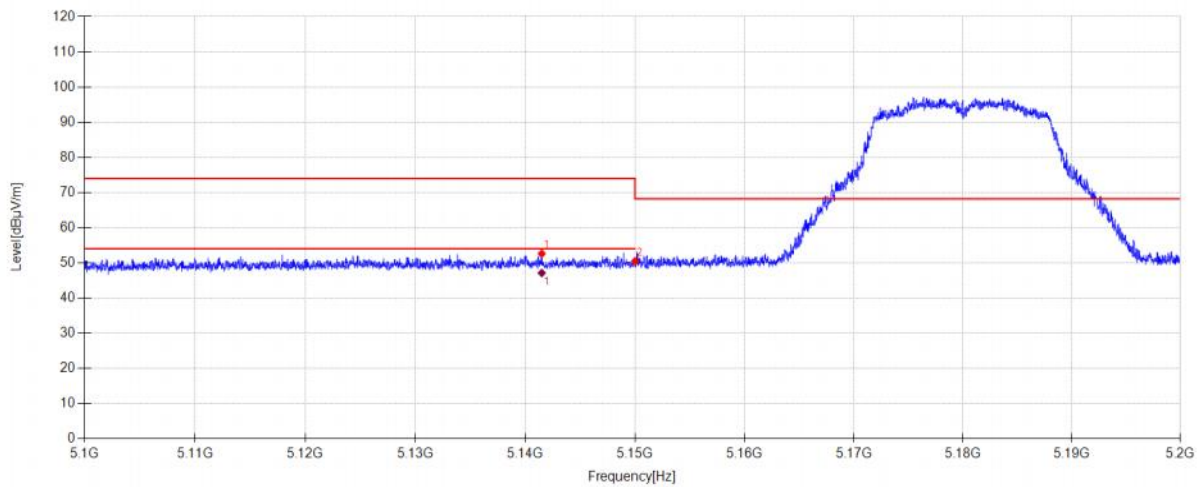

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.500	44.54	32.83	5.03	-29.77	52.63	74.00	21.37	PK	Vertical
2	5150.000	42.29	32.90	5.04	-29.77	50.46	68.20	17.74	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5141.500	39.03	32.83	5.03	47.12	54.00	6.88	AV	Vertical	


Test Mode:	802. 11A Ant1	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

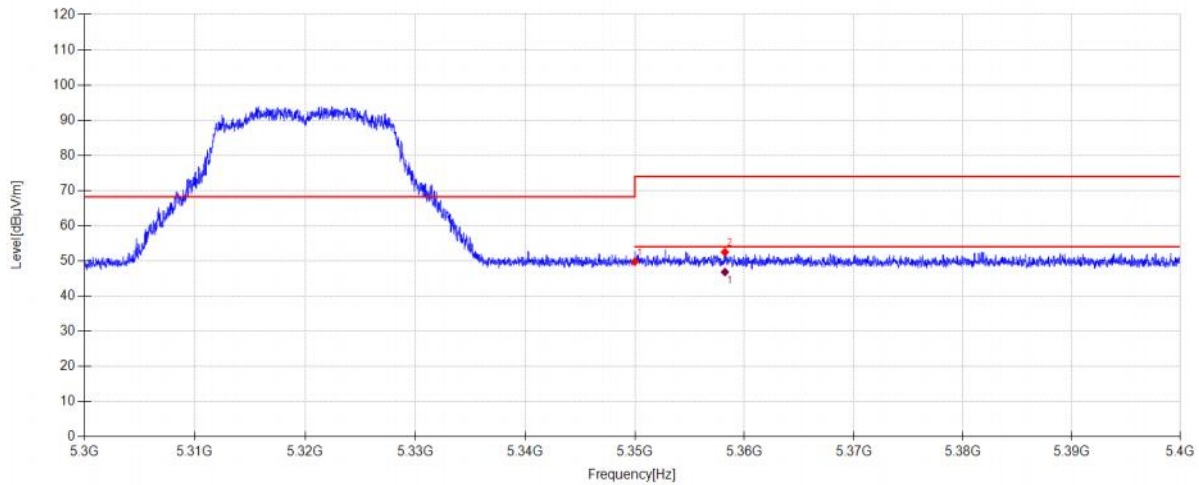

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.86	32.50	5.14	-29.73	49.77	68.20	18.43	PK	Horizontal
2	5358.220	44.52	32.57	5.14	-29.73	52.50	74.00	21.50	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5358.220	38.85	32.57	5.14	46.83	54.00	7.17	AV	Horizontal	


Test Mode:	802. 11A Ant1	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

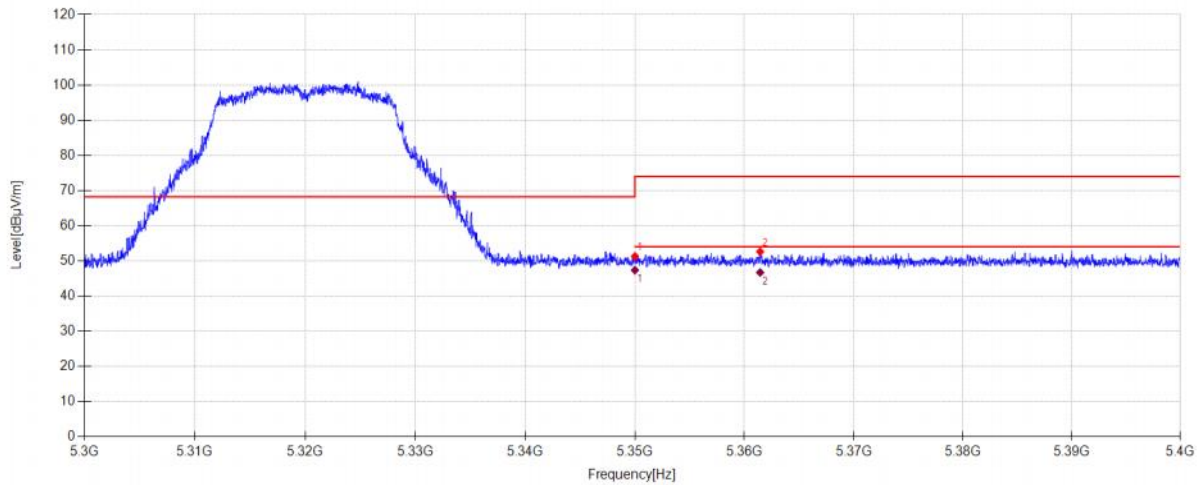

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.38	32.50	5.14	-29.73	51.29	68.20	16.91	PK	Vertical
2	5361.440	44.63	32.59	5.14	-29.73	52.63	74.00	21.37	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.45	32.50	5.14	47.36	54.00	6.64	AV	Vertical
2	5361.440	38.72	32.59	5.14	46.72	54.00	7.28	AV	Vertical


Test Mode:	802. 11A Ant1	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

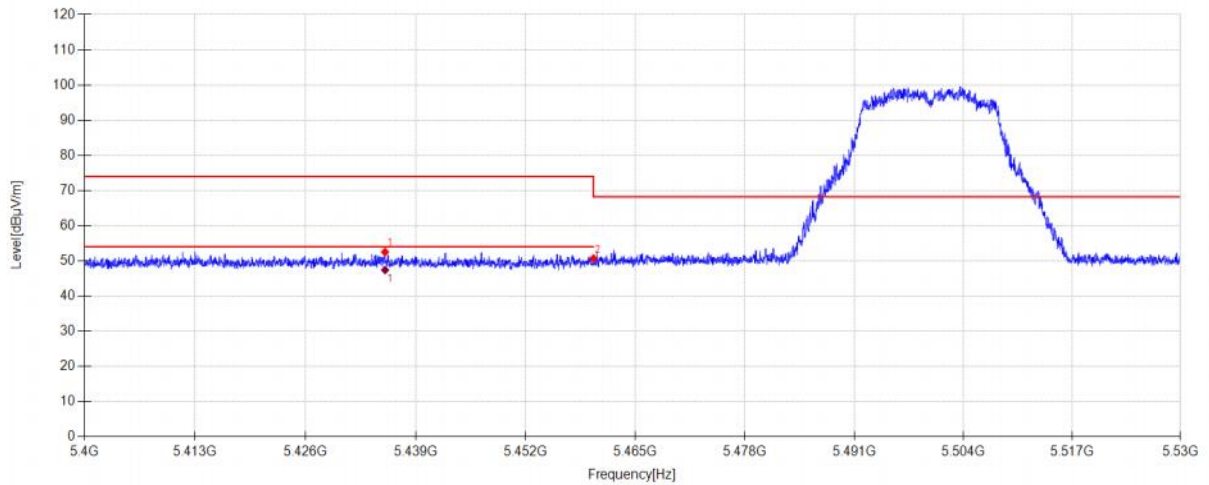

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5435.360	44.23	32.83	5.18	-29.71	52.53	74.00	21.47	PK	Horizontal
2	5460.000	42.31	32.90	5.19	-29.71	50.69	68.20	17.51	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5435.360	39.12	32.83	5.18	47.42	54.00	6.58	AV	Horizontal	


Test Mode:	802. 11A Ant1	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

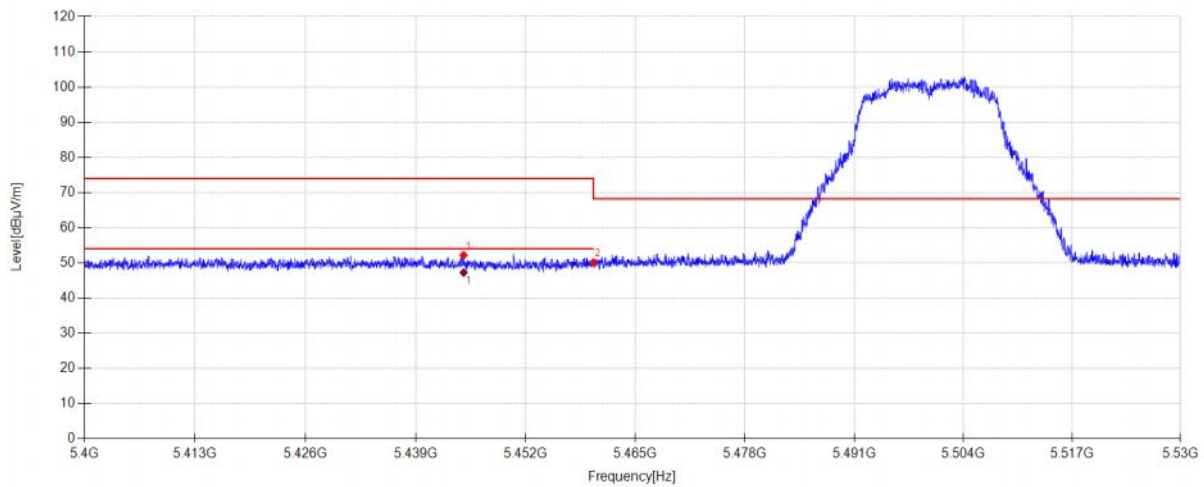

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5444.642	43.91	32.81	5.18	-29.71	52.19	74.00	21.81	PK	Vertical
2	5460.000	41.75	32.90	5.19	-29.71	50.13	68.20	18.07	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5444.642	38.96	32.81	5.18	47.24	54.00	6.76	AV	Vertical	

Test Mode:	802. 11A Ant1	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

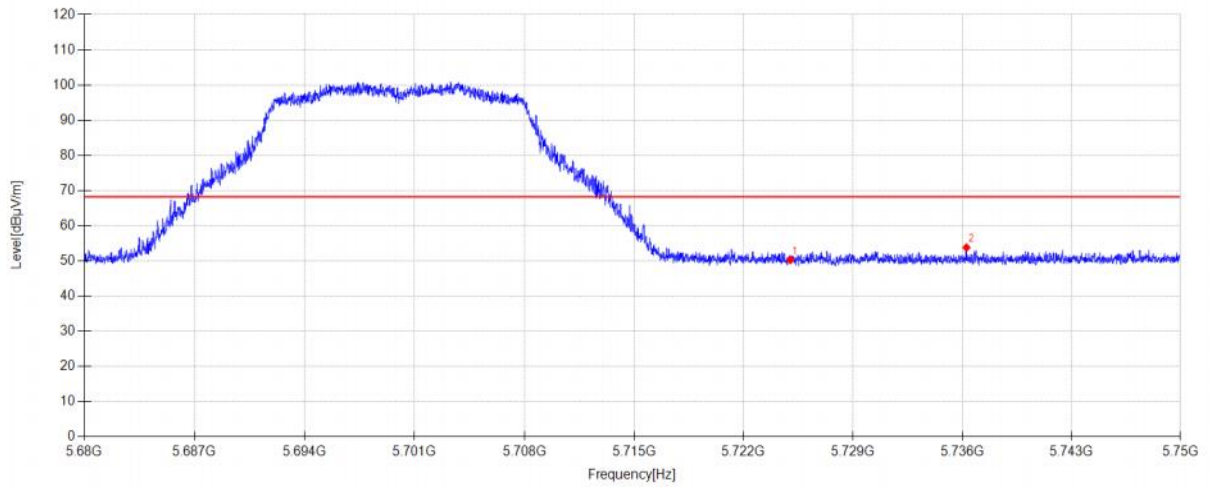


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.15	33.45	5.32	-29.65	50.27	68.20	17.93	PK	Horizontal
2	5736.273	44.50	33.61	5.33	-29.65	53.79	68.20	14.41	PK	Horizontal

Test Mode:	802. 11A Ant1	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

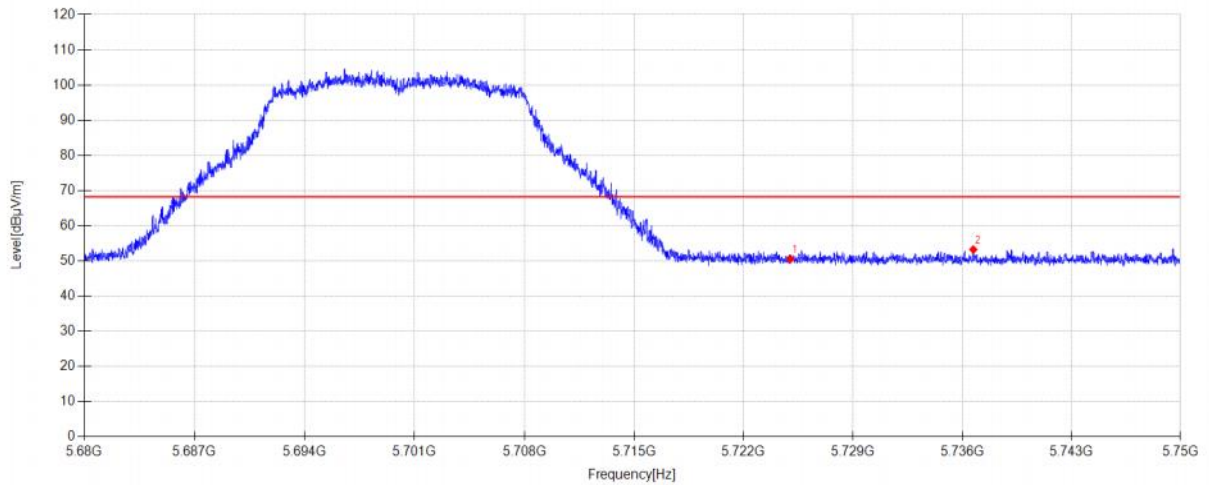


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.43	33.45	5.32	-29.65	50.55	68.20	17.65	PK	Vertical
2	5736.714	43.93	33.61	5.33	-29.65	53.22	68.20	14.98	PK	Vertical

Test Mode:	802. 11A Ant2	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

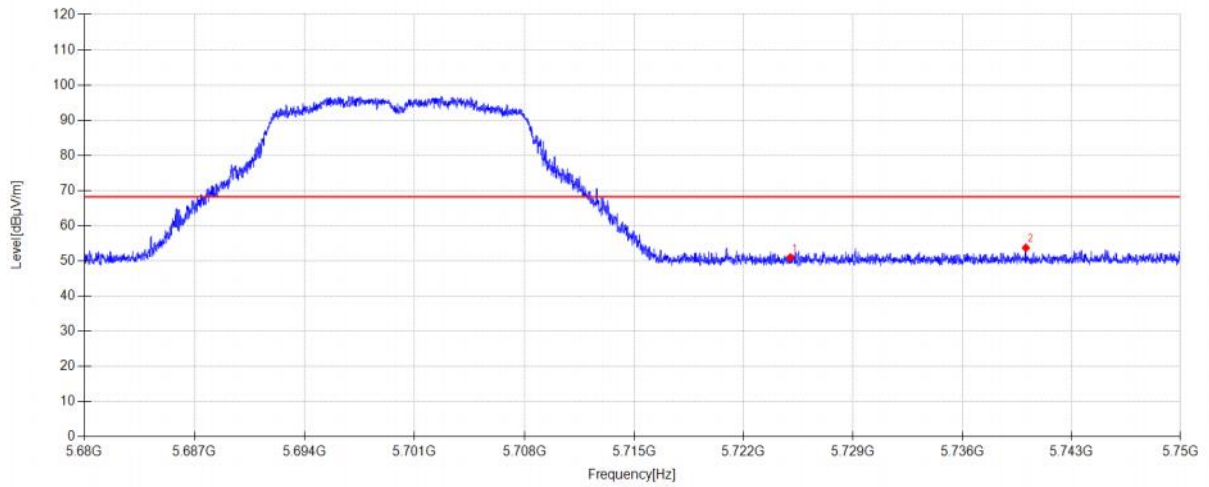


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.88	33.45	5.32	-29.65	51.00	68.20	17.20	PK	Horizontal
2	5740.081	44.37	33.66	5.33	-29.65	53.71	68.20	14.49	PK	Horizontal

Test Mode:	802. 11A Ant2	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

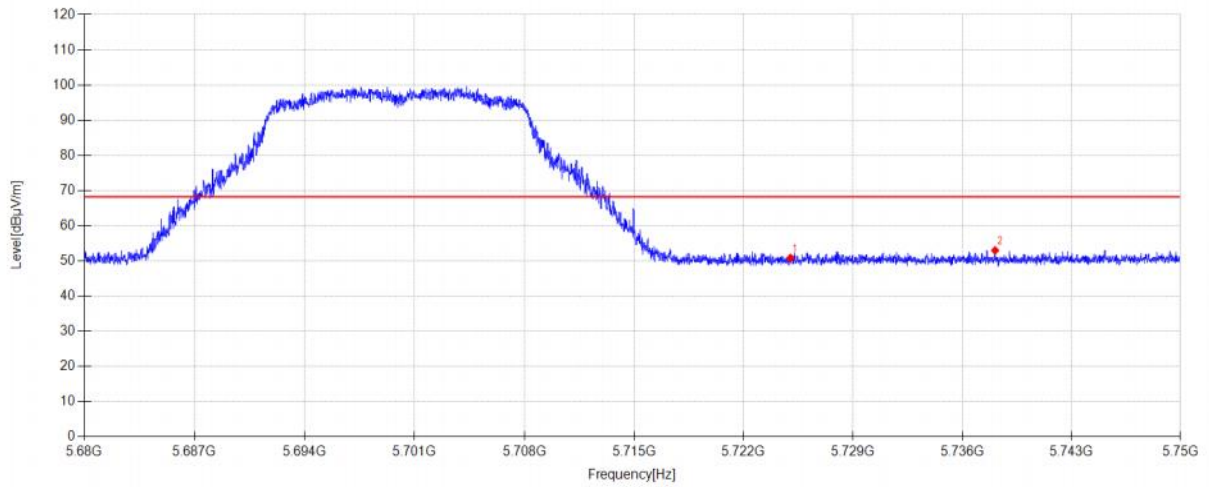

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.70	33.45	5.32	-29.65	50.82	68.20	17.38	PK	Vertical
2	5738.107	43.67	33.63	5.33	-29.65	52.98	68.20	15.22	PK	Vertical


Test Mode:	802. 11A Ant2	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

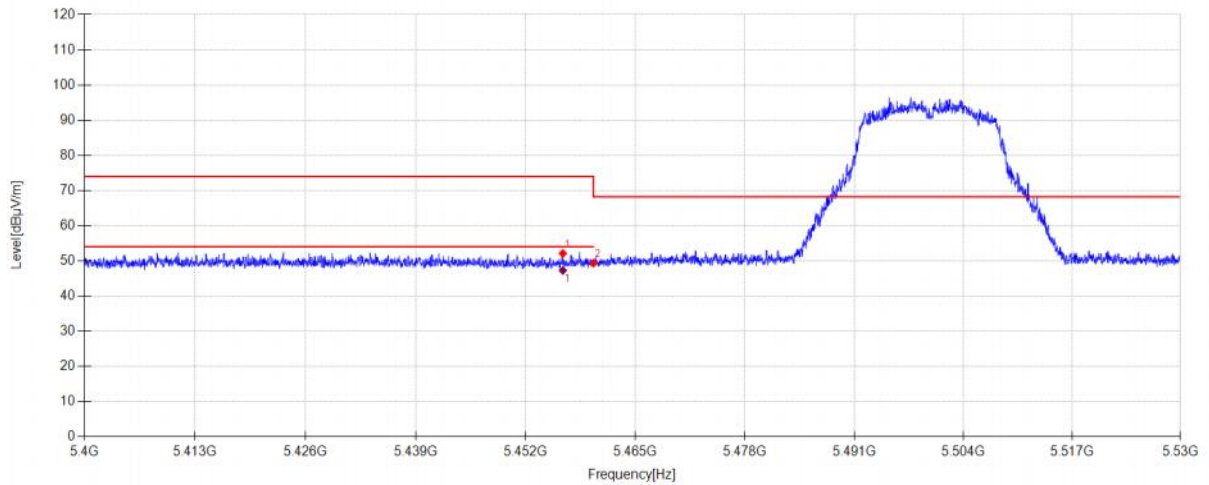

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.381	43.78	32.86	5.19	-29.71	52.12	74.00	21.88	PK	Horizontal
2	5460.000	40.96	32.90	5.19	-29.71	49.34	68.20	18.86	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.381	38.94	32.86	5.19	47.28	54.00	6.72	AV	Horizontal


Test Mode:	802. 11A Ant2	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

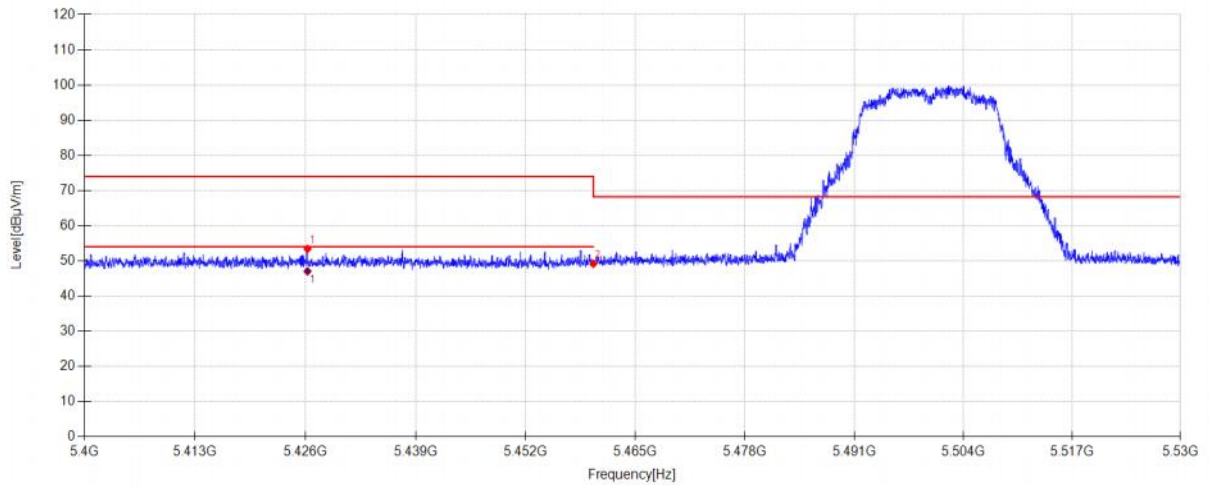

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5426.221	45.11	32.85	5.17	-29.71	53.42	74.00	20.58	PK	Vertical
2	5460.000	40.79	32.90	5.19	-29.71	49.17	68.20	19.03	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5426.221	38.72	32.85	5.17	47.03	54.00	6.97	AV	Vertical	


Test Mode:	802. 11A Ant2	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

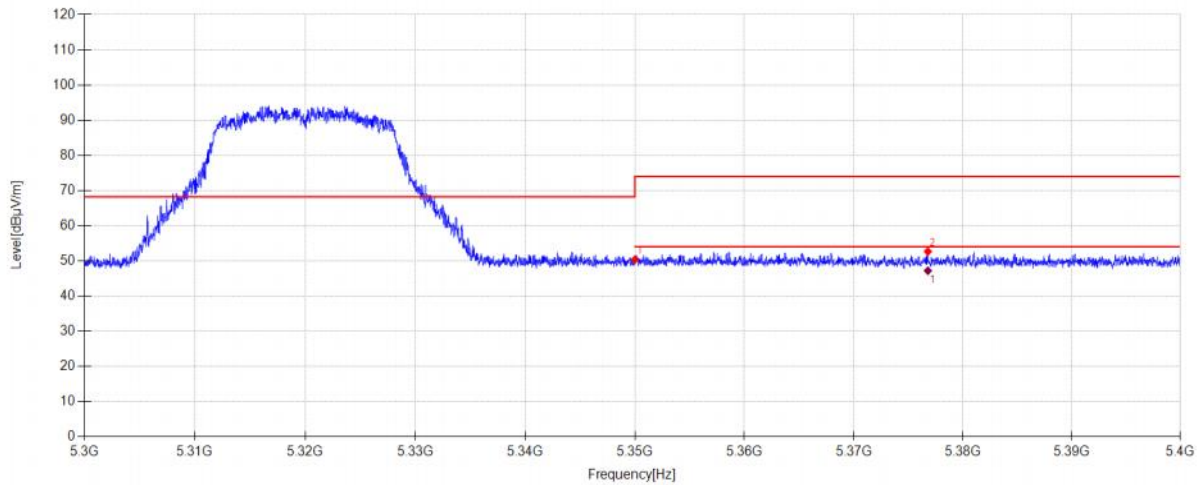

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.44	32.50	5.14	-29.73	50.35	68.20	17.85	PK	Horizontal
2	5376.800	44.53	32.71	5.15	-29.72	52.67	74.00	21.33	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5376.800	39.06	32.71	5.15	47.20	54.00	6.80	AV	Horizontal	


Test Mode:	802. 11A Ant2	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

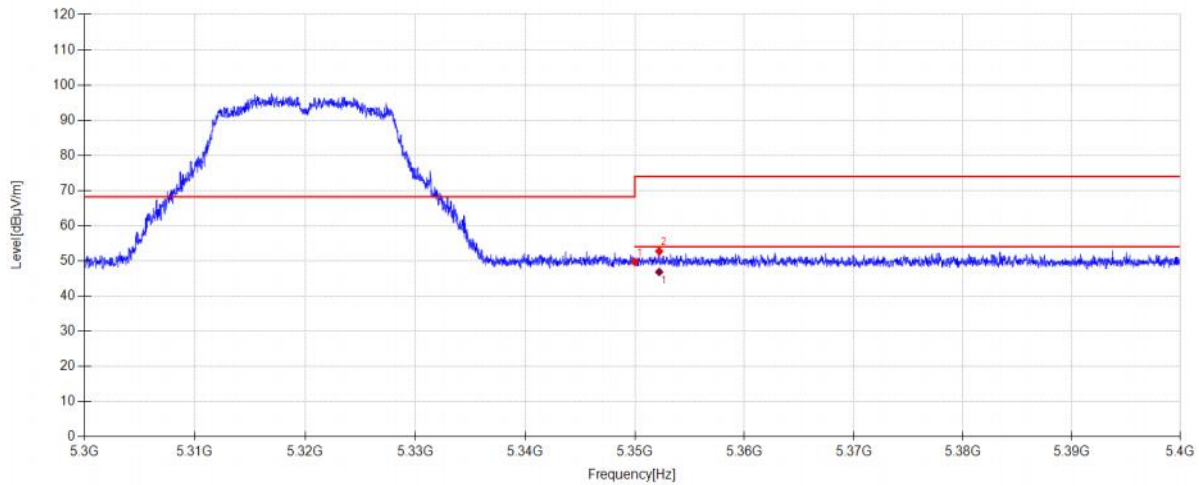

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.84	32.50	5.14	-29.73	49.75	68.20	18.45	PK	Vertical
2	5352.220	44.81	32.52	5.14	-29.73	52.74	74.00	21.26	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5352.220	38.92	32.52	5.14	46.85	54.00	7.15	AV	Vertical	


Test Mode:	802. 11A Ant2	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

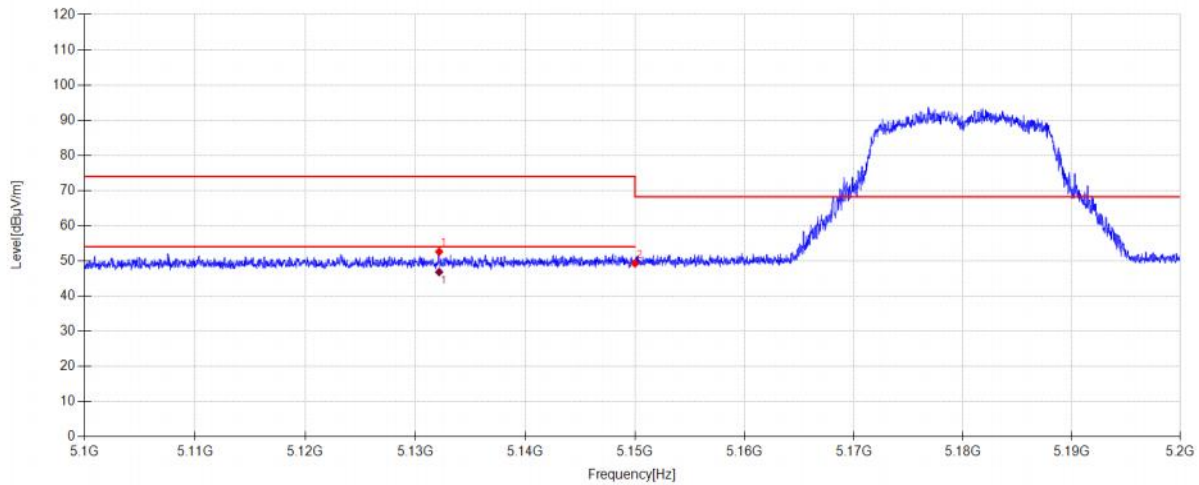

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5132.160	44.59	32.76	5.03	-29.77	52.61	74.00	21.39	PK	Horizontal
2	5150.000	41.11	32.90	5.04	-29.77	49.28	68.20	18.92	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5132.160	38.81	32.76	5.03	46.83	54.00	7.17	AV	Horizontal


Test Mode:	802. 11A Ant2	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

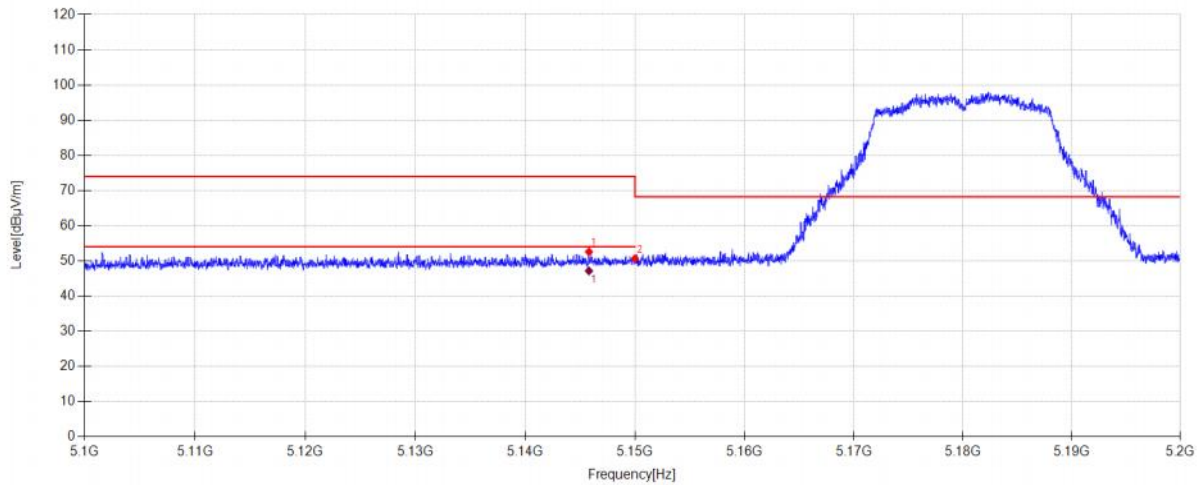

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.800	44.47	32.87	5.03	-29.77	52.60	74.00	21.40	PK	Vertical
2	5150.000	42.51	32.90	5.04	-29.77	50.68	68.20	17.52	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5145.800	39.01	32.87	5.03	47.14	54.00	6.86	AV	Vertical	


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

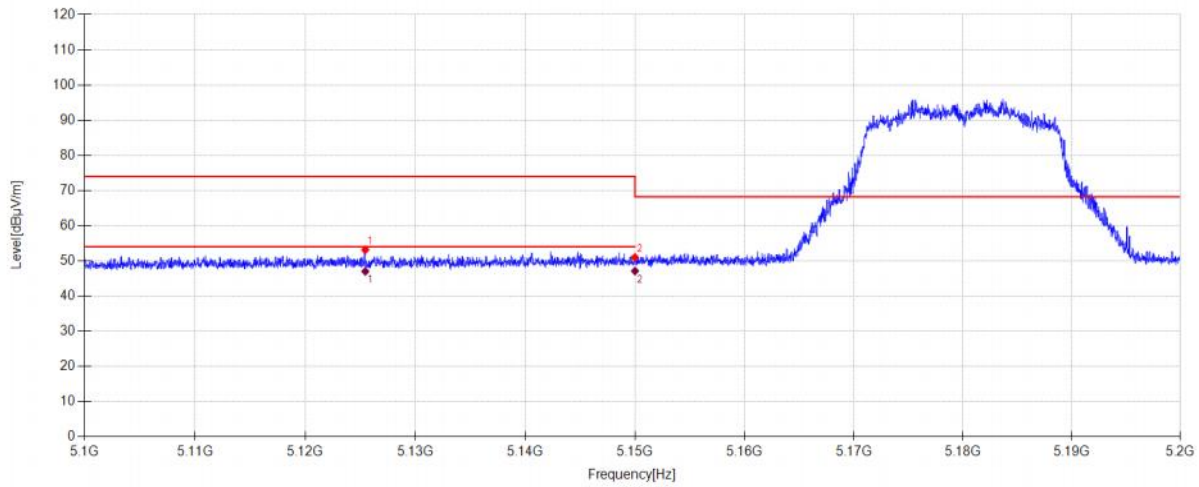

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5125.450	45.20	32.70	5.02	-29.77	53.15	74.00	20.85	PK	Horizontal
2	5150.000	42.83	32.90	5.04	-29.77	51.00	68.20	17.20	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5125.450	39.06	32.70	5.02	47.01	54.00	6.99	AV	Horizontal
2	5150.000	38.95	32.90	5.04	47.12	54.00	6.88	AV	Horizontal


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

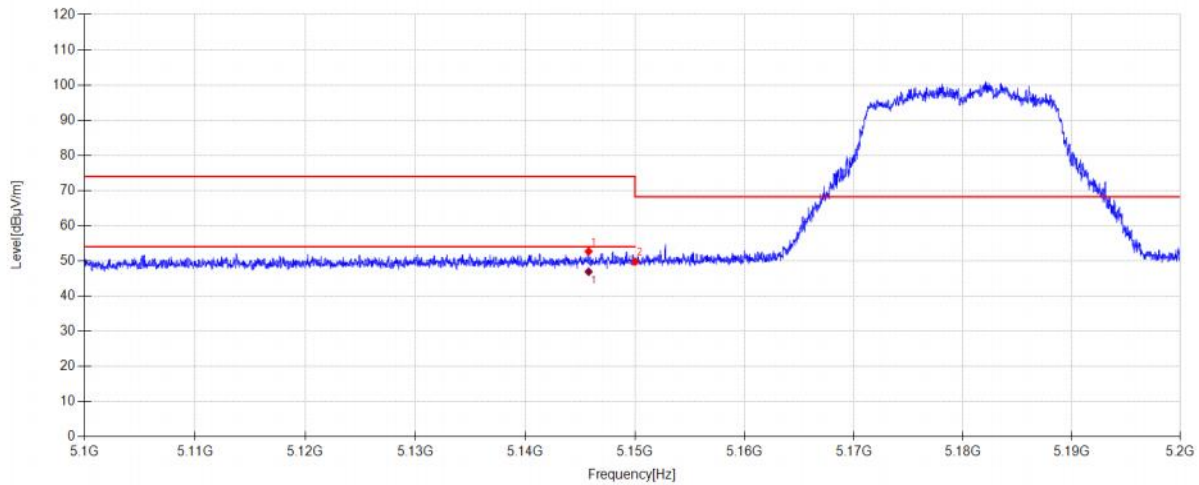

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.770	44.56	32.87	5.03	-29.77	52.69	74.00	21.31	PK	Vertical
2	5150.000	41.63	32.90	5.04	-29.77	49.80	68.20	18.40	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5145.770	38.79	32.87	5.03	46.92	54.00	7.08	AV	Vertical	


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

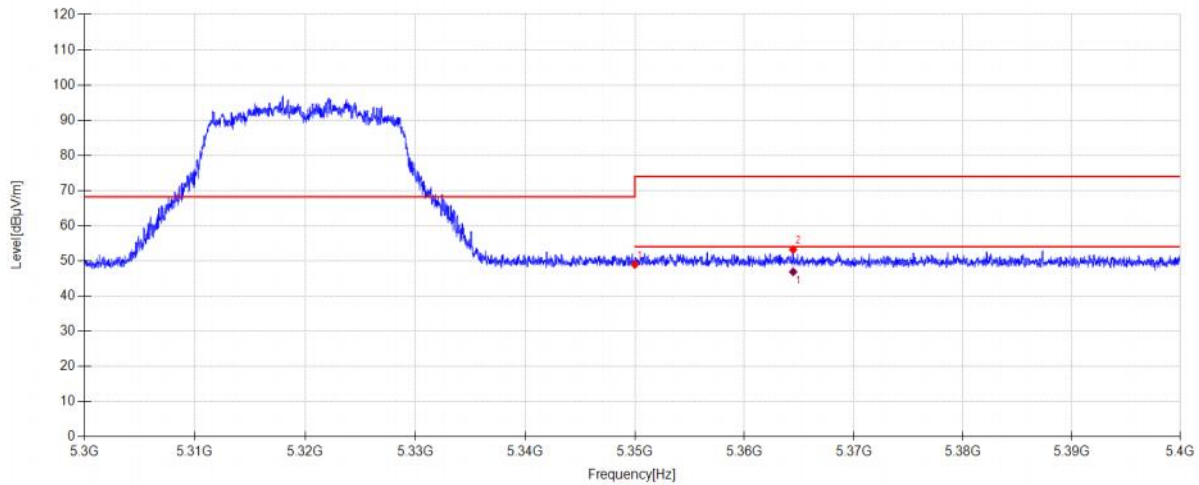

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.04	32.50	5.14	-29.73	48.95	68.20	19.25	PK	Horizontal
2	5364.460	45.17	32.62	5.14	-29.73	53.20	74.00	20.80	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5364.460	38.86	32.62	5.14	46.89	54.00	7.11	AV	Horizontal


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

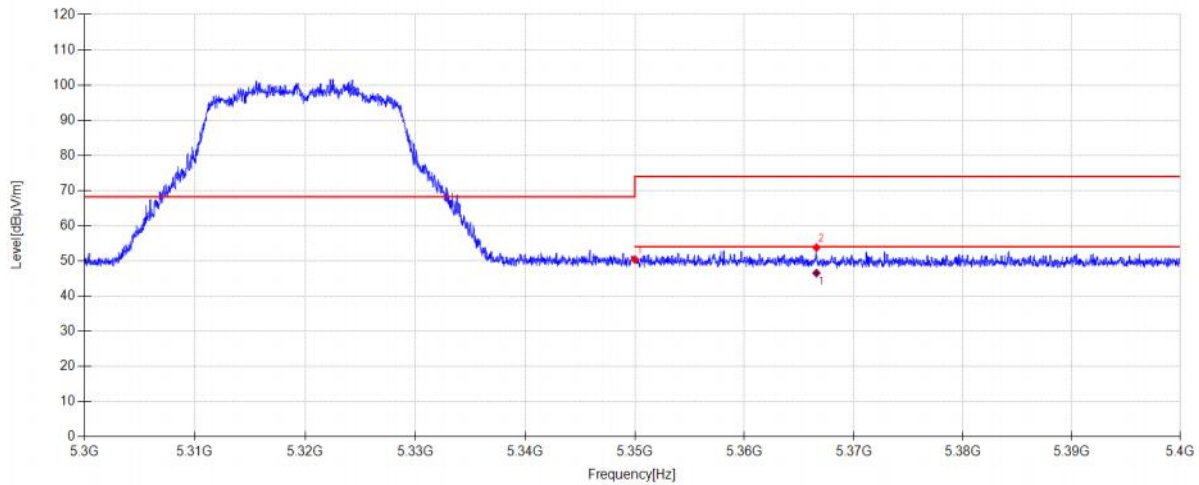

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.46	32.50	5.14	-29.73	50.37	68.20	17.83	PK	Vertical
2	5366.590	45.75	32.63	5.14	-29.73	53.79	74.00	20.21	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5366.590	38.49	32.63	5.14	46.53	54.00	7.47	AV	Vertical	


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

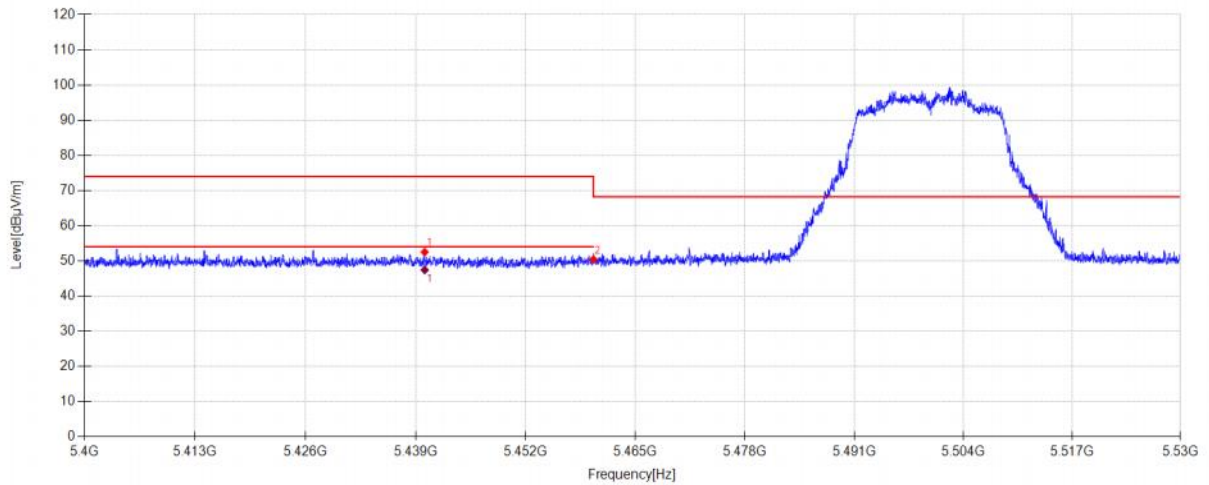

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.040	44.23	32.82	5.18	-29.71	52.52	74.00	21.48	PK	Horizontal
2	5460.000	42.03	32.90	5.19	-29.71	50.41	68.20	17.79	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.040	39.13	32.82	5.18	47.42	54.00	6.58	AV	Horizontal


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

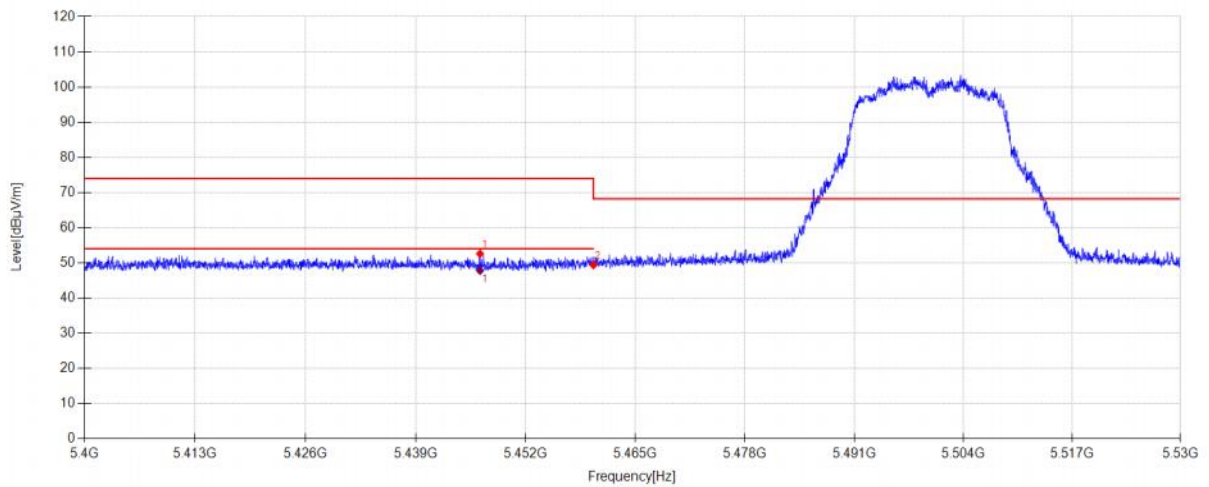

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.579	44.33	32.81	5.18	-29.71	52.61	74.00	21.39	PK	Vertical
2	5460.000	41.02	32.90	5.19	-29.71	49.40	68.20	18.80	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5446.579	39.52	32.81	5.18	47.80	54.00	6.20	AV	Vertical	

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

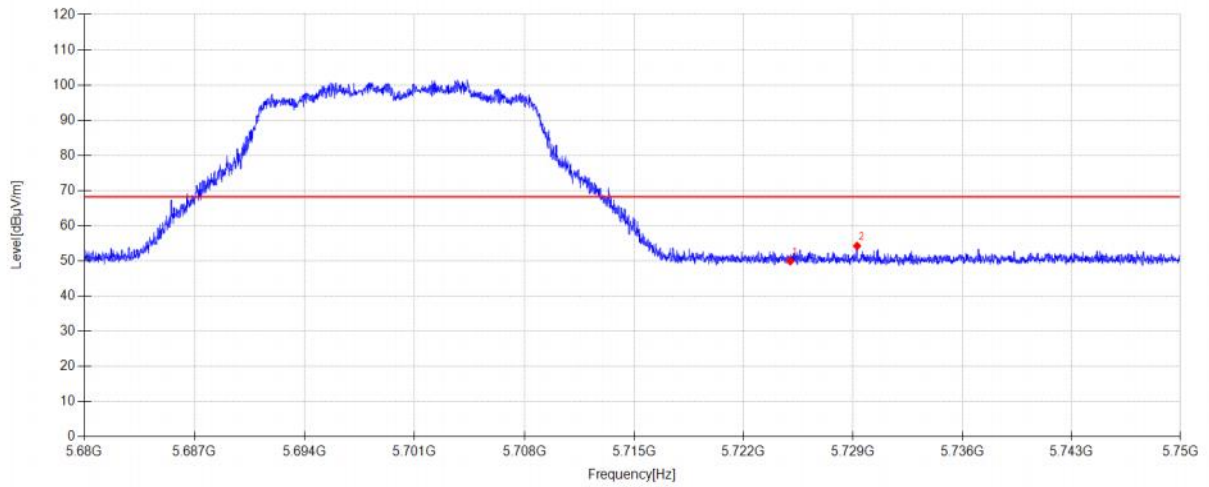


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.82	33.45	5.32	-29.65	49.94	68.20	18.26	PK	Horizontal
2	5729.266	45.07	33.51	5.32	-29.65	54.25	68.20	13.95	PK	Horizontal

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

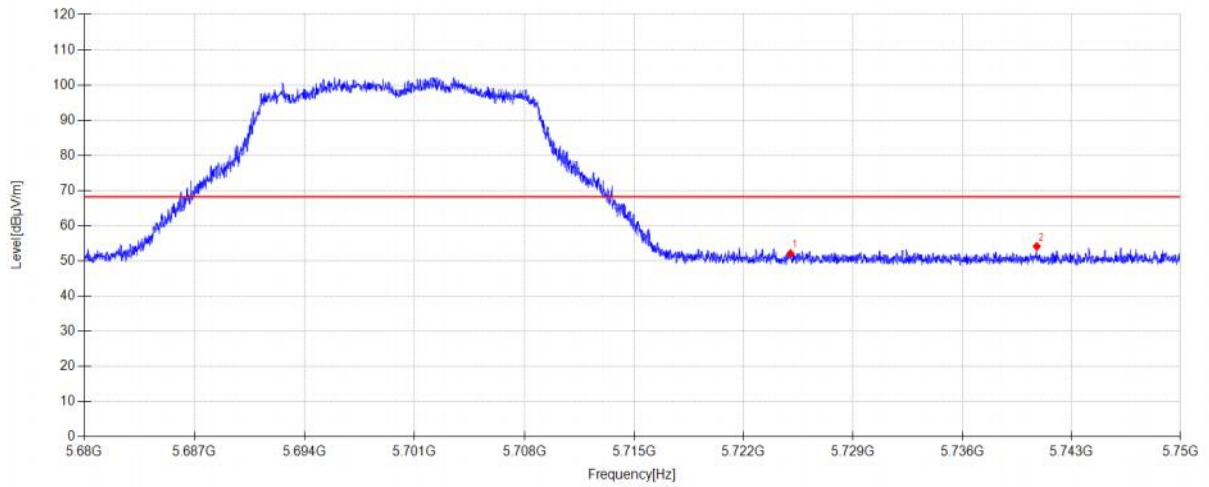


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.93	33.45	5.32	-29.65	52.05	68.20	16.15	PK	Vertical
2	5740.781	44.78	33.67	5.33	-29.65	54.13	68.20	14.07	PK	Vertical

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

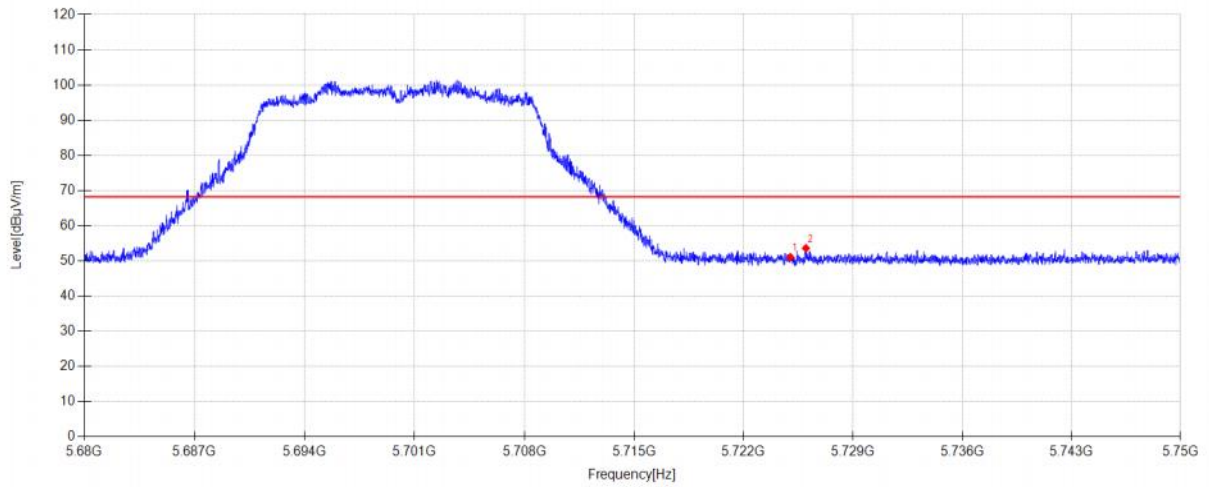


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.93	33.45	5.32	-29.65	51.05	68.20	17.15	PK	Horizontal
2	5725.990	44.47	33.46	5.32	-29.65	53.60	68.20	14.60	PK	Horizontal

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

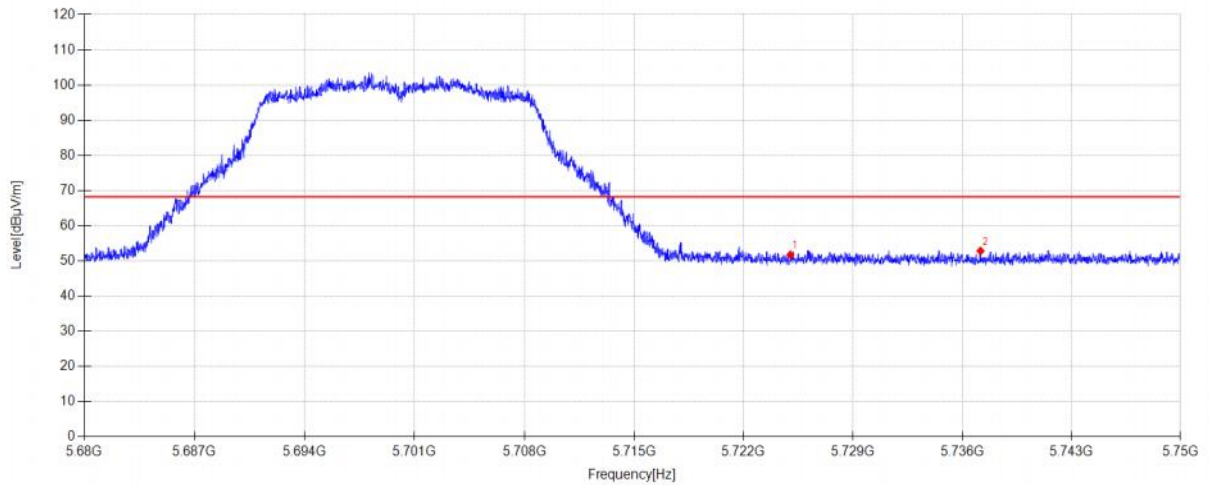

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.64	33.45	5.32	-29.65	51.76	68.20	16.44	PK	Vertical
2	5737.176	43.53	33.62	5.33	-29.65	52.83	68.20	15.37	PK	Vertical


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

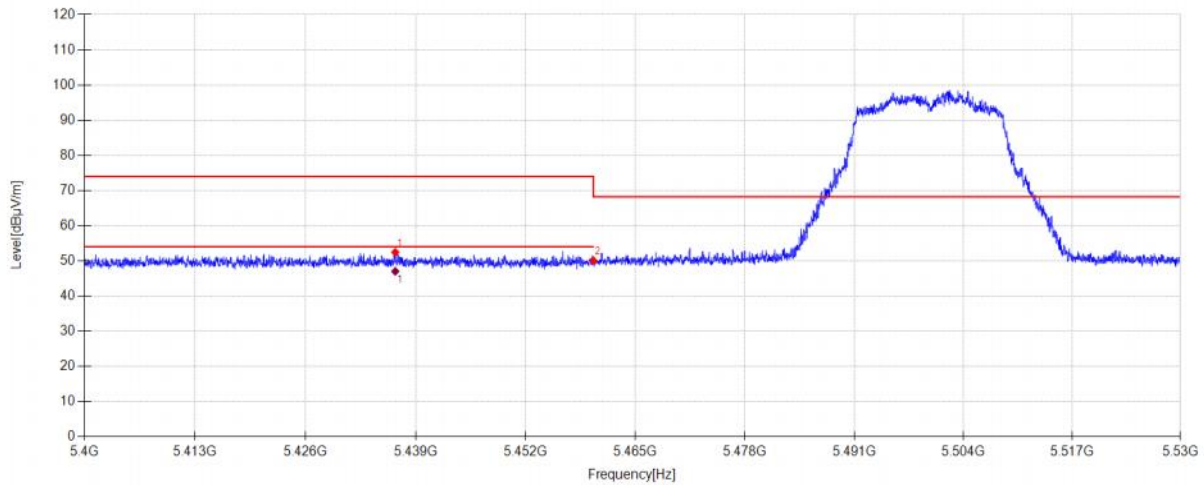

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.569	44.16	32.83	5.18	-29.71	52.46	74.00	21.54	PK	Horizontal
2	5460.000	41.67	32.90	5.19	-29.71	50.05	68.20	18.15	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.569	38.73	32.83	5.18	47.03	54.00	6.97	AV	Horizontal


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

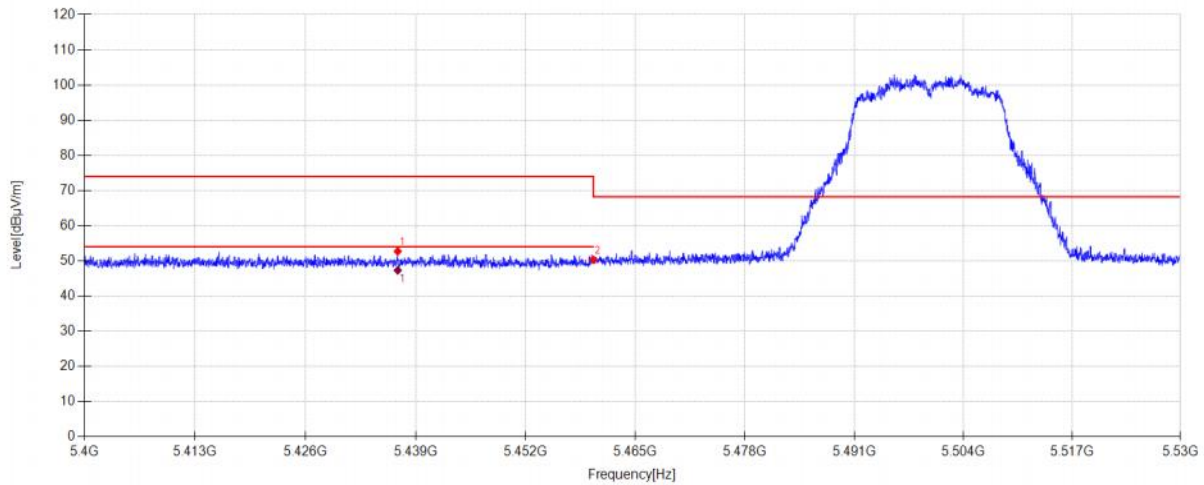

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.855	44.43	32.83	5.18	-29.71	52.73	74.00	21.27	PK	Vertical
2	5460.000	41.94	32.90	5.19	-29.71	50.32	68.20	17.88	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5436.855	39.01	32.83	5.18	47.31	54.00	6.69	AV	Vertical	


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

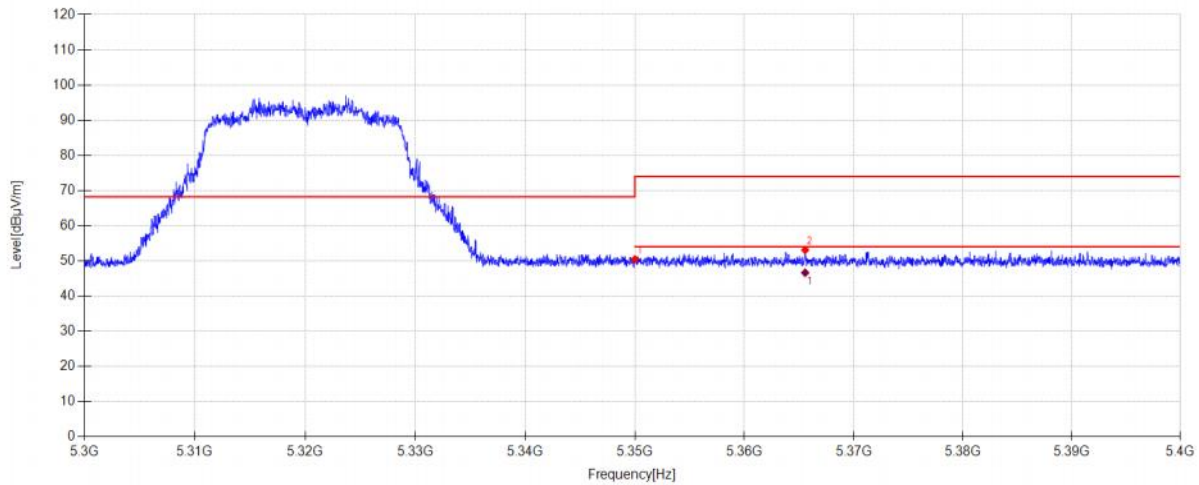

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.51	32.50	5.14	-29.73	50.42	68.20	17.78	PK	Horizontal
2	5365.560	45.06	32.62	5.14	-29.73	53.09	74.00	20.91	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5365.560	38.59	32.62	5.14	46.62	54.00	7.38	AV	Horizontal	


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

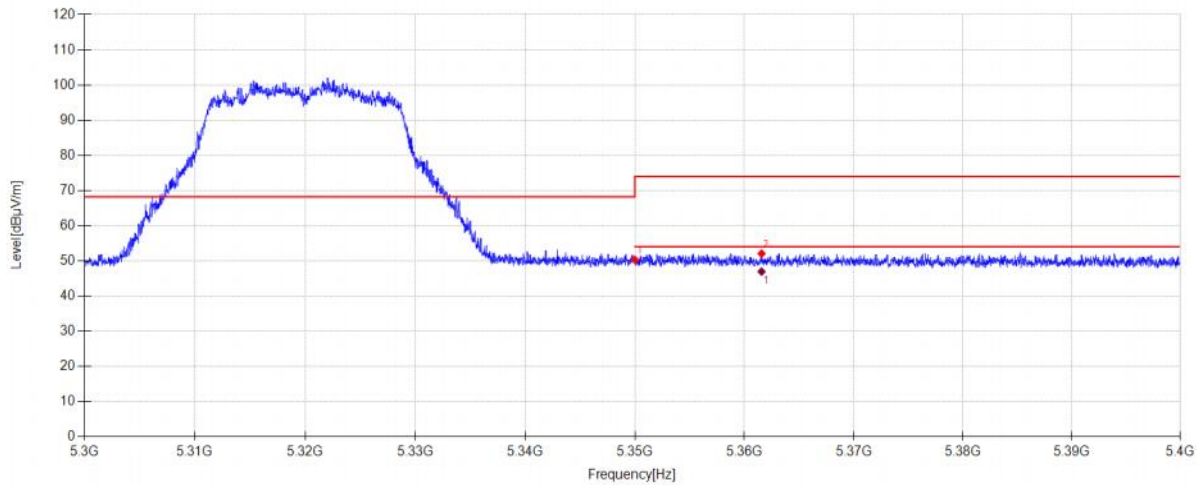

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.39	32.50	5.14	-29.73	50.30	68.20	17.90	PK	Vertical
2	5361.570	44.07	32.59	5.14	-29.73	52.07	74.00	21.93	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5361.570	38.95	32.59	5.14	46.95	54.00	7.05	AV	Vertical


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

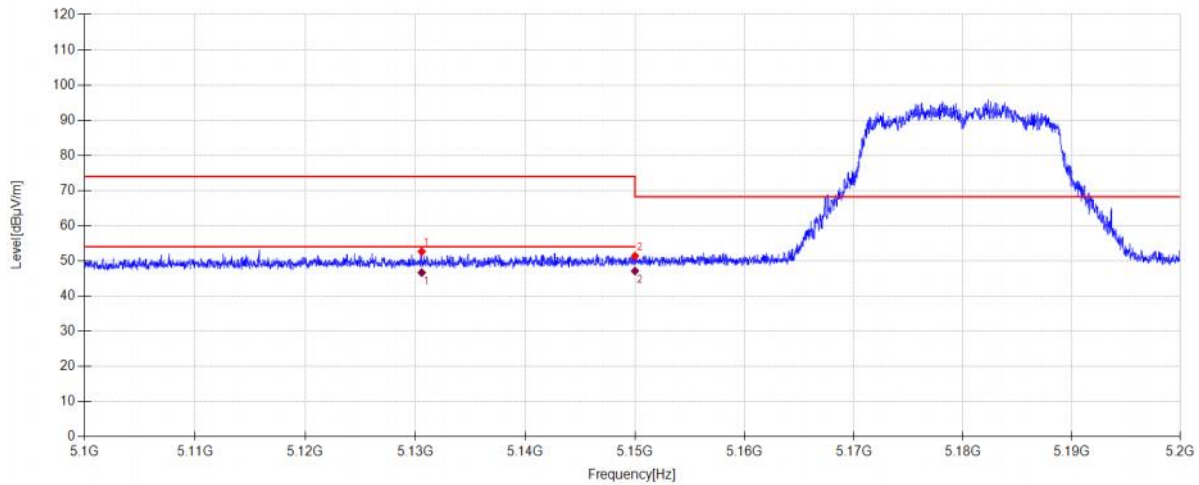

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5130.580	44.63	32.74	5.03	-29.77	52.63	74.00	21.37	PK	Horizontal
2	5150.000	43.23	32.90	5.04	-29.77	51.40	68.20	16.80	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5130.580	38.67	32.74	5.03	46.67	54.00	7.33	AV	Horizontal
2	5150.000	38.95	32.90	5.04	47.12	54.00	6.88	AV	Horizontal


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

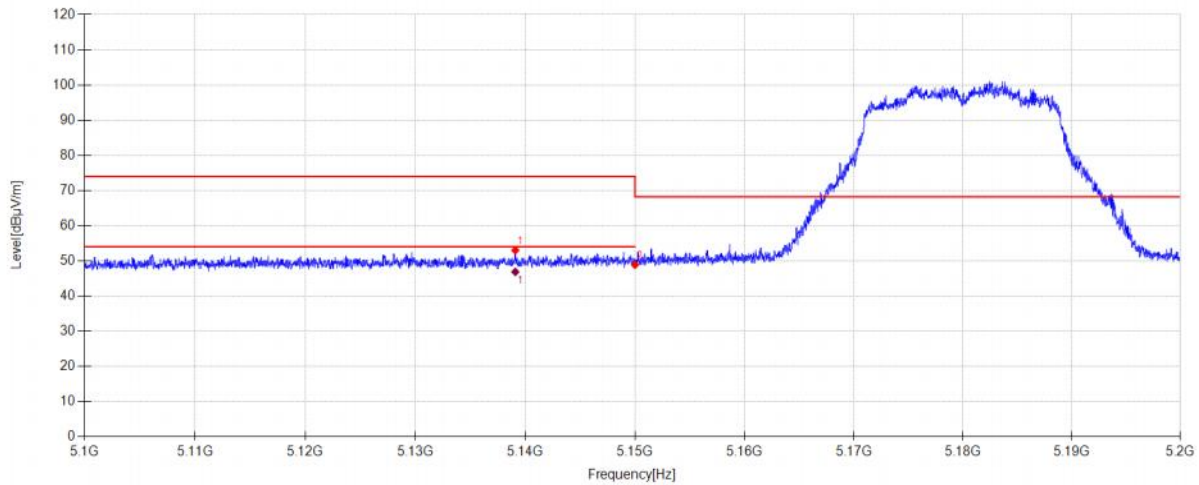

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.090	44.94	32.81	5.03	-29.77	53.01	74.00	20.99	PK	Vertical
2	5150.000	40.71	32.90	5.04	-29.77	48.88	68.20	19.32	PK	Vertical

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.090	38.81	32.81	5.03	46.88	54.00	7.12	AV	Vertical


Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

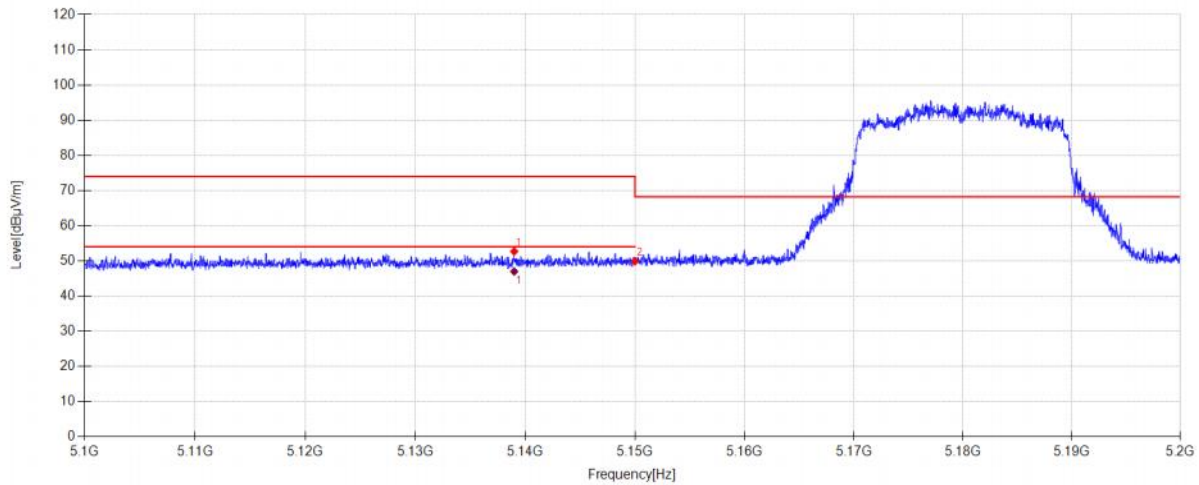

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5138.990	44.63	32.81	5.03	-29.77	52.70	74.00	21.30	PK	Horizontal
2	5150.000	41.70	32.90	5.04	-29.77	49.87	68.20	18.33	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5138.990	38.92	32.81	5.03	46.99	54.00	7.01	AV	Horizontal


Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

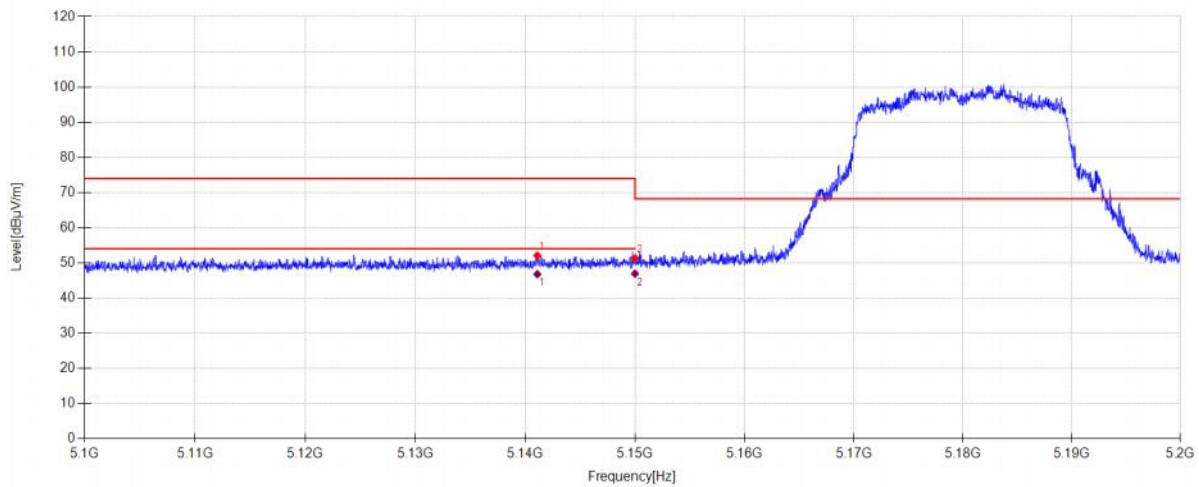

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.100	43.99	32.83	5.03	-29.77	52.08	74.00	21.92	PK	Vertical
2	5150.000	43.15	32.90	5.04	-29.77	51.32	68.20	16.88	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.100	38.69	32.83	5.03	46.78	54.00	7.22	AV	Vertical
2	5150.000	38.75	32.90	5.04	46.92	54.00	7.08	AV	Vertical


Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

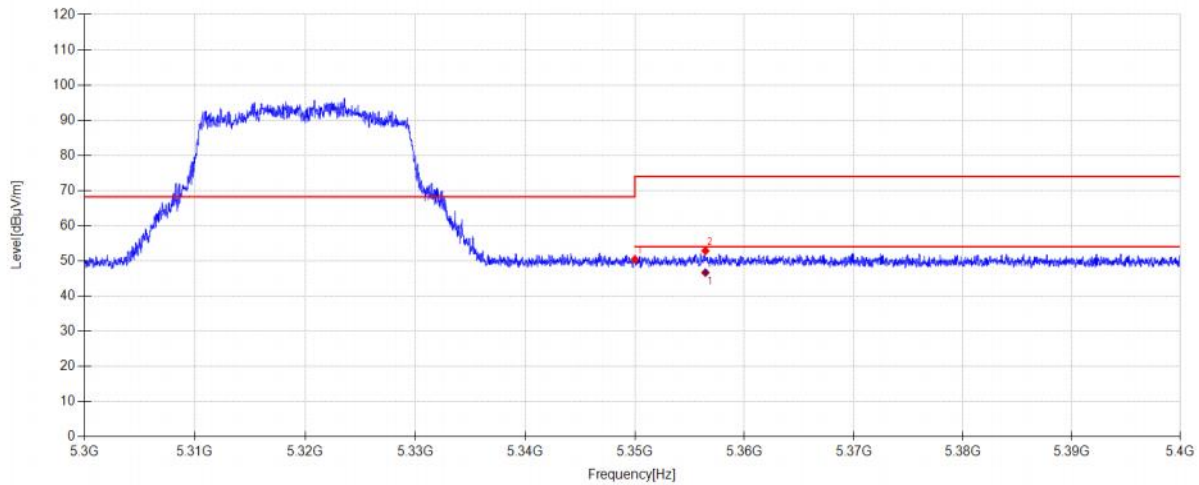

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.51	32.50	5.14	-29.73	50.42	68.20	17.78	PK	Horizontal
2	5356.440	44.91	32.55	5.14	-29.73	52.87	74.00	21.13	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5356.440	38.72	32.55	5.14	46.68	54.00	7.32	AV	Horizontal	


Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

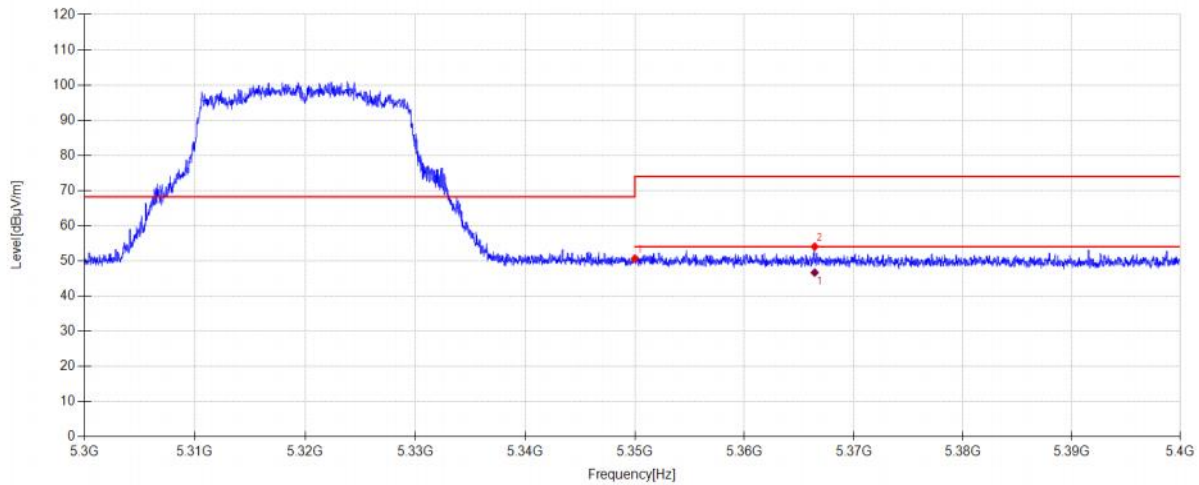

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.75	32.50	5.14	-29.73	50.66	68.20	17.54	PK	Vertical
2	5366.430	46.01	32.63	5.14	-29.73	54.05	74.00	19.95	PK	Vertical

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5366.430	38.64	32.63	5.14	46.68	54.00	7.32	AV	Vertical


Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

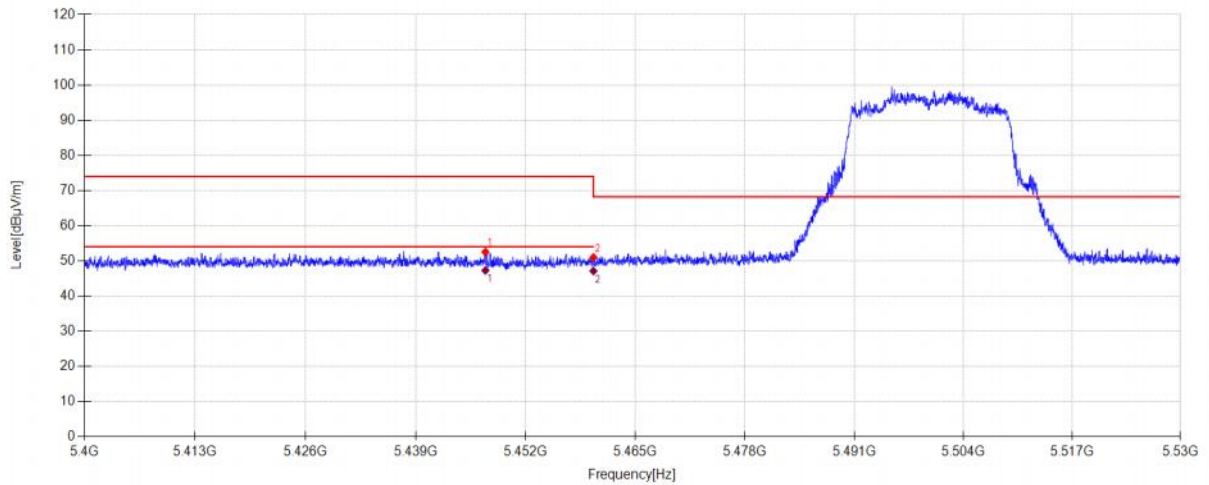

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5447.216	44.26	32.81	5.18	-29.71	52.54	74.00	21.46	PK	Horizontal
2	5460.000	42.62	32.90	5.19	-29.71	51.00	68.20	17.20	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5447.216	39.01	32.81	5.18	47.29	54.00	6.71	AV	Horizontal
2	5460.000	38.74	32.90	5.19	47.12	54.00	6.88	AV	Horizontal


Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

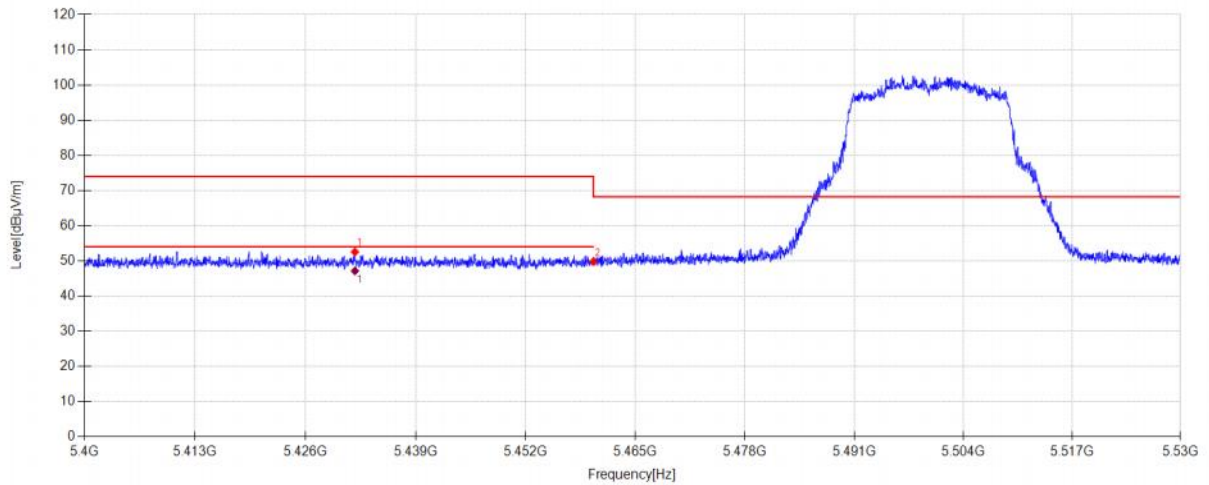

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5431.811	44.25	32.84	5.18	-29.71	52.56	74.00	21.44	PK	Vertical
2	5460.000	41.40	32.90	5.19	-29.71	49.78	68.20	18.42	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5431.811	38.82	32.84	5.18	47.13	54.00	6.87	AV	Vertical	

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

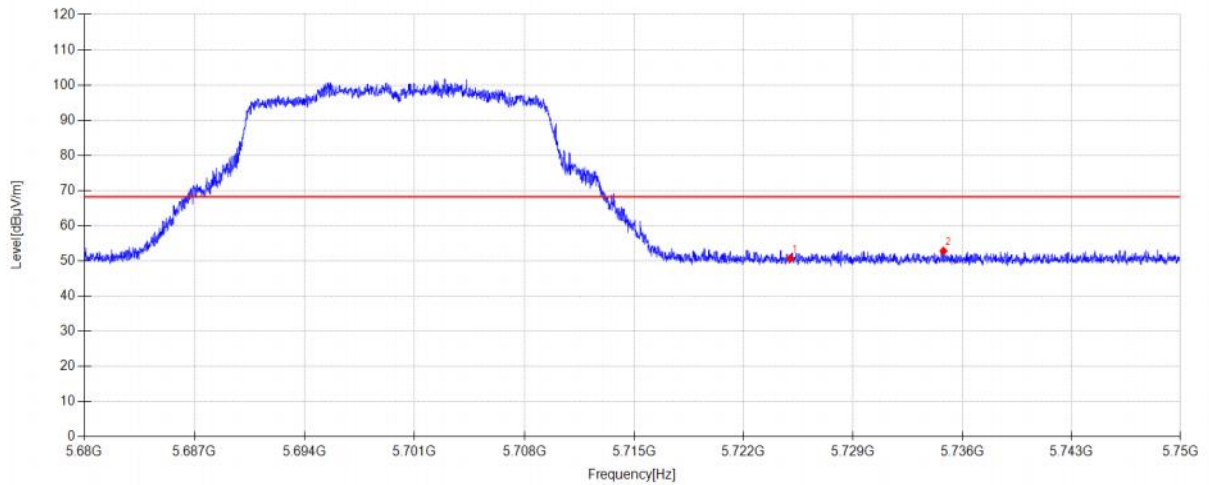


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.57	33.45	5.32	-29.65	50.69	68.20	17.51	PK	Horizontal
2	5734.803	43.54	33.59	5.33	-29.65	52.81	68.20	15.39	PK	Horizontal

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

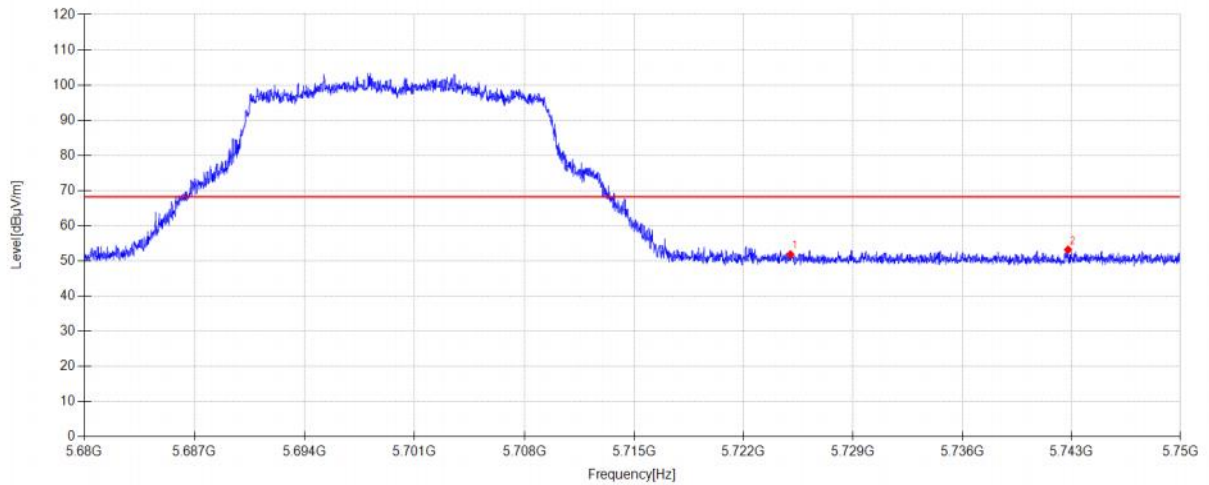

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.72	33.45	5.32	-29.65	51.84	68.20	16.36	PK	Vertical
2	5742.790	43.79	33.70	5.33	-29.65	53.17	68.20	15.03	PK	Vertical


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

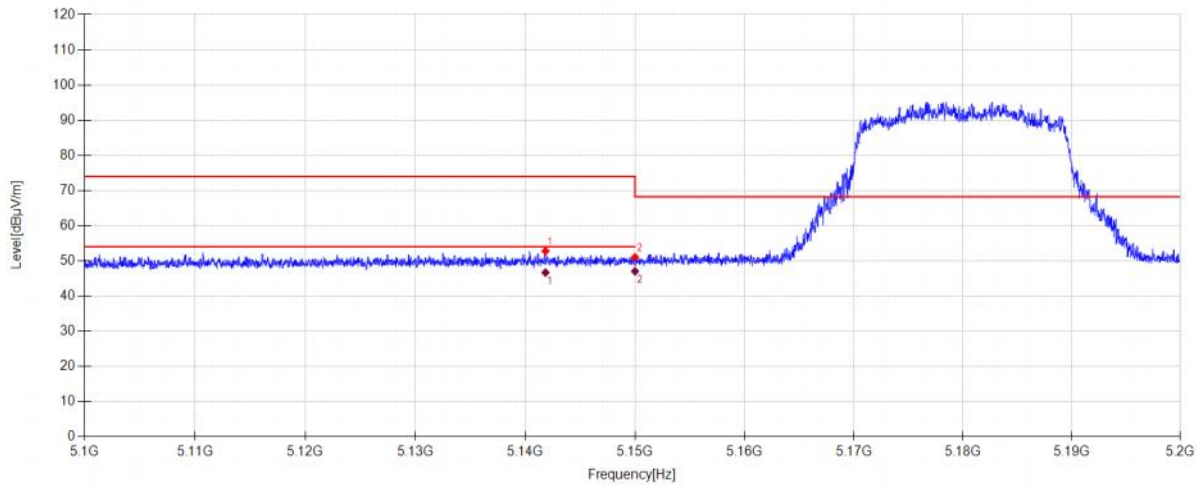

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.840	44.71	32.83	5.03	-29.77	52.80	74.00	21.20	PK	Horizontal
2	5150.000	42.85	32.90	5.04	-29.77	51.02	68.20	17.18	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5141.840	38.59	32.83	5.03	46.68	54.00	7.32	AV	Horizontal	
2	5150.000	38.87	32.90	5.04	47.04	54.00	6.96	AV	Horizontal	


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

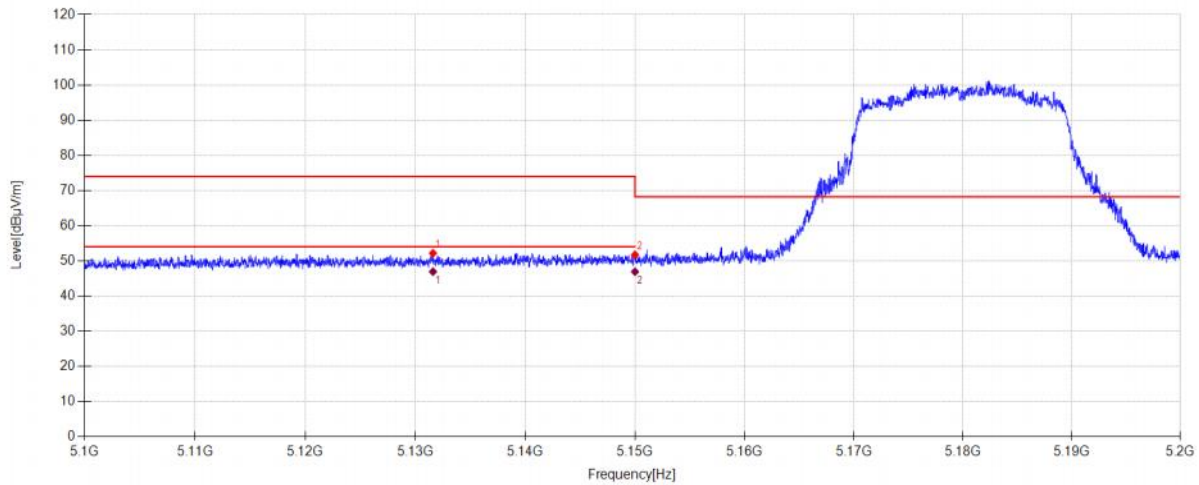

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5131.600	44.19	32.75	5.03	-29.77	52.20	74.00	21.80	PK	Vertical
2	5150.000	43.56	32.90	5.04	-29.77	51.73	68.20	16.47	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5131.600	38.94	32.75	5.03	46.95	54.00	7.05	AV	Vertical
2	5150.000	38.75	32.90	5.04	46.92	54.00	7.08	AV	Vertical


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

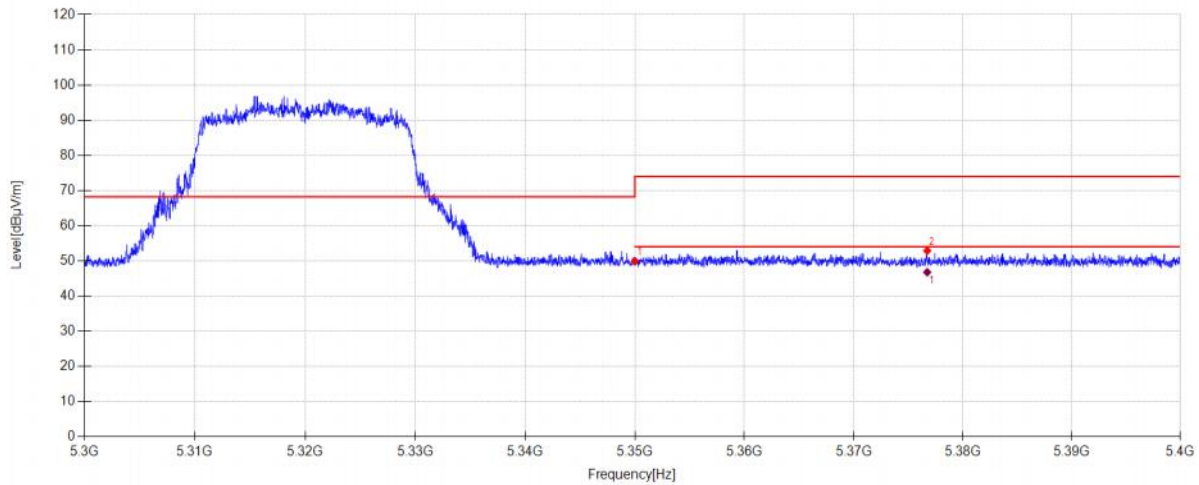

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.93	32.50	5.14	-29.73	49.84	68.20	18.36	PK	Horizontal
2	5376.740	44.74	32.71	5.15	-29.72	52.88	74.00	21.12	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5376.740	38.64	32.71	5.15	46.78	54.00	7.22	AV	Horizontal	


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

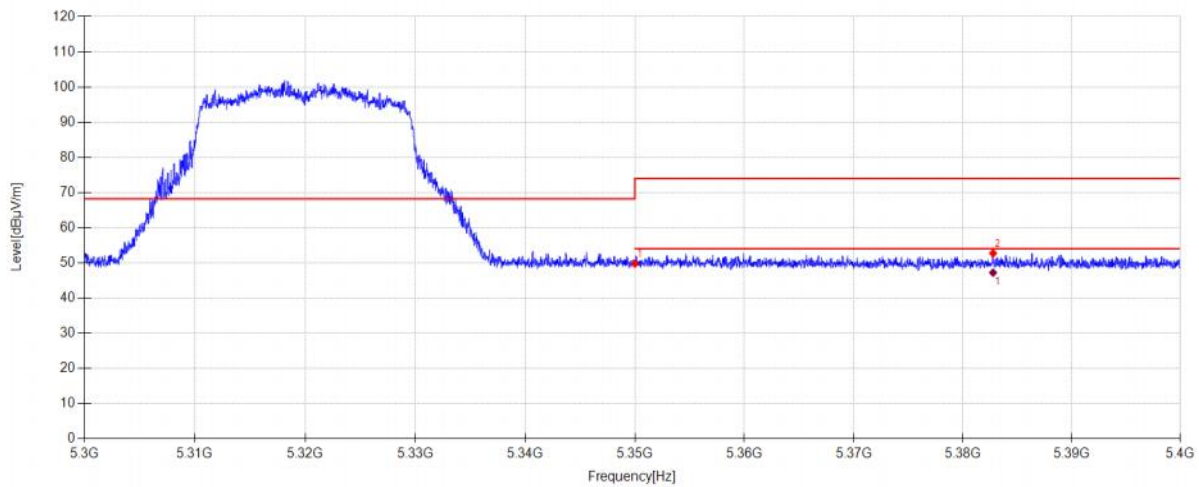

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.88	32.50	5.14	-29.73	49.79	68.20	18.41	PK	Vertical
2	5382.780	44.55	32.76	5.15	-29.72	52.74	74.00	21.26	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5382.780	39.03	32.76	5.15	47.22	54.00	6.78	AV	Vertical	


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

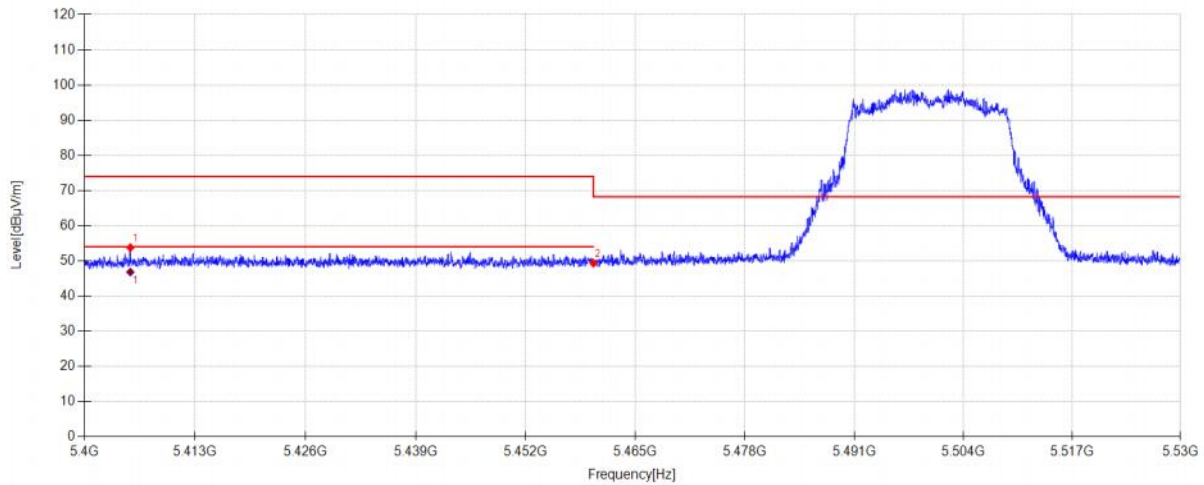

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5405.395	45.45	32.89	5.16	-29.72	53.78	74.00	20.22	PK	Horizontal
2	5460.000	40.94	32.90	5.19	-29.71	49.32	68.20	18.88	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5405.395	38.50	32.89	5.16	46.83	54.00	7.17	AV	Horizontal	


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

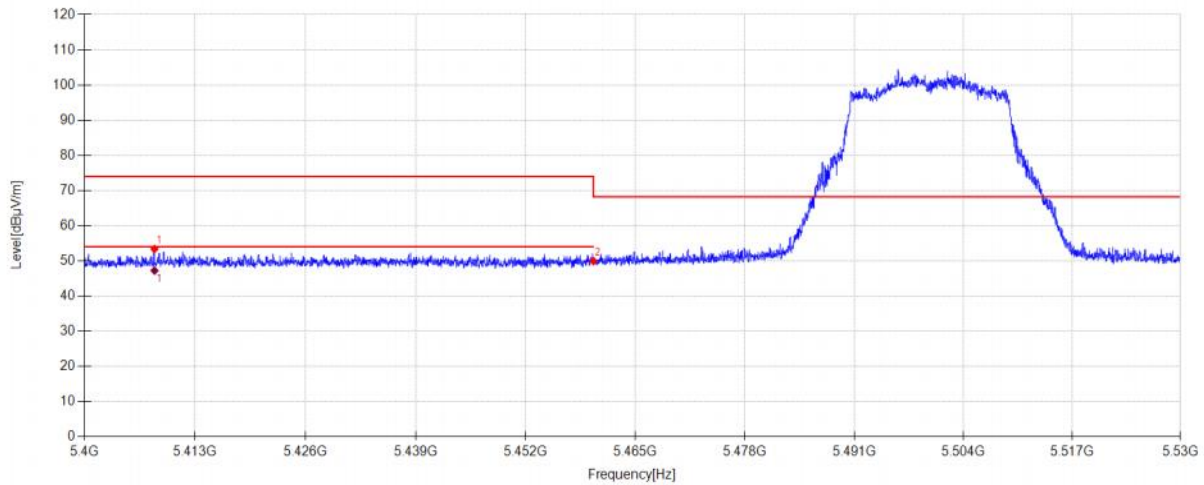

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5408.229	45.07	32.88	5.16	-29.72	53.39	74.00	20.61	PK	Vertical
2	5460.000	41.55	32.90	5.19	-29.71	49.93	68.20	18.27	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5408.229	38.92	32.88	5.16	47.24	54.00	6.76	AV	Vertical	

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5570
Polarity:	Horizontal	Test Voltage:	DC 20V

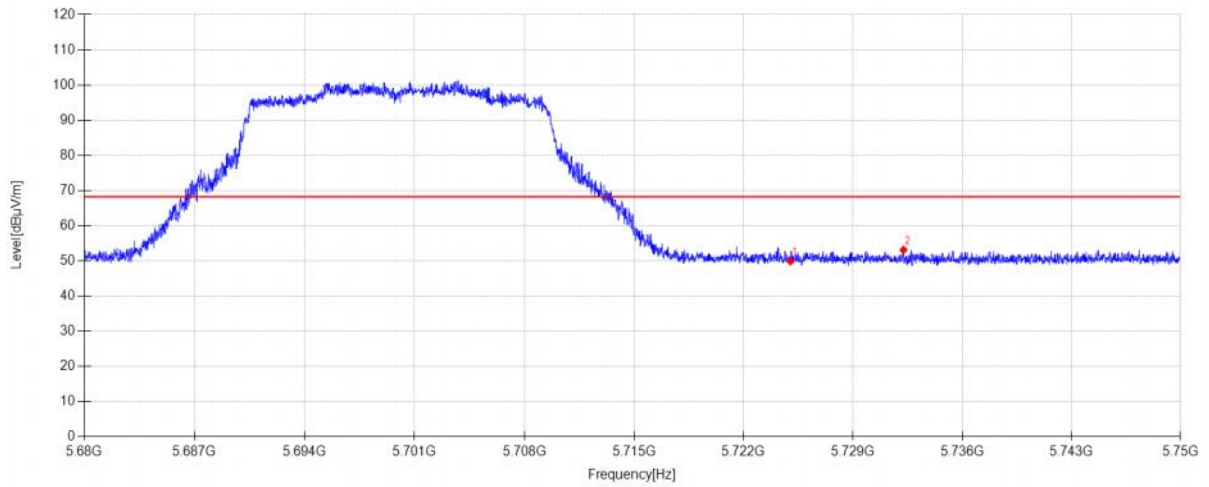


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.78	33.45	5.32	-29.65	49.90	68.20	18.30	PK	Horizontal
2	5732.241	43.89	33.55	5.33	-29.65	53.12	68.20	15.08	PK	Horizontal

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5570
Polarity:	Vertical	Test Voltage:	DC 20V

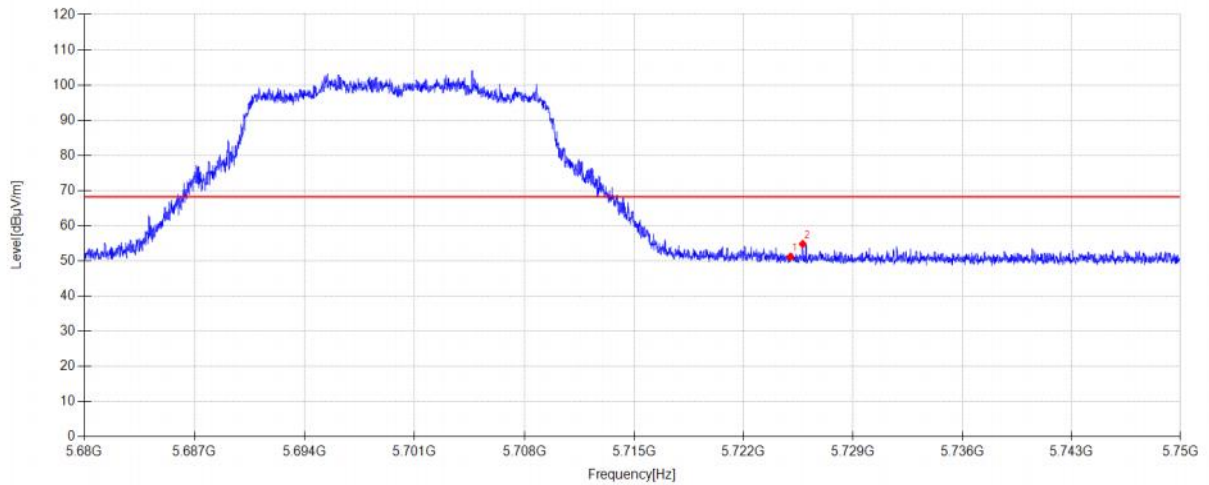

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.06	33.45	5.32	-29.65	51.18	68.20	17.02	PK	Vertical
2	5725.787	45.66	33.46	5.32	-29.65	54.79	68.20	13.41	PK	Vertical


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 20V

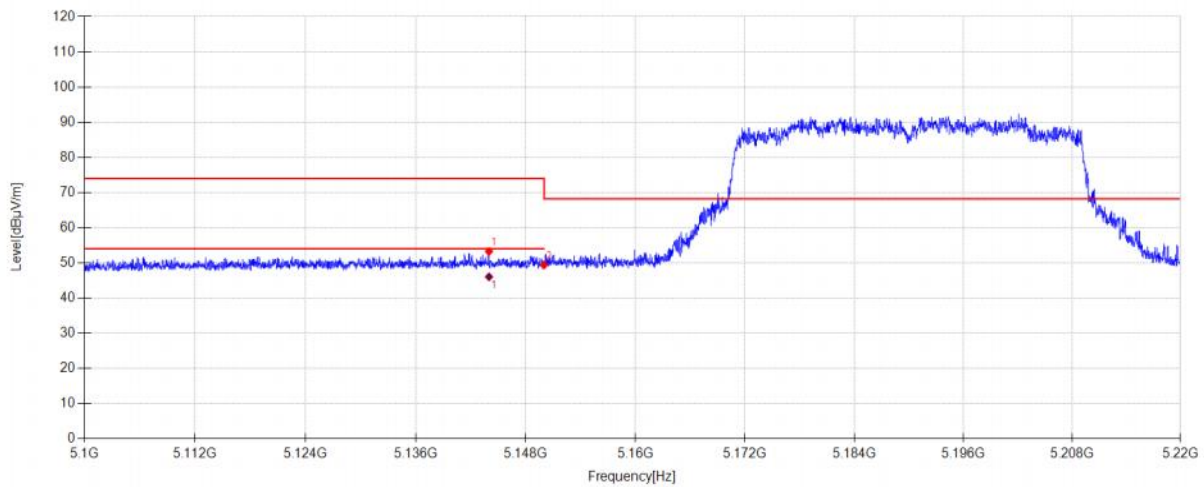

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.980	45.15	32.85	5.03	-29.77	53.26	74.00	20.74	PK	Horizontal
2	5150.000	41.23	32.90	5.04	-29.77	49.40	68.20	18.80	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.980	37.94	32.85	5.03	46.05	54.00	7.95	AV	Horizontal


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 20V

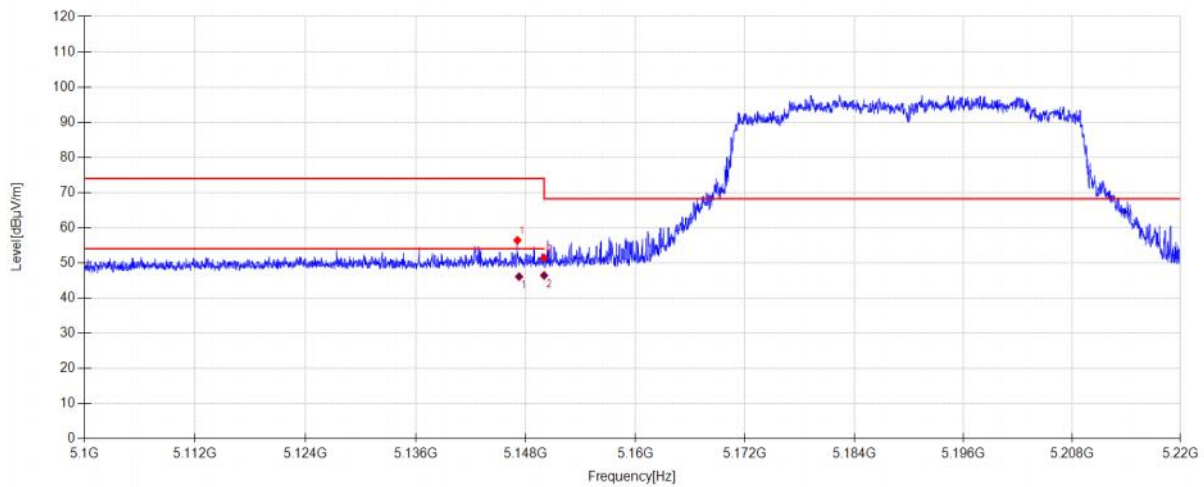

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.088	48.29	32.88	5.03	-29.77	56.43	74.00	17.57	PK	Vertical
2	5150.000	43.22	32.90	5.04	-29.77	51.39	68.20	16.81	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.267	37.95	32.88	5.03	46.09	54.00	7.91	AV	Vertical	
2	5150.000	38.26	32.90	5.04	46.43	54.00	7.57	AV	Vertical	


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 20V

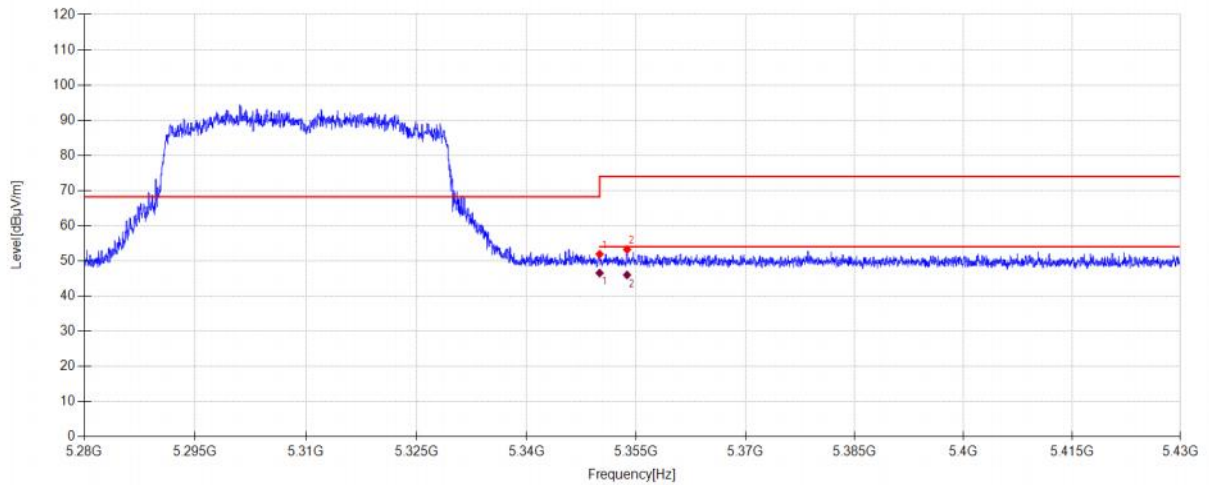

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.99	32.50	5.14	-29.73	51.90	68.20	16.30	PK	Horizontal
2	5353.755	45.29	32.53	5.14	-29.73	53.23	74.00	20.77	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.64	32.50	5.14	46.55	54.00	7.45	AV	Horizontal
2	5353.755	38.06	32.53	5.14	46.00	54.00	8.00	AV	Horizontal


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 20V

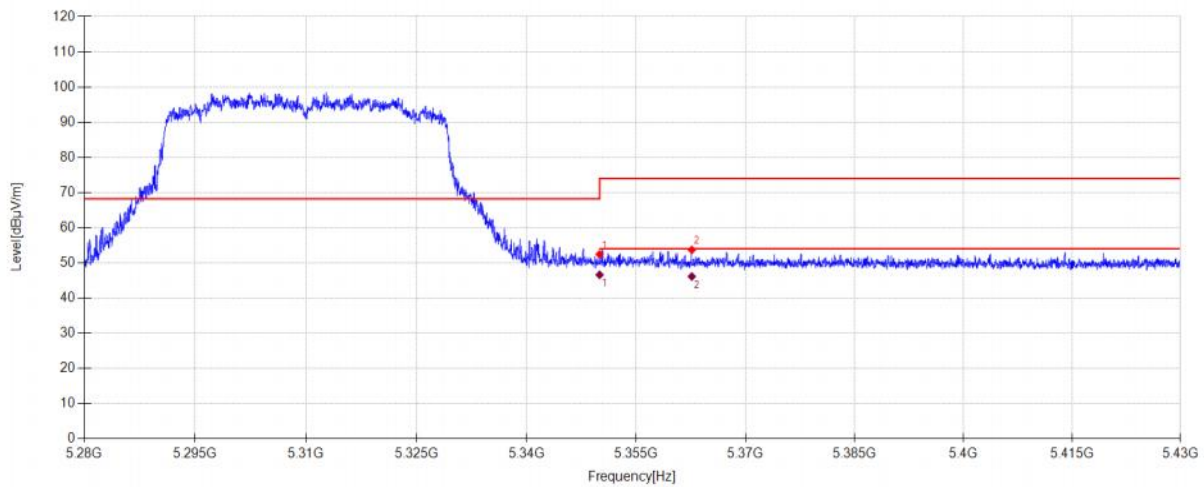

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.53	32.50	5.14	-29.73	52.44	68.20	15.76	PK	Vertical
2	5362.620	45.69	32.60	5.14	-29.73	53.70	74.00	20.30	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.70	32.50	5.14	46.61	54.00	7.39	AV	Vertical
2	5362.620	38.13	32.60	5.14	46.14	54.00	7.86	AV	Vertical


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 20V

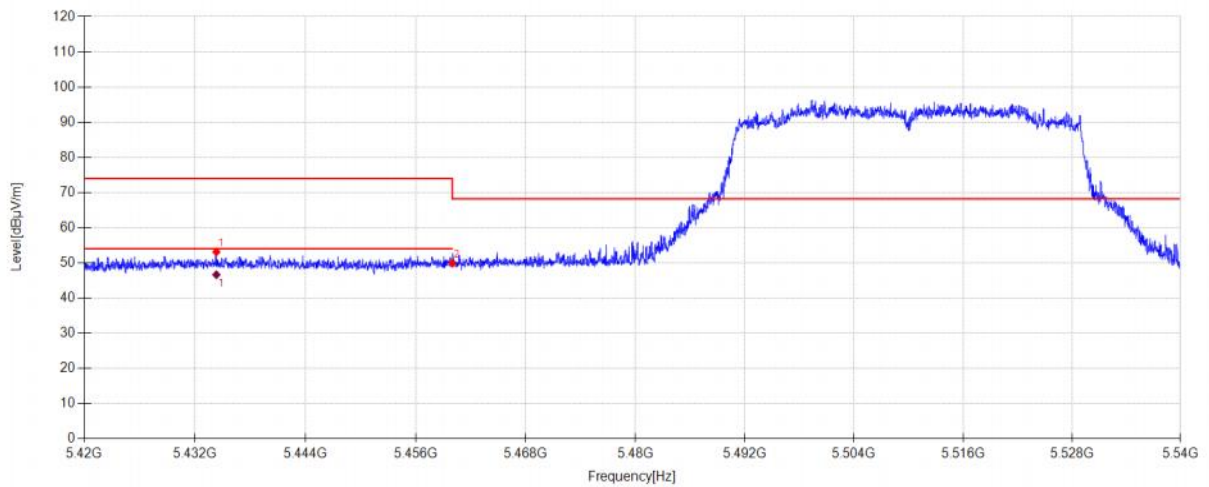

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5434.316	44.81	32.83	5.18	-29.71	53.11	74.00	20.89	PK	Horizontal
2	5460.000	41.51	32.90	5.19	-29.71	49.89	68.20	18.31	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5434.316	38.34	32.83	5.18	46.64	54.00	7.36	AV	Horizontal	


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 20V

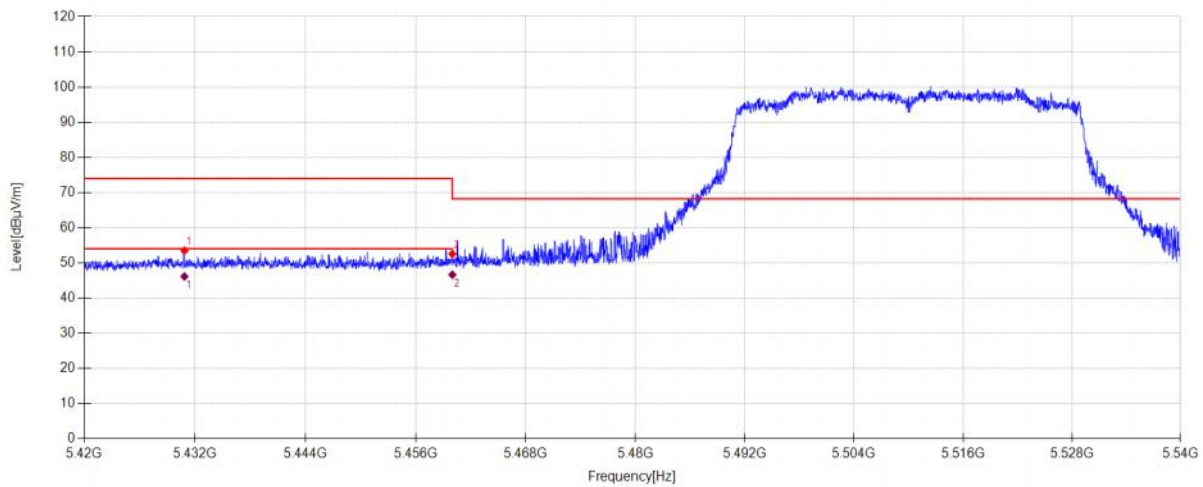

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5430.848	45.18	32.84	5.18	-29.71	53.49	74.00	20.51	PK	Vertical
2	5460.000	44.18	32.90	5.19	-29.71	52.56	68.20	15.64	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5430.848	37.83	32.84	5.18	46.14	54.00	7.86	AV	Vertical
2	5460.000	38.25	32.90	5.19	46.63	54.00	7.37	AV	Vertical

Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 20V

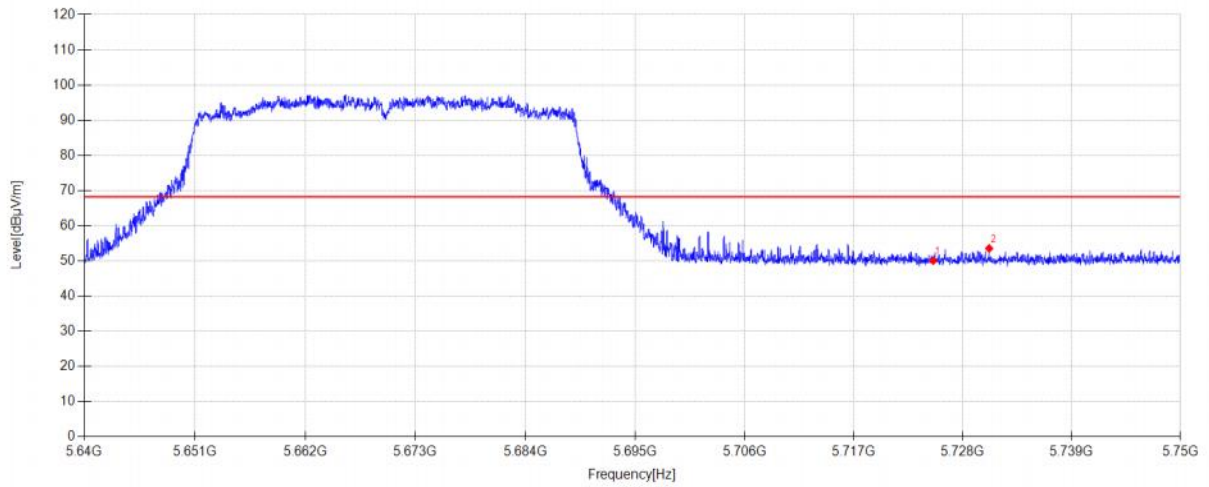


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.93	33.45	5.32	-29.65	50.05	68.20	18.15	PK	Horizontal
2	5730.662	44.34	33.53	5.33	-29.65	53.55	68.20	14.65	PK	Horizontal

Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 20V

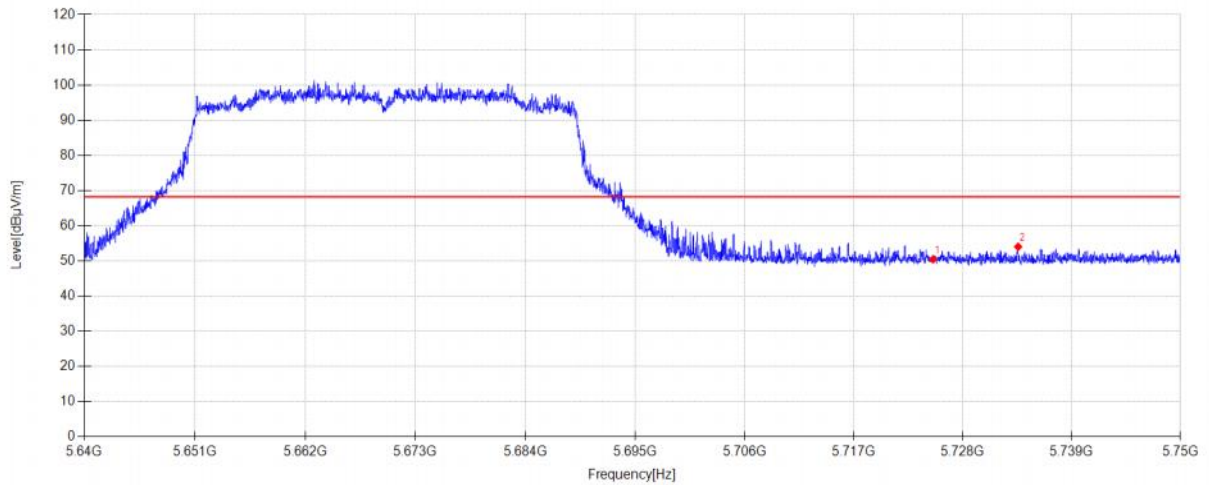


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.34	33.45	5.32	-29.65	50.46	68.20	17.74	PK	Vertical
2	5733.588	44.76	33.57	5.33	-29.65	54.01	68.20	14.19	PK	Vertical

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 20V

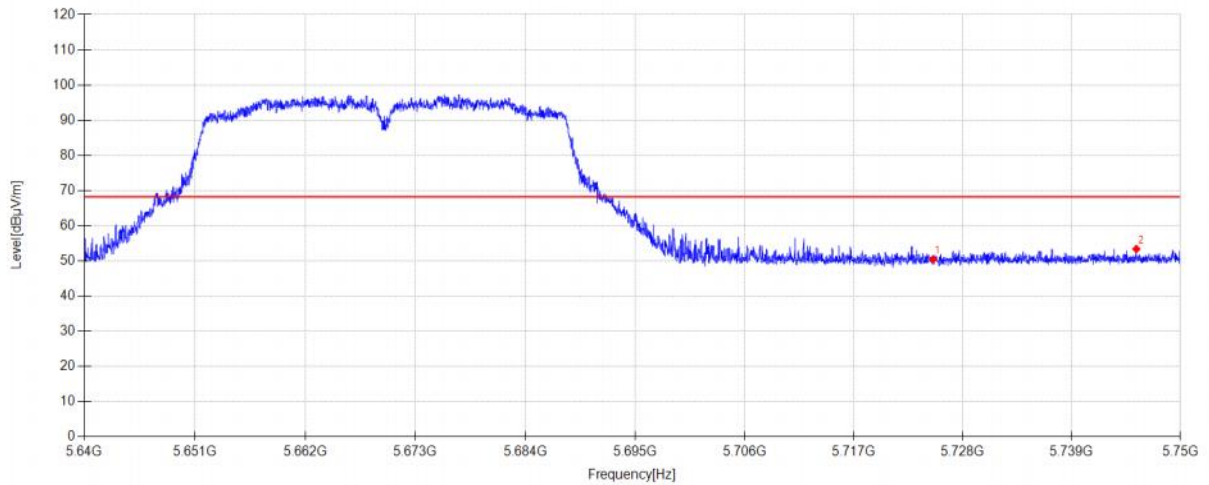


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.32	33.45	5.32	-29.65	50.44	68.20	17.76	PK	Horizontal
2	5745.545	43.97	33.74	5.33	-29.65	53.39	68.20	14.81	PK	Horizontal

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 20V

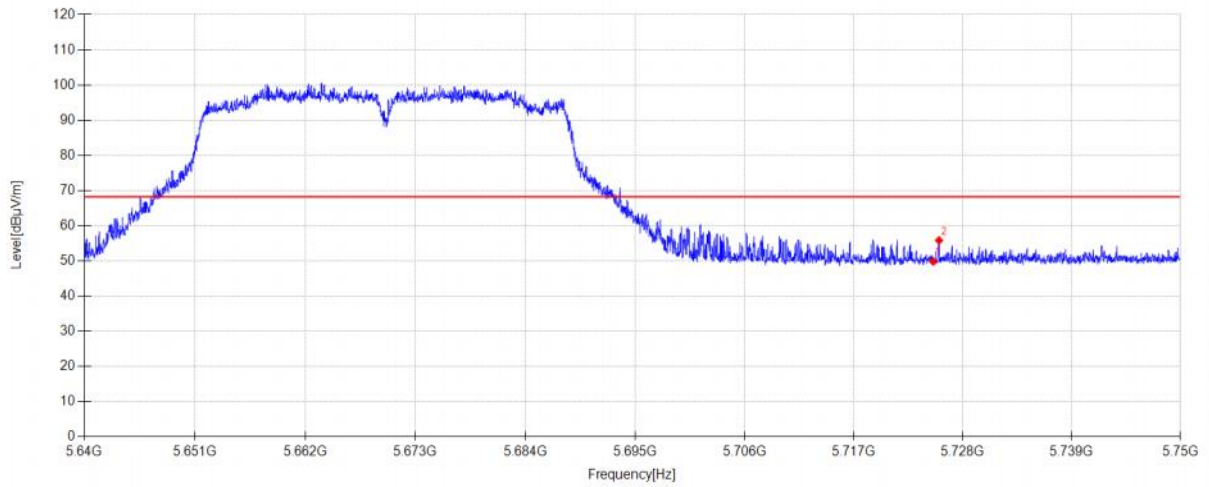

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.72	33.45	5.32	-29.65	49.84	68.20	18.36	PK	Vertical
2	5725.602	46.70	33.46	5.32	-29.65	55.83	68.20	12.37	PK	Vertical


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 20V

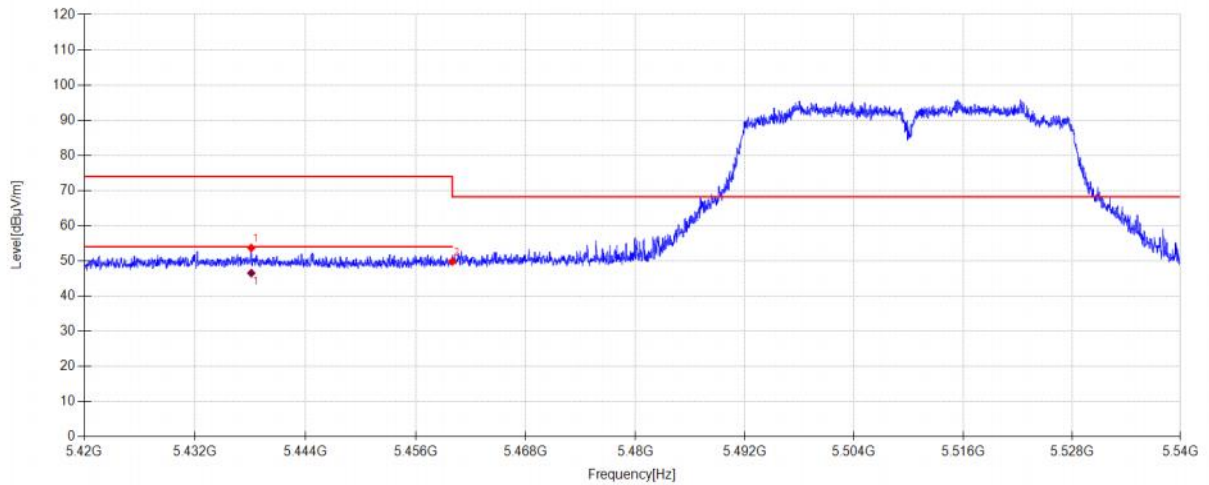

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.108	45.41	32.82	5.18	-29.71	53.70	74.00	20.30	PK	Horizontal
2	5460.000	41.46	32.90	5.19	-29.71	49.84	68.20	18.36	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.108	38.23	32.82	5.18	46.52	54.00	7.48	AV	Horizontal


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 20V

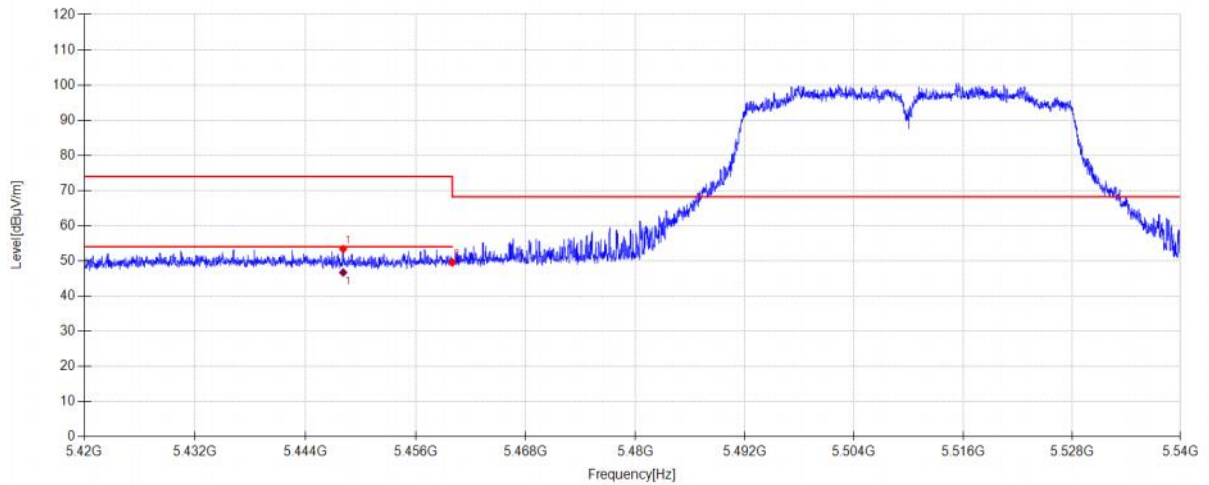

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.104	45.09	32.80	5.18	-29.71	53.36	74.00	20.64	PK	Vertical
2	5460.000	41.16	32.90	5.19	-29.71	49.54	68.20	18.66	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5448.104	38.43	32.80	5.18	46.70	54.00	7.30	AV	Vertical	


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 20V

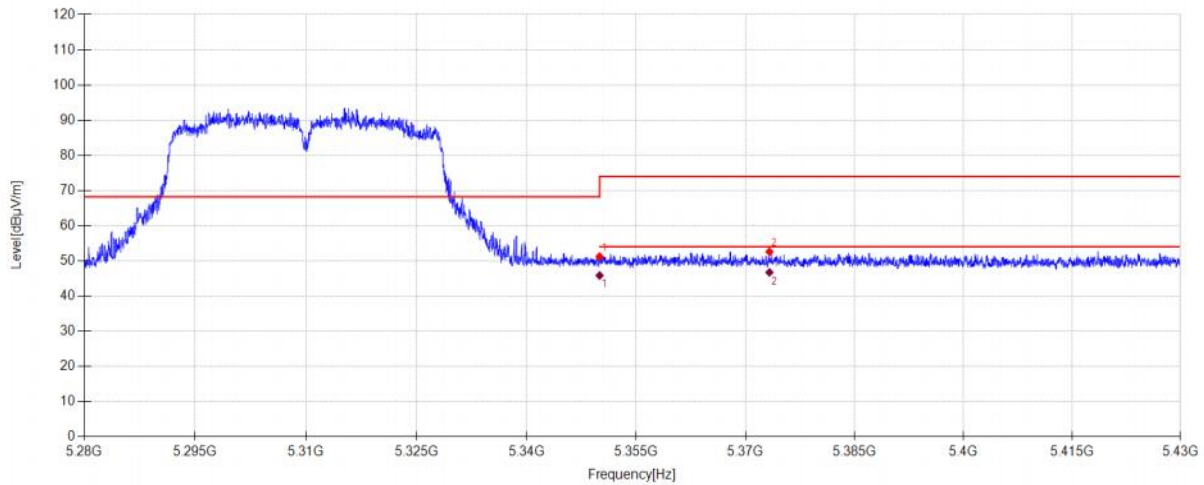

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.33	32.50	5.14	-29.73	51.24	68.20	16.96	PK	Horizontal
2	5373.270	44.49	32.69	5.15	-29.73	52.60	74.00	21.40	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.94	32.50	5.14	45.85	54.00	8.15	AV	Horizontal
2	5373.270	38.63	32.69	5.15	46.74	54.00	7.26	AV	Horizontal


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 20V

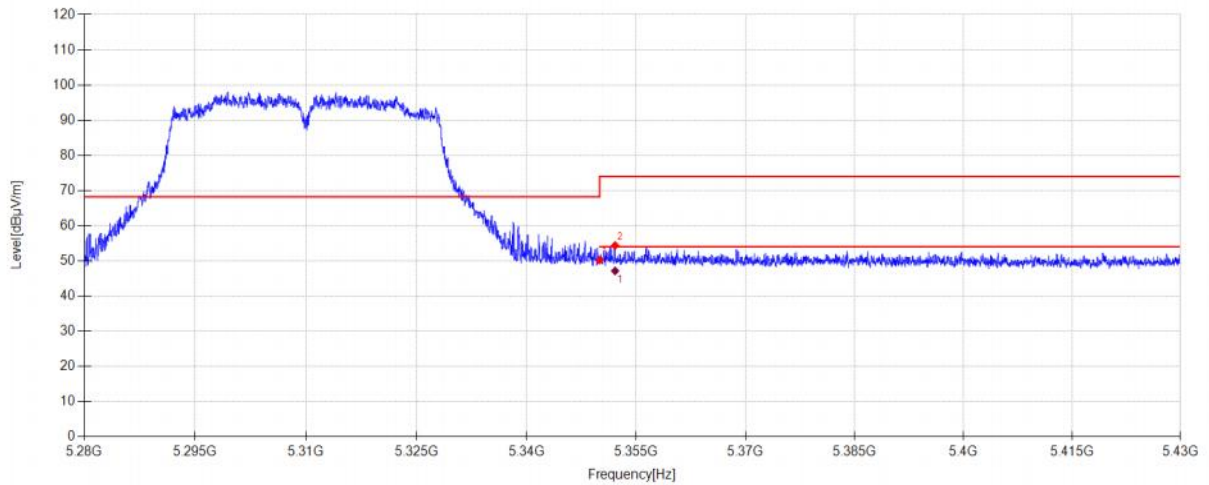

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.31	32.50	5.14	-29.73	50.22	68.20	17.98	PK	Vertical
2	5352.120	46.45	32.52	5.14	-29.73	54.38	74.00	19.62	PK	Vertical

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5352.120	39.22	32.52	5.14	47.15	54.00	6.85	AV	Vertical


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 20V

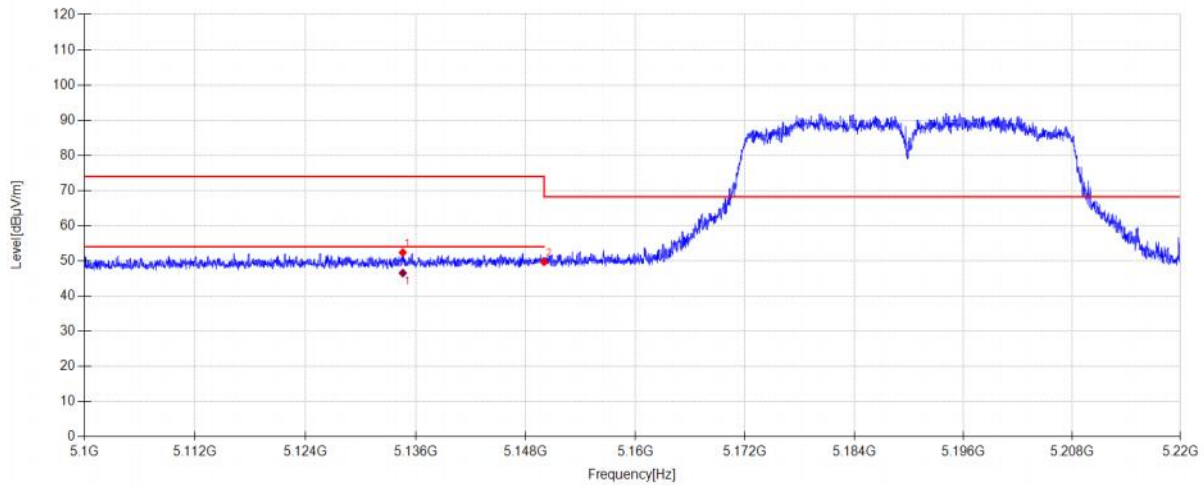

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.584	44.35	32.78	5.03	-29.77	52.39	74.00	21.61	PK	Horizontal
2	5150.000	41.59	32.90	5.04	-29.77	49.76	68.20	18.44	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5134.584	38.50	32.78	5.03	46.54	54.00	7.46	AV	Horizontal


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 20V

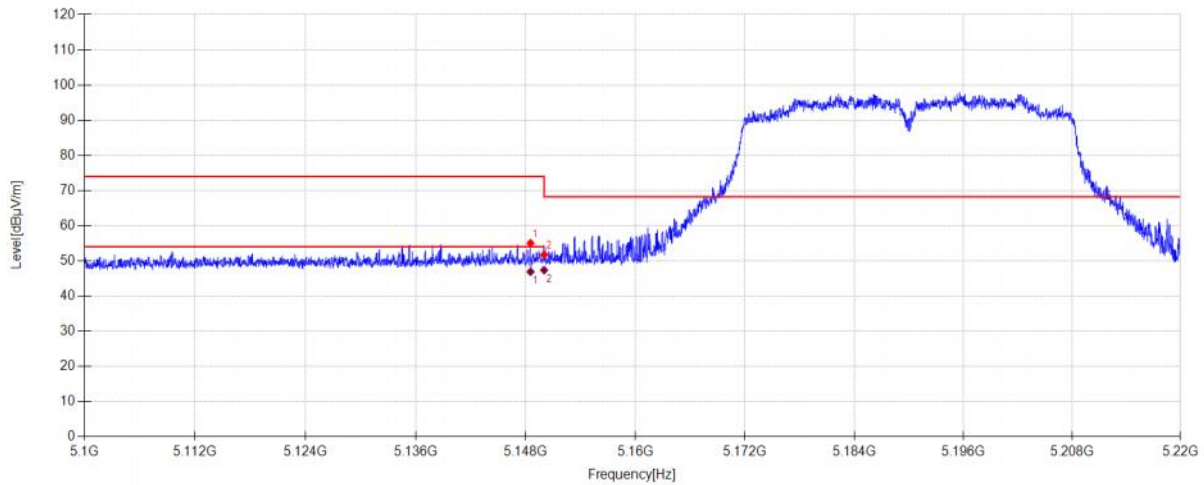

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.516	46.89	32.89	5.03	-29.77	55.04	74.00	18.96	PK	Vertical
2	5150.000	43.57	32.90	5.04	-29.77	51.74	68.20	16.46	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.516	38.76	32.89	5.03	46.91	54.00	7.09	AV	Vertical
2	5150.000	39.21	32.90	5.04	47.38	54.00	6.62	AV	Vertical


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 20V

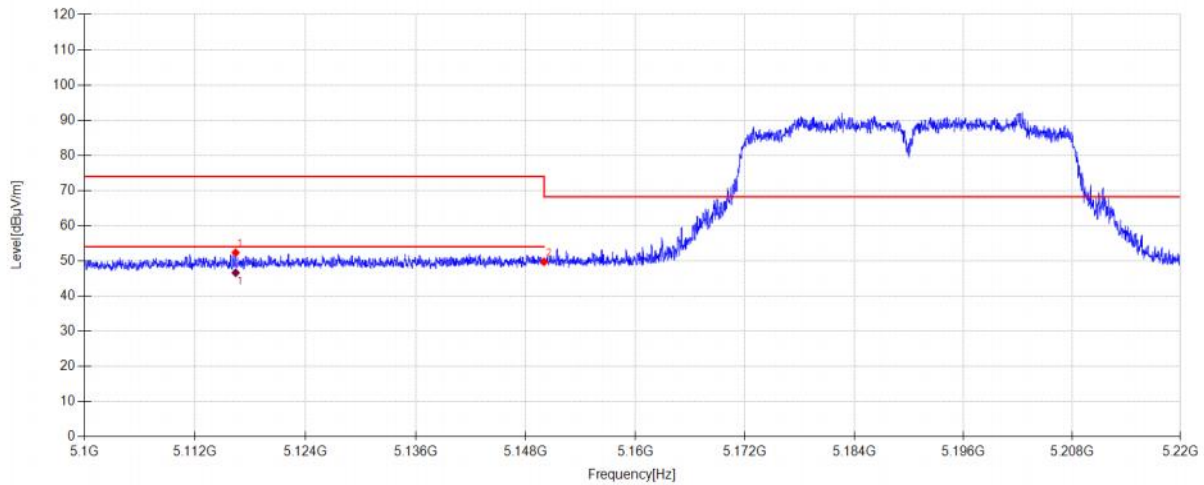

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5116.404	44.47	32.63	5.02	-29.78	52.34	74.00	21.66	PK	Horizontal
2	5150.000	41.59	32.90	5.04	-29.77	49.76	68.20	18.44	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5116.404	38.75	32.63	5.02	46.62	54.00	7.38	AV	Horizontal	


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 20V

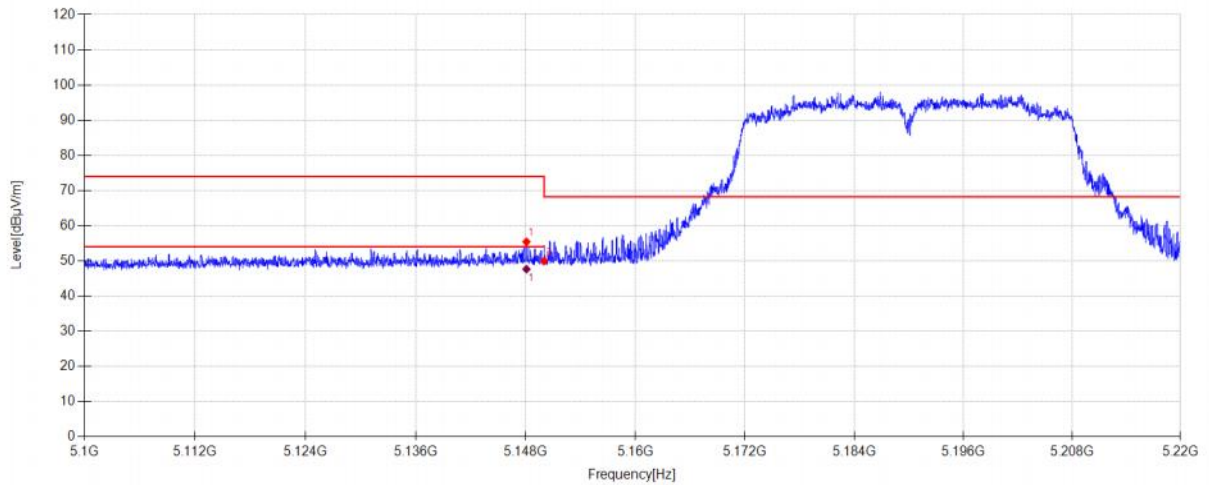

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.072	47.30	32.88	5.03	-29.77	55.44	74.00	18.56	PK	Vertical
2	5150.000	41.79	32.90	5.04	-29.77	49.96	68.20	18.24	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.072	39.50	32.88	5.03	47.64	54.00	6.36	AV	Vertical	


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 20V

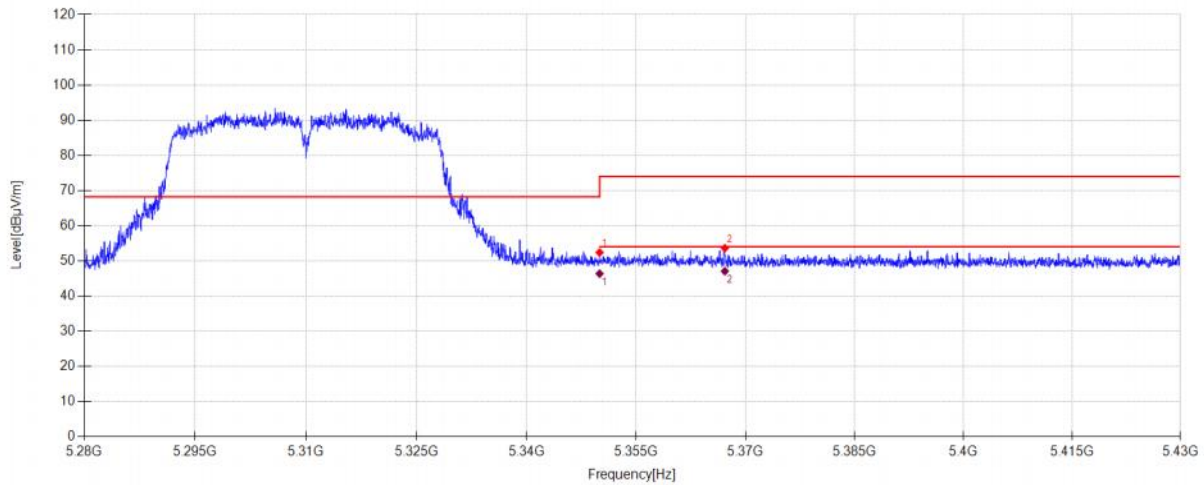

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.49	32.50	5.14	-29.73	52.40	68.20	15.80	PK	Horizontal
2	5367.150	45.58	32.64	5.14	-29.73	53.63	74.00	20.37	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.46	32.50	5.14	46.37	54.00	7.63	AV	Horizontal
2	5367.150	39.02	32.64	5.14	47.07	54.00	6.93	AV	Horizontal


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 20V

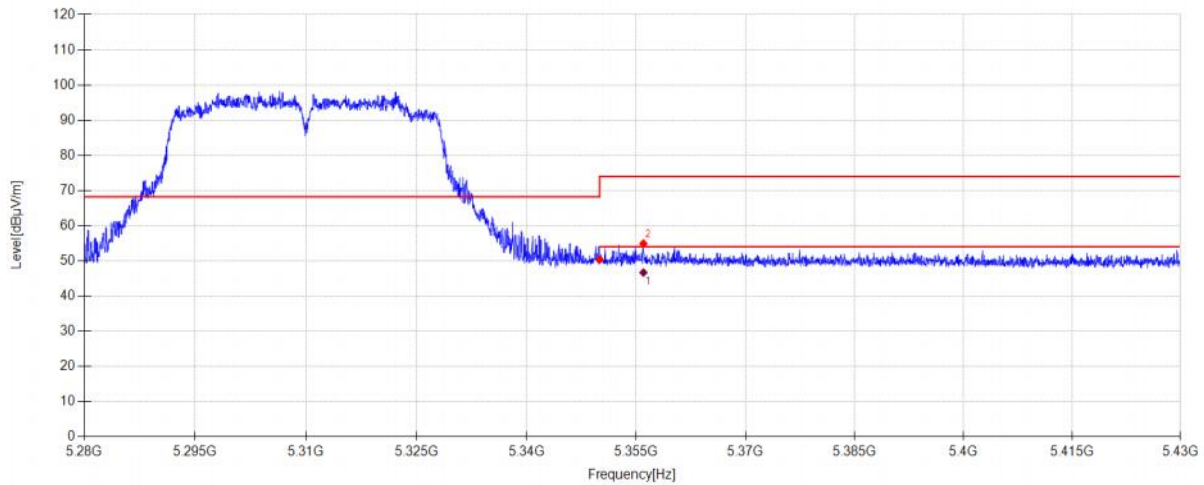

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.44	32.50	5.14	-29.73	50.35	68.20	17.85	PK	Vertical
2	5355.990	46.96	32.55	5.14	-29.73	54.92	74.00	19.08	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5355.990	38.72	32.55	5.14	46.68	54.00	7.32	AV	Vertical	


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 20V

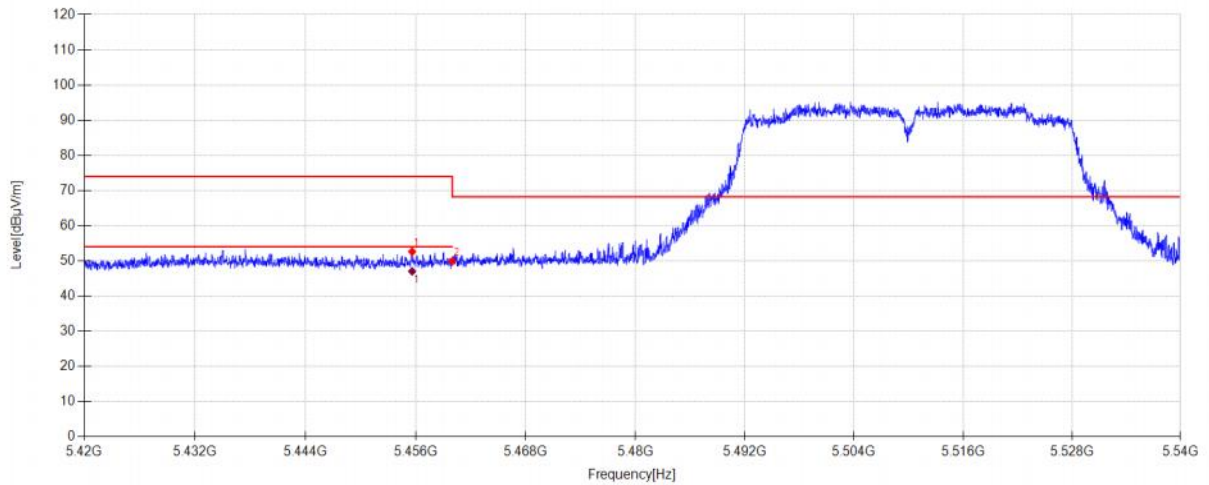

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.616	44.29	32.86	5.19	-29.71	52.63	74.00	21.37	PK	Horizontal
2	5460.000	41.56	32.90	5.19	-29.71	49.94	68.20	18.26	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.616	38.69	32.86	5.19	47.03	54.00	6.97	AV	Horizontal


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 20V

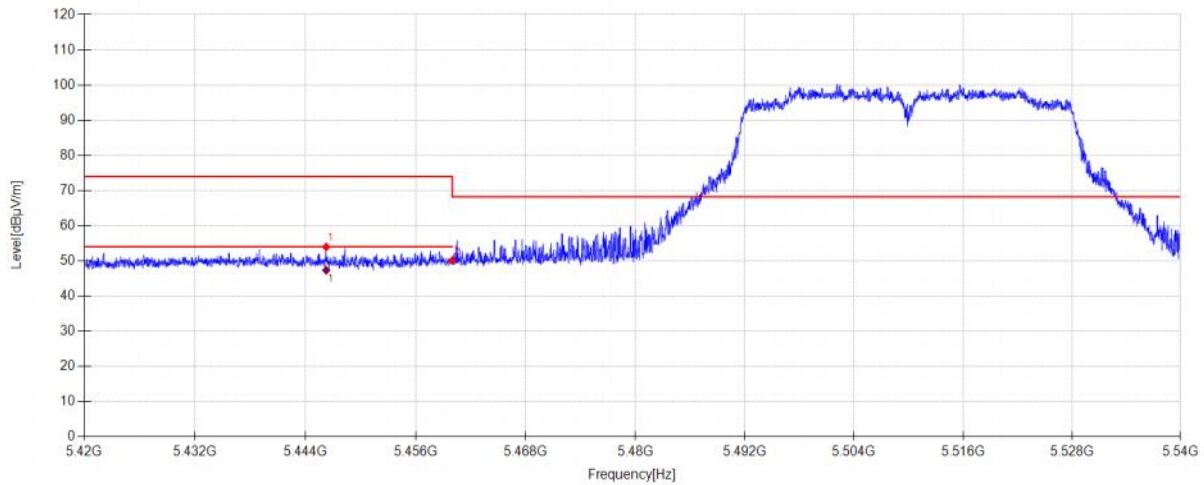

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.256	45.68	32.81	5.18	-29.71	53.96	74.00	20.04	PK	Vertical
2	5460.000	41.74	32.90	5.19	-29.71	50.12	68.20	18.08	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5446.256	39.06	32.81	5.18	47.34	54.00	6.66	AV	Vertical

Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 20V

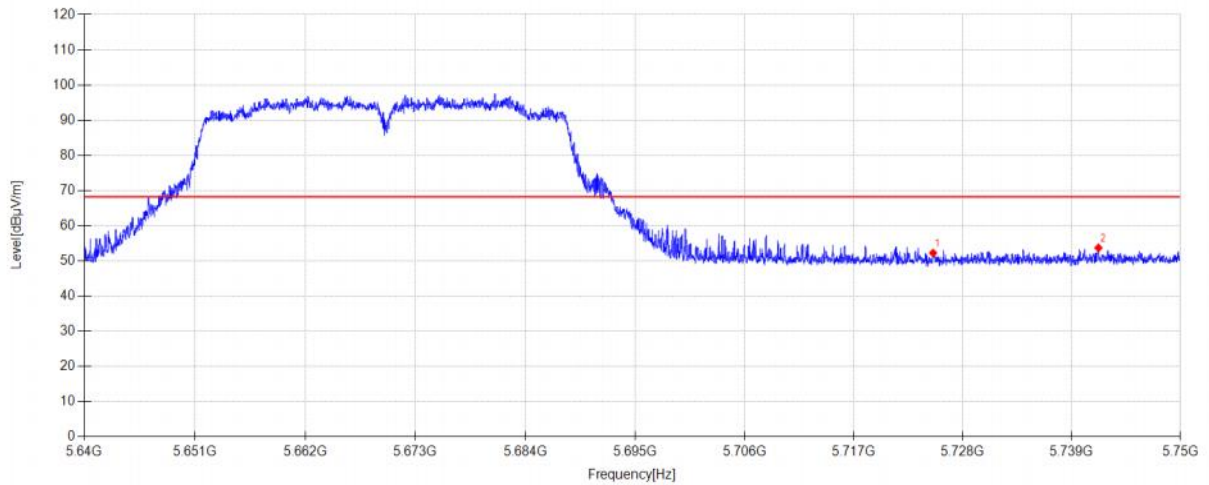


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.13	33.45	5.32	-29.65	52.25	68.20	15.95	PK	Horizontal
2	5741.706	44.34	33.68	5.33	-29.65	53.70	68.20	14.50	PK	Horizontal

Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 20V

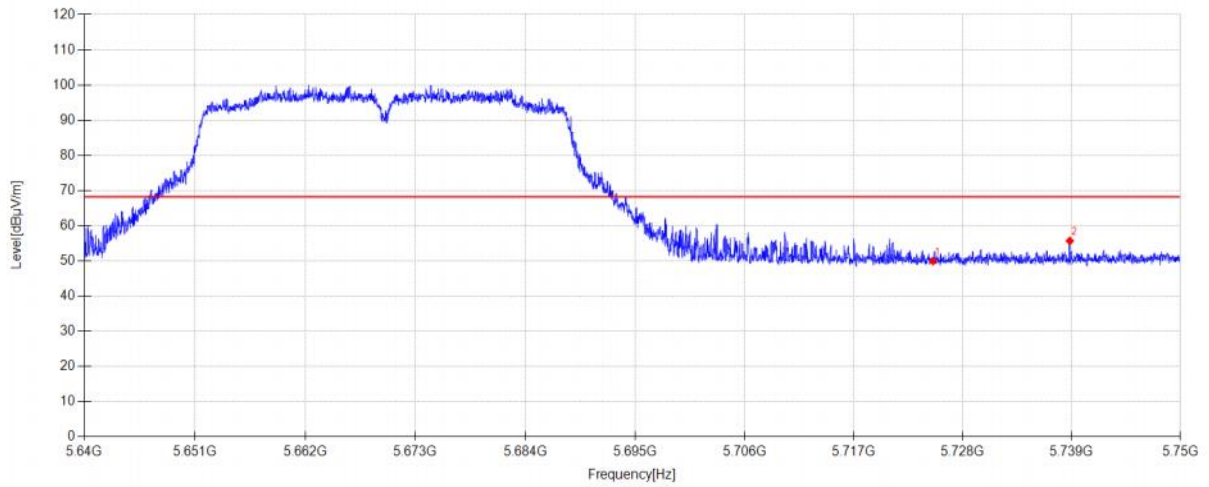


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.81	33.45	5.32	-29.65	49.93	68.20	18.27	PK	Vertical
2	5738.813	46.38	33.64	5.33	-29.65	55.70	68.20	12.50	PK	Vertical

Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 20V

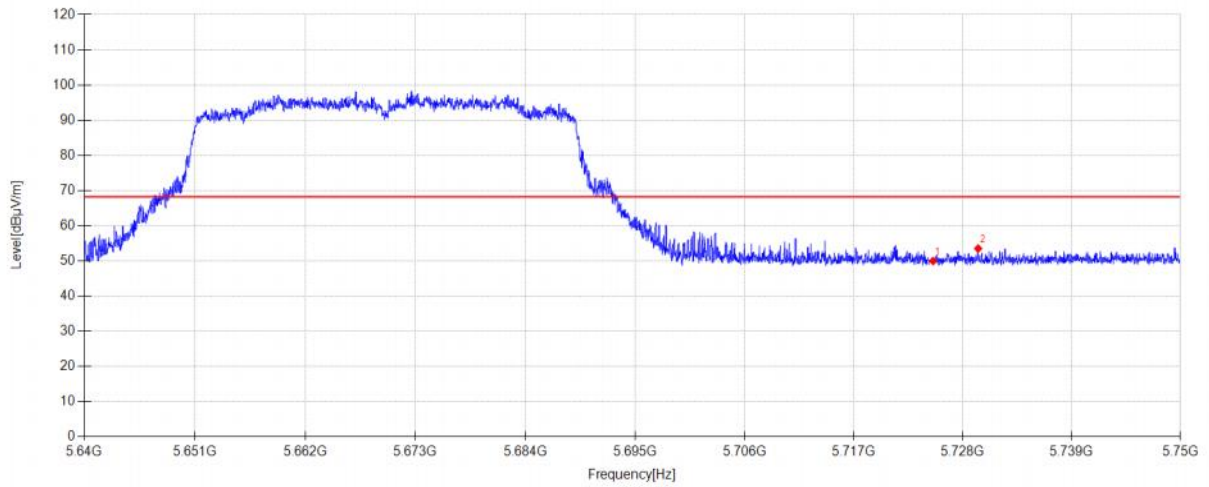


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.83	33.45	5.32	-29.65	49.95	68.20	18.25	PK	Horizontal
2	5729.551	44.34	33.51	5.32	-29.65	53.52	68.20	14.68	PK	Horizontal

Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 20V

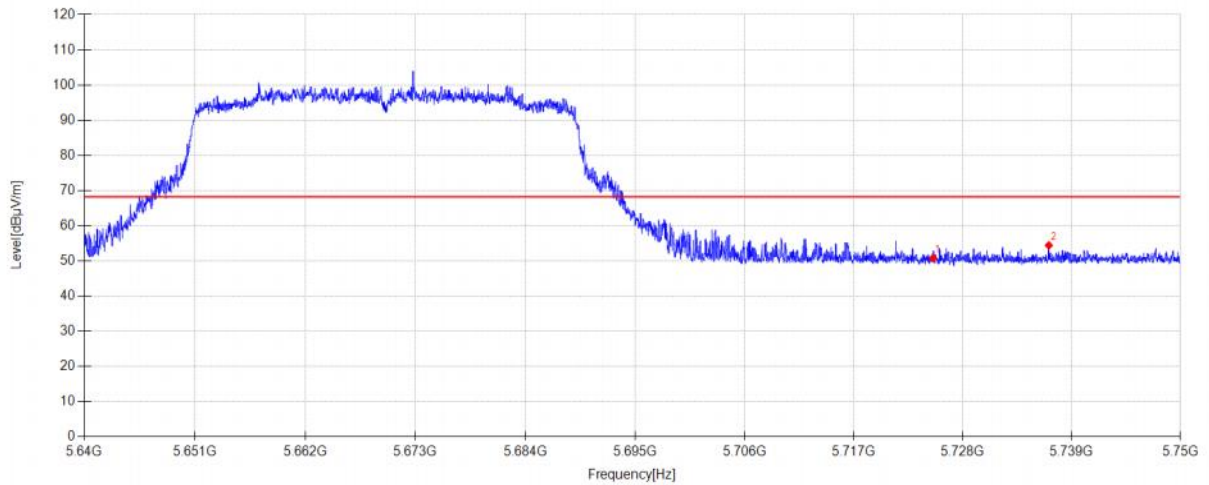

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.63	33.45	5.32	-29.65	50.75	68.20	17.45	PK	Vertical
2	5736.690	45.11	33.61	5.33	-29.65	54.40	68.20	13.80	PK	Vertical


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 20V

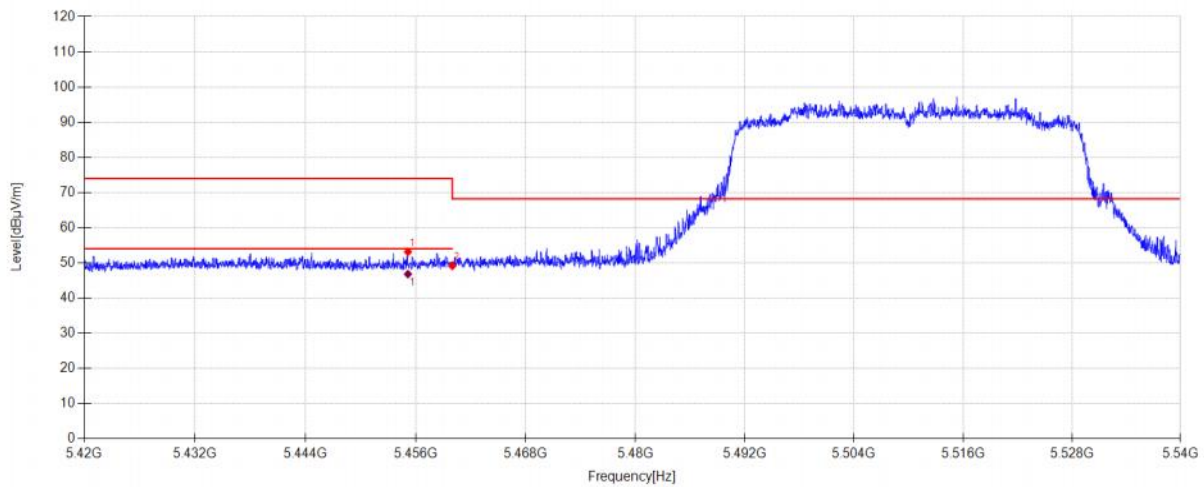

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.160	44.80	32.85	5.19	-29.71	53.13	74.00	20.87	PK	Horizontal
2	5460.000	40.77	32.90	5.19	-29.71	49.15	68.20	19.05	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.160	38.49	32.85	5.19	46.82	54.00	7.18	AV	Horizontal


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 20V

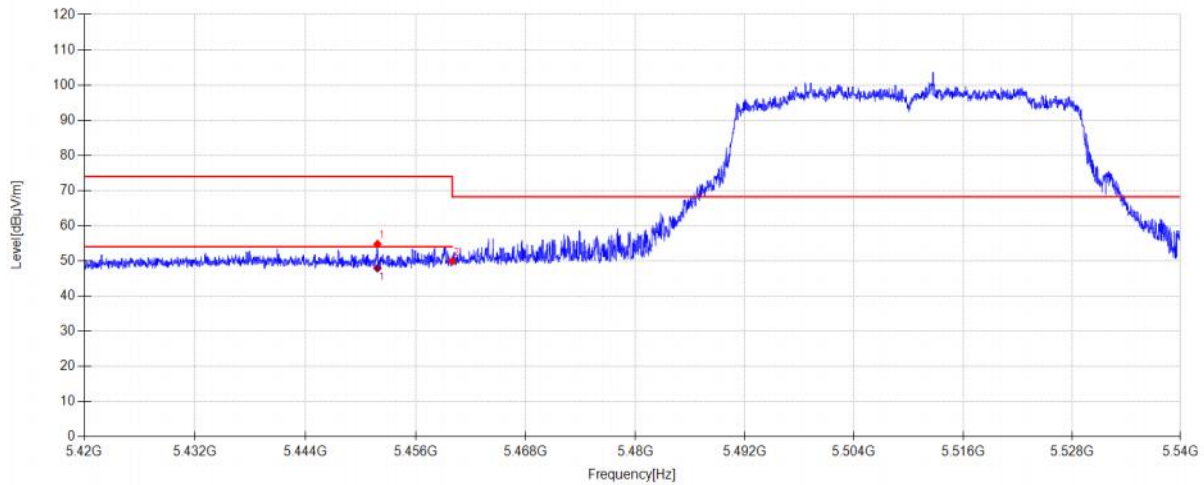

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.836	46.49	32.82	5.19	-29.71	54.79	74.00	19.21	PK	Vertical
2	5460.000	41.55	32.90	5.19	-29.71	49.93	68.20	18.27	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.836	39.61	32.82	5.19	47.91	54.00	6.09	AV	Vertical


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 20V

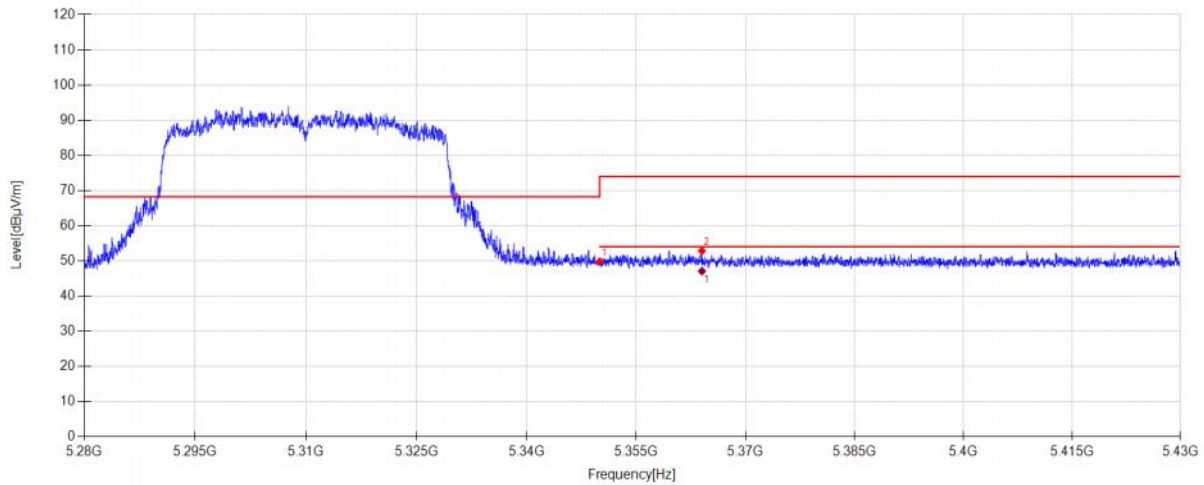

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.87	32.50	5.14	-29.73	49.78	68.20	18.42	PK	Horizontal
2	5364.000	44.84	32.61	5.14	-29.73	52.86	74.00	21.14	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5364.000	39.06	32.61	5.14	47.08	54.00	6.92	AV	Horizontal


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 20V

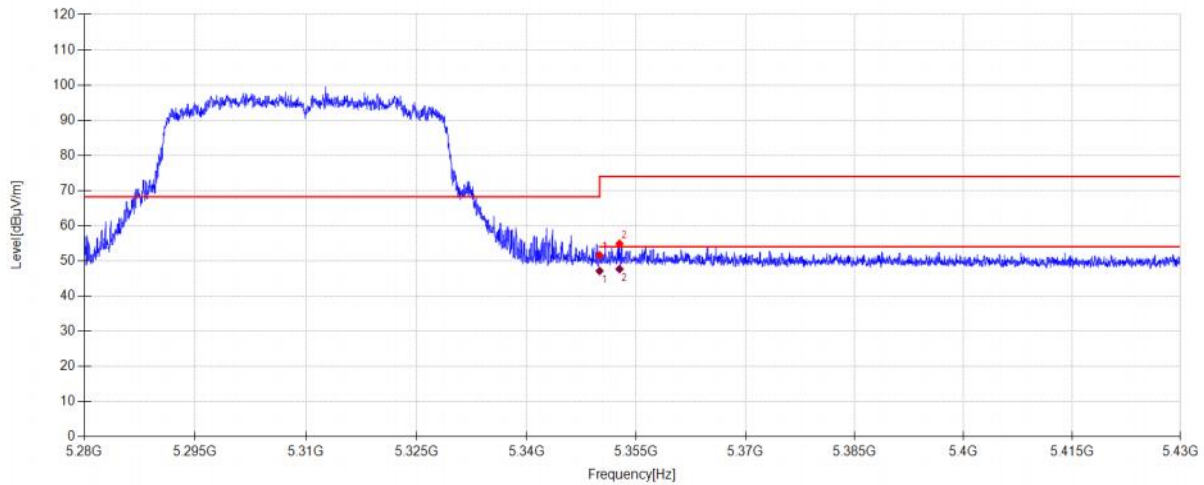

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.70	32.50	5.14	-29.73	51.61	68.20	16.59	PK	Vertical
2	5352.720	46.95	32.52	5.14	-29.73	54.88	74.00	19.12	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.23	32.50	5.14	47.14	54.00	6.86	AV	Vertical	
2	5352.720	39.75	32.52	5.14	47.68	54.00	6.32	AV	Vertical	


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 20V

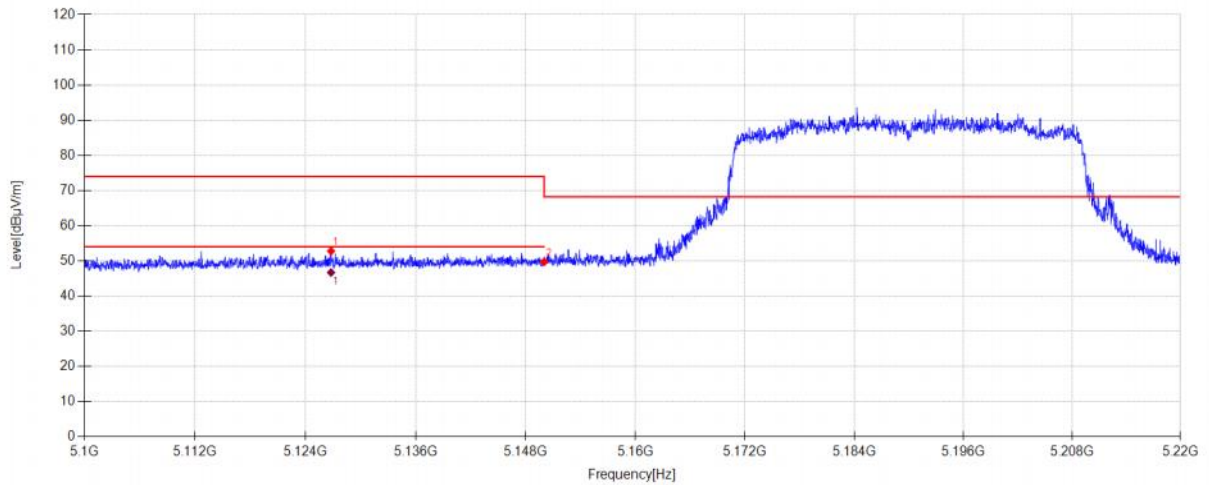

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5126.772	44.83	32.71	5.02	-29.77	52.79	74.00	21.21	PK	Horizontal
2	5150.000	41.56	32.90	5.04	-29.77	49.73	68.20	18.47	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5126.772	38.74	32.71	5.02	46.70	54.00	7.30	AV	Horizontal	


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 20V

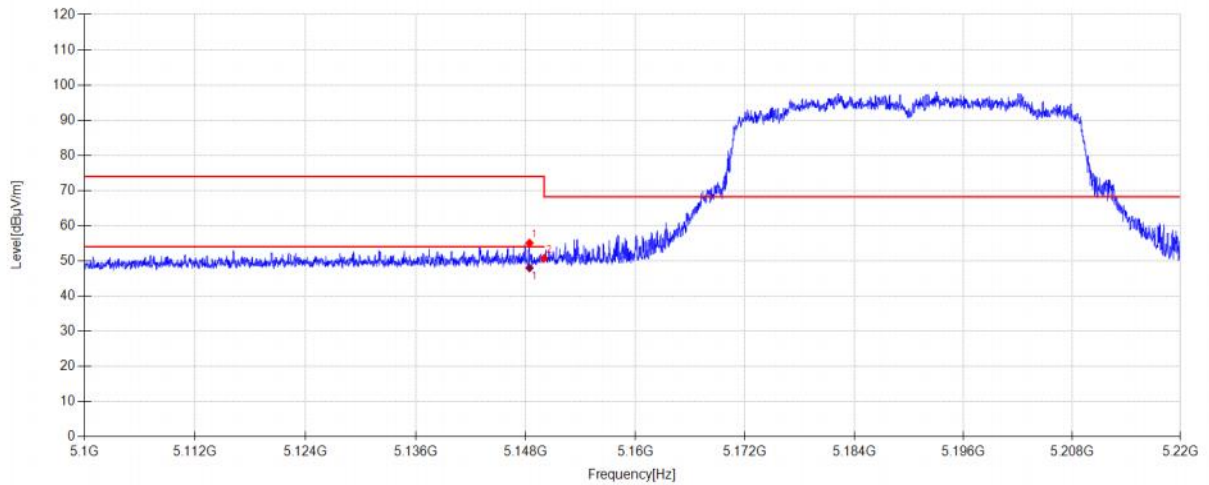

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.408	46.92	32.89	5.03	-29.77	55.07	74.00	18.93	PK	Vertical
2	5150.000	42.57	32.90	5.04	-29.77	50.74	68.20	17.46	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.408	39.85	32.89	5.03	48.00	54.00	6.00	AV	Vertical


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 20V

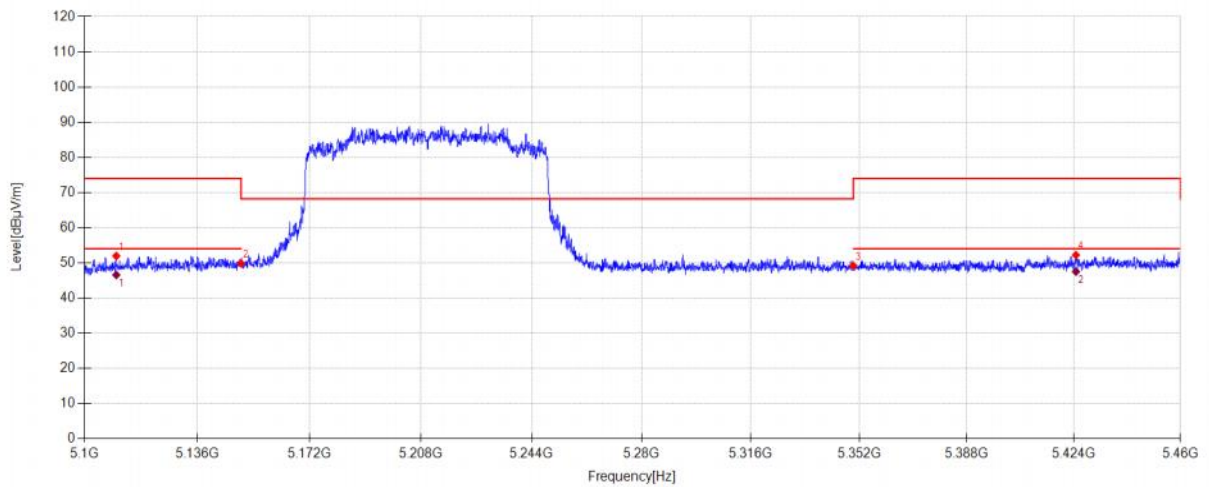

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5110.152	44.14	32.58	5.02	-29.78	51.96	74.00	22.04	PK	Horizontal
2	5150.000	41.67	32.90	5.04	-29.77	49.84	68.20	18.36	PK	Horizontal
3	5350.000	41.26	32.50	5.14	-29.73	49.17	68.20	19.03	PK	Horizontal
4	5424.648	43.93	32.85	5.17	-29.72	52.23	74.00	21.77	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5110.152	38.76	32.58	5.02	46.58	54.00	7.42	AV	Horizontal	
2	5424.648	39.23	32.85	5.17	47.53	54.00	6.47	AV	Horizontal	


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 20V

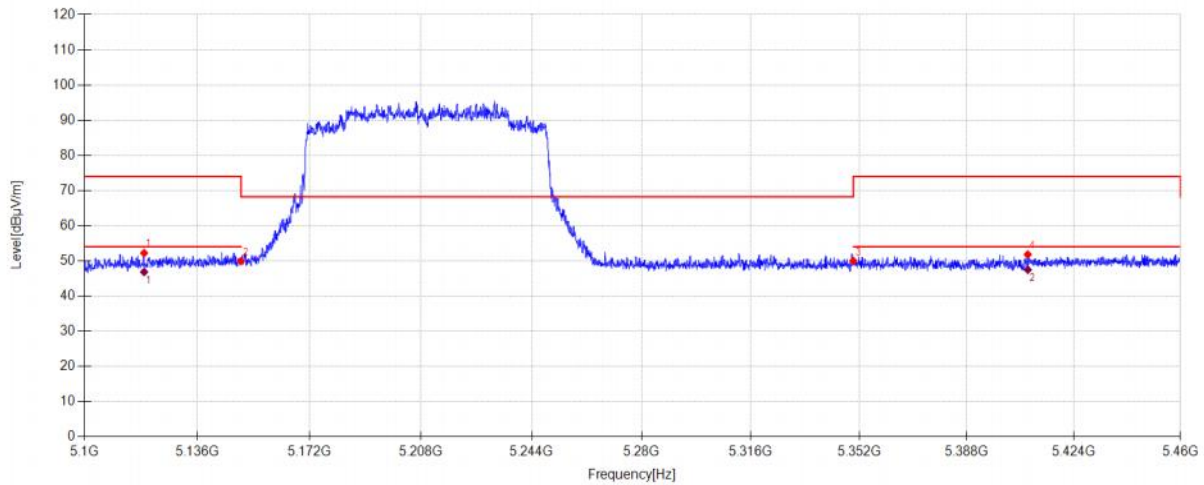

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5119.008	44.34	32.65	5.02	-29.78	52.23	74.00	21.77	PK	Vertical
2	5150.000	41.77	32.90	5.04	-29.77	49.94	68.20	18.26	PK	Vertical
3	5350.000	42.08	32.50	5.14	-29.73	49.99	68.20	18.21	PK	Vertical
4	5408.412	43.48	32.88	5.16	-29.72	51.80	74.00	22.20	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5119.008	38.96	32.65	5.02	46.85	54.00	7.15	AV	Vertical	
2	5408.412	39.17	32.88	5.16	47.49	54.00	6.51	AV	Vertical	


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 20V

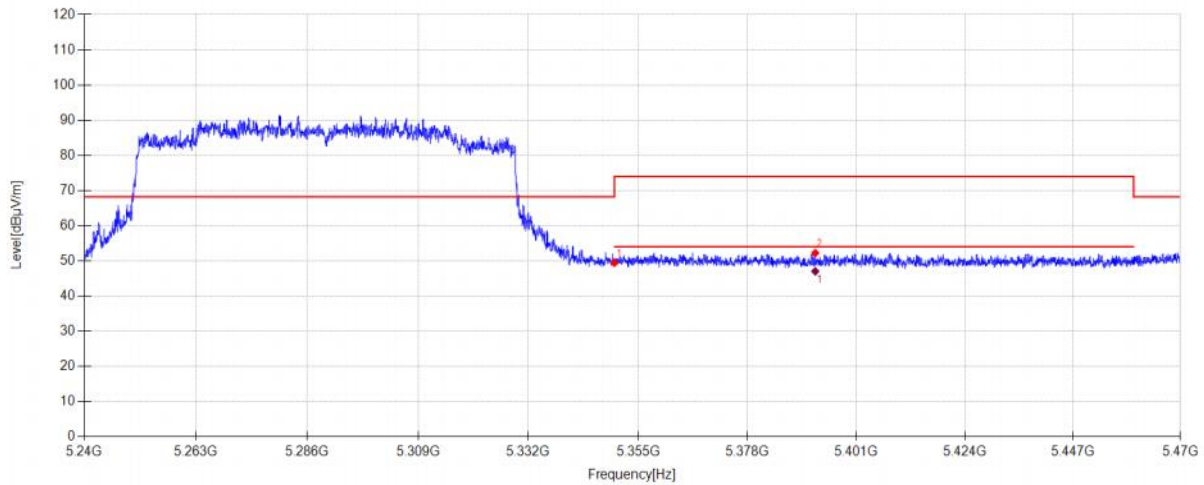

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.56	32.50	5.14	-29.73	49.47	68.20	18.73	PK	Horizontal
2	5392.283	43.95	32.84	5.16	-29.72	52.23	74.00	21.77	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5392.283	38.76	32.84	5.16	47.04	54.00	6.96	AV	Horizontal


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 20V

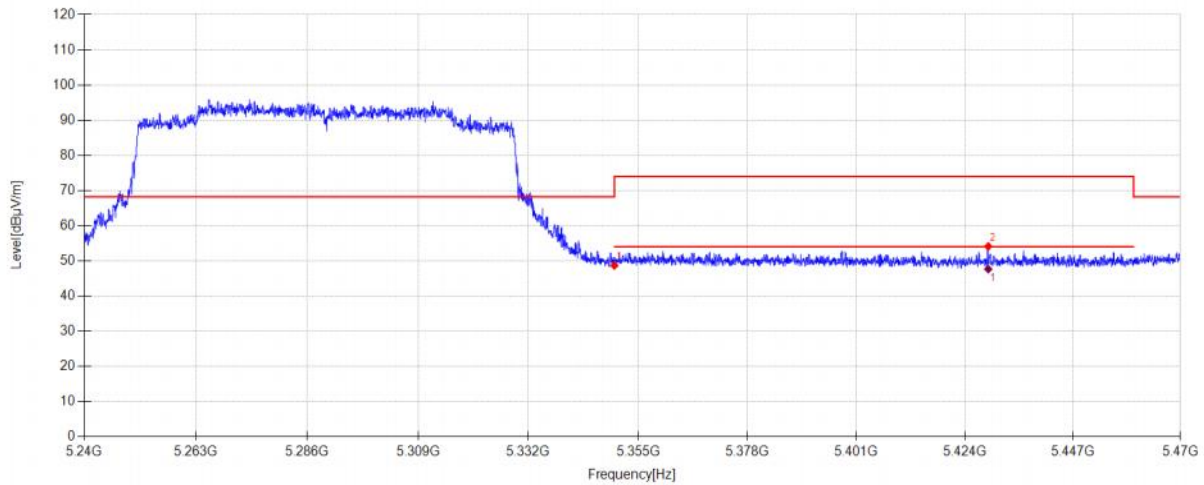

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.77	32.50	5.14	-29.73	48.68	68.20	19.52	PK	Vertical
2	5428.968	45.83	32.84	5.17	-29.71	54.13	74.00	19.87	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5428.968	39.37	32.84	5.17	47.67	54.00	6.33	AV	Vertical	

Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 20V

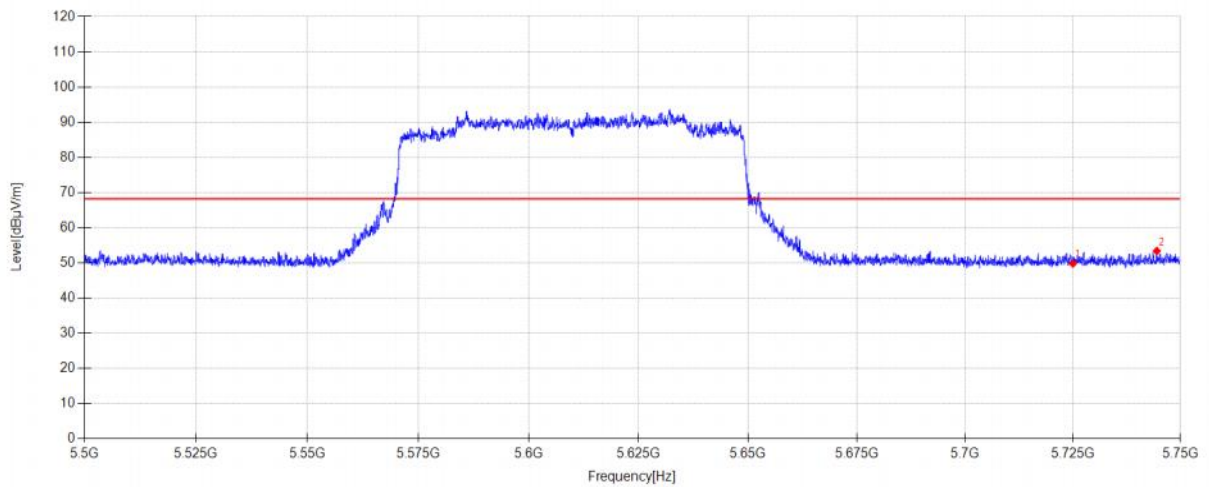


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.70	33.45	5.32	-29.66	49.81	68.20	18.39	PK	Horizontal
2	5744.525	43.99	33.72	5.33	-29.65	53.39	68.20	14.81	PK	Horizontal

Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 20V

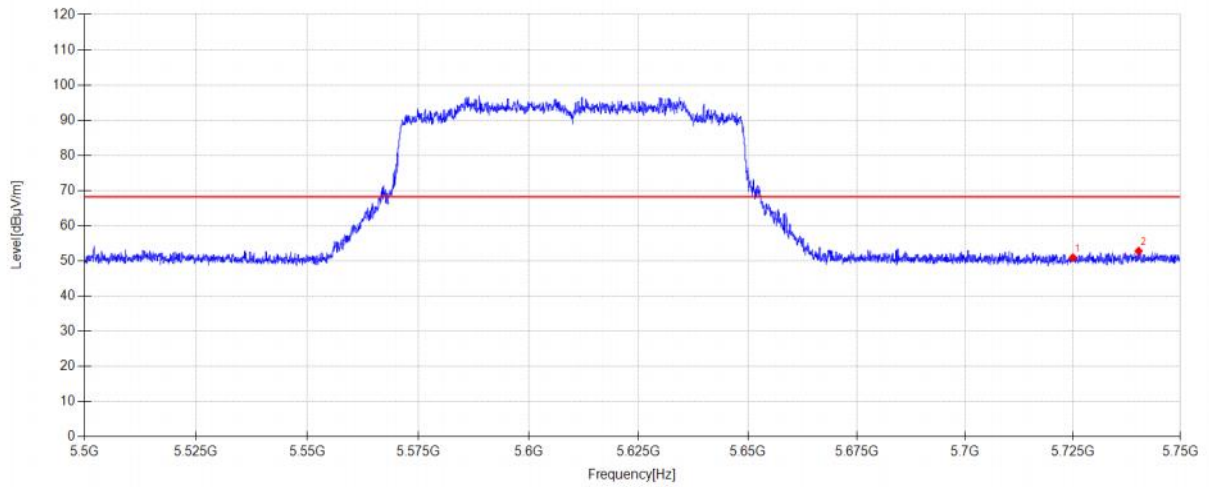

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.84	33.45	5.32	-29.66	50.95	68.20	17.25	PK	Vertical
2	5740.275	43.45	33.66	5.33	-29.65	52.79	68.20	15.41	PK	Vertical


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 20V

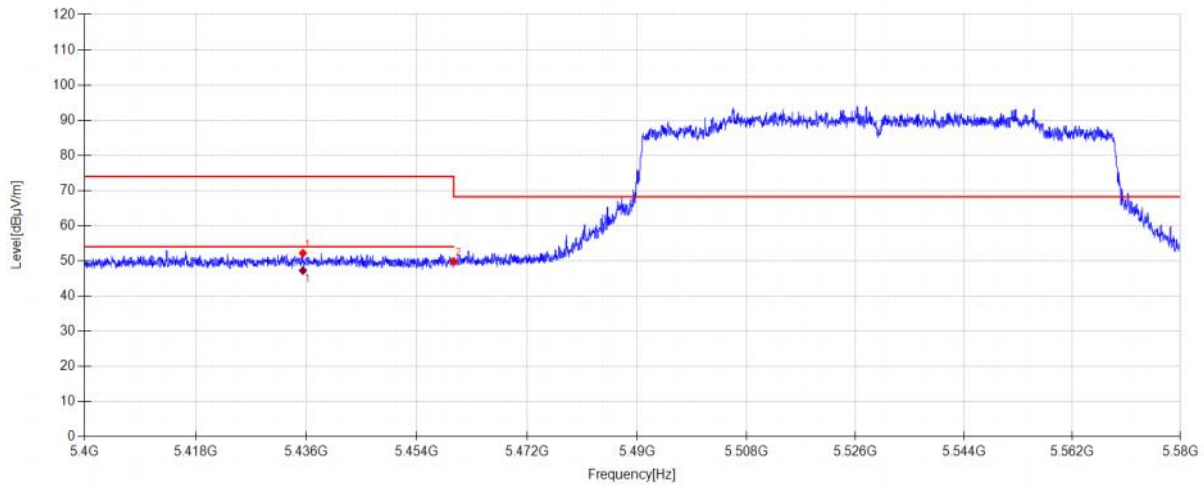

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5435.424	43.89	32.83	5.18	-29.71	52.19	74.00	21.81	PK	Horizontal
2	5460.000	41.48	32.90	5.19	-29.71	49.86	68.20	18.34	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5435.424	38.95	32.83	5.18	47.25	54.00	6.75	AV	Horizontal	


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 20V

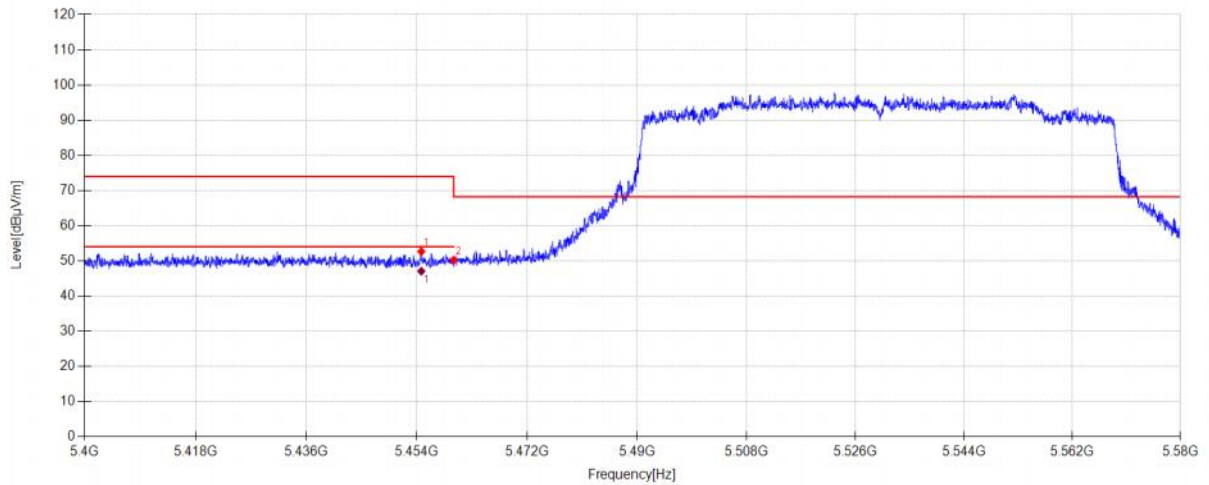

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.720	44.34	32.85	5.19	-29.71	52.67	74.00	21.33	PK	Vertical
2	5460.000	41.85	32.90	5.19	-29.71	50.23	68.20	17.97	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.720	38.74	32.85	5.19	47.07	54.00	6.93	AV	Vertical	

Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 20V

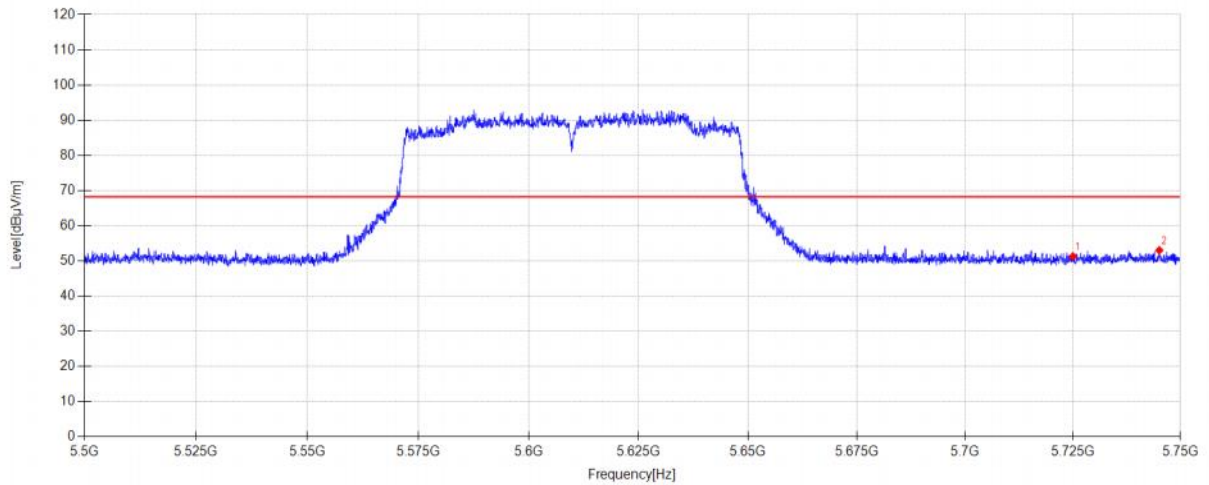


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.17	33.45	5.32	-29.66	51.28	68.20	16.92	PK	Horizontal
2	5745.100	43.60	33.73	5.33	-29.65	53.01	68.20	15.19	PK	Horizontal

Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 20V

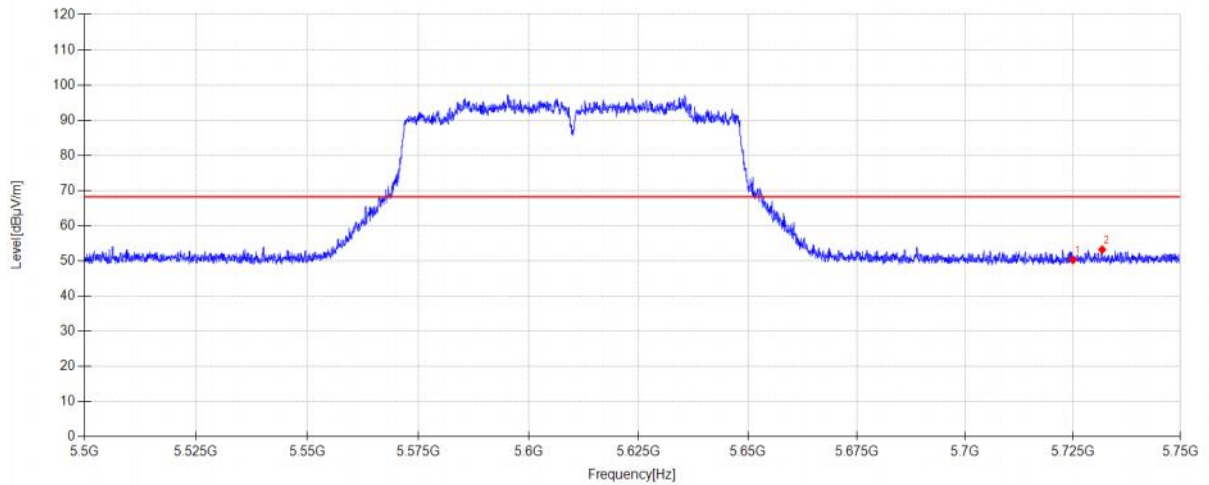

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.17	33.45	5.32	-29.66	50.28	68.20	17.92	PK	Vertical
2	5731.800	43.97	33.55	5.33	-29.65	53.20	68.20	15.00	PK	Vertical


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 20V

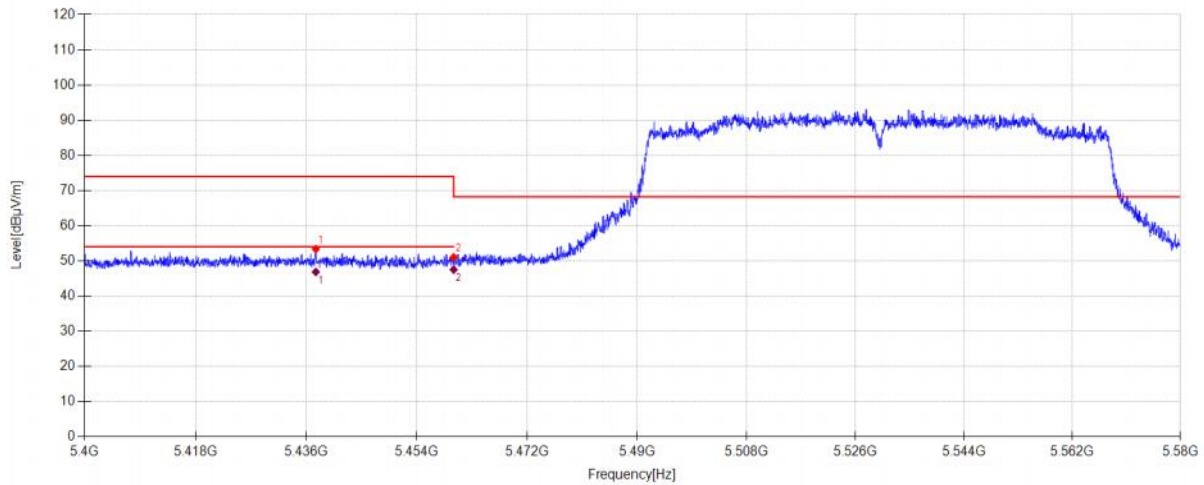

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5437.530	45.09	32.82	5.18	-29.71	53.38	74.00	20.62	PK	Horizontal
2	5460.000	42.64	32.90	5.19	-29.71	51.02	68.20	17.18	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5437.530	38.56	32.82	5.18	46.85	54.00	7.15	AV	Horizontal	
2	5460.000	39.13	32.90	5.19	47.51	54.00	6.49	AV	Horizontal	


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 20V

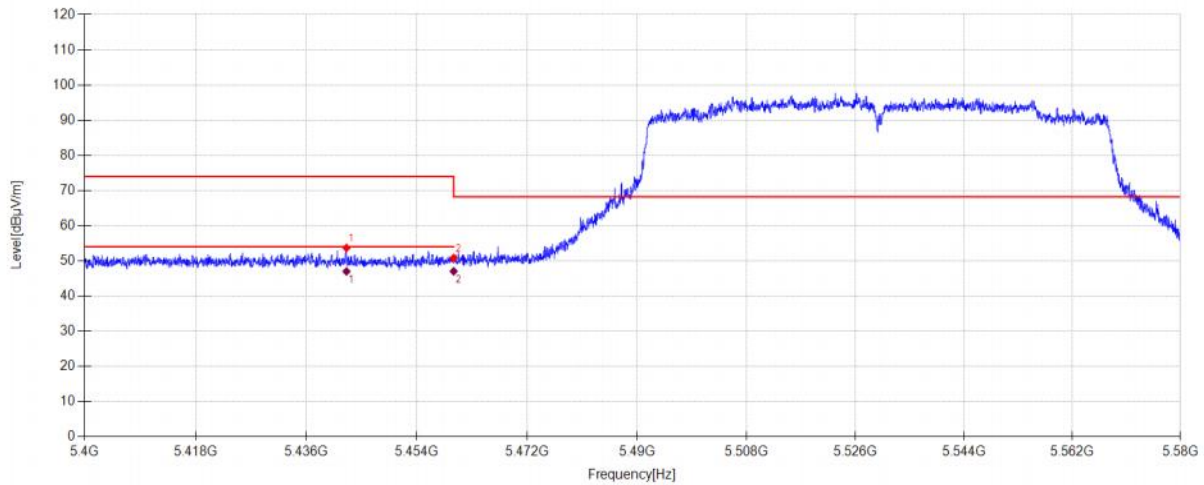

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5442.516	45.42	32.81	5.18	-29.71	53.70	74.00	20.30	PK	Vertical
2	5460.000	42.43	32.90	5.19	-29.71	50.81	68.20	17.39	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5442.516	38.73	32.81	5.18	47.01	54.00	6.99	AV	Vertical	
2	5460.000	38.66	32.90	5.19	47.04	54.00	6.96	AV	Vertical	


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 20V

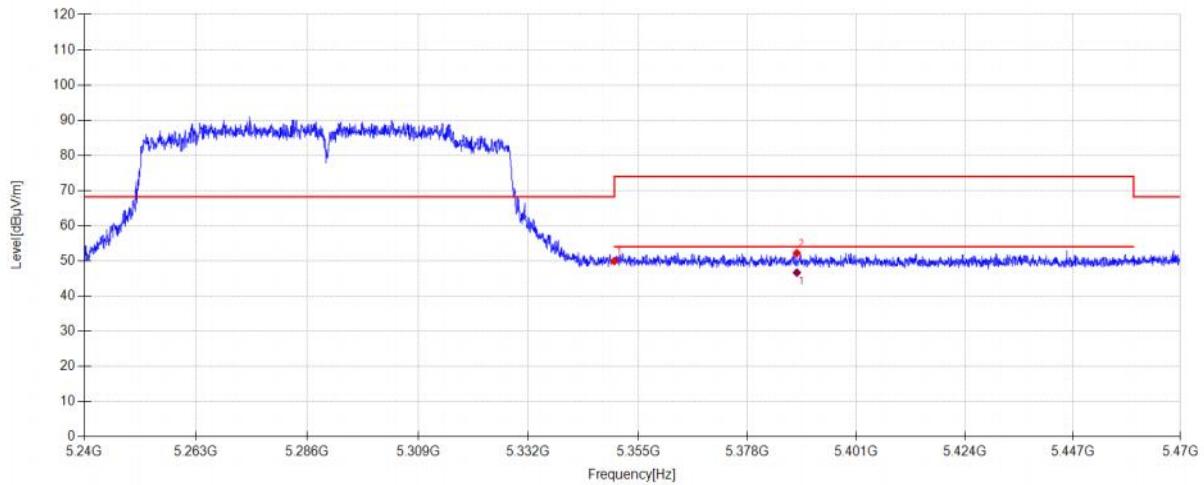

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.06	32.50	5.14	-29.73	49.97	68.20	18.23	PK	Horizontal
2	5388.396	43.99	32.81	5.15	-29.72	52.23	74.00	21.77	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5388.396	38.43	32.81	5.15	46.67	54.00	7.33	AV	Horizontal


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 20V

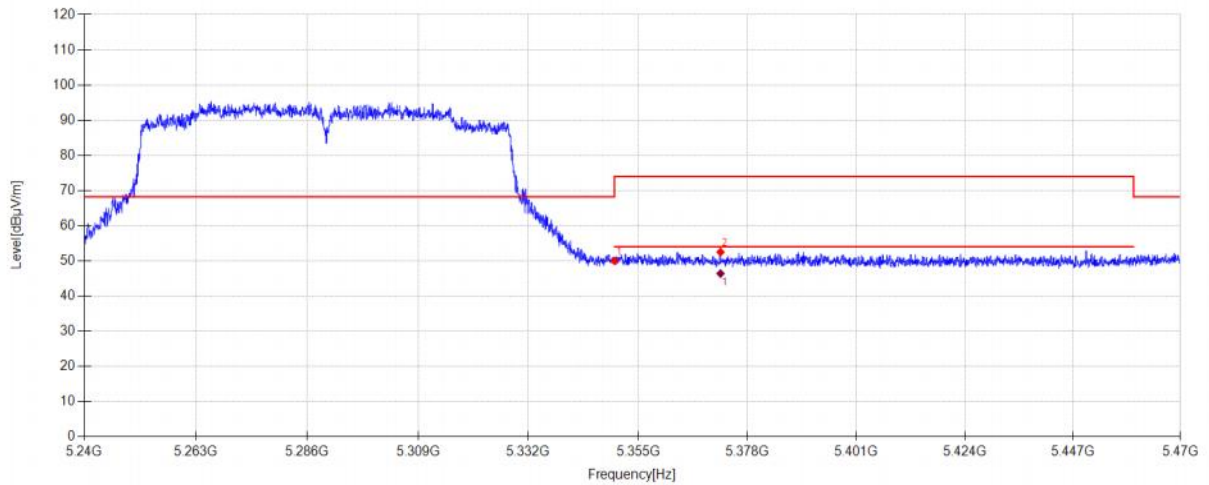

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.10	32.50	5.14	-29.73	50.01	68.20	18.19	PK	Vertical
2	5372.296	44.41	32.68	5.15	-29.73	52.51	74.00	21.49	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5372.296	38.29	32.68	5.15	46.39	54.00	7.61	AV	Vertical	


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 20V

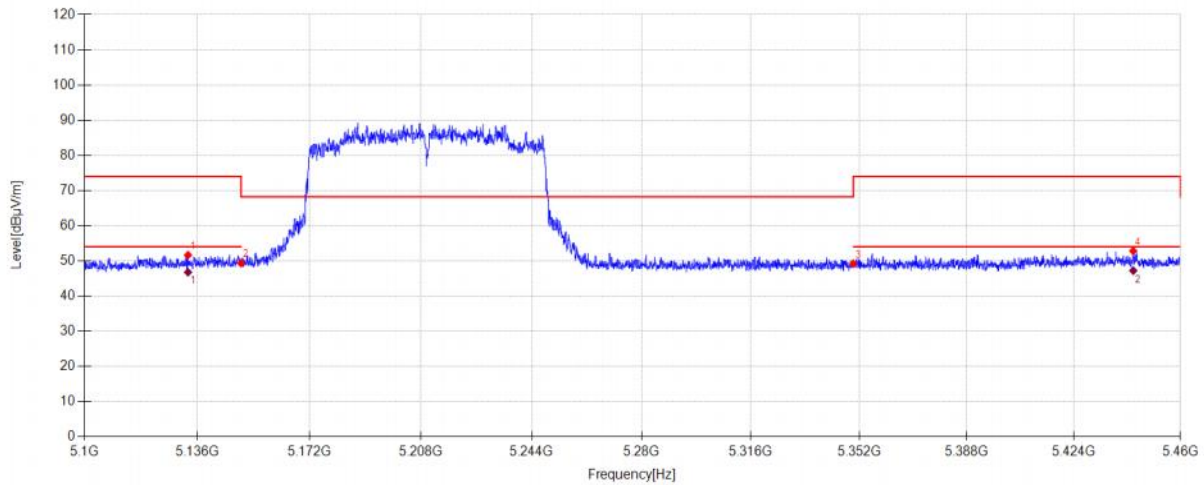

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5133.012	43.62	32.76	5.03	-29.77	51.64	74.00	22.36	PK	Horizontal
2	5150.000	41.17	32.90	5.04	-29.77	49.34	68.20	18.86	PK	Horizontal
3	5350.000	41.25	32.50	5.14	-29.73	49.16	68.20	19.04	PK	Horizontal
4	5444.016	44.53	32.81	5.18	-29.71	52.81	74.00	21.19	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5133.012	38.75	32.76	5.03	46.77	54.00	7.23	AV	Horizontal	
2	5444.016	38.94	32.81	5.18	47.22	54.00	6.78	AV	Horizontal	


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 20V

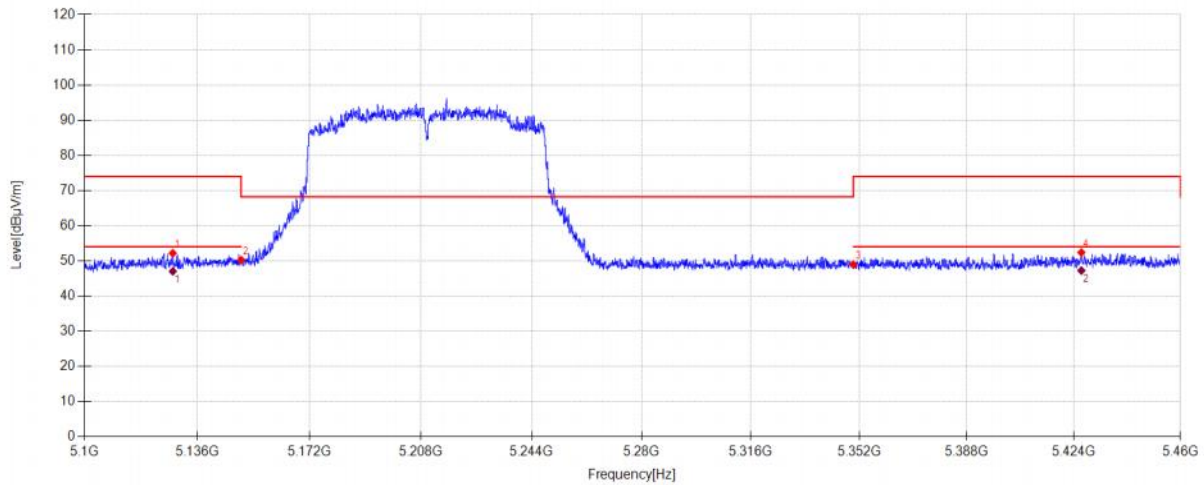

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5128.152	44.21	32.73	5.02	-29.77	52.19	74.00	21.81	PK	Vertical
2	5150.000	42.09	32.90	5.04	-29.77	50.26	68.20	17.94	PK	Vertical
3	5350.000	41.07	32.50	5.14	-29.73	48.98	68.20	19.22	PK	Vertical
4	5426.484	44.09	32.85	5.17	-29.71	52.40	74.00	21.60	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5128.152	39.05	32.73	5.02	47.03	54.00	6.97	AV	Vertical	
2	5426.484	38.94	32.85	5.17	47.25	54.00	6.75	AV	Vertical	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 20V

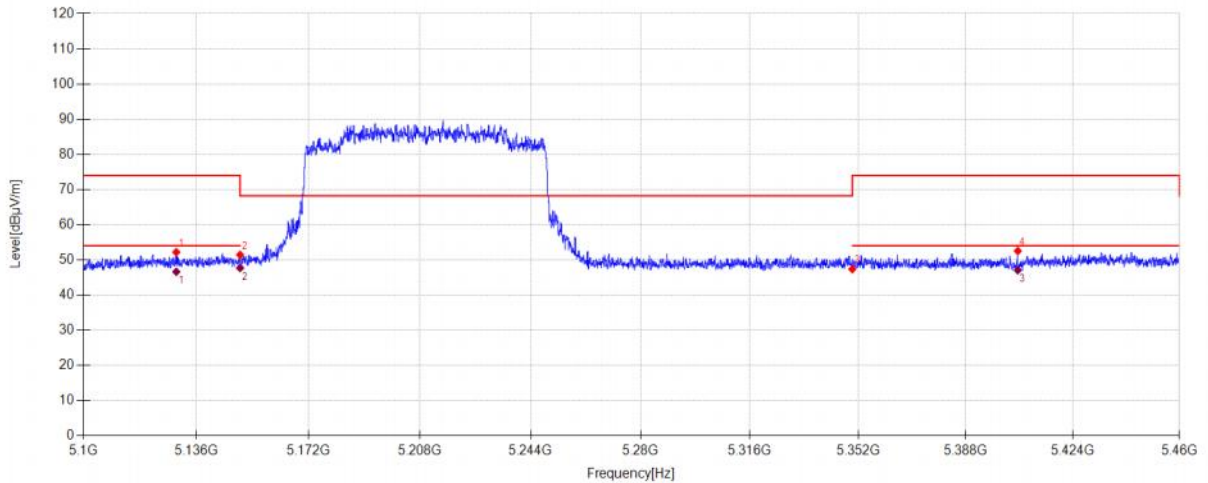

Suspected Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5129.592	44.21	32.74	5.02	-29.77	52.20	74.00	21.80	PK	Horizontal
2	5150.000	43.26	32.90	5.04	-29.77	51.43	68.20	16.77	PK	Horizontal
3	5350.000	39.46	32.50	5.14	-29.73	47.37	68.20	20.83	PK	Horizontal
4	5405.388	44.21	32.89	5.16	-29.72	52.54	74.00	21.46	PK	Horizontal

Final Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5129.592	38.64	32.74	5.02	46.63	54.00	7.37	AV	Horizontal	
2	5150.000	39.53	32.90	5.04	47.70	54.00	6.30	AV	Horizontal	
3	5405.388	38.73	32.89	5.16	47.06	54.00	6.94	AV	Horizontal	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 20V

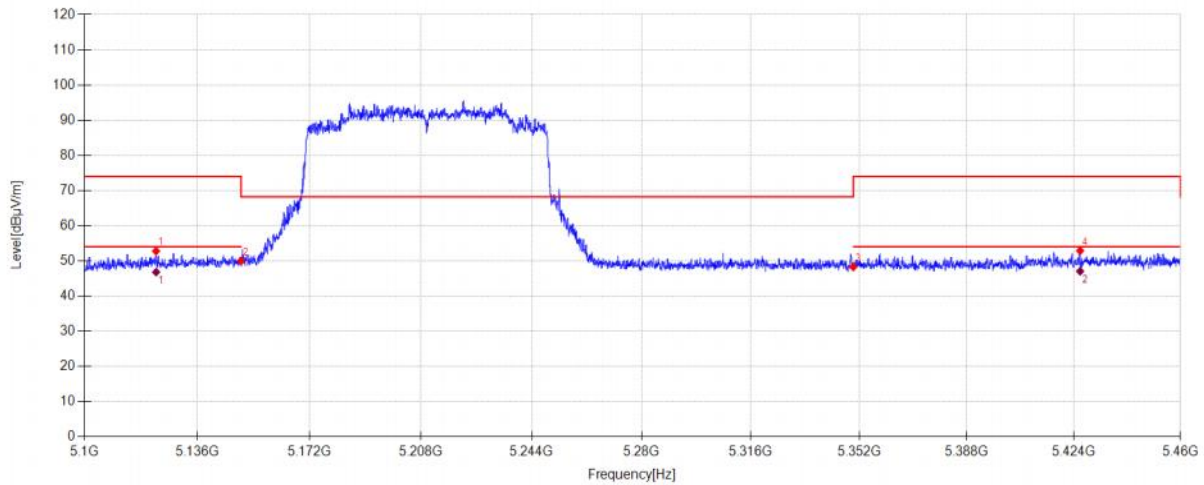

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5122.824	44.87	32.68	5.02	-29.78	52.79	74.00	21.21	PK	Vertical
2	5150.000	41.81	32.90	5.04	-29.77	49.98	68.20	18.22	PK	Vertical
3	5350.000	40.36	32.50	5.14	-29.73	48.27	68.20	19.93	PK	Vertical
4	5426.052	44.58	32.85	5.17	-29.71	52.89	74.00	21.11	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5122.824	38.89	32.68	5.02	46.81	54.00	7.19	AV	Vertical	
2	5426.052	38.74	32.85	5.17	47.05	54.00	6.95	AV	Vertical	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 20V

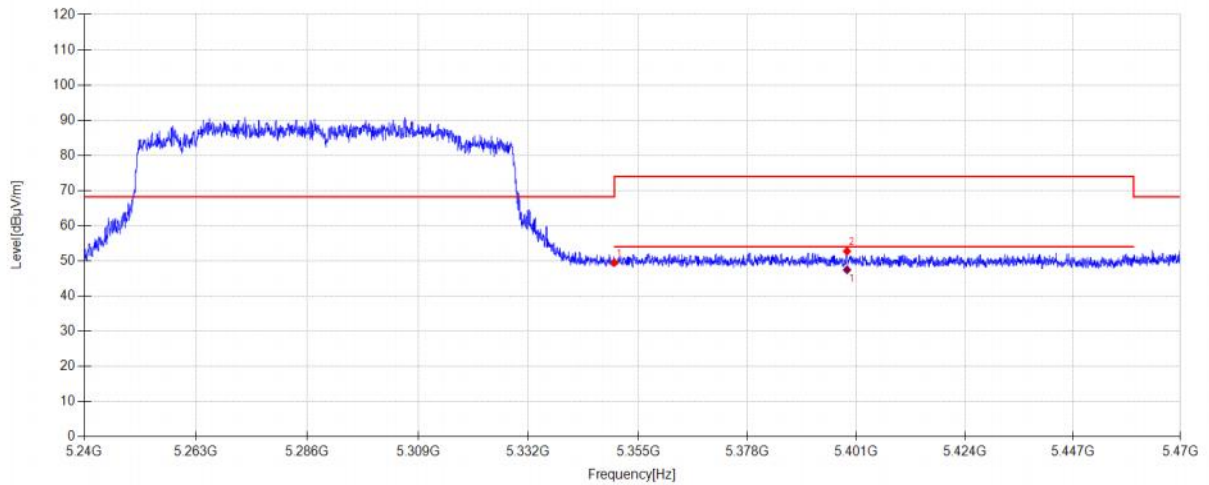

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.58	32.50	5.14	-29.73	49.49	68.20	18.71	PK	Horizontal
2	5398.999	44.41	32.89	5.16	-29.72	52.74	74.00	21.26	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5398.999	39.12	32.89	5.16	47.45	54.00	6.55	AV	Horizontal	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 20V

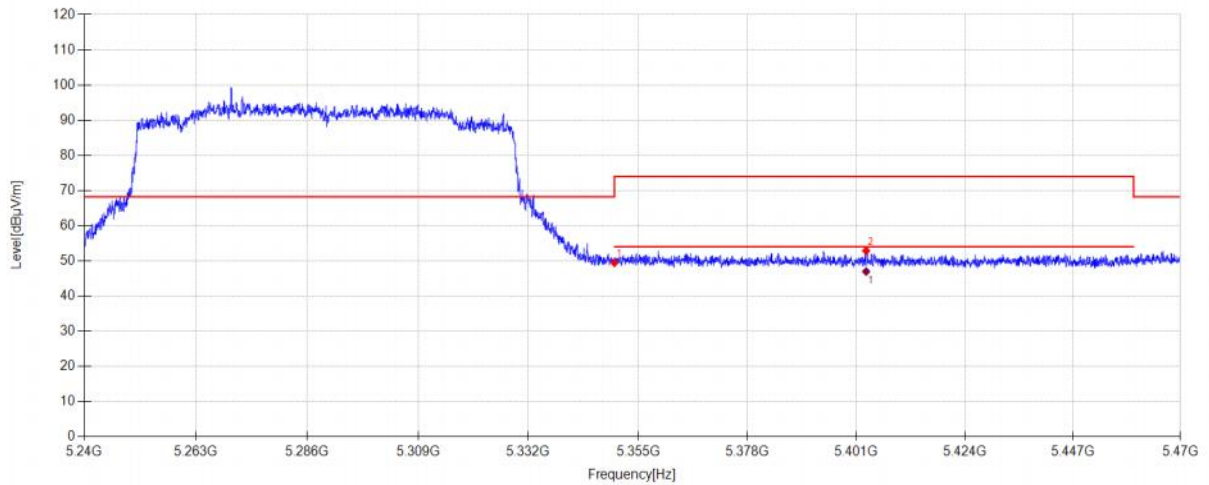

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.54	32.50	5.14	-29.73	49.45	68.20	18.75	PK	Vertical
2	5403.047	44.55	32.89	5.16	-29.72	52.88	74.00	21.12	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5403.047	38.64	32.89	5.16	46.97	54.00	7.03	AV	Vertical	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 20V

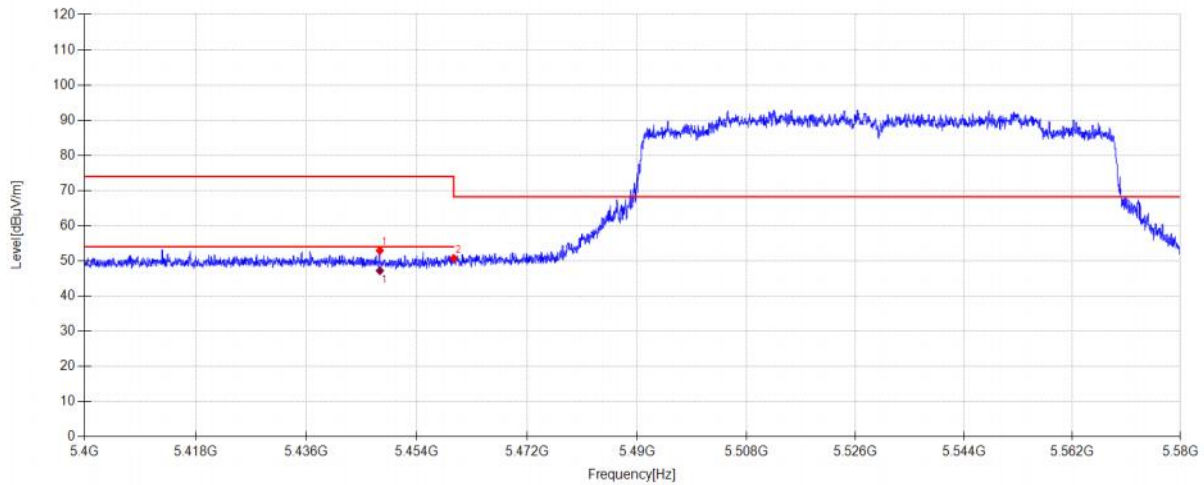

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5447.952	44.67	32.80	5.18	-29.71	52.94	74.00	21.06	PK	Horizontal
2	5460.000	42.36	32.90	5.19	-29.71	50.74	68.20	17.46	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5447.952	38.94	32.80	5.18	47.21	54.00	6.79	AV	Horizontal	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 20V

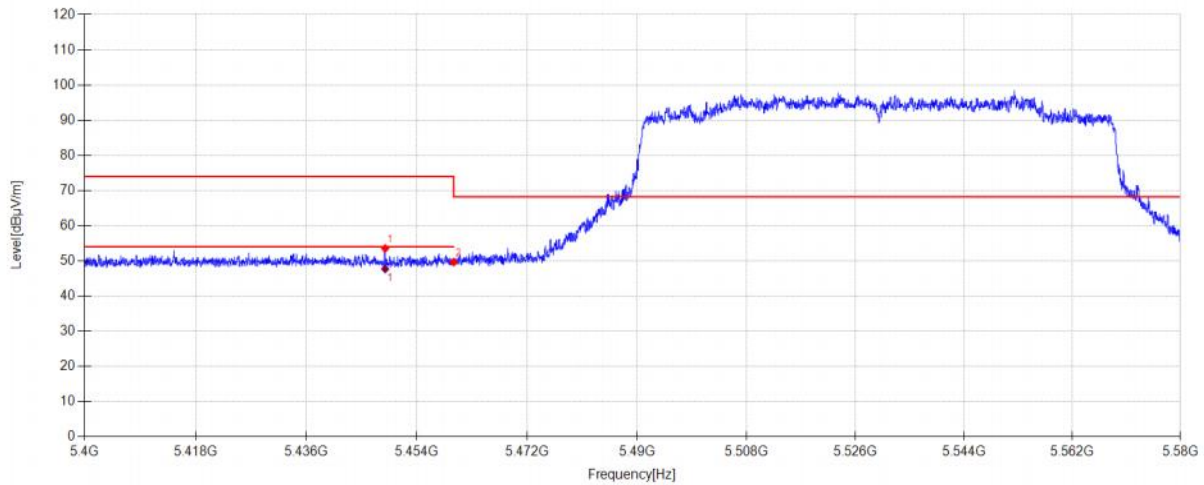

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.816	45.28	32.80	5.18	-29.71	53.55	74.00	20.45	PK	Vertical
2	5460.000	41.28	32.90	5.19	-29.71	49.66	68.20	18.54	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5448.816	39.43	32.80	5.18	47.70	54.00	6.30	AV	Vertical	

Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 20V

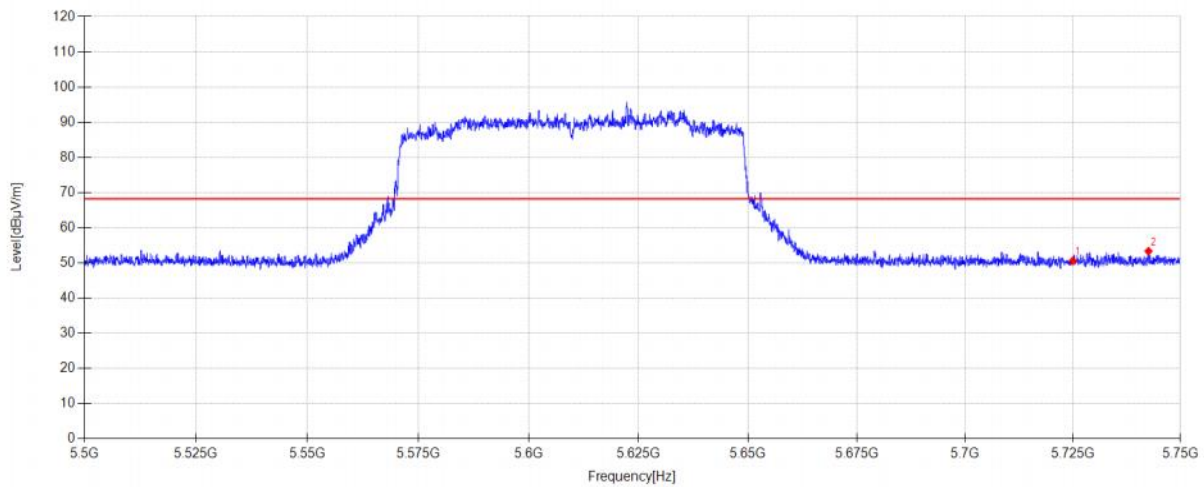


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.49	33.45	5.32	-29.66	50.60	68.20	17.60	PK	Horizontal
2	5742.575	43.97	33.70	5.33	-29.65	53.35	68.20	14.85	PK	Horizontal

Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 20V

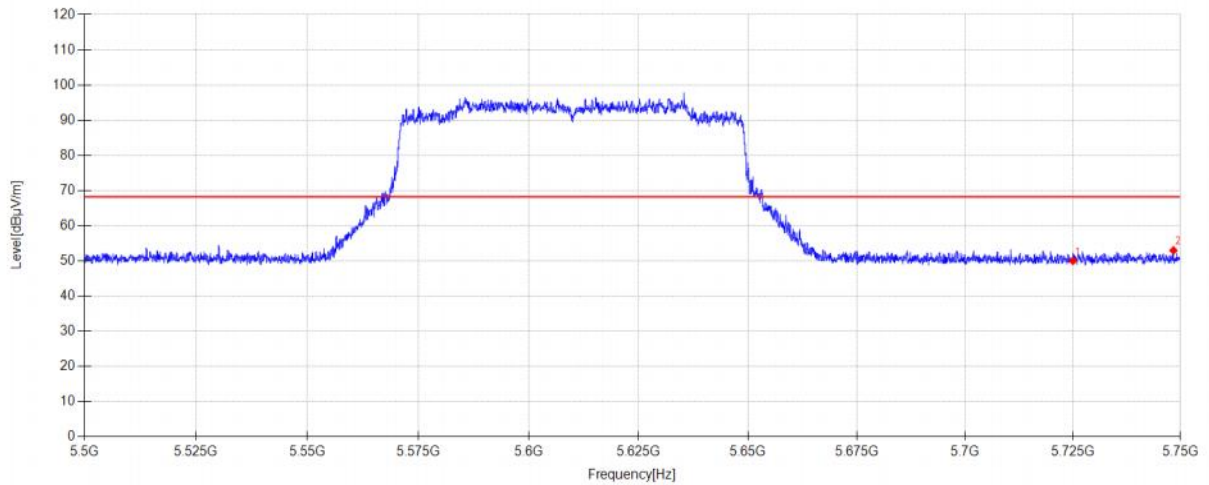

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.90	33.45	5.32	-29.66	50.01	68.20	18.19	PK	Vertical
2	5748.400	43.51	33.78	5.33	-29.65	52.97	68.20	15.23	PK	Vertical


Test Mode:	802. 11 BE160 MIMO	Frequency(MHz):	5250
Polarity:	Horizontal	Test Voltage:	DC 20V

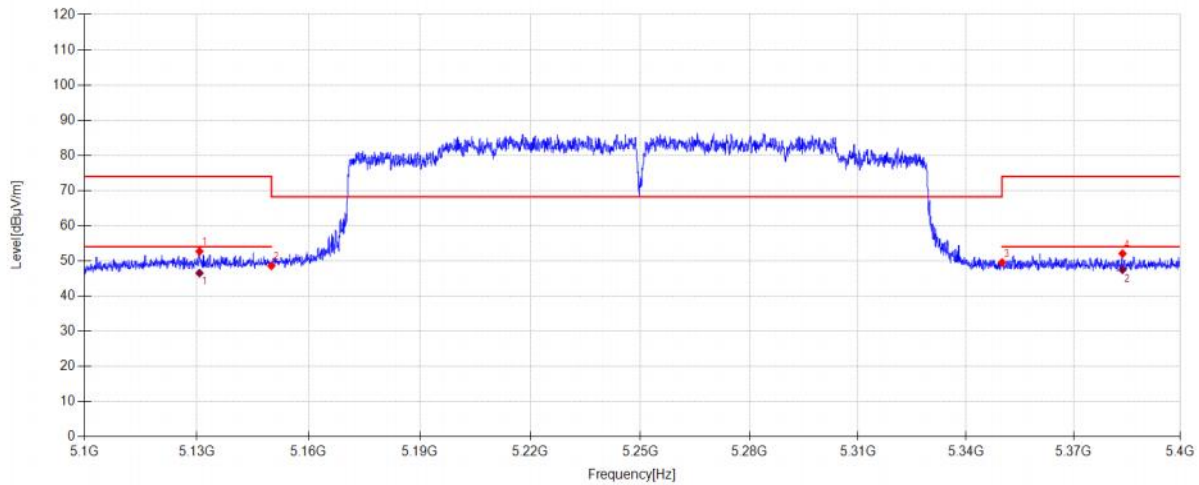

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5130.720	44.71	32.75	5.03	-29.77	52.72	74.00	21.28	PK	Horizontal
2	5150.000	40.41	32.90	5.04	-29.77	48.58	68.20	19.62	PK	Horizontal
3	5350.000	41.63	32.50	5.14	-29.73	49.54	68.20	18.66	PK	Horizontal
4	5383.740	43.86	32.77	5.15	-29.72	52.06	74.00	21.94	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5130.720	38.53	32.75	5.03	46.54	54.00	7.46	AV	Horizontal	
2	5383.740	39.27	32.77	5.15	47.47	54.00	6.53	AV	Horizontal	


Test Mode:	802. 11 BE160 MIMO	Frequency(MHz):	5250
Polarity:	Vertical	Test Voltage:	DC 20V

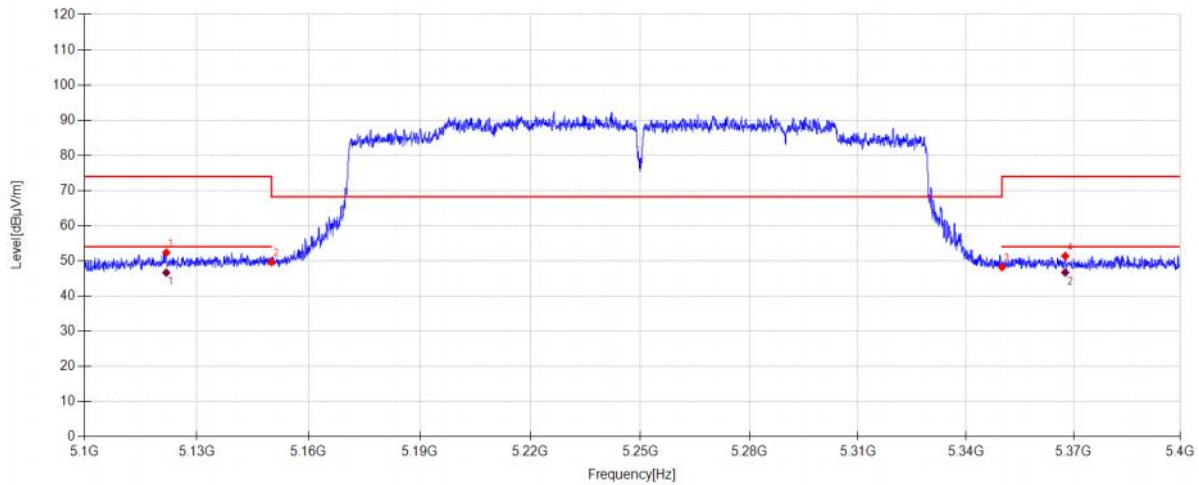

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5121.840	44.42	32.67	5.02	-29.78	52.33	74.00	21.67	PK	Vertical
2	5150.000	41.52	32.90	5.04	-29.77	49.69	68.20	18.51	PK	Vertical
3	5350.000	40.32	32.50	5.14	-29.73	48.23	68.20	19.97	PK	Vertical
4	5367.690	43.34	32.64	5.14	-29.73	51.39	74.00	22.61	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5121.840	38.74	32.67	5.02	46.65	54.00	7.35	AV	Vertical	
2	5367.690	38.65	32.64	5.14	46.70	54.00	7.30	AV	Vertical	


Test Mode:	802. 11 BE160 MIMO	Frequency(MHz):	5570
Polarity:	Horizontal	Test Voltage:	DC 20V

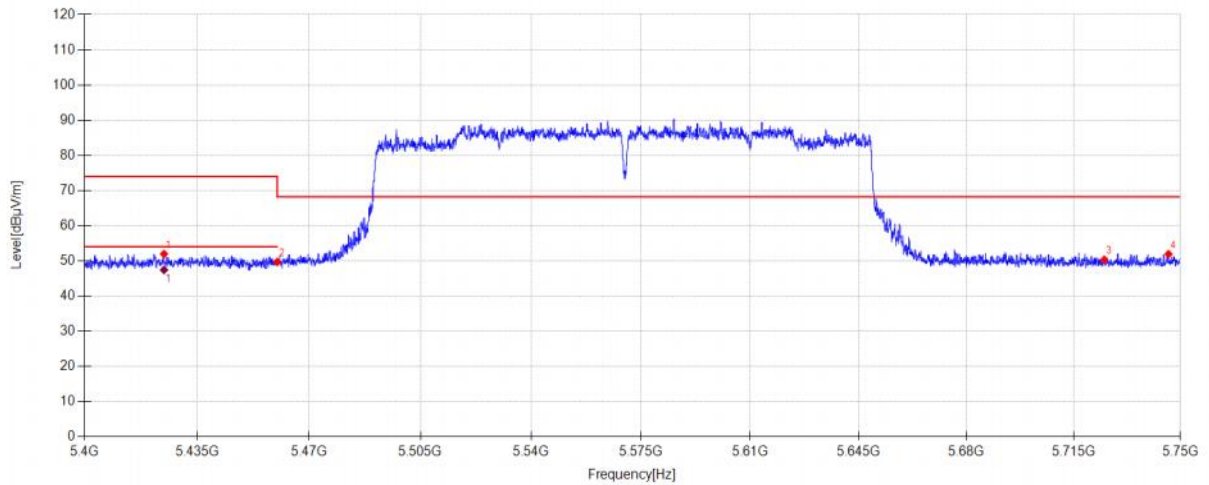

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5424.710	43.66	32.85	5.17	-29.72	51.96	74.00	22.04	PK	Horizontal
2	5460.000	41.31	32.90	5.19	-29.71	49.69	68.20	18.51	PK	Horizontal
3	5725.000	41.20	33.45	5.32	-29.65	50.32	68.20	17.88	PK	Horizontal
4	5746.115	42.49	33.75	5.33	-29.65	51.92	68.20	16.28	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5424.710	39.13	32.85	5.17	47.43	54.00	6.57	AV	Horizontal	


Test Mode:	802. 11 BE160 MIMO	Frequency(MHz):	5570
Polarity:	Vertical	Test Voltage:	DC 20V

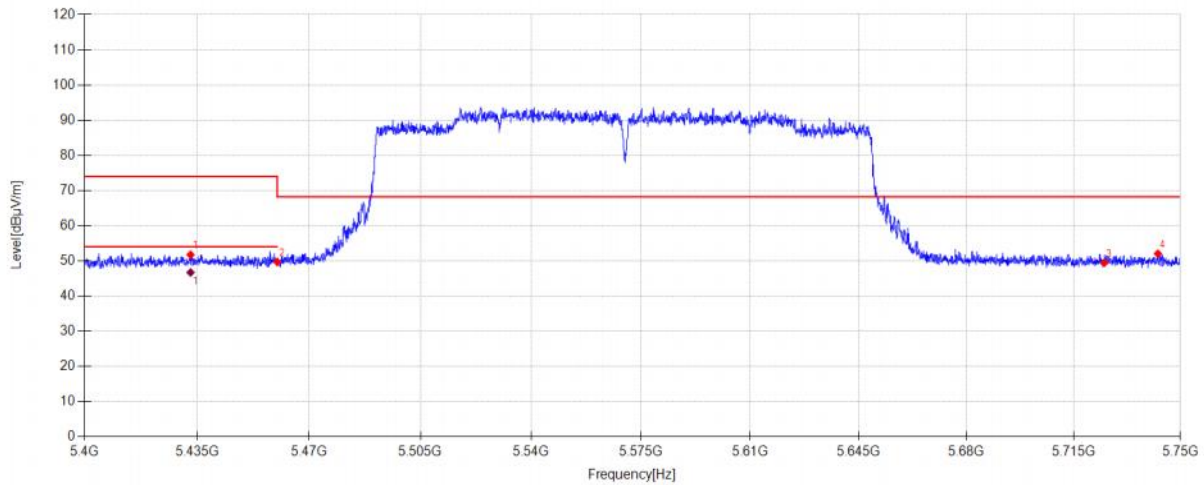

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5432.970	43.45	32.83	5.18	-29.71	51.75	74.00	22.25	PK	Vertical
2	5460.000	41.31	32.90	5.19	-29.71	49.69	68.20	18.51	PK	Vertical
3	5725.000	40.34	33.45	5.32	-29.65	49.46	68.20	18.74	PK	Vertical
4	5742.615	42.66	33.70	5.33	-29.65	52.04	68.20	16.16	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5432.970	38.41	32.83	5.18	46.71	54.00	7.29	AV	Vertical	


Test Mode:	802. 11 AX160 MIMO	Frequency(MHz):	5570
Polarity:	Horizontal	Test Voltage:	DC 20V

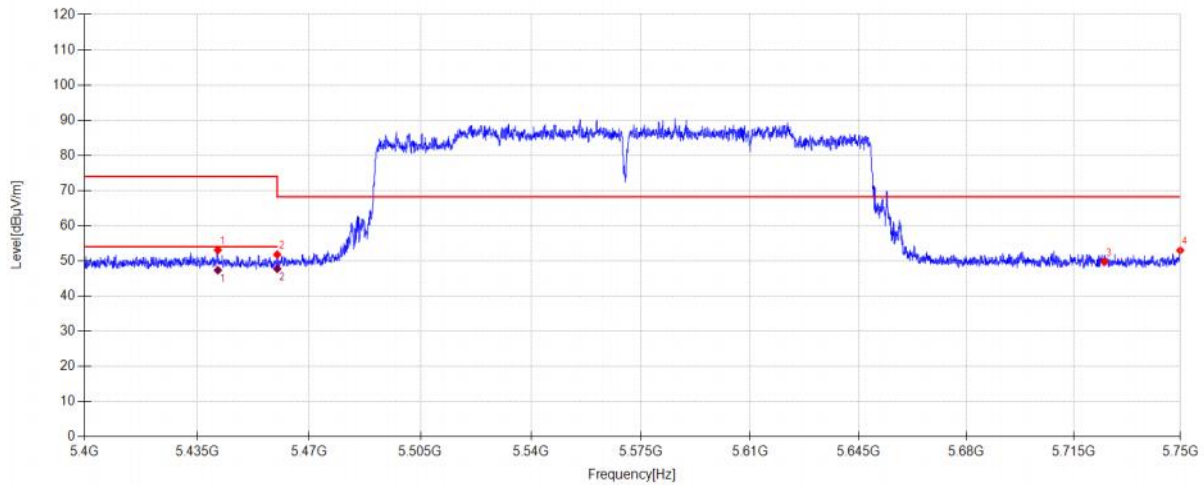

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5441.475	44.80	32.82	5.18	-29.71	53.09	74.00	20.91	PK	Horizontal
2	5460.000	43.40	32.90	5.19	-29.71	51.78	68.20	16.42	PK	Horizontal
3	5725.000	40.62	33.45	5.32	-29.65	49.74	68.20	18.46	PK	Horizontal
4	5749.965	43.50	33.80	5.33	-29.65	52.98	68.20	15.22	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5441.475	39.06	32.82	5.18	47.35	54.00	6.65	AV	Horizontal	
2	5460.000	39.37	32.90	5.19	47.75	54.00	6.25	AV	Horizontal	


Test Mode:	802. 11 AX160 MIMO	Frequency(MHz):	5570
Polarity:	Vertical	Test Voltage:	DC 20V

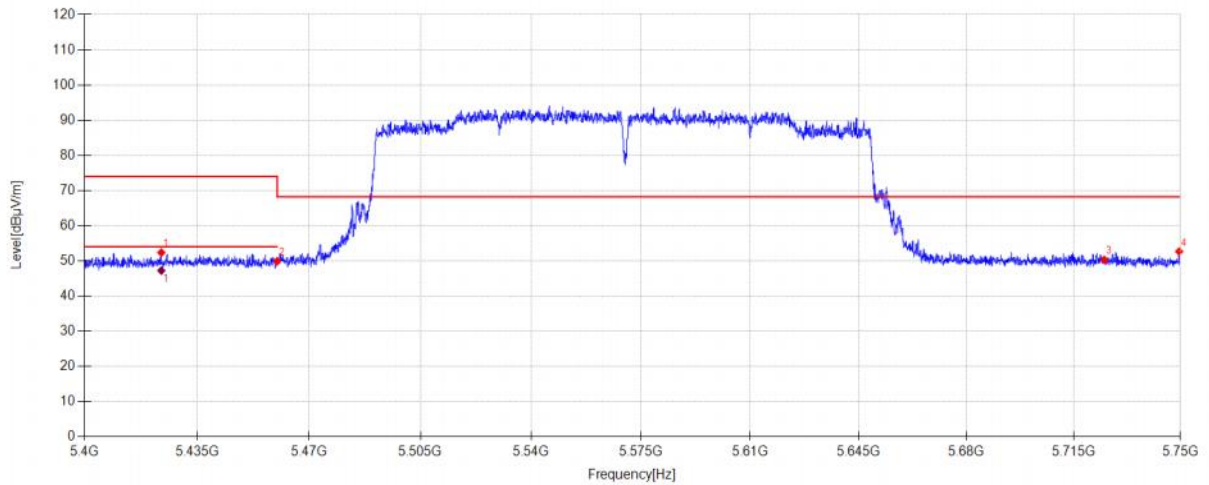

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5423.870	44.07	32.85	5.17	-29.72	52.37	74.00	21.63	PK	Vertical
2	5460.000	41.54	32.90	5.19	-29.71	49.92	68.20	18.28	PK	Vertical
3	5725.000	41.19	33.45	5.32	-29.65	50.31	68.20	17.89	PK	Vertical
4	5749.615	43.19	33.79	5.33	-29.65	52.66	68.20	15.54	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5423.870	38.94	32.85	5.17	47.24	54.00	6.76	AV	Vertical	


Test Mode:	802. 11 AX160 MIMO	Frequency(MHz):	5250
Polarity:	Horizontal	Test Voltage:	DC 20V

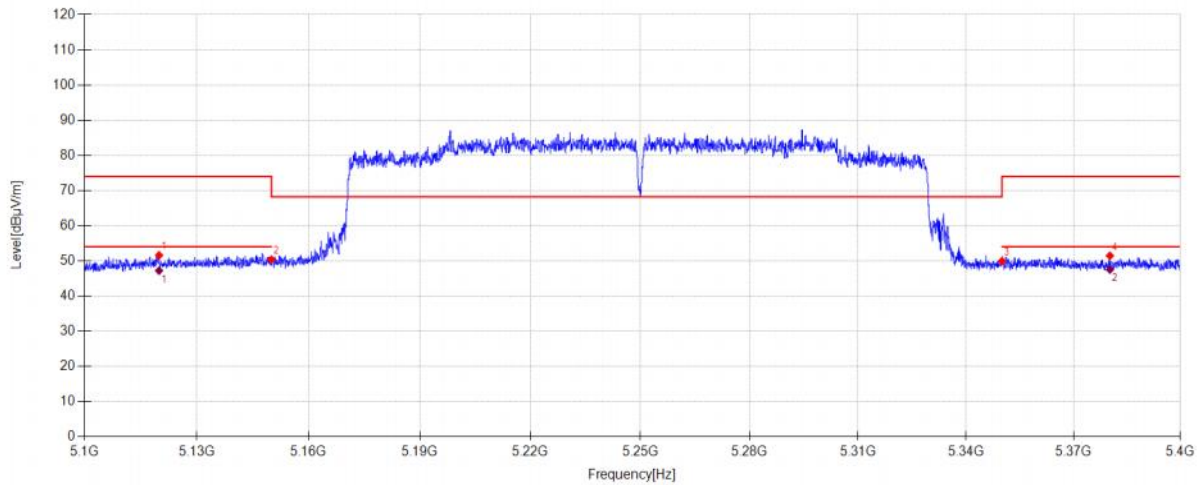

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5119.920	43.71	32.66	5.02	-29.78	51.61	74.00	22.39	PK	Horizontal
2	5150.000	42.21	32.90	5.04	-29.77	50.38	68.20	17.82	PK	Horizontal
3	5350.000	42.02	32.50	5.14	-29.73	49.93	68.20	18.27	PK	Horizontal
4	5380.200	43.30	32.74	5.15	-29.72	51.47	74.00	22.53	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5119.920	39.32	32.66	5.02	47.22	54.00	6.78	AV	Horizontal	
2	5380.200	39.37	32.74	5.15	47.54	54.00	6.46	AV	Horizontal	


Test Mode:	802. 11 AX160 MIMO	Frequency(MHz):	5250
Polarity:	Vertical	Test Voltage:	DC 20V

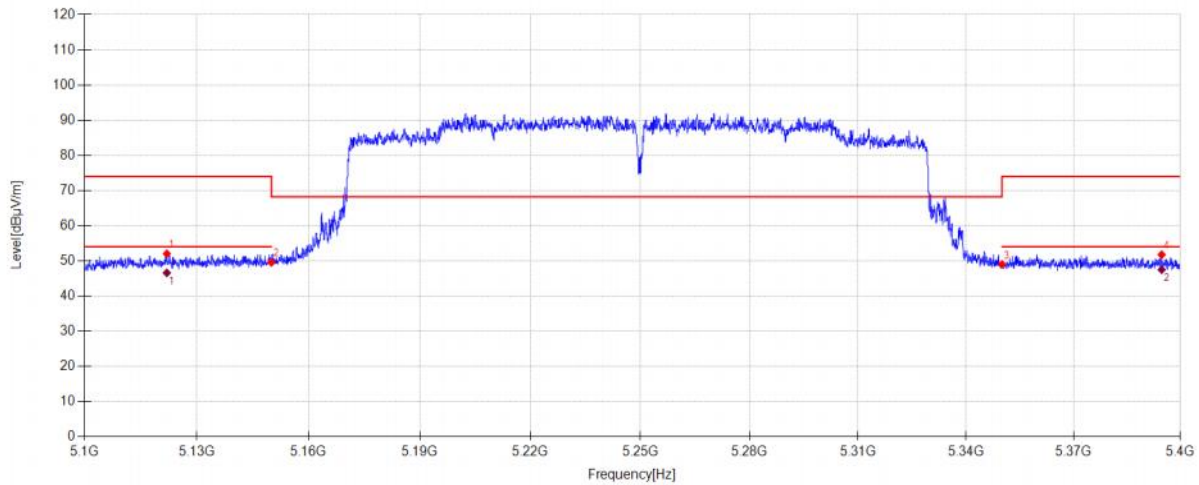

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5121.990	44.11	32.68	5.02	-29.78	52.03	74.00	21.97	PK	Vertical
2	5150.000	41.39	32.90	5.04	-29.77	49.56	68.20	18.64	PK	Vertical
3	5350.000	41.10	32.50	5.14	-29.73	49.01	68.20	19.19	PK	Vertical
4	5394.750	43.47	32.86	5.16	-29.72	51.77	74.00	22.23	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5121.990	38.67	32.68	5.02	46.59	54.00	7.41	AV	Vertical	
2	5394.750	39.20	32.86	5.16	47.50	54.00	6.50	AV	Vertical	


Test Mode:	802. 11 AC160 MIMO	Frequency(MHz):	5250
Polarity:	Horizontal	Test Voltage:	DC 20V

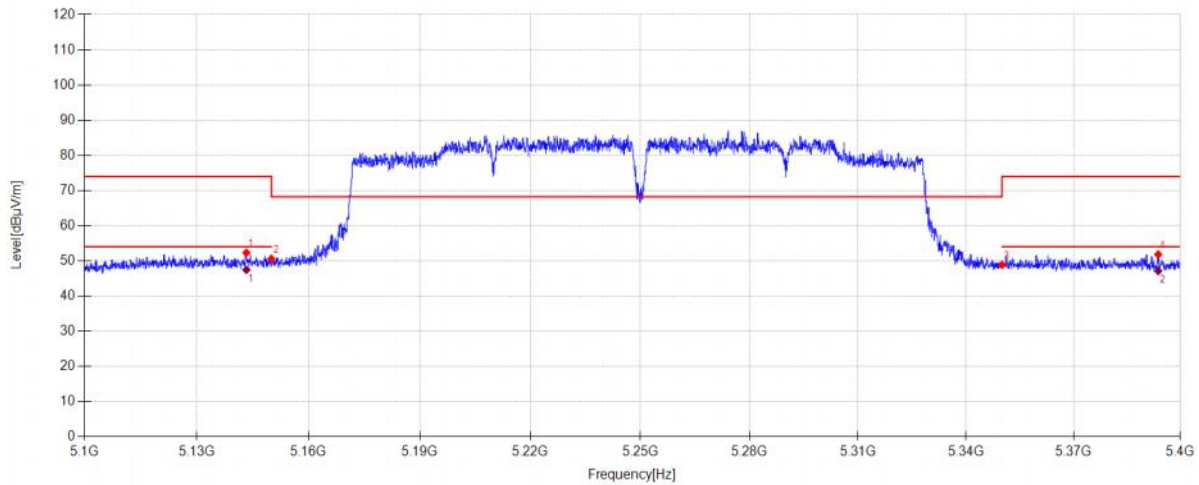

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.290	44.20	32.85	5.03	-29.77	52.31	74.00	21.69	PK	Horizontal
2	5150.000	42.40	32.90	5.04	-29.77	50.57	68.20	17.63	PK	Horizontal
3	5350.000	40.98	32.50	5.14	-29.73	48.89	68.20	19.31	PK	Horizontal
4	5393.790	43.54	32.85	5.16	-29.72	51.83	74.00	22.17	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5143.290	39.37	32.85	5.03	47.48	54.00	6.52	AV	Horizontal	
2	5393.790	38.85	32.85	5.16	47.14	54.00	6.86	AV	Horizontal	


Test Mode:	802. 11 AC160 MIMO	Frequency(MHz):	5250
Polarity:	Vertical	Test Voltage:	DC 20V

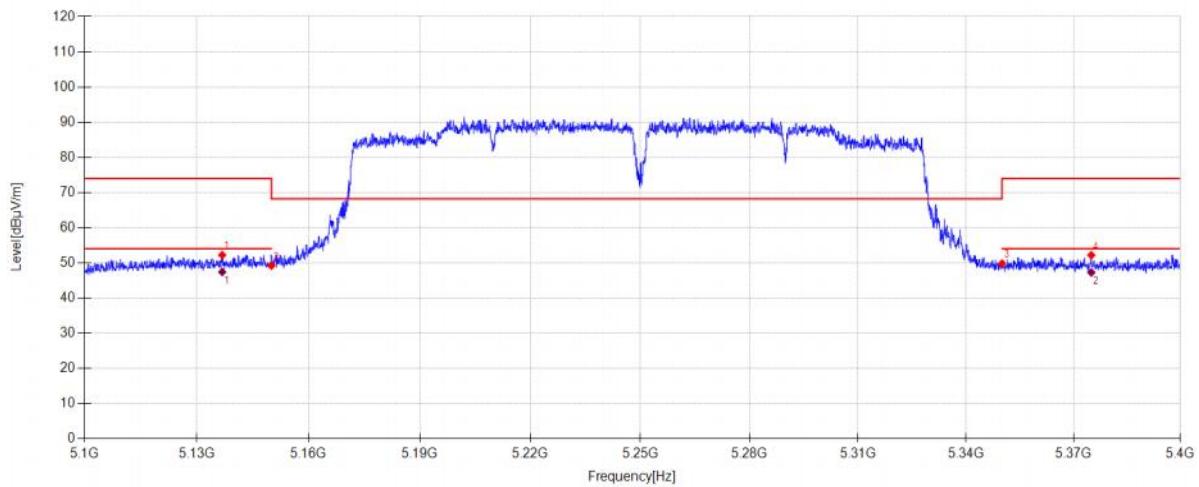

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.810	44.18	32.79	5.03	-29.77	52.23	74.00	21.77	PK	Vertical
2	5150.000	41.03	32.90	5.04	-29.77	49.20	68.20	19.00	PK	Vertical
3	5350.000	41.89	32.50	5.14	-29.73	49.80	68.20	18.40	PK	Vertical
4	5374.980	44.08	32.70	5.15	-29.73	52.20	74.00	21.80	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5136.810	39.37	32.79	5.03	47.42	54.00	6.58	AV	Vertical	
2	5374.980	39.16	32.70	5.15	47.28	54.00	6.72	AV	Vertical	


Test Mode:	802. 11 AC160 MIMO	Frequency(MHz):	5570
Polarity:	Horizontal	Test Voltage:	DC 20V

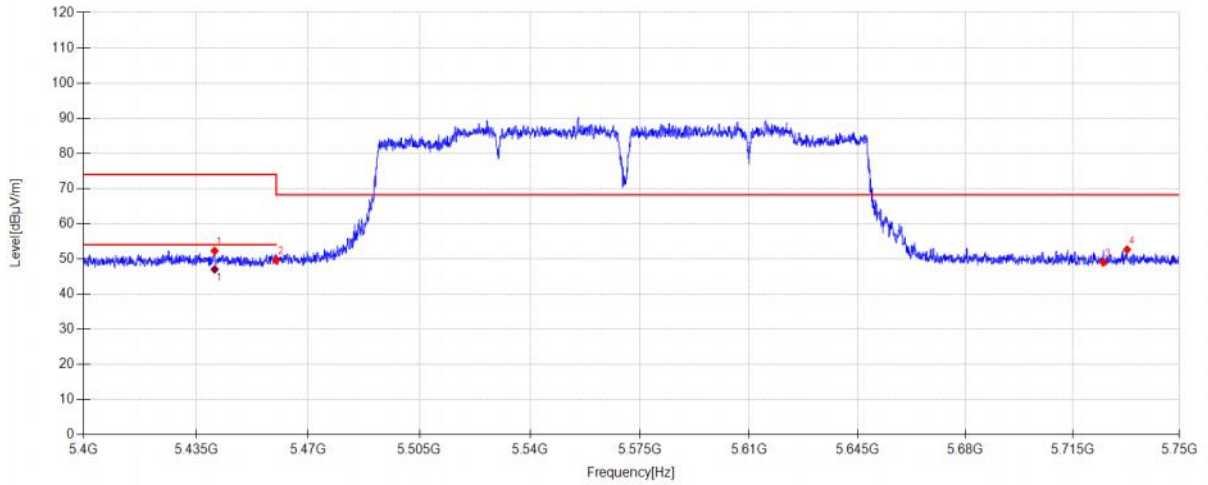

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5440.775	44.00	32.82	5.18	-29.71	52.29	74.00	21.71	PK	Horizontal
2	5460.000	41.23	32.90	5.19	-29.71	49.61	68.20	18.59	PK	Horizontal
3	5725.000	39.86	33.45	5.32	-29.65	48.98	68.20	19.22	PK	Horizontal
4	5732.815	43.41	33.56	5.33	-29.65	52.65	68.20	15.55	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5440.775	38.75	32.82	5.18	47.04	54.00	6.96	AV	Horizontal	


Test Mode:	802. 11 AC160 MIMO	Frequency(MHz):	5570
Polarity:	Vertical	Test Voltage:	DC 20V

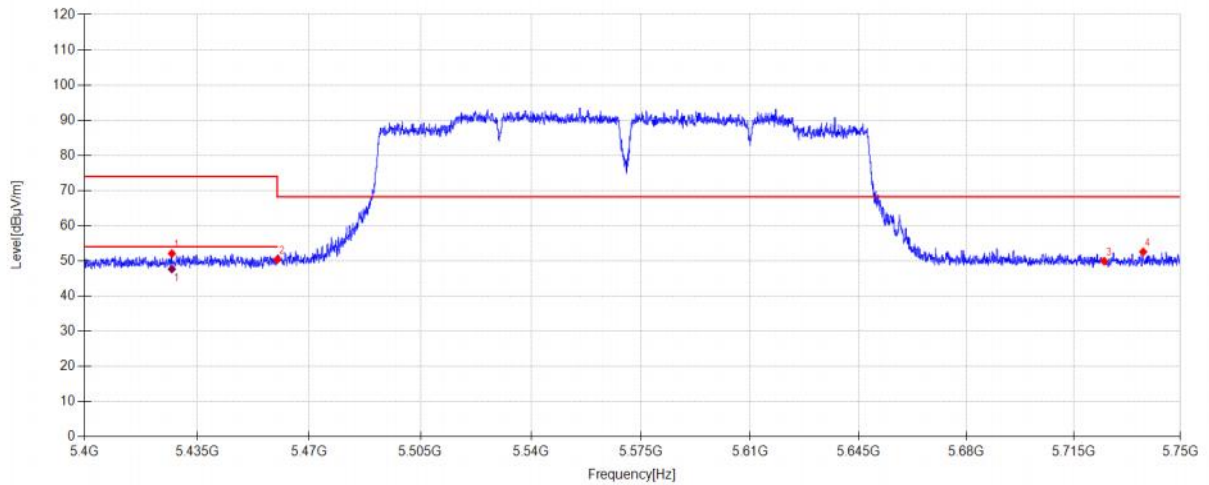

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5427.160	43.78	32.85	5.17	-29.71	52.09	74.00	21.91	PK	Vertical
2	5460.000	42.00	32.90	5.19	-29.71	50.38	68.20	17.82	PK	Vertical
3	5725.000	40.78	33.45	5.32	-29.65	49.90	68.20	18.30	PK	Vertical
4	5737.785	43.25	33.63	5.33	-29.65	52.56	68.20	15.64	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5427.160	39.36	32.85	5.17	47.67	54.00	6.33	AV	Vertical	

Test Mode:	802. 11 AX20 MIMO RU8	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

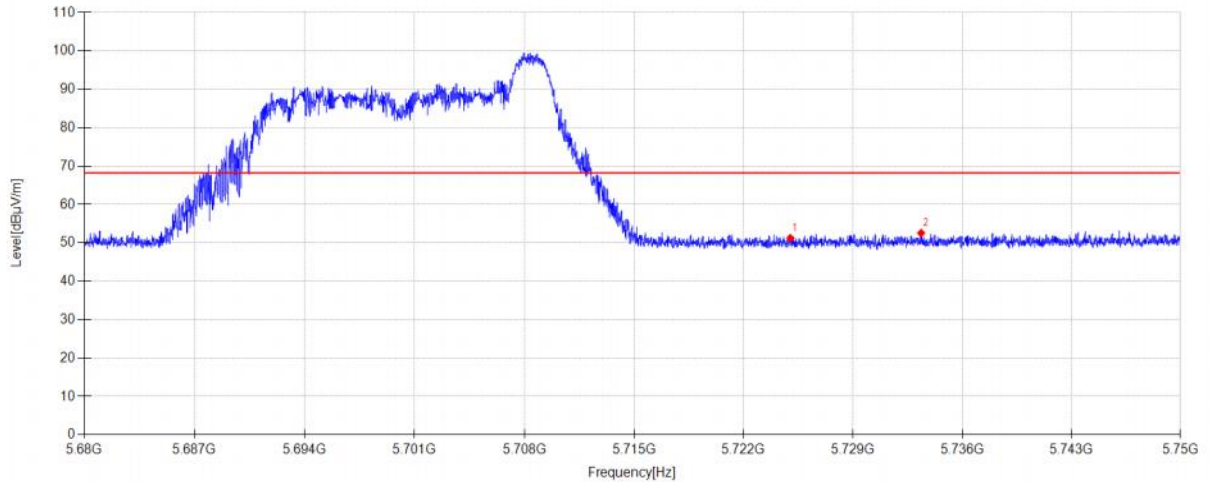


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.06	33.45	5.32	-29.65	51.18	68.20	17.02	PK	Horizontal
2	5733.368	43.30	33.57	5.33	-29.65	52.55	68.20	15.65	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

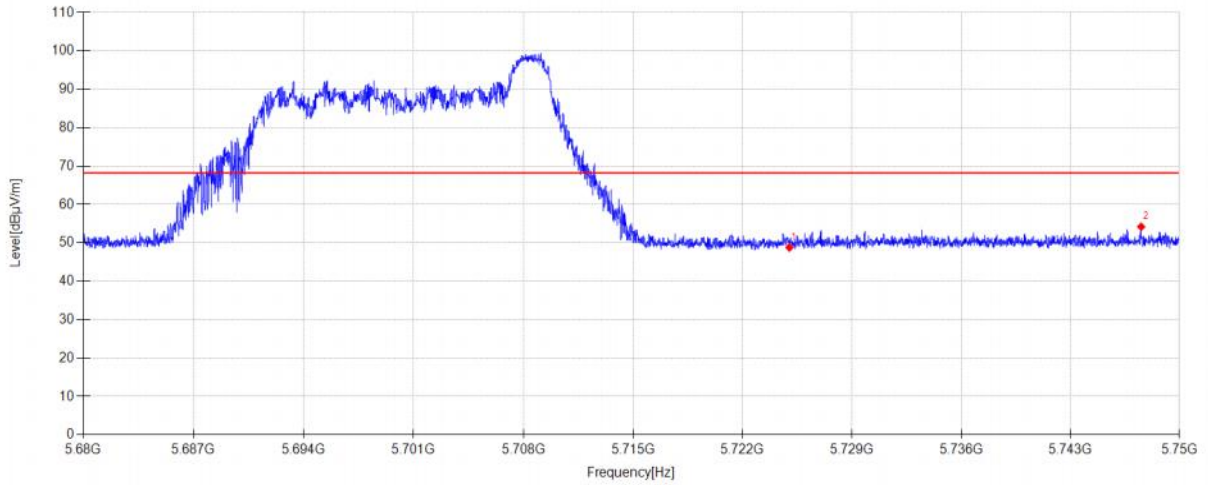

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	39.66	33.45	5.32	-29.65	48.78	68.20	19.42	PK	Vertical
2	5747.550	44.76	33.77	5.33	-29.65	54.21	68.20	13.99	PK	Vertical


Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

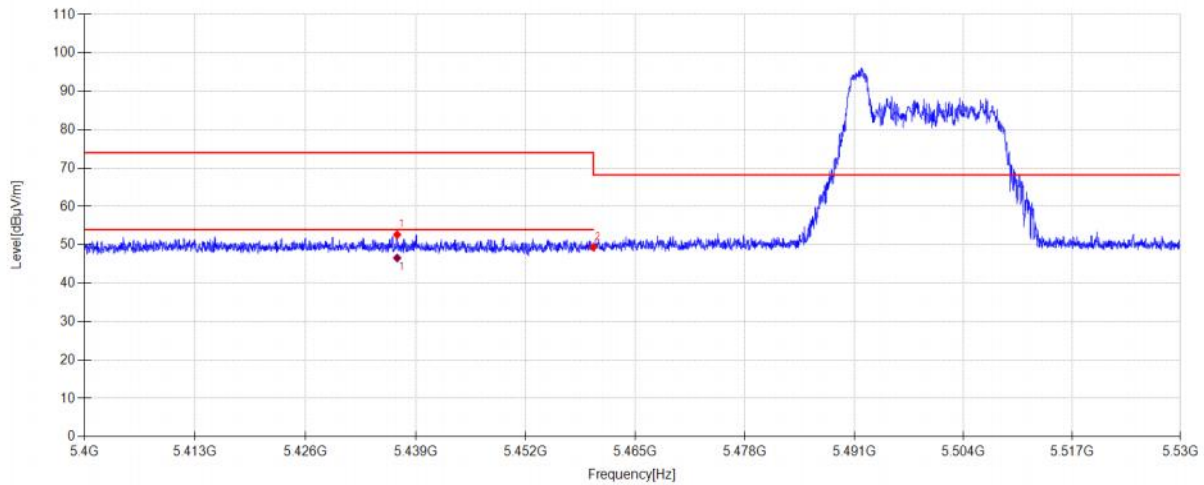

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.790	44.36	32.83	5.18	-29.71	52.66	74.00	21.34	PK	Horizontal
2	5460.000	41.05	32.90	5.19	-29.71	49.43	68.20	18.77	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5436.790	38.29	32.83	5.18	46.59	54.00	7.41	AV	Horizontal


Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

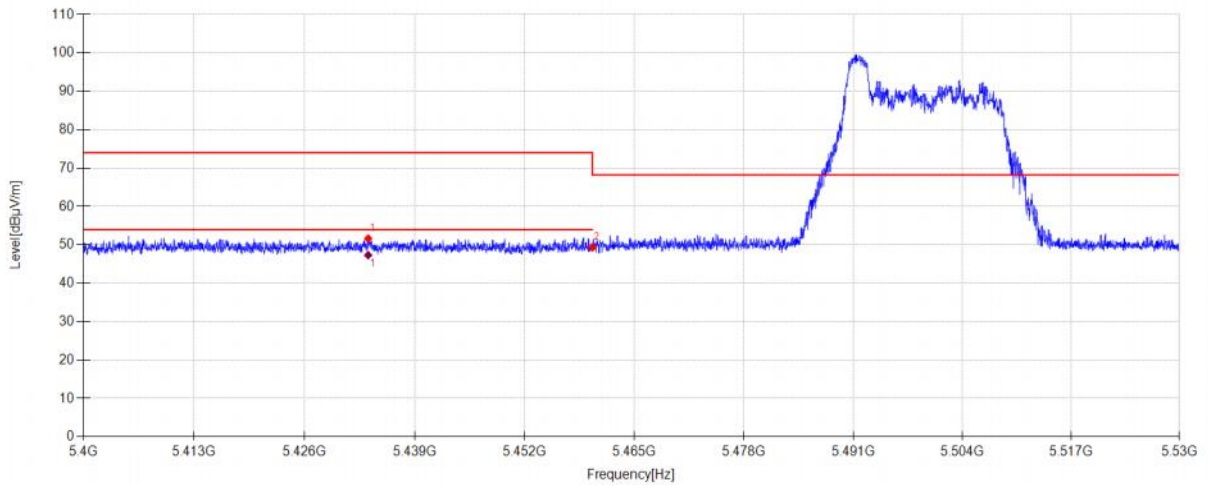

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5433.488	43.36	32.83	5.18	-29.71	51.66	74.00	22.34	PK	Vertical
2	5460.000	41.00	32.90	5.19	-29.71	49.38	68.20	18.82	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5433.488	39.04	32.83	5.18	47.34	54.00	6.66	AV	Vertical


Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

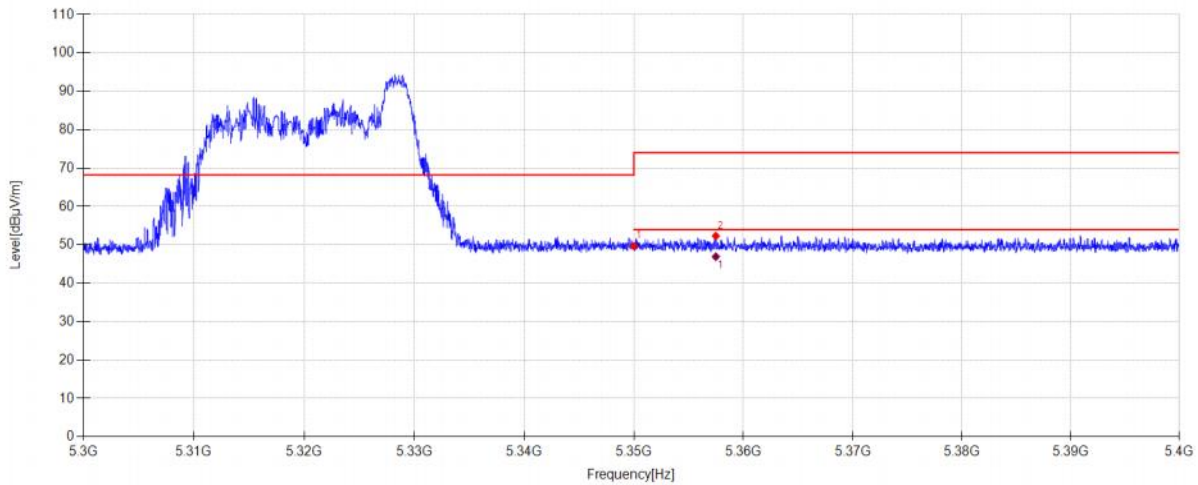

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.78	32.50	5.14	-29.73	49.69	68.20	18.51	PK	Horizontal
2	5357.480	44.36	32.56	5.14	-29.73	52.33	74.00	21.67	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5357.480	38.96	32.56	5.14	46.93	54.00	7.07	AV	Horizontal


Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

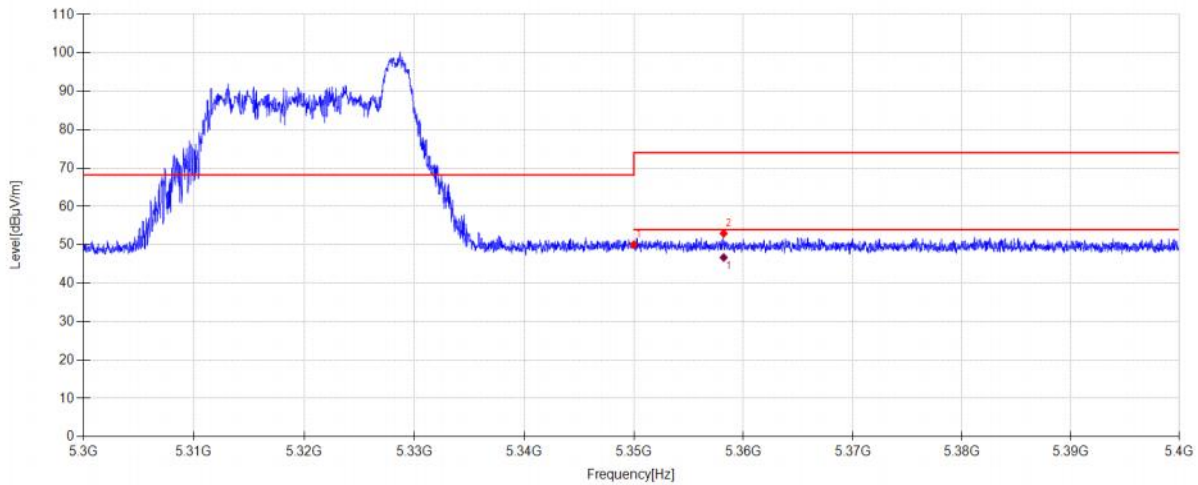

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.20	32.50	5.14	-29.73	50.11	68.20	18.09	PK	Vertical
2	5358.200	45.01	32.57	5.14	-29.73	52.99	74.00	21.01	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5358.200	38.74	32.57	5.14	46.72	54.00	7.28	AV	Vertical


Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

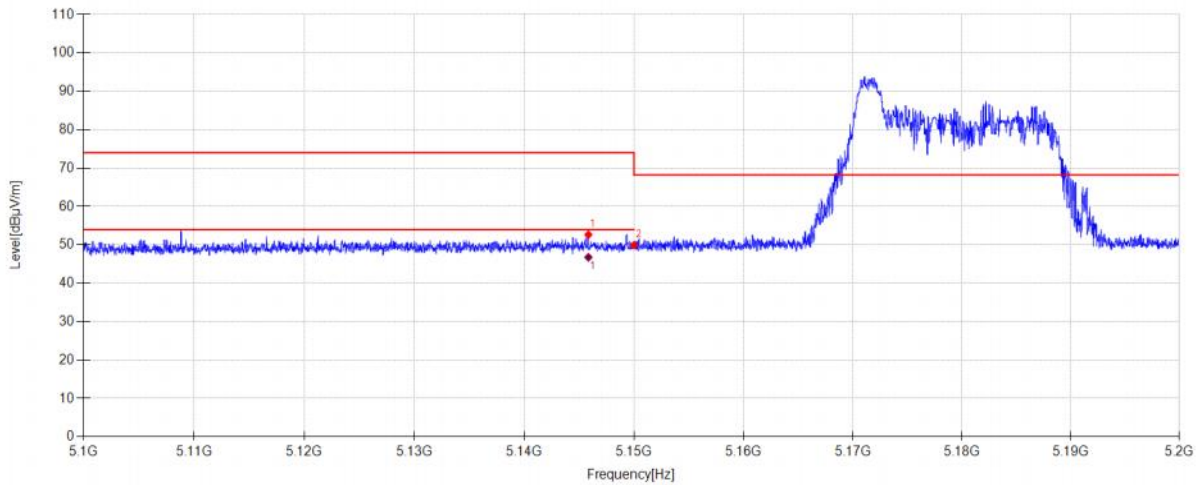

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.840	44.54	32.87	5.03	-29.77	52.67	74.00	21.33	PK	Horizontal
2	5150.000	41.78	32.90	5.04	-29.77	49.95	68.20	18.25	PK	Horizontal

Final Data List									
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.840	38.64	32.87	5.03	46.77	54.00	7.23	AV	Horizontal


Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

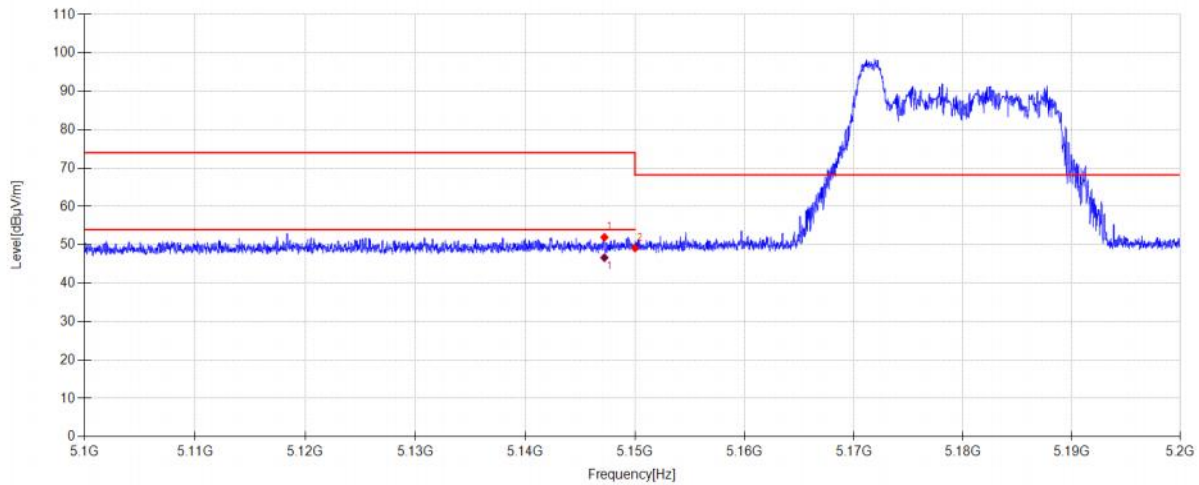

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.210	43.83	32.88	5.03	-29.77	51.97	74.00	22.03	PK	Vertical
2	5150.000	40.98	32.90	5.04	-29.77	49.15	68.20	19.05	PK	Vertical


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.210	38.53	32.88	5.03	46.67	54.00	7.33	AV	Vertical

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 20V

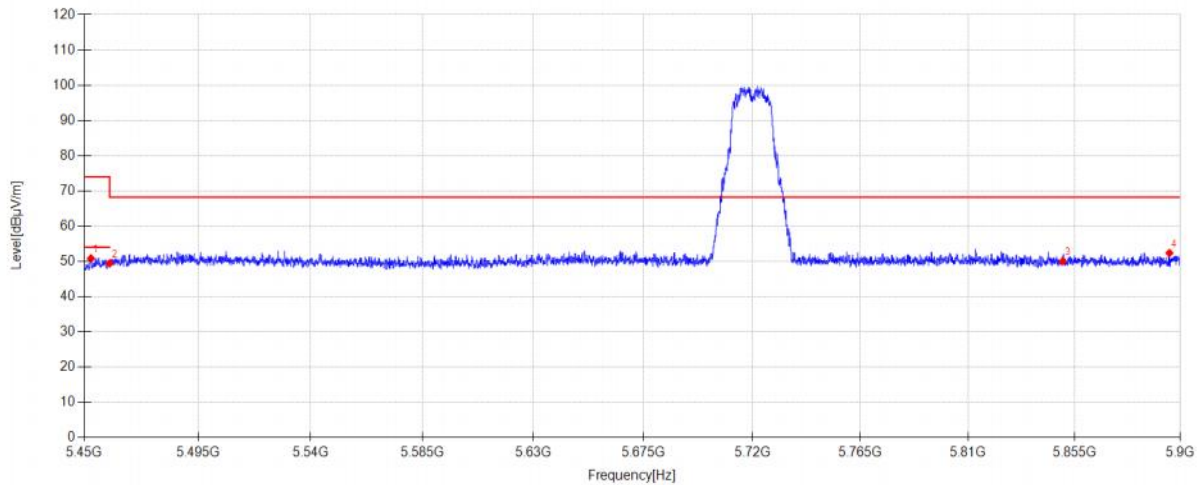

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.610	42.53	32.83	5.19	-29.71	50.84	74.00	23.16	PK	Horizontal
2	5460.000	41.06	32.90	5.19	-29.71	49.44	68.20	18.76	PK	Horizontal
3	5850.000	40.40	33.90	5.39	-29.63	50.06	68.20	18.14	PK	Horizontal
4	5895.365	42.32	34.26	5.41	-29.62	52.37	68.20	15.83	PK	Horizontal


Test Mode:	802. 11 A Ant1	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 20V

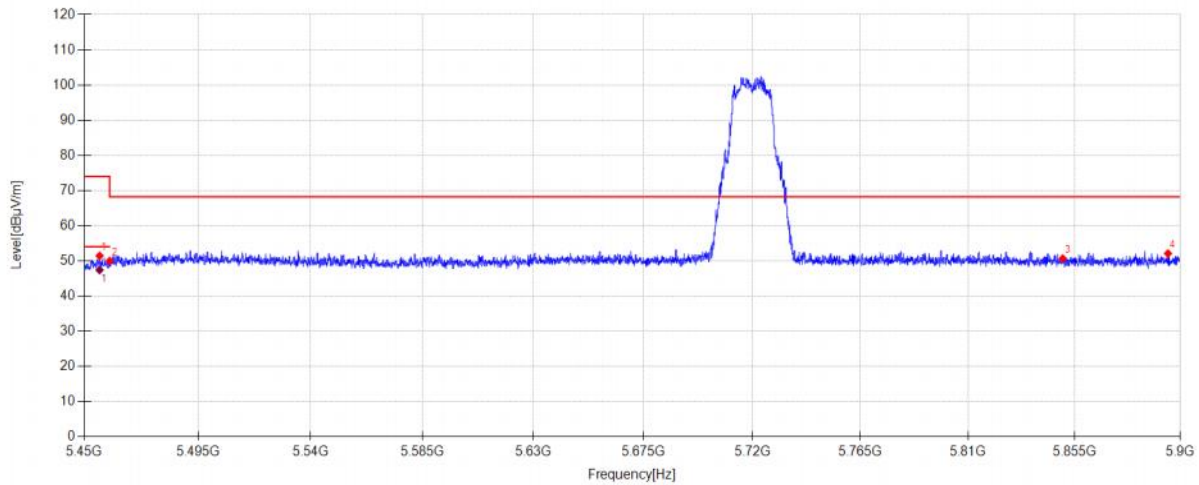

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.030	43.10	32.86	5.19	-29.71	51.44	74.00	22.56	PK	Vertical
2	5460.000	41.60	32.90	5.19	-29.71	49.98	68.20	18.22	PK	Vertical
3	5850.000	41.00	33.90	5.39	-29.63	50.66	68.20	17.54	PK	Vertical
4	5894.735	42.04	34.26	5.41	-29.62	52.09	68.20	16.11	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.030	39.06	32.86	5.19	47.40	54.00	6.60	AV	Vertical	


Test Mode:	802. 11 A Ant2	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 20V

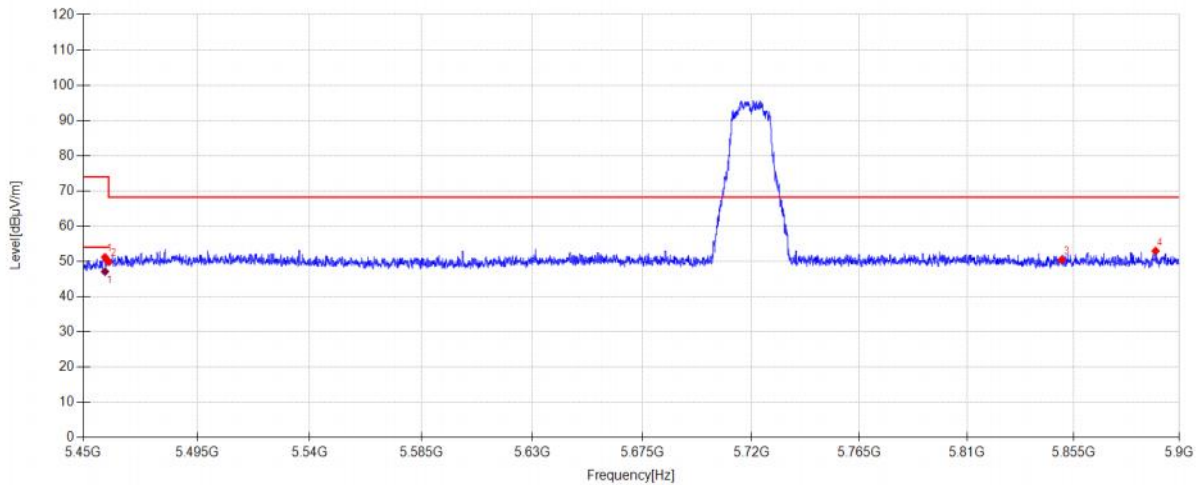

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.550	42.81	32.89	5.19	-29.71	51.18	74.00	22.82	PK	Horizontal
2	5460.000	41.48	32.90	5.19	-29.71	49.86	68.20	18.34	PK	Horizontal
3	5850.000	40.78	33.90	5.39	-29.63	50.44	68.20	17.76	PK	Horizontal
4	5889.875	42.95	34.22	5.40	-29.62	52.95	68.20	15.25	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.550	38.72	32.89	5.19	47.09	54.00	6.91	AV	Horizontal	


Test Mode:	802. 11 A Ant2	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 20V

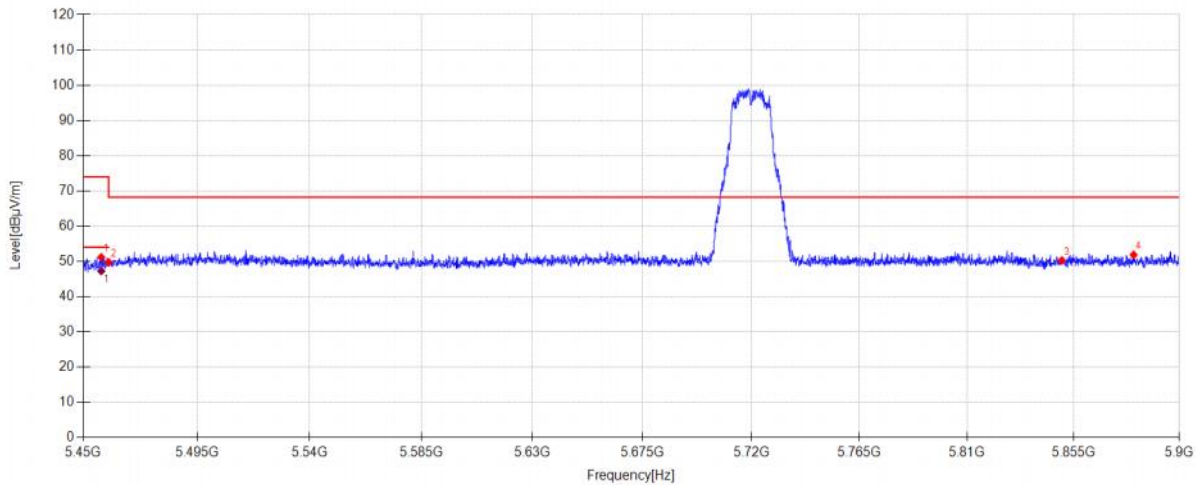

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.065	42.82	32.87	5.19	-29.71	51.17	74.00	22.83	PK	Vertical
2	5460.000	41.34	32.90	5.19	-29.71	49.72	68.20	18.48	PK	Vertical
3	5850.000	40.58	33.90	5.39	-29.63	50.24	68.20	17.96	PK	Vertical
4	5880.515	41.94	34.14	5.40	-29.62	51.86	68.20	16.34	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.065	38.90	32.87	5.19	47.25	54.00	6.75	AV	Vertical	


Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 20V

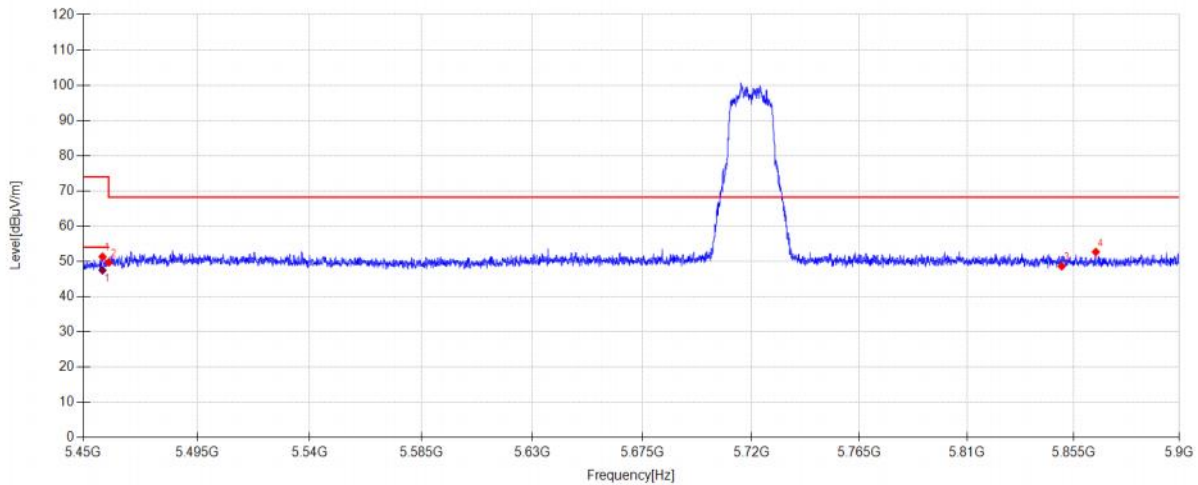

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.560	42.96	32.88	5.19	-29.71	51.32	74.00	22.68	PK	Horizontal
2	5460.000	41.33	32.90	5.19	-29.71	49.71	68.20	18.49	PK	Horizontal
3	5850.000	38.96	33.90	5.39	-29.63	48.62	68.20	19.58	PK	Horizontal
4	5864.450	42.90	34.02	5.39	-29.63	52.68	68.20	15.52	PK	Horizontal


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.560	39.13	32.88	5.19	47.49	54.00	6.51	AV	Horizontal	

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 20V

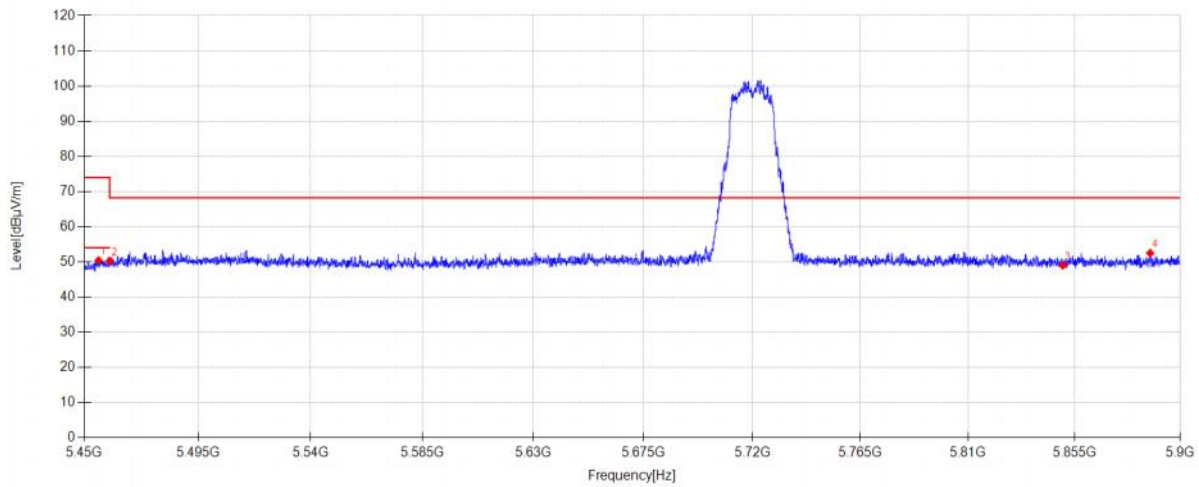


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.625	42.07	32.86	5.19	-29.71	50.41	74.00	23.59	PK	Vertical
2	5460.000	41.89	32.90	5.19	-29.71	50.27	68.20	17.93	PK	Vertical
3	5850.000	39.36	33.90	5.39	-29.63	49.02	68.20	19.18	PK	Vertical
4	5887.130	42.50	34.20	5.40	-29.62	52.48	68.20	15.72	PK	Vertical

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 20V

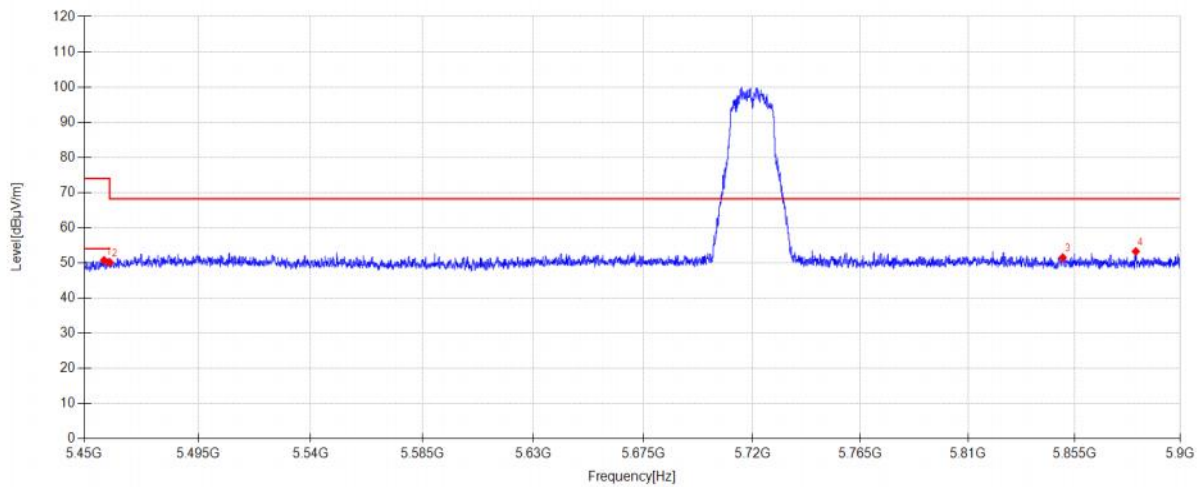

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.785	42.37	32.88	5.19	-29.71	50.73	74.00	23.27	PK	Horizontal
2	5460.000	41.79	32.90	5.19	-29.71	50.17	68.20	18.03	PK	Horizontal
3	5850.000	41.85	33.90	5.39	-29.63	51.51	68.20	16.69	PK	Horizontal
4	5881.010	43.32	34.15	5.40	-29.62	53.25	68.20	14.95	PK	Horizontal


Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 20V

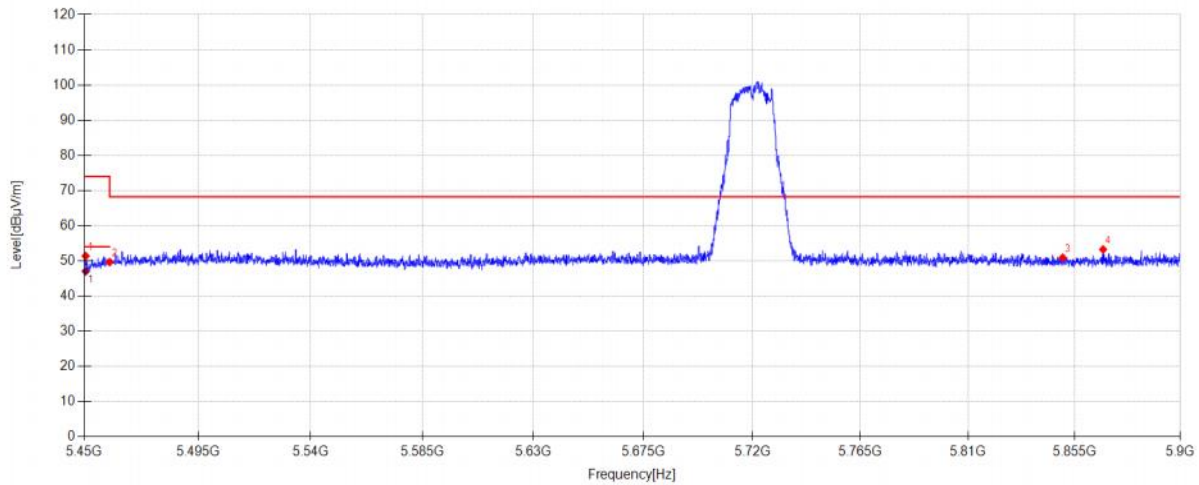

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.540	43.10	32.81	5.19	-29.71	51.39	74.00	22.61	PK	Vertical
2	5460.000	41.29	32.90	5.19	-29.71	49.67	68.20	18.53	PK	Vertical
3	5850.000	41.26	33.90	5.39	-29.63	50.92	68.20	17.28	PK	Vertical
4	5867.105	43.45	34.04	5.39	-29.63	53.25	68.20	14.95	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5450.540	38.75	32.81	5.19	47.04	54.00	6.96	AV	Vertical	

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 20V

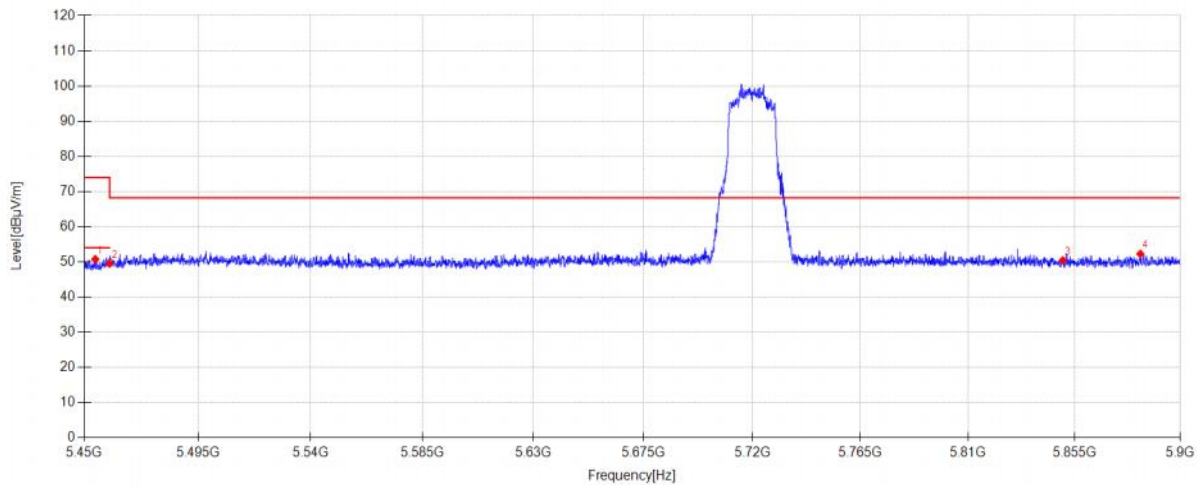


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.320	42.44	32.84	5.19	-29.71	50.76	74.00	23.24	PK	Horizontal
2	5460.000	41.14	32.90	5.19	-29.71	49.52	68.20	18.68	PK	Horizontal
3	5850.000	40.77	33.90	5.39	-29.63	50.43	68.20	17.77	PK	Horizontal
4	5882.945	42.34	34.16	5.40	-29.62	52.28	68.20	15.92	PK	Horizontal

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 20V

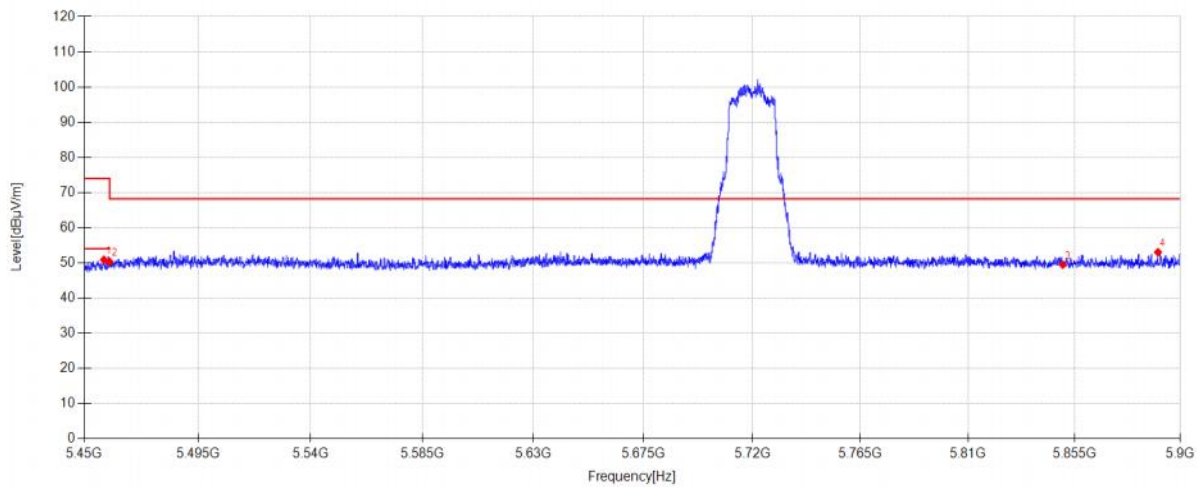


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.740	42.52	32.88	5.19	-29.71	50.88	74.00	23.12	PK	Vertical
2	5460.000	41.93	32.90	5.19	-29.71	50.31	68.20	17.89	PK	Vertical
3	5850.000	39.83	33.90	5.39	-29.63	49.49	68.20	18.71	PK	Vertical
4	5890.460	43.03	34.22	5.41	-29.62	53.04	68.20	15.16	PK	Vertical

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 20V

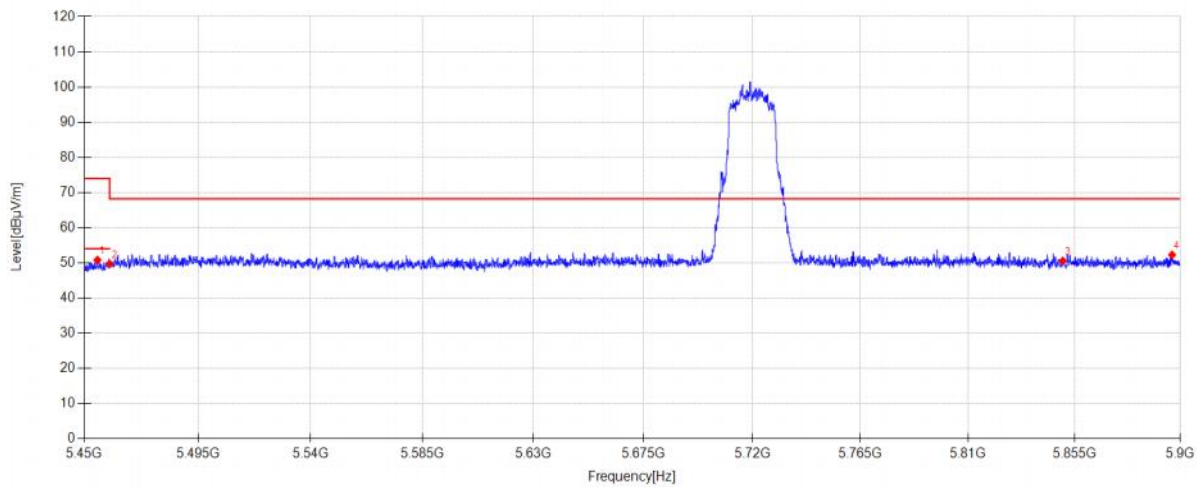

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.175	42.50	32.85	5.19	-29.71	50.83	74.00	23.17	PK	Horizontal
2	5460.000	41.31	32.90	5.19	-29.71	49.69	68.20	18.51	PK	Horizontal
3	5850.000	40.92	33.90	5.39	-29.63	50.58	68.20	17.62	PK	Horizontal
4	5896.490	42.22	34.27	5.41	-29.62	52.28	68.20	15.92	PK	Horizontal


Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 20V

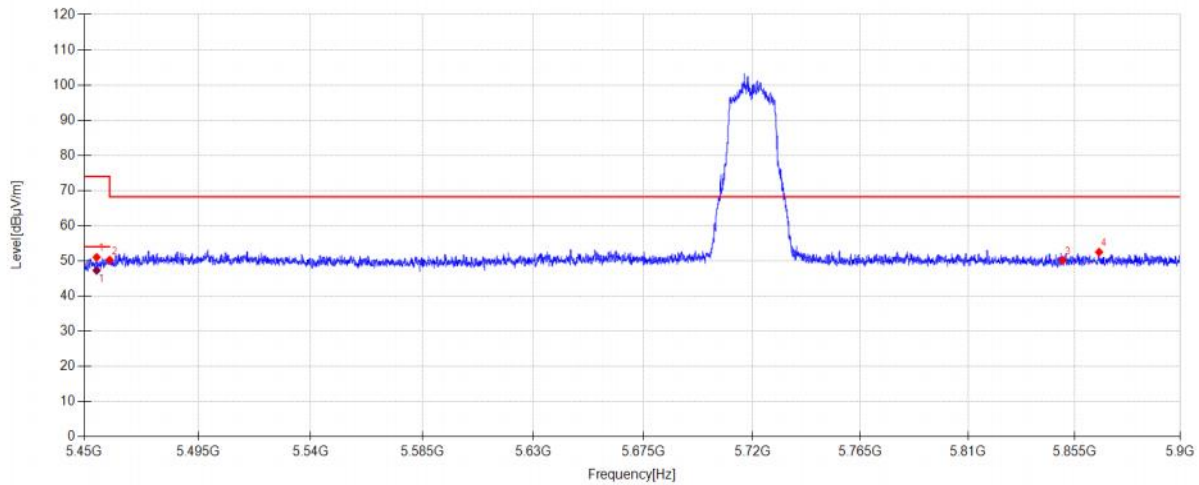

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.860	42.72	32.85	5.19	-29.71	51.05	74.00	22.95	PK	Vertical
2	5460.000	41.88	32.90	5.19	-29.71	50.26	68.20	17.94	PK	Vertical
3	5850.000	40.59	33.90	5.39	-29.63	50.25	68.20	17.95	PK	Vertical
4	5865.395	42.72	34.02	5.39	-29.63	52.50	68.20	15.70	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.860	38.95	32.85	5.19	47.28	54.00	6.72	AV	Vertical	


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 20V

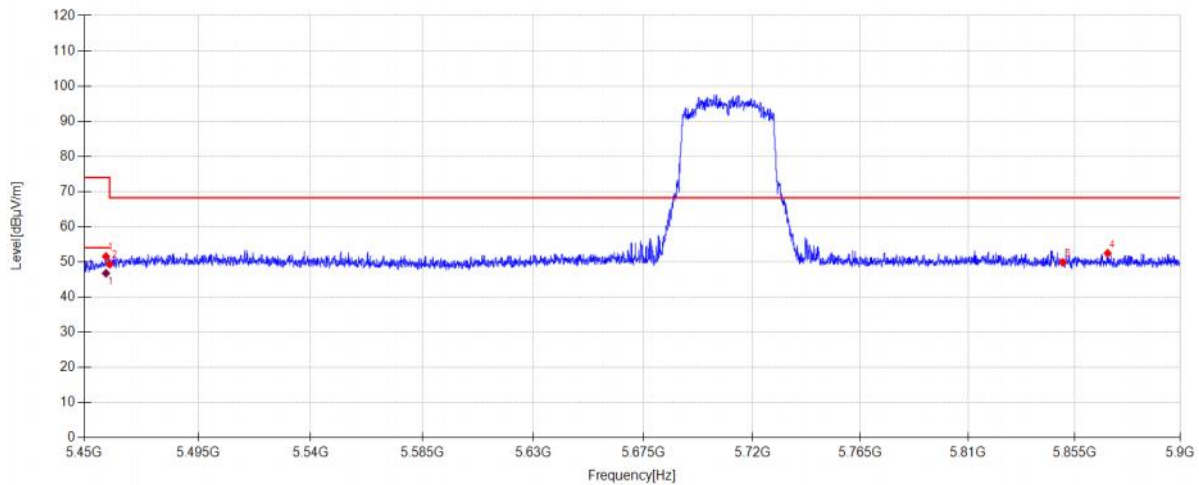

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.550	43.17	32.89	5.19	-29.71	51.54	74.00	22.46	PK	Horizontal
2	5460.000	40.94	32.90	5.19	-29.71	49.32	68.20	18.88	PK	Horizontal
3	5850.000	40.20	33.90	5.39	-29.63	49.86	68.20	18.34	PK	Horizontal
4	5869.040	42.65	34.05	5.39	-29.63	52.46	68.20	15.74	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.550	38.39	32.89	5.19	46.76	54.00	7.24	AV	Horizontal	


Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 20V

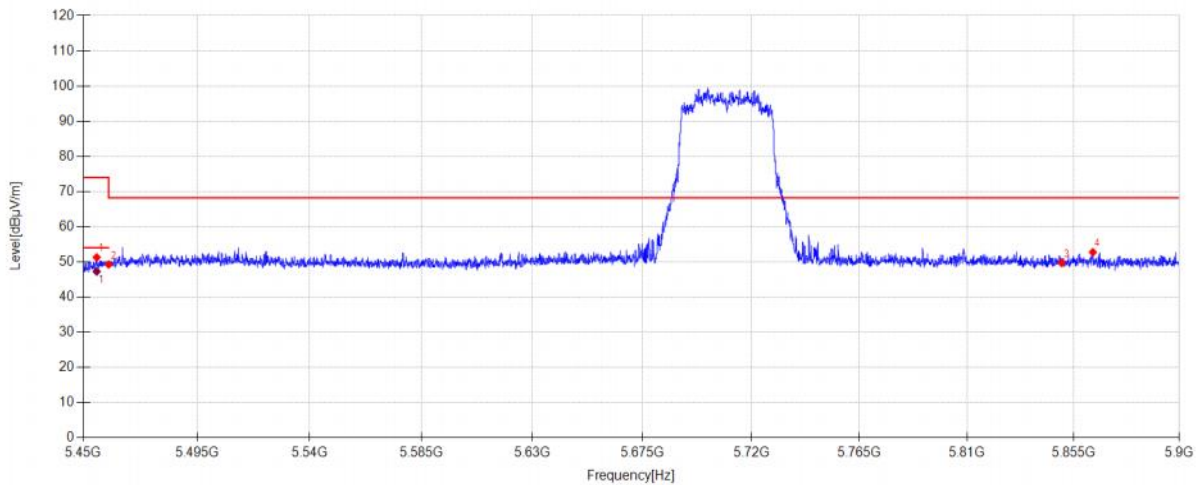

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.265	42.95	32.85	5.19	-29.71	51.28	74.00	22.72	PK	Vertical
2	5460.000	40.89	32.90	5.19	-29.71	49.27	68.20	18.93	PK	Vertical
3	5850.000	40.05	33.90	5.39	-29.63	49.71	68.20	18.49	PK	Vertical
4	5863.190	42.98	34.01	5.39	-29.63	52.75	68.20	15.45	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.265	38.94	32.85	5.19	47.27	54.00	6.73	AV	Vertical	


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 20V

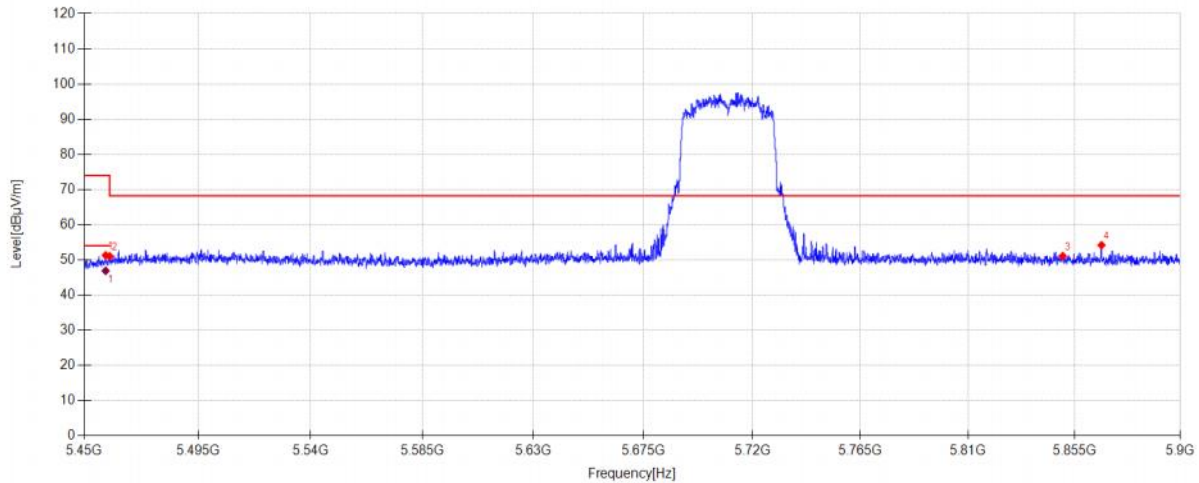

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.415	42.95	32.88	5.19	-29.71	51.31	74.00	22.69	PK	Horizontal
2	5460.000	42.66	32.90	5.19	-29.71	51.04	68.20	17.16	PK	Horizontal
3	5850.000	41.43	33.90	5.39	-29.63	51.09	68.20	17.11	PK	Horizontal
4	5866.430	44.40	34.03	5.39	-29.63	54.19	68.20	14.01	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.415	38.54	32.88	5.19	46.90	54.00	7.10	AV	Horizontal	

Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 20V

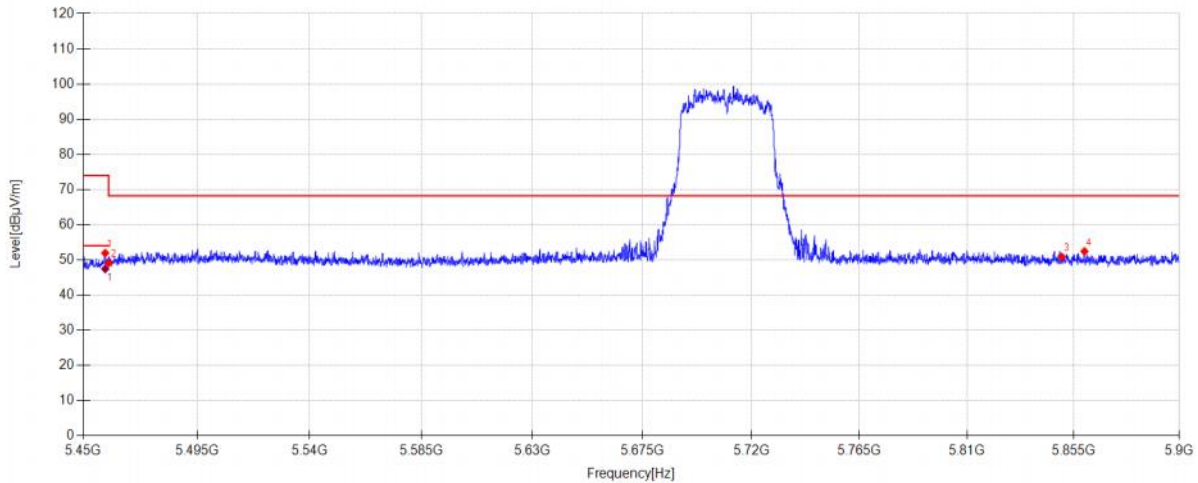

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.640	43.56	32.89	5.19	-29.71	51.93	74.00	22.07	PK	Vertical
2	5460.000	40.72	32.90	5.19	-29.71	49.10	68.20	19.10	PK	Vertical
3	5850.000	41.18	33.90	5.39	-29.63	50.84	68.20	17.36	PK	Vertical
4	5859.635	42.70	33.98	5.39	-29.63	52.44	68.20	15.76	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.640	39.06	32.89	5.19	47.43	54.00	6.57	AV	Vertical	