



Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 20V

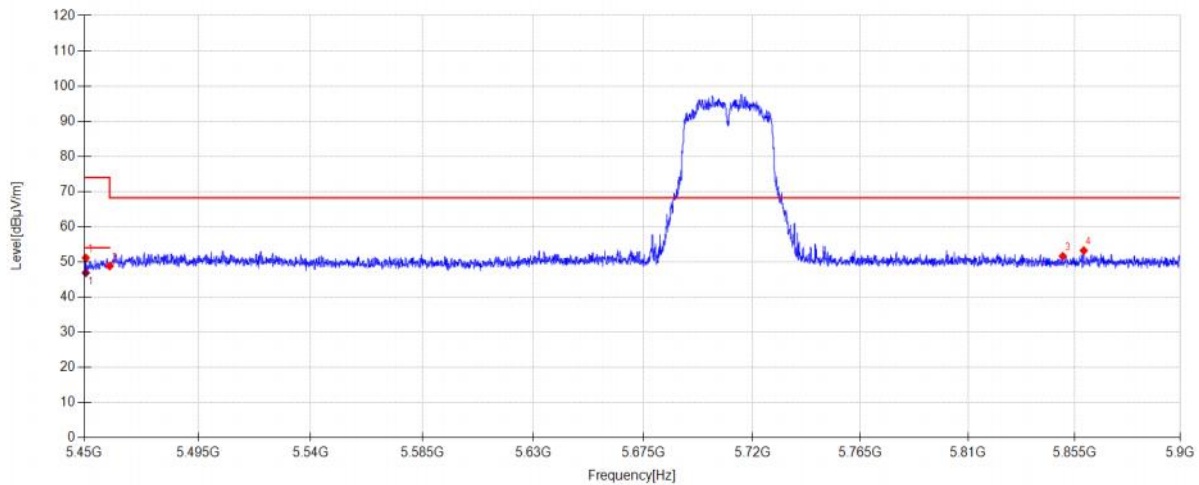

Suspected Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.585	42.86	32.81	5.19	-29.71	51.15	74.00	22.85	PK	Horizontal
2	5460.000	40.42	32.90	5.19	-29.71	48.80	68.20	19.40	PK	Horizontal
3	5850.000	41.96	33.90	5.39	-29.63	51.62	68.20	16.58	PK	Horizontal
4	5858.915	43.49	33.97	5.39	-29.63	53.22	68.20	14.98	PK	Horizontal


Final Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5450.585	38.60	32.81	5.19	46.89	54.00	7.11	AV	Horizontal	

Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 20V

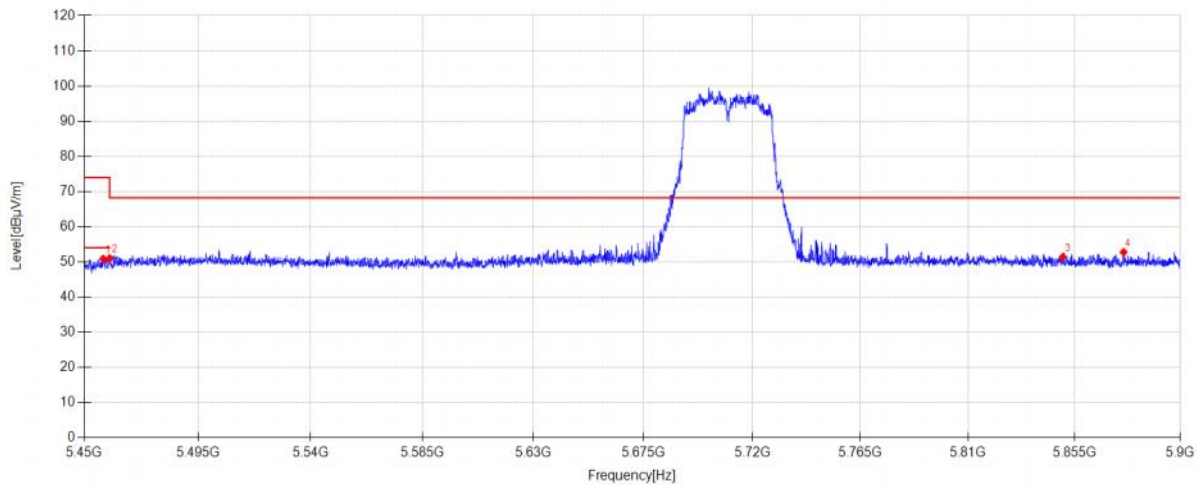


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.470	42.52	32.87	5.19	-29.71	50.87	74.00	23.13	PK	Vertical
2	5460.000	42.63	32.90	5.19	-29.71	51.01	68.20	17.19	PK	Vertical
3	5850.000	41.72	33.90	5.39	-29.63	51.38	68.20	16.82	PK	Vertical
4	5875.835	42.88	34.11	5.40	-29.62	52.77	68.20	15.43	PK	Vertical

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 20V

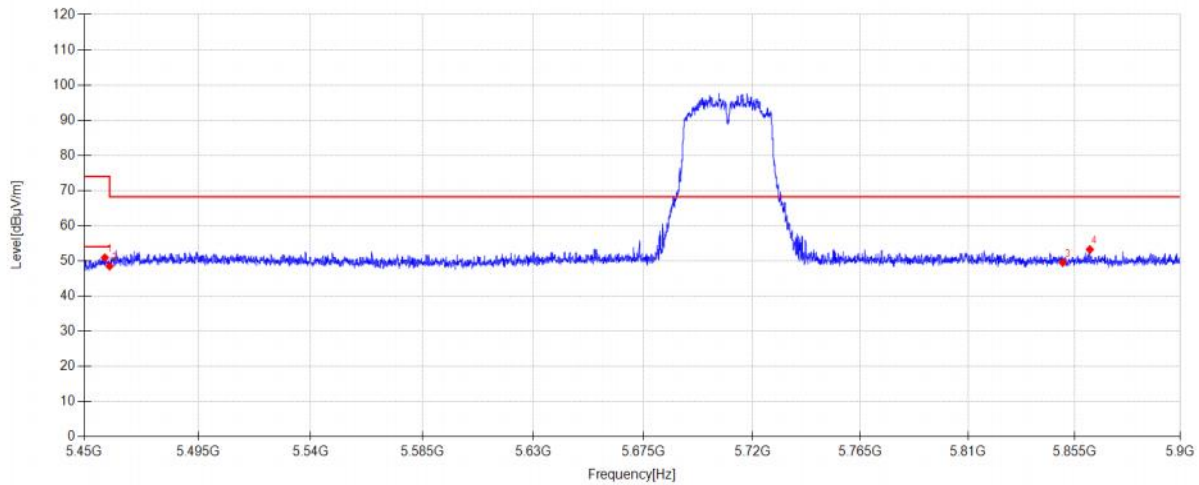


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.100	42.57	32.88	5.19	-29.71	50.93	74.00	23.07	PK	Horizontal
2	5460.000	40.10	32.90	5.19	-29.71	48.48	68.20	19.72	PK	Horizontal
3	5850.000	39.86	33.90	5.39	-29.63	49.52	68.20	18.68	PK	Horizontal
4	5861.480	43.49	33.99	5.39	-29.63	53.24	68.20	14.96	PK	Horizontal

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 20V

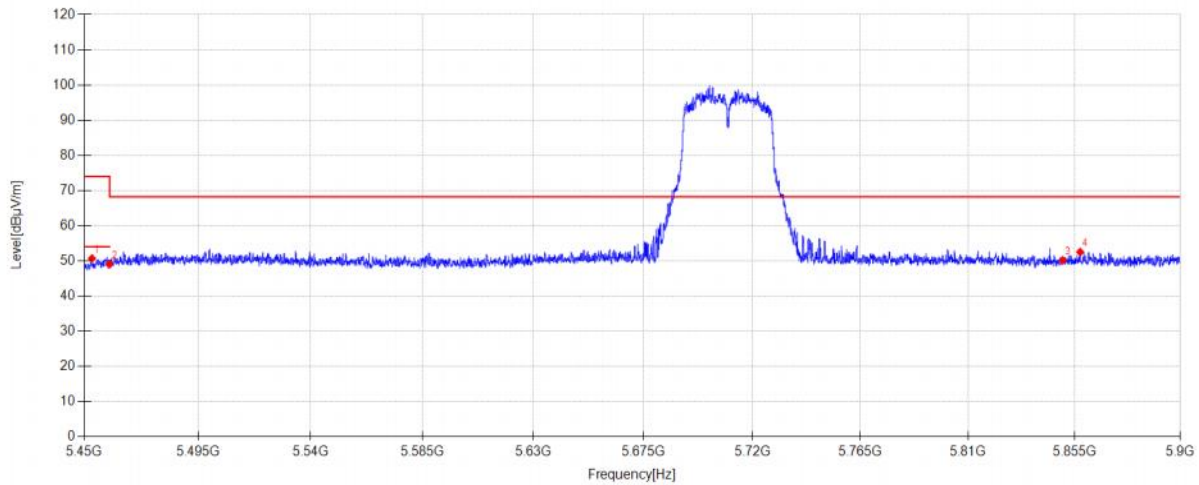

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.015	42.39	32.83	5.19	-29.71	50.70	74.00	23.30	PK	Vertical
2	5460.000	40.67	32.90	5.19	-29.71	49.05	68.20	19.15	PK	Vertical
3	5850.000	40.52	33.90	5.39	-29.63	50.18	68.20	18.02	PK	Vertical
4	5857.385	42.81	33.96	5.39	-29.63	52.53	68.20	15.67	PK	Vertical


Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 20V

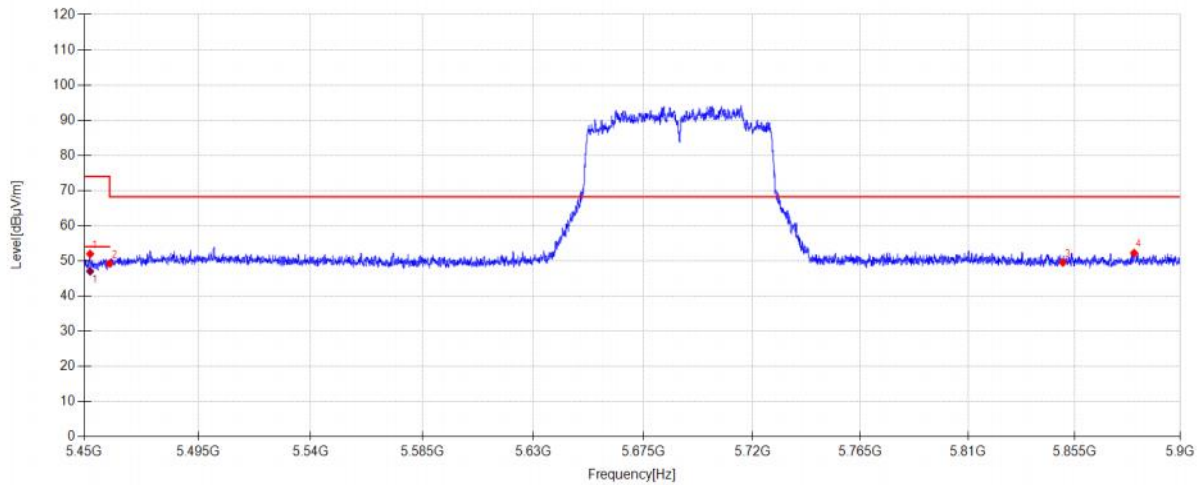

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.295	43.67	32.82	5.19	-29.71	51.97	74.00	22.03	PK	Horizontal
2	5460.000	40.85	32.90	5.19	-29.71	49.23	68.20	18.97	PK	Horizontal
3	5850.000	39.88	33.90	5.39	-29.63	49.54	68.20	18.66	PK	Horizontal
4	5880.290	42.33	34.14	5.40	-29.62	52.25	68.20	15.95	PK	Horizontal


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5452.295	38.74	32.82	5.19	47.04	54.00	6.96	AV	Horizontal	

Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 20V

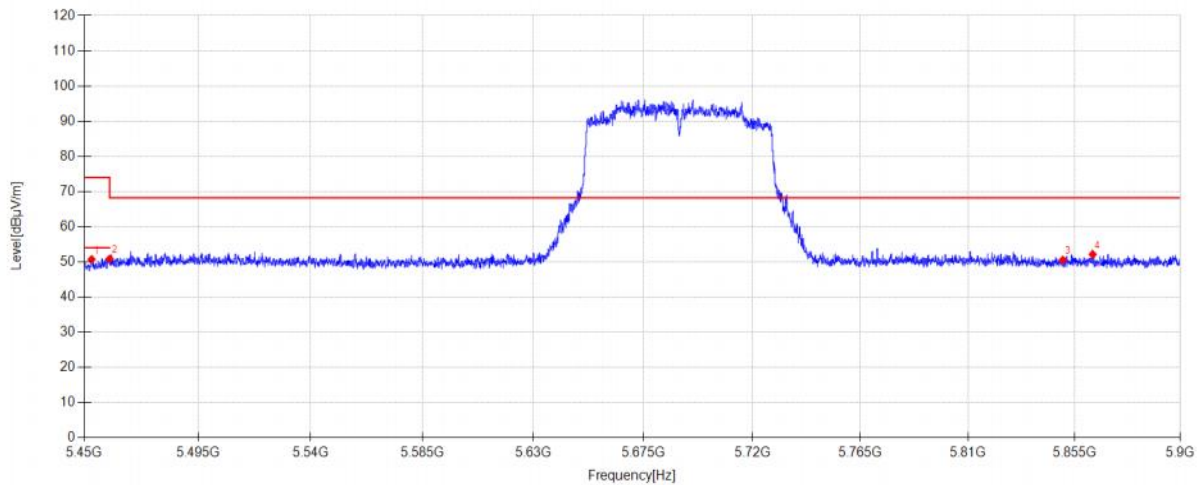

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.880	42.42	32.83	5.19	-29.71	50.73	74.00	23.27	PK	Vertical
2	5460.000	42.50	32.90	5.19	-29.71	50.88	68.20	17.32	PK	Vertical
3	5850.000	40.87	33.90	5.39	-29.63	50.53	68.20	17.67	PK	Vertical
4	5862.695	42.38	34.00	5.39	-29.63	52.14	68.20	16.06	PK	Vertical


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 20V

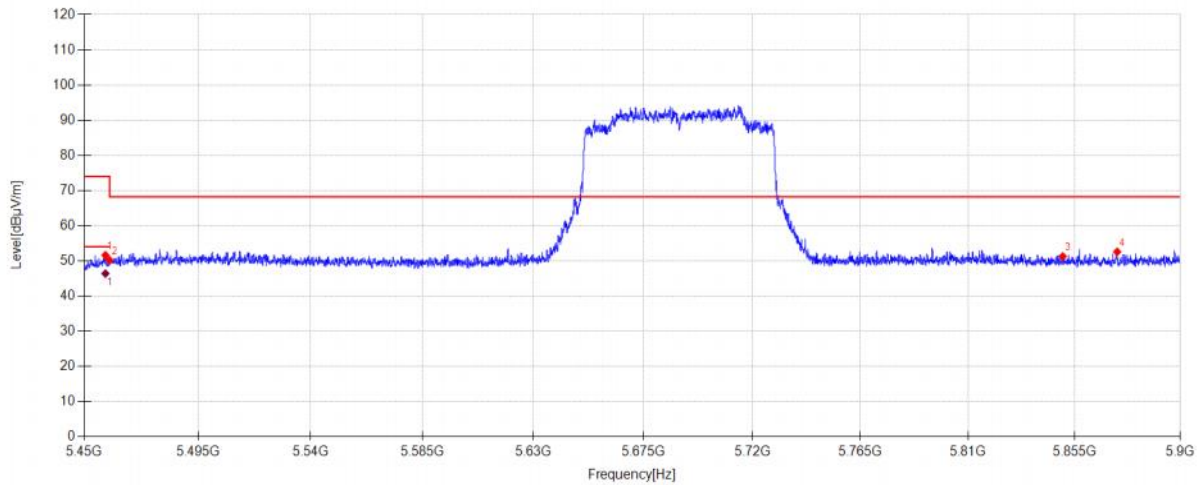

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.325	43.26	32.88	5.19	-29.71	51.62	74.00	22.38	PK	Horizontal
2	5460.000	41.80	32.90	5.19	-29.71	50.18	68.20	18.02	PK	Horizontal
3	5850.000	41.60	33.90	5.39	-29.63	51.26	68.20	16.94	PK	Horizontal
4	5873.090	42.72	34.08	5.40	-29.63	52.57	68.20	15.63	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.325	38.03	32.88	5.19	46.39	54.00	7.61	AV	Horizontal	


Test Mode:	802. 11 AX80 MIMO	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 20V

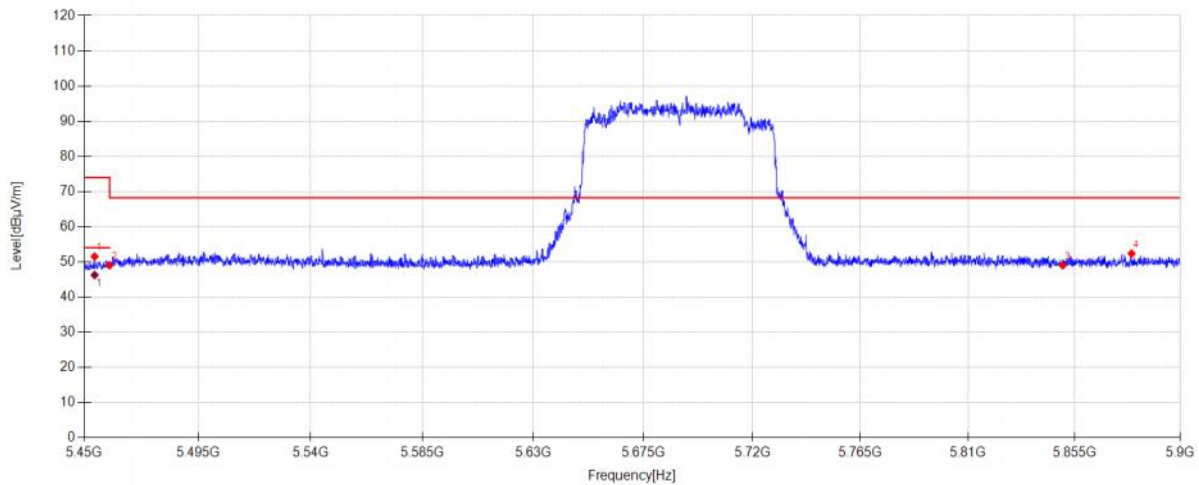

Suspected Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.050	43.21	32.84	5.19	-29.71	51.53	74.00	22.47	PK	Vertical
2	5460.000	40.64	32.90	5.19	-29.71	49.02	68.20	19.18	PK	Vertical
3	5850.000	39.34	33.90	5.39	-29.63	49.00	68.20	19.20	PK	Vertical
4	5879.210	42.45	34.13	5.40	-29.62	52.36	68.20	15.84	PK	Vertical

Final Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.050	37.96	32.84	5.19	46.28	54.00	7.72	AV	Vertical	


Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 20V

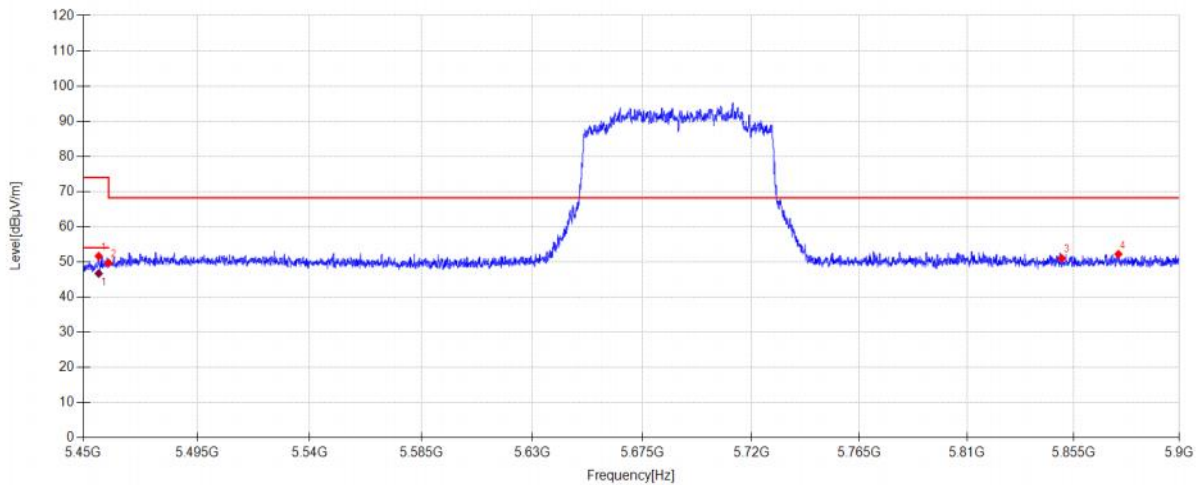

Suspected Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.075	43.30	32.86	5.19	-29.71	51.64	74.00	22.36	PK	Horizontal
2	5460.000	41.32	32.90	5.19	-29.71	49.70	68.20	18.50	PK	Horizontal
3	5850.000	41.35	33.90	5.39	-29.63	51.01	68.20	17.19	PK	Horizontal
4	5874.035	42.35	34.09	5.40	-29.63	52.21	68.20	15.99	PK	Horizontal

Final Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.075	38.36	32.86	5.19	46.70	54.00	7.30	AV	Horizontal	

Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 20V

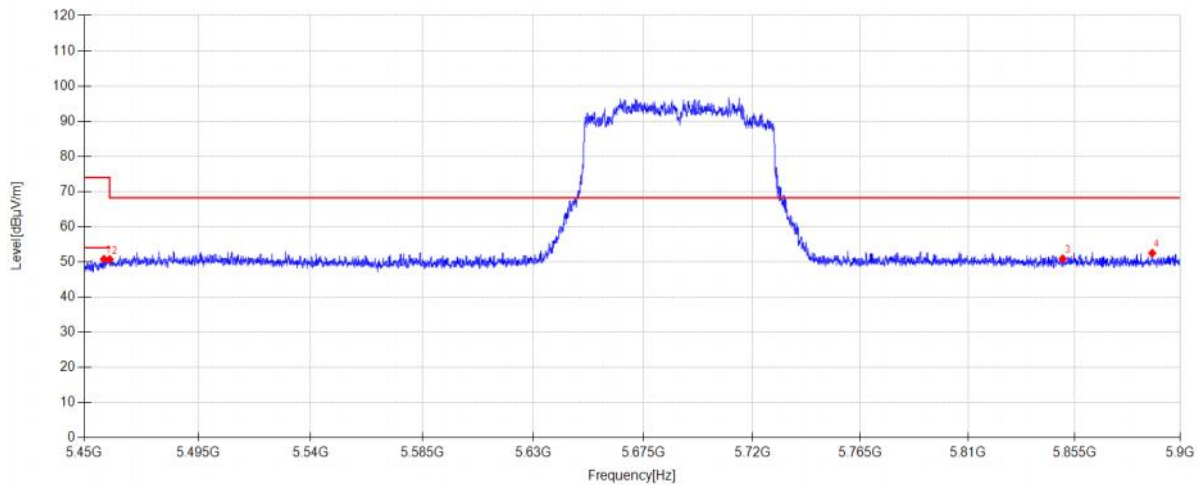


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.740	42.44	32.88	5.19	-29.71	50.80	74.00	23.20	PK	Vertical
2	5460.000	42.35	32.90	5.19	-29.71	50.73	68.20	17.47	PK	Vertical
3	5850.000	41.24	33.90	5.39	-29.63	50.90	68.20	17.30	PK	Vertical
4	5887.985	42.50	34.20	5.40	-29.62	52.48	68.20	15.72	PK	Vertical

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

Test Date:
EUT: Desktop Computer
Test Mode: ANT1 TX 11A 5745MHz Mode
Condition: Temp:23.5°C;Humi:56.5%
File Path: d:\ts\2025 report date\Q25090309-4E\FCC Above 1G 5.8G\7
Memo: Sample Number:S25090309-007;Power Setting:NA

Tested By: Li Xiongbin
Model Number: A2515
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

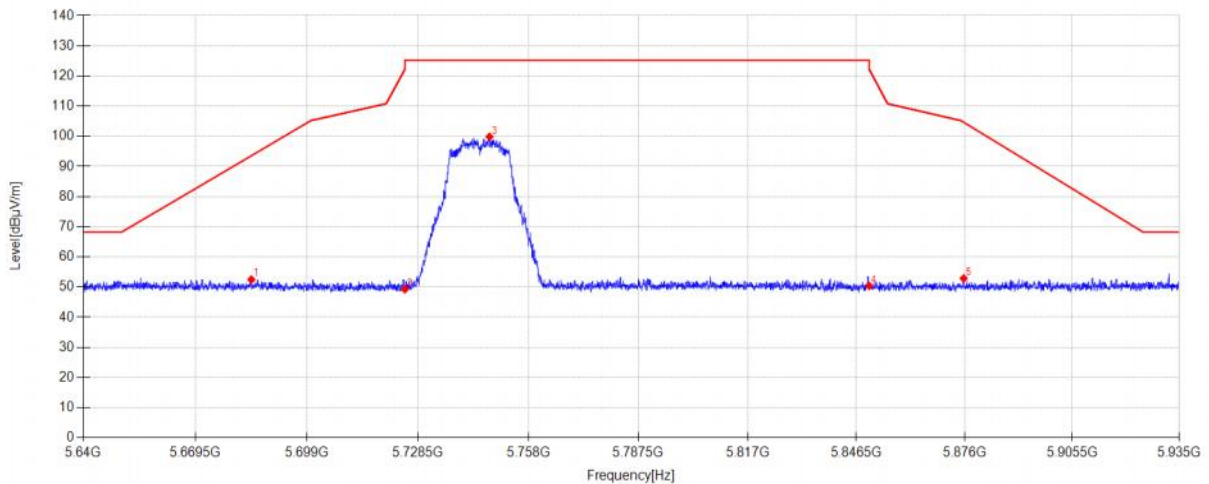


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5684.250	43.65	33.23	5.24	-29.66	52.46	93.55	41.09	PK	Horizontal
2	5725.000	40.20	33.45	5.26	-29.65	49.26	122.20	72.94	PK	Horizontal
3	5747.587	90.44	33.77	5.27	-29.65	99.83	125.20	25.37	PK	Horizontal
4	5850.000	40.77	33.90	5.31	-29.63	50.35	122.20	71.85	PK	Horizontal
5	5875.764	43.05	34.11	5.32	-29.62	52.86	104.63	51.77	PK	Horizontal

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 20V


Test Date:
EUT: Desktop Computer
Test Mode: ANT1 TX 11A 5745MHz Mode
Condition: Temp:23.5°C;Humi:56.5%
File Path: d:\ts\2025 report date\Q25090309-4E\FCC Above 1G 5.8G\8
Memo: Sample Number:S25090309-007;Power Setting:NA

Tested By: Li Xiongbín
Model Number: A2515
Power Supply: AC 120V/60Hz
Test Site: DDT 3# Chamber

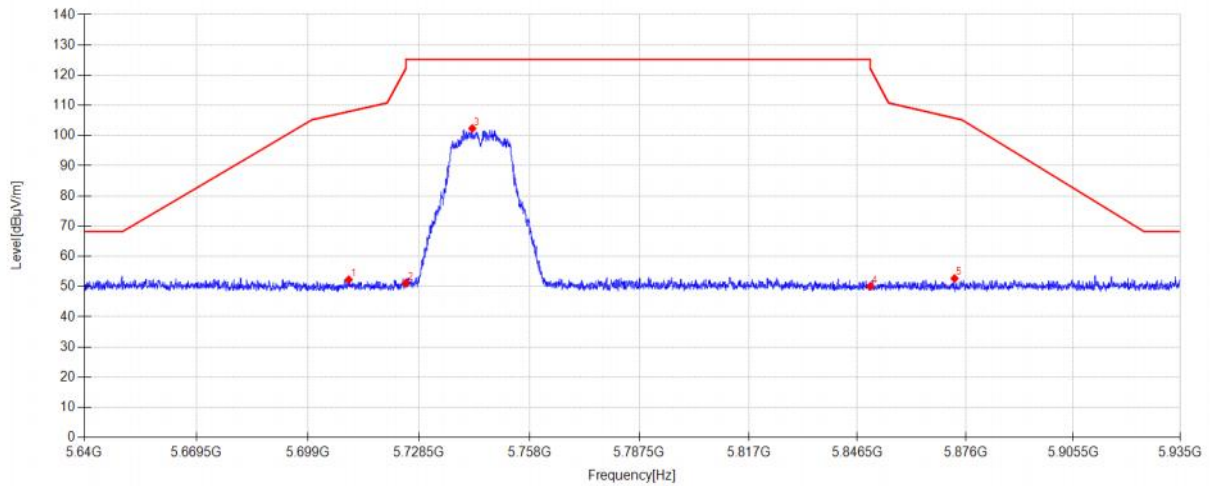


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.797	43.45	33.24	5.25	-29.66	52.28	107.94	55.66	PK	Vertical
2	5725.000	42.09	33.45	5.26	-29.65	51.15	122.20	71.05	PK	Vertical
3	5742.719	93.02	33.70	5.27	-29.65	102.34	125.20	22.86	PK	Vertical
4	5850.000	40.52	33.90	5.31	-29.63	50.10	122.20	72.10	PK	Vertical
5	5872.991	42.91	34.08	5.32	-29.63	52.68	105.76	53.08	PK	Vertical

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

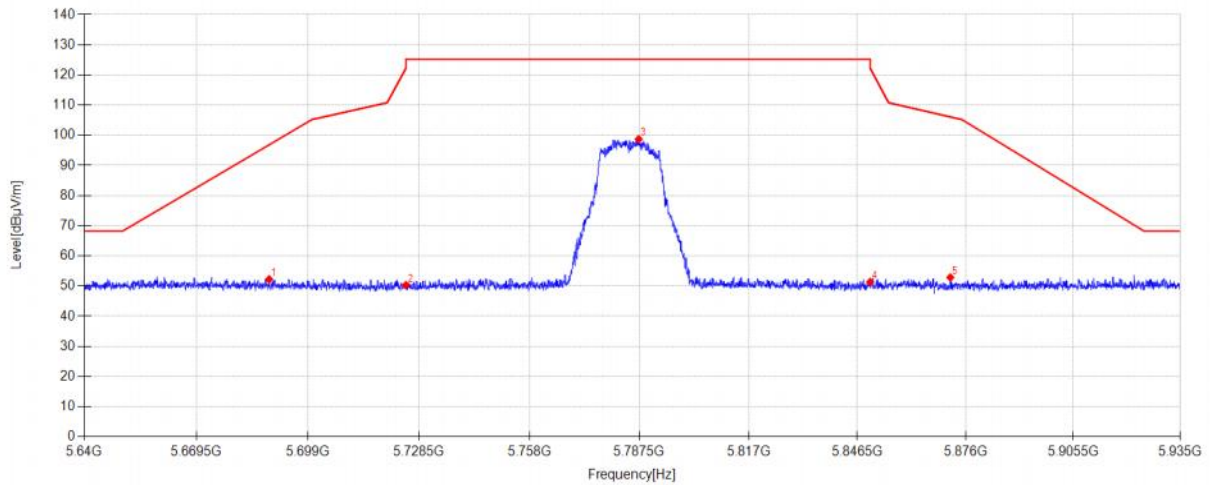


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.705	43.45	33.19	5.25	-29.66	52.23	96.84	44.61	PK	Horizontal
2	5725.000	41.23	33.45	5.26	-29.65	50.29	122.20	71.91	PK	Horizontal
3	5787.323	89.19	33.87	5.28	-29.64	98.70	125.20	26.50	PK	Horizontal
4	5850.000	41.76	33.90	5.31	-29.63	51.34	122.20	70.86	PK	Horizontal
5	5871.841	43.07	34.07	5.32	-29.63	52.83	106.08	53.25	PK	Horizontal

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

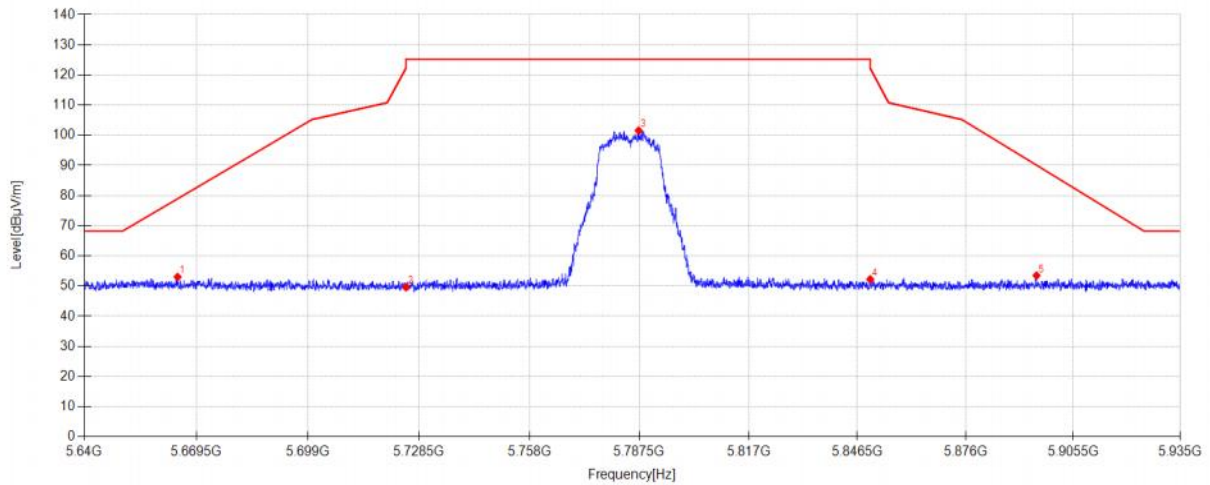


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5664.515	44.07	33.38	5.24	-29.67	53.02	78.94	25.92	PK	Vertical
2	5725.000	40.53	33.45	5.26	-29.65	49.59	122.20	72.61	PK	Vertical
3	5787.323	92.05	33.87	5.28	-29.64	101.56	125.20	23.64	PK	Vertical
4	5850.000	42.65	33.90	5.31	-29.63	52.23	122.20	69.97	PK	Vertical
5	5895.441	43.51	34.26	5.33	-29.62	53.48	90.07	36.59	PK	Vertical

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

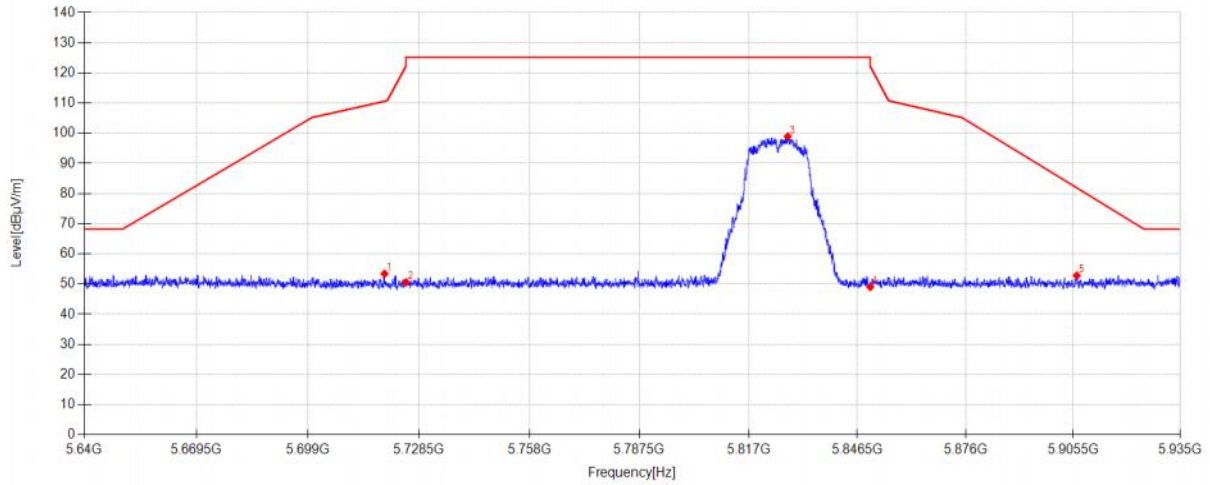


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.326	44.45	33.37	5.26	-29.66	53.42	110.61	57.19	PK	Horizontal
2	5725.000	41.51	33.45	5.26	-29.65	50.57	122.20	71.63	PK	Horizontal
3	5827.591	89.37	33.90	5.30	-29.63	98.94	125.20	26.26	PK	Horizontal
4	5850.000	39.42	33.90	5.31	-29.63	49.00	122.20	73.20	PK	Horizontal
5	5906.474	42.79	34.31	5.33	-29.62	52.81	81.91	29.10	PK	Horizontal

Test Mode:	802. 11 A Ant1	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

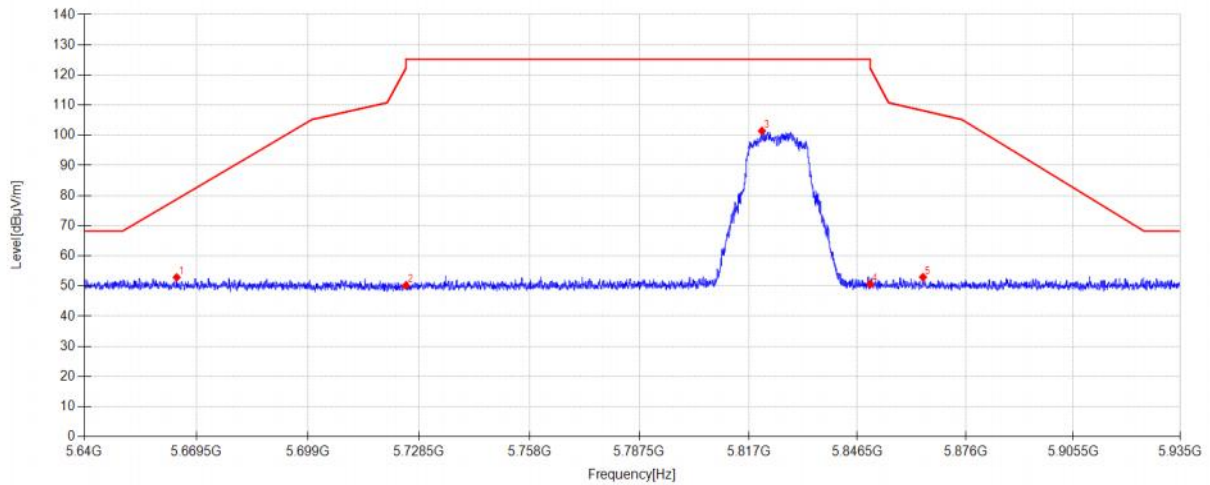


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5664.279	43.90	33.39	5.24	-29.67	52.86	78.77	25.91	PK	Vertical
2	5725.000	41.08	33.45	5.26	-29.65	50.14	122.20	72.06	PK	Vertical
3	5820.599	91.86	33.90	5.30	-29.64	101.42	125.20	23.78	PK	Vertical
4	5850.000	41.02	33.90	5.31	-29.63	50.60	122.20	71.60	PK	Vertical
5	5864.377	43.24	34.02	5.32	-29.63	52.95	108.17	55.22	PK	Vertical

Test Mode:	802. 11 A Ant2	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

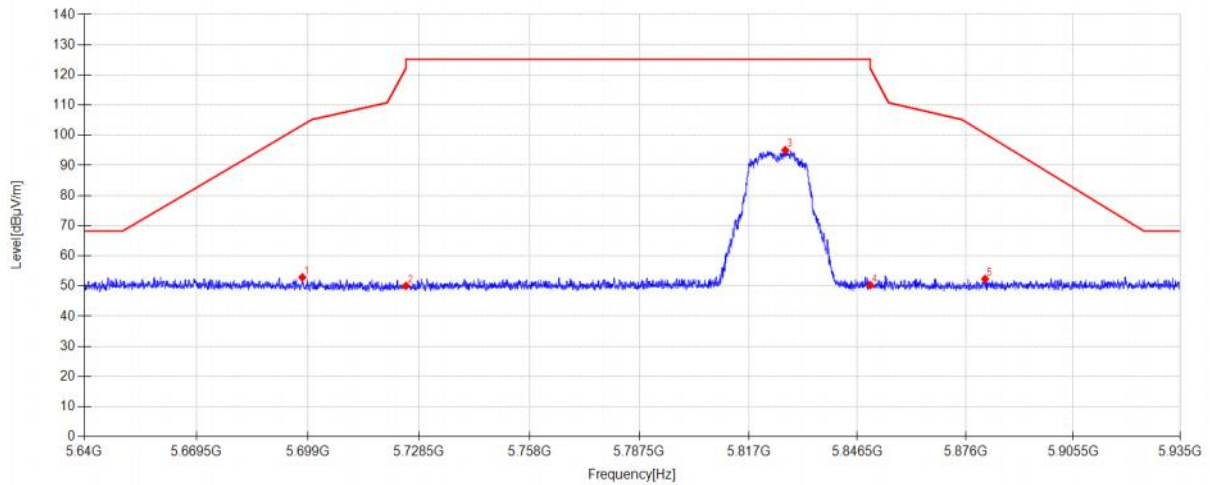


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.496	44.16	33.12	5.25	-29.66	52.87	103.35	50.48	PK	Horizontal
2	5725.000	40.98	33.45	5.26	-29.65	50.04	122.20	72.16	PK	Horizontal
3	5826.912	85.48	33.90	5.30	-29.63	95.05	125.20	30.15	PK	Horizontal
4	5850.000	40.70	33.90	5.31	-29.63	50.28	122.20	71.92	PK	Horizontal
5	5881.340	42.48	34.15	5.32	-29.62	52.33	100.51	48.18	PK	Horizontal

Test Mode:	802. 11 A Ant2	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

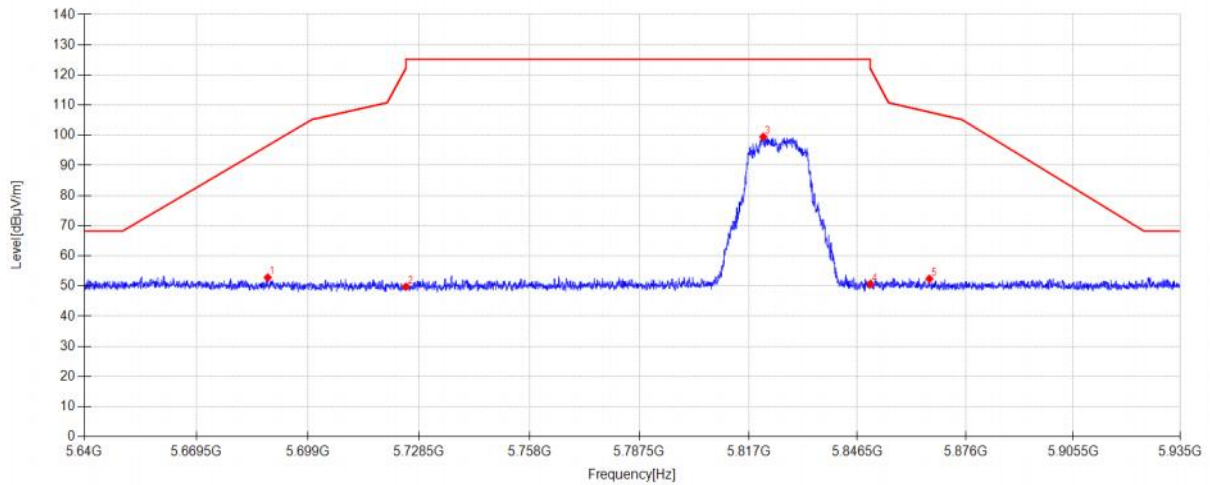


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.321	44.03	33.19	5.25	-29.66	52.81	96.56	43.75	PK	Vertical
2	5725.000	40.71	33.45	5.26	-29.65	49.77	122.20	72.43	PK	Vertical
3	5820.983	89.92	33.90	5.30	-29.64	99.48	125.20	25.72	PK	Vertical
4	5850.000	41.06	33.90	5.31	-29.63	50.64	122.20	71.56	PK	Vertical
5	5866.118	42.66	34.03	5.32	-29.63	52.38	107.69	55.31	PK	Vertical

Test Mode:	802. 11 A Ant2	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

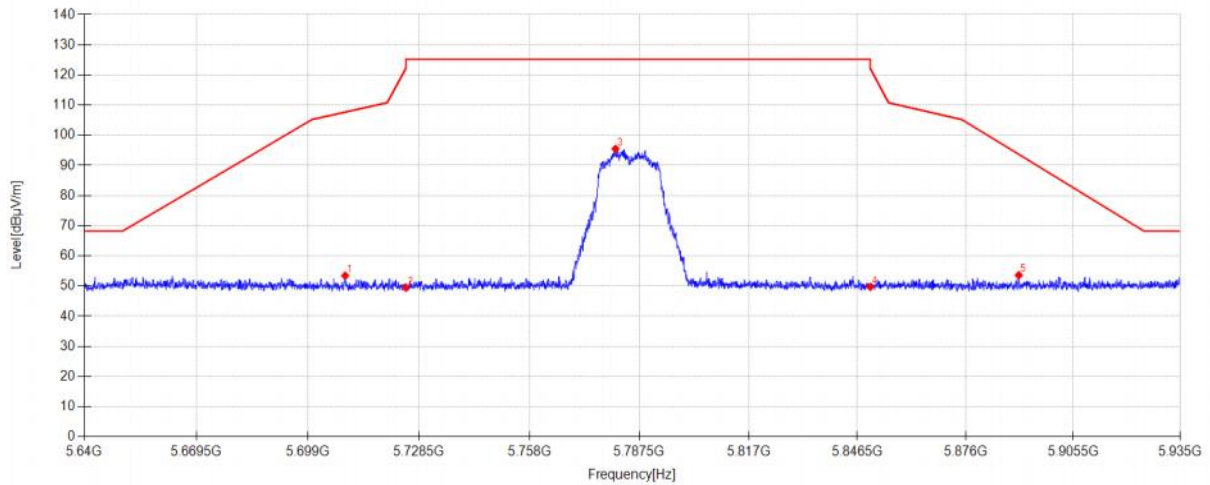


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.853	44.63	33.22	5.25	-29.66	53.44	107.68	54.24	PK	Horizontal
2	5725.000	40.40	33.45	5.26	-29.65	49.46	122.20	72.74	PK	Horizontal
3	5781.099	86.00	33.86	5.28	-29.64	95.50	125.20	29.70	PK	Horizontal
4	5850.000	40.14	33.90	5.31	-29.63	49.72	122.20	72.48	PK	Horizontal
5	5890.573	43.64	34.22	5.33	-29.62	53.57	93.68	40.11	PK	Horizontal

Test Mode:	802. 11 A Ant2	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

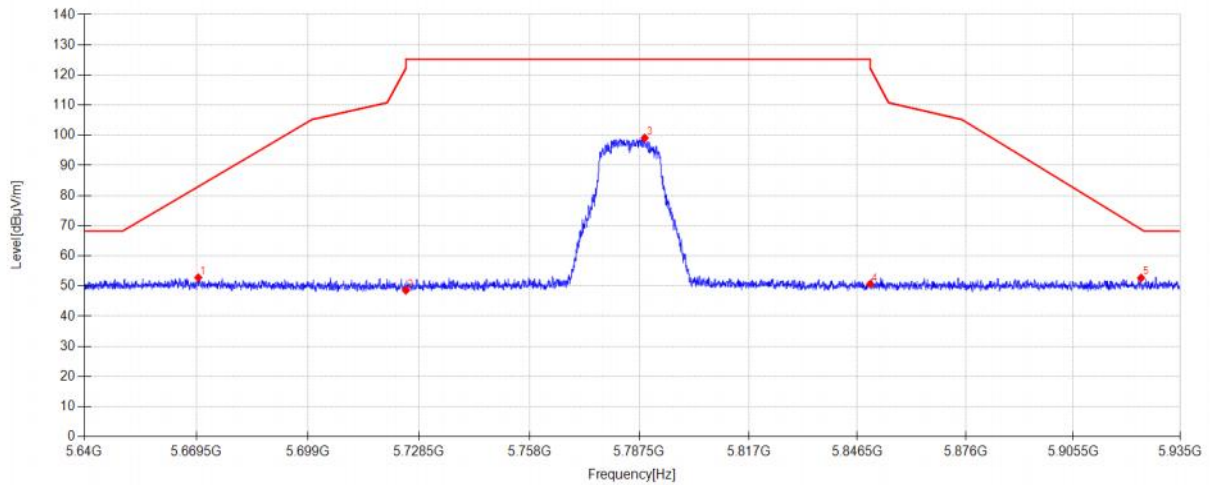


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5669.972	43.87	33.34	5.24	-29.67	52.78	82.98	30.20	PK	Vertical
2	5725.000	39.48	33.45	5.26	-29.65	48.54	122.20	73.66	PK	Vertical
3	5788.946	89.58	33.88	5.29	-29.64	99.11	125.20	26.09	PK	Vertical
4	5850.000	41.08	33.90	5.31	-29.63	50.66	122.20	71.54	PK	Vertical
5	5924.174	42.61	34.35	5.34	-29.62	52.68	68.81	16.13	PK	Vertical

Test Mode:	802. 11 A Ant2	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

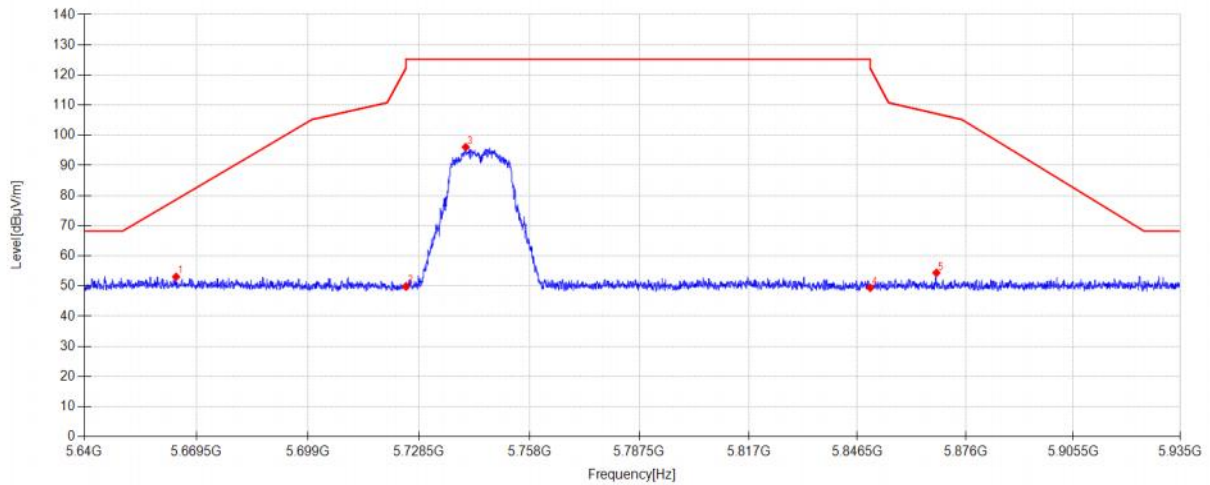


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5664.131	44.08	33.39	5.24	-29.67	53.04	78.66	25.62	PK	Horizontal
2	5725.000	40.77	33.45	5.26	-29.65	49.83	122.20	72.37	PK	Horizontal
3	5740.949	86.79	33.67	5.27	-29.65	96.08	125.20	29.12	PK	Horizontal
4	5850.000	39.84	33.90	5.31	-29.63	49.42	122.20	72.78	PK	Horizontal
5	5868.035	44.64	34.04	5.32	-29.63	54.37	107.15	52.78	PK	Horizontal

Test Mode:	802. 11 A Ant2	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 20V

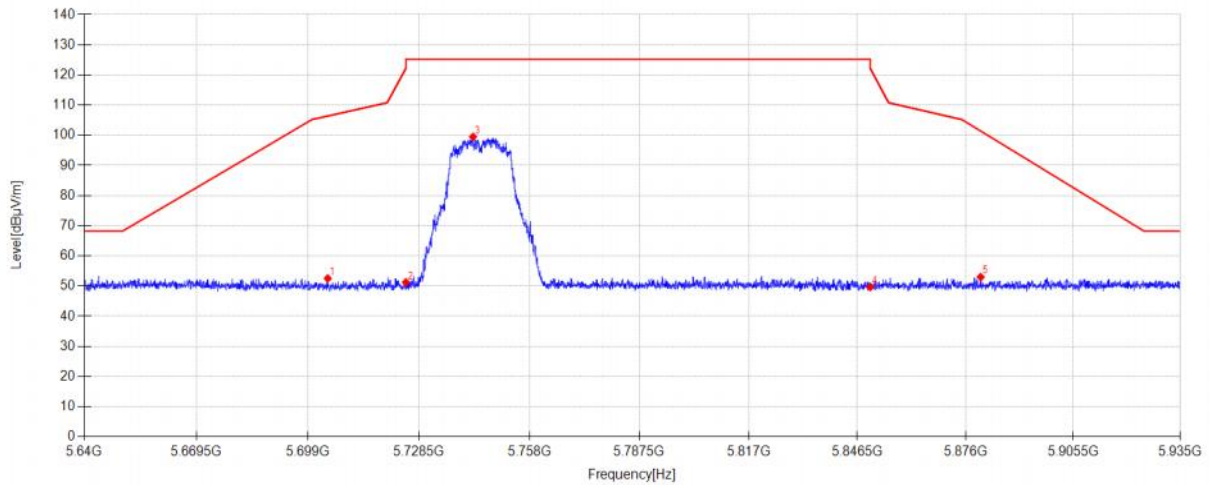


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.222	43.77	33.16	5.25	-29.66	52.52	106.38	53.86	PK	Vertical
2	5725.000	42.17	33.45	5.26	-29.65	51.23	122.20	70.97	PK	Vertical
3	5742.896	90.15	33.70	5.27	-29.65	99.47	125.20	25.73	PK	Vertical
4	5850.000	40.07	33.90	5.31	-29.63	49.65	122.20	72.55	PK	Vertical
5	5880.130	43.13	34.14	5.32	-29.62	52.97	101.40	48.43	PK	Vertical

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

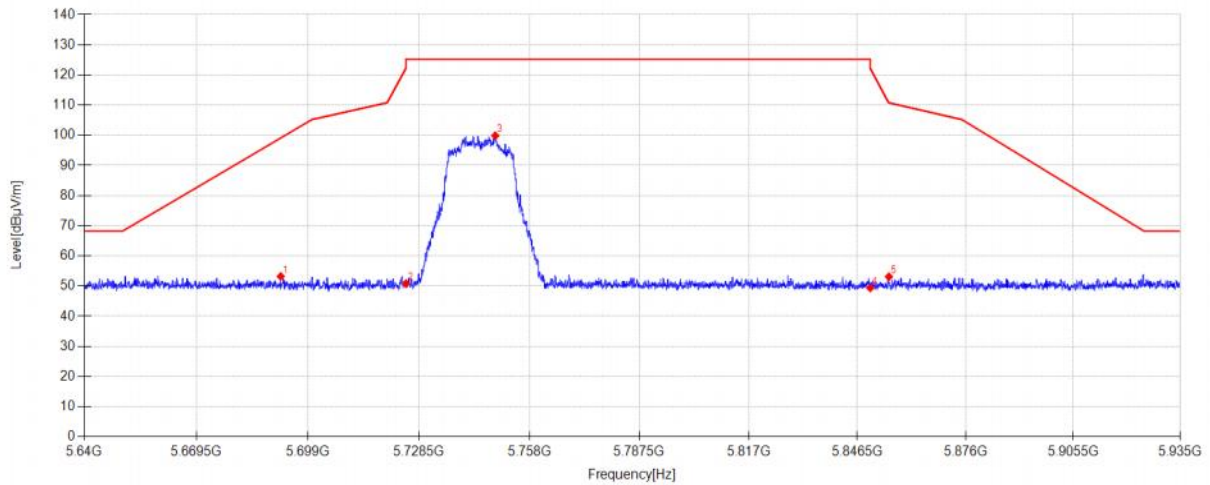


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.773	44.44	33.17	5.25	-29.66	53.20	99.11	45.91	PK	Horizontal
2	5725.000	41.73	33.45	5.26	-29.65	50.79	122.20	71.41	PK	Horizontal
3	5748.855	90.45	33.78	5.27	-29.65	99.85	125.20	25.35	PK	Horizontal
4	5850.000	39.79	33.90	5.31	-29.63	49.37	122.20	72.83	PK	Horizontal
5	5855.085	43.48	33.94	5.31	-29.63	53.10	110.78	57.68	PK	Horizontal

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 20V

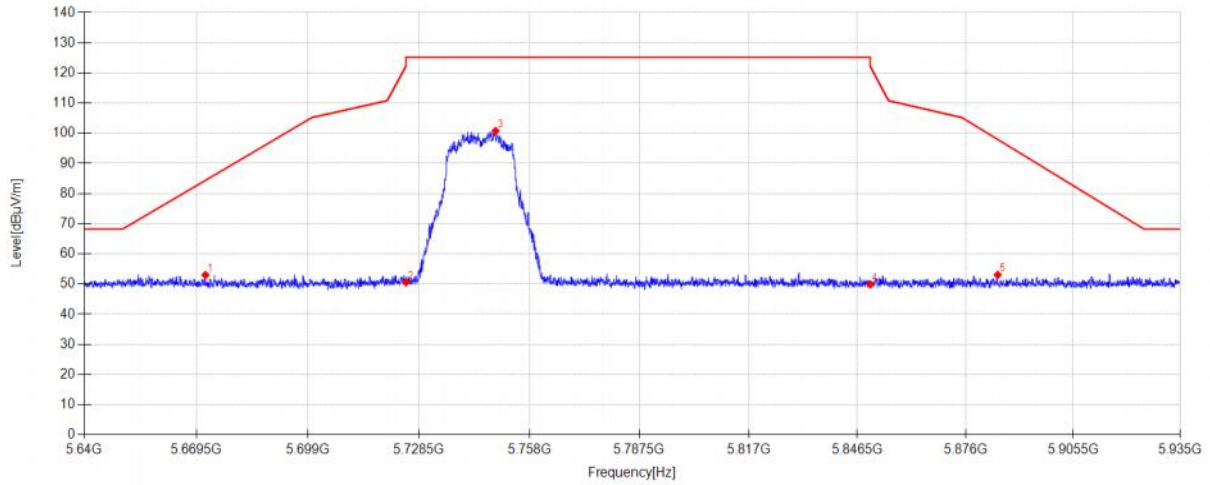


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5671.860	44.07	33.33	5.24	-29.67	52.97	84.38	31.41	PK	Vertical
2	5725.000	41.49	33.45	5.26	-29.65	50.55	122.20	71.65	PK	Vertical
3	5748.914	91.34	33.78	5.27	-29.65	100.74	125.20	24.46	PK	Vertical
4	5850.000	40.28	33.90	5.31	-29.63	49.86	122.20	72.34	PK	Vertical
5	5884.791	43.13	34.18	5.32	-29.62	53.01	97.95	44.94	PK	Vertical

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

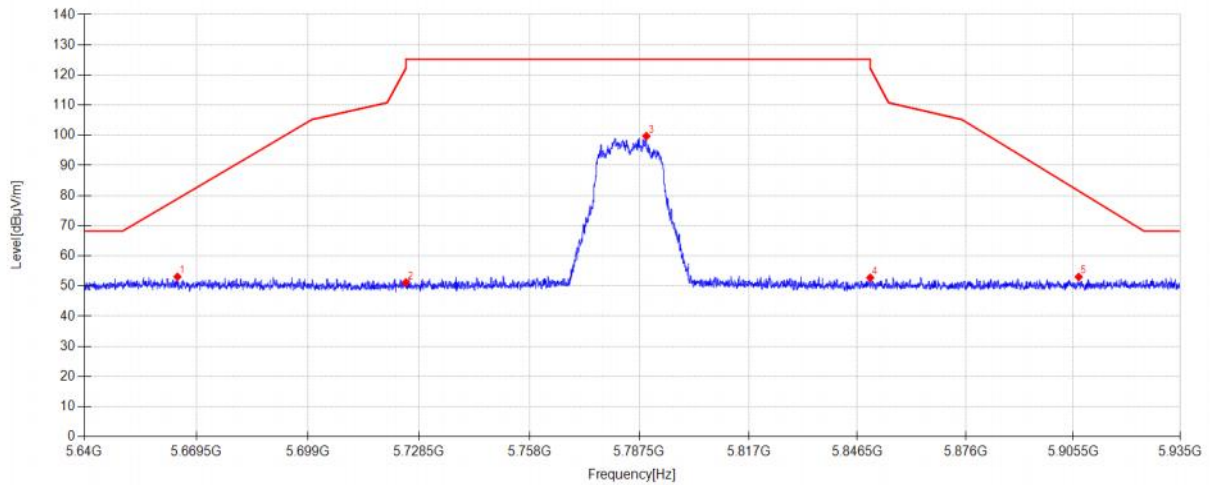


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5664.485	44.12	33.38	5.24	-29.67	53.07	78.92	25.85	PK	Horizontal
2	5725.000	42.13	33.45	5.26	-29.65	51.19	122.20	71.01	PK	Horizontal
3	5789.388	90.17	33.88	5.29	-29.64	99.70	125.20	25.50	PK	Horizontal
4	5850.000	43.16	33.90	5.31	-29.63	52.74	122.20	69.46	PK	Horizontal
5	5907.005	43.01	34.31	5.33	-29.62	53.03	81.52	28.49	PK	Horizontal

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

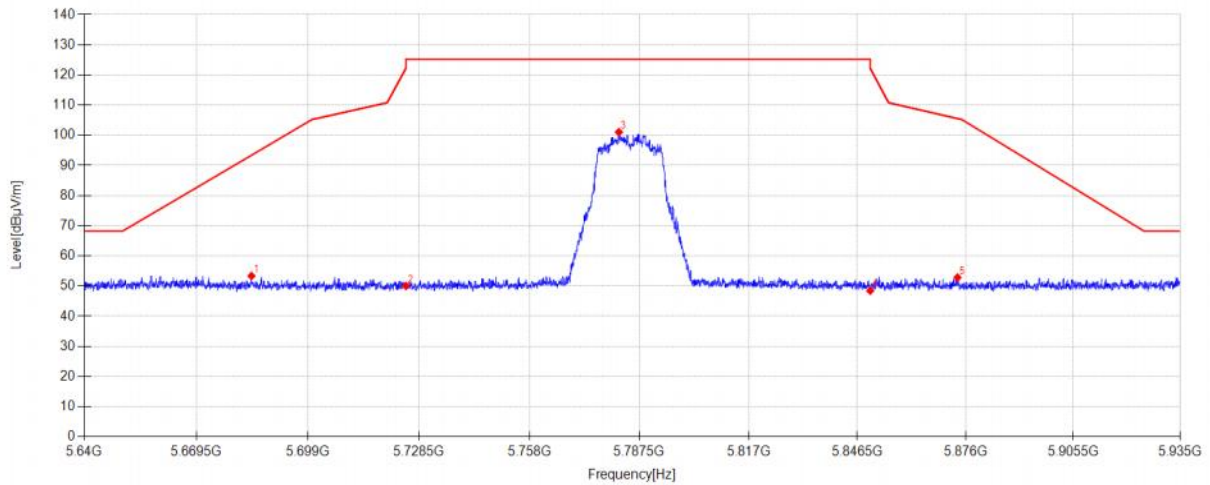


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5684.014	44.54	33.23	5.24	-29.66	53.35	93.37	40.02	PK	Vertical
2	5725.000	40.96	33.45	5.26	-29.65	50.02	122.20	72.18	PK	Vertical
3	5782.013	91.56	33.86	5.28	-29.64	101.06	125.20	24.14	PK	Vertical
4	5850.000	38.88	33.90	5.31	-29.63	48.46	122.20	73.74	PK	Vertical
5	5873.817	43.04	34.09	5.32	-29.63	52.82	105.53	52.71	PK	Vertical

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

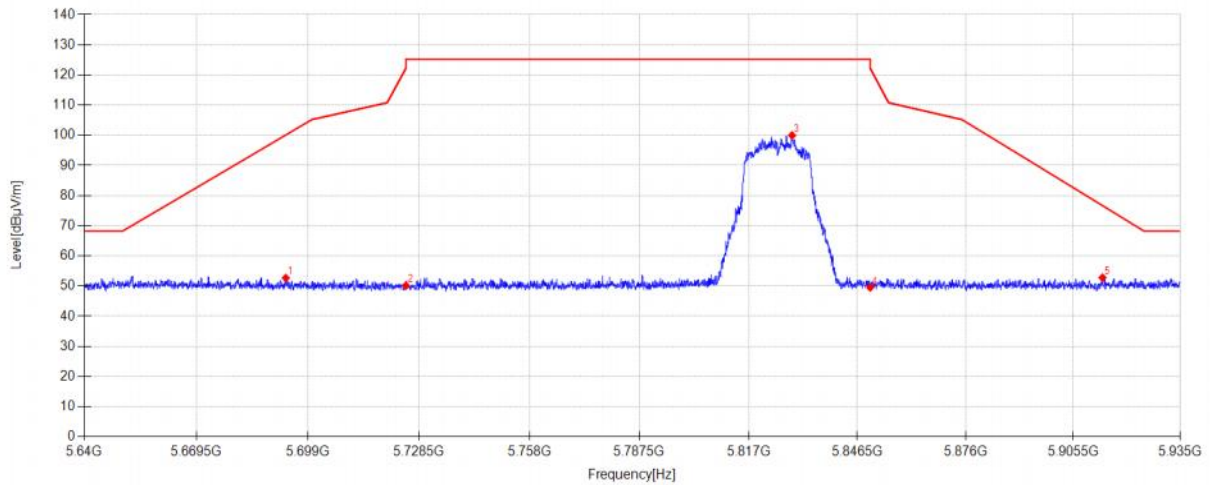


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5693.100	43.92	33.16	5.25	-29.66	52.67	100.09	47.42	PK	Horizontal
2	5725.000	41.06	33.45	5.26	-29.65	50.12	122.20	72.08	PK	Horizontal
3	5828.771	90.38	33.90	5.30	-29.63	99.95	125.20	25.25	PK	Horizontal
4	5850.000	39.94	33.90	5.31	-29.63	49.52	122.20	72.68	PK	Horizontal
5	5913.554	42.73	34.33	5.34	-29.62	52.78	76.67	23.89	PK	Horizontal

Test Mode:	802. 11 N20 MIMO	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

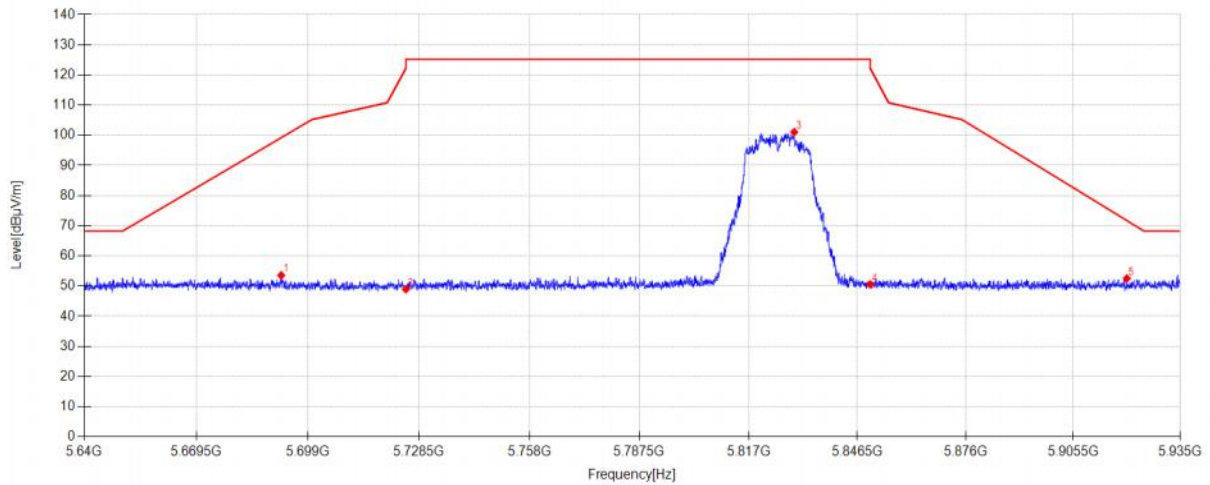


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.891	44.80	33.16	5.25	-29.66	53.55	99.20	45.65	PK	Vertical
2	5725.000	39.87	33.45	5.26	-29.65	48.93	122.20	73.27	PK	Vertical
3	5829.361	91.49	33.90	5.30	-29.63	101.06	125.20	24.14	PK	Vertical
4	5850.000	40.96	33.90	5.31	-29.63	50.54	122.20	71.66	PK	Vertical
5	5920.250	42.44	34.34	5.34	-29.62	52.50	71.72	19.22	PK	Vertical

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

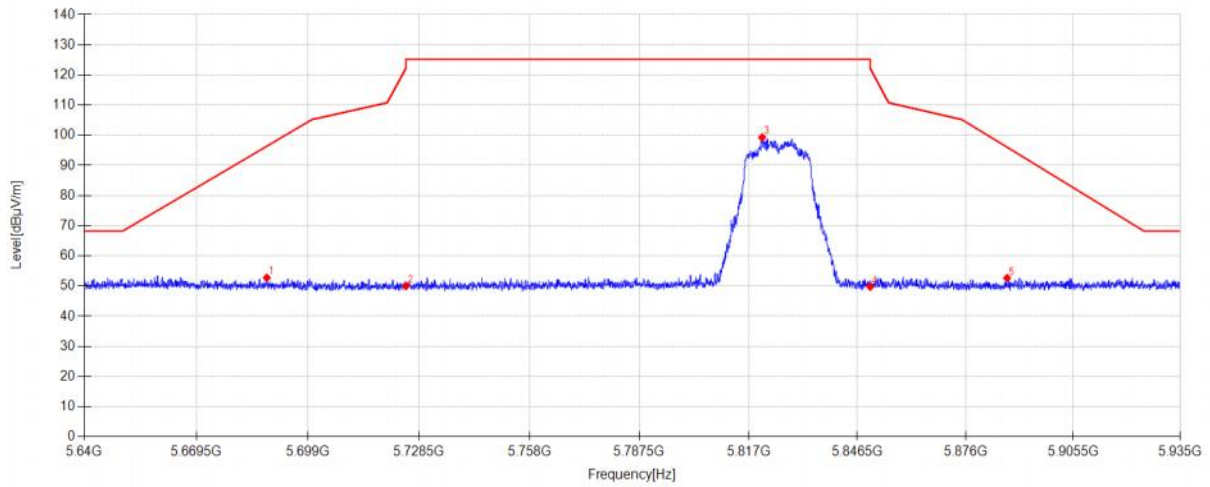


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.085	43.94	33.20	5.25	-29.66	52.73	96.38	43.65	PK	Horizontal
2	5725.000	40.91	33.45	5.26	-29.65	49.97	122.20	72.23	PK	Horizontal
3	5820.658	89.71	33.90	5.30	-29.64	99.27	125.20	25.93	PK	Horizontal
4	5850.000	40.20	33.90	5.31	-29.63	49.78	122.20	72.42	PK	Horizontal
5	5887.358	42.74	34.20	5.32	-29.62	52.64	96.06	43.42	PK	Horizontal

Test Mode:	802.11 AC20 MIMO	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

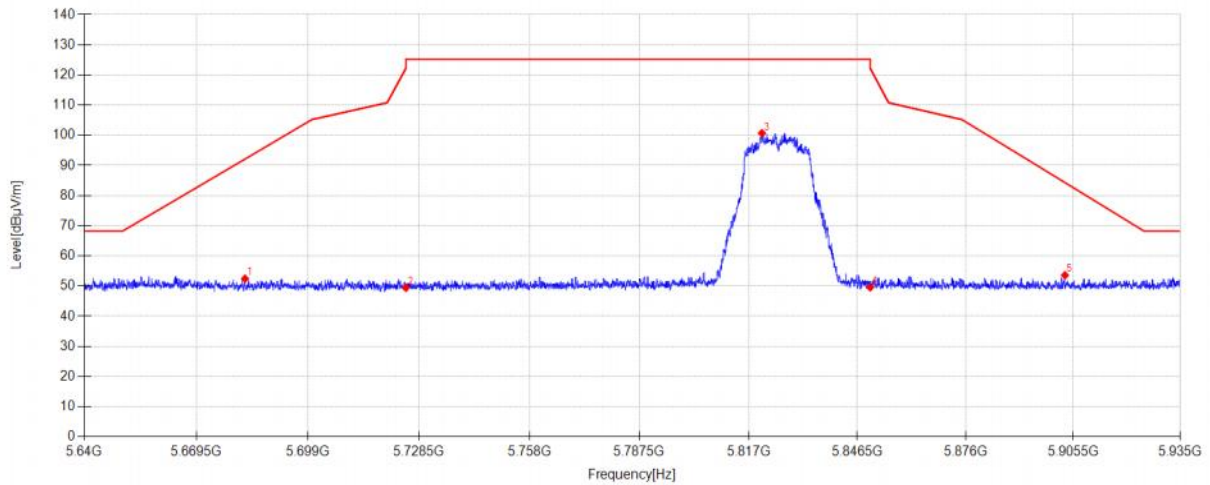


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5682.303	43.61	33.24	5.24	-29.66	52.43	92.10	39.67	PK	Vertical
2	5725.000	40.37	33.45	5.26	-29.65	49.43	122.20	72.77	PK	Vertical
3	5820.599	91.12	33.90	5.30	-29.64	100.68	125.20	24.52	PK	Vertical
4	5850.000	39.97	33.90	5.31	-29.63	49.55	122.20	72.65	PK	Vertical
5	5903.229	43.55	34.31	5.33	-29.62	53.57	84.31	30.74	PK	Vertical

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

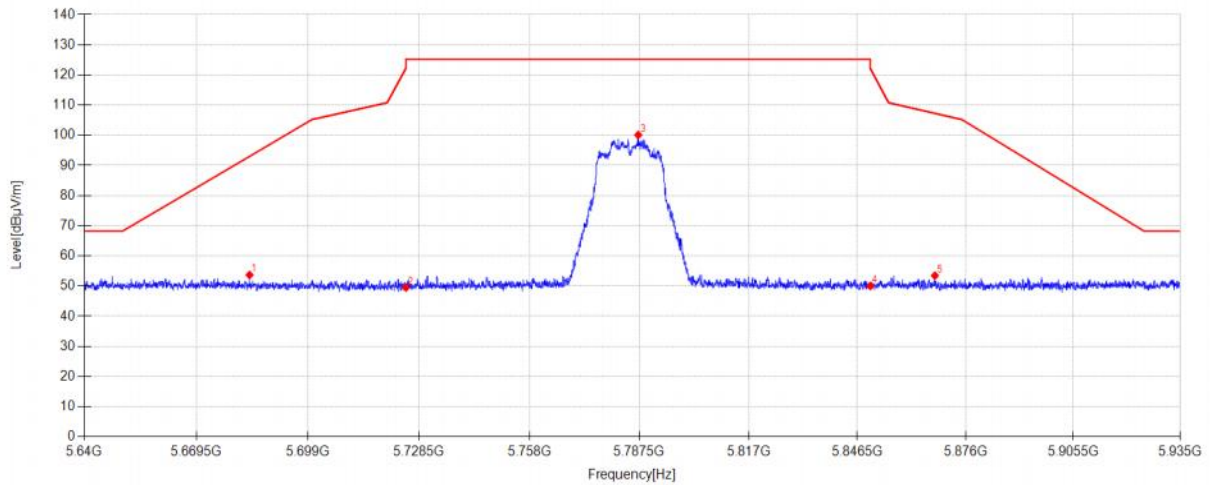


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5683.513	44.86	33.23	5.24	-29.66	53.67	93.00	39.33	PK	Horizontal
2	5725.000	40.42	33.45	5.26	-29.65	49.48	122.20	72.72	PK	Horizontal
3	5787.205	90.59	33.87	5.28	-29.64	100.10	125.20	25.10	PK	Horizontal
4	5850.000	40.43	33.90	5.31	-29.63	50.01	122.20	72.19	PK	Horizontal
5	5867.622	43.71	34.04	5.32	-29.63	53.44	107.27	53.83	PK	Horizontal

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

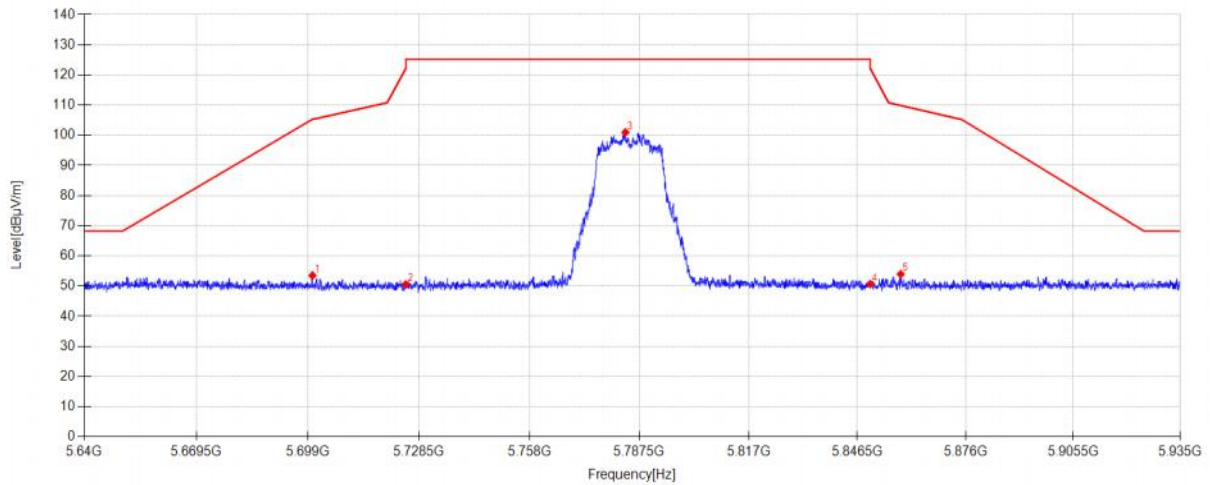


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5700.180	44.80	33.10	5.25	-29.66	53.49	105.25	51.76	PK	Vertical
2	5725.000	41.48	33.45	5.26	-29.65	50.54	122.20	71.66	PK	Vertical
3	5783.754	91.46	33.87	5.28	-29.64	100.97	125.20	24.23	PK	Vertical
4	5850.000	41.10	33.90	5.31	-29.63	50.68	122.20	71.52	PK	Vertical
5	5858.300	44.29	33.97	5.31	-29.63	53.94	109.88	55.94	PK	Vertical

Test Mode:	802.11 AC20 MIMO	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

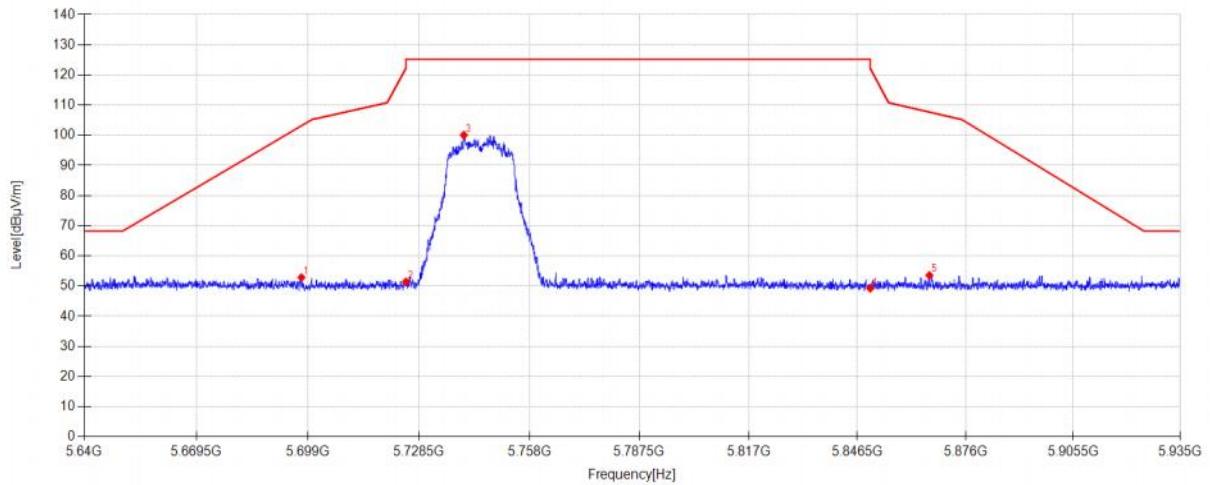


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.260	44.13	33.12	5.25	-29.66	52.84	103.17	50.33	PK	Horizontal
2	5725.000	42.36	33.45	5.26	-29.65	51.42	122.20	70.78	PK	Horizontal
3	5740.448	90.78	33.67	5.27	-29.65	100.07	125.20	25.13	PK	Horizontal
4	5850.000	39.64	33.90	5.31	-29.63	49.22	122.20	72.98	PK	Horizontal
5	5866.118	43.81	34.03	5.32	-29.63	53.53	107.69	54.16	PK	Horizontal

Test Mode:	802. 11 AC20 MIMO	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 20V

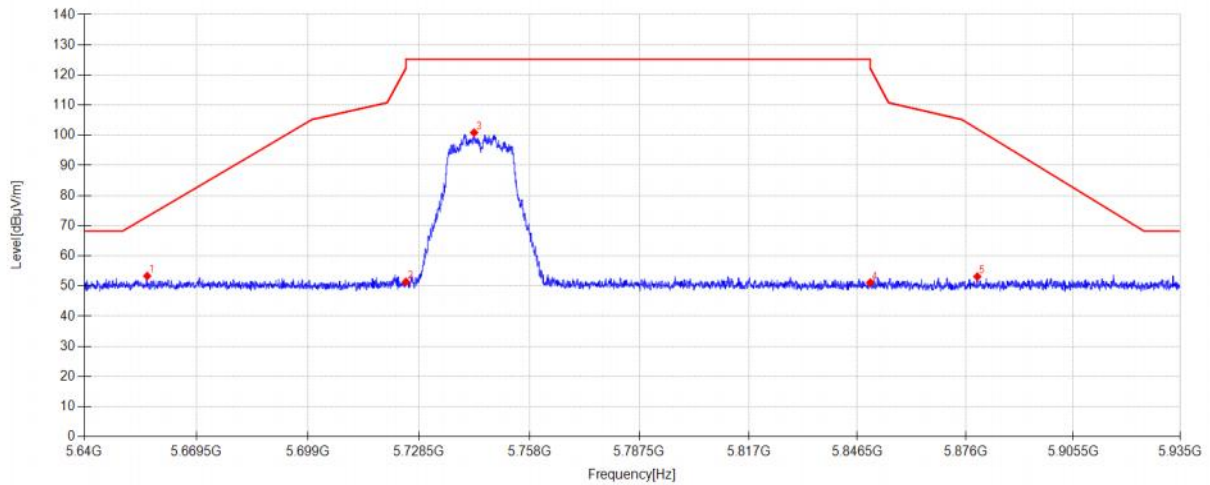


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5656.520	44.32	33.45	5.23	-29.67	53.33	73.02	19.69	PK	Vertical
2	5725.000	42.32	33.45	5.26	-29.65	51.38	122.20	70.82	PK	Vertical
3	5743.191	91.55	33.70	5.27	-29.65	100.87	125.20	24.33	PK	Vertical
4	5850.000	41.58	33.90	5.31	-29.63	51.16	122.20	71.04	PK	Vertical
5	5879.216	43.31	34.13	5.32	-29.62	53.14	102.08	48.94	PK	Vertical

Test Mode:	802.11 AX20 MIMO	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

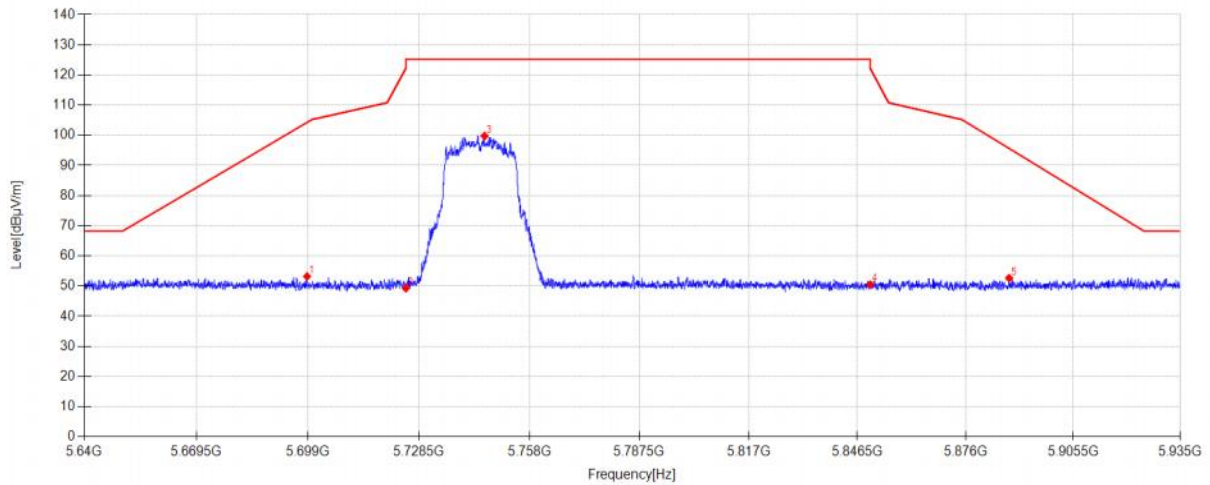


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5698.735	44.48	33.11	5.25	-29.66	53.18	104.26	51.08	PK	Horizontal
2	5725.000	40.19	33.45	5.26	-29.65	49.25	122.20	72.95	PK	Horizontal
3	5745.994	90.39	33.74	5.27	-29.65	99.75	125.20	25.45	PK	Horizontal
4	5850.000	40.90	33.90	5.31	-29.63	50.48	122.20	71.72	PK	Horizontal
5	5887.918	42.71	34.20	5.33	-29.62	52.62	95.64	43.02	PK	Horizontal

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 20V

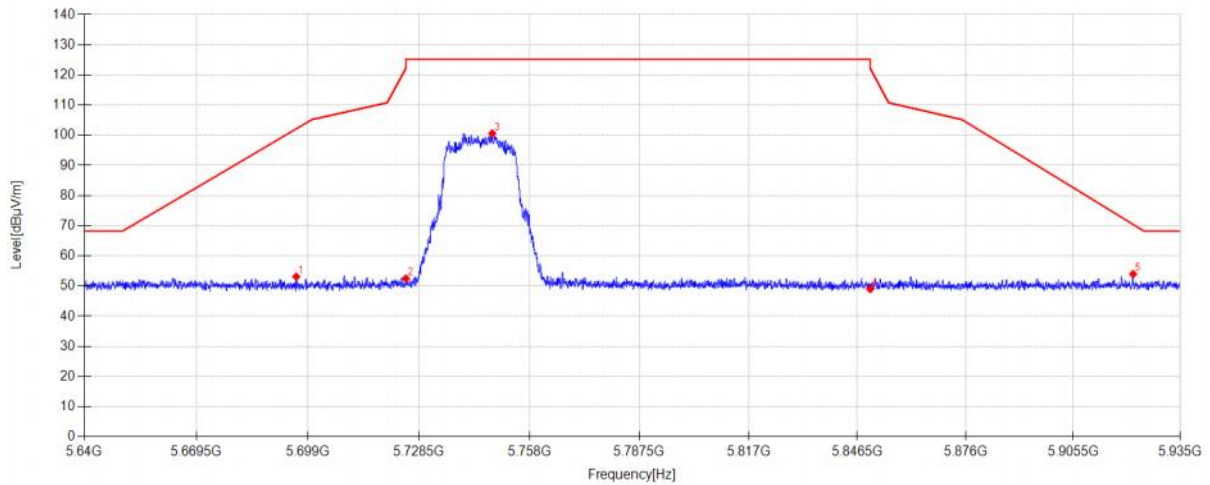


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5695.873	44.39	33.13	5.25	-29.66	53.11	102.15	49.04	PK	Vertical
2	5725.000	43.41	33.45	5.26	-29.65	52.47	122.20	69.73	PK	Vertical
3	5748.029	91.20	33.77	5.27	-29.65	100.59	125.20	24.61	PK	Vertical
4	5850.000	39.43	33.90	5.31	-29.63	49.01	122.20	73.19	PK	Vertical
5	5921.991	43.91	34.34	5.34	-29.62	53.97	70.43	16.46	PK	Vertical

Test Mode:	802.11 AX20 MIMO	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

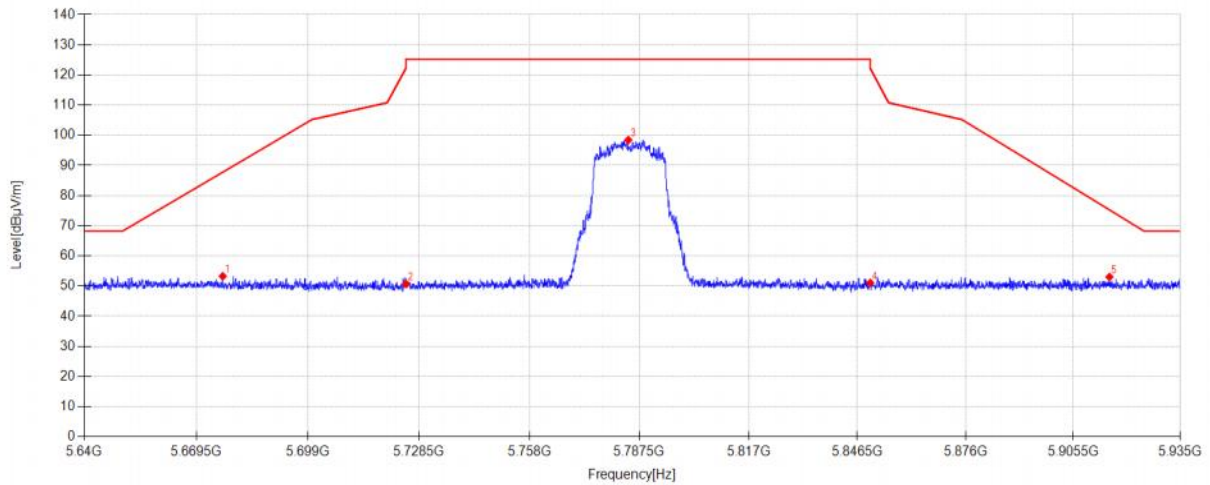


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5676.433	44.37	33.29	5.24	-29.66	53.24	87.76	34.52	PK	Horizontal
2	5725.000	41.64	33.45	5.26	-29.65	50.70	122.20	71.50	PK	Horizontal
3	5784.550	88.93	33.87	5.28	-29.64	98.44	125.20	26.76	PK	Horizontal
4	5850.000	41.47	33.90	5.31	-29.63	51.05	122.20	71.15	PK	Horizontal
5	5915.471	42.97	34.33	5.34	-29.62	53.02	75.25	22.23	PK	Horizontal

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

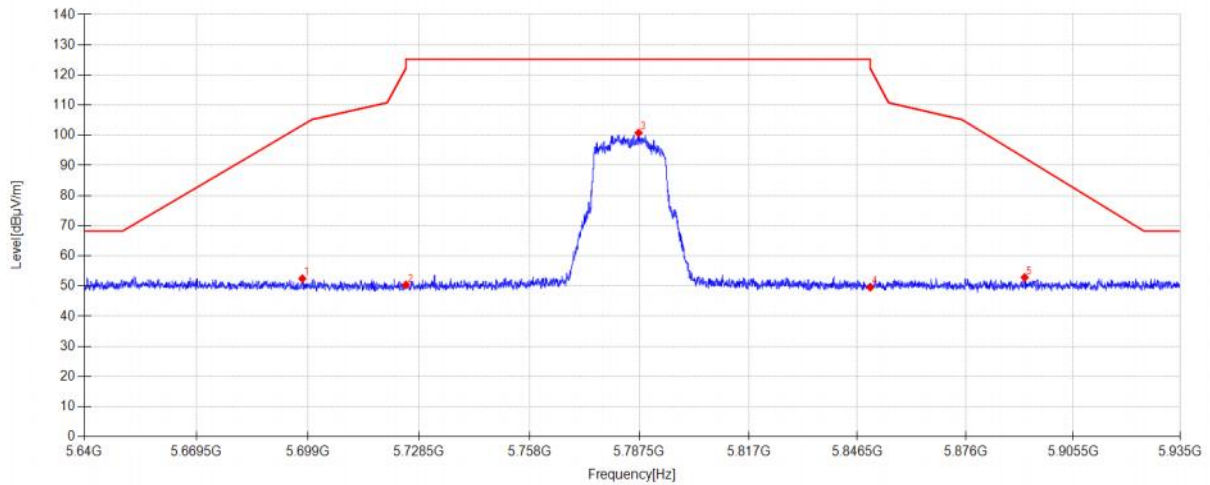


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.496	43.73	33.12	5.25	-29.66	52.44	103.35	50.91	PK	Vertical
2	5725.000	41.33	33.45	5.26	-29.65	50.39	122.20	71.81	PK	Vertical
3	5787.323	91.26	33.87	5.28	-29.64	100.77	125.20	24.43	PK	Vertical
4	5850.000	39.99	33.90	5.31	-29.63	49.57	122.20	72.63	PK	Vertical
5	5892.196	42.92	34.24	5.33	-29.62	52.87	92.48	39.61	PK	Vertical

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

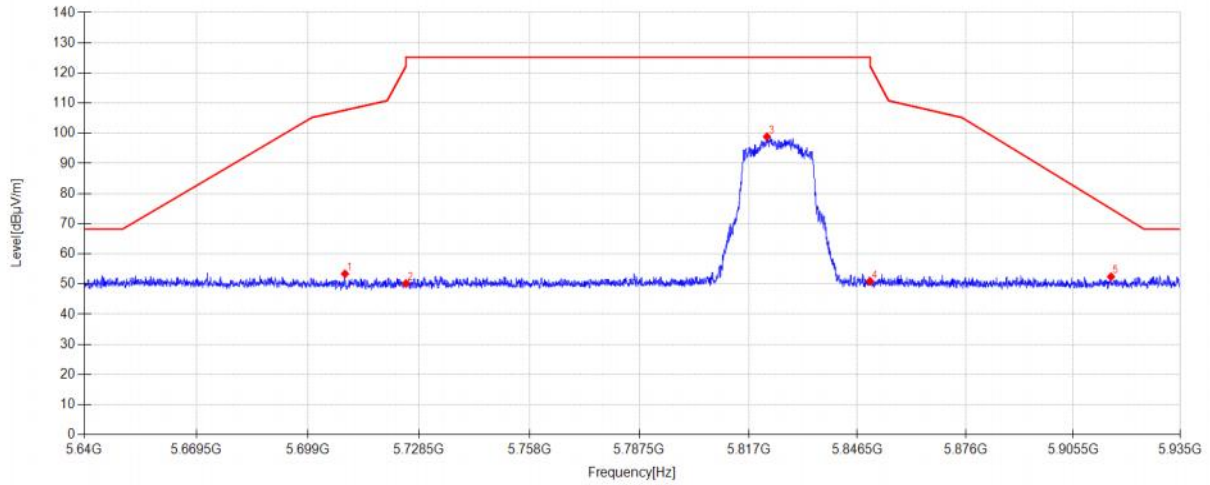


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.794	44.57	33.22	5.25	-29.66	53.38	107.66	54.28	PK	Horizontal
2	5725.000	41.11	33.45	5.26	-29.65	50.17	122.20	72.03	PK	Horizontal
3	5821.956	89.31	33.90	5.30	-29.64	98.87	125.20	26.33	PK	Horizontal
4	5850.000	41.29	33.90	5.31	-29.63	50.87	122.20	71.33	PK	Horizontal
5	5915.884	42.38	34.33	5.34	-29.62	52.43	74.95	22.52	PK	Horizontal

Test Mode:	802. 11 AX20 MIMO	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

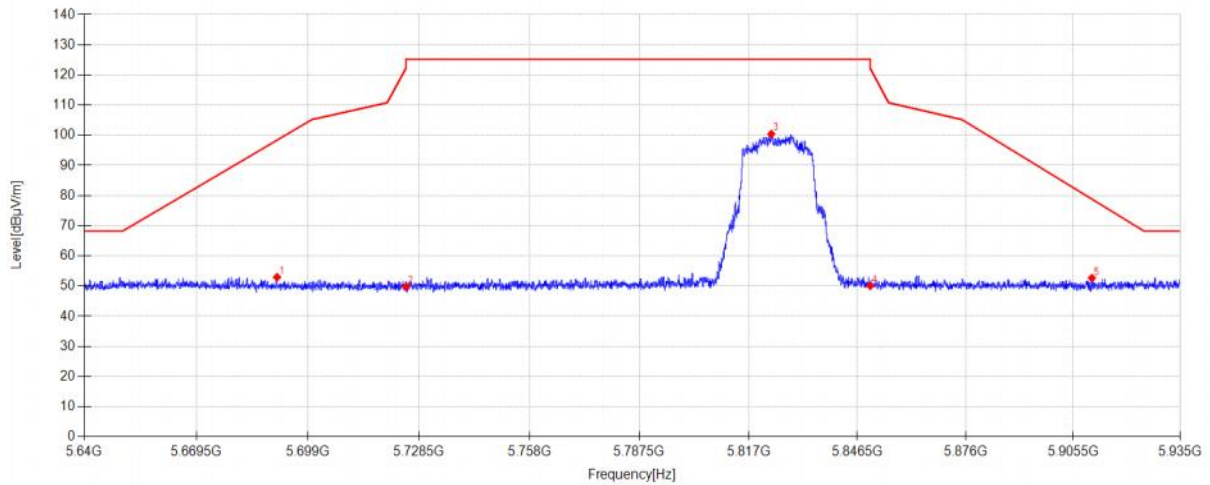


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5690.770	44.18	33.17	5.25	-29.66	52.94	98.37	45.43	PK	Vertical
2	5725.000	40.70	33.45	5.26	-29.65	49.76	122.20	72.44	PK	Vertical
3	5823.136	90.85	33.90	5.30	-29.64	100.41	125.20	24.79	PK	Vertical
4	5850.000	40.46	33.90	5.31	-29.63	50.04	122.20	72.16	PK	Vertical
5	5910.633	42.61	34.32	5.33	-29.62	52.64	78.83	26.19	PK	Vertical

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

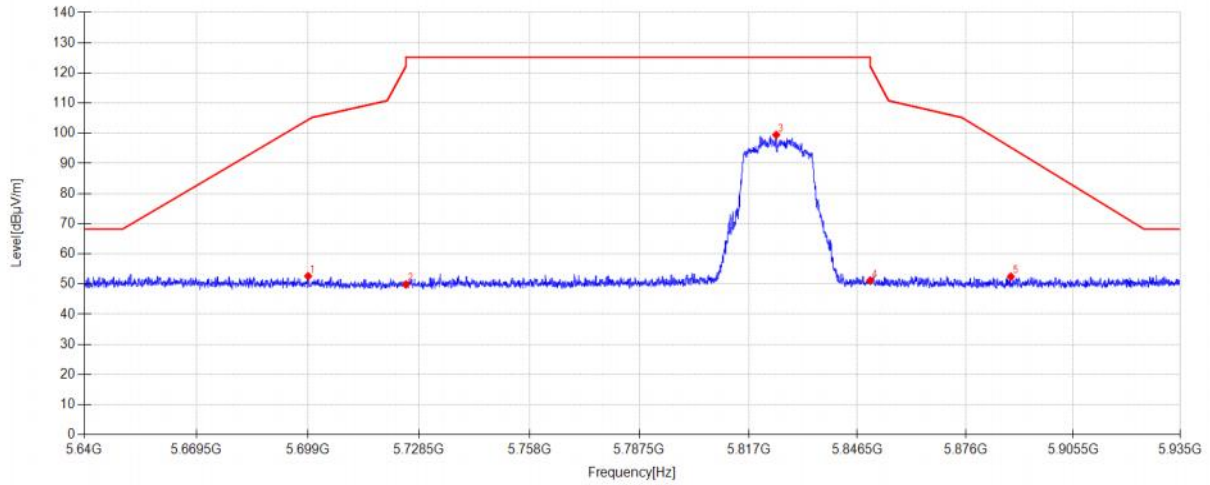


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5699.030	43.92	33.11	5.25	-29.66	52.62	104.48	51.86	PK	Horizontal
2	5725.000	40.79	33.45	5.26	-29.65	49.85	122.20	72.35	PK	Horizontal
3	5824.464	89.91	33.90	5.30	-29.64	99.47	125.20	25.73	PK	Horizontal
4	5850.000	41.59	33.90	5.31	-29.63	51.17	122.20	71.03	PK	Horizontal
5	5888.390	42.54	34.21	5.33	-29.62	52.46	95.29	42.83	PK	Horizontal

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

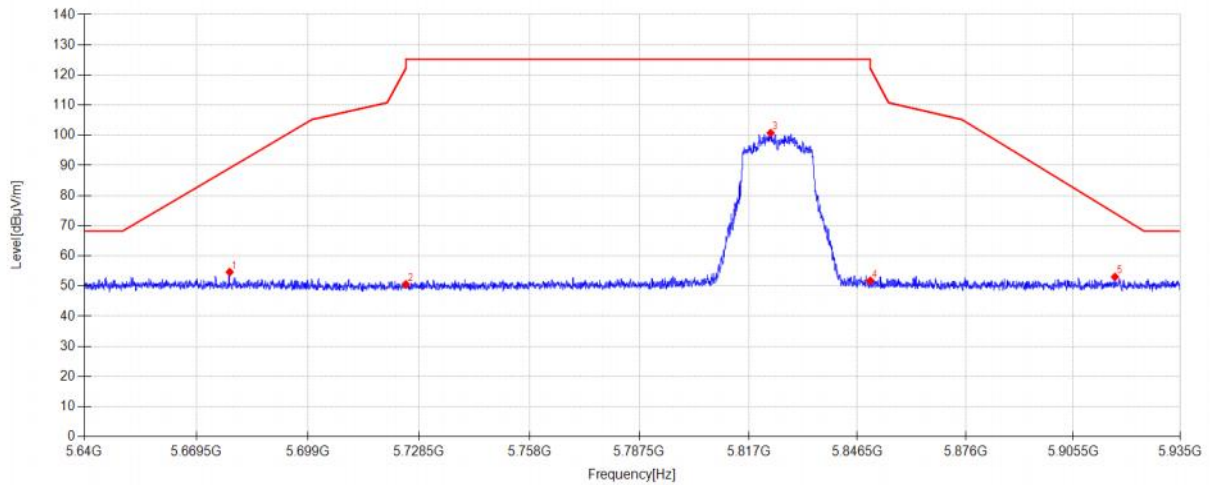


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5678.262	45.79	33.27	5.24	-29.66	54.64	89.11	34.47	PK	Vertical
2	5725.000	41.48	33.45	5.26	-29.65	50.54	122.20	71.66	PK	Vertical
3	5822.959	91.18	33.90	5.30	-29.64	100.74	125.20	24.46	PK	Vertical
4	5850.000	42.17	33.90	5.31	-29.63	51.75	122.20	70.45	PK	Vertical
5	5916.976	42.97	34.33	5.34	-29.62	53.02	74.14	21.12	PK	Vertical

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

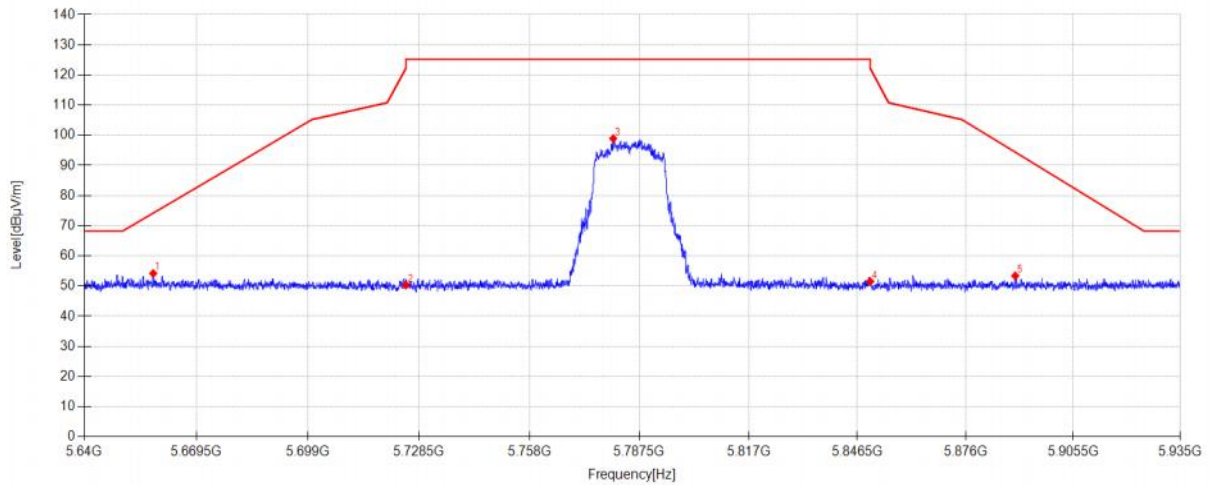


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5658.113	45.17	33.44	5.23	-29.67	54.17	74.20	20.03	PK	Horizontal
2	5725.000	41.22	33.45	5.26	-29.65	50.28	122.20	71.92	PK	Horizontal
3	5780.479	89.40	33.86	5.28	-29.64	98.90	125.20	26.30	PK	Horizontal
4	5850.000	41.94	33.90	5.31	-29.63	51.52	122.20	70.68	PK	Horizontal
5	5889.600	43.46	34.22	5.33	-29.62	53.39	94.40	41.01	PK	Horizontal

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

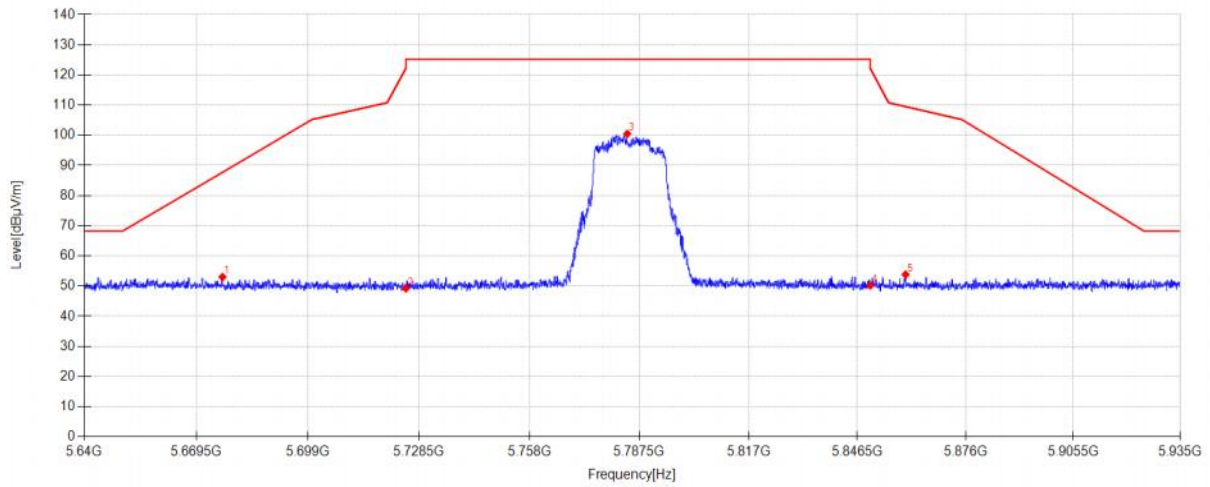


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5676.374	44.13	33.29	5.24	-29.66	53.00	87.72	34.72	PK	Vertical
2	5725.000	40.17	33.45	5.26	-29.65	49.23	122.20	72.97	PK	Vertical
3	5784.255	90.96	33.87	5.28	-29.64	100.47	125.20	24.73	PK	Vertical
4	5850.000	40.62	33.90	5.31	-29.63	50.20	122.20	72.00	PK	Vertical
5	5859.628	44.14	33.98	5.31	-29.63	53.80	109.50	55.70	PK	Vertical

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

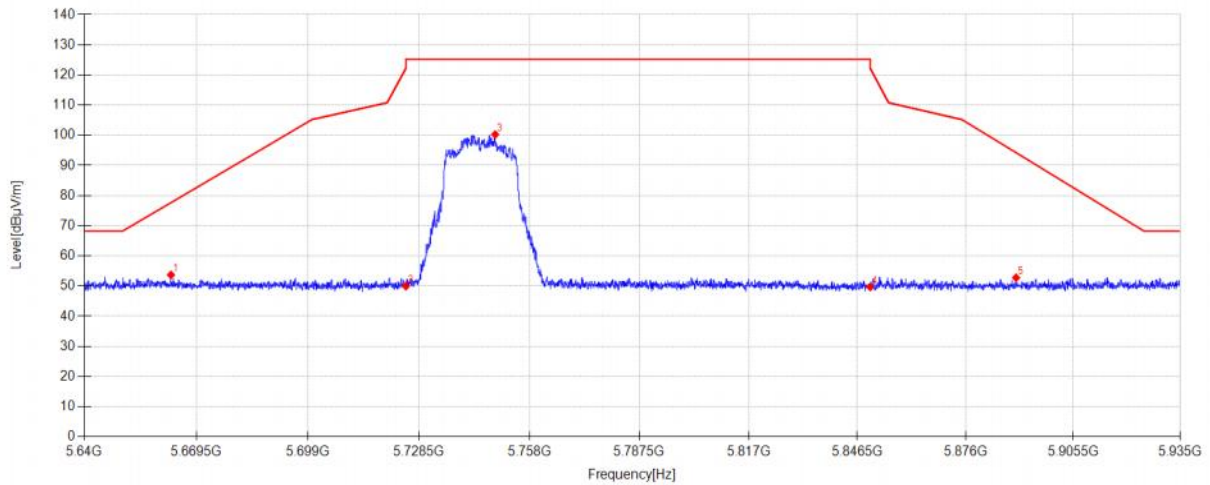


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5662.774	44.72	33.40	5.24	-29.67	53.69	77.65	23.96	PK	Horizontal
2	5725.000	40.89	33.45	5.26	-29.65	49.95	122.20	72.25	PK	Horizontal
3	5748.826	90.87	33.78	5.27	-29.65	100.27	125.20	24.93	PK	Horizontal
4	5850.000	40.10	33.90	5.31	-29.63	49.68	122.20	72.52	PK	Horizontal
5	5889.836	42.82	34.22	5.33	-29.62	52.75	94.22	41.47	PK	Horizontal

Test Mode:	802. 11 BE20 MIMO	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

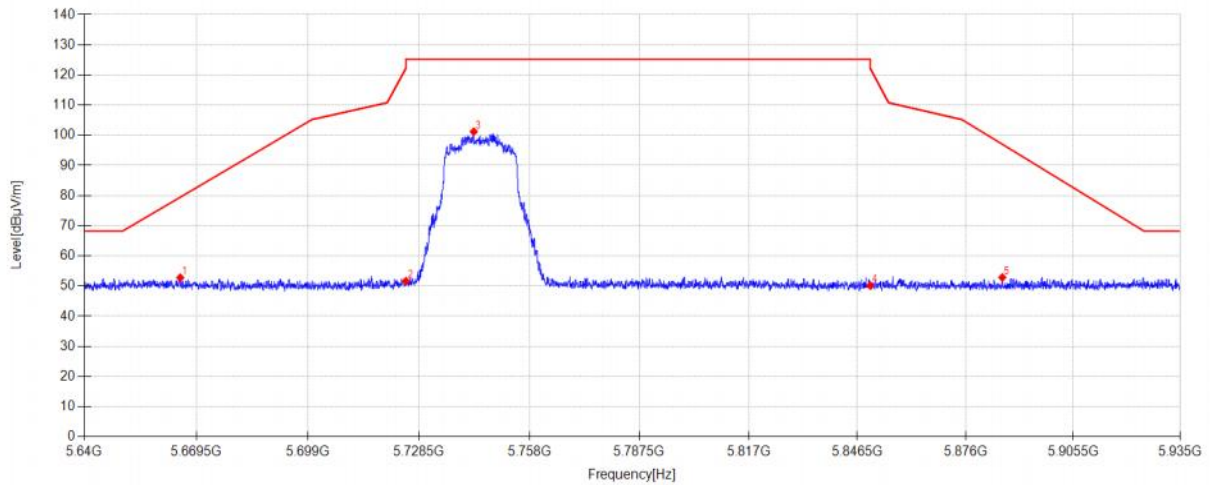


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5665.223	43.82	33.38	5.24	-29.67	52.77	79.46	26.69	PK	Vertical
2	5725.000	42.58	33.45	5.26	-29.65	51.64	122.20	70.56	PK	Vertical
3	5743.103	91.88	33.70	5.27	-29.65	101.20	125.20	24.00	PK	Vertical
4	5850.000	40.58	33.90	5.31	-29.63	50.16	122.20	72.04	PK	Vertical
5	5886.060	42.96	34.19	5.32	-29.62	52.85	97.02	44.17	PK	Vertical

Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 20V

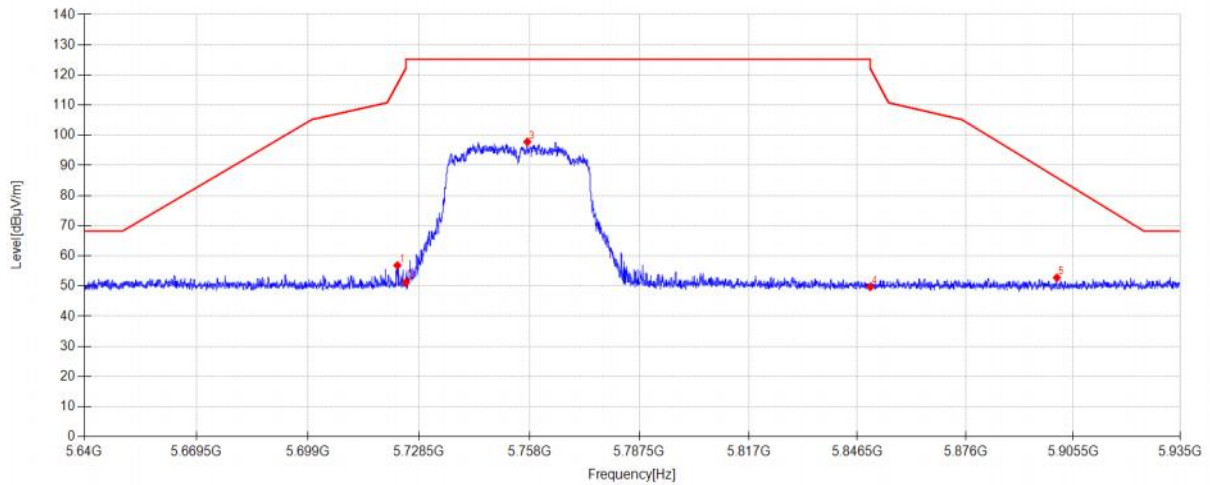


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.748	47.81	33.42	5.26	-29.66	56.83	117.06	60.23	PK	Horizontal
2	5725.000	42.13	33.45	5.26	-29.65	51.19	122.20	71.01	PK	Horizontal
3	5757.440	88.38	33.81	5.27	-29.65	97.81	125.20	27.39	PK	Horizontal
4	5850.000	40.12	33.90	5.31	-29.63	49.70	122.20	72.50	PK	Horizontal
5	5901.016	42.75	34.30	5.33	-29.62	52.76	85.95	33.19	PK	Horizontal

Test Mode:	802.11 BE40 MIMO	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 20V

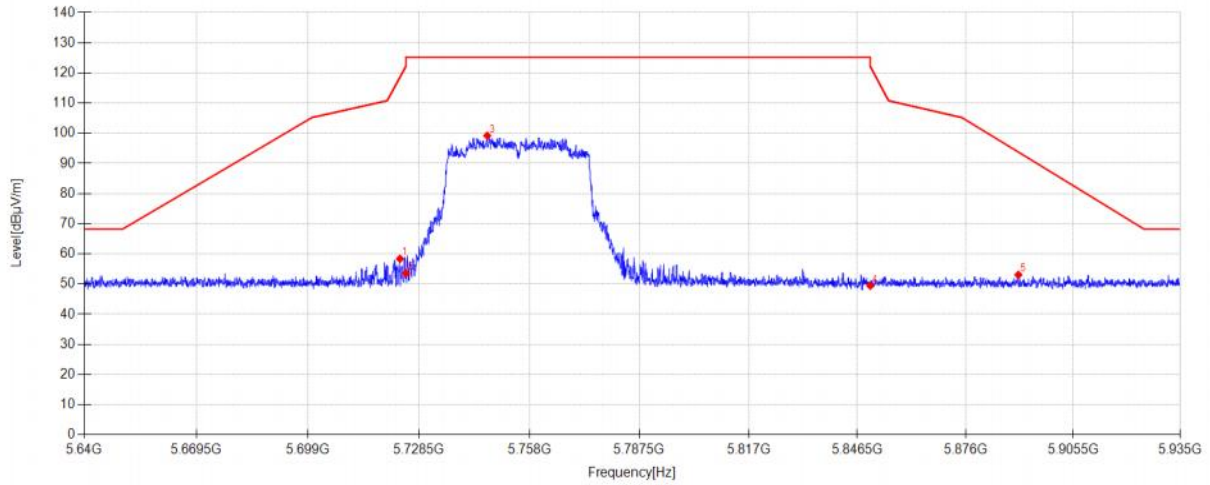


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.426	49.34	33.43	5.26	-29.66	58.37	118.61	60.24	PK	Vertical
2	5725.000	44.49	33.45	5.26	-29.65	53.55	122.20	68.65	PK	Vertical
3	5746.702	89.82	33.75	5.27	-29.65	99.19	125.20	26.01	PK	Vertical
4	5850.000	39.88	33.90	5.31	-29.63	49.46	122.20	72.74	PK	Vertical
5	5890.455	43.12	34.22	5.33	-29.62	53.05	93.76	40.71	PK	Vertical

Test Mode:	802.11 BE40 MIMO	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 20V

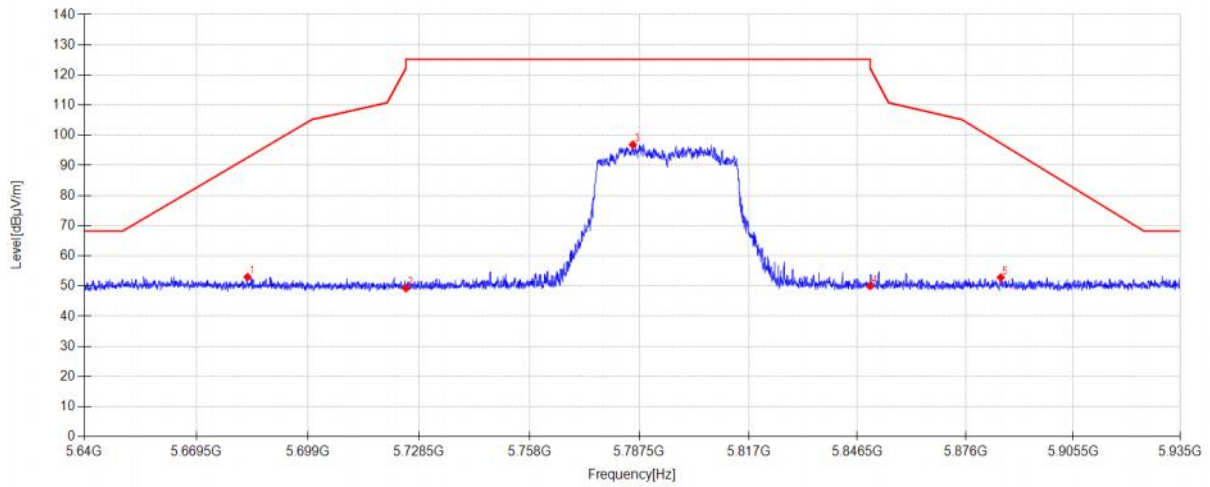


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5682.982	44.18	33.24	5.24	-29.66	53.00	92.61	39.61	PK	Horizontal
2	5725.000	40.22	33.45	5.26	-29.65	49.28	122.20	72.92	PK	Horizontal
3	5785.760	87.36	33.87	5.28	-29.64	96.87	125.20	28.33	PK	Horizontal
4	5850.000	40.45	33.90	5.31	-29.63	50.03	122.20	72.17	PK	Horizontal
5	5885.647	42.94	34.19	5.32	-29.62	52.83	97.32	44.49	PK	Horizontal

Test Mode:	802. 11 BE40 MIMO	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 20V

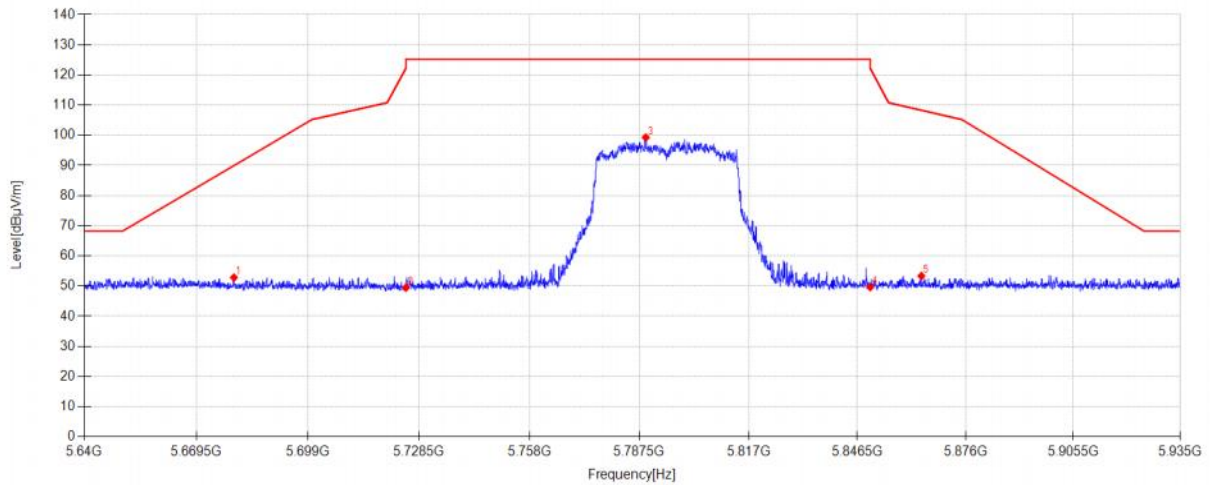


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5679.383	43.98	33.26	5.24	-29.66	52.82	89.94	37.12	PK	Vertical
2	5725.000	40.39	33.45	5.26	-29.65	49.45	122.20	72.75	PK	Vertical
3	5789.241	89.73	33.88	5.29	-29.64	99.26	125.20	25.94	PK	Vertical
4	5850.000	40.05	33.90	5.31	-29.63	49.63	122.20	72.57	PK	Vertical
5	5863.935	43.63	34.01	5.32	-29.63	53.33	108.30	54.97	PK	Vertical

Test Mode:	802.11 AX40 MIMO	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 20V

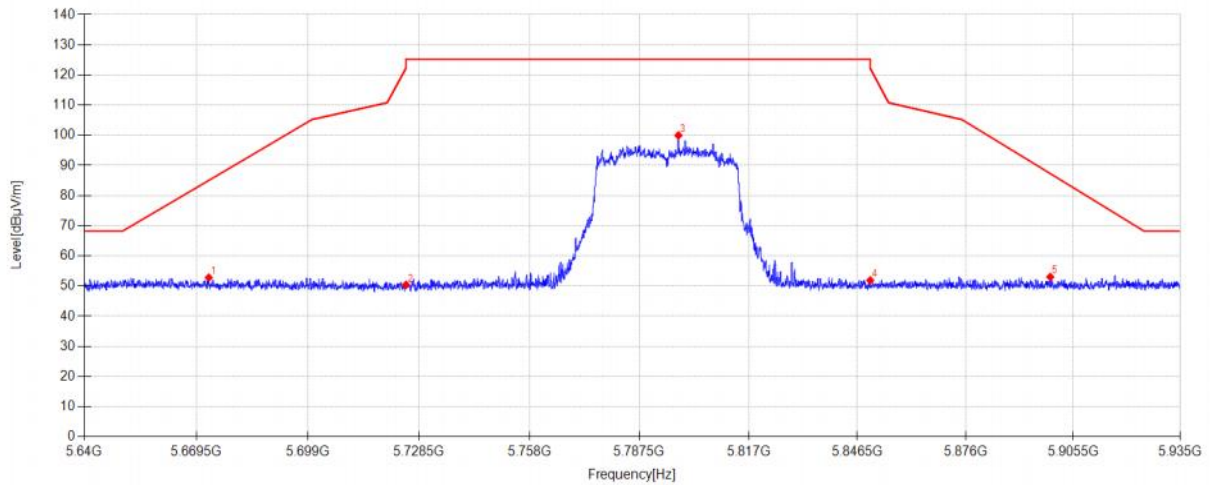


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5672.745	43.89	33.32	5.24	-29.67	52.78	85.03	32.25	PK	Horizontal
2	5725.000	41.30	33.45	5.26	-29.65	50.36	122.20	71.84	PK	Horizontal
3	5798.032	90.41	33.90	5.29	-29.64	99.96	125.20	25.24	PK	Horizontal
4	5850.000	42.29	33.90	5.31	-29.63	51.87	122.20	70.33	PK	Horizontal
5	5899.187	43.01	34.29	5.33	-29.62	53.01	87.30	34.29	PK	Horizontal

Test Mode:	802.11 AX40 MIMO	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 20V

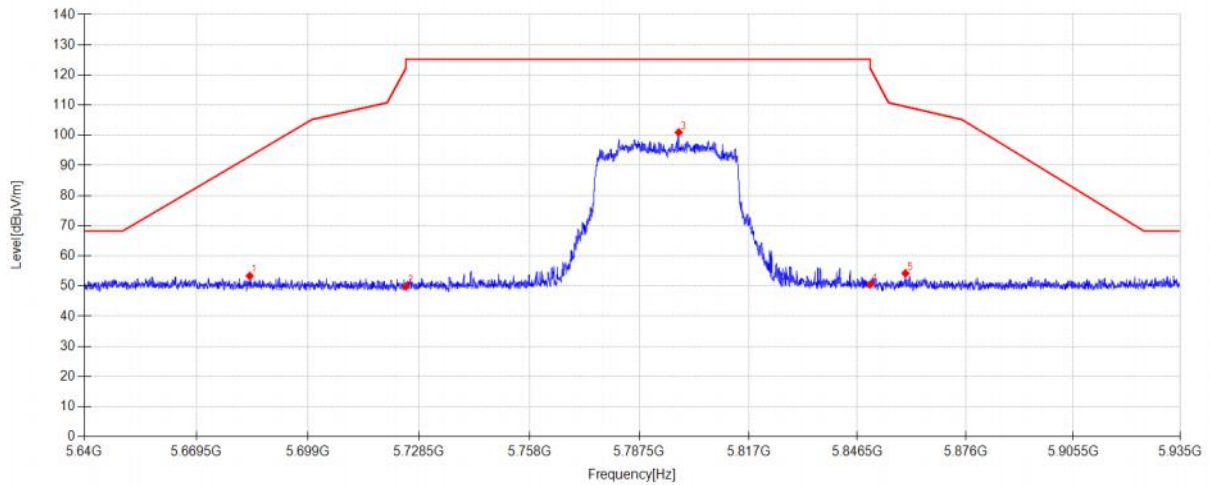


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5683.542	44.53	33.23	5.24	-29.66	53.34	93.02	39.68	PK	Vertical
2	5725.000	40.80	33.45	5.26	-29.65	49.86	122.20	72.34	PK	Vertical
3	5798.120	91.39	33.90	5.29	-29.64	100.94	125.20	24.26	PK	Vertical
4	5850.000	40.94	33.90	5.31	-29.63	50.52	122.20	71.68	PK	Vertical
5	5859.598	44.53	33.98	5.31	-29.63	54.19	109.51	55.32	PK	Vertical

Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 20V

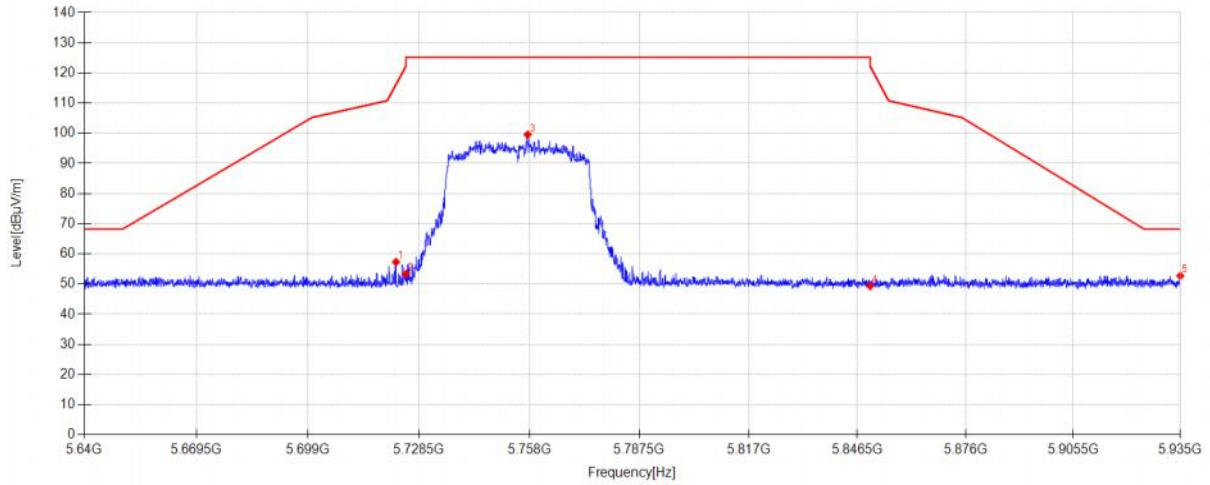

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.364	48.29	33.41	5.26	-29.66	57.30	116.19	58.89	PK	Horizontal
2	5725.000	44.30	33.45	5.26	-29.65	53.36	122.20	68.84	PK	Horizontal
3	5757.528	90.07	33.82	5.27	-29.65	99.51	125.20	25.69	PK	Horizontal
4	5850.000	39.77	33.90	5.31	-29.63	49.35	122.20	72.85	PK	Horizontal
5	5935.000	42.62	34.37	5.34	-29.61	52.72	68.20	15.48	PK	Horizontal


Test Mode:	802. 11 AX40 MIMO	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 20V

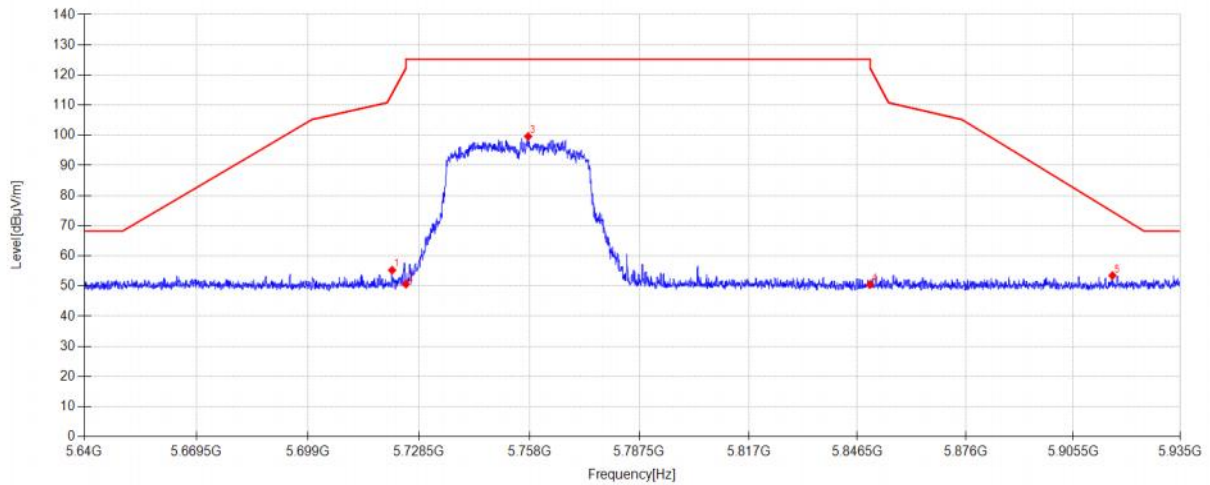

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.332	46.25	33.40	5.26	-29.66	55.25	113.84	58.59	PK	Vertical
2	5725.000	41.53	33.45	5.26	-29.65	50.59	122.20	71.61	PK	Vertical
3	5757.646	90.18	33.82	5.27	-29.65	99.62	125.20	25.58	PK	Vertical
4	5850.000	40.94	33.90	5.31	-29.63	50.52	122.20	71.68	PK	Vertical
5	5916.297	43.44	34.33	5.34	-29.62	53.49	74.64	21.15	PK	Vertical

Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 20V


Test Date: 2025-11-16 **Tested By:** Li Xiongbin
EUT: Desktop Computer **Model Number:** A2515
Test Mode: MIMO TX 11AC40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.5°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25090309-4E\FCC Above 1G 5.8G\51
Memo: Sample Number:S25090309-007;Power Setting:NA

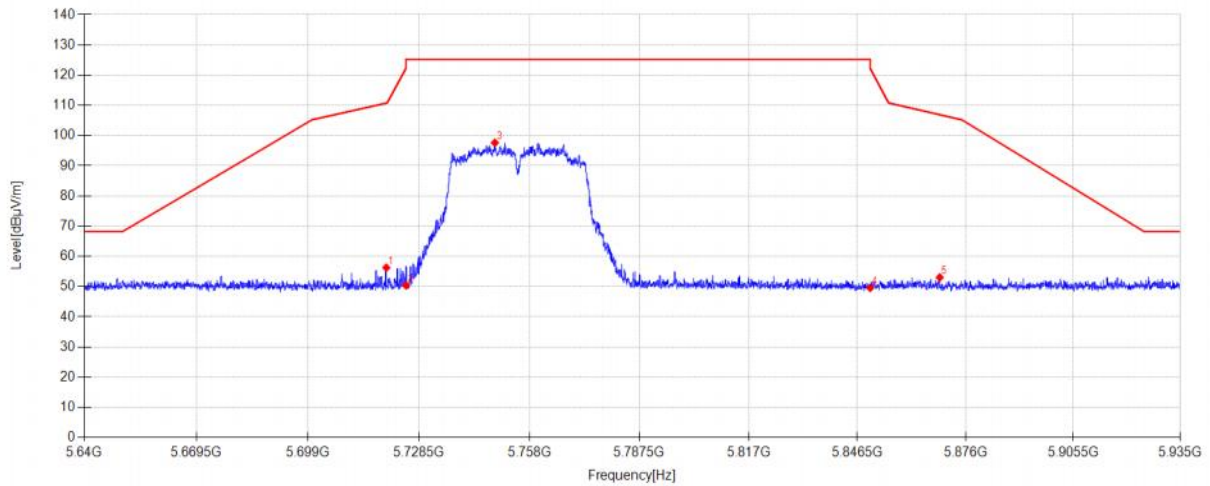

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.798	47.28	33.38	5.26	-29.66	56.26	110.74	54.48	PK	Horizontal
2	5725.000	41.32	33.45	5.26	-29.65	50.38	122.20	71.82	PK	Horizontal
3	5748.737	88.21	33.78	5.27	-29.65	97.61	125.20	27.59	PK	Horizontal
4	5850.000	39.97	33.90	5.31	-29.63	49.55	122.20	72.65	PK	Horizontal
5	5868.950	43.28	34.05	5.32	-29.63	53.02	106.89	53.87	PK	Horizontal


Test Mode:	802. 11 AC40 MIMO	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 20V

Test Date: 2025-11-16 **Tested By:** Li Xiongbin
EUT: Desktop Computer **Model Number:** A2515
Test Mode: MIMO TX 11AC40 5755MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.5°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25090309-4E\FCC Above 1G 5.8G\52
Memo: Sample Number:S25090309-007;Power Setting:NA

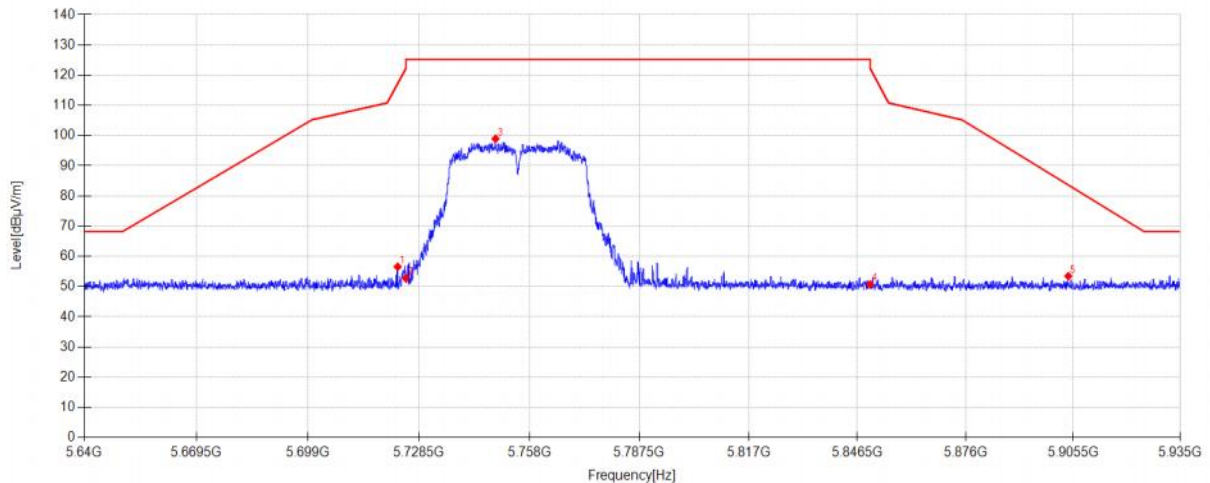


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.807	47.53	33.42	5.26	-29.66	56.55	117.20	60.65	PK	Vertical
2	5725.000	43.68	33.45	5.26	-29.65	52.74	122.20	69.46	PK	Vertical
3	5748.914	89.52	33.78	5.27	-29.65	98.92	125.20	26.28	PK	Vertical
4	5850.000	41.15	33.90	5.31	-29.63	50.73	122.20	71.47	PK	Vertical
5	5904.143	43.43	34.31	5.33	-29.62	53.45	83.63	30.18	PK	Vertical

Test Mode:	802.11 AC40 MIMO	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 20V

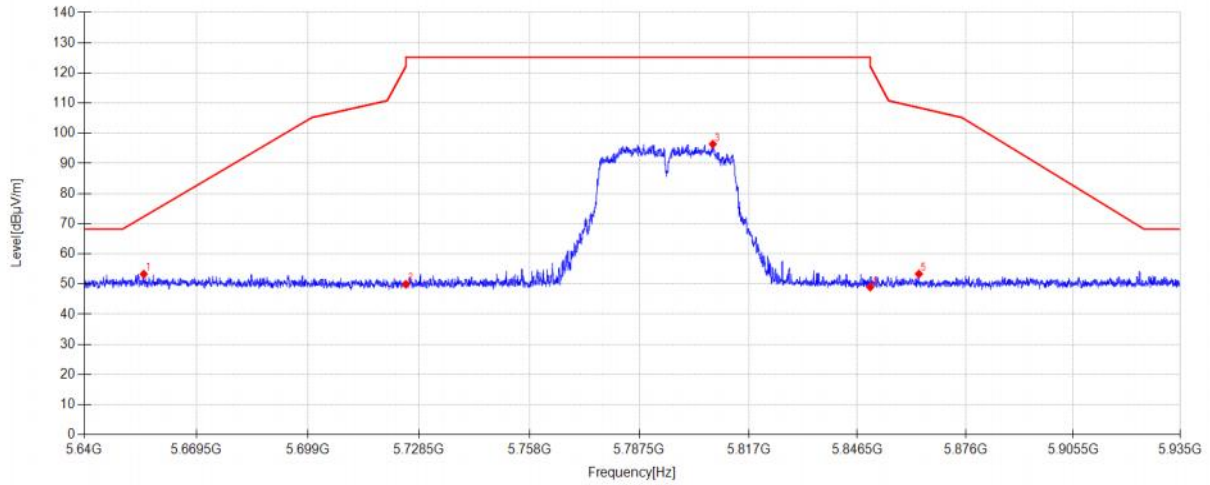

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5655.606	44.28	33.46	5.23	-29.67	53.30	72.35	19.05	PK	Horizontal
2	5725.000	40.81	33.45	5.26	-29.65	49.87	122.20	72.33	PK	Horizontal
3	5807.324	86.84	33.90	5.29	-29.64	96.39	125.20	28.81	PK	Horizontal
4	5850.000	39.37	33.90	5.31	-29.63	48.95	122.20	73.25	PK	Horizontal
5	5863.256	43.64	34.01	5.32	-29.63	53.34	108.49	55.15	PK	Horizontal


Test Mode:	802.11 AC40 MIMO	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 20V

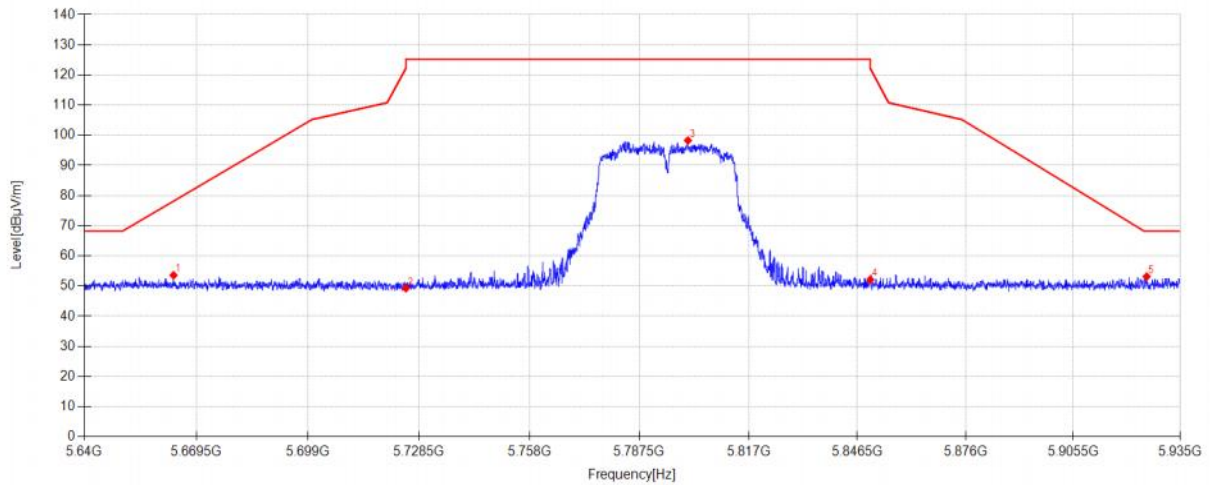

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5663.453	44.61	33.39	5.24	-29.67	53.57	78.15	24.58	PK	Vertical
2	5725.000	40.20	33.45	5.26	-29.65	49.26	122.20	72.94	PK	Vertical
3	5800.598	88.71	33.90	5.29	-29.64	98.26	125.20	26.94	PK	Vertical
4	5850.000	42.53	33.90	5.31	-29.63	52.11	122.20	70.09	PK	Vertical
5	5925.708	43.05	34.35	5.34	-29.61	53.13	68.20	15.07	PK	Vertical

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 20V


Test Date: 2025-11-16 **Tested By:** Li Xiongbin
EUT: Desktop Computer **Model Number:** A2515
Test Mode: MIMO TX 11N40 5795MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.5°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25090309-4E\FCC Above 1G 5.8G\55
Memo: Sample Number:S25090309-007;Power Setting:NA

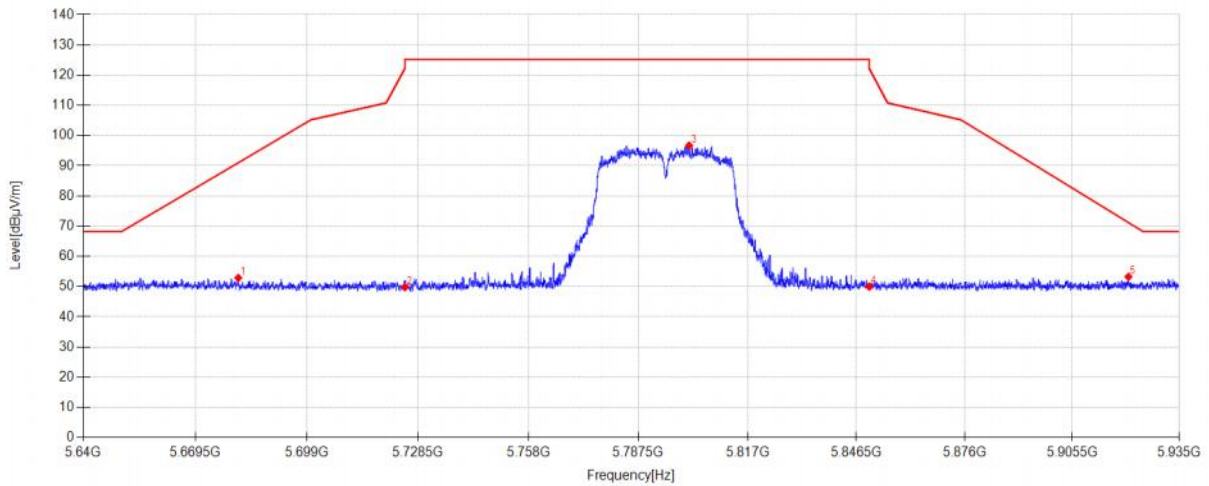

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5680.799	44.02	33.25	5.24	-29.66	52.85	90.99	38.14	PK	Horizontal
2	5725.000	40.75	33.45	5.26	-29.65	49.81	122.20	72.39	PK	Horizontal
3	5801.188	87.10	33.90	5.29	-29.64	96.65	125.20	28.55	PK	Horizontal
4	5850.000	40.37	33.90	5.31	-29.63	49.95	122.20	72.25	PK	Horizontal
5	5920.958	43.16	34.34	5.34	-29.62	53.22	71.19	17.97	PK	Horizontal


Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 20V

Test Date: 2025-11-16 **Tested By:** Li Xiongbin
EUT: Desktop Computer **Model Number:** A2515
Test Mode: MIMO TX 11N40 5795MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.5°C;Humi:56.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25090309-4E\FCC Above 1G 5.8G\56
Memo: Sample Number:S25090309-007;Power Setting:NA

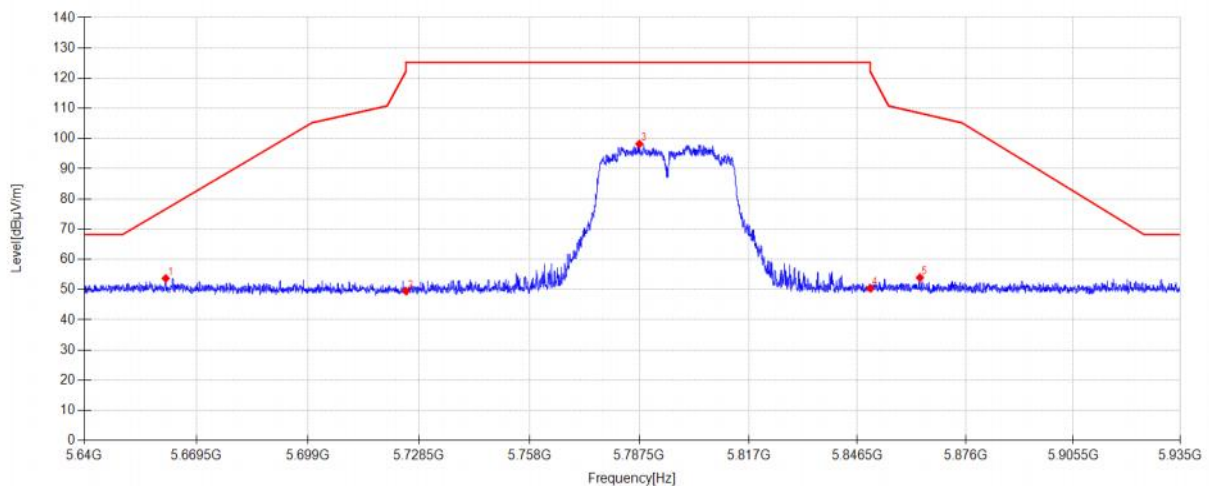


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5661.388	44.73	33.41	5.23	-29.67	53.70	76.63	22.93	PK	Vertical
2	5725.000	40.42	33.45	5.26	-29.65	49.48	122.20	72.72	PK	Vertical
3	5787.500	88.67	33.88	5.29	-29.64	98.20	125.20	27.00	PK	Vertical
4	5850.000	40.82	33.90	5.31	-29.63	50.40	122.20	71.80	PK	Vertical
5	5863.551	44.25	34.01	5.32	-29.63	53.95	108.41	54.46	PK	Vertical

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 20V

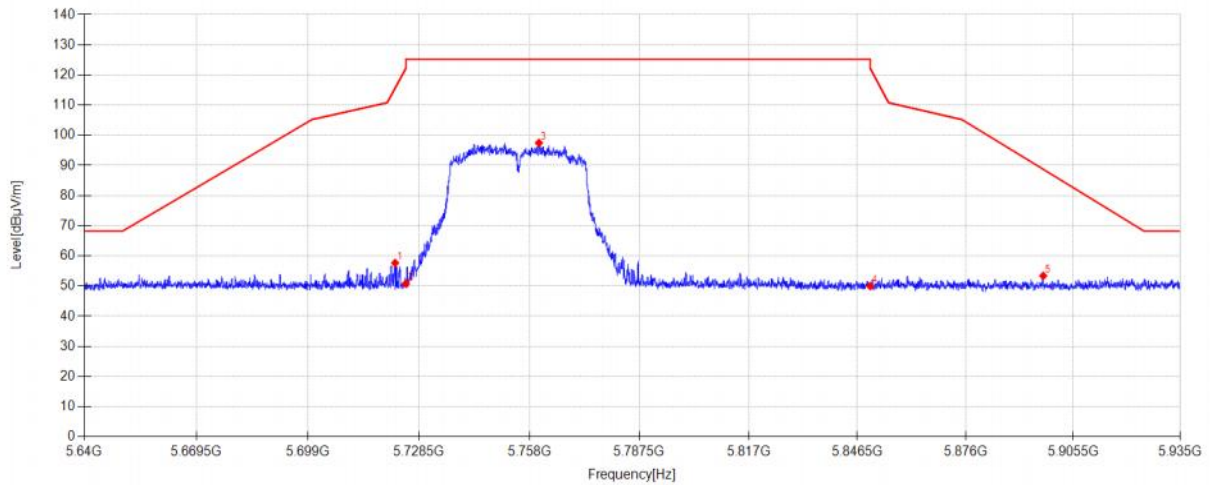


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.128	48.63	33.41	5.26	-29.66	57.64	115.65	58.01	PK	Horizontal
2	5725.000	41.70	33.45	5.26	-29.65	50.76	122.20	71.44	PK	Horizontal
3	5760.537	88.01	33.82	5.27	-29.65	97.45	125.20	27.75	PK	Horizontal
4	5850.000	40.39	33.90	5.31	-29.63	49.97	122.20	72.23	PK	Horizontal
5	5897.270	43.40	34.28	5.33	-29.62	53.39	88.72	35.33	PK	Horizontal

Test Mode:	802. 11 N40 MIMO	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 20V

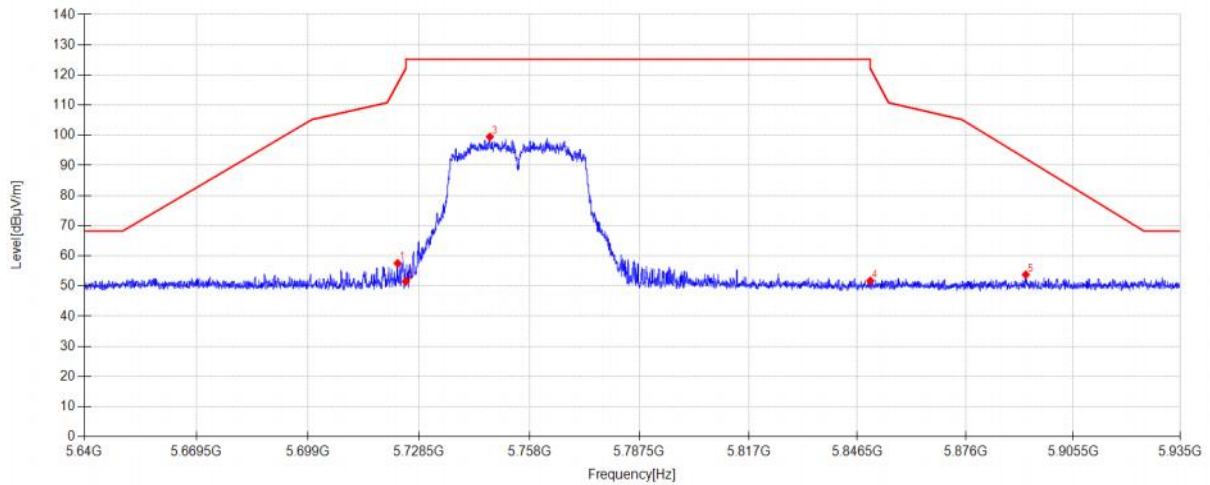


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.807	48.52	33.42	5.26	-29.66	57.54	117.20	59.66	PK	Vertical
2	5725.000	42.45	33.45	5.26	-29.65	51.51	122.20	70.69	PK	Vertical
3	5747.410	90.09	33.76	5.27	-29.65	99.47	125.20	25.73	PK	Vertical
4	5850.000	42.17	33.90	5.31	-29.63	51.75	122.20	70.45	PK	Vertical
5	5892.491	43.82	34.24	5.33	-29.62	53.77	92.26	38.49	PK	Vertical

Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 20V

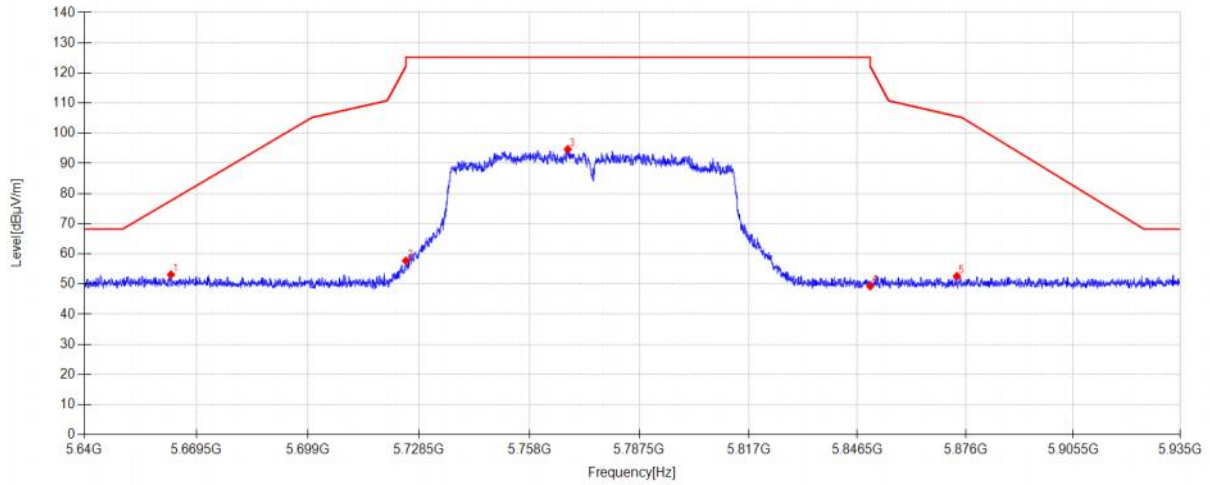


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5662.774	44.15	33.40	5.24	-29.67	53.12	77.65	24.53	PK	Horizontal
2	5725.000	48.65	33.45	5.26	-29.65	57.71	122.20	64.49	PK	Horizontal
3	5768.296	85.20	33.84	5.28	-29.65	94.67	125.20	30.53	PK	Horizontal
4	5850.000	39.71	33.90	5.31	-29.63	49.29	122.20	72.91	PK	Horizontal
5	5873.640	42.83	34.09	5.32	-29.63	52.61	105.58	52.97	PK	Horizontal

Test Mode:	802. 11 AC80 MIMO	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 20V

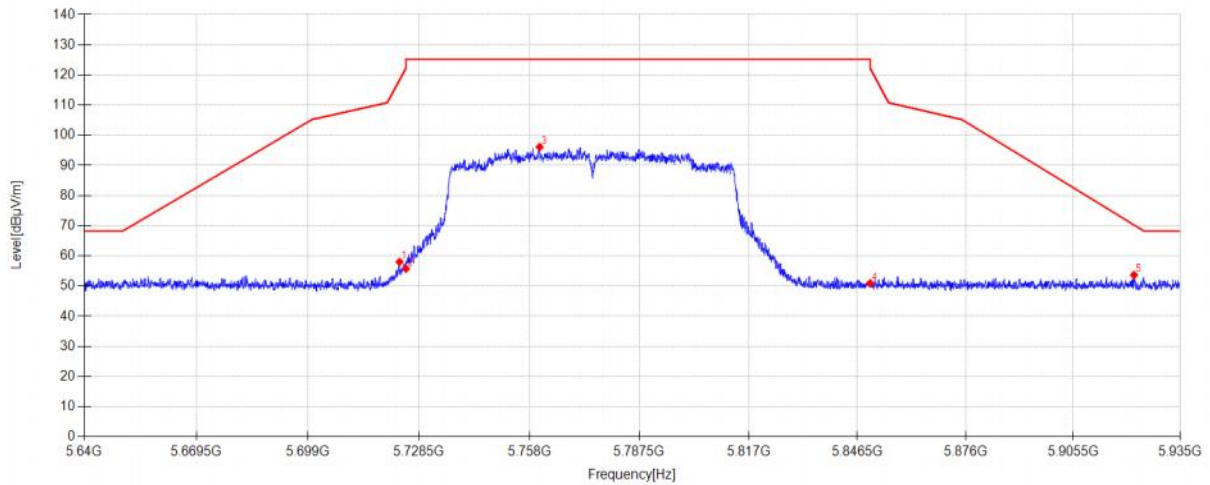


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.308	48.97	33.43	5.26	-29.66	58.00	118.34	60.34	PK	Vertical
2	5725.000	46.66	33.45	5.26	-29.65	55.72	122.20	66.48	PK	Vertical
3	5760.714	86.67	33.82	5.27	-29.65	96.11	125.20	29.09	PK	Vertical
4	5850.000	41.30	33.90	5.31	-29.63	50.88	122.20	71.32	PK	Vertical
5	5922.227	43.59	34.34	5.34	-29.62	53.65	70.25	16.60	PK	Vertical

Test Mode:	802.11 AX80 MIMO	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 20V

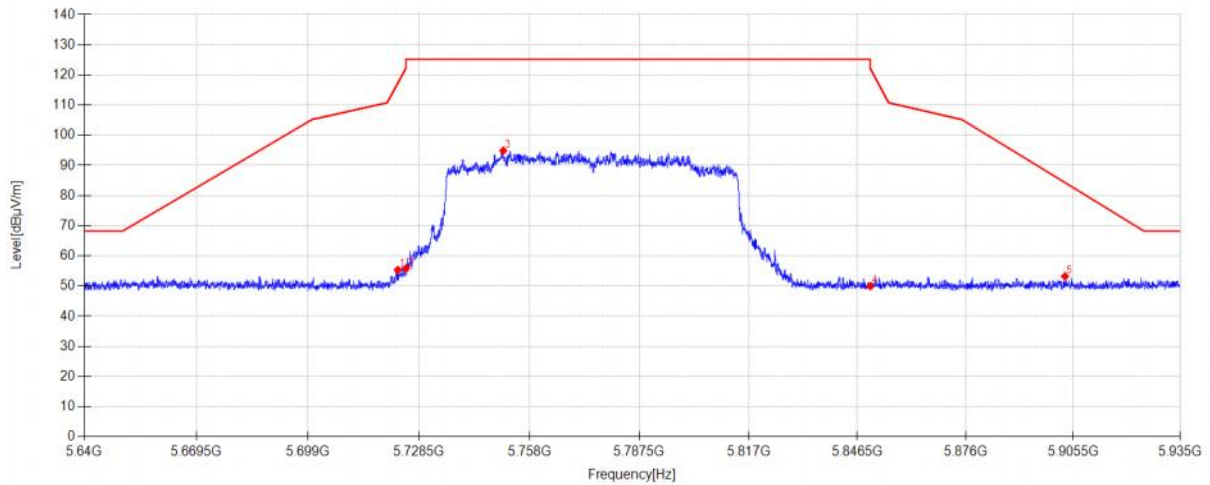


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.836	46.30	33.42	5.26	-29.66	55.32	117.27	61.95	PK	Horizontal
2	5725.000	46.72	33.45	5.26	-29.65	55.78	122.20	66.42	PK	Horizontal
3	5750.979	85.46	33.80	5.27	-29.65	94.88	125.20	30.32	PK	Horizontal
4	5850.000	40.39	33.90	5.31	-29.63	49.97	122.20	72.23	PK	Horizontal
5	5903.229	43.21	34.31	5.33	-29.62	53.23	84.31	31.08	PK	Horizontal

Test Mode:	802.11 AX80 MIMO	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 20V

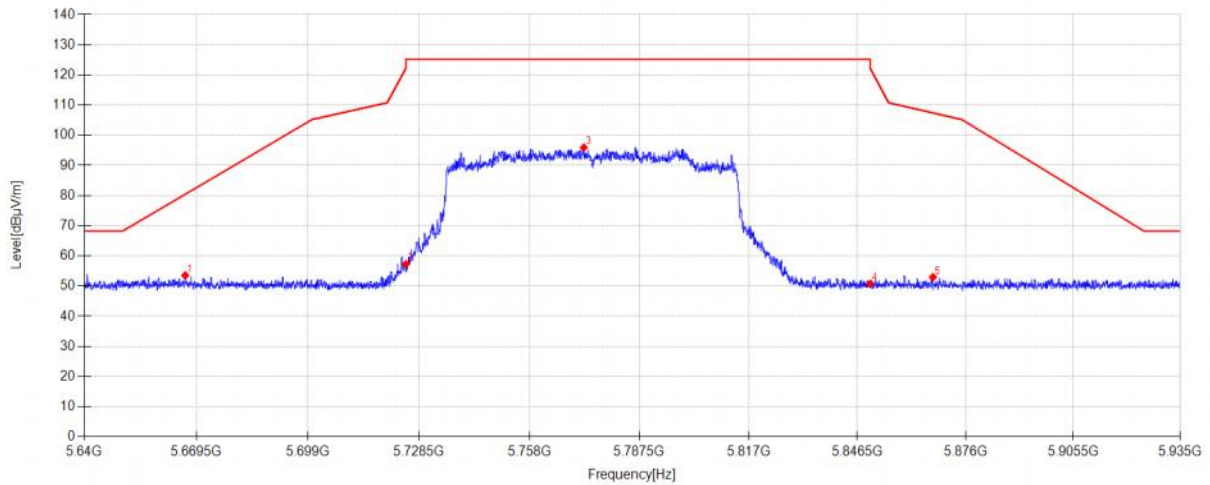


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5666.521	44.57	33.37	5.24	-29.67	53.51	80.43	26.92	PK	Vertical
2	5725.000	48.18	33.45	5.26	-29.65	57.24	122.20	64.96	PK	Vertical
3	5772.573	86.45	33.85	5.28	-29.65	95.93	125.20	29.27	PK	Vertical
4	5850.000	41.13	33.90	5.31	-29.63	50.71	122.20	71.49	PK	Vertical
5	5867.091	43.21	34.04	5.32	-29.63	52.94	107.41	54.47	PK	Vertical

Test Mode:	802. 11 BE80 MIMO	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 20V

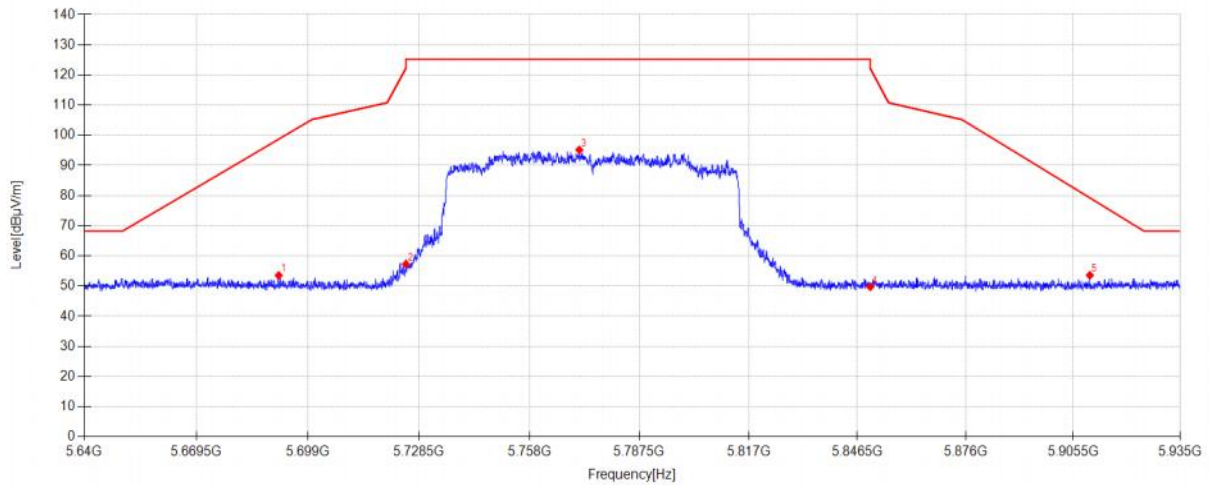

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.242	44.77	33.17	5.25	-29.66	53.53	98.72	45.19	PK	Horizontal
2	5725.000	48.19	33.45	5.26	-29.65	57.25	122.20	64.95	PK	Horizontal
3	5771.364	85.67	33.84	5.28	-29.65	95.14	125.20	30.06	PK	Horizontal
4	5850.000	40.14	33.90	5.31	-29.63	49.72	122.20	72.48	PK	Horizontal
5	5910.073	43.54	34.32	5.33	-29.62	53.57	79.25	25.68	PK	Horizontal


Test Mode:	802.11 BE80 MIMO	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 20V

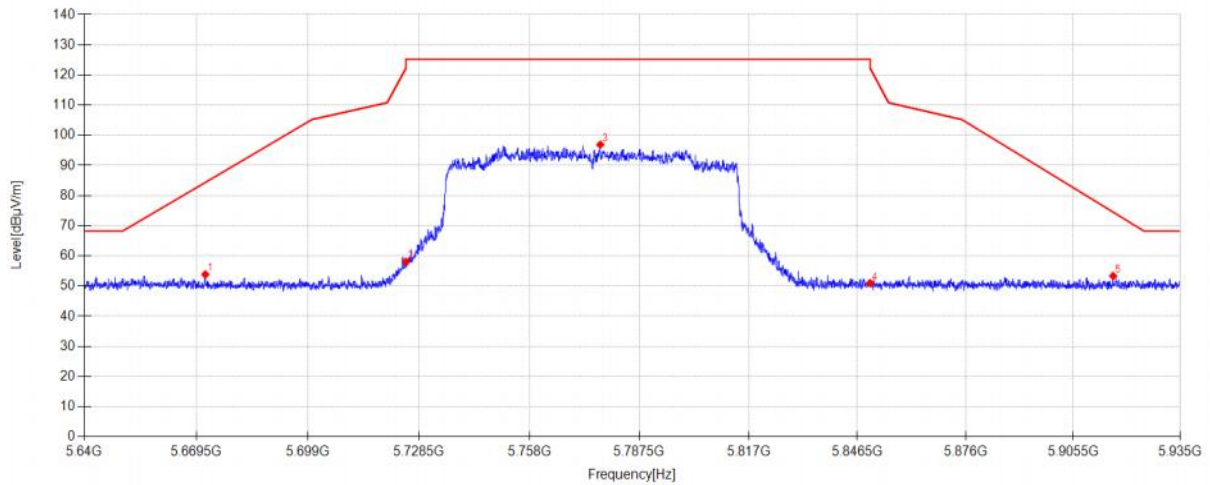

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5671.831	44.94	33.33	5.24	-29.67	53.84	84.35	30.51	PK	Vertical
2	5725.000	48.96	33.45	5.26	-29.65	58.02	122.20	64.18	PK	Vertical
3	5776.998	87.39	33.85	5.28	-29.64	96.88	125.20	28.32	PK	Vertical
4	5850.000	41.32	33.90	5.31	-29.63	50.90	122.20	71.30	PK	Vertical
5	5916.474	43.29	34.33	5.34	-29.62	53.34	74.51	21.17	PK	Vertical


8.2. SPURIOUS EMISSIONS

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

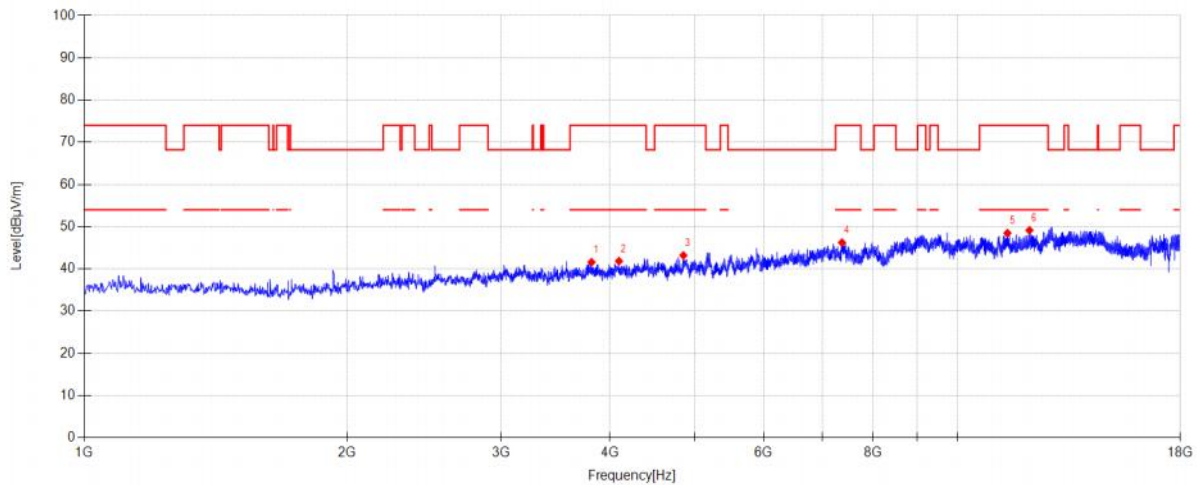


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3810.100	46.04	30.78	4.40	-39.62	41.60	74.00	32.40	PK	Horizontal
2	4095.700	45.94	31.11	4.51	-39.71	41.85	74.00	32.15	PK	Horizontal
3	4853.900	45.18	32.92	4.89	-39.79	43.20	74.00	30.80	PK	Horizontal
4	7375.000	43.19	36.85	6.07	-39.86	46.25	74.00	27.75	PK	Horizontal
5	11409.100	40.96	39.71	7.41	-39.60	48.48	74.00	25.52	PK	Horizontal
6	12090.800	41.52	39.45	7.71	-39.53	49.15	74.00	24.85	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

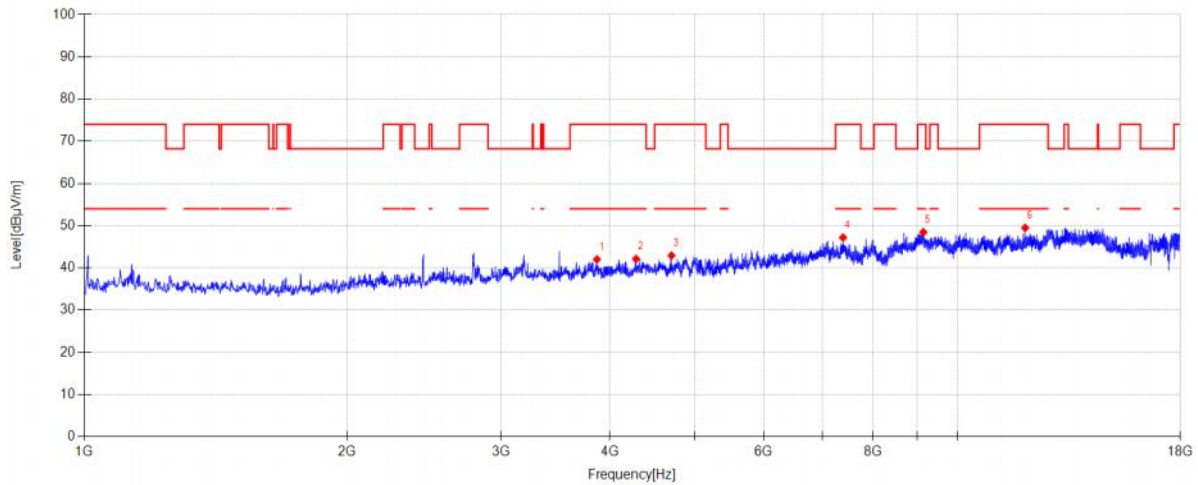


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3864.500	46.78	30.47	4.42	-39.65	42.02	74.00	31.98	PK	Vertical
2	4284.400	45.51	31.75	4.60	-39.73	42.13	74.00	31.87	PK	Vertical
3	4704.300	46.51	31.38	4.81	-39.77	42.93	74.00	31.07	PK	Vertical
4	7395.400	44.24	36.73	6.08	-39.86	47.19	74.00	26.81	PK	Vertical
5	9139.600	41.38	38.79	7.06	-38.75	48.48	74.00	25.52	PK	Vertical
6	11954.800	42.62	38.77	7.70	-39.60	49.49	74.00	24.51	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

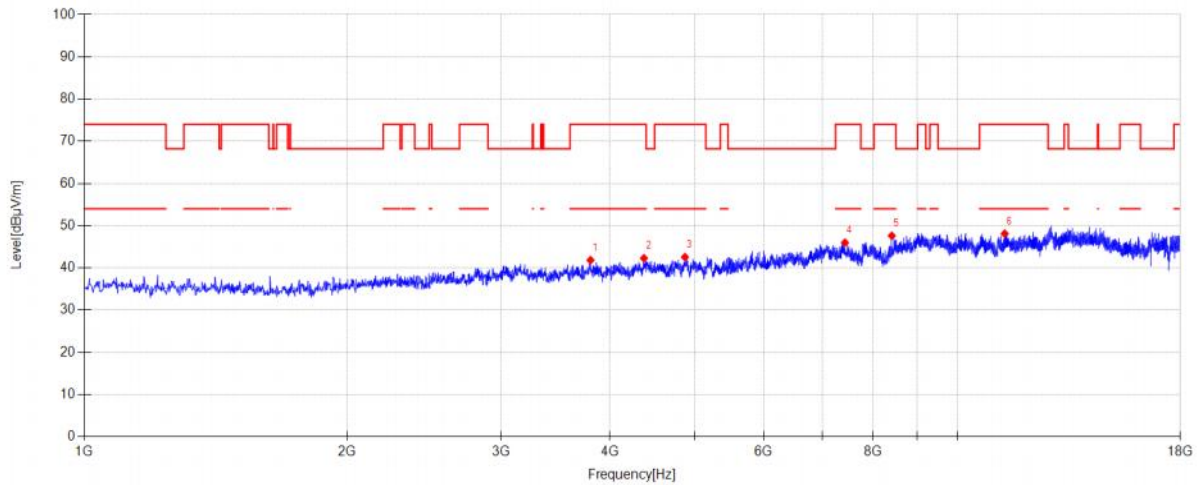


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3799.900	46.17	30.90	4.40	-39.62	41.85	74.00	32.15	PK	Horizontal
2	4374.500	45.79	31.59	4.65	-39.74	42.29	74.00	31.71	PK	Horizontal
3	4874.300	44.46	33.00	4.90	-39.79	42.57	74.00	31.43	PK	Horizontal
4	7432.800	43.12	36.63	6.09	-39.86	45.98	74.00	28.02	PK	Horizontal
5	8410.300	42.76	37.60	6.58	-39.31	47.63	74.00	26.37	PK	Horizontal
6	11327.500	41.43	38.93	7.37	-39.60	48.13	74.00	25.87	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

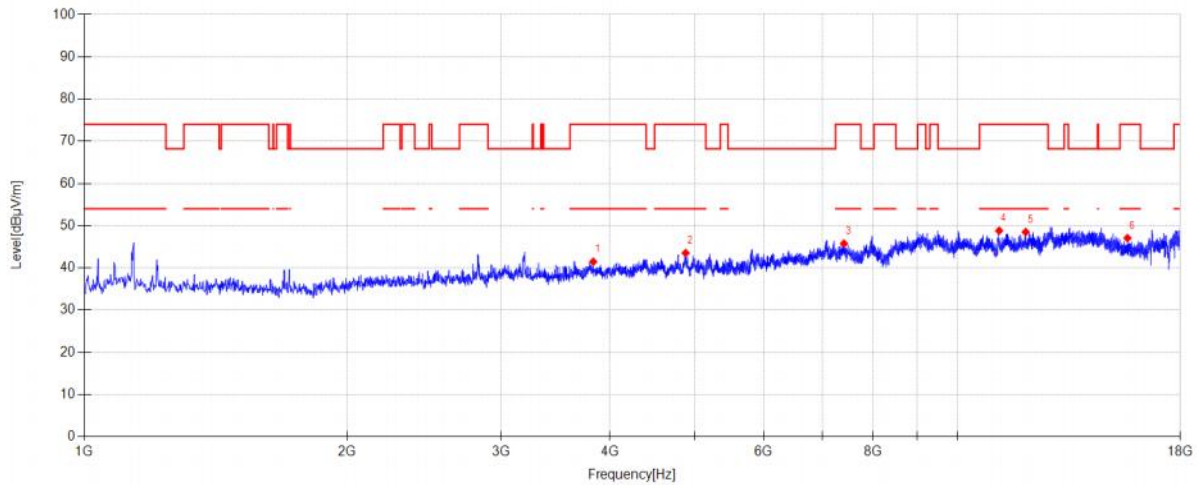


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3827.100	46.12	30.57	4.41	-39.63	41.47	74.00	32.53	PK	Vertical
2	4882.800	45.38	33.03	4.90	-39.79	43.52	74.00	30.48	PK	Vertical
3	7414.100	42.88	36.67	6.08	-39.86	45.77	74.00	28.23	PK	Vertical
4	11162.600	42.30	38.84	7.28	-39.60	48.82	74.00	25.18	PK	Vertical
5	11971.800	41.53	38.86	7.71	-39.60	48.50	74.00	25.50	PK	Vertical
6	15659.100	39.07	38.70	8.52	-39.23	47.06	74.00	26.94	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

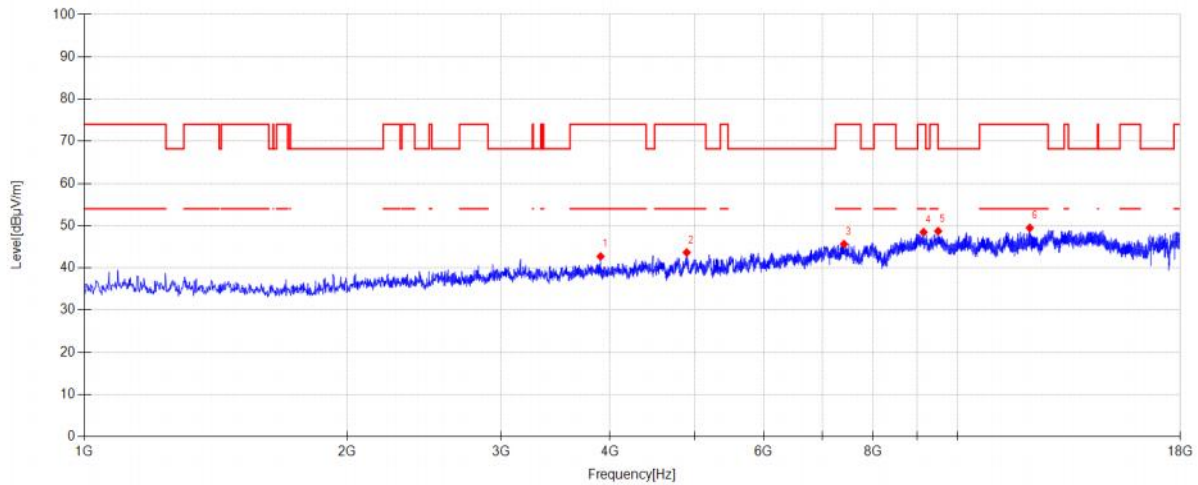


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3901.900	47.07	30.88	4.43	-39.66	42.72	74.00	31.28	PK	Horizontal
2	4896.400	45.45	33.09	4.91	-39.79	43.66	74.00	30.34	PK	Horizontal
3	7414.100	42.76	36.67	6.08	-39.86	45.65	74.00	28.35	PK	Horizontal
4	9144.700	41.30	38.89	7.06	-38.76	48.49	74.00	25.51	PK	Horizontal
5	9503.400	41.87	38.86	7.13	-39.15	48.71	68.20	19.49	PK	Horizontal
6	12101.000	41.80	39.50	7.71	-39.52	49.49	74.00	24.51	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

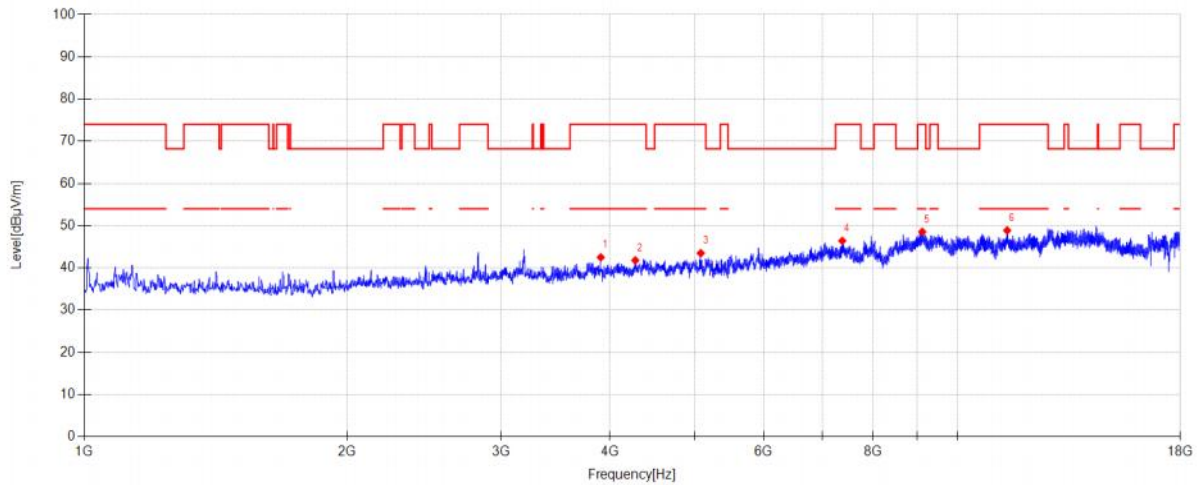


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3903.600	46.88	30.86	4.43	-39.66	42.51	74.00	31.49	PK	Vertical
2	4275.900	45.32	31.61	4.60	-39.73	41.80	74.00	32.20	PK	Vertical
3	5081.700	45.56	32.72	5.00	-39.78	43.50	74.00	30.50	PK	Vertical
4	7380.100	43.39	36.82	6.07	-39.86	46.42	74.00	27.58	PK	Vertical
5	9114.100	41.95	38.28	7.05	-38.73	48.55	74.00	25.45	PK	Vertical
6	11400.600	41.28	39.79	7.41	-39.60	48.88	74.00	25.12	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

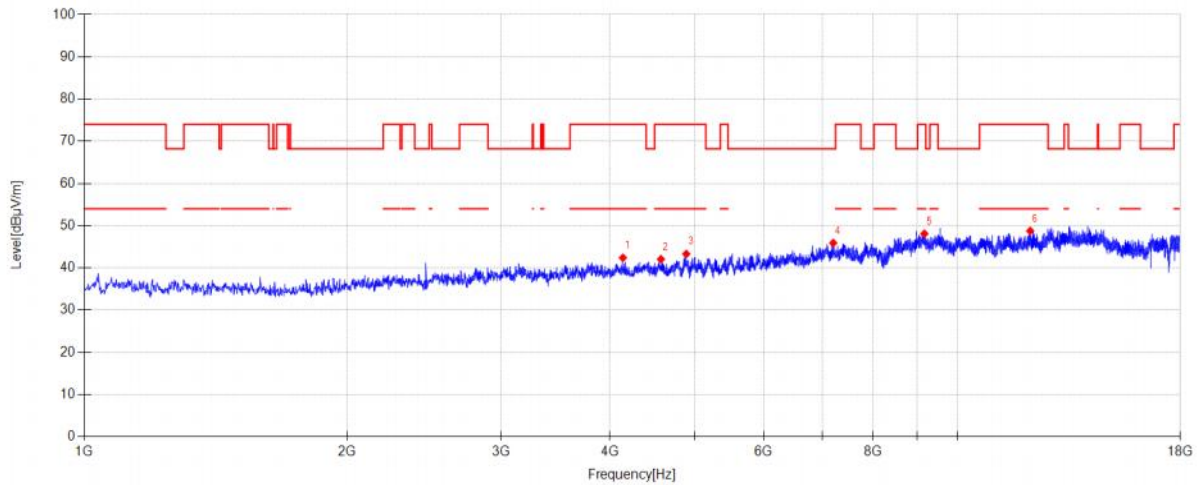


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4138.200	46.17	31.41	4.53	-39.71	42.40	74.00	31.60	PK	Horizontal
2	4575.100	45.32	31.75	4.75	-39.76	42.06	74.00	31.94	PK	Horizontal
3	4891.300	45.12	33.07	4.91	-39.79	43.31	74.00	30.69	PK	Horizontal
4	7206.700	43.29	36.48	6.02	-39.88	45.91	68.20	22.29	PK	Horizontal
5	9165.100	41.00	38.82	7.06	-38.78	48.10	74.00	25.90	PK	Horizontal
6	12114.600	41.11	39.46	7.71	-39.51	48.77	74.00	25.23	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

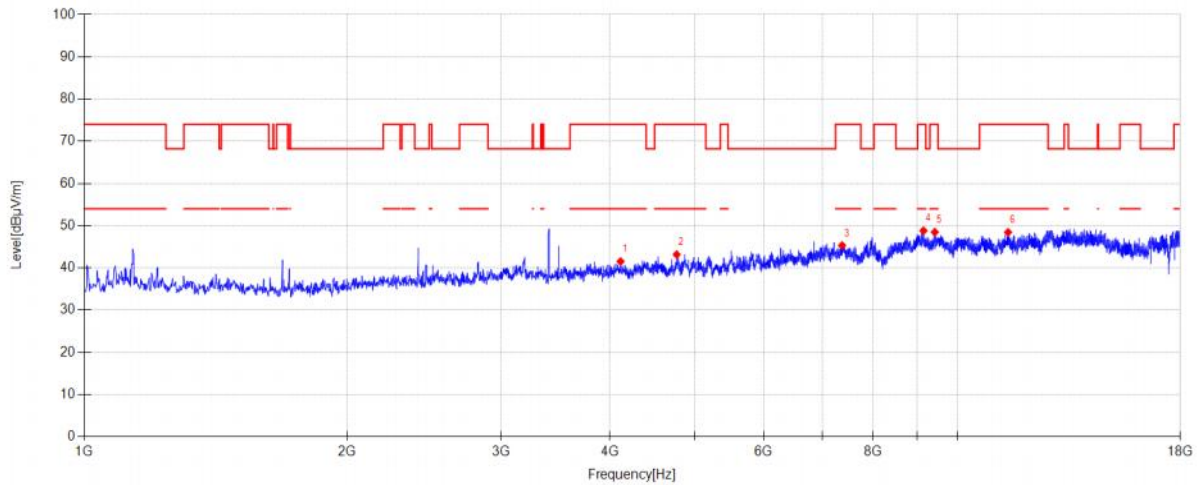


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4112.700	45.52	31.20	4.52	-39.71	41.53	74.00	32.47	PK	Vertical
2	4768.900	45.96	32.16	4.84	-39.78	43.18	74.00	30.82	PK	Vertical
3	7376.700	42.27	36.84	6.07	-39.86	45.32	74.00	28.68	PK	Vertical
4	9143.000	41.66	38.86	7.06	-38.76	48.82	74.00	25.18	PK	Vertical
5	9418.400	41.91	38.52	7.11	-39.06	48.48	74.00	25.52	PK	Vertical
6	11427.800	41.11	39.52	7.42	-39.60	48.45	74.00	25.55	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 20V

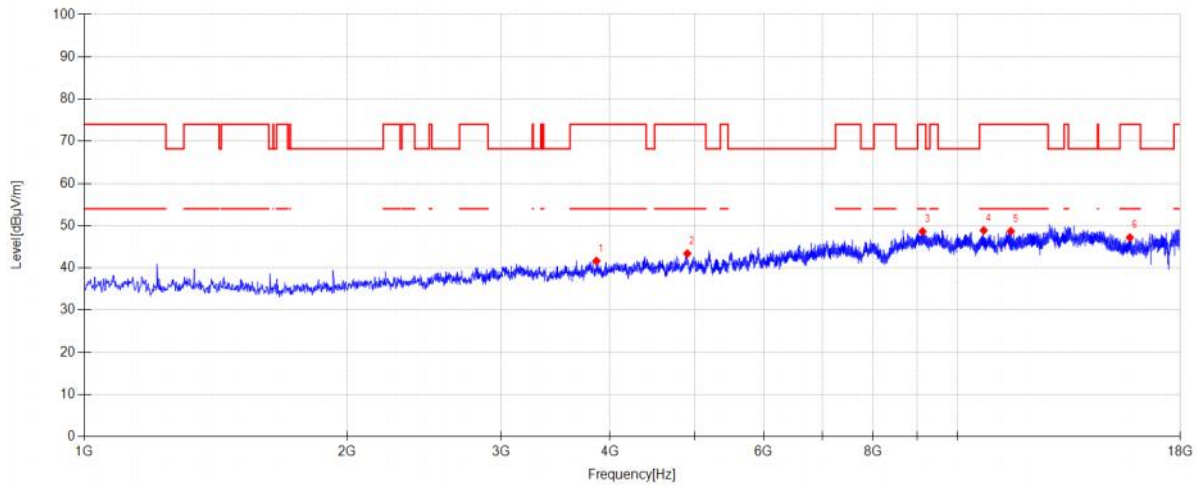


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3859.400	46.47	30.41	4.42	-39.64	41.66	74.00	32.34	PK	Horizontal
2	4904.900	45.19	33.10	4.91	-39.79	43.41	74.00	30.59	PK	Horizontal
3	9120.900	41.90	38.42	7.05	-38.73	48.64	74.00	25.36	PK	Horizontal
4	10717.200	41.90	39.41	7.21	-39.63	48.89	74.00	25.11	PK	Horizontal
5	11511.100	42.04	38.78	7.47	-39.60	48.69	74.00	25.31	PK	Horizontal
6	15756.000	39.56	38.33	8.63	-39.33	47.19	74.00	26.81	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 20V

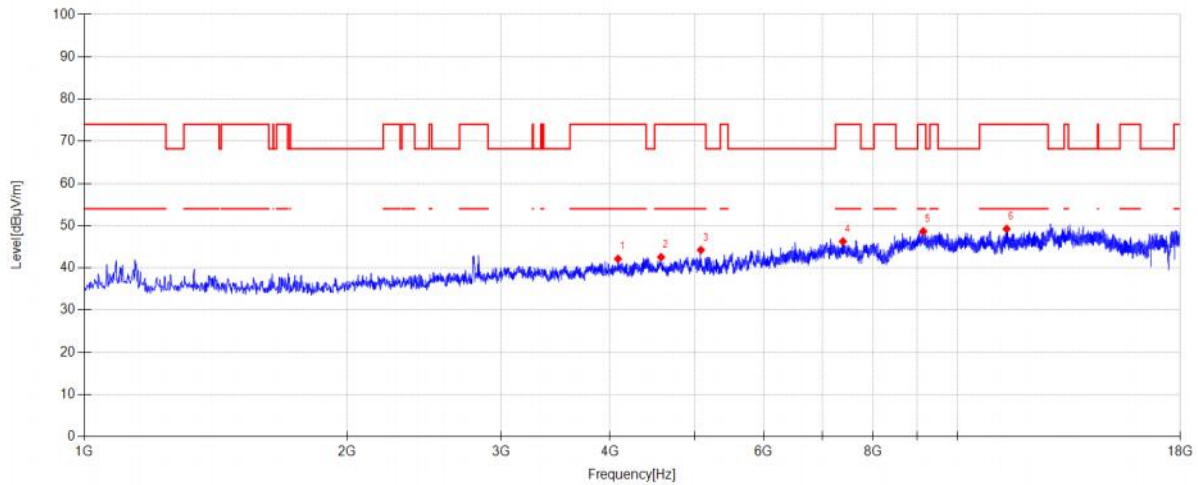


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4085.500	46.22	31.13	4.50	-39.71	42.14	74.00	31.86	PK	Vertical
2	4576.800	45.85	31.72	4.75	-39.76	42.56	74.00	31.44	PK	Vertical
3	5083.400	46.32	32.70	5.00	-39.78	44.24	74.00	29.76	PK	Vertical
4	7393.700	43.31	36.74	6.08	-39.86	46.27	74.00	27.73	PK	Vertical
5	9137.900	41.59	38.76	7.06	-38.75	48.66	74.00	25.34	PK	Vertical
6	11383.600	41.85	39.60	7.40	-39.60	49.25	74.00	24.75	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 20V

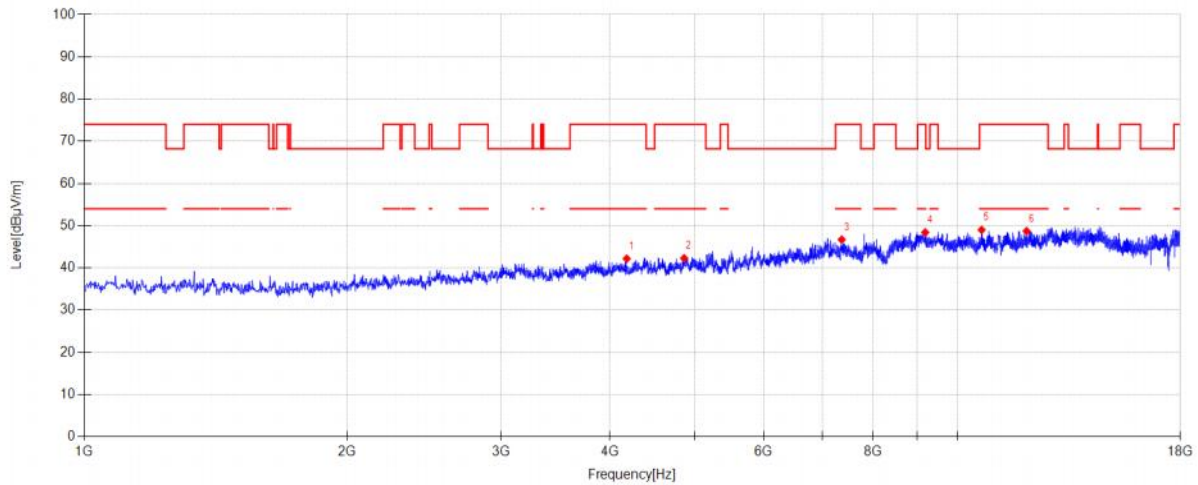


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4180.700	46.17	31.19	4.55	-39.72	42.19	74.00	31.81	PK	Horizontal
2	4864.100	44.23	32.96	4.89	-39.79	42.29	74.00	31.71	PK	Horizontal
3	7369.900	43.62	36.88	6.07	-39.86	46.71	74.00	27.29	PK	Horizontal
4	9183.800	41.56	38.59	7.06	-38.80	48.41	74.00	25.59	PK	Horizontal
5	10659.400	42.04	39.38	7.21	-39.63	49.00	74.00	25.00	PK	Horizontal
6	12000.700	41.60	39.00	7.72	-39.60	48.72	74.00	25.28	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 20V

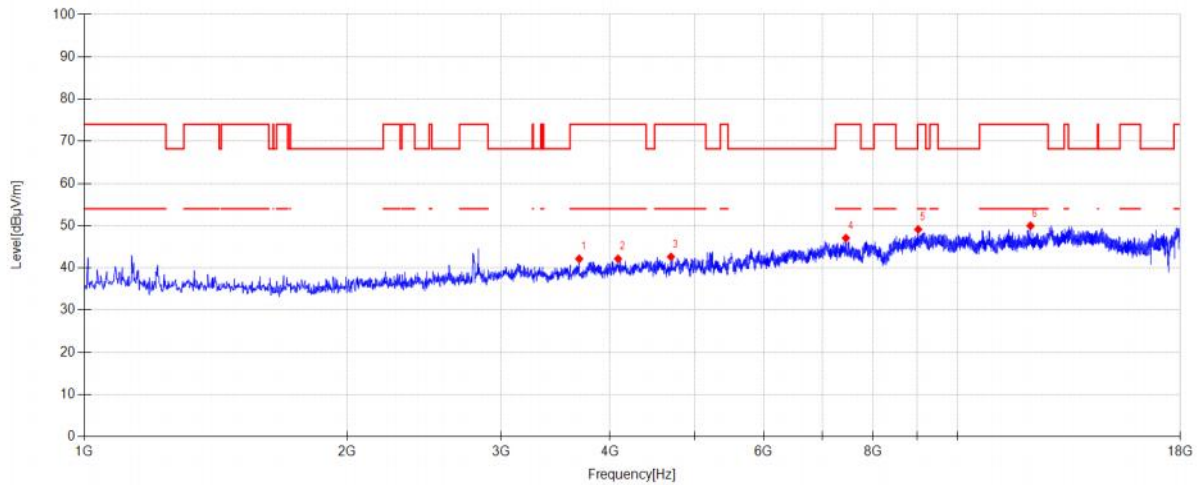


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3687.700	47.58	29.78	4.37	-39.58	42.15	74.00	31.85	PK	Vertical
2	4085.500	46.24	31.13	4.50	-39.71	42.16	74.00	31.84	PK	Vertical
3	4697.500	46.28	31.32	4.81	-39.77	42.64	74.00	31.36	PK	Vertical
4	7451.500	44.21	36.61	6.10	-39.85	47.07	74.00	26.93	PK	Vertical
5	9017.200	42.06	38.64	7.03	-38.62	49.11	74.00	24.89	PK	Vertical
6	12124.800	42.34	39.43	7.71	-39.50	49.98	74.00	24.02	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 20V

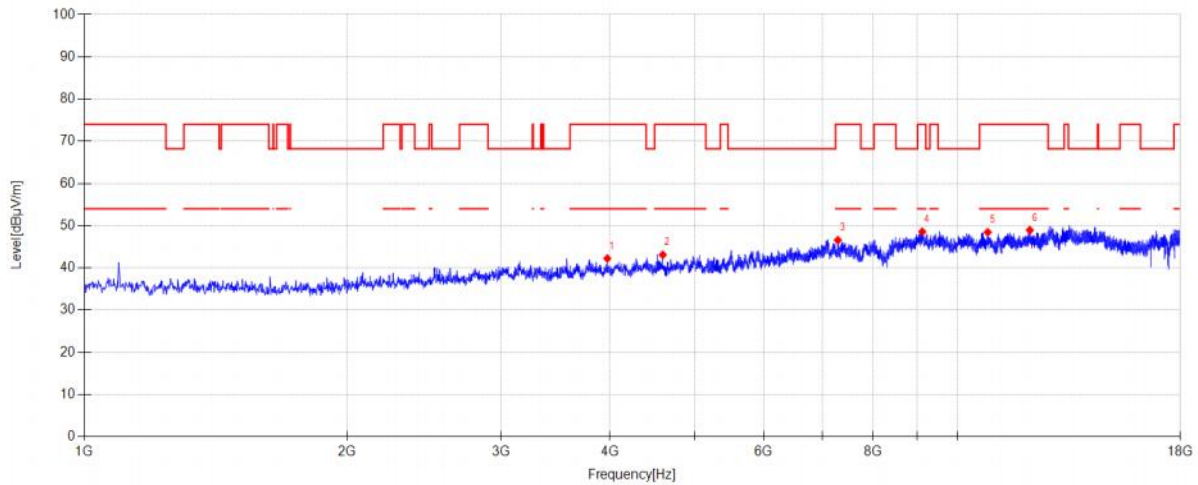


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3971.600	46.92	30.56	4.45	-39.69	42.24	74.00	31.76	PK	Horizontal
2	4597.200	46.67	31.44	4.76	-39.76	43.11	74.00	30.89	PK	Horizontal
3	7295.100	43.39	37.00	6.05	-39.87	46.57	74.00	27.43	PK	Horizontal
4	9114.100	41.98	38.28	7.05	-38.73	48.58	74.00	25.42	PK	Horizontal
5	10831.100	41.68	39.19	7.20	-39.62	48.45	74.00	25.55	PK	Horizontal
6	12102.700	41.26	39.49	7.71	-39.52	48.94	74.00	25.06	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 20V

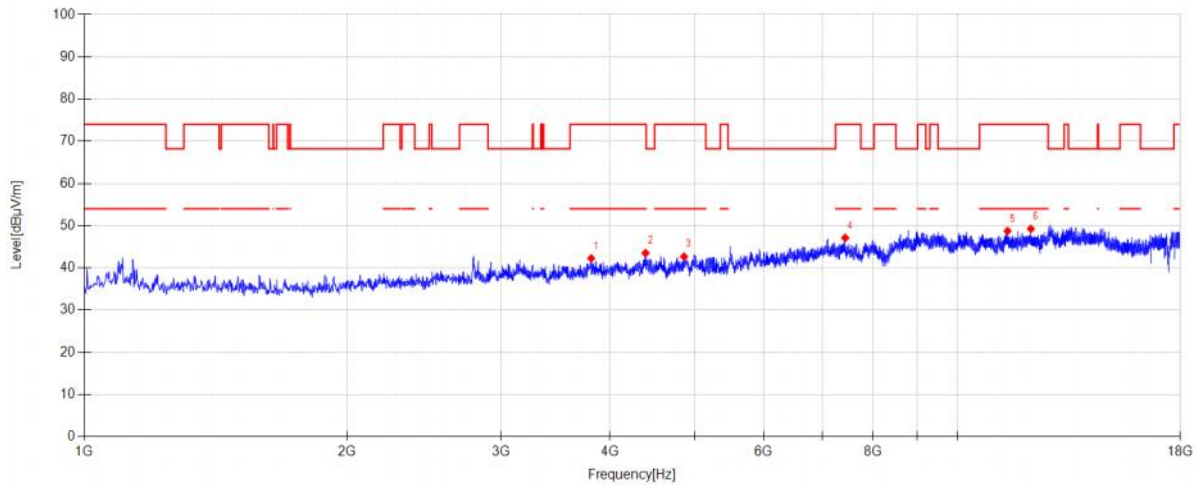


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3806.700	46.66	30.82	4.40	-39.62	42.26	74.00	31.74	PK	Vertical
2	4393.200	46.78	31.82	4.66	-39.74	43.52	74.00	30.48	PK	Vertical
3	4862.400	44.64	32.95	4.89	-39.79	42.69	74.00	31.31	PK	Vertical
4	7437.900	44.26	36.62	6.09	-39.86	47.11	74.00	26.89	PK	Vertical
5	11410.800	41.24	39.69	7.41	-39.60	48.74	74.00	25.26	PK	Vertical
6	12136.700	41.65	39.39	7.71	-39.49	49.26	74.00	24.74	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 20V

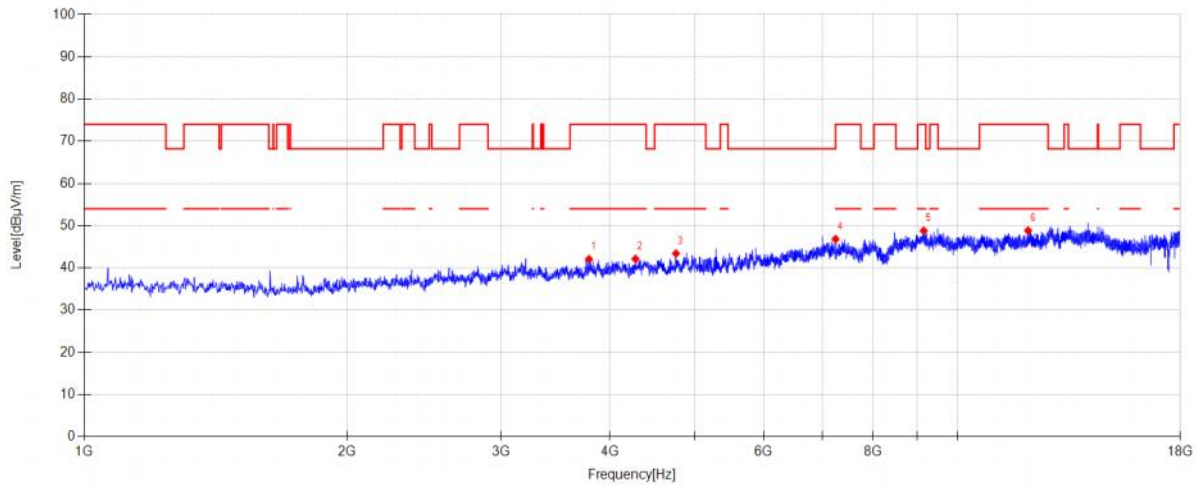


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3784.600	46.73	30.56	4.40	-39.61	42.08	74.00	31.92	PK	Horizontal
2	4277.600	45.62	31.64	4.60	-39.73	42.13	74.00	31.87	PK	Horizontal
3	4760.400	46.18	32.18	4.84	-39.78	43.42	74.00	30.58	PK	Horizontal
4	7250.900	43.65	37.00	6.04	-39.87	46.82	74.00	27.18	PK	Horizontal
5	9148.100	41.55	38.96	7.06	-38.76	48.81	74.00	25.19	PK	Horizontal
6	12046.600	41.46	39.23	7.72	-39.56	48.85	74.00	25.15	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 20V

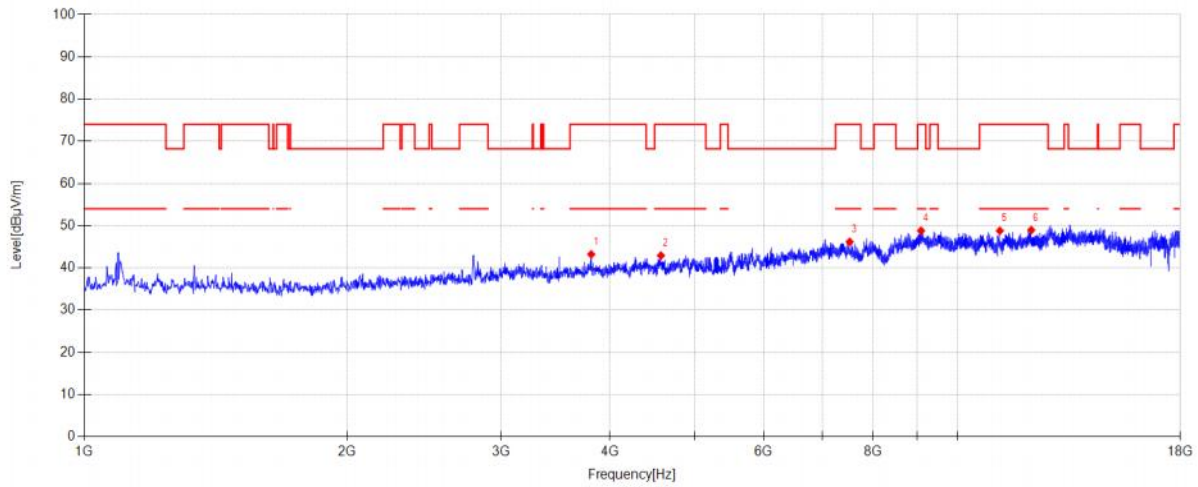


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3806.700	47.63	30.82	4.40	-39.62	43.23	74.00	30.77	PK	Vertical
2	4575.100	46.18	31.75	4.75	-39.76	42.92	74.00	31.08	PK	Vertical
3	7526.300	43.39	36.53	6.12	-39.85	46.19	74.00	27.81	PK	Vertical
4	9085.200	42.18	38.27	7.05	-38.69	48.81	74.00	25.19	PK	Vertical
5	11183.000	42.29	38.82	7.30	-39.60	48.81	74.00	25.19	PK	Vertical
6	12148.600	41.39	39.35	7.71	-39.48	48.97	74.00	25.03	PK	Vertical

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 20V

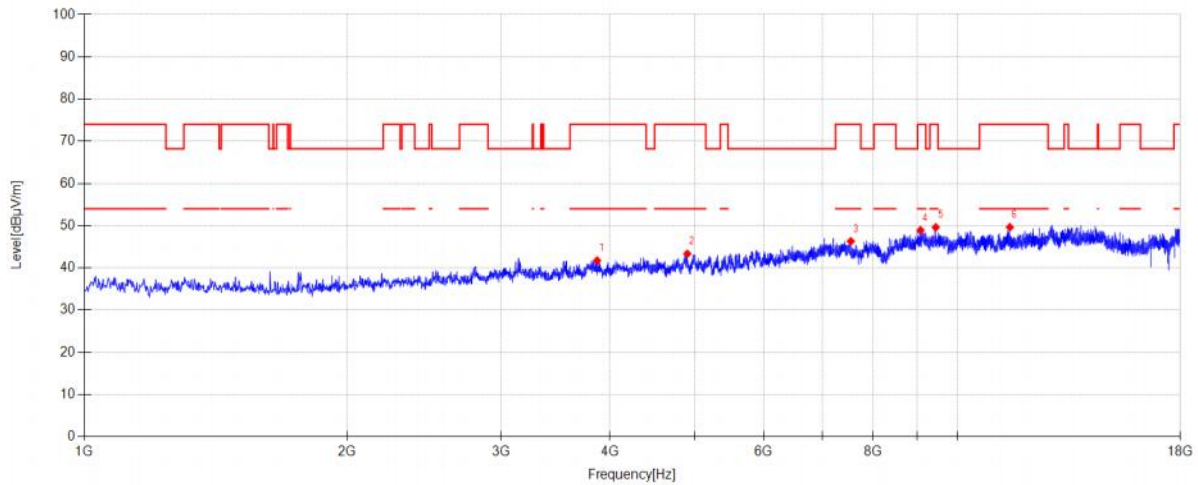


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3866.200	46.49	30.49	4.42	-39.65	41.75	74.00	32.25	PK	Horizontal
2	4904.900	45.12	33.10	4.91	-39.79	43.34	74.00	30.66	PK	Horizontal
3	7550.100	43.84	36.20	6.13	-39.84	46.33	74.00	27.67	PK	Horizontal
4	9071.600	42.06	38.51	7.04	-38.68	48.93	74.00	25.07	PK	Horizontal
5	9443.900	43.34	38.26	7.11	-39.09	49.62	74.00	24.38	PK	Horizontal
6	11482.200	42.81	38.98	7.45	-39.60	49.64	74.00	24.36	PK	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 20V

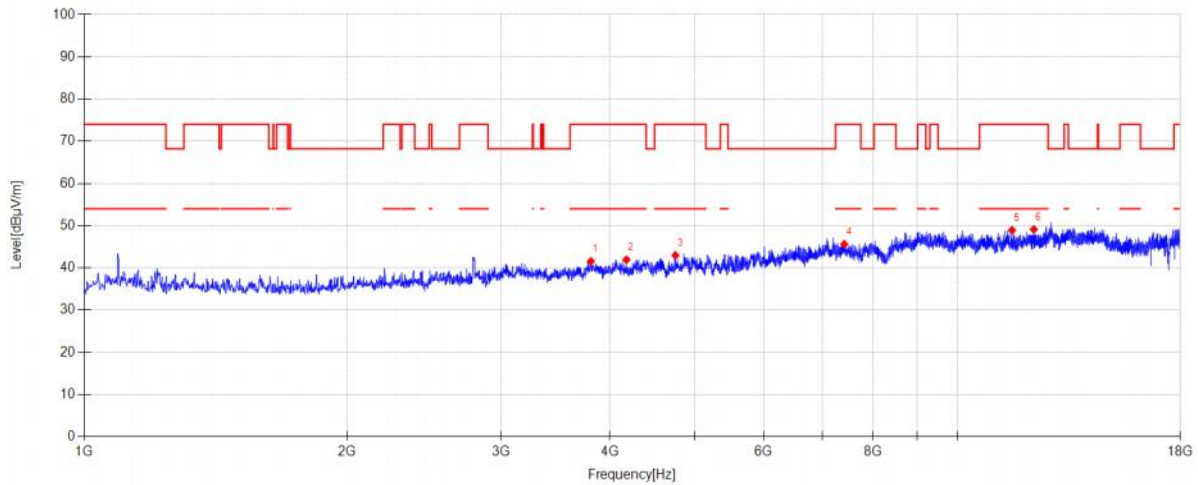


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3803.300	45.91	30.86	4.40	-39.62	41.55	74.00	32.45	PK	Vertical
2	4177.300	45.89	31.23	4.55	-39.72	41.95	74.00	32.05	PK	Vertical
3	4753.600	45.74	32.19	4.84	-39.78	42.99	74.00	31.01	PK	Vertical
4	7420.900	42.75	36.66	6.09	-39.86	45.64	74.00	28.36	PK	Vertical
5	11548.500	42.34	38.70	7.49	-39.60	48.93	74.00	25.07	PK	Vertical
6	12230.200	41.57	39.26	7.70	-39.42	49.11	74.00	24.89	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

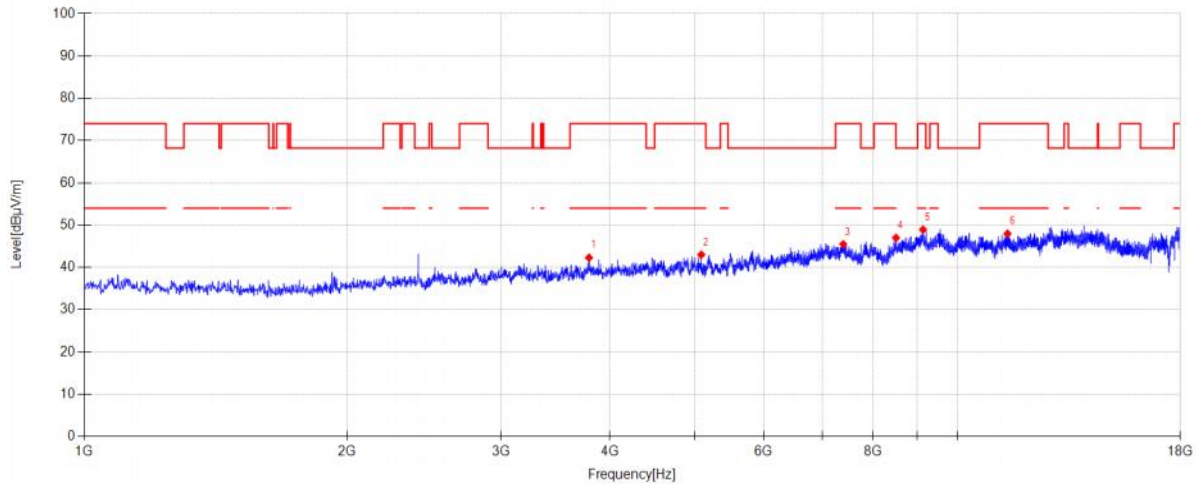


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3784.600	46.95	30.56	4.40	-39.61	42.30	74.00	31.70	PK	Horizontal
2	5088.500	45.16	32.64	5.00	-39.78	43.02	74.00	30.98	PK	Horizontal
3	7398.800	42.55	36.71	6.08	-39.86	45.48	74.00	28.52	PK	Horizontal
4	8503.800	41.69	37.86	6.65	-39.20	47.00	68.20	21.20	PK	Horizontal
5	9132.800	41.97	38.66	7.06	-38.75	48.94	74.00	25.06	PK	Horizontal
6	11410.800	40.48	39.69	7.41	-39.60	47.98	74.00	26.02	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

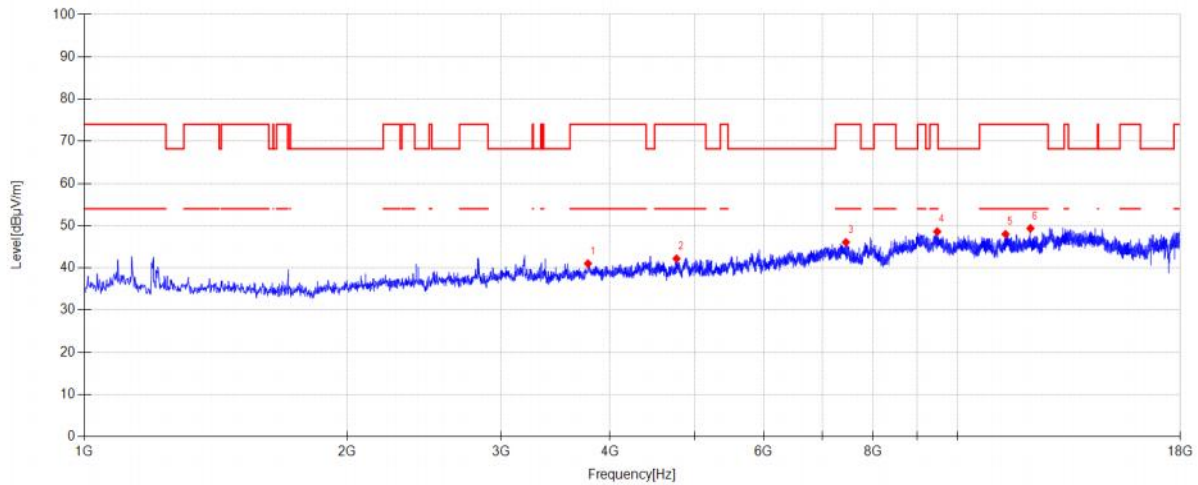


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3774.400	45.91	30.34	4.39	-39.61	41.03	74.00	32.97	PK	Vertical
2	4767.200	44.97	32.17	4.84	-39.78	42.20	74.00	31.80	PK	Vertical
3	7451.500	43.22	36.61	6.10	-39.85	46.08	74.00	27.92	PK	Vertical
4	9479.600	42.00	38.61	7.12	-39.13	48.60	74.00	25.40	PK	Vertical
5	11351.300	41.00	39.22	7.38	-39.60	48.00	74.00	26.00	PK	Vertical
6	12123.100	41.74	39.43	7.71	-39.50	49.38	74.00	24.62	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 20V

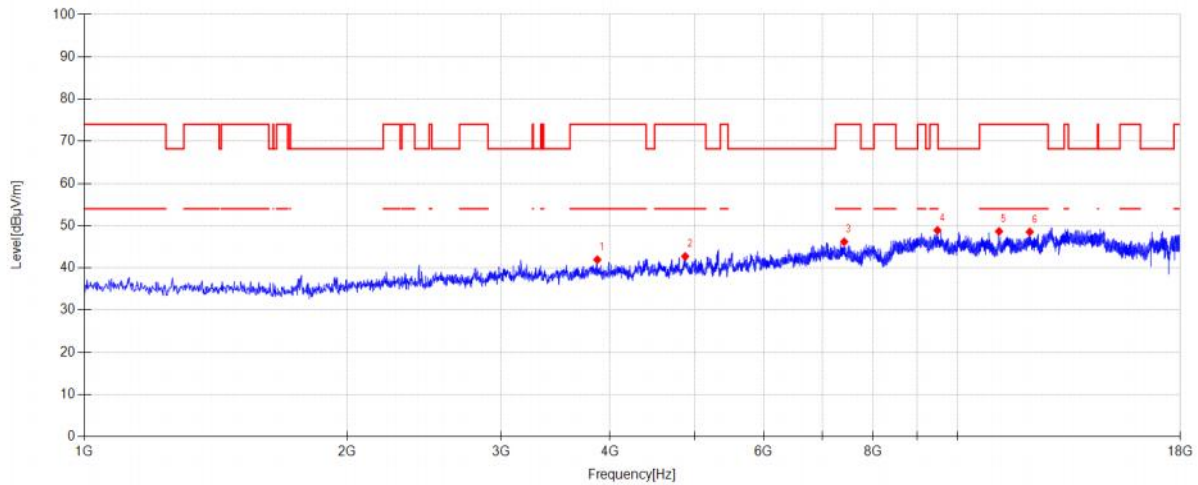


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3867.900	46.67	30.51	4.42	-39.65	41.95	74.00	32.05	PK	Horizontal
2	4877.700	44.62	33.01	4.90	-39.79	42.74	74.00	31.26	PK	Horizontal
3	7417.500	43.30	36.67	6.09	-39.86	46.20	74.00	27.80	PK	Horizontal
4	9486.400	42.21	38.71	7.12	-39.14	48.90	74.00	25.10	PK	Horizontal
5	11159.200	42.14	38.84	7.28	-39.60	48.66	74.00	25.34	PK	Horizontal
6	12101.000	40.85	39.50	7.71	-39.52	48.54	74.00	25.46	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 20V

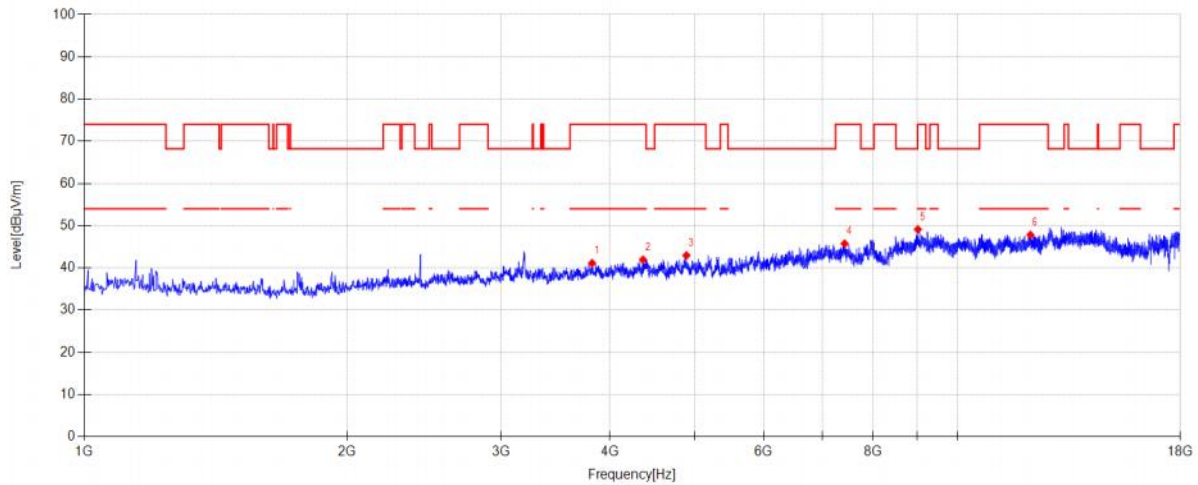


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3815.200	45.64	30.72	4.40	-39.63	41.13	74.00	32.87	PK	Vertical
2	4364.300	45.58	31.47	4.64	-39.74	41.95	74.00	32.05	PK	Vertical
3	4893.000	44.78	33.07	4.91	-39.79	42.97	74.00	31.03	PK	Vertical
4	7426.000	42.87	36.65	6.09	-39.86	45.75	74.00	28.25	PK	Vertical
5	9008.700	42.14	38.57	7.03	-38.61	49.13	74.00	24.87	PK	Vertical
6	12123.100	40.18	39.43	7.71	-39.50	47.82	74.00	26.18	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 20V

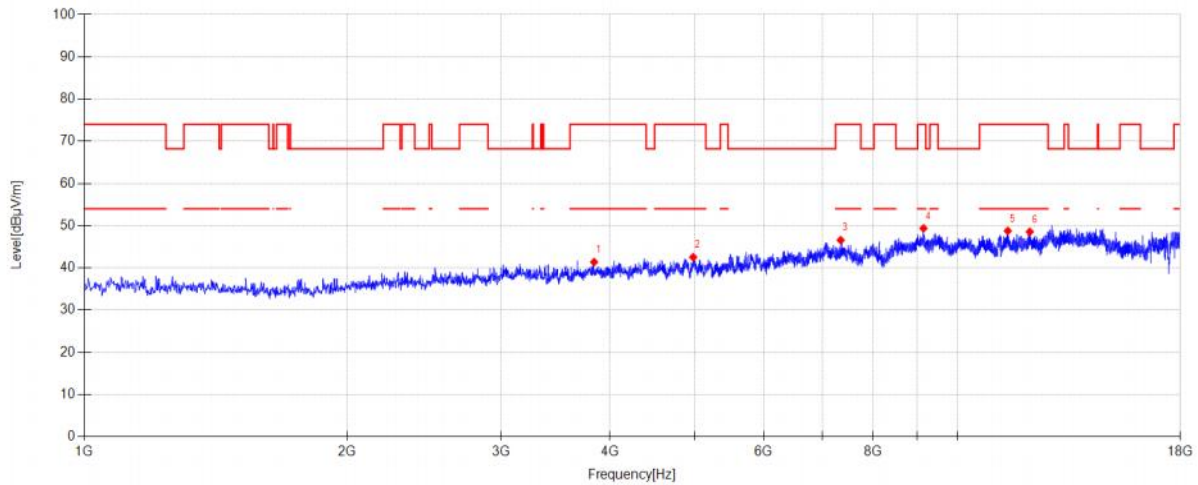


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3835.600	46.15	30.47	4.41	-39.63	41.40	74.00	32.60	PK	Horizontal
2	4981.400	44.35	33.04	4.95	-39.80	42.54	74.00	31.46	PK	Horizontal
3	7349.500	43.39	37.00	6.06	-39.87	46.58	74.00	27.42	PK	Horizontal
4	9143.000	42.22	38.86	7.06	-38.76	49.38	74.00	24.62	PK	Horizontal
5	11419.300	41.34	39.61	7.42	-39.60	48.77	74.00	25.23	PK	Horizontal
6	12101.000	40.87	39.50	7.71	-39.52	48.56	74.00	25.44	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 20V

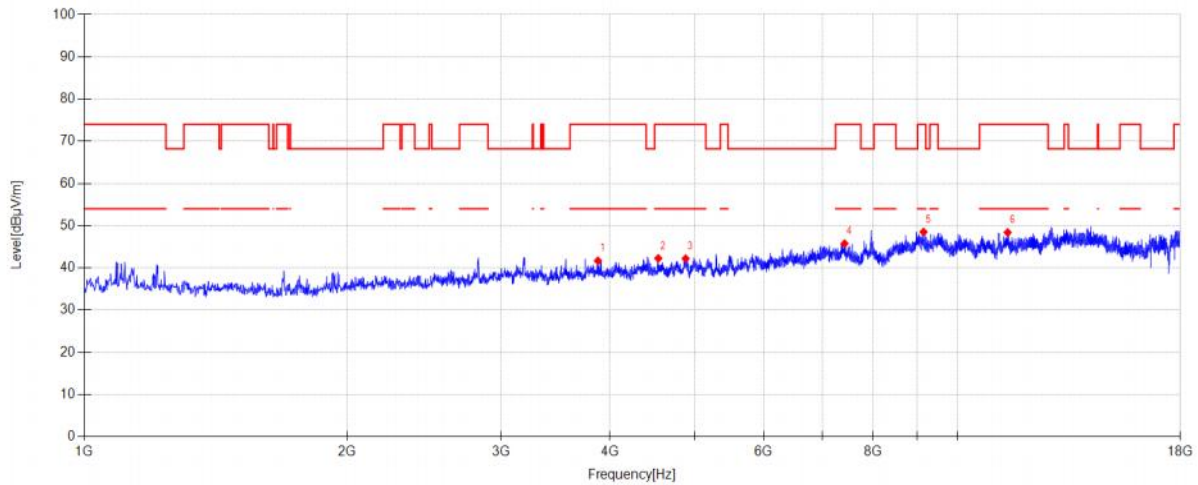


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3874.700	46.33	30.60	4.42	-39.65	41.70	74.00	32.30	PK	Vertical
2	4542.800	45.30	31.98	4.73	-39.75	42.26	74.00	31.74	PK	Vertical
3	4882.800	44.07	33.03	4.90	-39.79	42.21	74.00	31.79	PK	Vertical
4	7424.300	42.88	36.65	6.09	-39.86	45.76	74.00	28.24	PK	Vertical
5	9144.700	41.35	38.89	7.06	-38.76	48.54	74.00	25.46	PK	Vertical
6	11415.900	40.94	39.64	7.42	-39.60	48.40	74.00	25.60	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 20V

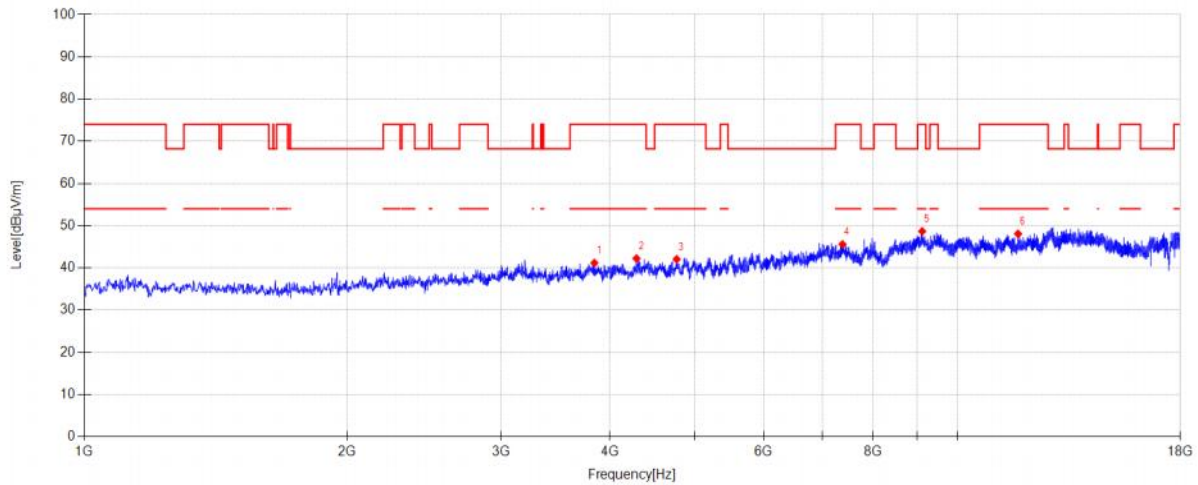


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3839.000	45.98	30.43	4.41	-39.64	41.18	74.00	32.82	PK	Horizontal
2	4289.500	45.53	31.83	4.60	-39.73	42.23	74.00	31.77	PK	Horizontal
3	4768.900	44.83	32.16	4.84	-39.78	42.05	74.00	31.95	PK	Horizontal
4	7385.200	42.57	36.79	6.08	-39.86	45.58	74.00	28.42	PK	Horizontal
5	9112.400	42.09	38.25	7.05	-38.72	48.67	74.00	25.33	PK	Horizontal
6	11733.800	41.57	38.53	7.58	-39.60	48.08	74.00	25.92	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 20V

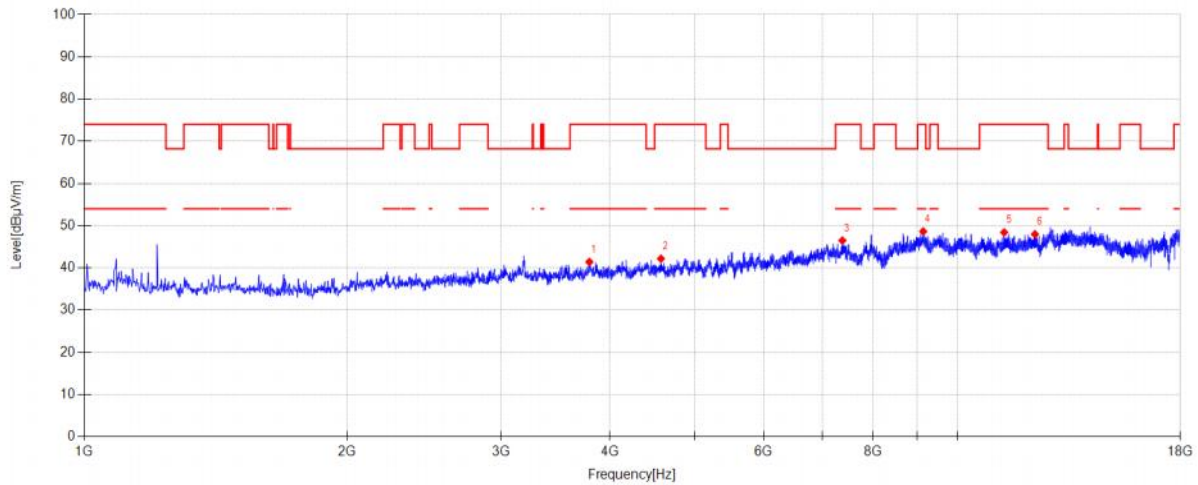


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3788.000	45.99	30.64	4.40	-39.62	41.41	74.00	32.59	PK	Vertical
2	4575.100	45.44	31.75	4.75	-39.76	42.18	74.00	31.82	PK	Vertical
3	7381.800	43.47	36.81	6.07	-39.86	46.49	74.00	27.51	PK	Vertical
4	9136.200	41.62	38.72	7.06	-38.75	48.65	74.00	25.35	PK	Vertical
5	11310.500	41.93	38.73	7.36	-39.60	48.42	74.00	25.58	PK	Vertical
6	12267.600	40.32	39.34	7.70	-39.39	47.97	74.00	26.03	PK	Vertical

Test Mode:	802.11N20 MIMO	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 20V

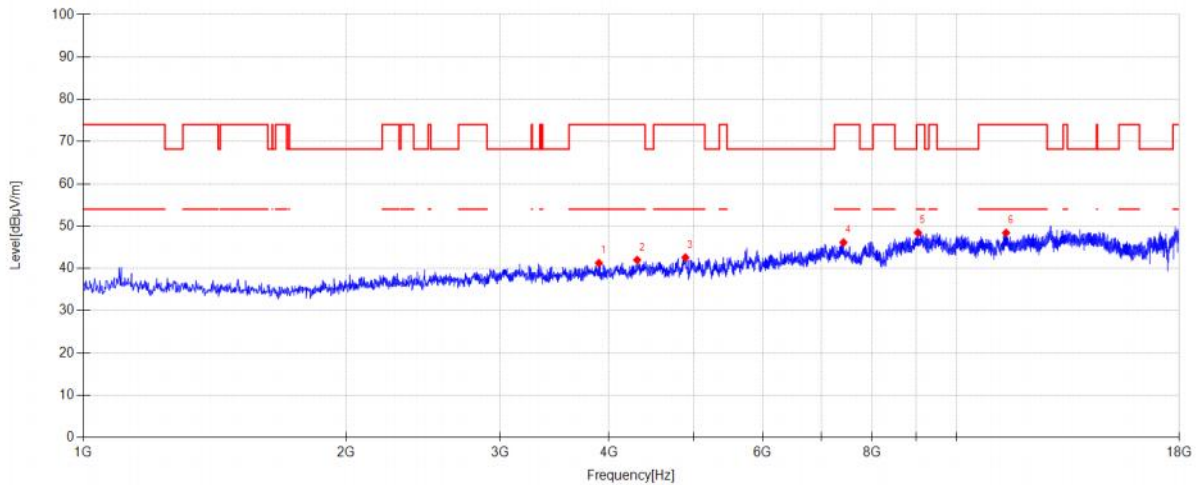


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3895.100	45.66	30.84	4.43	-39.66	41.27	74.00	32.73	PK	Horizontal
2	4308.200	45.22	31.89	4.61	-39.73	41.99	74.00	32.01	PK	Horizontal
3	4893.000	44.39	33.07	4.91	-39.79	42.58	74.00	31.42	PK	Horizontal
4	7422.600	43.26	36.65	6.09	-39.86	46.14	74.00	27.86	PK	Horizontal
5	9034.200	41.29	38.77	7.04	-38.64	48.46	74.00	25.54	PK	Horizontal
6	11397.200	40.82	39.77	7.41	-39.60	48.40	74.00	25.60	PK	Horizontal

Test Mode:	802.11N20 MIMO	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 20V

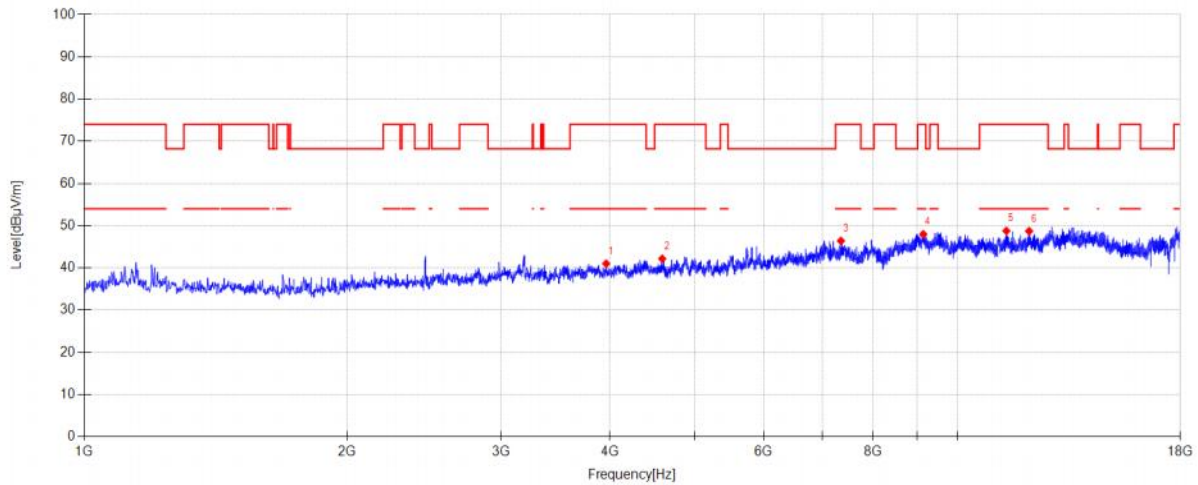


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3959.700	45.82	30.42	4.45	-39.68	41.01	74.00	32.99	PK	Vertical
2	4590.400	45.64	31.53	4.76	-39.76	42.17	74.00	31.83	PK	Vertical
3	7354.600	43.23	36.97	6.07	-39.86	46.41	74.00	27.59	PK	Vertical
4	9137.900	40.92	38.76	7.06	-38.75	47.99	74.00	26.01	PK	Vertical
5	11376.800	41.46	39.52	7.40	-39.60	48.78	74.00	25.22	PK	Vertical
6	12080.600	41.15	39.40	7.71	-39.54	48.72	74.00	25.28	PK	Vertical

Test Mode:	802.11N20 MIMO	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 20V

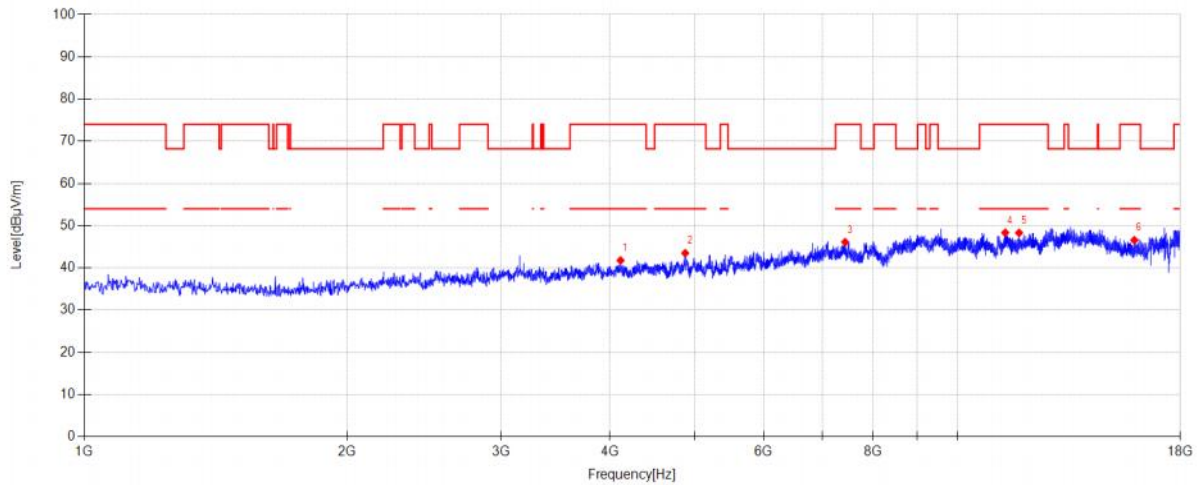


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4112.700	45.77	31.20	4.52	-39.71	41.78	74.00	32.22	PK	Horizontal
2	4877.700	45.39	33.01	4.90	-39.79	43.51	74.00	30.49	PK	Horizontal
3	7436.200	43.27	36.63	6.09	-39.86	46.13	74.00	27.87	PK	Horizontal
4	11342.800	41.47	39.11	7.38	-39.60	48.36	74.00	25.64	PK	Horizontal
5	11764.400	41.74	38.56	7.60	-39.60	48.30	74.00	25.70	PK	Horizontal
6	15941.300	39.40	37.88	8.84	-39.54	46.58	74.00	27.42	PK	Horizontal

Test Mode:	802.11N20 MIMO	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 20V

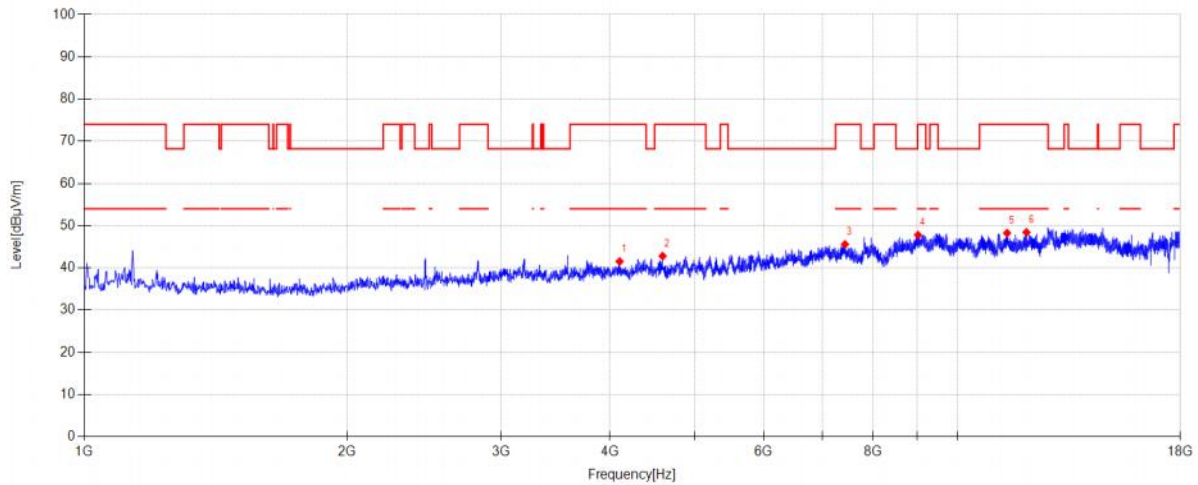


Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4102.500	45.61	31.12	4.51	-39.71	41.53	74.00	32.47	PK	Vertical
2	4595.500	46.35	31.46	4.76	-39.76	42.81	74.00	31.19	PK	Vertical
3	7432.800	42.73	36.63	6.09	-39.86	45.59	74.00	28.41	PK	Vertical
4	9012.100	40.78	38.60	7.03	-38.61	47.80	74.00	26.20	PK	Vertical
5	11398.900	40.65	39.79	7.41	-39.60	48.25	74.00	25.75	PK	Vertical
6	11997.300	41.33	38.99	7.72	-39.60	48.44	74.00	25.56	PK	Vertical

Test Mode:	802.11N20 MIMO	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 20V

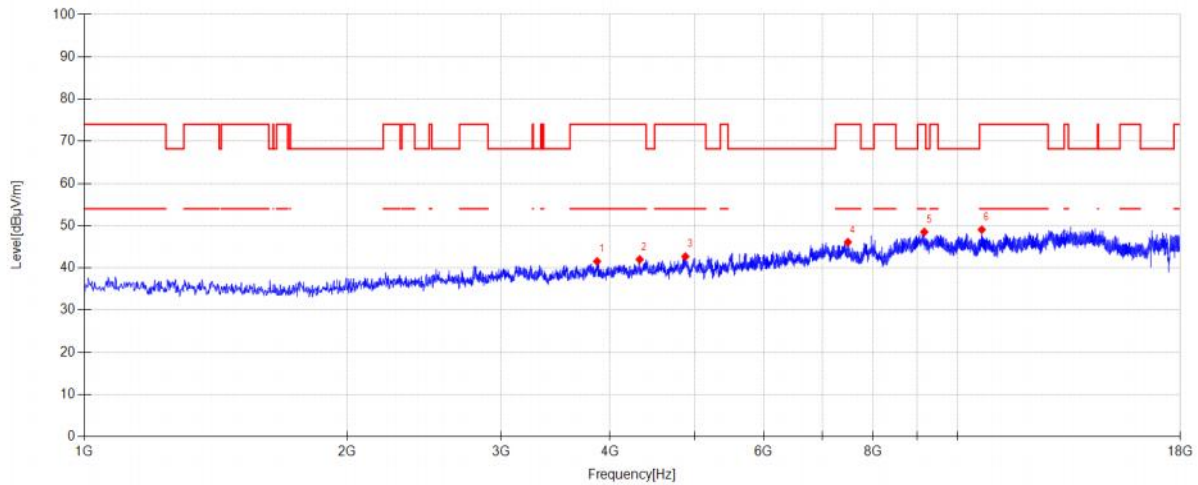

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3866.200	46.30	30.49	4.42	-39.65	41.56	74.00	32.44	PK	Horizontal
2	4325.200	45.46	31.65	4.62	-39.73	42.00	74.00	32.00	PK	Horizontal
3	4879.400	44.57	33.02	4.90	-39.79	42.70	74.00	31.30	PK	Horizontal
4	7490.600	43.01	36.84	6.11	-39.85	46.11	74.00	27.89	PK	Horizontal
5	9161.700	41.39	38.86	7.06	-38.78	48.53	74.00	25.47	PK	Horizontal
6	10662.800	42.09	39.39	7.21	-39.63	49.06	74.00	24.94	PK	Horizontal


Test Mode:	802.11N20 MIMO	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 20V

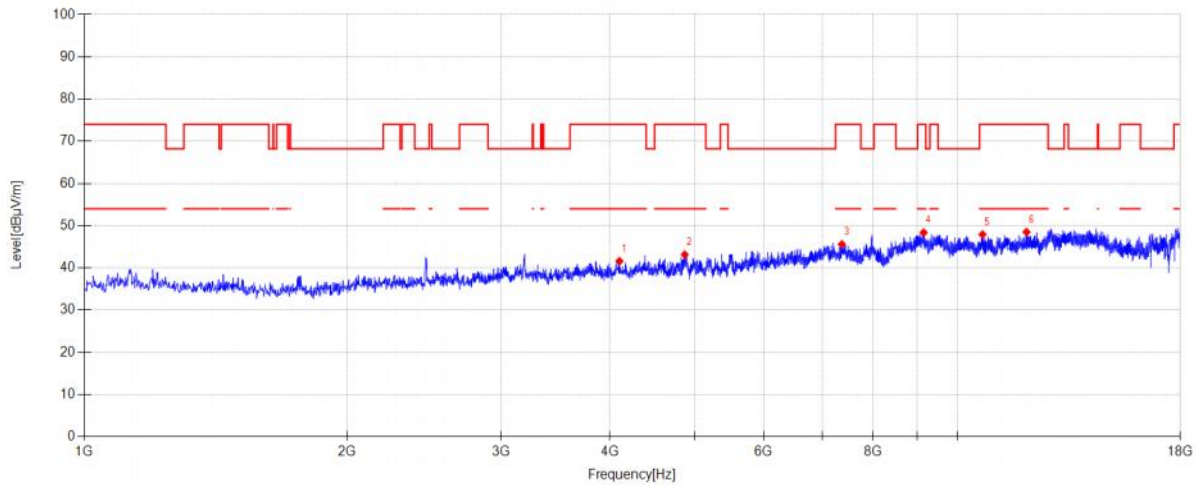

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4100.800	45.70	31.11	4.51	-39.71	41.61	74.00	32.39	PK	Vertical
2	4870.900	45.07	32.98	4.90	-39.79	43.16	74.00	30.84	PK	Vertical
3	7373.300	42.53	36.86	6.07	-39.86	45.60	74.00	28.40	PK	Vertical
4	9146.400	41.15	38.93	7.06	-38.76	48.38	74.00	25.62	PK	Vertical
5	10683.200	40.89	39.45	7.21	-39.63	47.92	74.00	26.08	PK	Vertical
6	11999.000	41.38	39.00	7.72	-39.60	48.50	74.00	25.50	PK	Vertical

8.3. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)


Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 20V

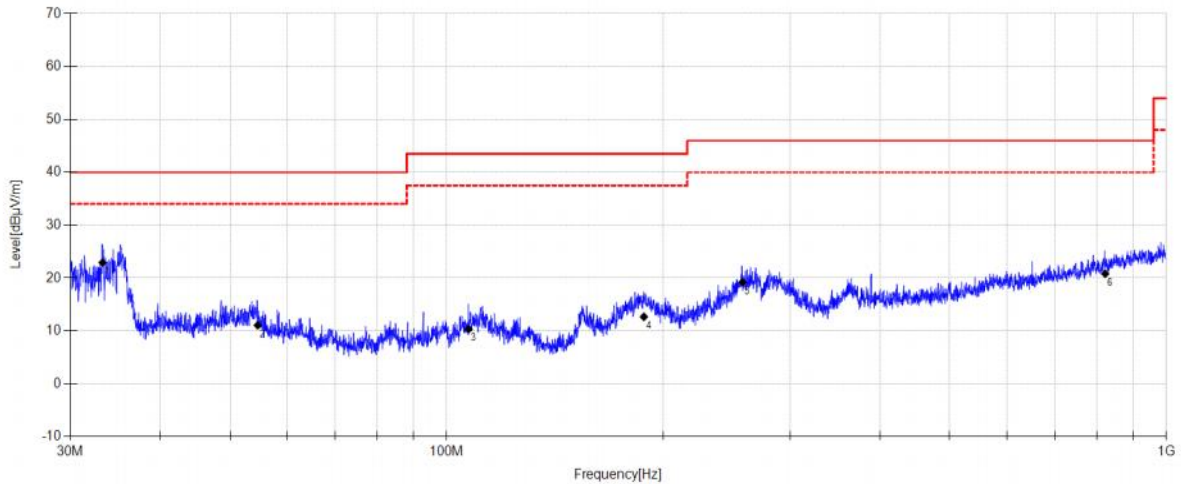

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.257	40.39	11.00	3.83	22.92	40.00	17.08	QP	Horizontal
2	54.636	26.38	12.95	4.02	11.05	40.00	28.95	QP	Horizontal
3	107.257	27.17	11.13	4.34	10.33	43.50	33.17	QP	Horizontal
4	187.948	30.18	10.06	4.81	12.66	43.50	30.84	QP	Horizontal
5	257.673	34.29	12.20	5.11	19.20	46.00	26.80	QP	Horizontal
6	822.319	25.34	20.86	6.98	20.81	46.00	25.19	QP	Horizontal

Test Mode:	802.11 N20 MIMO	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 20V

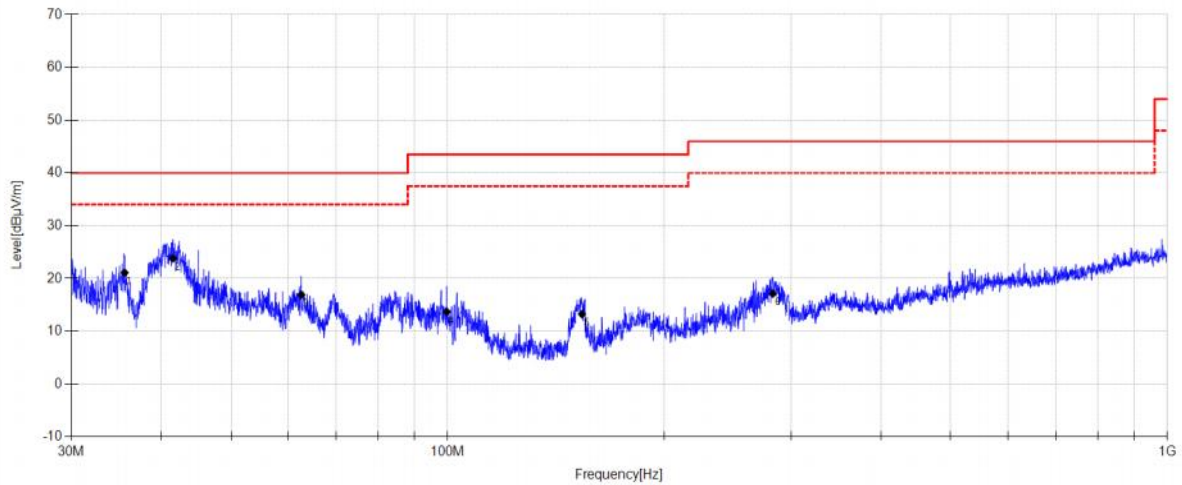

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.573	37.9	11.64	3.86	21.10	40.00	18.90	QP	Vertical
2	41.535	39.27	12.91	3.93	23.81	40.00	16.19	QP	Vertical
3	62.598	32.64	12.48	4.09	16.91	40.00	23.09	QP	Vertical
4	99.714	29.86	11.83	4.30	13.69	43.50	29.81	QP	Vertical
5	153.688	31.96	9.02	4.61	13.24	43.50	30.26	QP	Vertical
6	283.057	31.23	13.10	5.21	17.14	46.00	28.86	QP	Vertical

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. TEST DATA

10.1. APPENDIX A: MAXIMUM CONDUCTED OUTPUT POWER

10.1.1. Test Result-SU Mode

Test Mode	Ant.	Freq [MHz]	Result [dBm]	FCC Limit [dBm]	EIRP [dBm]	Verdict
11A SISO	Ant1	5180	21.33	≤23.98	---	PASS
	Ant2	5180	21.35	≤23.98	---	PASS
	Ant1	5260	21.38	≤23.98	---	PASS
	Ant2	5260	21.35	≤23.98	---	PASS
	Ant1	5700	21.30	≤23.98	---	PASS
	Ant2	5700	21.40	≤23.98	---	PASS
	Ant1	5745	23.89	≤30.00	---	PASS
	Ant2	5745	23.17	≤30.00	---	PASS
	Ant1	5855	19.61	≤30.00	23.82	PASS
	Ant2	5855	19.50	≤30.00	23.93	PASS
11N20MIMO	Ant1	5240	18.08	≤23.98	---	PASS
	Ant2	5240	18.11	≤23.98	---	PASS
	total	5240	21.11	≤23.98	---	PASS
	Ant1	5320	18.22	≤23.98	---	PASS
	Ant2	5320	18.12	≤23.98	---	PASS
	total	5320	21.18	≤23.98	---	PASS
	Ant1	5500	18.25	≤23.98	---	PASS
	Ant2	5500	18.30	≤23.98	---	PASS
	total	5500	21.29	≤23.98	---	PASS
	Ant1	5785	23.16	≤30.00	---	PASS
	Ant2	5785	23.10	≤30.00	---	PASS
	total	5785	26.14	≤30.00	---	PASS
	Ant1	5865	16.75	≤30.00	20.96	PASS
	Ant2	5865	16.87	≤30.00	21.30	PASS
	total	5865	19.82	≤30.00	24.25	PASS
11N40MIMO	Ant1	5230	20.55	≤23.98	---	PASS
	Ant2	5230	20.43	≤23.98	---	PASS
	total	5230	23.50	≤23.98	---	PASS
	Ant1	5270	20.41	≤23.98	---	PASS
	Ant2	5270	20.41	≤23.98	---	PASS
	total	5270	23.42	≤23.98	---	PASS
	Ant1	5590	20.47	≤23.98	---	PASS
	Ant2	5590	20.61	≤23.98	---	PASS
	total	5590	23.55	≤23.98	---	PASS
	Ant1	5710	20.85	≤23.98	---	PASS
	Ant2	5710	20.87	≤23.98	---	PASS
	total	5710	23.87	≤23.98	---	PASS
	Ant1	5755	20.79	≤30.00	---	PASS
	Ant2	5755	20.66	≤30.00	---	PASS
	total	5755	23.74	≤30.00	---	PASS
	Ant1	5875	20.24	≤30.00	24.45	PASS
	Ant2	5875	20.11	≤30.00	24.54	PASS
	total	5875	23.19	≤30.00	27.62	PASS
11AC80MIMO	Ant1	5210	17.83	≤23.98	---	PASS
	Ant2	5210	18.46	≤23.98	---	PASS
	total	5210	21.17	≤23.98	---	PASS
	Ant1	5290	19.17	≤23.98	---	PASS
	Ant2	5290	19.52	≤23.98	---	PASS
	total	5290	21.29	≤23.98	---	PASS
	Ant1	5610	20.42	≤23.98	---	PASS


	Ant2	5610	20.43	≤23.98	---	PASS
	total	5610	23.44	≤23.98	---	PASS
	Ant1	5690	4.76	≤30.00	---	PASS
	Ant2	5690	4.64	≤30.00	---	PASS
	total	5690	7.71	≤30.00	---	PASS
	Ant1	5855	20.58	≤30.00	24.79	PASS
	Ant2	5855	20.37	≤30.00	24.80	PASS
	total	5855	23.49	≤30.00	27.92	PASS
11AC160MIMO	Ant1	5250	16.77	≤23.98	---	PASS
	Ant2	5250	16.85	≤23.98	---	PASS
	total	5250	19.82	≤23.98	---	PASS
	Ant1	5570	17.08	≤23.98	---	PASS
	Ant2	5570	16.93	≤23.98	---	PASS
	total	5570	20.02	≤23.98	---	PASS
	Ant1	5815	17.41	≤30.00	21.62	PASS
	Ant2	5815	17.33	≤30.00	21.76	PASS
	total	5815	20.38	≤30.00	24.81	PASS
11AX20MIMO	Ant1	5200	18.28	≤23.98	---	PASS
	Ant2	5200	18.37	≤23.98	---	PASS
	total	5200	21.34	≤23.98	---	PASS
	Ant1	5280	18.33	≤23.98	---	PASS
	Ant2	5280	18.18	≤23.98	---	PASS
	total	5280	21.27	≤23.98	---	PASS
	Ant1	5500	18.15	≤23.98	---	PASS
	Ant2	5500	18.09	≤23.98	---	PASS
	total	5500	21.13	≤23.98	---	PASS
	Ant1	5745	23.07	≤30.00	---	PASS
	Ant2	5745	23.23	≤30.00	---	PASS
	total	5745	26.28	≤30.00	---	PASS
	Ant1	5865	16.96	≤30.00	21.17	PASS
	Ant2	5865	17.01	≤30.00	21.44	PASS
	total	5865	20.00	≤30.00	24.43	PASS
11AX40MIMO	Ant1	5230	20.44	≤23.98	---	PASS
	Ant2	5230	20.34	≤23.98	---	PASS
	total	5230	23.40	≤23.98	---	PASS
	Ant1	5270	20.57	≤23.98	---	PASS
	Ant2	5270	20.53	≤23.98	---	PASS
	total	5270	23.56	≤23.98	---	PASS
	Ant1	5590	20.34	≤23.98	---	PASS
	Ant2	5590	20.58	≤23.98	---	PASS
	total	5590	23.47	≤23.98	---	PASS
	Ant1	5755	20.70	≤30.00	---	PASS
	Ant2	5755	20.55	≤30.00	---	PASS
	total	5755	23.64	≤30.00	---	PASS
	Ant1	5835	20.39	≤30.00	24.60	PASS
	Ant2	5835	20.29	≤30.00	24.72	PASS
	total	5835	23.35	≤30.00	27.78	PASS
11AX80MIMO	Ant1	5210	17.71	≤23.98	---	PASS
	Ant2	5210	17.65	≤23.98	---	PASS
	total	5210	20.69	≤23.98	---	PASS
	Ant1	5290	18.80	≤23.98	---	PASS
	Ant2	5290	18.22	≤23.98	---	PASS
	total	5290	21.53	≤23.98	---	PASS
	Ant1	5610	20.39	≤23.98	---	PASS
	Ant2	5610	20.56	≤23.98	---	PASS
	total	5610	23.49	≤23.98	---	PASS
	Ant1	5775	20.40	≤30.00	---	PASS
	Ant2	5775	20.57	≤30.00	---	PASS
	total	5775	23.50	≤30.00	---	PASS
	Ant1	5855	20.50	≤30.00	24.71	PASS

	Ant2	5855	20.23	≤30.00	24.66	PASS
	total	5855	23.38	≤30.00	27.81	PASS
11AX160MIMO	Ant1	5250	16.74	≤23.98	---	PASS
	Ant2	5250	16.66	≤23.98	---	PASS
	total	5250	19.71	≤23.98	---	PASS
	Ant1	5570	17.09	≤23.98	---	PASS
	Ant2	5570	16.97	≤23.98	---	PASS
	total	5570	20.04	≤23.98	---	PASS
	Ant1	5815	17.78	≤30.00	21.99	PASS
	Ant2	5815	17.24	≤30.00	21.67	PASS
	total	5815	20.53	≤30.00	24.96	PASS

10.2. APPENDIX B: DFS


10.2.1. Calibration

Frequency (MHz)	Type	Result	Verdict
5320	DFS_FCC_T0	See test Graph	Pass

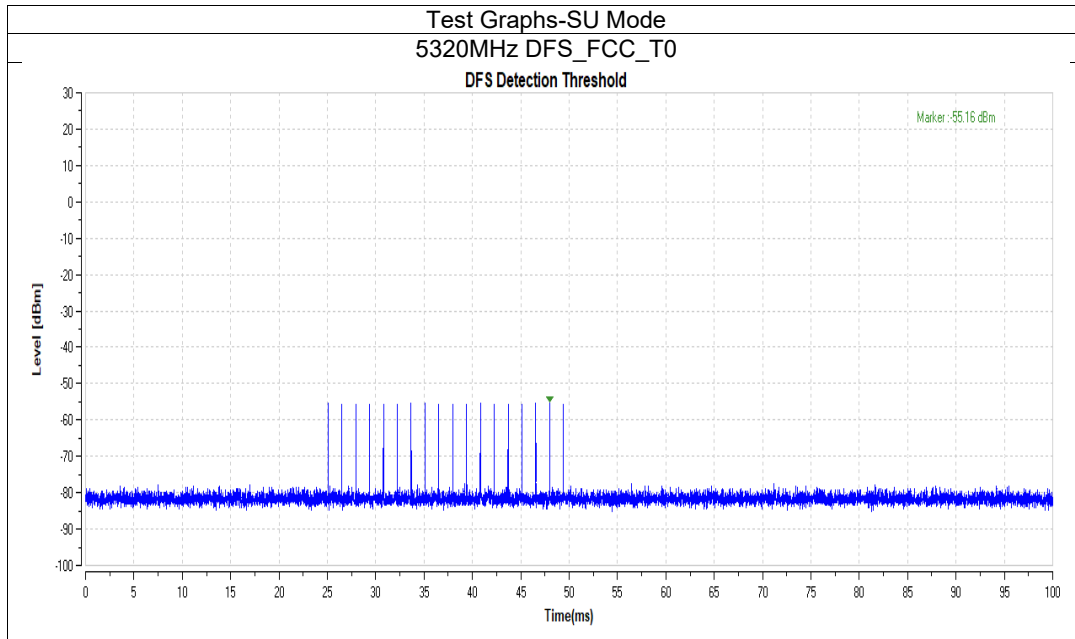


10.2.2. Shutdown Time

Frequency (MHz)	Channel Move Time (s)	Limit Channel Move Time (s)	Close Transmission Time (s)	Limit Close Transmission Time (s)	Close Transmission Time after 200ms(s)	Limit Close Transmission Time after 200ms (s)	Verdict
5320	0.894	10	0.226	0.26	0.026	0.06	Pass

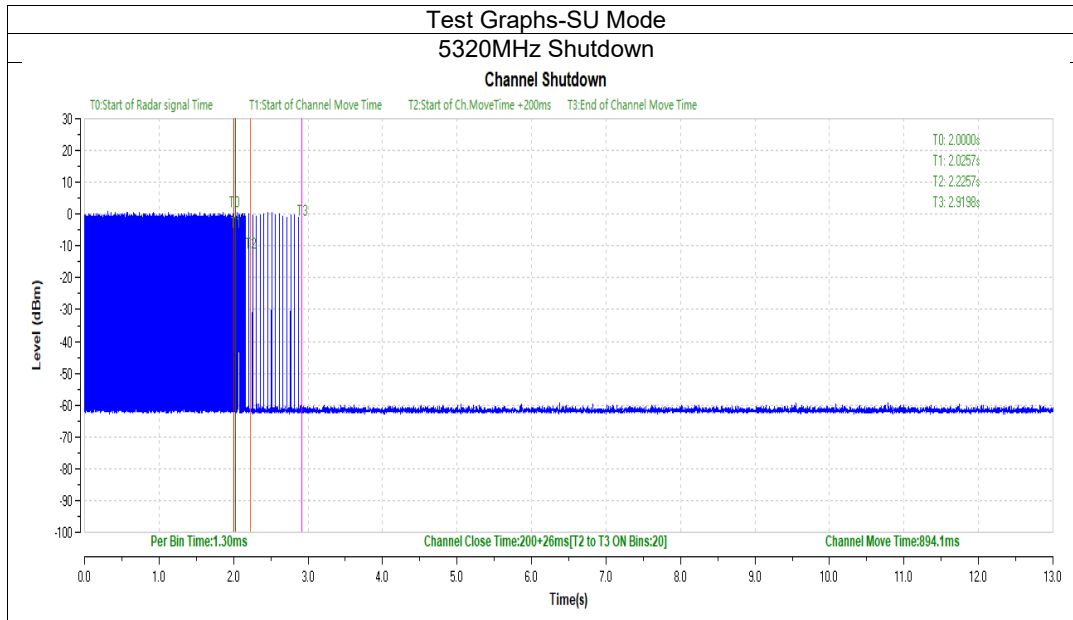

10.2.3. Non-Occupancy

Frequency (MHz)	Result	Verdict
5320	See test Graph	Pass

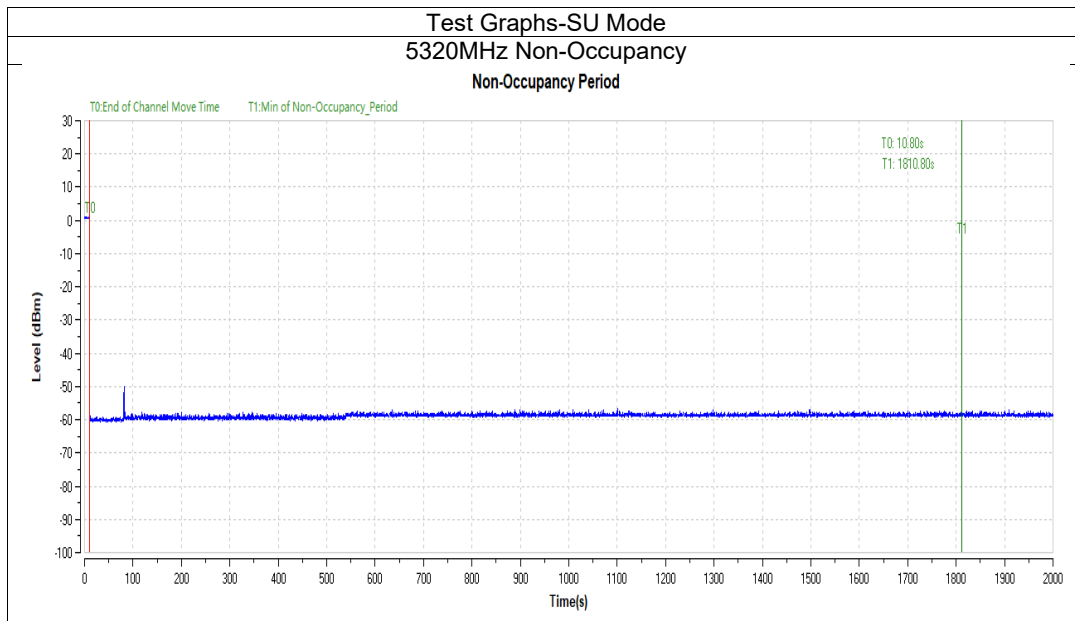

10.3. APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY

10.3.1. Test Result-SU Mode

Test Mode	Ant.	Freq [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	EIRP PSD [dBm/MHz]	Verdict
11A SISO	Ant1	5180	10.90	≤11.00	---	PASS
	Ant2	5180	10.93	≤11.00	---	PASS
	Ant1	5260	10.92	≤11.00	---	PASS
	Ant2	5260	10.88	≤11.00	---	PASS
	Ant1	5700	10.89	≤11.00	---	PASS
	Ant2	5700	10.95	≤11.00	---	PASS
	Ant1	5745	10.09	≤30.00	---	PASS
	Ant2	5745	9.45	≤30.00	---	PASS
	Ant1	5855	8.68	≤14.00	12.89	PASS
11N20MIMO	Ant2	5855	8.60	≤14.00	13.03	PASS
	Ant1	5240	7.33	≤11.00	---	PASS
	Ant2	5240	7.38	≤11.00	---	PASS
	total	5240	10.37	≤11.00	---	PASS
	Ant1	5320	7.49	≤11.00	---	PASS
	Ant2	5320	7.57	≤11.00	---	PASS
	total	5320	10.54	≤11.00	---	PASS
	Ant1	5500	7.69	≤11.00	---	PASS
	Ant2	5500	7.52	≤11.00	---	PASS
	total	5500	10.62	≤11.00	---	PASS
	Ant1	5785	9.06	≤30.00	---	PASS
	Ant2	5785	9.12	≤30.00	---	PASS
	total	5785	12.10	≤30.00	---	PASS
	Ant1	5865	5.62	≤14.00	9.83	PASS
	Ant2	5865	5.74	≤14.00	10.17	PASS
	total	5865	8.69	≤14.00	13.12	PASS
11N40MIMO	Ant1	5230	6.50	≤11.00	---	PASS
	Ant2	5230	6.39	≤11.00	---	PASS
	total	5230	9.46	≤11.00	---	PASS
	Ant1	5270	6.25	≤11.00	---	PASS
	Ant2	5270	6.30	≤11.00	---	PASS
	total	5270	9.29	≤11.00	---	PASS
	Ant1	5590	6.35	≤11.00	---	PASS
	Ant2	5590	6.57	≤11.00	---	PASS
	total	5590	9.47	≤11.00	---	PASS
	Ant1	5755	3.33	≤30.00	---	PASS
	Ant2	5755	3.21	≤30.00	---	PASS
	total	5755	6.28	≤30.00	---	PASS
	Ant1	5875	5.70	≤14.00	9.91	PASS
	Ant2	5875	5.52	≤14.00	9.95	PASS
	total	5875	8.62	≤14.00	13.05	PASS
11AC80MIMO	Ant1	5210	0.64	≤11.00	---	PASS
	Ant2	5210	1.34	≤11.00	---	PASS
	total	5210	4.01	≤11.00	---	PASS
	Ant1	5290	1.11	≤11.00	---	PASS
	Ant2	5290	1.09	≤11.00	---	PASS
	total	5290	4.11	≤11.00	---	PASS
	Ant1	5610	3.18	≤11.00	---	PASS
	Ant2	5610	3.45	≤11.00	---	PASS
	total	5610	6.33	≤11.00	---	PASS
	Ant1	5775	3.33	≤30.00	---	PASS
	Ant2	5775	3.21	≤30.00	---	PASS
	total	5775	6.28	≤30.00	---	PASS
	Ant1	5855	2.96	≤14.00	7.17	PASS
	Ant2	5855	2.71	≤14.00	7.14	PASS
	total	5855	5.85	≤14.00	10.28	PASS

11AC160MIMO	Ant1	5250	-3.11	≤11.00	---	PASS
	Ant2	5250	-3.27	≤11.00	---	PASS
	total	5250	-0.13	≤11.00	---	PASS
	Ant1	5570	-2.77	≤11.00	---	PASS
	Ant2	5570	-3.07	≤11.00	---	PASS
	total	5570	0.09	≤11.00	---	PASS
	Ant1	5815	-3.16	≤14.00	1.05	PASS
	Ant2	5815	-3.32	≤14.00	1.11	PASS
	total	5815	-0.23	≤14.00	4.20	PASS
11AX20MIMO	Ant1	5200	7.50	≤11.00	---	PASS
	Ant2	5200	7.54	≤11.00	---	PASS
	total	5200	10.53	≤11.00	---	PASS
	Ant1	5280	7.47	≤11.00	---	PASS
	Ant2	5280	7.48	≤11.00	---	PASS
	total	5280	10.49	≤11.00	---	PASS
	Ant1	5500	10.85	≤11.00	---	PASS
	Ant2	5500	7.35	≤11.00	---	PASS
	total	5500	10.43	≤11.00	---	PASS
	Ant1	5745	8.84	≤30.00	---	PASS
	Ant2	5745	9.01	≤30.00	---	PASS
	total	5745	11.94	≤30.00	---	PASS
	Ant1	5865	5.63	≤14.00	9.84	PASS
	Ant2	5865	5.65	≤14.00	10.08	PASS
	total	5865	8.65	≤14.00	13.08	PASS
11AX40MIMO	Ant1	5230	6.17	≤11.00	---	PASS
	Ant2	5230	6.15	≤11.00	---	PASS
	total	5230	9.17	≤11.00	---	PASS
	Ant1	5270	6.33	≤11.00	---	PASS
	Ant2	5270	6.38	≤11.00	---	PASS
	total	5270	9.37	≤11.00	---	PASS
	Ant1	5590	6.14	≤11.00	---	PASS
	Ant2	5590	6.38	≤11.00	---	PASS
	total	5590	9.27	≤11.00	---	PASS
	Ant1	5755	3.05	≤30.00	---	PASS
	Ant2	5755	2.93	≤30.00	---	PASS
	total	5755	6.00	≤30.00	---	PASS
	Ant1	5835	5.66	≤14.00	9.87	PASS
	Ant2	5835	5.54	≤14.00	9.97	PASS
	total	5835	8.61	≤14.00	13.04	PASS
11AX80MIMO	Ant1	5210	0.62	≤11.00	---	PASS
	Ant2	5210	0.46	≤11.00	---	PASS
	total	5210	3.55	≤11.00	---	PASS
	Ant1	5290	1.60	≤11.00	---	PASS
	Ant2	5290	1.07	≤11.00	---	PASS
	total	5290	4.35	≤11.00	---	PASS
	Ant1	5610	3.30	≤11.00	---	PASS
	Ant2	5610	3.35	≤11.00	---	PASS
	total	5610	6.34	≤11.00	---	PASS
	Ant1	5775	-0.27	≤30.00	---	PASS
	Ant2	5775	-0.08	≤30.00	---	PASS
	total	5775	2.84	≤30.00	---	PASS
	Ant1	5855	2.81	≤14.00	7.02	PASS
	Ant2	5855	2.53	≤14.00	6.96	PASS
	total	5855	5.68	≤14.00	10.11	PASS
11AX160MIMO	Ant1	5250	-3.23	≤11.00	---	PASS
	Ant2	5250	-3.36	≤11.00	---	PASS
	total	5250	-0.28	≤11.00	---	PASS
	Ant1	5570	-3.15	≤11.00	---	PASS
	Ant2	5570	1.66	≤11.00	---	PASS
	total	5570	1.67	≤11.00	---	PASS

	Ant1	5815	-2.95	≤14.00	1.26	PASS
	Ant2	5815	-3.35	≤14.00	1.08	PASS
	total	5815	-0.13	≤14.00	4.30	PASS

END OF REPORT