

FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

Intel BE200

MODEL NUMBER: BE200NGW

REPORT NUMBER: 4792146700.1-RF-2

ISSUE DATE: Mar 13, 2026

FCC ID: 2BSYS-A2515

Prepared for

**Financial Future(Beijing) Information Technology Co., Ltd.
Room 12-01, 10th Floor, Building 38, Haidian Street, Haidian District, Beijing**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	3/13/2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
On Time And Duty Cycle	ANSI C63.10-2020+Cor 1-2023, Clause 12.2	None; for reporting purposes only.	Pass
26dB Emission Bandwidth And 99% Occupied Bandwidth	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a) (10)	Pass
Conducted Output Power	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC 15.407 (a)	Pass
Power Spectral Density	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a)	Pass
In-Band Emissions (Mask)	KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 J	FCC 15.407 (b)	Pass
Frequency Stability	ANSI C63.10-2020+Cor 1-2023, Clause 6.8	FCC 15.407 (g)	Pass
Contention-based Protocol	KDB 987594 D02 U-NII 6 GHz EMC Measurement v03	FCC 15.407 (d) (6)	Pass
Radiated Emissions And Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020+Cor 1-2023, Clause 6.2.	FCC 15.207	Pass
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2)	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART E

Note: The antenna gain of EUT is smaller than that of the RF module(FCC ID: 2BSYS-A2515). So evaluated the Radiated Spurious Emission, contention based protocol and output power items. For the test results of all other test items please refer to module test reports.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>13</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>14</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>16</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>17</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>18</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	19
7. ANTENNA PORT TEST RESULTS	22
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>22</i>
7.2. <i>POWER SPECTRAL DENSITY</i>	<i>25</i>
7.3. <i>CONTENTION-BASED PROTOCOL</i>	<i>27</i>
8. RADIATED TEST RESULTS.....	31
8.1. <i>RESTRICTED BANDEDGE</i>	<i>39</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~40 GHZ)</i>	<i>79</i>
8.3. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>165</i>
9. ANTENNA REQUIREMENT	167
10. TEST DATA.....	168
10.1. <i>APPENDIX A: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	<i>168</i>
10.1.1. <i>Test Result-SU Mode.....</i>	<i>168</i>
10.2. <i>APPENDIX B: CONTENTION BASED PROTOCOL</i>	<i>170</i>
10.2.1. <i>Test Result-SU Mode.....</i>	<i>170</i>
10.2.2. <i>Test Graphs</i>	<i>172</i>

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Financial Future(Beijing) Information Technology Co., Ltd.
Address: Room 12-01, 10th Floor, Building 38, Haidian Street, Haidian District, Beijing

Manufacturer Information

Company Name: Financial Future(Beijing) Information Technology Co., Ltd.
Address: Room 12-01, 10th Floor, Building 38, Haidian Street, Haidian District, Beijing

EUT Information

EUT Name: Intel BE200
Model: BE200NGW
Sample Received Date: Feb 10, 2026
Sample Status: Normal
Sample ID: 9445241
Date of Tested: Feb 10, 2026- Mar 13, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART E	Pass

Prepared By:




Johnson Liu
Laboratory Engineer

Checked By:



Fanny Huang
Project Engineer

Approved By:



Kebo Zhang
Operations Leader

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART E , ANSI C63.10-2020+Cor 1-2023, FCC 47 CFR Part 2, FCC 47 CFR Part 15, KDB 789033 D02 v02r01, KDB414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB987594 D01 U-NII 6GHz General Requirements v03r01, KDB987594 D02 U-NII 6 GHz EMC Measurement v03.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Intel BE200
Model	BE200NGW
Operation Frequency:	UNII-5 Band: 5925MHz ~ 6425 MHz UNII-6 Band: 6425MHz ~ 6525 MHz UNII-7 Band: 6525MHz ~ 6875 MHz UNII-8 Band: 6875MHz ~ 7125 MHz
Type of Modulation:	IEEE 802.11ax: OFDMA(1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK), IEEE 802.11be: OFDMA(4096QAM, 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Radio Technology:	IEEE802.11ax HE20/HE40/HE80/HE160, IEEE802.11be EHT20/EHT40/EHT80/EHT160/ EHT320
Normal Test Voltage:	DC 20V powered by an external adapter

5.2. CHANNEL LIST

UNII-5 (For Bandwidth=20MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	33	6115	65	6275
5*	5975	37*	6135	69*	6295
9	5995	41	6155	73	6315
13	6015	45	6175	77	6335
17	6035	49	6195	81	6355
21*	6055	53*	6215	85*	6375
25	6075	57	6235	89	6395
29	6095	61	6255	93	6415

UNII-6 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	105	6475	113	6515
101*	6455	109	6495	/	/

UNII-7 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117*	6535	141	6655	165*	6775
121	6555	145	6675	169	6795
125	6575	149*	6695	173	6815
129	6595	153	6715	177	6835
133*	6615	157	6735	181*	6855
137	6635	161	6755	185	6875

UNII-8 (For Bandwidth=20 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
189	6895	205	6975	221	7055
193	6915	209	6995	225	7075
197*	6935	213*	7015	229*	7095
201	6955	217	7035	233	7115

UNII-5 (For Bandwidth=40MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	35	6125	67	6285
11	6005	43	6165	75	6325
19	6045	51	6205	83	6365
27	6085	59	6245	91	6405

UNII-6 (For Bandwidth=40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
99	6445	107	6485	/	/

UNII-7 (For Bandwidth=40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
115	6525	139	6645	163	6765
123	6605	147	6685	171	6805
131	6645	155	6725	179	6845

UNII-8 (For Bandwidth=40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
187	6885	203	6965	219	7045
195	6925	211	7005	227	7085

UNII-5 (For Bandwidth=80MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	39	6145	71	6305
23	6065	55	6225	87	6385

UNII-6 (For Bandwidth=80 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
103	6465	/	/	/	/

UNII-7 (For Bandwidth=80 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
119	6545	151	6705	183	6865
135	6625	167	6785	/	/

UNII-8 (For Bandwidth=80 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
199	6945	215	7025	/	/

UNII-5 (For Bandwidth=160MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	47	6185	79	6345

UNII-6 (For Bandwidth=160MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
111	6505 (Straddle)	/	/	/	/

UNII-7 (For Bandwidth=160MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
143	6665	175	6825(Straddle)	/	/

UNII-8 (For Bandwidth=160 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
207	6985	/	/	/	/

UNII-5 (For Bandwidth=320MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
31	6105	63	6265	95	6425

UNII-6 (For Bandwidth=320MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
127	6585(Straddle)	/	/	/	/

UNII-7 (For Bandwidth=320MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
159	6745	/	/	/	/

UNII-8 (For Bandwidth=320 MHz)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
191	6905	/	/	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
ax HE20	5925-7125	5.64
ax HE40		8.84
ax HE80		11.91
ax HE160		14.66
be EHT320		17.11

5.4. TEST CHANNEL CONFIGURATION

UNII-5 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11ax HE20	CH 1(Low Channel), CH 45(MID Channel), CH 93(High Channel)	5955 MHz, 6175 MHz, 6415 MHz
802.11ax HE40	CH 3(Low Channel), CH 43(MID Channel), CH 91(High Channel)	5965 MHz, 6165 MHz, 6405 MHz
802.11ax HE80	CH 7(Low Channel), CH 39(MID Channel), CH 87(High Channel)	5985 MHz, 6145 MHz, 6385 MHz
802.11ax HE160	CH 15(Low Channel), CH 47(Middle Channel), CH 79(High Channel)	6025MHz, 6185 MHz, 6345 MHz
802.11be EHT20	CH 1(Low Channel), CH 45(MID Channel), CH 93(High Channel)	5955 MHz, 6175 MHz, 6415 MHz
802.11be EHT40	CH 3(Low Channel), CH 43(MID Channel), CH 91(High Channel)	5965 MHz, 6165 MHz, 6405 MHz
802.11be EHT80	CH 7(Low Channel), CH 39(MID Channel), CH 87(High Channel)	5985 MHz, 6145 MHz, 6385 MHz
802.11be EHT160	CH 15(Low Channel), CH 47(Middle Channel), CH 79(High Channel)	6025MHz, 6185 MHz, 6345 MHz
802.11be EHT320	CH 31(Low Channel), CH 63(MID Channel), CH 95(High Channel)	6105MHz, 6265 MHz, 6425 MHz

UNII-6 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11ax HE20	CH 97(Low Channel), CH 105(MID Channel), CH 113(High Channel)	6435 MHz, 6475 MHz, 6515 MHz
802.11ax HE40	CH 99(Low Channel), CH 107(MID Channel), CH 115(High Channel)	6445 MHz, 6485 MHz, 6525 MHz
802.11ax HE80	CH 103(Low Channel)	6465 MHz
802.11ax HE160	CH 111(Low Channel)	6505 MHz
802.11be EHT20	CH 97(Low Channel), CH 105(MID Channel), CH 113(High Channel)	6435 MHz, 6475 MHz, 6515 MHz
802.11be EHT40	CH 99(Low Channel), CH 107(MID Channel), CH 115(High Channel)	6445 MHz, 6485 MHz, 6525 MHz
802.11be EHT80	CH 103(Low Channel)	6465 MHz
802.11be EHT160	CH 111(Low Channel)	6505 MHz
802.11be EHT320	CH127	6585 MHz

UNII-7 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11ax HE20	CH 117(Low Channel), CH 153(MID Channel), CH 181(High Channel)	6535 MHz, 6715 MHz, 6855 MHz
802.11ax HE40	CH 123(Low Channel), CH 155(MID Channel), CH 179(High Channel)	6565 MHz, 6725 MHz, 6845 MHz

802.11ax HE80	CH 119(Low Channel), CH 151(MID Channel), CH 167(High Channel)	6545 MHz, 6705 MHz, 6785 MHz
802.11ax HE160	CH 143(Low Channel), CH 175(High Channel)	6665 MHz, 6825 MHz
802.11be EHT20	CH 117(Low Channel), CH 153(MID Channel), CH 181(High Channel)	6535 MHz, 6715 MHz, 6855 MHz
802.11be EHT40	CH 123(Low Channel), CH 155(MID Channel), CH 179(High Channel)	6565 MHz, 6725 MHz, 6845 MHz
802.11be EHT80	CH 119(Low Channel), CH 151(MID Channel), CH 167(High Channel)	6545 MHz, 6705 MHz, 6785 MHz
802.11be EHT160	CH 143(Low Channel), CH 175(High Channel)	6665 MHz, 6825 MHz
802.11be EHT320	CH159	6745MHz

UNII-8 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11ax HE20	CH 185(Low Channel), CH 213(MID Channel), CH 229 (High Channel), CH233	6895 MHz, 7015 MHz, 7095 MHz, 7115MHz
802.11ax HE40	CH 187(Low Channel), CH 211(MID Channel), CH 227(High Channel)	6885 MHz, 7005 MHz, 7085 MHz
802.11ax HE80	CH 183(Low Channel), CH 199(Low Channel), CH 215(High Channel)	6865 MHz, 6945 MHz, 7025 MHz
802.11ax HE160	CH 207(Low Channel)	6985 MHz
802.11be EHT20	CH 185(Low Channel), CH 213(MID Channel), CH 229 (High Channel), CH233	6895 MHz, 7015 MHz, 7095 MHz, 7115MHz
802.11be EHT40	CH 187(Low Channel), CH 211(MID Channel), CH 227(High Channel)	6885 MHz, 7005 MHz, 7085 MHz
802.11be EHT80	CH 183(Low Channel), CH 199(Low Channel), CH 215(High Channel)	6865 MHz, 6945 MHz, 7025 MHz
802.11be EHT160	CH 207(Low Channel)	6985 MHz
802.11be EHT320	CH191	6905MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter	
Test Software	DRTU
Power Setting	Default

WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11ax HE20 mode: MCS0
802.11ax HE40 mode: MCS0
802.11ax HE80 mode: MCS0
802.11ax HE160 mode: MCS0
802.11be EHT20 mode: MCS0
802.11be EHT40 mode: MCS0
802.11be EHT80 mode: MCS0
802.11be EHT160 mode: MCS0
802.11be EHT320 mode: MCS0

802.11ax HE20/HE40/HE80/HE160/be EHT20/EHT40/EHT80/EHT160/EHT320 support SISO and MIMO mode.

Pre-scan has been done on all the possible configurations for searching the worst cases, only the worst-case mode data recorded in this report.

The measured additional path loss was included in any path loss calculations for all RF cables used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency Band	Antenna 1 Gain Max (dBi)	Antenna 1 Gain Min (dBi)	Antenna 2 Gain Max (dBi)	Antenna 2 Gain Min (dBi)	Antenna Type
UNII 5	4.21	1.38	4.87	2.29	PIFA Antenna
UNII 6	4.21	1.38	4.87	2.29	
UNII 7	4.21	1.38	4.87	2.29	
UNII 8	4.21	1.38	4.87	2.29	

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11ax HE20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE80	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ax HE160	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT80	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT160	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11be EHT320	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
Note: 1. The value of the antenna gain was declared by customers. 2. The antenna can not transmit simultaneously.		

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
/	/	/	/	/


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

SETUP DIAGRAM FOR TESTS

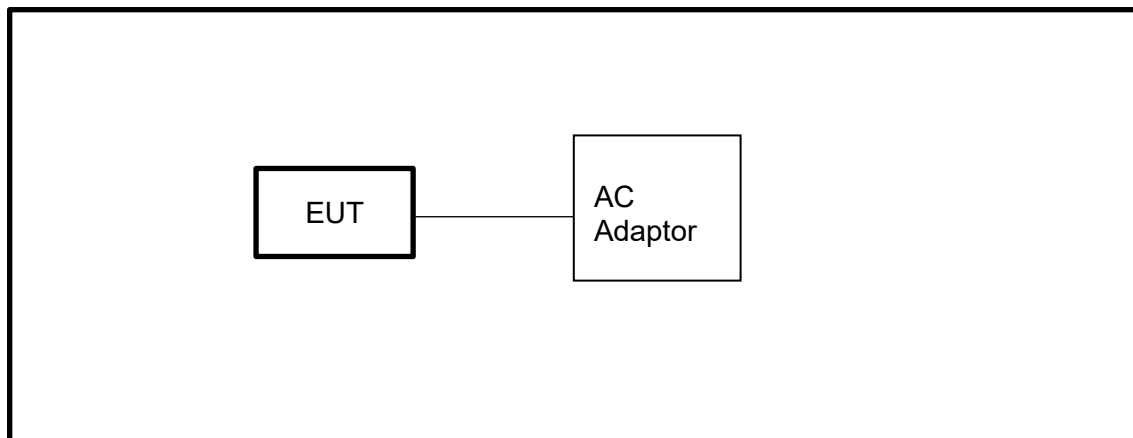

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name	Version	
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
EMI Measurement Receiver	R&S	ESR26	101377	Sep.12, 2025	Sep.11, 2026
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Highpass Filter	Xingbo	XBLBQ-GTA68	211115-2-1	Sep.12, 2025	Sep.11, 2026
Notch Filter (5905-6445 MHz)	Xingbo	XBLBQ-DZA175	210922-2-1	Sep.12, 2025	Sep.11, 2026
Notch Filter (6425-6525 MHz)	Xingbo	XBLBQ-DZA176	210922-2-2	Sep.12, 2025	Sep.11, 2026
Notch Filter (6825-7125 MHz)	Xingbo	XBLBQ-DZA177	210922-2-3	Sep.12, 2025	Sep.11, 2026
Notch Filter (6525-6875 MHz)	Xingbo	XBLBQ-DZA178	210922-2-4	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

FCC 47 CFR Part15 Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Standard Power Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).	5.925-6.425 GHz 6.525-6.875 GHz
	☐ Indoor Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.	5.925-7.125 GHz
	☐ Subordinate Device The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.	5.925-7.125 GHz
	☐ Client Devices, Operating Under The Control Of A Standard Power Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.	5.925-6.425 GHz 6.525-6.875 GHz
	☒ Client Devices, Operating Under The Control Of An Indoor Access Point The maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.	5.925-7.125 GHz

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-2 (trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.):


- (a) Measure the duty cycle D of the transmitter output signal.
- (b) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- (c) Set RBW = 1 MHz.
- (d) Set VBW $\geq$ 3 MHz.
- (e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (f) Sweep time = auto.
- (g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (h) Do not use sweep triggering. Allow the sweep to “free run.”
- (i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- (j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- (k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

TEST SETUP**TEST ENVIRONMENT**

Temperature	24.8℃	Relative Humidity	56.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V

TEST DATE / ENGINEER

Test Date	Feb 10, 2026	Test By	Bairong Liu
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

7.2. POWER SPECTRAL DENSITY

LIMITS

FCC 47 CFR Part15 Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Standard Power Access Point The maximum power spectral density must not exceed 23 dBm e.i.r.p. in any 1-megahertz band.	5.925-6.425 GHz 6.525-6.875 GHz
	☐ Indoor Access Point The maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.	5.925-7.125 GHz
	☐ Subordinate Device The maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.	5.925-7.125 GHz
	☐ Client Devices, Operating Under The Control Of A Standard Power Access Point The maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band.	5.925-6.425 GHz 6.525-6.875 GHz
	☒ Client Devices, Operating Under The Control Of An Indoor Access Point The maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.	5.925-7.125 GHz

TEST PROCEDURE


Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz reference bandwidth.

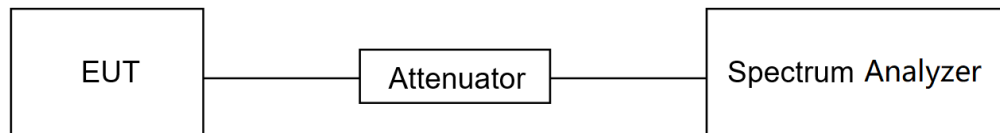TEST SETUP**TEST ENVIRONMENT**

Temperature	24.8°C	Relative Humidity	56.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V

TEST DATE / ENGINEER

Test Date	Feb 10, 2026	Test By	Bairong Liu
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.3. CONTENTION-BASED PROTOCOL

LIMITS

Please refer to FCC 47 CFR §15.407 (d) (6) and RSS-248 Issue 3 Clause 4.7

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

a) Simulating Incumbent Signal

The incumbent signal is assumed to be noise-like. One example of such transmission could be Digital Video Broadcasting (DVB) systems that use Orthogonal Frequency Division Multiplexing (OFDM). Incumbent systems may also use different bandwidths for their transmissions. A 10 MHz-wide additive white Gaussian noise (AWGN) signal is selected to simulate and represent incumbent transmission.

b) Required number of tests

Incumbent and EUT (access point, subordinate or client) signals may occupy different portions of the channel. Depending on the EUT transmission bandwidth and incumbent signal center frequency (simulated by a 10 MHz-wide AWGN signal), the center frequency of the EUT signal f_{fcc1} may fall within the incumbent's occupied bandwidth (Figure 1.a), or outside of it (Figure 1.b).

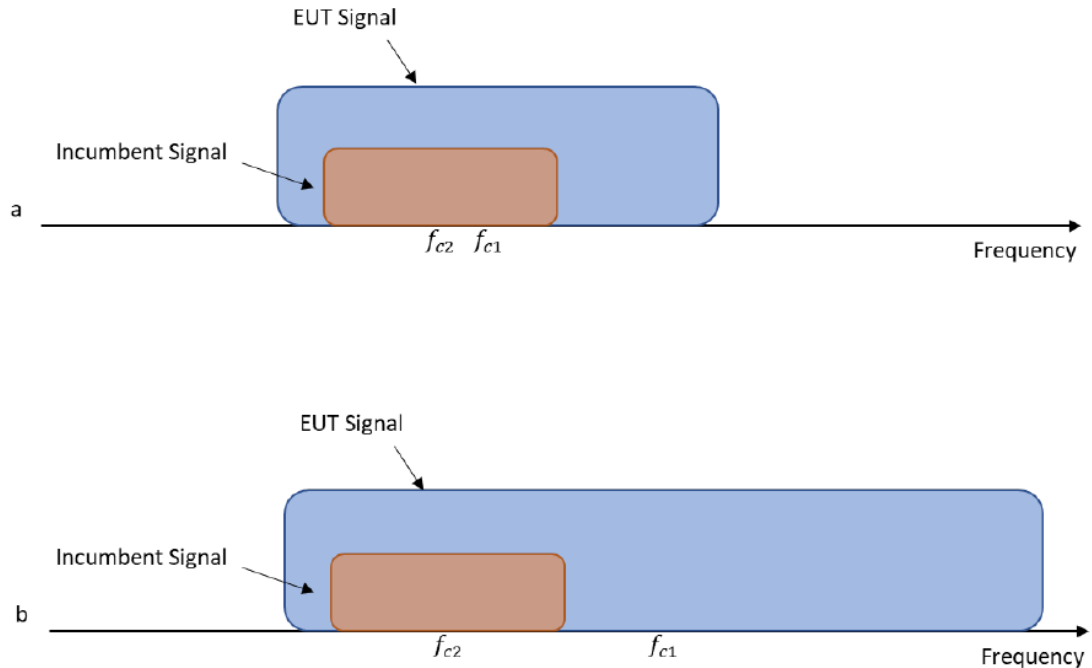


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{cc2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed;

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission


f_{c2} : Center frequency of simulated incumbent signal

TEST PROCEDURE

To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle.² To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer 2 to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

TEST SETUP

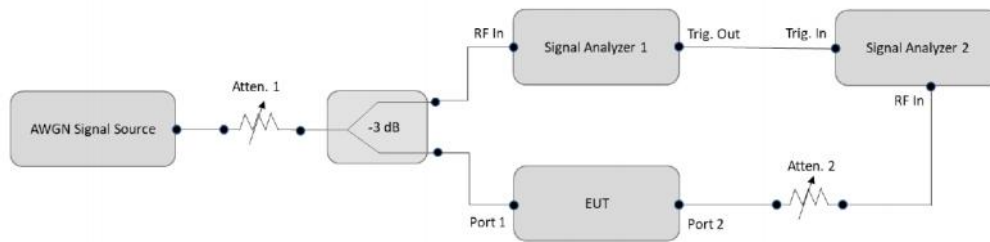

TEST ENVIRONMENT

Temperature	22.9°C	Relative Humidity	55.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V

TEST DATE / ENGINEER

Test Date	Feb 13, 2026	Test By	Johnson Liu
-----------	--------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

8. RADIATED TEST RESULTS

LIMITS

Refer to FCC 47 CFR §15.205, §15.209 and §15.407 (b) (6).

Refer to ISSED RSS-GEN Clause 8.9, Clause 8.10 and ISSED RSS-248 4.6.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to FCC 47 CFR §15.407 (b) (6) and ISED RSS-247 4.6.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

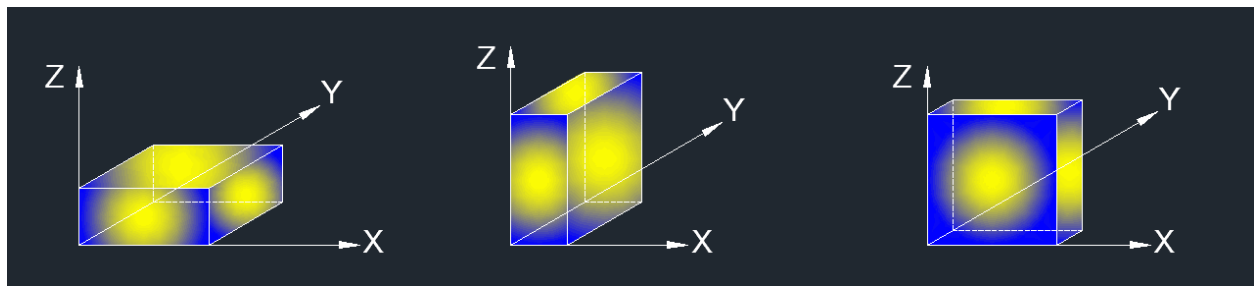

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 9 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (9 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

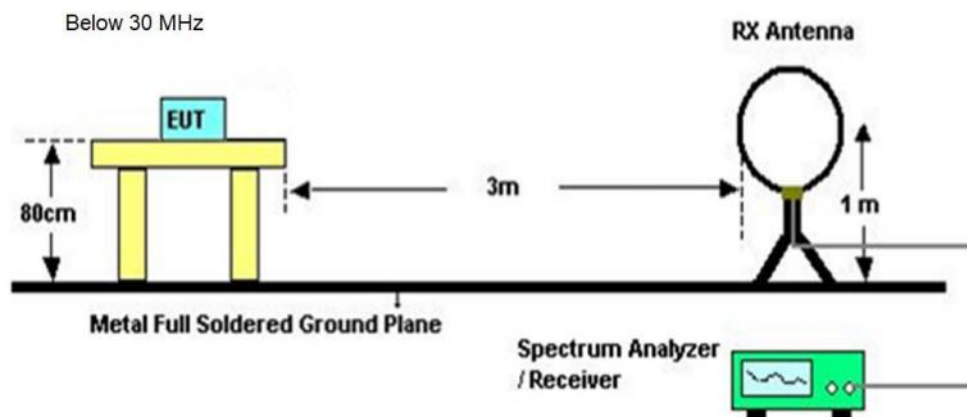

Below 1 GHz and above 30 MHz

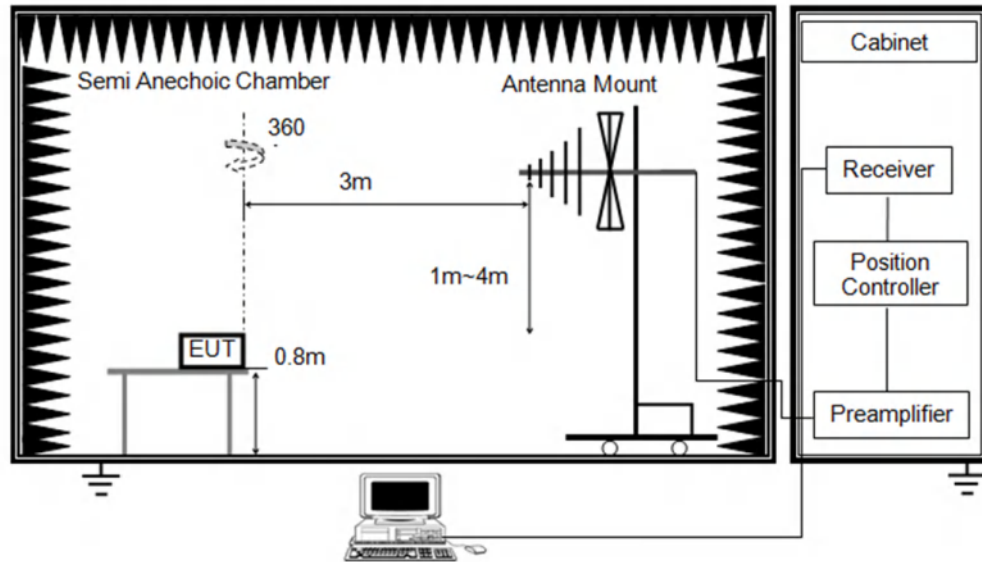

Above 1GHz

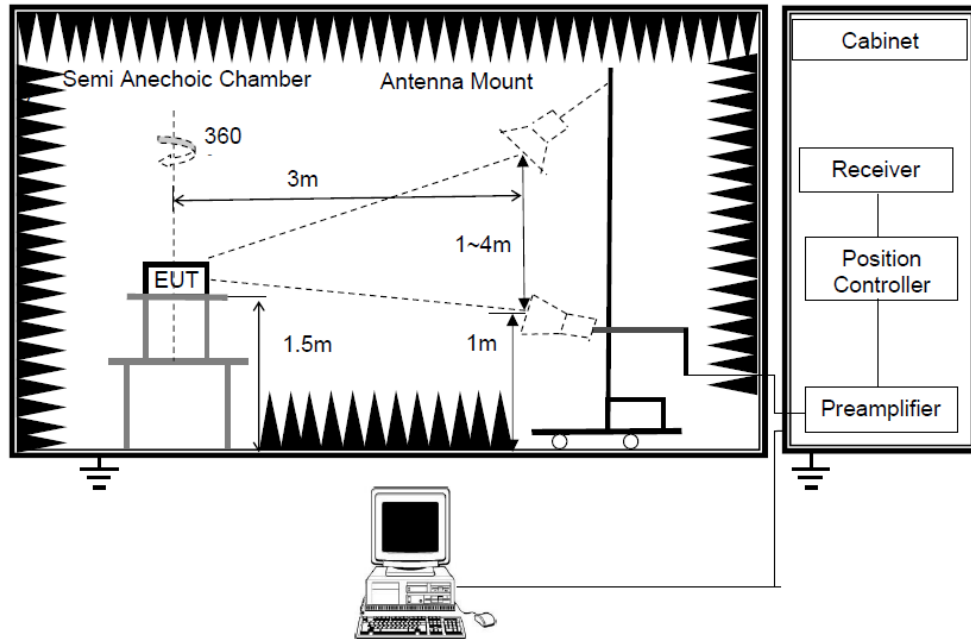

TEST ENVIRONMENT

Temperature	22.3℃	Relative Humidity	58.6%
Atmosphere Pressure	101kPa	Test Voltage	DC 20V


TEST DATE / ENGINEER

Test Date	Feb 10, 2026	Test By	Stipe Zheng
-----------	--------------	---------	-------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11 AX20 MIMO	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

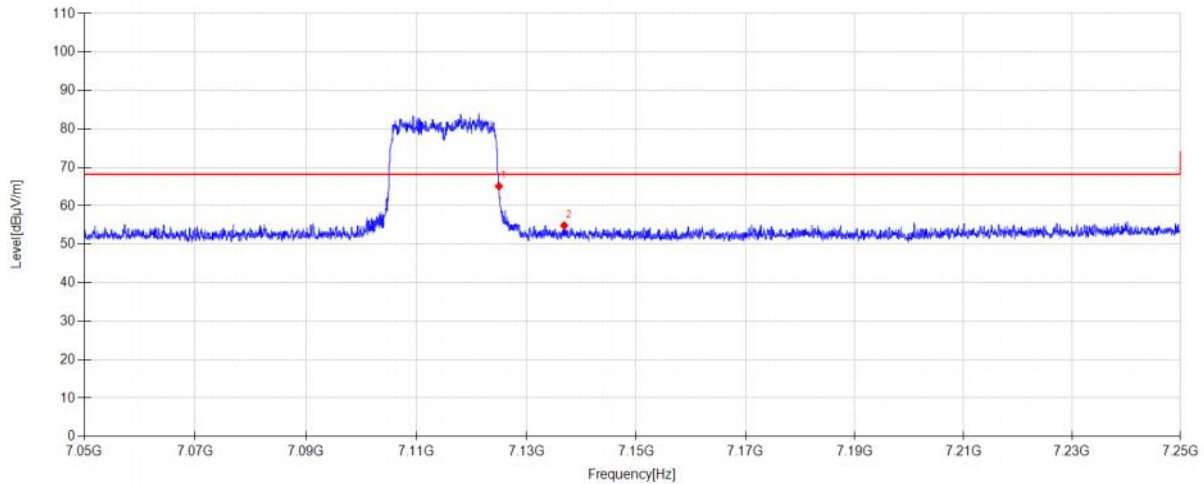


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	52.39	36.60	6.00	-29.89	65.10	68.20	3.10	PK	Horizontal
2	7136.880	42.26	36.55	6.00	-29.89	54.92	68.20	13.28	PK	Horizontal

Test Mode:	802.11 AX20 MIMO	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

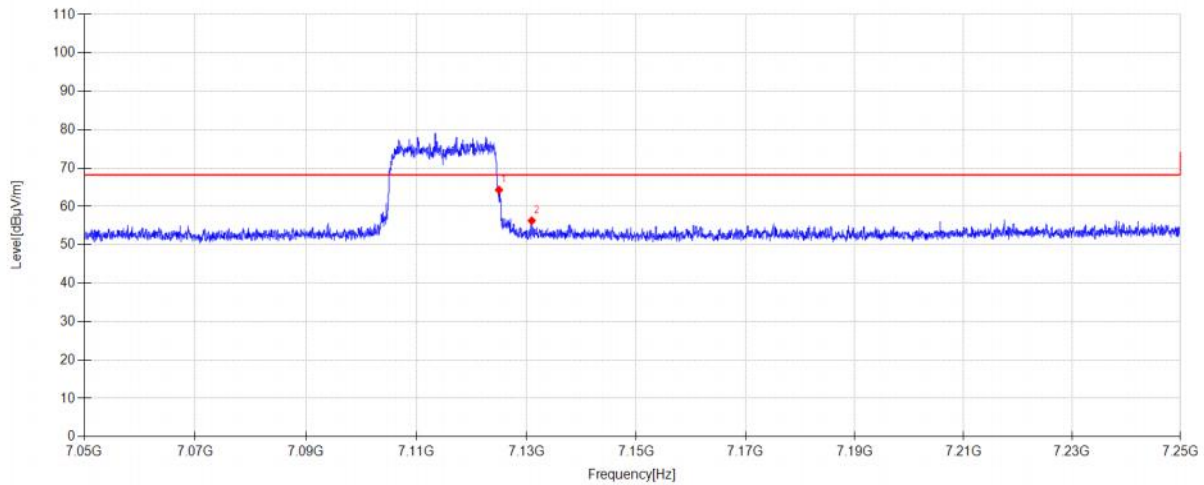


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	51.61	36.60	6.00	-29.89	64.32	68.20	3.88	PK	Vertical
2	7130.980	43.61	36.58	6.00	-29.89	56.30	68.20	11.90	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

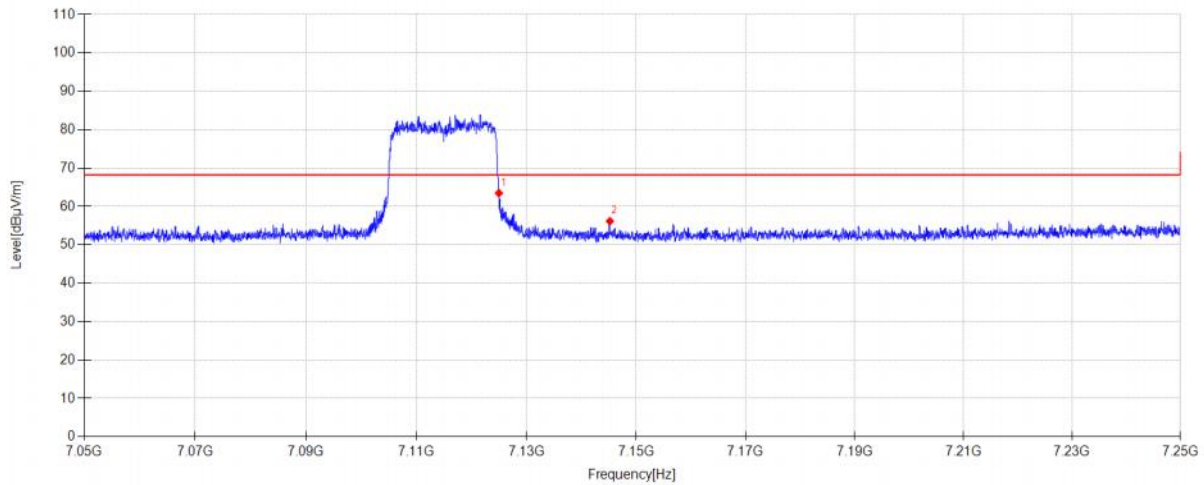


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	50.78	36.60	6.00	-29.89	63.49	68.20	4.71	PK	Horizontal
2	7145.200	43.56	36.52	6.00	-29.89	56.19	68.20	12.01	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

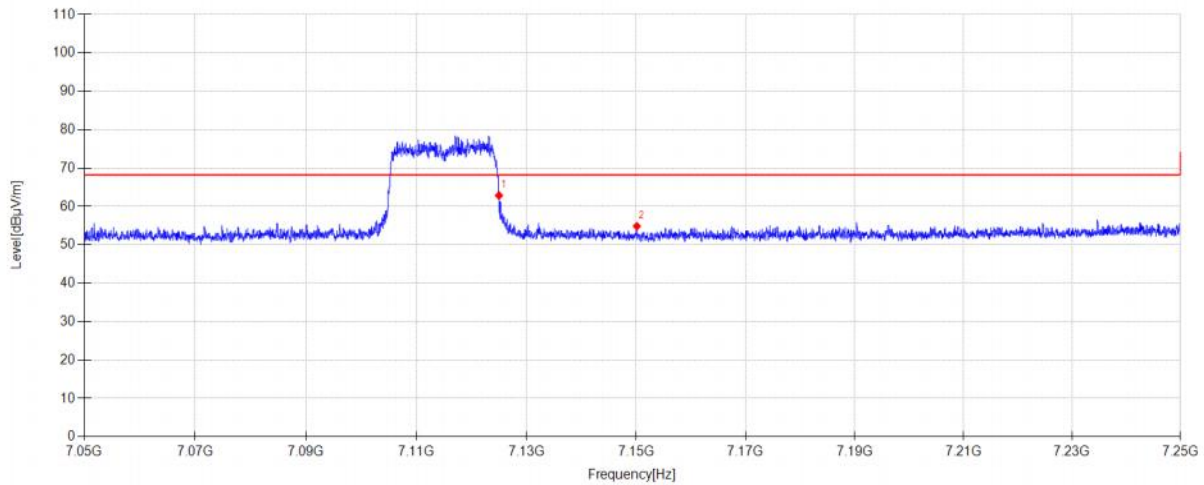


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	50.16	36.60	6.00	-29.89	62.87	68.20	5.33	PK	Vertical
2	7150.120	42.25	36.50	6.01	-29.88	54.88	68.20	13.32	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

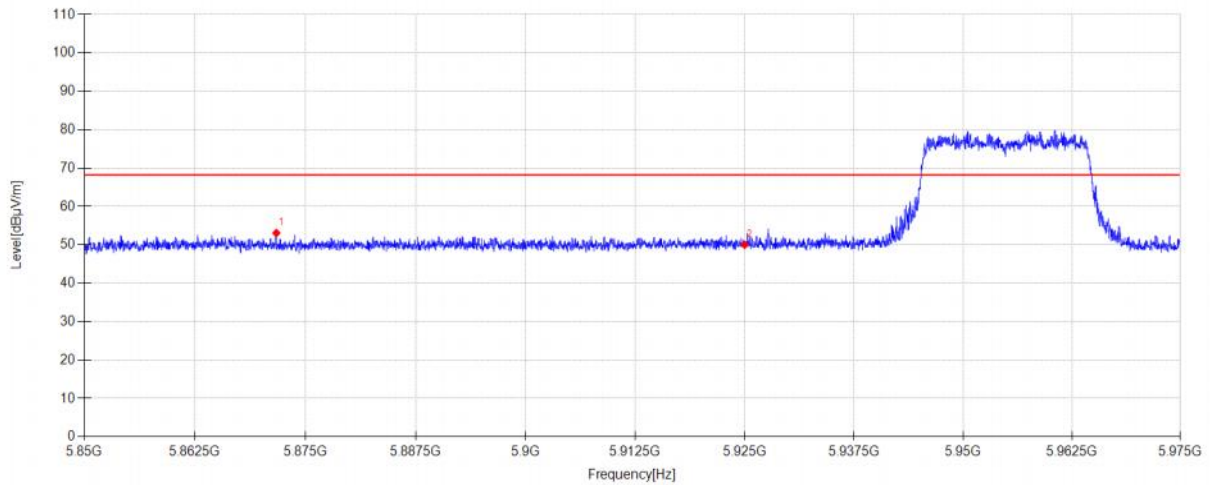


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5871.713	43.26	34.07	5.40	-29.63	53.10	68.20	15.10	PK	Horizontal
2	5925.000	39.88	34.35	5.42	-29.62	50.03	68.20	18.17	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

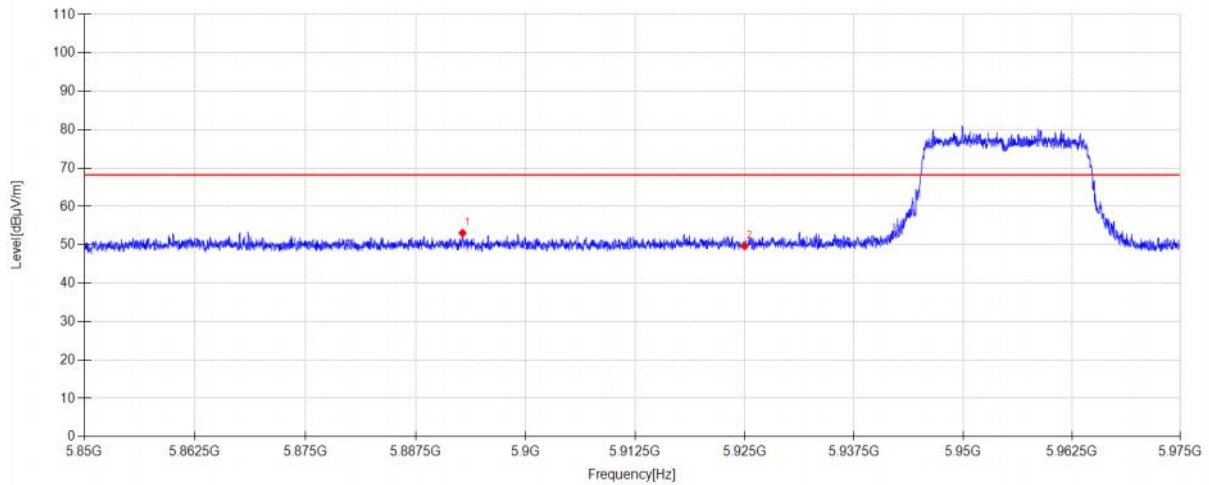


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5892.838	43.07	34.24	5.41	-29.62	53.10	68.20	15.10	PK	Vertical
2	5925.000	39.56	34.35	5.42	-29.62	49.71	68.20	18.49	PK	Vertical

Test Mode:	802.11 AX20 MIMO	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

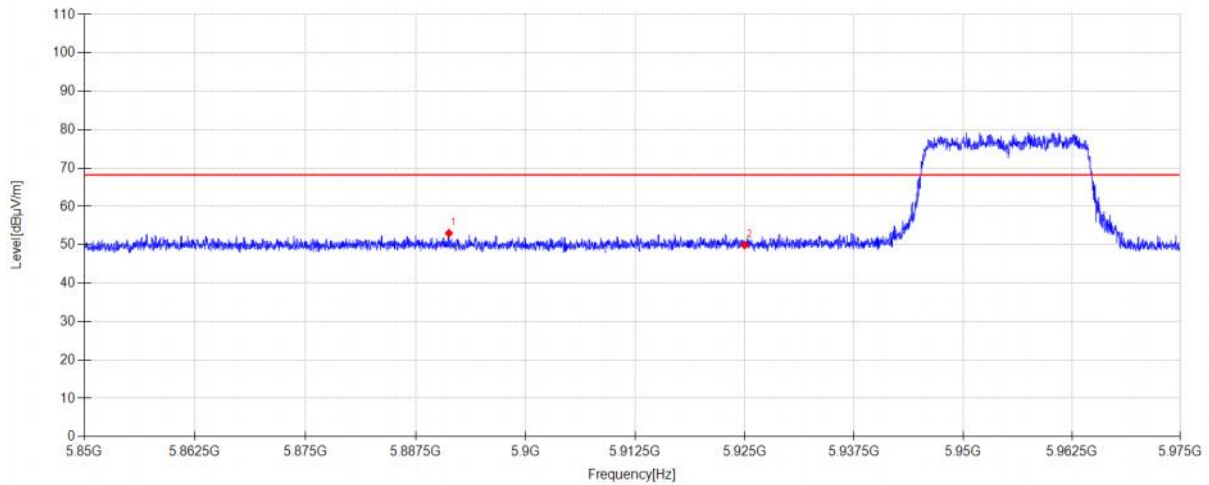


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5891.288	43.03	34.23	5.41	-29.62	53.05	68.20	15.15	PK	Horizontal
2	5925.000	39.79	34.35	5.42	-29.62	49.94	68.20	18.26	PK	Horizontal

Test Mode:	802.11 AX20 MIMO	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

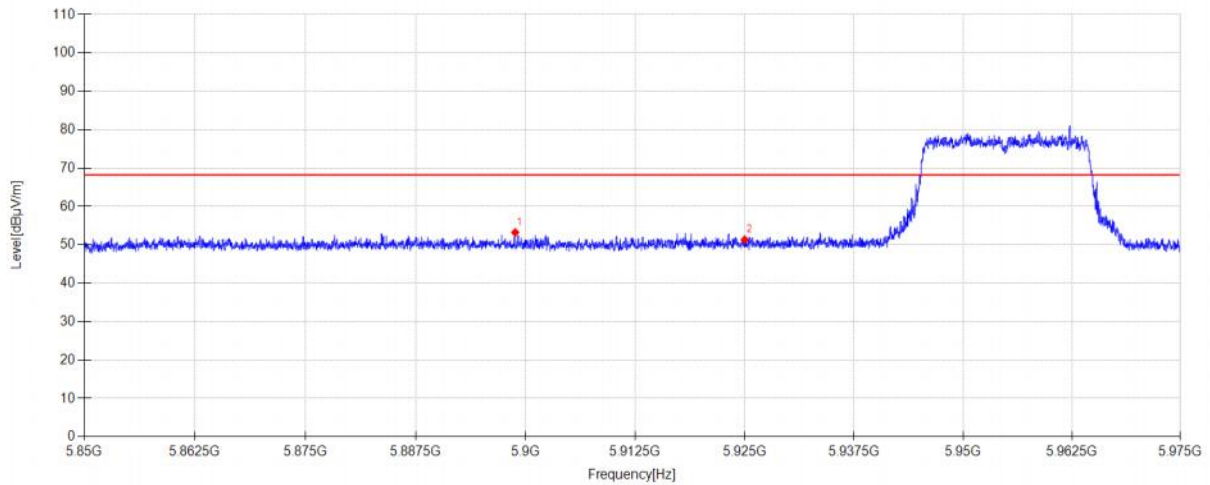


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5898.825	43.17	34.29	5.41	-29.62	53.25	68.20	14.95	PK	Vertical
2	5925.000	41.21	34.35	5.42	-29.62	51.36	68.20	16.84	PK	Vertical

Test Mode:	802.11 BE40 MIMO	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 20V

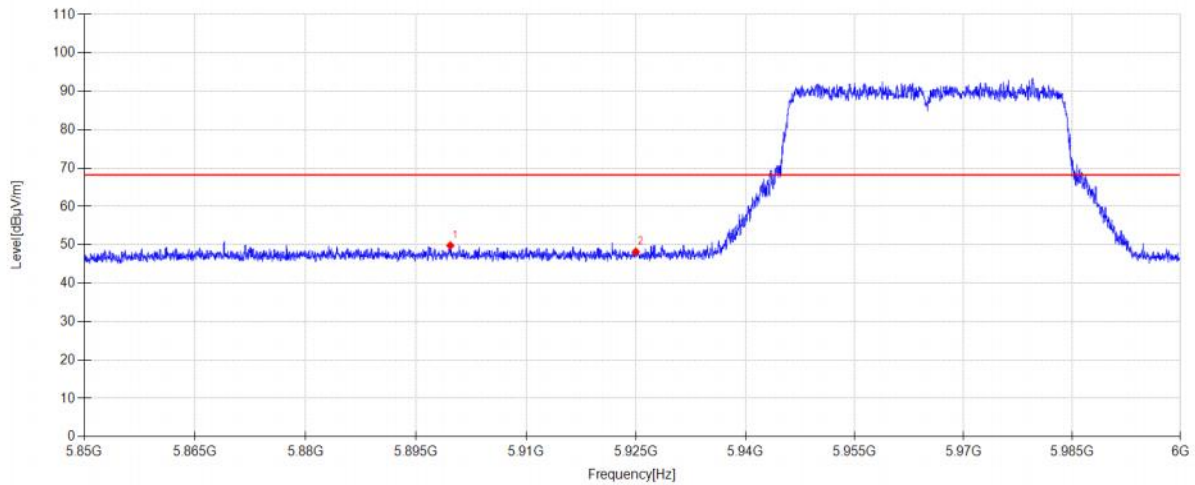


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5899.665	10.12	34.30	5.41	0.00	49.83	68.20	18.37	PK	Horizontal
2	5925.000	8.44	34.35	5.42	0.00	48.21	68.20	19.99	PK	Horizontal

Test Mode:	802.11 BE40 MIMO	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 20V

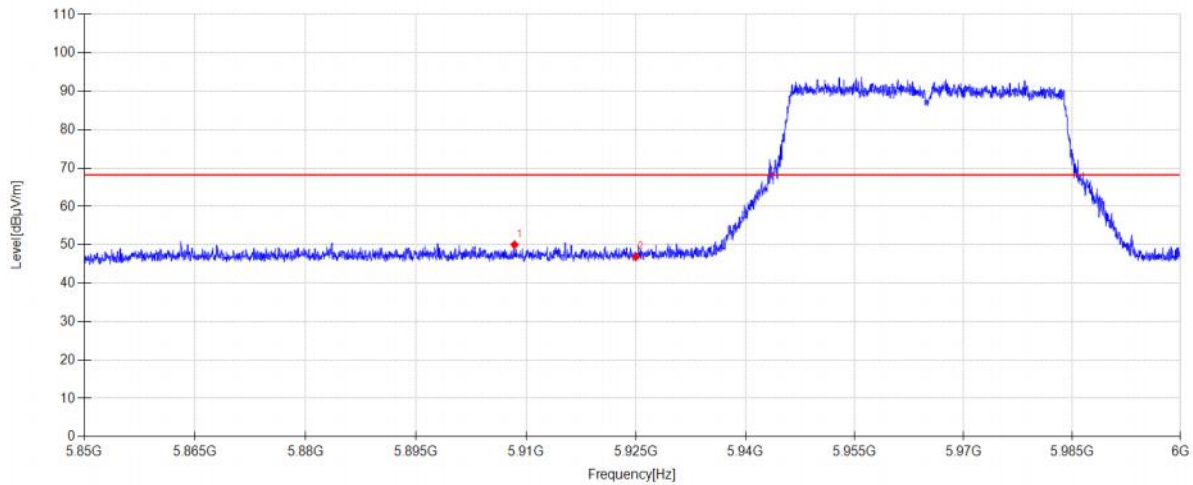


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5908.425	10.33	34.32	5.41	0.00	50.06	68.20	18.14	PK	Vertical
2	5925.000	7.12	34.35	5.42	0.00	46.89	68.20	21.31	PK	Vertical

Test Mode:	802.11 AX40 MIMO	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 20V

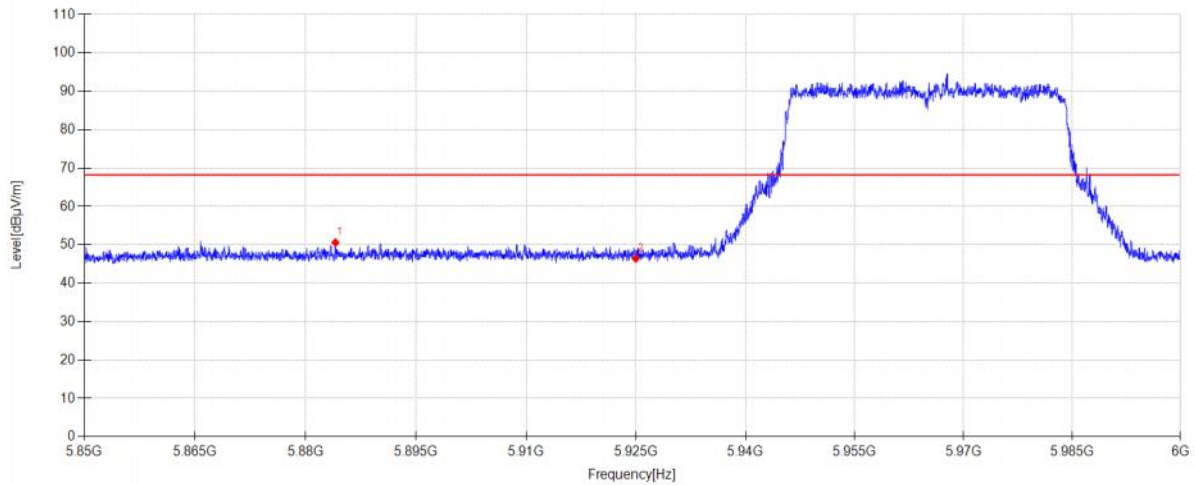


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5884.035	11.05	34.17	5.40	0.00	50.62	68.20	17.58	PK	Horizontal
2	5925.000	6.67	34.35	5.42	0.00	46.44	68.20	21.76	PK	Horizontal

Test Mode:	802.11 AX40 MIMO	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 20V

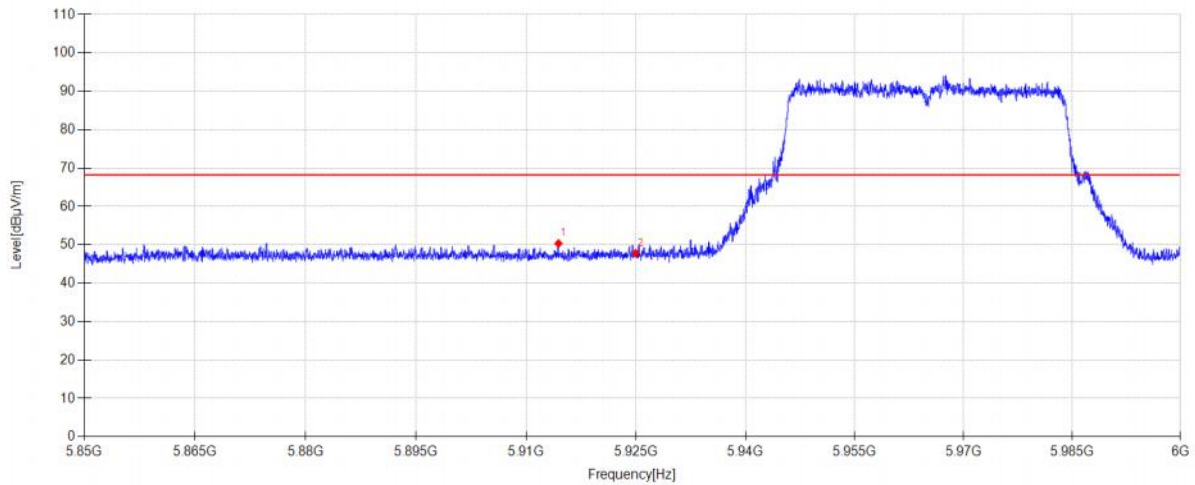


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5914.425	10.62	34.33	5.42	0.00	50.37	68.20	17.83	PK	Vertical
2	5925.000	8.06	34.35	5.42	0.00	47.83	68.20	20.37	PK	Vertical

Test Mode:	802.11 AX40 MIMO	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 20V

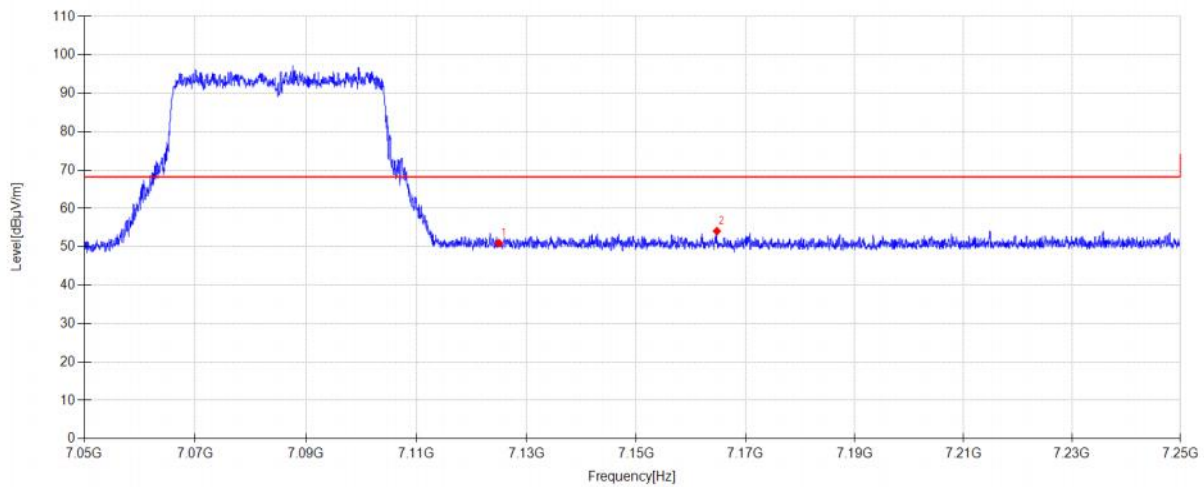


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	8.39	36.60	6.00	0.00	50.99	68.20	17.21	PK	Horizontal
2	7164.740	11.63	36.47	6.01	0.00	54.11	68.20	14.09	PK	Horizontal

Test Mode:	802.11 AX40 MIMO	Frequency(MHz):	7085
Polarity:	Vertical	Test Voltage:	DC 20V

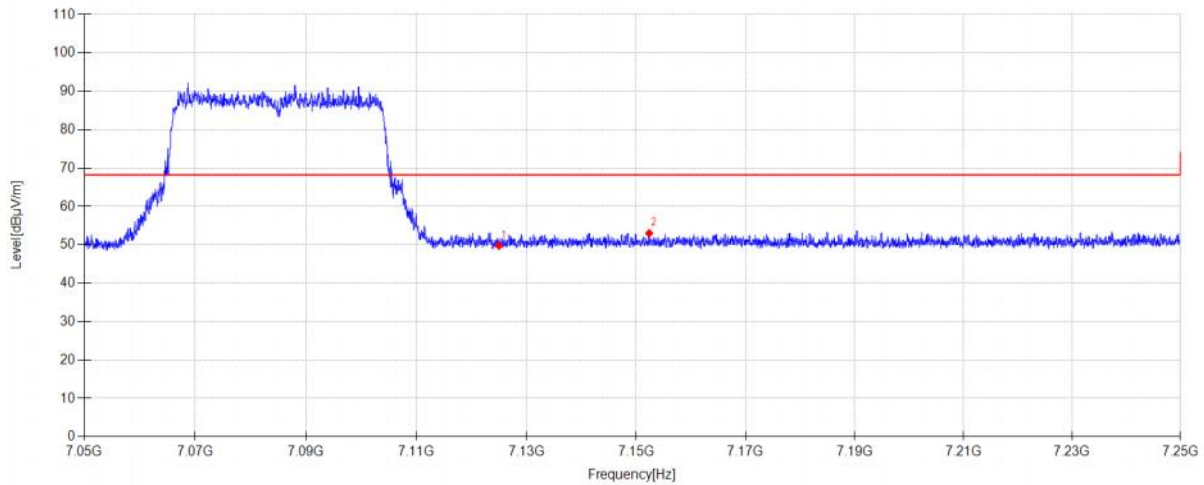


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.20	36.60	6.00	0.00	49.80	68.20	18.40	PK	Vertical
2	7152.380	10.53	36.50	6.01	0.00	53.04	68.20	15.16	PK	Vertical

Test Mode:	802.11 BE40 MIMO	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 20V

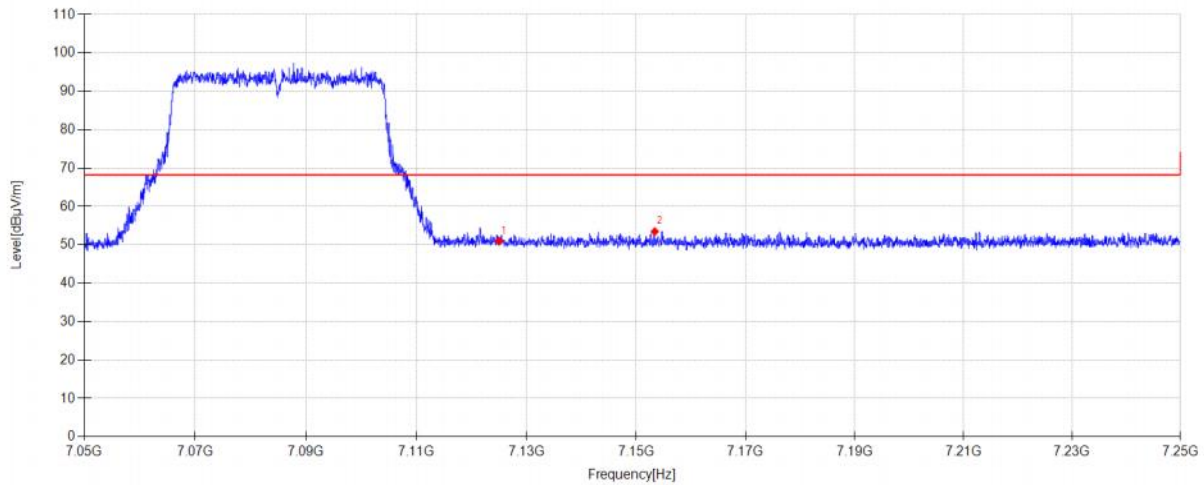


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	8.41	36.60	6.00	0.00	51.01	68.20	17.19	PK	Horizontal
2	7153.400	10.99	36.49	6.01	0.00	53.49	68.20	14.71	PK	Horizontal

Test Mode:	802.11 BE40 MIMO	Frequency(MHz):	7085
Polarity:	Vertical	Test Voltage:	DC 20V

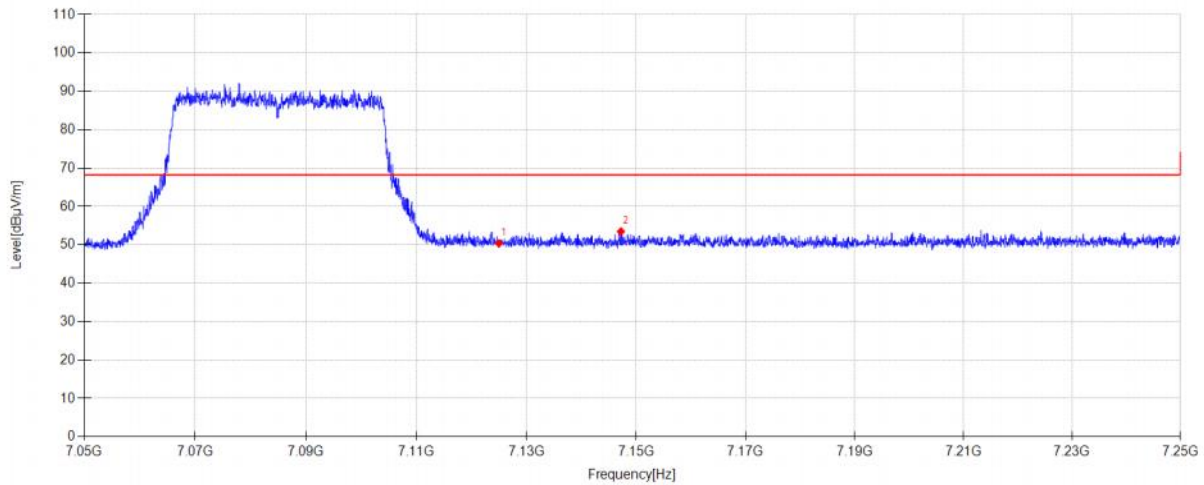


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.78	36.60	6.00	0.00	50.38	68.20	17.82	PK	Vertical
2	7147.220	10.99	36.51	6.00	0.00	53.50	68.20	14.70	PK	Vertical

Test Mode:	802.11 BE80 MIMO	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 20V

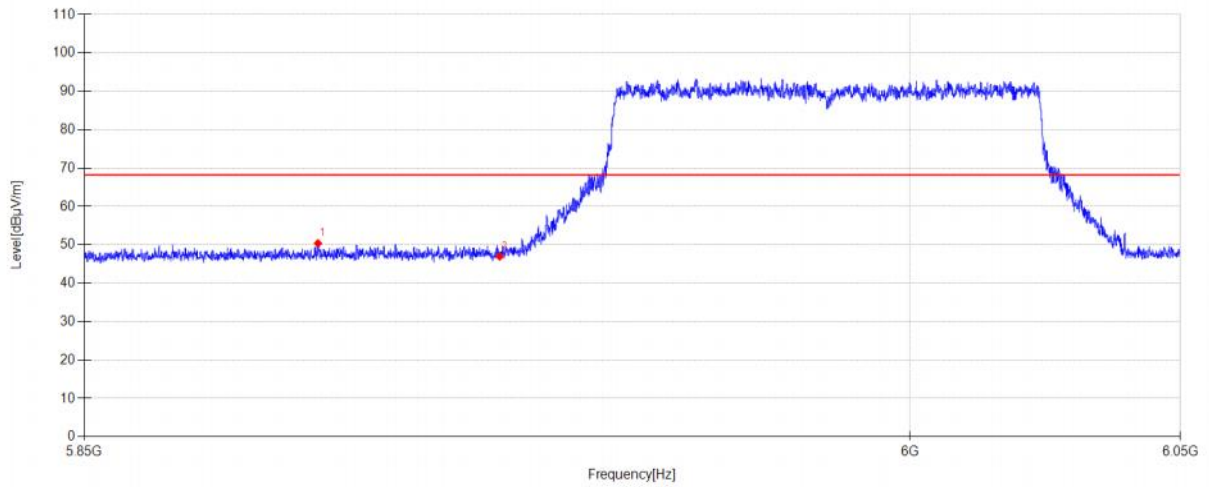


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5892.080	10.75	34.24	5.41	0.00	50.40	68.20	17.80	PK	Horizontal
2	5925.000	7.21	34.35	5.42	0.00	46.98	68.20	21.22	PK	Horizontal

Test Mode:	802.11 BE80 MIMO	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 20V

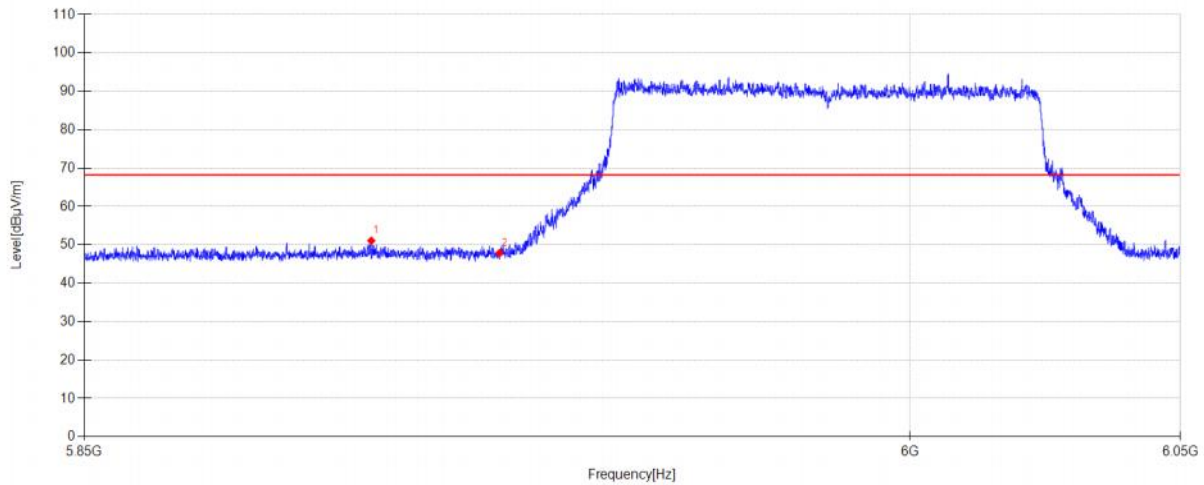


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5901.720	11.39	34.30	5.41	0.00	51.10	68.20	17.10	PK	Vertical
2	5925.000	8.13	34.35	5.42	0.00	47.90	68.20	20.30	PK	Vertical

Test Mode:	802.11 AX80 MIMO	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 20V

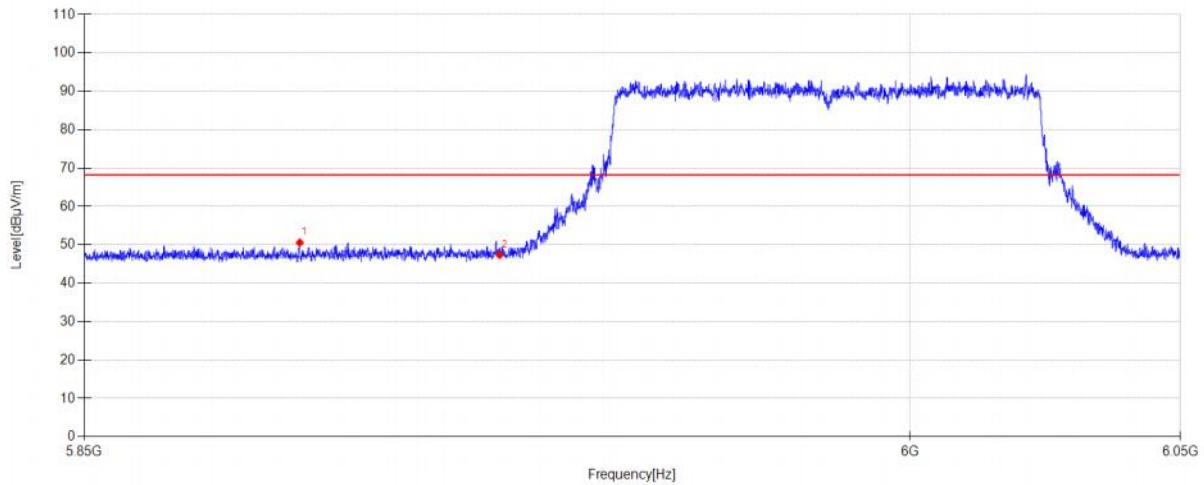


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5888.780	10.98	34.21	5.40	0.00	50.59	68.20	17.61	PK	Horizontal
2	5925.000	7.66	34.35	5.42	0.00	47.43	68.20	20.77	PK	Horizontal

Test Mode:	802.11 AX80 MIMO	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 20V

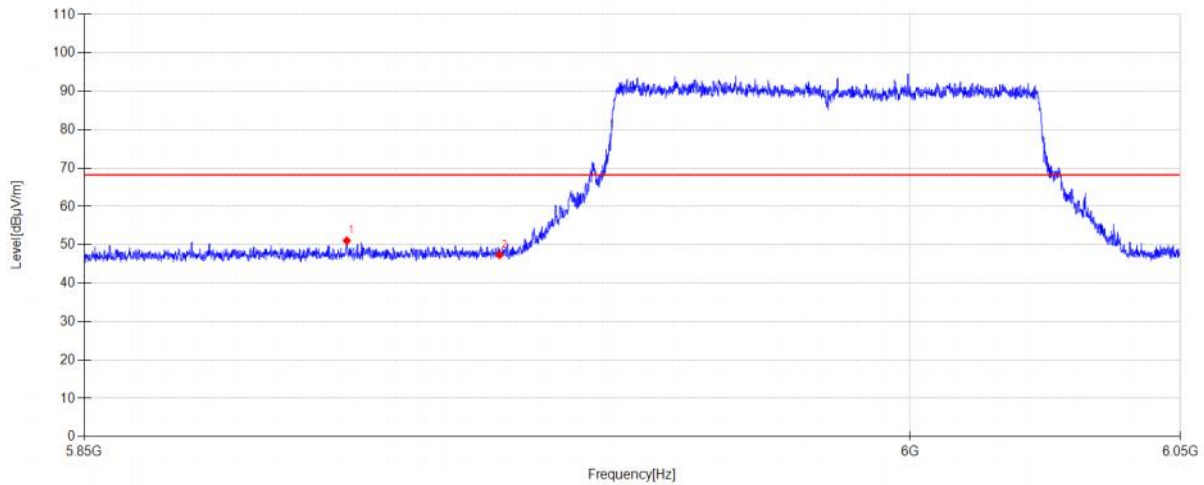


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5897.280	11.42	34.28	5.41	0.00	51.11	68.20	17.09	PK	Vertical
2	5925.000	7.64	34.35	5.42	0.00	47.41	68.20	20.79	PK	Vertical

Test Mode:	802.11 AX80 MIMO	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 20V

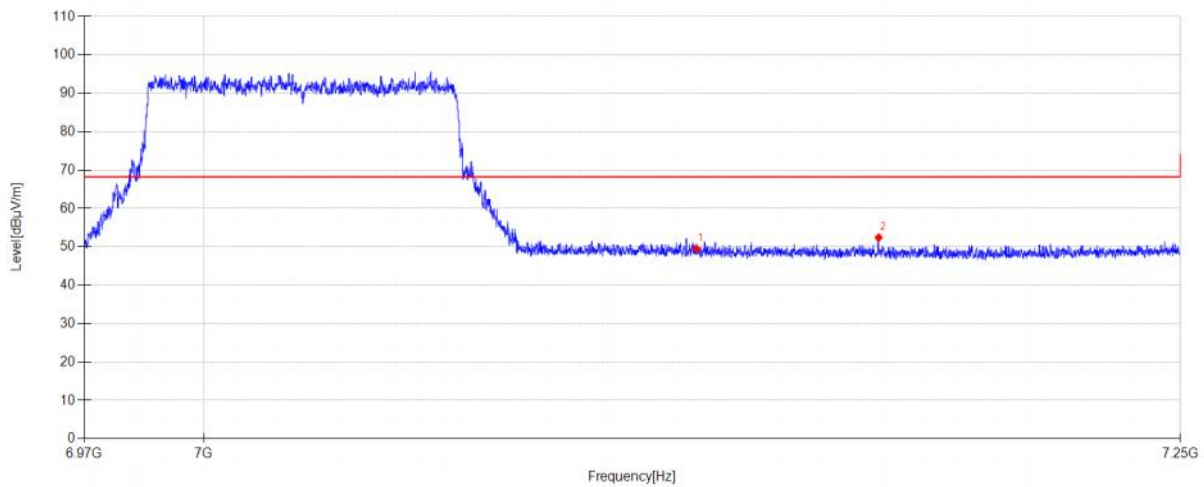


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	6.93	36.60	6.00	0.00	49.53	68.20	18.67	PK	Horizontal
2	7171.824	9.97	36.46	6.01	0.00	52.44	68.20	15.76	PK	Horizontal

Test Mode:	802.11 AX80 MIMO	Frequency(MHz):	7025
Polarity:	Vertical	Test Voltage:	DC 20V

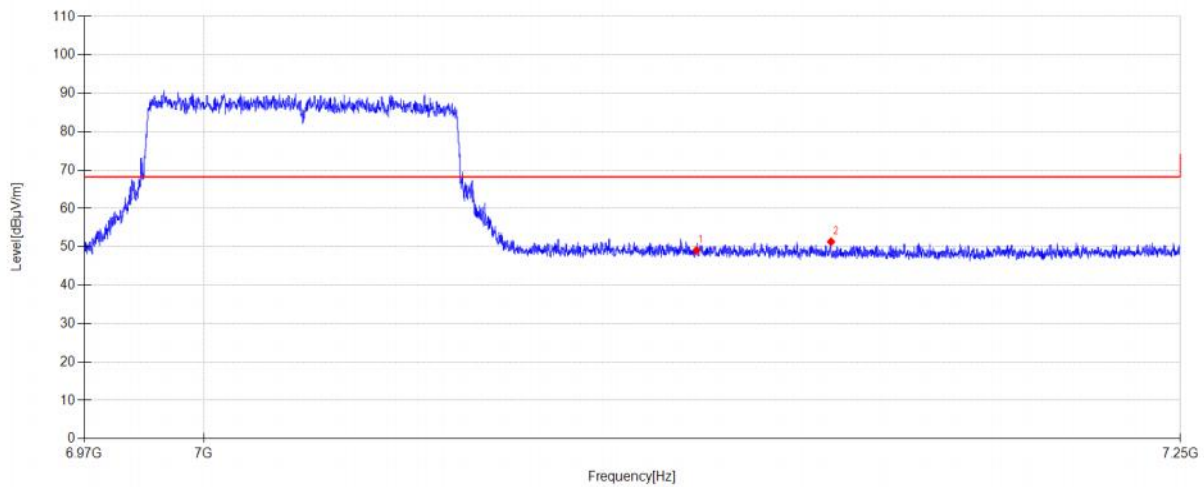


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	6.49	36.60	6.00	0.00	49.09	68.20	19.11	PK	Vertical
2	7159.560	8.84	36.48	6.01	0.00	51.33	68.20	16.87	PK	Vertical

Test Mode:	802.11 BE80 MIMO	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 20V

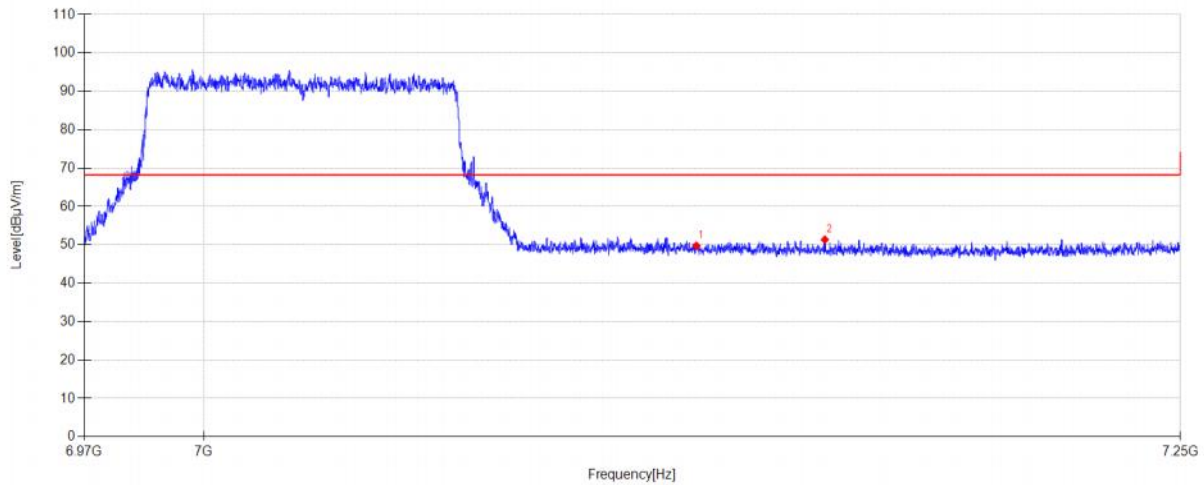


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.19	36.60	6.00	0.00	49.79	68.20	18.41	PK	Horizontal
2	7157.964	8.88	36.48	6.01	0.00	51.37	68.20	16.83	PK	Horizontal

Test Mode:	802.11 BE80 MIMO	Frequency(MHz):	7025
Polarity:	Vertical	Test Voltage:	DC 20V

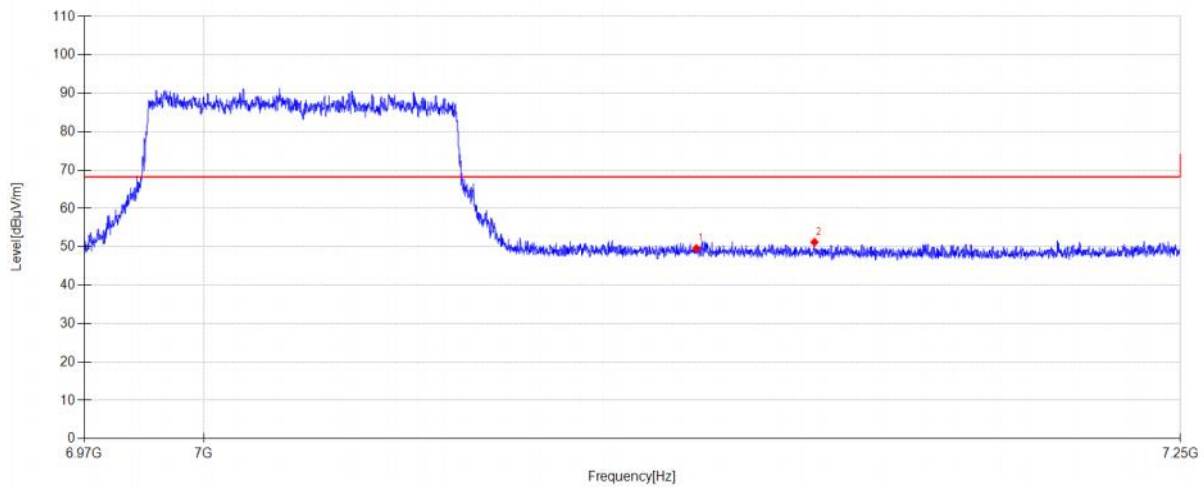


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.01	36.60	6.00	0.00	49.61	68.20	18.59	PK	Vertical
2	7155.304	8.74	36.49	6.01	0.00	51.24	68.20	16.96	PK	Vertical

Test Mode:	802.11 BE160 MIMO	Frequency(MHz):	6025
Polarity:	Horizontal	Test Voltage:	DC 20V

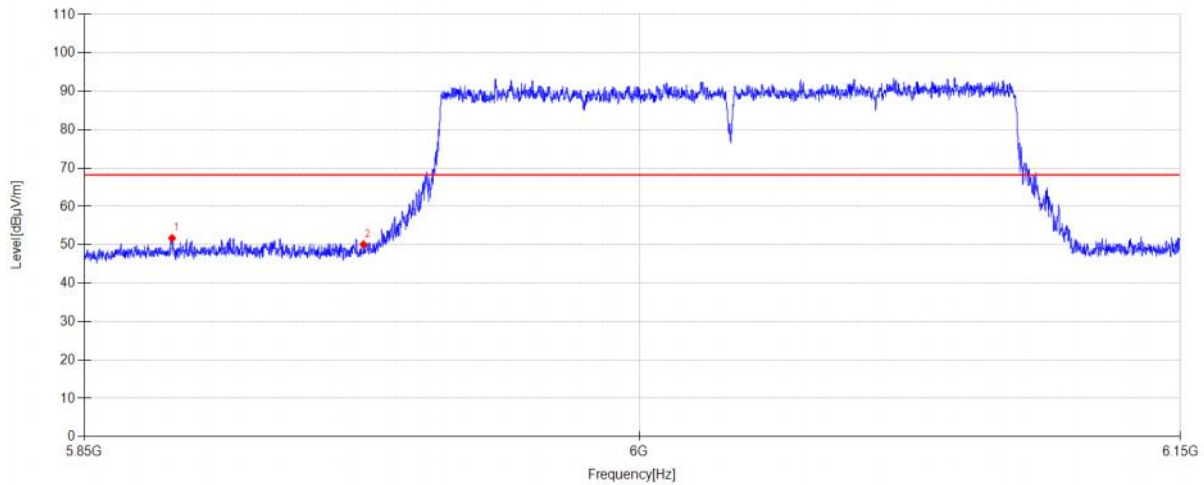


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5873.460	12.23	34.09	5.40	0.00	51.72	68.20	16.48	PK	Horizontal
2	5925.000	10.33	34.35	5.42	0.00	50.10	68.20	18.10	PK	Horizontal

Test Mode:	802.11 BE160 MIMO	Frequency(MHz):	6025
Polarity:	Vertical	Test Voltage:	DC 20V

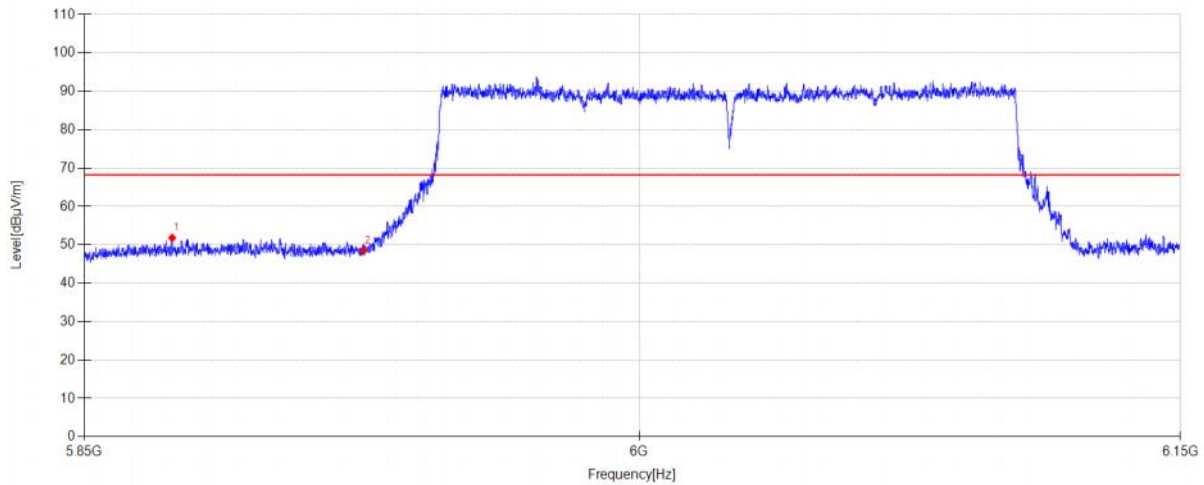


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5873.490	12.35	34.09	5.40	0.00	51.84	68.20	16.36	PK	Vertical
2	5925.000	8.79	34.35	5.42	0.00	48.56	68.20	19.64	PK	Vertical

Test Mode:	802.11 AX160 MIMO	Frequency(MHz):	6025
Polarity:	Horizontal	Test Voltage:	DC 20V

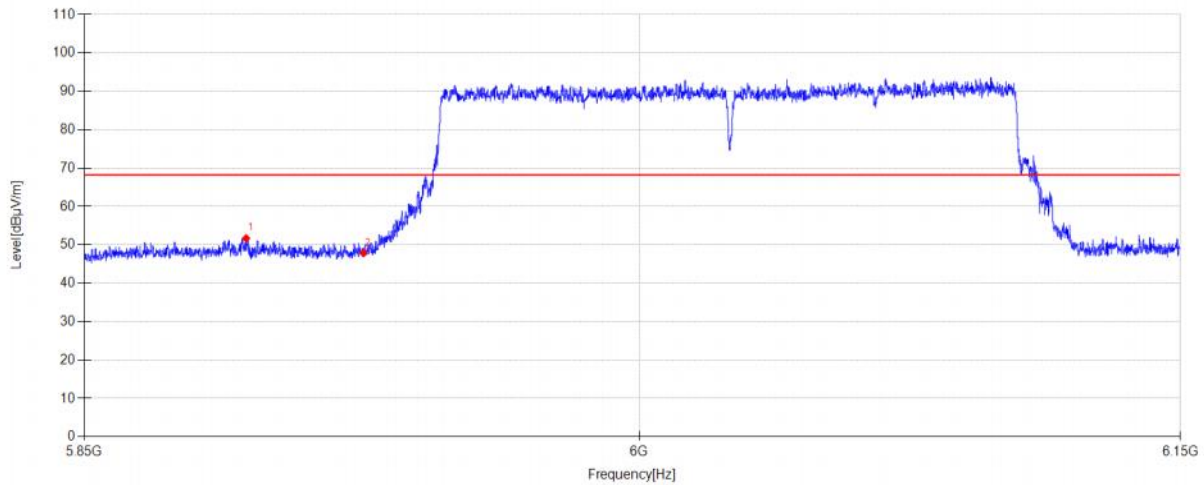


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5893.350	12.07	34.25	5.41	0.00	51.73	68.20	16.47	PK	Horizontal
2	5925.000	8.11	34.35	5.42	0.00	47.88	68.20	20.32	PK	Horizontal

Test Mode:	802.11 AX160 MIMO	Frequency(MHz):	6025
Polarity:	Vertical	Test Voltage:	DC 20V

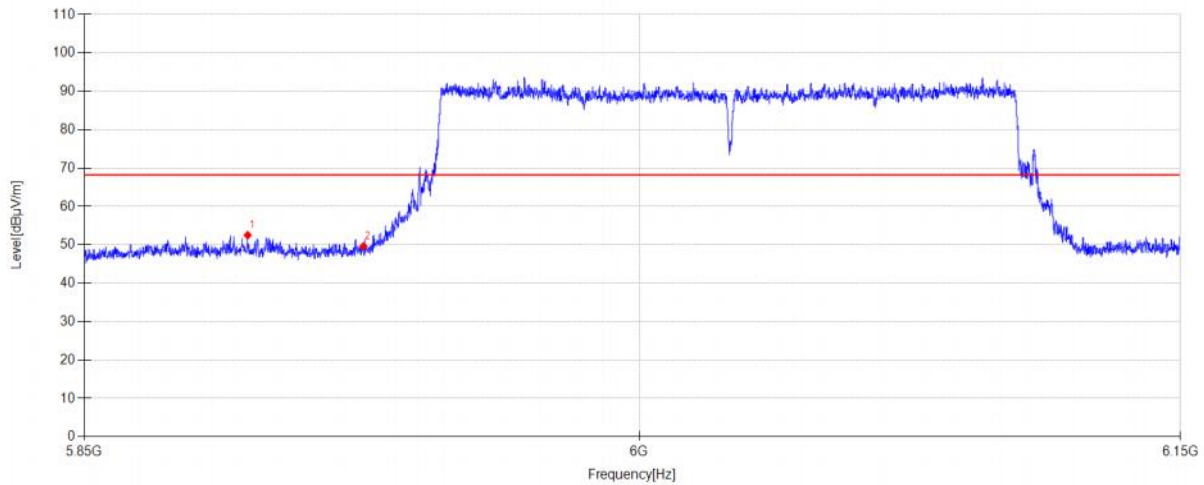


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5893.770	12.88	34.25	5.41	0.00	52.54	68.20	15.66	PK	Vertical
2	5925.000	9.89	34.35	5.42	0.00	49.66	68.20	18.54	PK	Vertical

Test Mode:	802.11 AX160 MIMO	Frequency(MHz):	6985
Polarity:	Horizontal	Test Voltage:	DC 20V

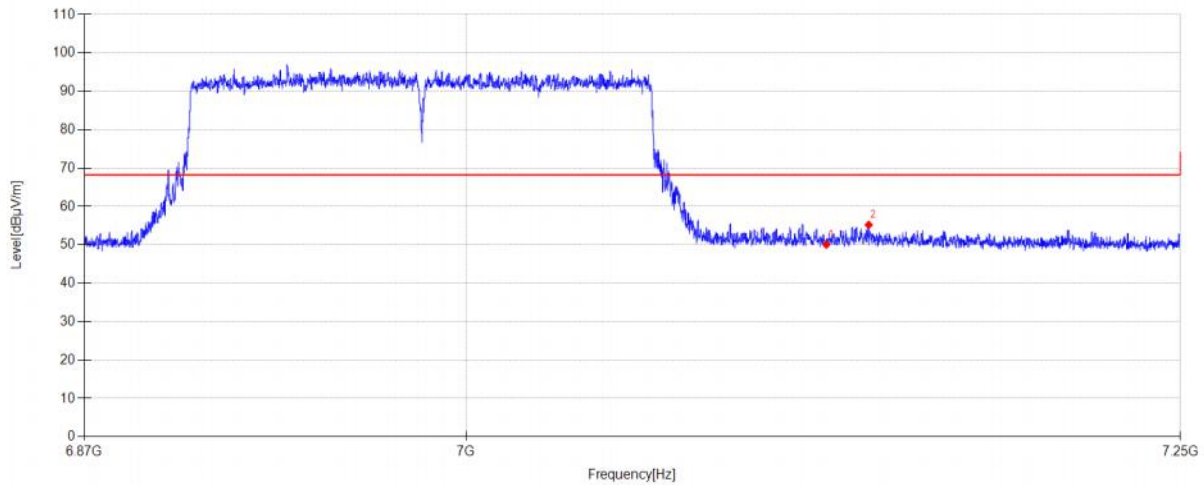


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.47	36.60	6.00	0.00	50.07	68.20	18.13	PK	Horizontal
2	7139.876	12.68	36.54	6.00	0.00	55.22	68.20	12.98	PK	Horizontal

Test Mode:	802.11 AX160 MIMO	Frequency(MHz):	6985
Polarity:	Vertical	Test Voltage:	DC 20V

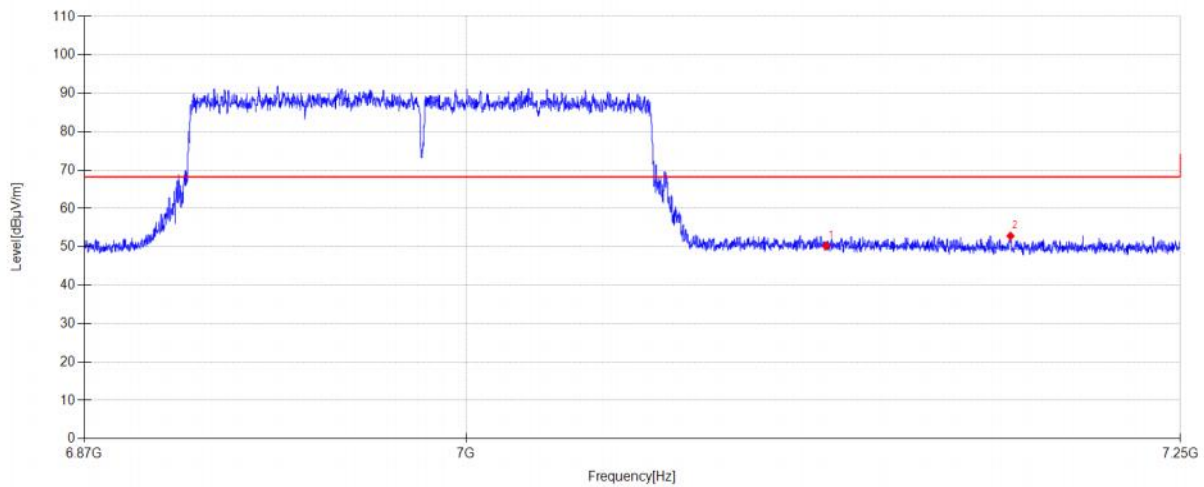


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.61	36.60	6.00	0.00	50.21	68.20	17.99	PK	Vertical
2	7189.770	10.41	36.42	6.02	0.00	52.85	68.20	15.35	PK	Vertical

Test Mode:	802.11 BE160 MIMO	Frequency(MHz):	6985
Polarity:	Horizontal	Test Voltage:	DC 20V

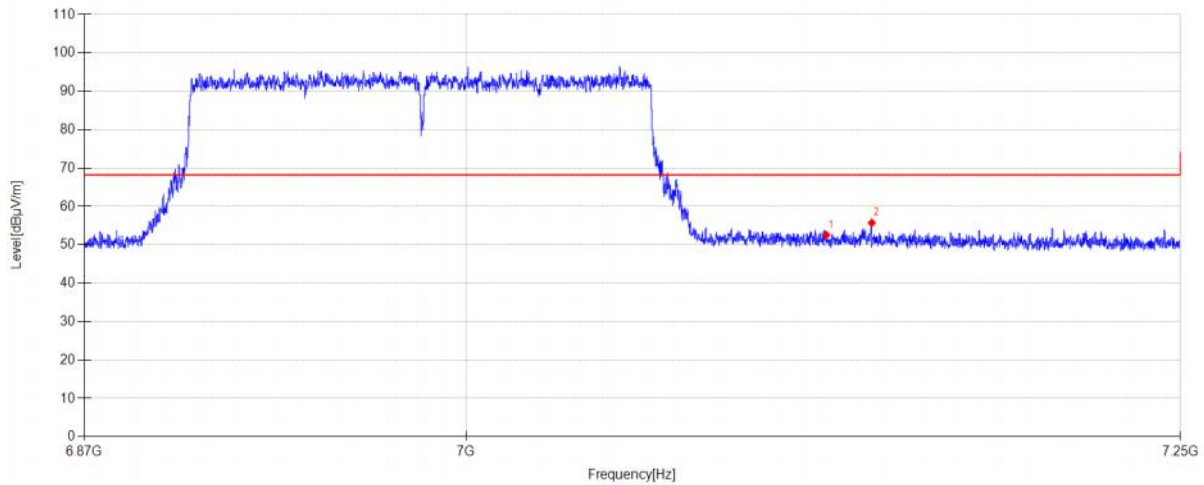


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	9.97	36.60	6.00	0.00	52.57	68.20	15.63	PK	Horizontal
2	7140.940	13.20	36.54	6.00	0.00	55.74	68.20	12.46	PK	Horizontal

Test Mode:	802.11 BE160 MIMO	Frequency(MHz):	6985
Polarity:	Vertical	Test Voltage:	DC 20V

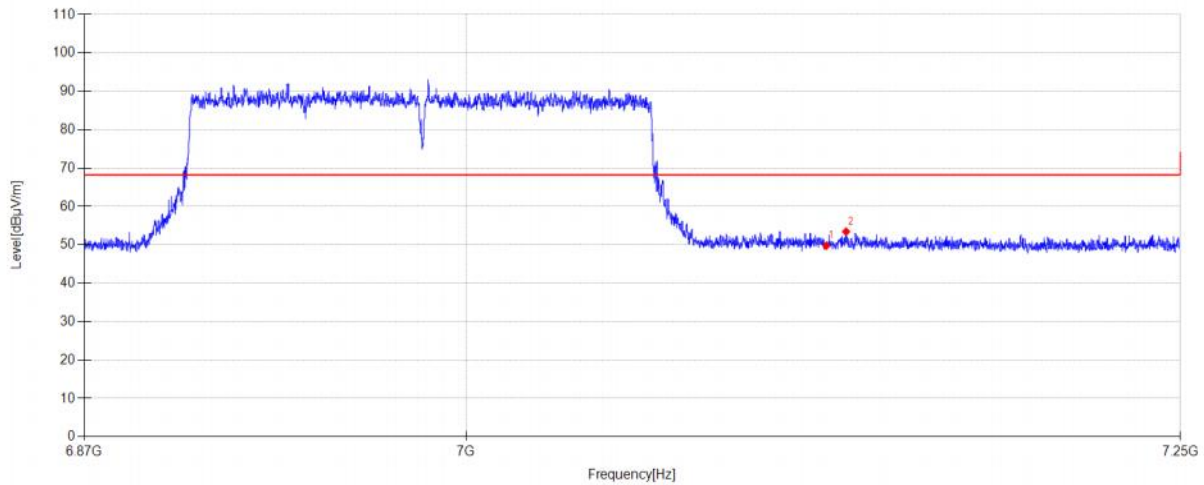


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	7.19	36.60	6.00	0.00	49.79	68.20	18.41	PK	Vertical
2	7131.934	10.90	36.57	6.00	0.00	53.47	68.20	14.73	PK	Vertical

Test Mode:	802.11 BE320 MIMO	Frequency(MHz):	6105
Polarity:	Horizontal	Test Voltage:	DC 20V

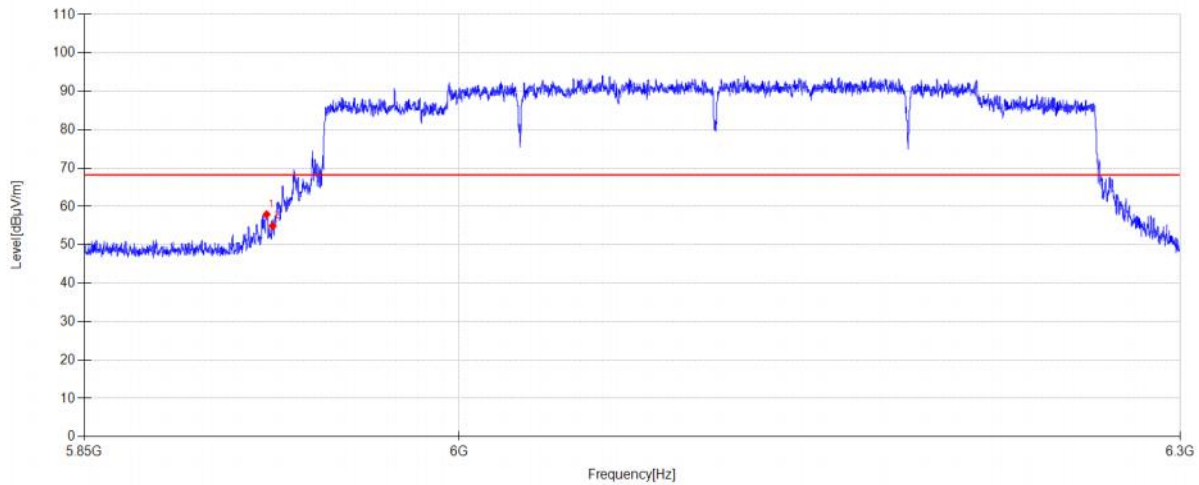


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5922.540	18.17	34.35	5.42	0.00	57.94	68.20	10.26	PK	Horizontal
2	5925.000	15.18	34.35	5.42	0.00	54.95	68.20	13.25	PK	Horizontal

Test Mode:	802.11 BE320 MIMO	Frequency(MHz):	6105
Polarity:	Vertical	Test Voltage:	DC 20V

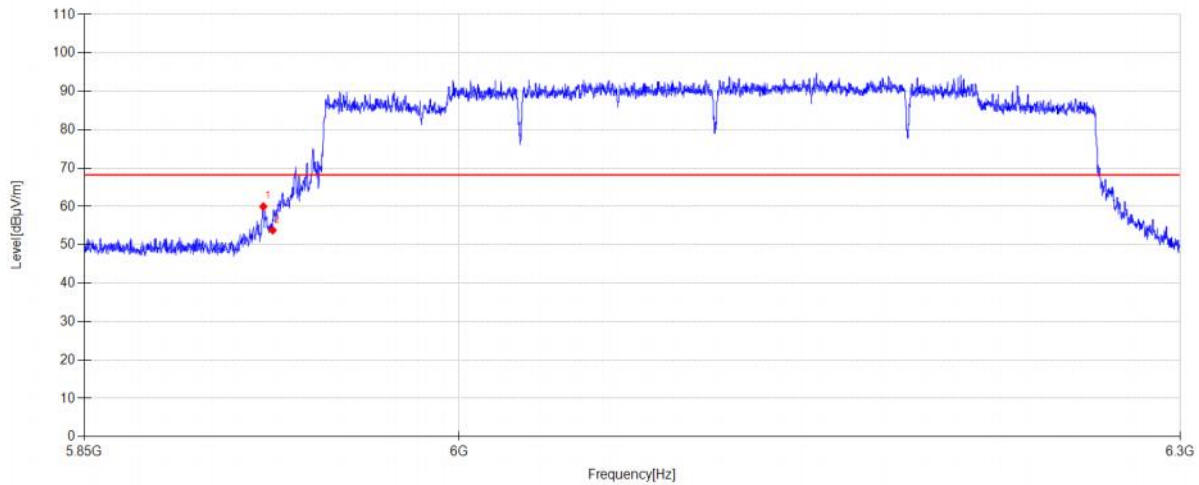


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5921.235	20.24	34.34	5.42	0.00	60.00	68.20	8.20	PK	Vertical
2	5925.000	14.05	34.35	5.42	0.00	53.82	68.20	14.38	PK	Vertical

Test Mode:	802.11 BE320 MIMO	Frequency(MHz):	6905
Polarity:	Horizontal	Test Voltage:	DC 20V

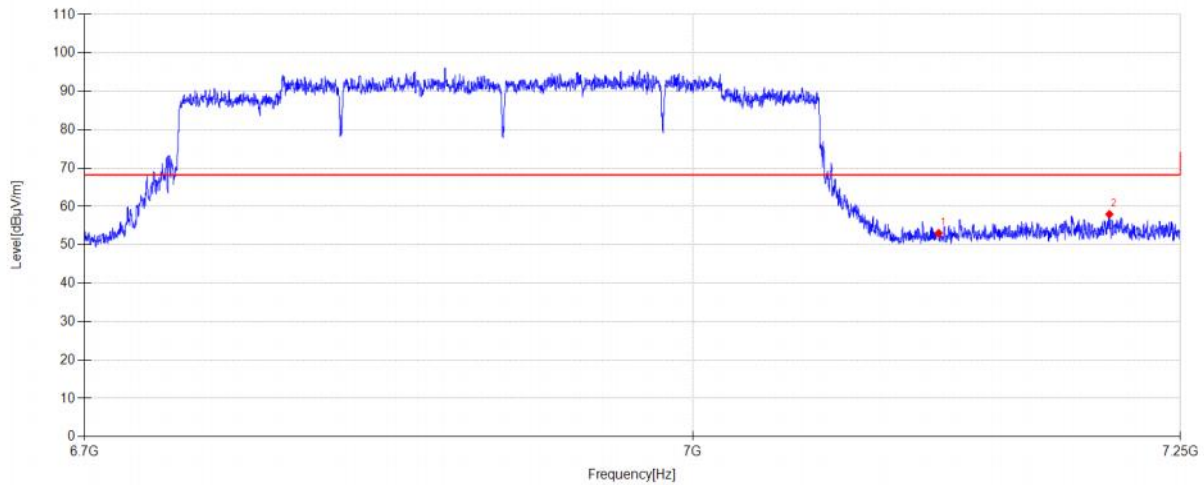


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	10.45	36.60	6.00	0.00	53.05	68.20	15.15	PK	Horizontal
2	7213.095	15.40	36.56	6.02	0.00	57.98	68.20	10.22	PK	Horizontal

Test Mode:	802.11 BE320 MIMO	Frequency(MHz):	6905
Polarity:	Vertical	Test Voltage:	DC 20V

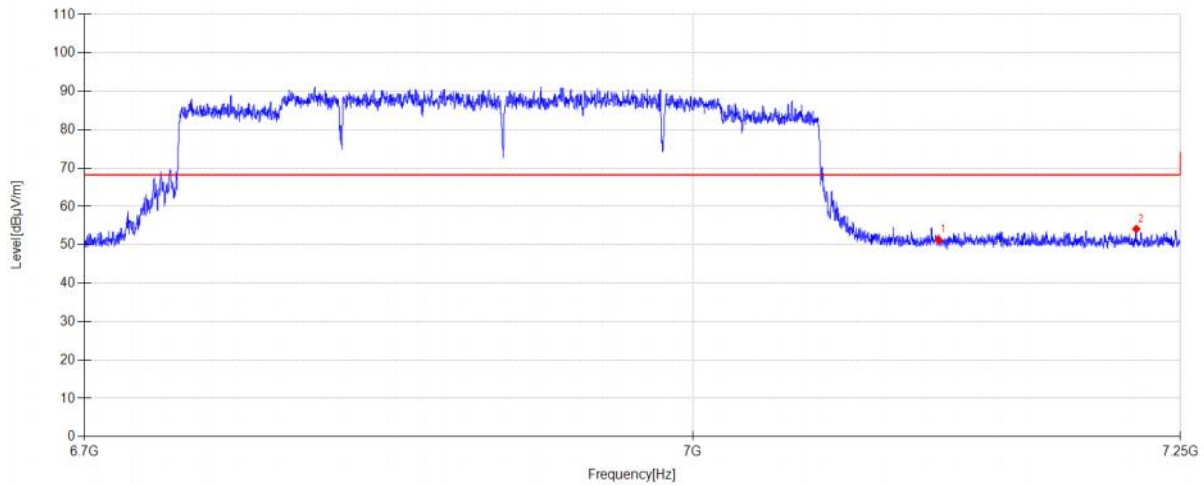


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	8.68	36.60	6.00	0.00	51.28	68.20	16.92	PK	Vertical
2	7227.065	11.40	36.72	6.03	0.00	54.15	68.20	14.05	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

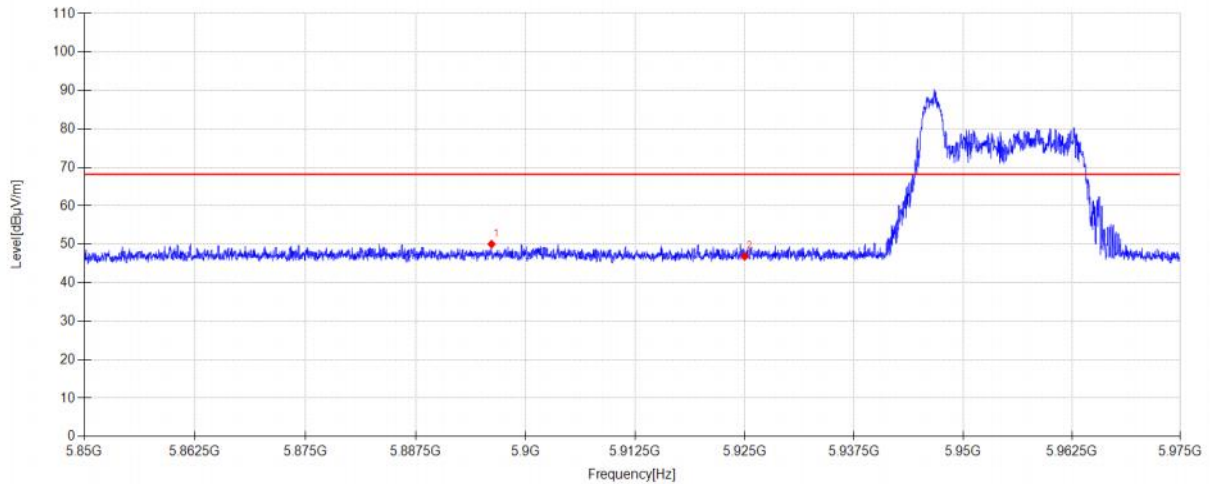


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5896.138	10.39	34.27	5.41	0.00	50.07	68.20	18.13	PK	Horizontal
2	5925.000	7.12	34.35	5.42	0.00	46.89	68.20	21.31	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

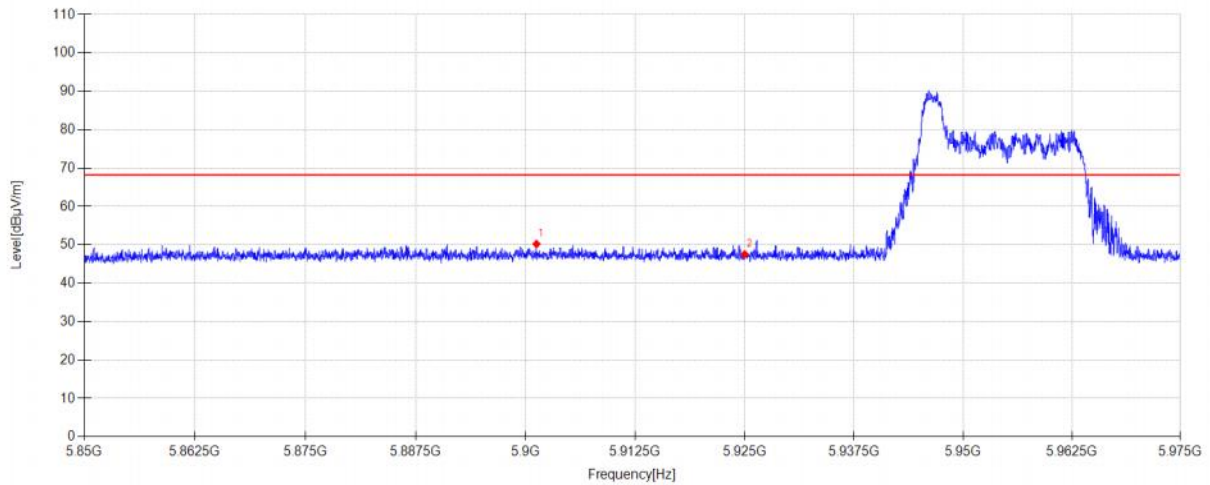


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5901.250	10.52	34.30	5.41	0.00	50.23	68.20	17.97	PK	Vertical
2	5925.000	7.76	34.35	5.42	0.00	47.53	68.20	20.67	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

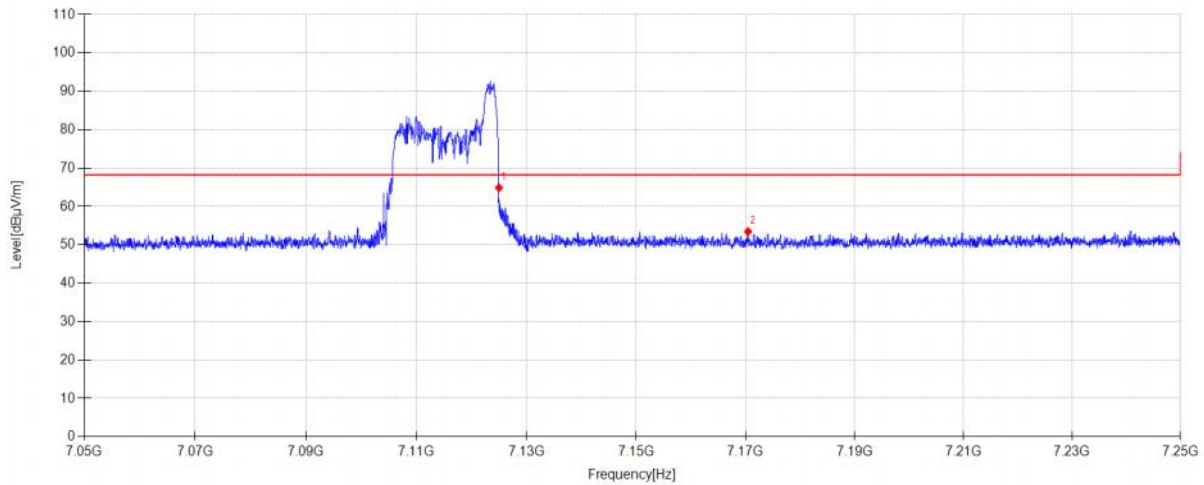

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	22.30	36.60	6.00	0.00	64.90	68.20	3.80	PK	Horizontal
2	7170.440	11.02	36.46	6.01	0.00	53.49	68.20	14.71	PK	Horizontal


Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

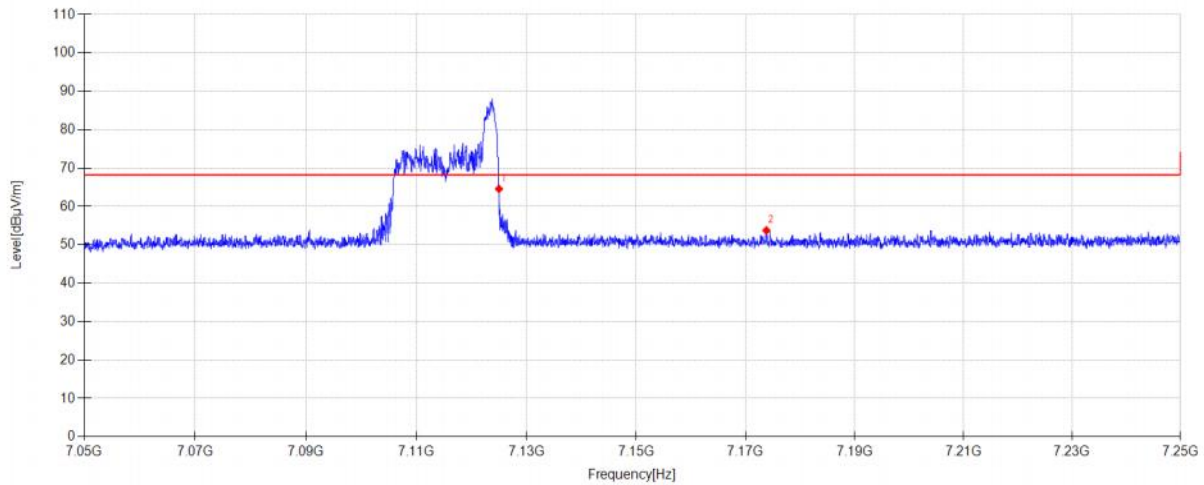

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7125.000	21.99	36.60	6.00	0.00	64.59	68.20	3.61	PK	Vertical
2	7173.800	11.32	36.45	6.01	0.00	53.78	68.20	14.42	PK	Vertical


8.2. SPURIOUS EMISSIONS(1 GHZ~40 GHZ)

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

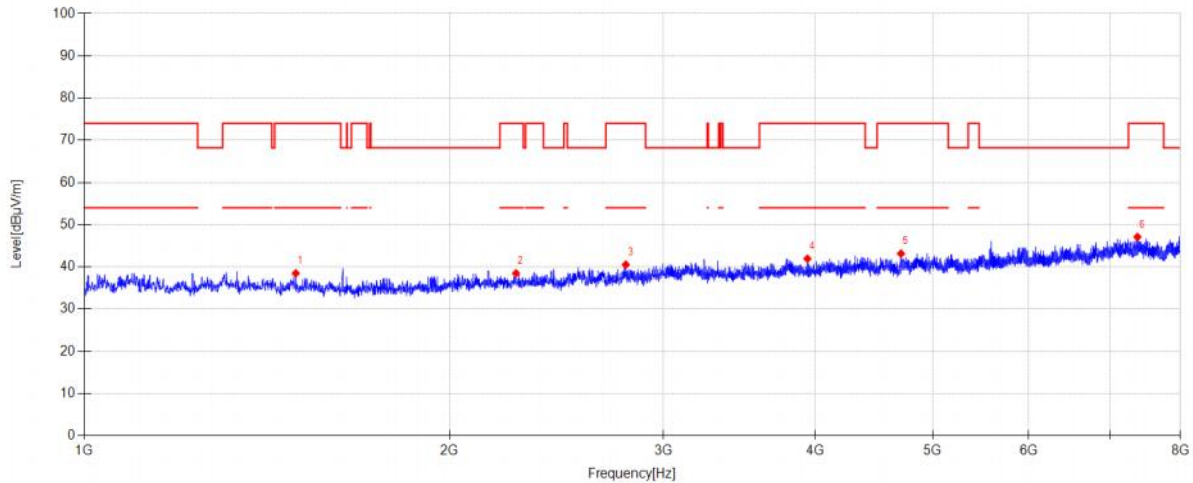


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1493.500	47.15	25.97	2.65	-37.29	38.48	74.00	35.52	PK	Horizontal
2	2268.400	46.05	27.44	3.48	-38.50	38.47	74.00	35.53	PK	Horizontal
3	2793.400	46.66	28.98	3.97	-39.07	40.54	74.00	33.46	PK	Horizontal
4	3942.800	46.79	30.39	4.44	-39.68	41.94	74.00	32.06	PK	Horizontal
5	4708.600	46.66	31.45	4.81	-39.77	43.15	74.00	30.85	PK	Horizontal
6	7374.200	44.04	36.85	6.07	-39.86	47.10	74.00	26.90	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

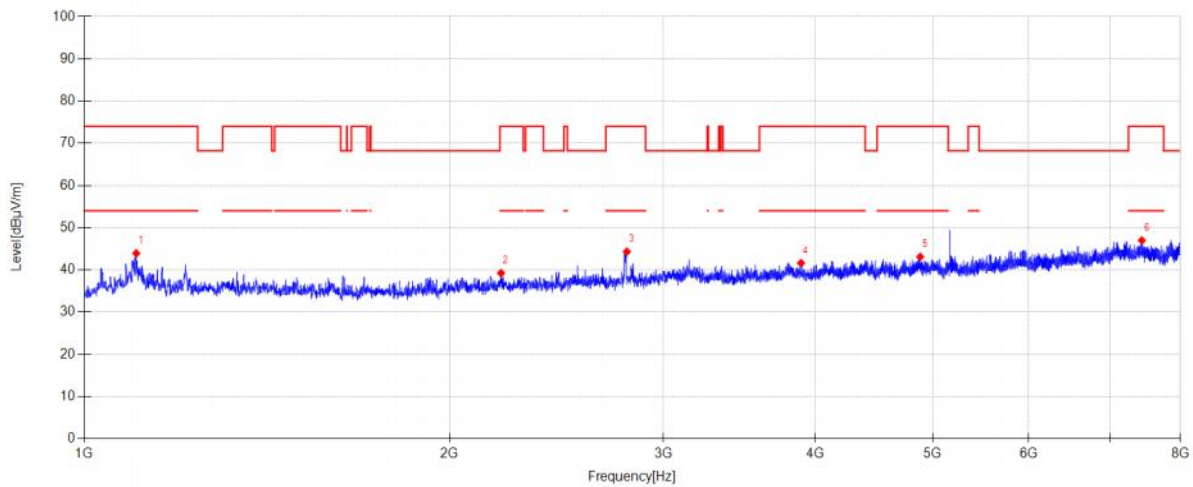


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1103.600	52.71	25.61	2.20	-36.59	43.93	74.00	30.07	PK	Vertical
2	2204.700	46.58	27.67	3.42	-38.43	39.24	74.00	34.76	PK	Vertical
3	2799.000	50.35	29.08	3.97	-39.08	44.32	74.00	29.68	PK	Vertical
4	3895.200	46.01	30.84	4.43	-39.66	41.62	74.00	32.38	PK	Vertical
5	4883.600	44.96	33.03	4.90	-39.79	43.10	74.00	30.90	PK	Vertical
6	7437.200	44.12	36.63	6.09	-39.86	46.98	74.00	27.02	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6175
Polarity:	Horizontal	Test Voltage:	DC 20V

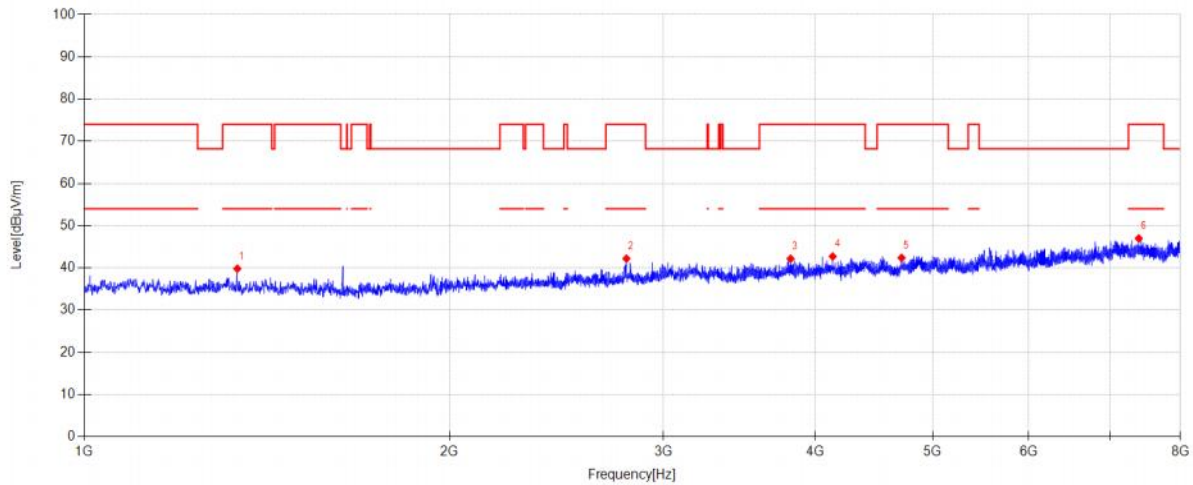


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1336.700	48.85	25.51	2.47	-37.01	39.82	74.00	34.18	PK	Horizontal
2	2796.900	48.27	29.04	3.97	-39.08	42.20	74.00	31.80	PK	Horizontal
3	3818.900	46.72	30.67	4.41	-39.63	42.17	74.00	31.83	PK	Horizontal
4	4136.700	46.51	31.39	4.53	-39.71	42.72	74.00	31.28	PK	Horizontal
5	4714.200	45.78	31.56	4.82	-39.77	42.39	74.00	31.61	PK	Horizontal
6	7393.100	44.03	36.74	6.08	-39.86	46.99	74.00	27.01	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6175
Polarity:	Vertical	Test Voltage:	DC 20V

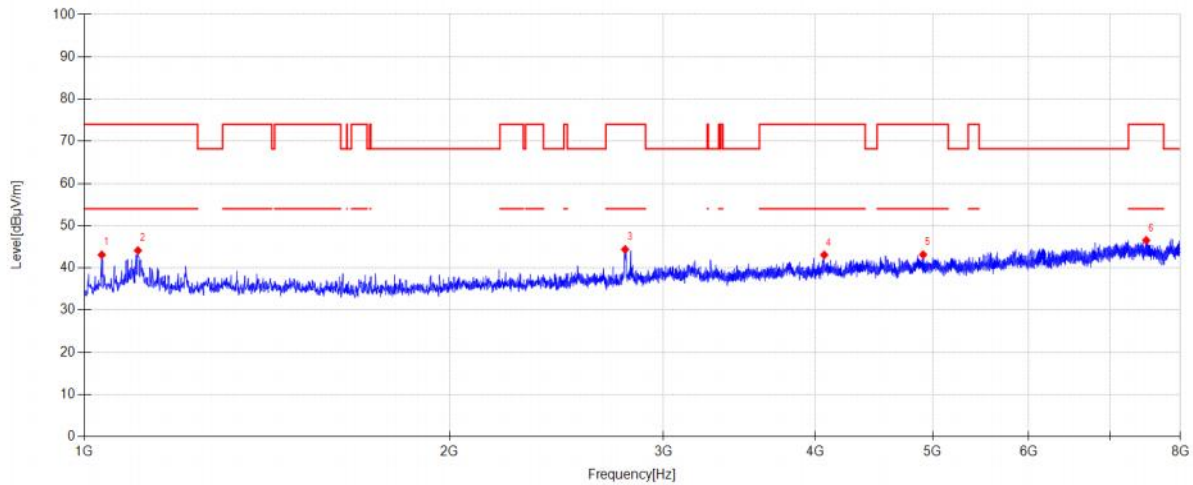


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1033.600	51.77	25.67	2.12	-36.46	43.10	74.00	30.90	PK	Vertical
2	1107.100	52.88	25.63	2.20	-36.59	44.12	74.00	29.88	PK	Vertical
3	2789.900	50.58	28.92	3.96	-39.07	44.39	74.00	29.61	PK	Vertical
4	4070.900	47.14	31.16	4.50	-39.71	43.09	74.00	30.91	PK	Vertical
5	4910.900	44.92	33.10	4.92	-39.79	43.15	74.00	30.85	PK	Vertical
6	7498.800	43.38	36.89	6.11	-39.85	46.53	74.00	27.47	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6415
Polarity:	Horizontal	Test Voltage:	DC 20V

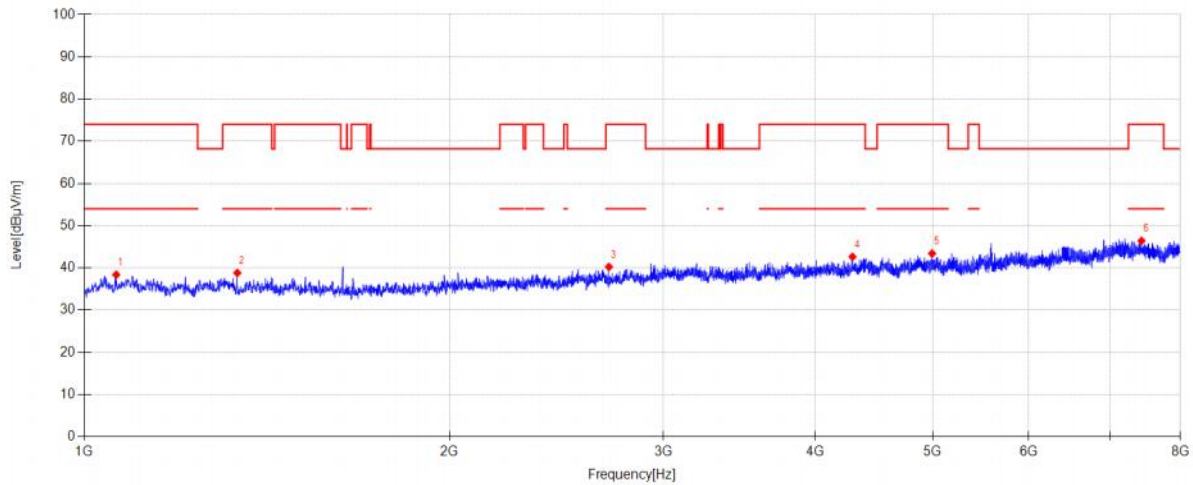


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1062.300	47.07	25.68	2.15	-36.51	38.39	74.00	35.61	PK	Horizontal
2	1336.700	47.85	25.51	2.47	-37.01	38.82	74.00	35.18	PK	Horizontal
3	2705.900	47.49	27.85	3.89	-38.98	40.25	74.00	33.75	PK	Horizontal
4	4294.900	45.84	31.92	4.61	-39.73	42.64	74.00	31.36	PK	Horizontal
5	4994.900	45.24	33.01	4.96	-39.80	43.41	74.00	30.59	PK	Horizontal
6	7432.300	43.55	36.64	6.09	-39.86	46.42	74.00	27.58	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6415
Polarity:	Vertical	Test Voltage:	DC 20V

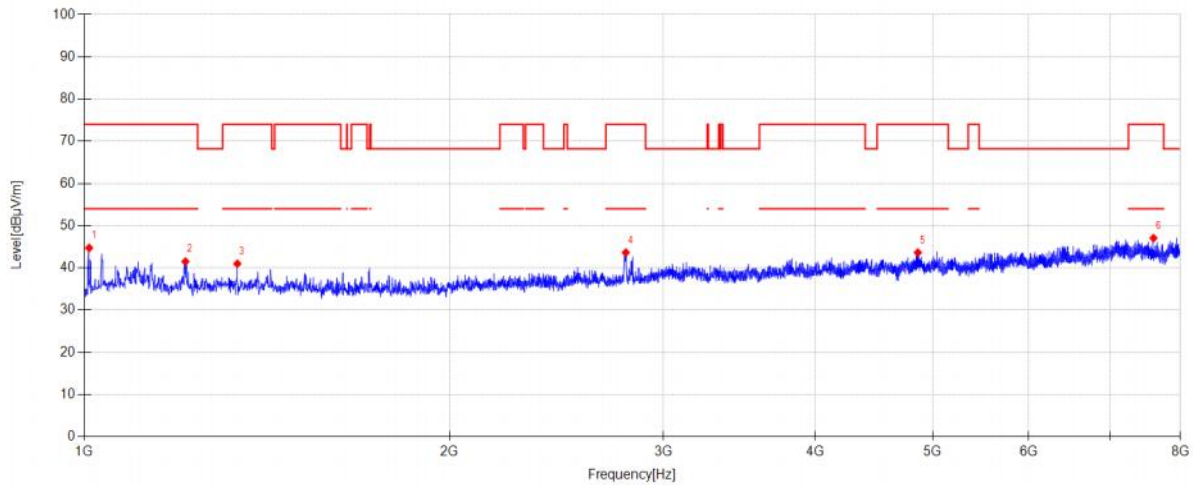


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1009.100	53.45	25.62	2.09	-36.42	44.74	74.00	29.26	PK	Vertical
2	1211.400	50.45	25.52	2.32	-36.78	41.51	74.00	32.49	PK	Vertical
3	1336.700	50.02	25.51	2.47	-37.01	40.99	74.00	33.01	PK	Vertical
4	2793.400	49.76	28.98	3.97	-39.07	43.64	74.00	30.36	PK	Vertical
5	4861.900	45.58	32.95	4.89	-39.79	43.63	74.00	30.37	PK	Vertical
6	7603.100	44.51	36.25	6.14	-39.84	47.06	74.00	26.94	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6435
Polarity:	Horizontal	Test Voltage:	DC 20V

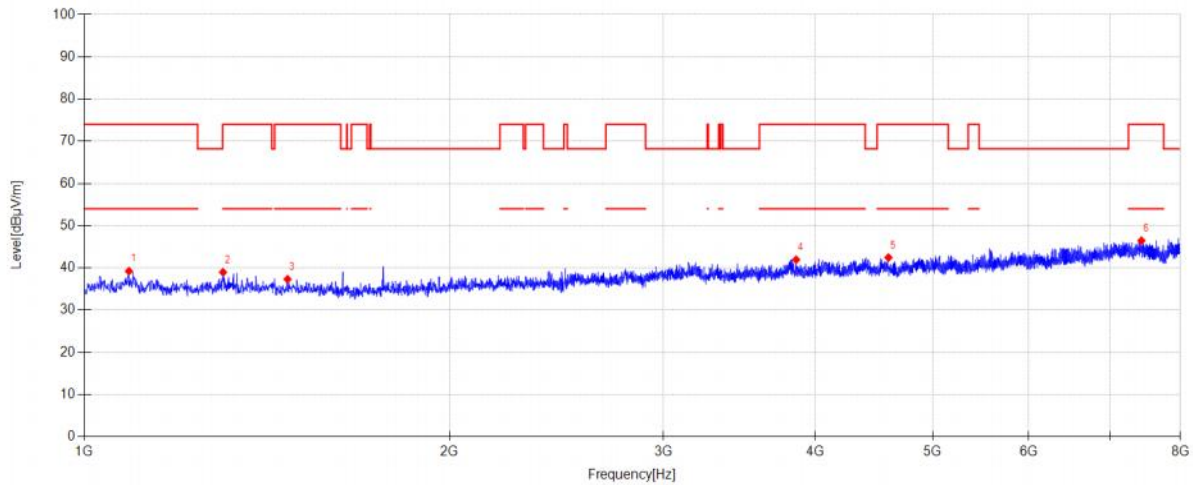


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1088.200	48.00	25.62	2.18	-36.56	39.24	74.00	34.76	PK	Horizontal
2	1301.000	47.42	26.08	2.43	-36.94	38.99	74.00	35.01	PK	Horizontal
3	1470.400	46.09	25.88	2.62	-37.25	37.34	74.00	36.66	PK	Horizontal
4	3859.500	46.76	30.41	4.42	-39.64	41.95	74.00	32.05	PK	Horizontal
5	4598.000	46.03	31.43	4.76	-39.76	42.46	74.00	31.54	PK	Horizontal
6	7430.900	43.59	36.64	6.09	-39.86	46.46	74.00	27.54	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6435
Polarity:	Vertical	Test Voltage:	DC 20V

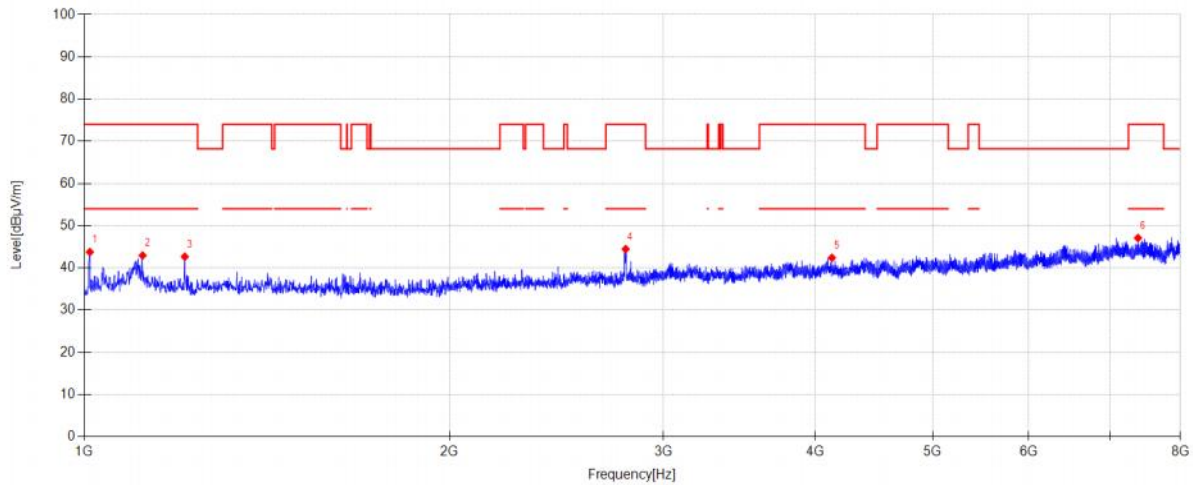


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1010.500	52.48	25.62	2.09	-36.42	43.77	74.00	30.23	PK	Vertical
2	1116.900	51.68	25.67	2.21	-36.61	42.95	74.00	31.05	PK	Vertical
3	1210.000	51.60	25.52	2.32	-36.78	42.66	74.00	31.34	PK	Vertical
4	2792.700	50.59	28.97	3.97	-39.07	44.46	74.00	29.54	PK	Vertical
5	4130.400	46.23	31.34	4.53	-39.71	42.39	74.00	31.61	PK	Vertical
6	7382.600	44.07	36.80	6.07	-39.86	47.08	74.00	26.92	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6475
Polarity:	Horizontal	Test Voltage:	DC 20V

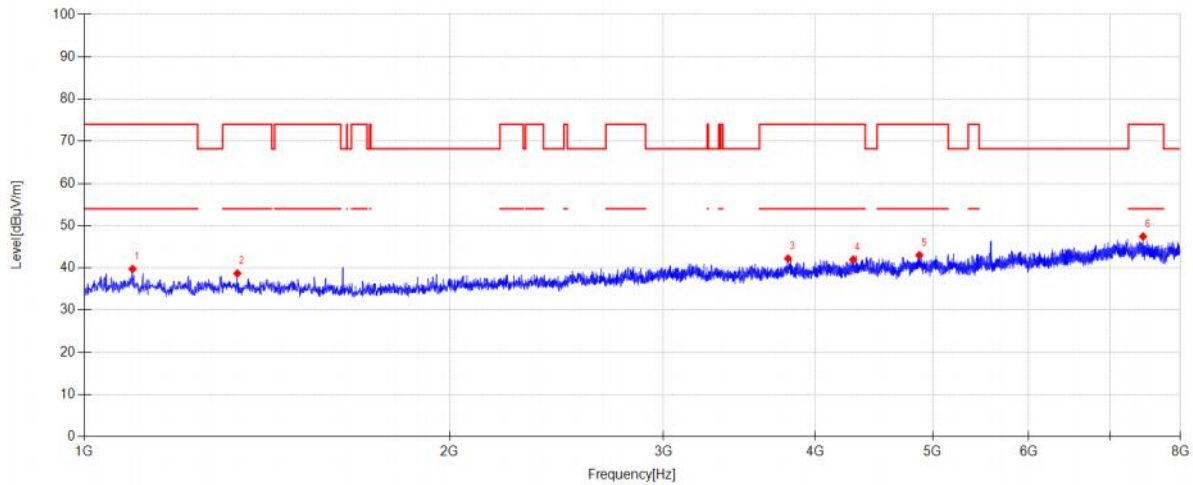


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1095.900	48.53	25.61	2.19	-36.57	39.76	74.00	34.24	PK	Horizontal
2	1336.700	47.71	25.51	2.47	-37.01	38.68	74.00	35.32	PK	Horizontal
3	3800.700	46.54	30.89	4.40	-39.62	42.21	74.00	31.79	PK	Horizontal
4	4300.500	45.09	31.99	4.61	-39.73	41.96	74.00	32.04	PK	Horizontal
5	4875.900	44.90	33.00	4.90	-39.79	43.01	74.00	30.99	PK	Horizontal
6	7454.000	44.57	36.62	6.10	-39.85	47.44	74.00	26.56	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6475
Polarity:	Vertical	Test Voltage:	DC 20V

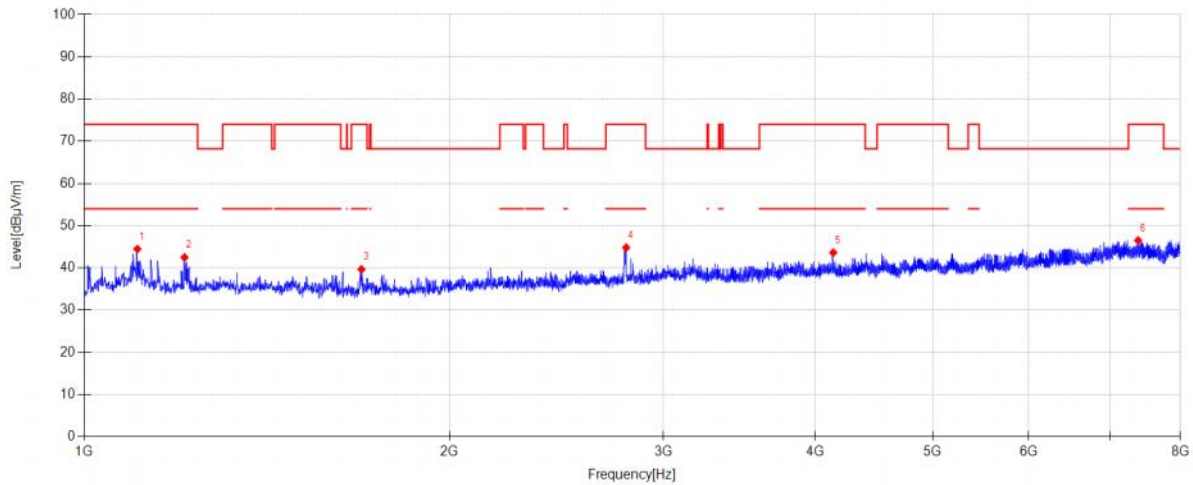


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1105.700	53.24	25.62	2.20	-36.59	44.47	74.00	29.53	PK	Vertical
2	1209.300	51.44	25.52	2.32	-36.78	42.50	74.00	31.50	PK	Vertical
3	1691.600	49.10	25.33	2.88	-37.64	39.67	74.00	34.33	PK	Vertical
4	2795.500	50.91	29.02	3.97	-39.08	44.82	74.00	29.18	PK	Vertical
5	4140.900	47.39	31.43	4.53	-39.71	43.64	74.00	30.36	PK	Vertical
6	7384.700	43.51	36.79	6.08	-39.86	46.52	74.00	27.48	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6515
Polarity:	Horizontal	Test Voltage:	DC 20V

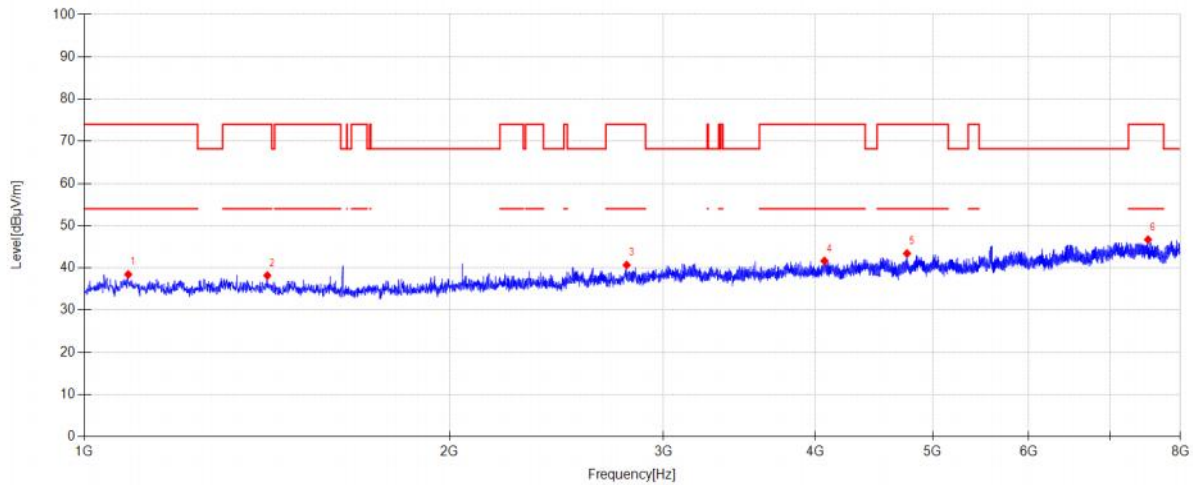


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1086.800	47.21	25.63	2.18	-36.56	38.46	74.00	35.54	PK	Horizontal
2	1415.100	46.71	26.08	2.56	-37.15	38.20	74.00	35.80	PK	Horizontal
3	2798.300	46.73	29.07	3.97	-39.08	40.69	74.00	33.31	PK	Horizontal
4	4072.300	45.72	31.16	4.50	-39.71	41.67	74.00	32.33	PK	Horizontal
5	4762.500	46.18	32.18	4.84	-39.78	43.42	74.00	30.58	PK	Horizontal
6	7524.700	43.89	36.55	6.12	-39.85	46.71	74.00	27.29	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6515
Polarity:	Vertical	Test Voltage:	DC 20V

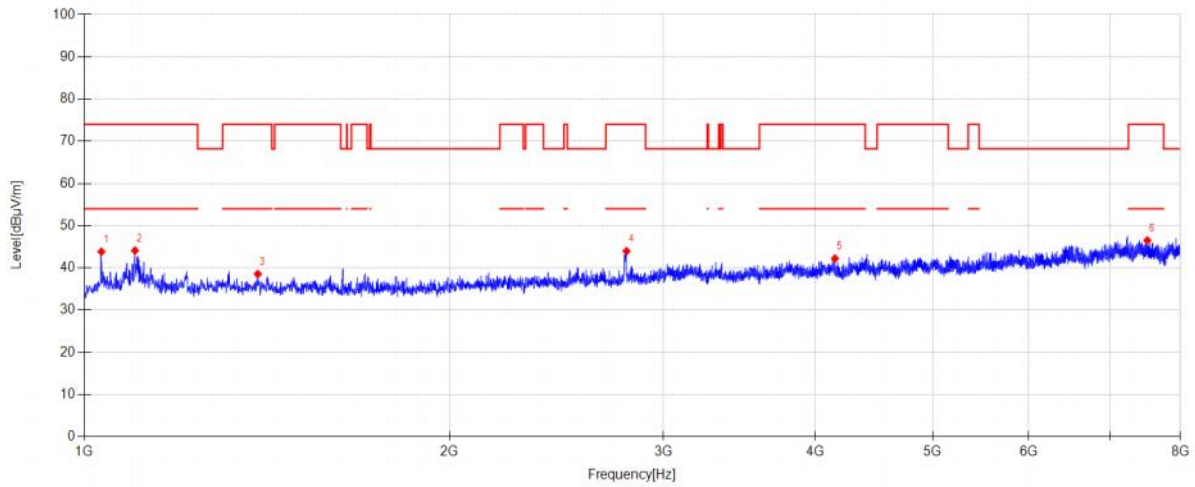


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1032.900	52.51	25.67	2.12	-36.46	43.84	74.00	30.16	PK	Vertical
2	1100.800	52.88	25.60	2.20	-36.58	44.10	74.00	29.90	PK	Vertical
3	1389.900	47.10	26.02	2.53	-37.10	38.55	74.00	35.45	PK	Vertical
4	2797.600	50.02	29.06	3.97	-39.08	43.97	74.00	30.03	PK	Vertical
5	4154.200	45.95	31.46	4.54	-39.72	42.23	74.00	31.77	PK	Vertical
6	7514.200	43.56	36.70	6.11	-39.85	46.52	74.00	27.48	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6535
Polarity:	Horizontal	Test Voltage:	DC 20V

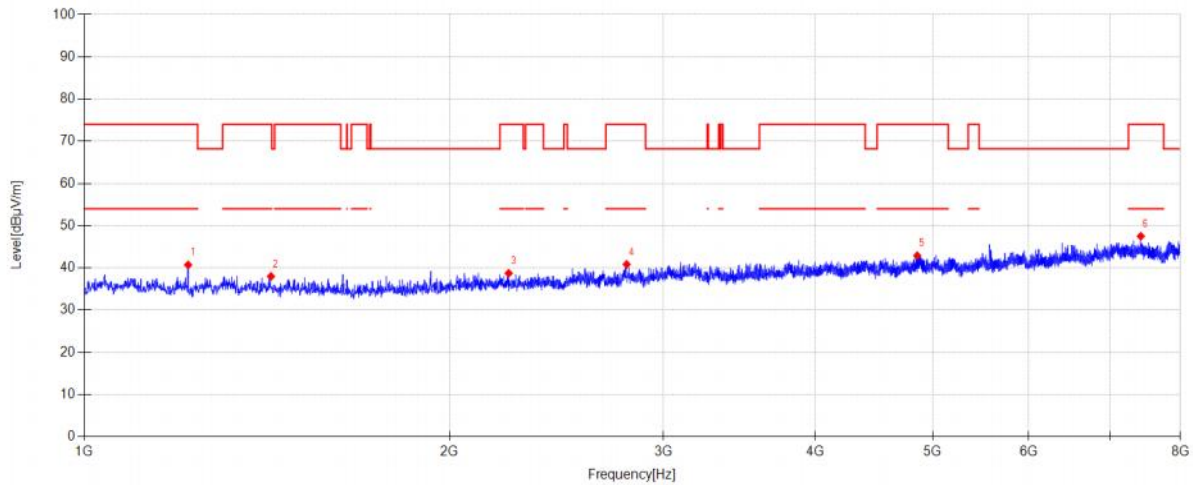


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1217.700	49.64	25.54	2.33	-36.79	40.72	74.00	33.28	PK	Horizontal
2	1424.900	46.60	26.00	2.57	-37.16	38.01	74.00	35.99	PK	Horizontal
3	2236.900	46.26	27.48	3.45	-38.46	38.73	74.00	35.27	PK	Horizontal
4	2798.300	46.88	29.07	3.97	-39.08	40.84	74.00	33.16	PK	Horizontal
5	4856.300	44.88	32.93	4.89	-39.79	42.91	74.00	31.09	PK	Horizontal
6	7421.800	44.62	36.66	6.09	-39.86	47.51	74.00	26.49	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6535
Polarity:	Vertical	Test Voltage:	DC 20V

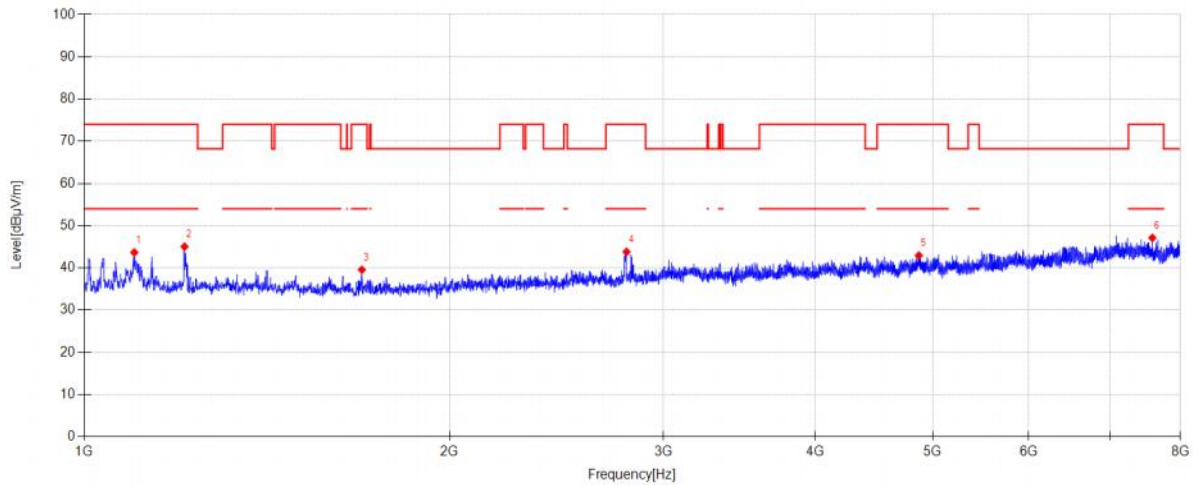


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1099.400	52.46	25.60	2.19	-36.58	43.67	74.00	30.33	PK	Vertical
2	1209.300	53.98	25.52	2.32	-36.78	45.04	74.00	28.96	PK	Vertical
3	1693.000	49.00	25.34	2.88	-37.65	39.57	74.00	34.43	PK	Vertical
4	2797.600	49.86	29.06	3.97	-39.08	43.81	74.00	30.19	PK	Vertical
5	4871.000	44.85	32.98	4.90	-39.79	42.94	74.00	31.06	PK	Vertical
6	7585.600	44.61	36.20	6.14	-39.84	47.11	74.00	26.89	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6695
Polarity:	Horizontal	Test Voltage:	DC 20V

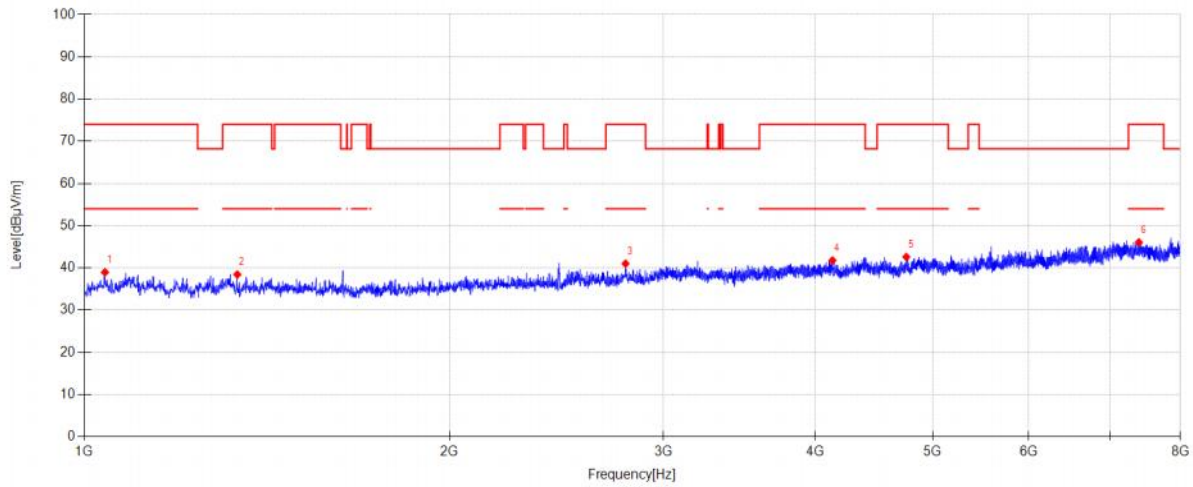


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1039.900	47.63	25.68	2.13	-36.47	38.97	74.00	35.03	PK	Horizontal
2	1336.700	47.47	25.51	2.47	-37.01	38.44	74.00	35.56	PK	Horizontal
3	2792.000	47.15	28.96	3.97	-39.07	41.01	74.00	32.99	PK	Horizontal
4	4134.600	45.58	31.38	4.53	-39.71	41.78	74.00	32.22	PK	Horizontal
5	4756.900	45.35	32.19	4.84	-39.78	42.60	74.00	31.40	PK	Horizontal
6	7394.500	43.10	36.73	6.08	-39.86	46.05	74.00	27.95	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6695
Polarity:	Vertical	Test Voltage:	DC 20V

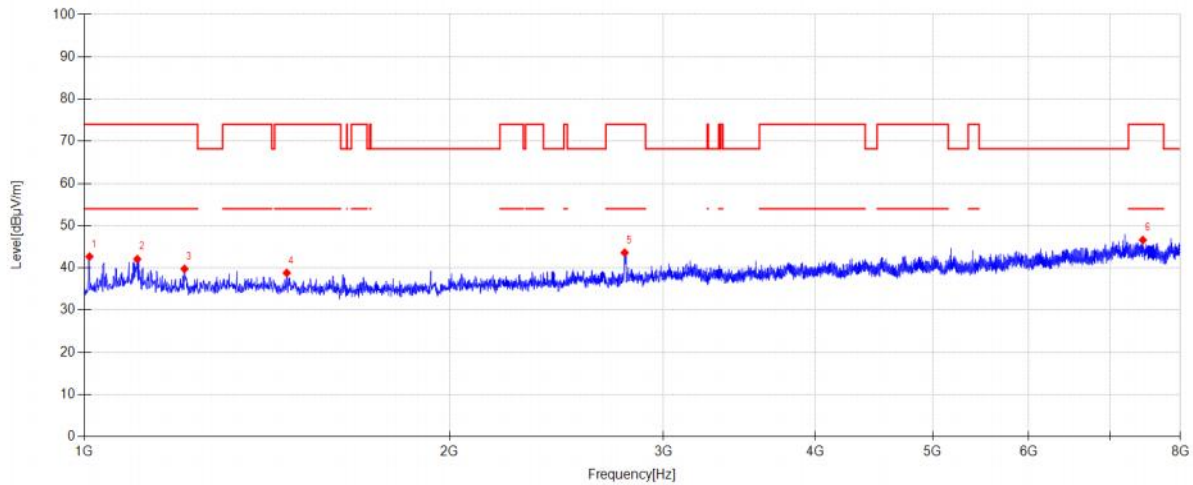


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1009.800	51.39	25.62	2.09	-36.42	42.68	74.00	31.32	PK	Vertical
2	1105.700	50.85	25.62	2.20	-36.59	42.08	74.00	31.92	PK	Vertical
3	1209.300	48.71	25.52	2.32	-36.78	39.77	74.00	34.23	PK	Vertical
4	1468.300	47.55	25.87	2.62	-37.24	38.80	74.00	35.20	PK	Vertical
5	2787.800	49.84	28.88	3.96	-39.07	43.61	74.00	30.39	PK	Vertical
6	7451.200	43.75	36.61	6.10	-39.85	46.61	74.00	27.39	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6855
Polarity:	Horizontal	Test Voltage:	DC 20V

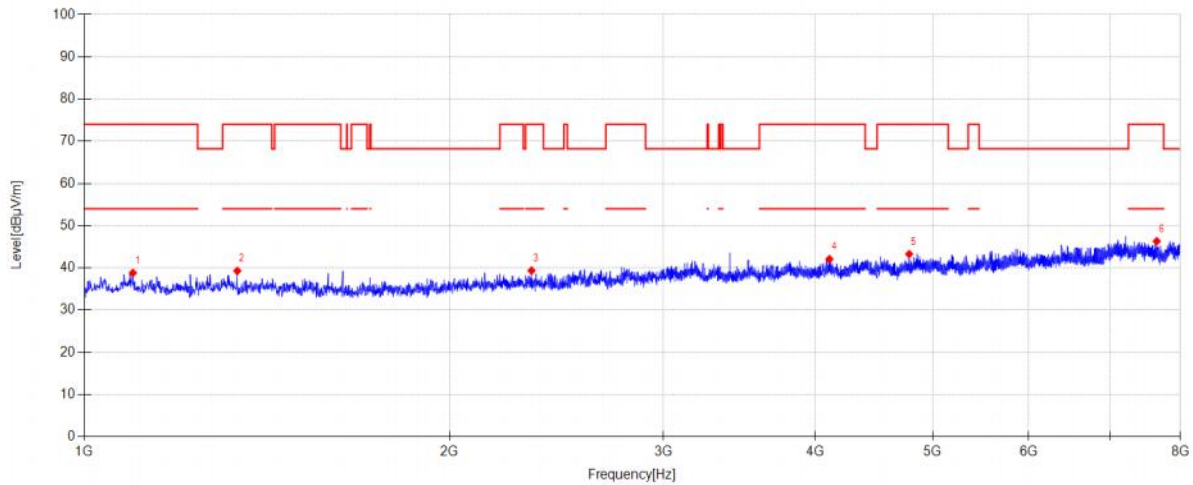


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1096.600	47.59	25.61	2.19	-36.57	38.82	74.00	35.18	PK	Horizontal
2	1336.700	48.32	25.51	2.47	-37.01	39.29	74.00	34.71	PK	Horizontal
3	2336.300	46.74	27.65	3.54	-38.57	39.36	74.00	34.64	PK	Horizontal
4	4110.800	46.08	31.19	4.52	-39.71	42.08	74.00	31.92	PK	Horizontal
5	4782.800	46.07	32.13	4.85	-39.78	43.27	74.00	30.73	PK	Horizontal
6	7650.000	43.01	37.00	6.16	-39.84	46.33	74.00	27.67	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6855
Polarity:	Vertical	Test Voltage:	DC 20V

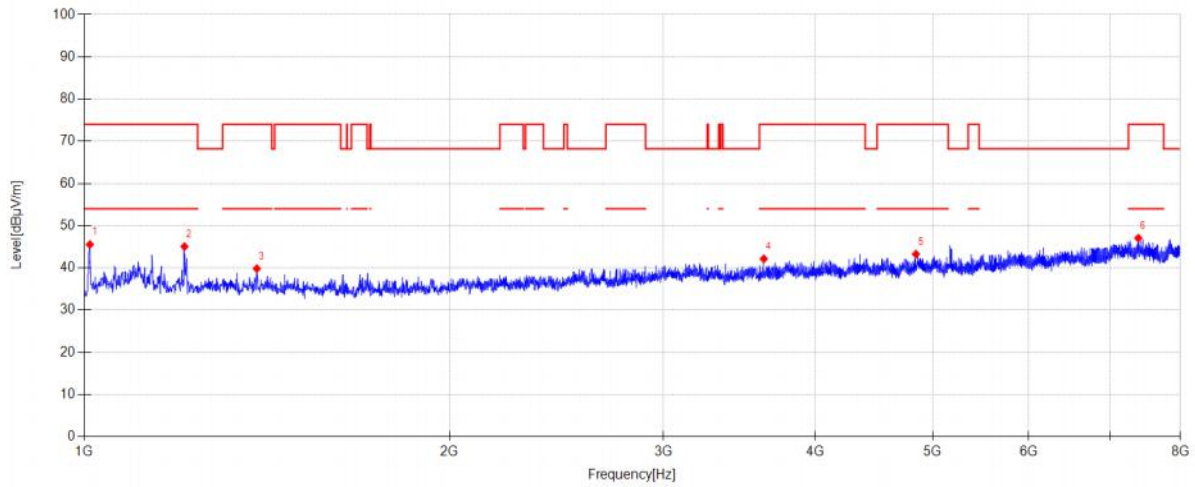


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1010.500	54.27	25.62	2.09	-36.42	45.56	74.00	28.44	PK	Vertical
2	1209.300	54.01	25.52	2.32	-36.78	45.07	74.00	28.93	PK	Vertical
3	1387.100	48.44	25.97	2.53	-37.10	39.84	74.00	34.16	PK	Vertical
4	3629.900	47.83	29.52	4.35	-39.55	42.15	74.00	31.85	PK	Vertical
5	4844.400	45.36	32.81	4.88	-39.78	43.27	74.00	30.73	PK	Vertical
6	7386.800	44.06	36.78	6.08	-39.86	47.06	74.00	26.94	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6875
Polarity:	Horizontal	Test Voltage:	DC 20V

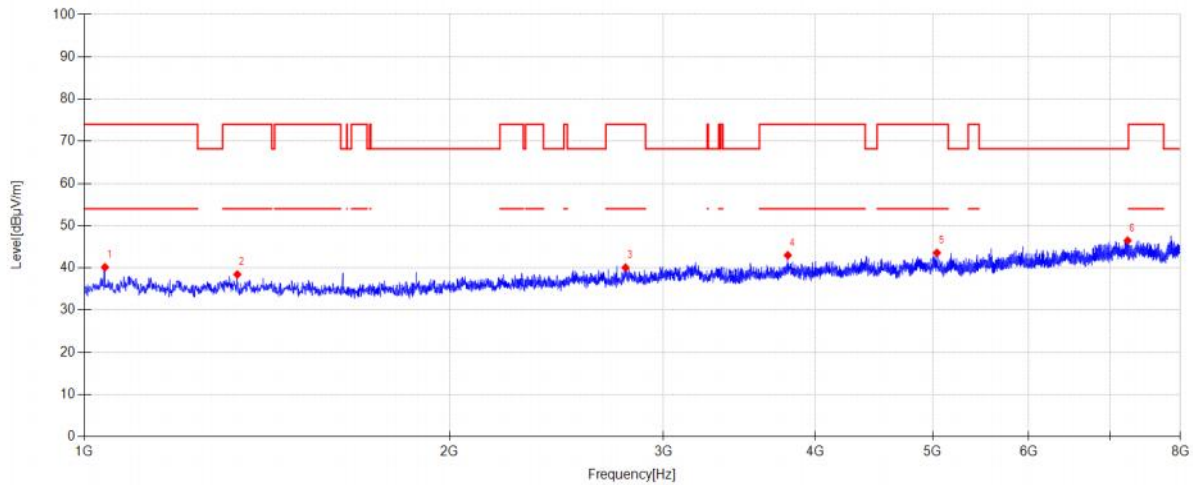


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1039.900	48.82	25.68	2.13	-36.47	40.16	74.00	33.84	PK	Horizontal
2	1336.700	47.48	25.51	2.47	-37.01	38.45	74.00	35.55	PK	Horizontal
3	2792.000	46.20	28.96	3.97	-39.07	40.06	74.00	33.94	PK	Horizontal
4	3798.600	47.35	30.87	4.40	-39.62	43.00	74.00	31.00	PK	Horizontal
5	5040.400	45.31	33.08	4.98	-39.79	43.58	74.00	30.42	PK	Horizontal
6	7238.400	43.46	36.86	6.03	-39.88	46.47	68.20	21.73	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6875
Polarity:	Vertical	Test Voltage:	DC 20V

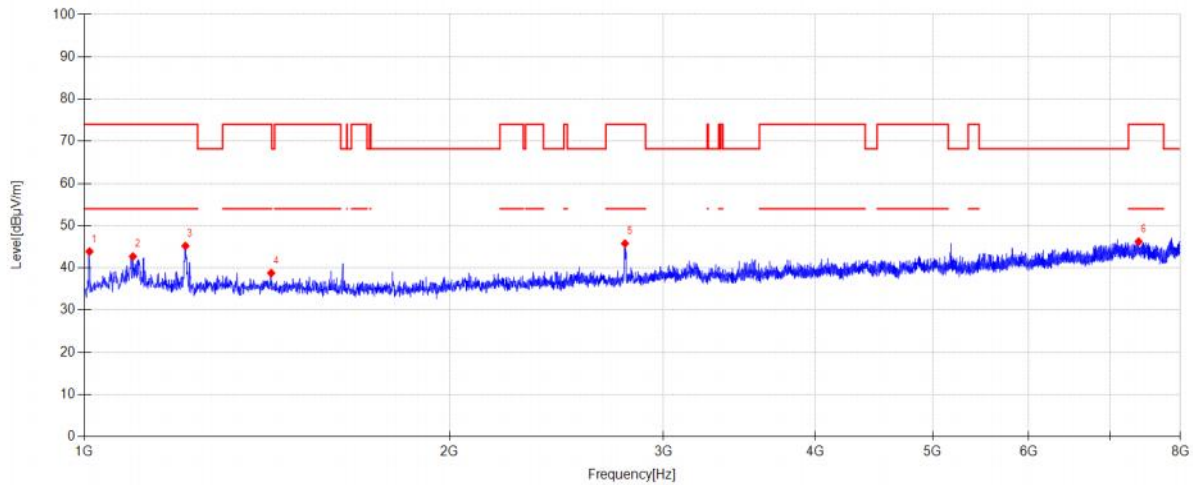


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1009.800	52.60	25.62	2.09	-36.42	43.89	74.00	30.11	PK	Vertical
2	1096.600	51.48	25.61	2.19	-36.57	42.71	74.00	31.29	PK	Vertical
3	1211.400	54.15	25.52	2.32	-36.78	45.21	74.00	28.79	PK	Vertical
4	1425.600	47.38	26.00	2.57	-37.17	38.78	74.00	35.22	PK	Vertical
5	2789.200	51.98	28.91	3.96	-39.07	45.78	74.00	28.22	PK	Vertical
6	7391.000	43.27	36.75	6.08	-39.86	46.24	74.00	27.76	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6895
Polarity:	Horizontal	Test Voltage:	DC 20V

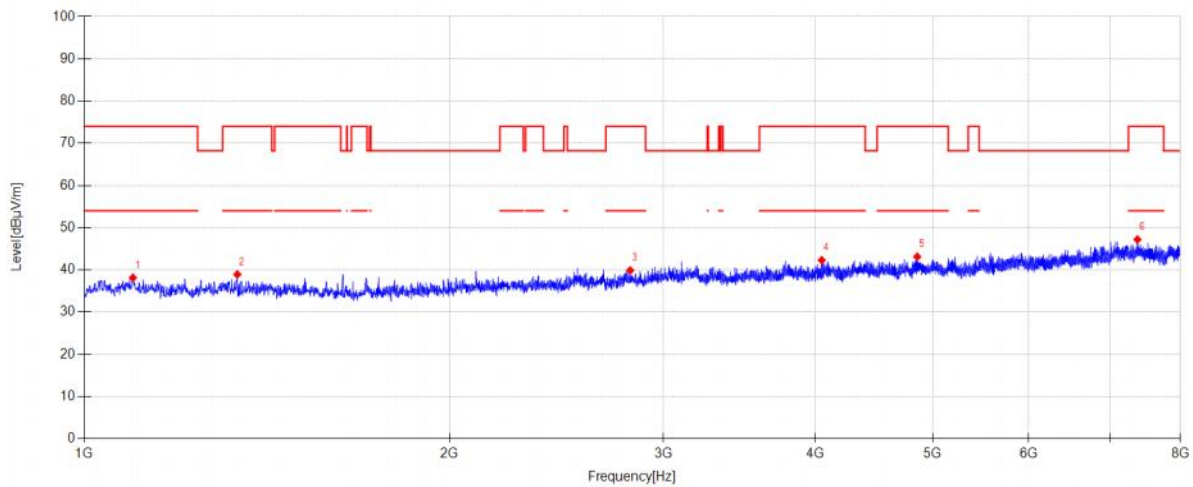


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1096.600	46.92	25.61	2.19	-36.57	38.15	74.00	35.85	PK	Horizontal
2	1336.700	47.97	25.51	2.47	-37.01	38.94	74.00	35.06	PK	Horizontal
3	2817.200	46.05	28.96	3.99	-39.10	39.90	74.00	34.10	PK	Horizontal
4	4051.300	46.32	31.20	4.49	-39.71	42.30	74.00	31.70	PK	Horizontal
5	4856.300	45.10	32.93	4.89	-39.79	43.13	74.00	30.87	PK	Horizontal
6	7374.900	44.15	36.85	6.07	-39.86	47.21	74.00	26.79	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6895
Polarity:	Vertical	Test Voltage:	DC 20V

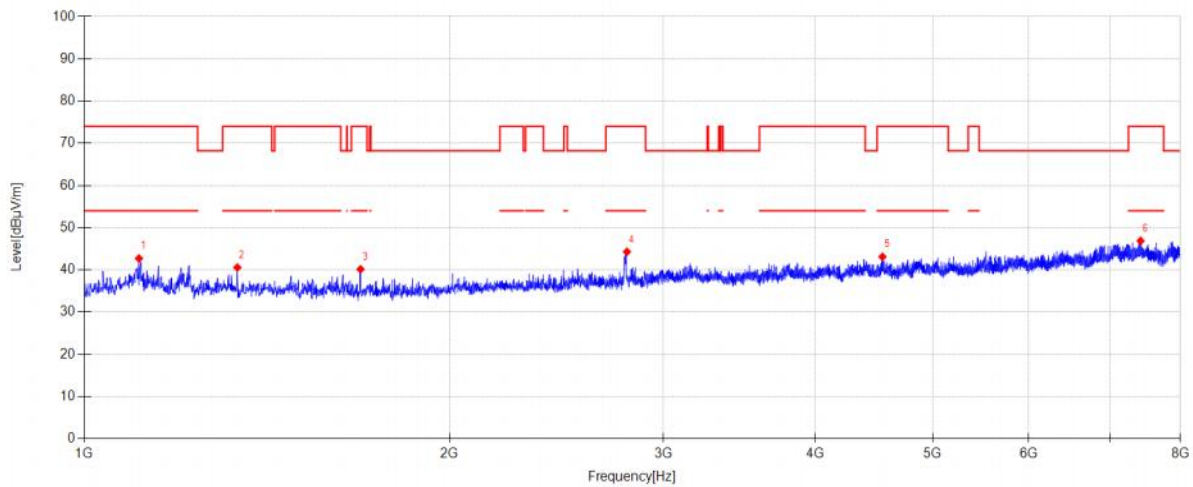


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1109.200	51.47	25.64	2.21	-36.60	42.72	74.00	31.28	PK	Vertical
2	1336.700	49.61	25.51	2.47	-37.01	40.58	74.00	33.42	PK	Vertical
3	1688.800	49.63	25.31	2.87	-37.64	40.17	74.00	33.83	PK	Vertical
4	2799.700	50.31	29.09	3.97	-39.08	44.29	74.00	29.71	PK	Vertical
5	4546.200	46.09	32.04	4.73	-39.75	43.11	74.00	30.89	PK	Vertical
6	7419.000	44.00	36.66	6.09	-39.86	46.89	74.00	27.11	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6995
Polarity:	Horizontal	Test Voltage:	DC 20V

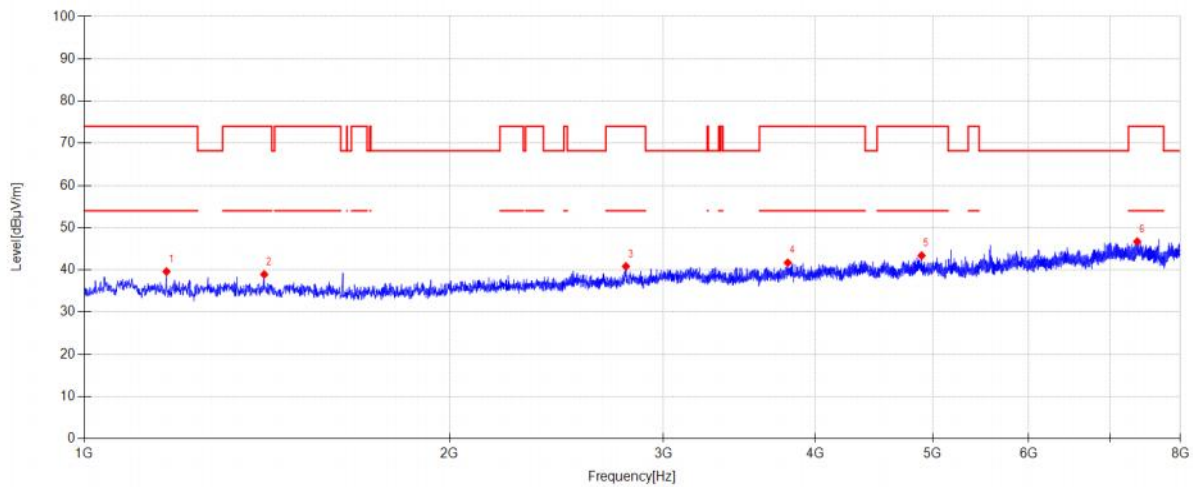


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1168.700	48.36	25.69	2.27	-36.70	39.62	74.00	34.38	PK	Horizontal
2	1406.700	47.36	26.15	2.55	-37.13	38.93	74.00	35.07	PK	Horizontal
3	2794.100	46.95	28.99	3.97	-39.07	40.84	74.00	33.16	PK	Horizontal
4	3798.600	46.05	30.87	4.40	-39.62	41.70	74.00	32.30	PK	Horizontal
5	4896.900	45.18	33.09	4.91	-39.79	43.39	74.00	30.61	PK	Horizontal
6	7371.400	43.64	36.87	6.07	-39.86	46.72	74.00	27.28	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6995
Polarity:	Vertical	Test Voltage:	DC 20V

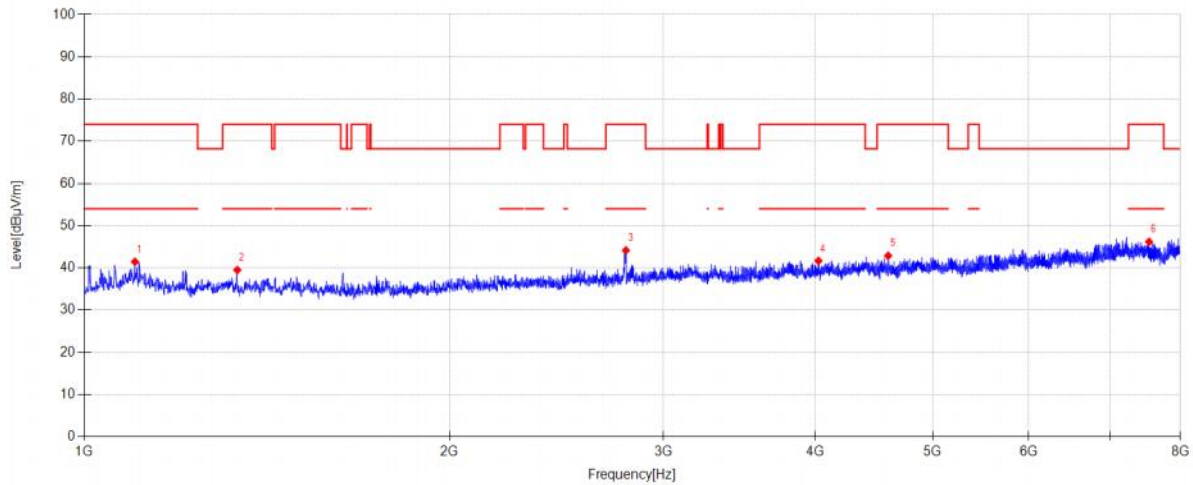


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1100.800	50.24	25.60	2.20	-36.58	41.46	74.00	32.54	PK	Vertical
2	1336.700	48.53	25.51	2.47	-37.01	39.50	74.00	34.50	PK	Vertical
3	2794.100	50.26	28.99	3.97	-39.07	44.15	74.00	29.85	PK	Vertical
4	4026.100	45.84	31.06	4.47	-39.70	41.67	74.00	32.33	PK	Vertical
5	4595.200	46.42	31.47	4.76	-39.76	42.89	74.00	31.11	PK	Vertical
6	7539.400	43.56	36.35	6.12	-39.85	46.18	74.00	27.82	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

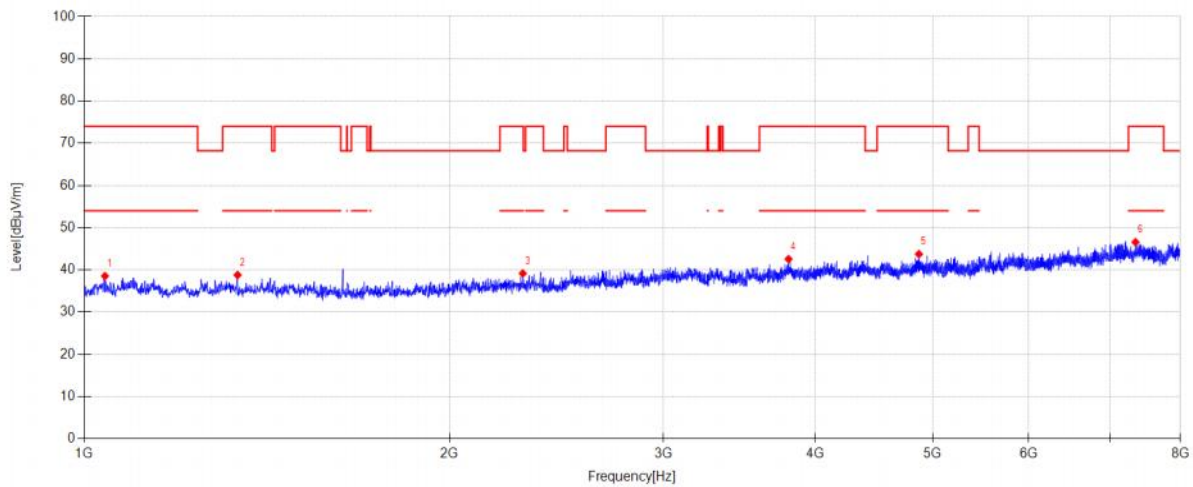


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1039.900	47.21	25.68	2.13	-36.47	38.55	74.00	35.45	PK	Horizontal
2	1337.400	47.83	25.50	2.47	-37.01	38.79	74.00	35.21	PK	Horizontal
3	2297.800	46.68	27.50	3.51	-38.53	39.16	74.00	34.84	PK	Horizontal
4	3804.200	46.95	30.85	4.40	-39.62	42.58	74.00	31.42	PK	Horizontal
5	4871.700	45.64	32.99	4.90	-39.79	43.74	74.00	30.26	PK	Horizontal
6	7348.300	43.39	37.00	6.06	-39.87	46.58	74.00	27.42	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

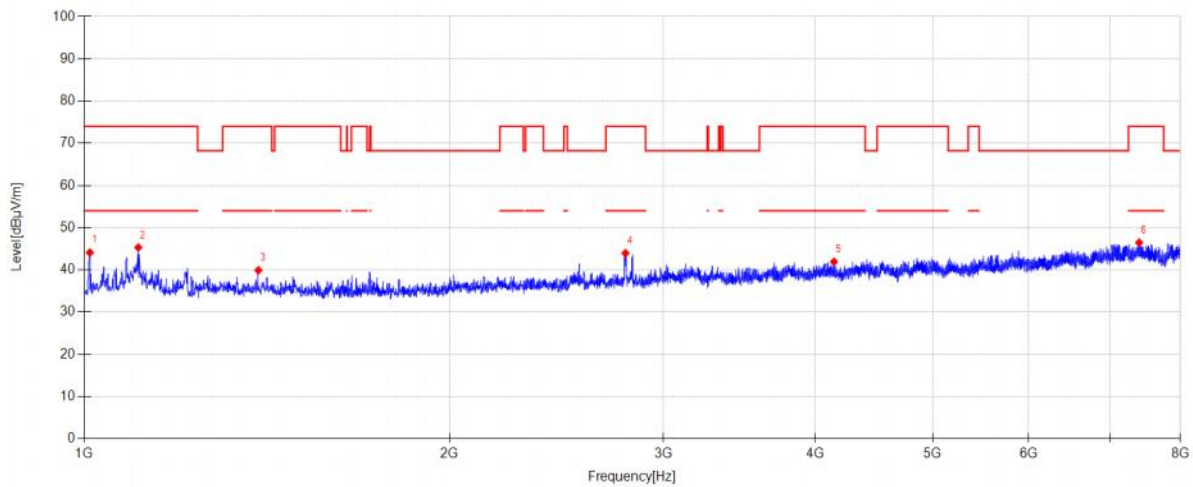


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1010.500	52.82	25.62	2.09	-36.42	44.11	74.00	29.89	PK	Vertical
2	1107.800	54.07	25.63	2.20	-36.59	45.31	74.00	28.69	PK	Vertical
3	1391.300	48.44	26.04	2.53	-37.10	39.91	74.00	34.09	PK	Vertical
4	2792.000	50.10	28.96	3.97	-39.07	43.96	74.00	30.04	PK	Vertical
5	4146.500	45.63	31.47	4.53	-39.71	41.92	74.00	32.08	PK	Vertical
6	7398.700	43.54	36.71	6.08	-39.86	46.47	74.00	27.53	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

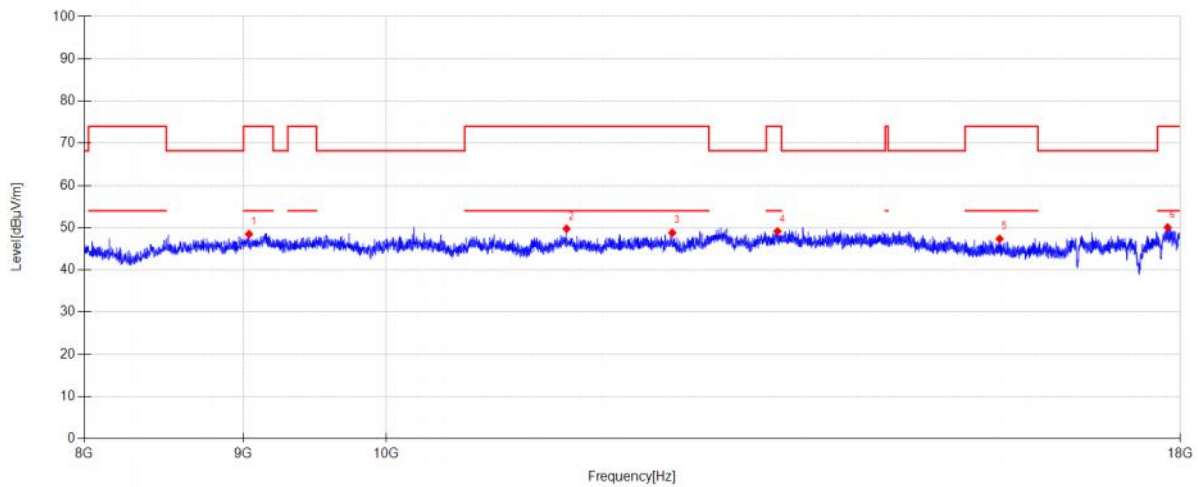


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9037.000	41.28	38.80	7.04	-38.64	48.48	74.00	25.52	PK	Horizontal
2	11430.000	42.44	39.50	7.42	-39.60	49.76	74.00	24.24	PK	Horizontal
3	12360.000	41.19	39.22	7.69	-39.31	48.79	74.00	25.21	PK	Horizontal
4	13361.000	40.11	39.94	7.95	-38.84	49.16	74.00	24.84	PK	Horizontal
5	15747.000	39.70	38.36	8.62	-39.32	47.36	74.00	26.64	PK	Horizontal
6	17832.000	38.68	41.49	9.12	-39.22	50.07	74.00	23.93	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

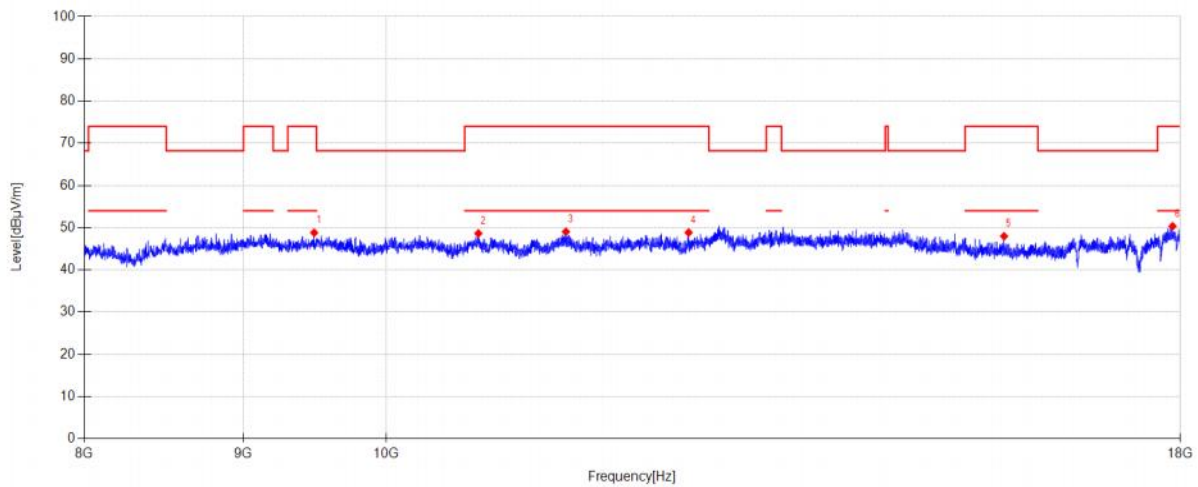


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9483.000	42.17	38.66	7.12	-39.13	48.82	74.00	25.18	PK	Vertical
2	10708.000	41.60	39.46	7.21	-39.63	48.64	74.00	25.36	PK	Vertical
3	11425.000	41.67	39.55	7.42	-39.60	49.04	74.00	24.96	PK	Vertical
4	12510.000	40.72	39.64	7.68	-39.19	48.85	74.00	25.15	PK	Vertical
5	15799.000	40.48	38.20	8.68	-39.38	47.98	74.00	26.02	PK	Vertical
6	17897.000	38.43	42.07	9.10	-39.25	50.35	74.00	23.65	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6995
Polarity:	Horizontal	Test Voltage:	DC 20V

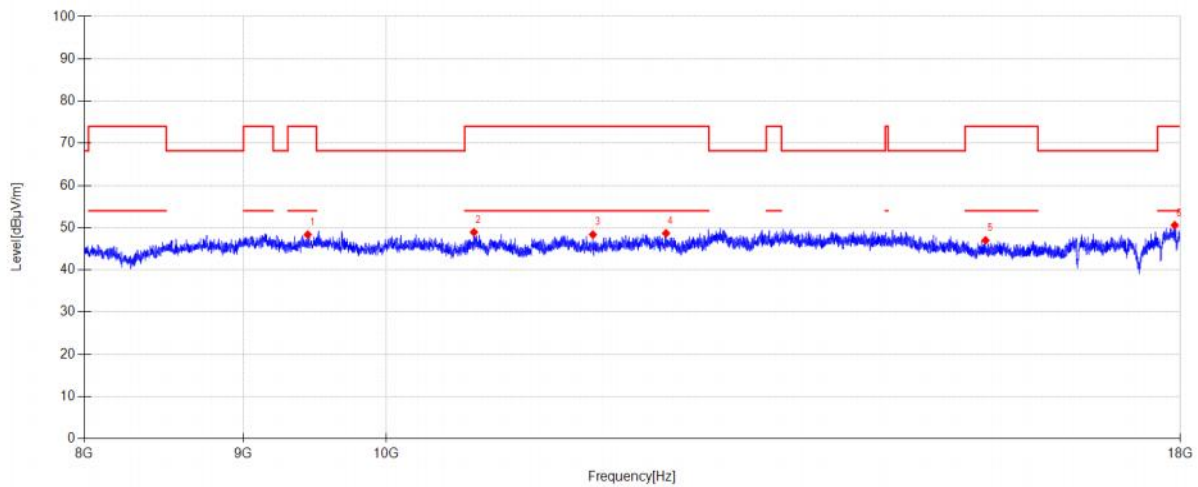


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9438.000	42.01	38.32	7.11	-39.08	48.36	74.00	25.64	PK	Horizontal
2	10673.000	41.93	39.42	7.21	-39.63	48.93	74.00	25.07	PK	Horizontal
3	11655.000	41.88	38.55	7.54	-39.60	48.37	74.00	25.63	PK	Horizontal
4	12303.000	40.95	39.39	7.70	-39.36	48.68	74.00	25.32	PK	Horizontal
5	15584.000	38.78	38.92	8.44	-39.14	47.00	74.00	27.00	PK	Horizontal
6	17926.000	38.59	42.18	9.09	-39.26	50.60	74.00	23.40	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6995
Polarity:	Vertical	Test Voltage:	DC 20V

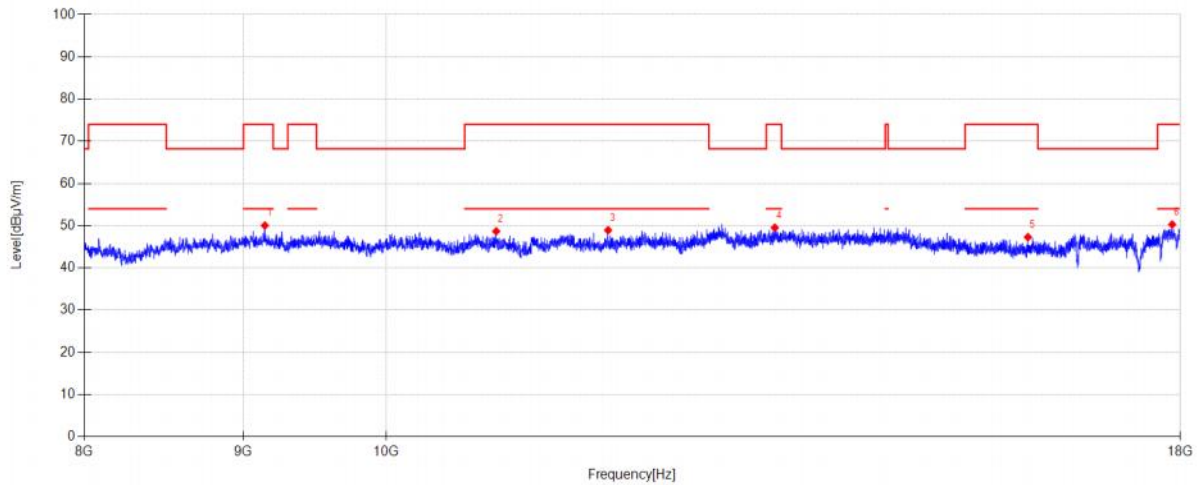


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9143.000	42.89	38.86	7.06	-38.76	50.05	74.00	23.95	PK	Vertical
2	10850.000	41.80	39.30	7.20	-39.62	48.68	74.00	25.32	PK	Vertical
3	11787.000	42.32	38.59	7.61	-39.60	48.92	74.00	25.08	PK	Vertical
4	13334.000	40.58	39.84	7.93	-38.83	49.52	74.00	24.48	PK	Vertical
5	16081.000	39.81	38.08	8.94	-39.54	47.29	74.00	26.71	PK	Vertical
6	17892.000	38.41	42.03	9.10	-39.25	50.29	74.00	23.71	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6895
Polarity:	Horizontal	Test Voltage:	DC 20V

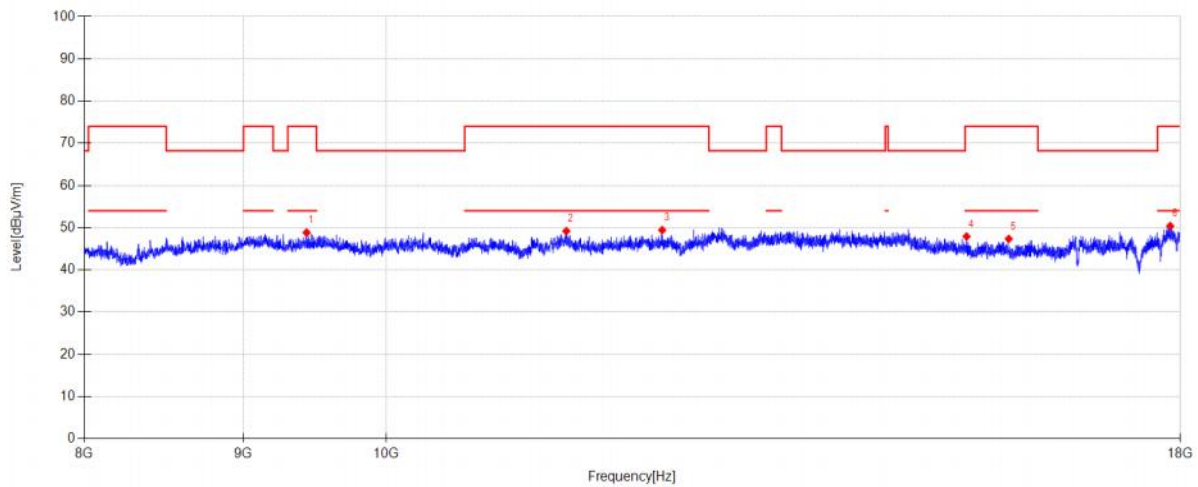


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9430.000	42.41	38.40	7.11	-39.07	48.85	74.00	25.15	PK	Horizontal
2	11428.000	41.85	39.52	7.42	-39.60	49.19	74.00	24.81	PK	Horizontal
3	12268.000	41.78	39.34	7.70	-39.39	49.43	74.00	24.57	PK	Horizontal
4	15367.000	40.06	38.57	8.19	-38.90	47.92	74.00	26.08	PK	Horizontal
5	15854.000	40.07	37.98	8.74	-39.44	47.35	74.00	26.65	PK	Horizontal
6	17866.000	38.73	41.79	9.11	-39.23	50.40	74.00	23.60	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6895
Polarity:	Vertical	Test Voltage:	DC 20V

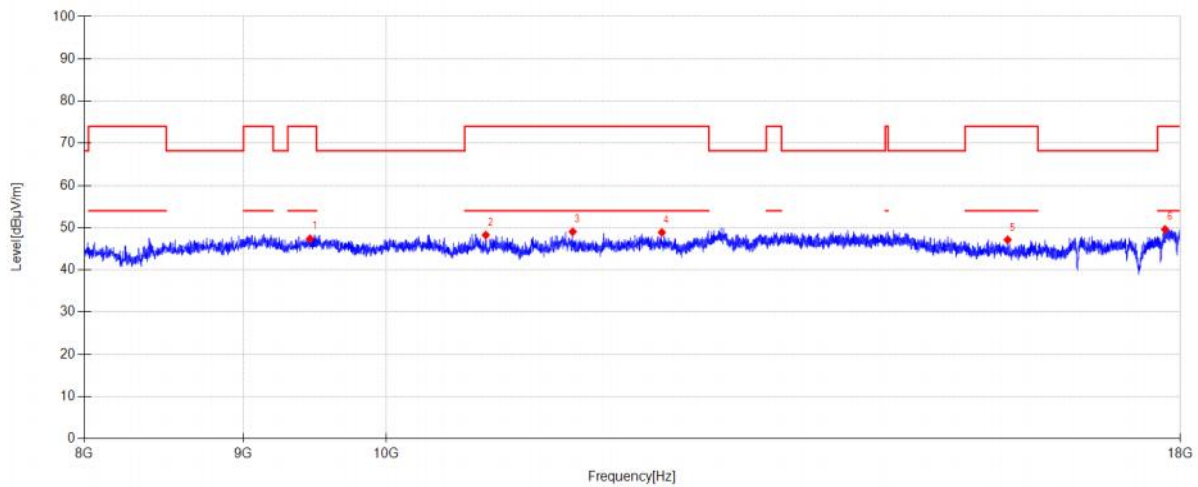


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9454.000	41.11	38.26	7.12	-39.10	47.39	74.00	26.61	PK	Vertical
2	10767.000	41.52	39.17	7.20	-39.62	48.27	74.00	25.73	PK	Vertical
3	11482.000	42.22	38.98	7.45	-39.60	49.05	74.00	24.95	PK	Vertical
4	12265.000	41.24	39.33	7.70	-39.39	48.88	74.00	25.12	PK	Vertical
5	15841.000	39.79	38.04	8.73	-39.43	47.13	74.00	26.87	PK	Vertical
6	17798.000	38.51	41.18	9.12	-39.20	49.61	74.00	24.39	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6875
Polarity:	Horizontal	Test Voltage:	DC 20V

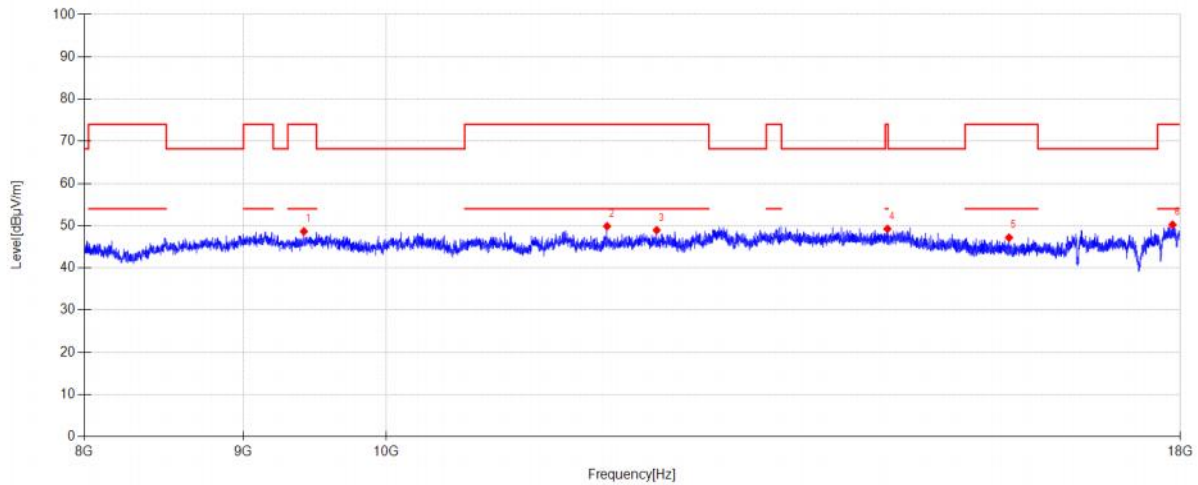


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9411.000	42.00	38.59	7.11	-39.05	48.65	74.00	25.35	PK	Horizontal
2	11778.000	43.29	38.58	7.60	-39.60	49.87	74.00	24.13	PK	Horizontal
3	12218.000	41.43	39.24	7.70	-39.43	48.94	74.00	25.06	PK	Horizontal
4	14493.000	39.32	40.49	8.14	-38.70	49.25	74.00	24.75	PK	Horizontal
5	15857.000	39.90	37.97	8.75	-39.44	47.18	74.00	26.82	PK	Horizontal
6	17897.000	38.33	42.07	9.10	-39.25	50.25	74.00	23.75	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6875
Polarity:	Vertical	Test Voltage:	DC 20V

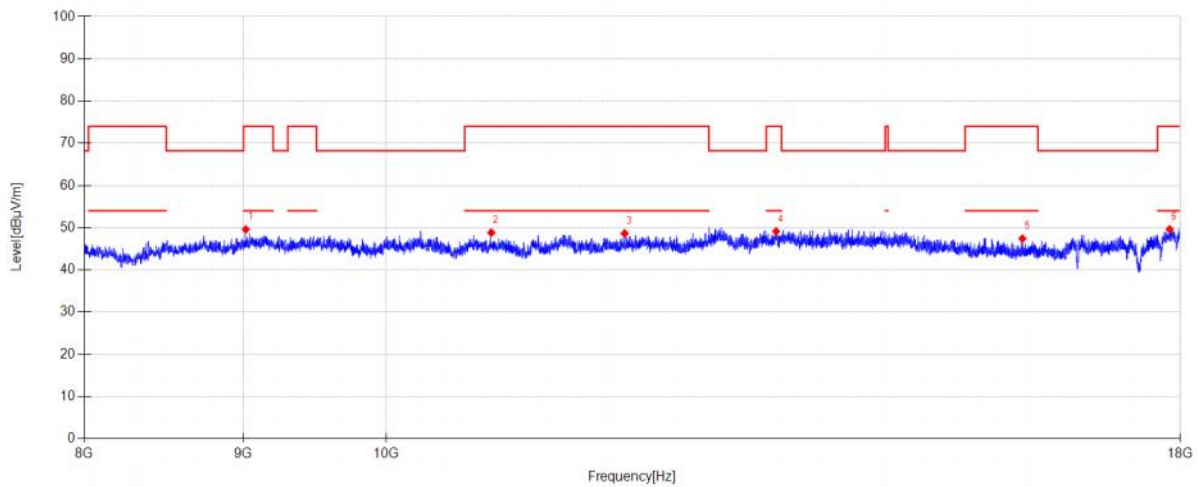


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9015.000	42.57	38.62	7.03	-38.62	49.60	74.00	24.40	PK	Vertical
2	10811.000	42.19	39.07	7.20	-39.62	48.84	74.00	25.16	PK	Vertical
3	11932.000	41.89	38.66	7.68	-39.60	48.63	74.00	25.37	PK	Vertical
4	13347.000	40.11	39.89	7.94	-38.83	49.11	74.00	24.89	PK	Vertical
5	16015.000	40.06	38.02	8.92	-39.59	47.41	74.00	26.59	PK	Vertical
6	17859.000	38.01	41.73	9.11	-39.23	49.62	74.00	24.38	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6855
Polarity:	Horizontal	Test Voltage:	DC 20V

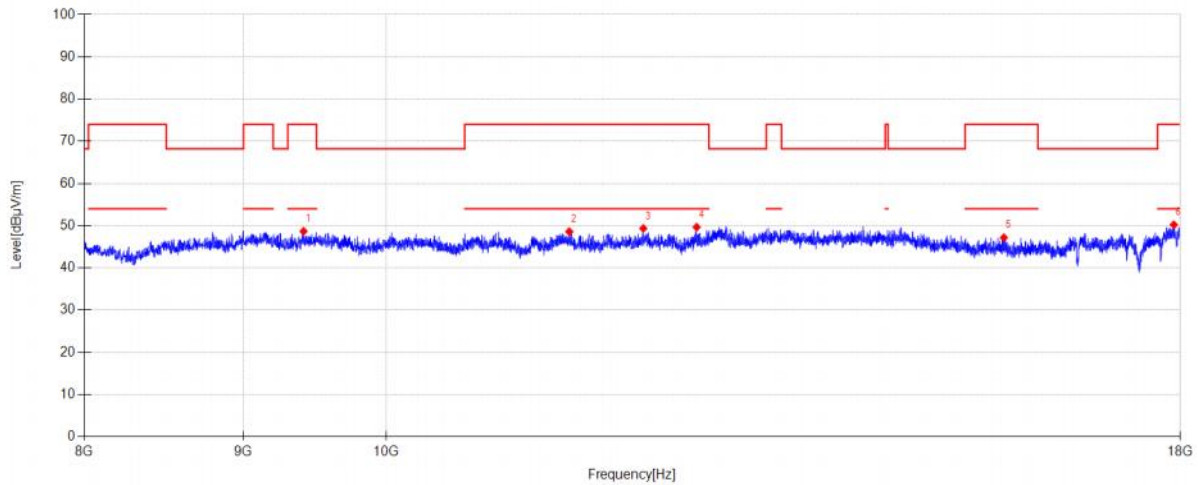


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9409.000	42.01	38.61	7.11	-39.05	48.68	74.00	25.32	PK	Horizontal
2	11453.000	41.49	39.27	7.44	-39.60	48.60	74.00	25.40	PK	Horizontal
3	12098.000	41.68	39.49	7.71	-39.52	49.36	74.00	24.64	PK	Horizontal
4	12585.000	41.92	39.19	7.68	-39.13	49.66	74.00	24.34	PK	Horizontal
5	15797.000	39.66	38.21	8.68	-39.38	47.17	74.00	26.83	PK	Horizontal
6	17914.000	38.26	42.14	9.09	-39.26	50.23	74.00	23.77	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6855
Polarity:	Vertical	Test Voltage:	DC 20V

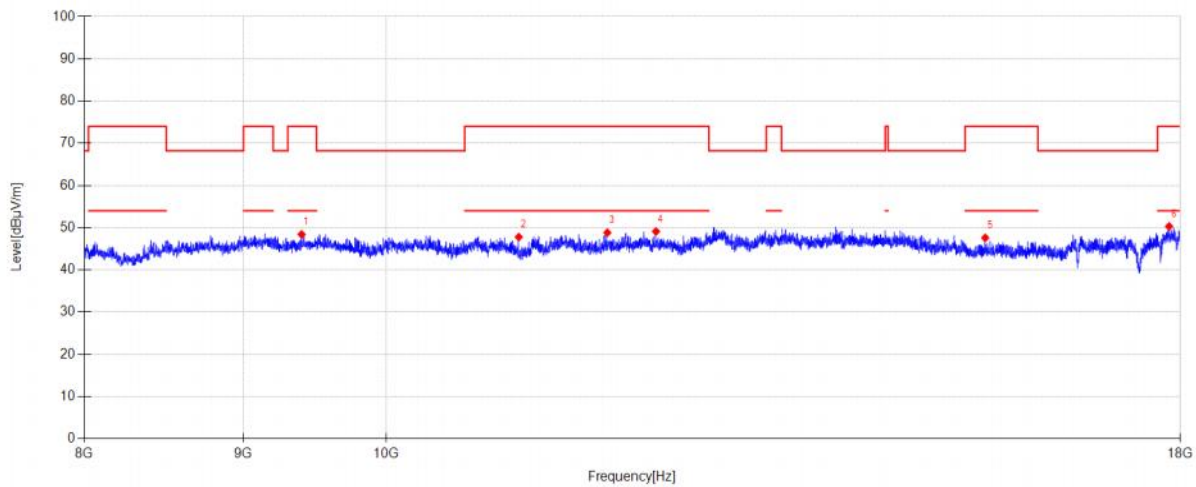


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9395.000	41.64	38.71	7.11	-39.03	48.43	74.00	25.57	PK	Vertical
2	11033.000	40.74	39.44	7.22	-39.60	47.80	74.00	26.20	PK	Vertical
3	11780.000	42.24	38.58	7.61	-39.60	48.83	74.00	25.17	PK	Vertical
4	12212.000	41.61	39.22	7.71	-39.43	49.11	74.00	24.89	PK	Vertical
5	15580.000	39.41	38.90	8.43	-39.14	47.60	74.00	26.40	PK	Vertical
6	17851.000	38.78	41.66	9.11	-39.23	50.32	74.00	23.68	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6695
Polarity:	Horizontal	Test Voltage:	DC 20V

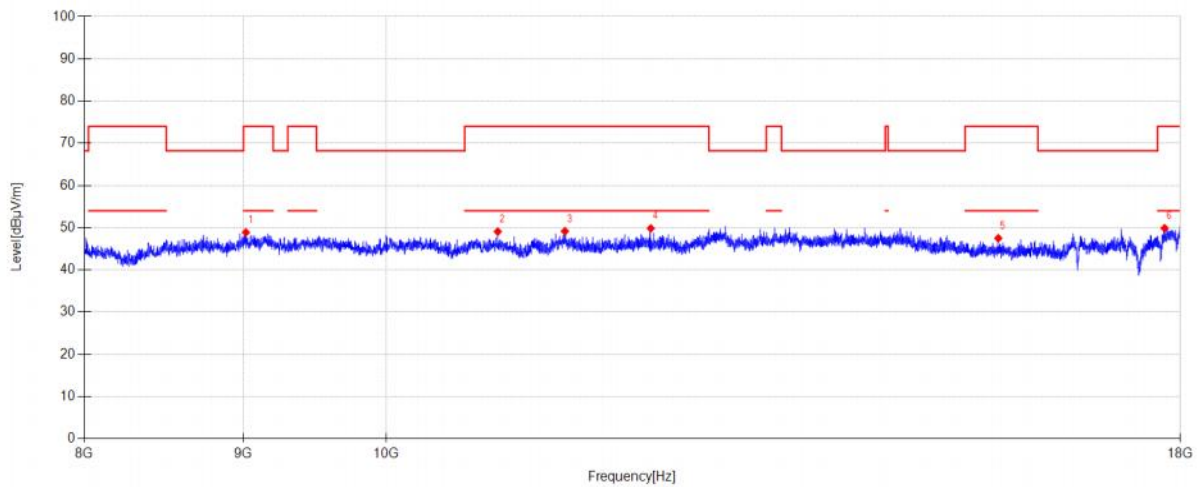


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9016.000	41.84	38.63	7.03	-38.62	48.88	74.00	25.12	PK	Horizontal
2	10863.000	42.11	39.38	7.20	-39.61	49.08	74.00	24.92	PK	Horizontal
3	11416.000	41.70	39.64	7.42	-39.60	49.16	74.00	24.84	PK	Horizontal
4	12165.000	42.30	39.31	7.71	-39.47	49.85	74.00	24.15	PK	Horizontal
5	15732.000	39.81	38.40	8.60	-39.31	47.50	74.00	26.50	PK	Horizontal
6	17792.000	38.82	41.13	9.13	-39.20	49.88	74.00	24.12	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6695
Polarity:	Vertical	Test Voltage:	DC 20V

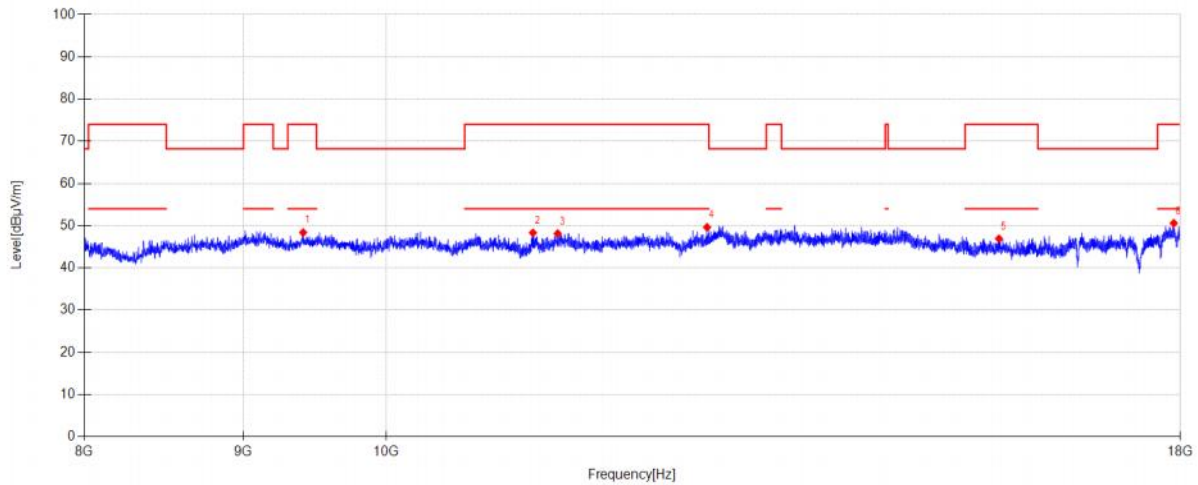


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9406.000	41.70	38.64	7.11	-39.05	48.40	74.00	25.60	PK	Vertical
2	11149.000	41.79	38.85	7.28	-39.60	48.32	74.00	25.68	PK	Vertical
3	11355.000	41.12	39.26	7.38	-39.60	48.16	74.00	25.84	PK	Vertical
4	12682.000	41.75	39.26	7.67	-39.05	49.63	74.00	24.37	PK	Vertical
5	15740.000	39.23	38.38	8.61	-39.31	46.91	74.00	27.09	PK	Vertical
6	17913.000	38.63	42.14	9.09	-39.26	50.60	74.00	23.40	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6535
Polarity:	Horizontal	Test Voltage:	DC 20V

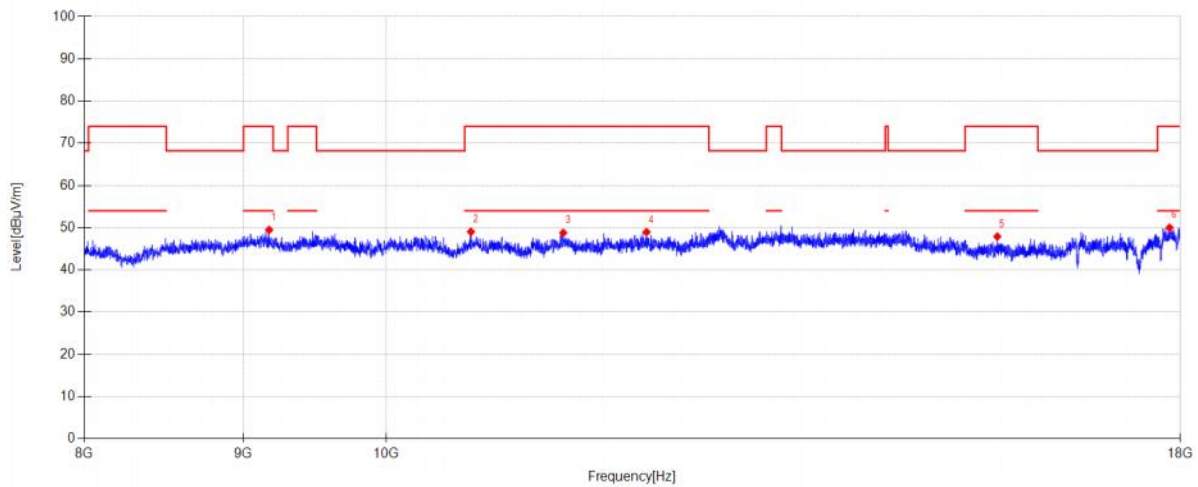


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9172.000	42.49	38.74	7.06	-38.79	49.50	74.00	24.50	PK	Horizontal
2	10649.000	42.12	39.35	7.21	-39.64	49.04	74.00	24.96	PK	Horizontal
3	11402.000	41.19	39.78	7.41	-39.60	48.78	74.00	25.22	PK	Horizontal
4	12127.000	41.34	39.42	7.71	-39.50	48.97	74.00	25.03	PK	Horizontal
5	15720.000	40.16	38.44	8.59	-39.29	47.90	74.00	26.10	PK	Horizontal
6	17857.000	38.41	41.71	9.11	-39.23	50.00	74.00	24.00	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6535
Polarity:	Vertical	Test Voltage:	DC 20V

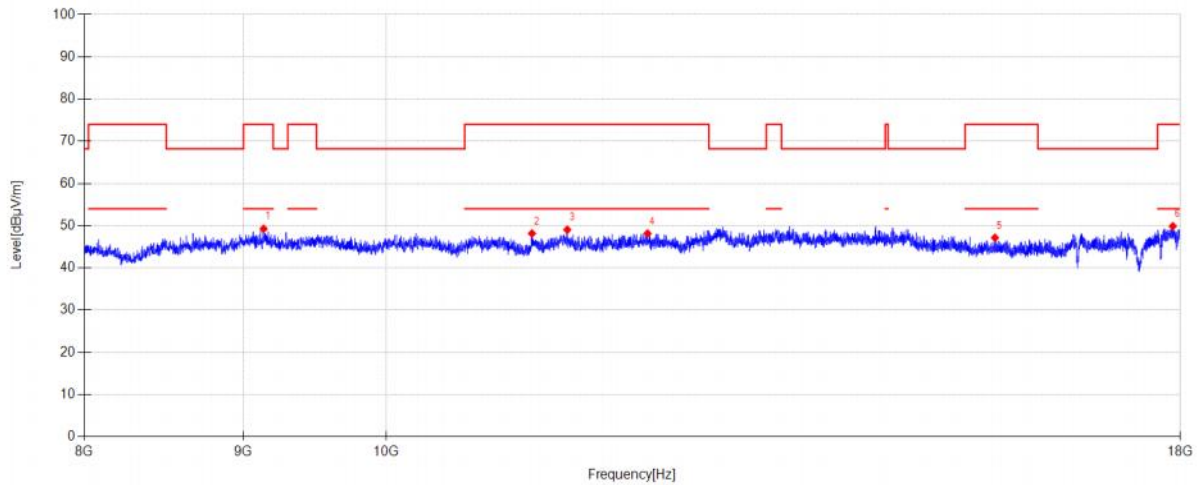


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9135.000	42.25	38.70	7.06	-38.75	49.26	74.00	24.74	PK	Vertical
2	11141.000	41.63	38.86	7.27	-39.60	48.16	74.00	25.84	PK	Vertical
3	11436.000	41.77	39.44	7.43	-39.60	49.04	74.00	24.96	PK	Vertical
4	12136.000	40.54	39.39	7.71	-39.49	48.15	74.00	25.85	PK	Vertical
5	15693.000	39.31	38.54	8.56	-39.26	47.15	74.00	26.85	PK	Vertical
6	17900.000	37.93	42.10	9.10	-39.25	49.88	74.00	24.12	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6515
Polarity:	Horizontal	Test Voltage:	DC 20V

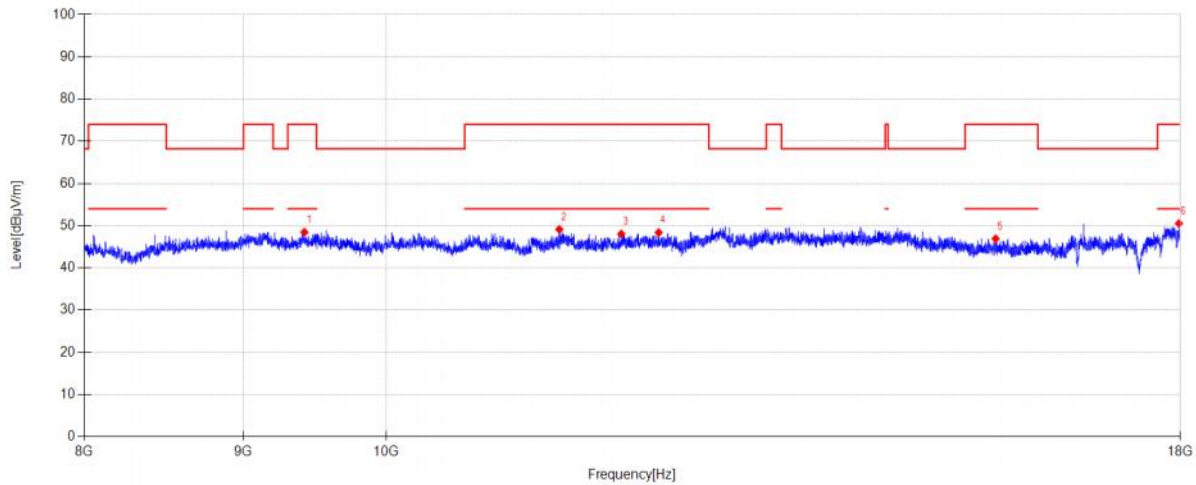


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9415.000	41.87	38.55	7.11	-39.06	48.47	74.00	25.53	PK	Horizontal
2	11369.000	41.92	39.43	7.39	-39.60	49.14	74.00	24.86	PK	Horizontal
3	11902.000	41.48	38.51	7.67	-39.60	48.06	74.00	25.94	PK	Horizontal
4	12236.000	40.82	39.27	7.70	-39.41	48.38	74.00	25.62	PK	Horizontal
5	15701.000	39.11	38.50	8.57	-39.27	46.91	74.00	27.09	PK	Horizontal
6	17981.000	38.39	42.34	9.08	-39.29	50.52	74.00	23.48	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6515
Polarity:	Vertical	Test Voltage:	DC 20V

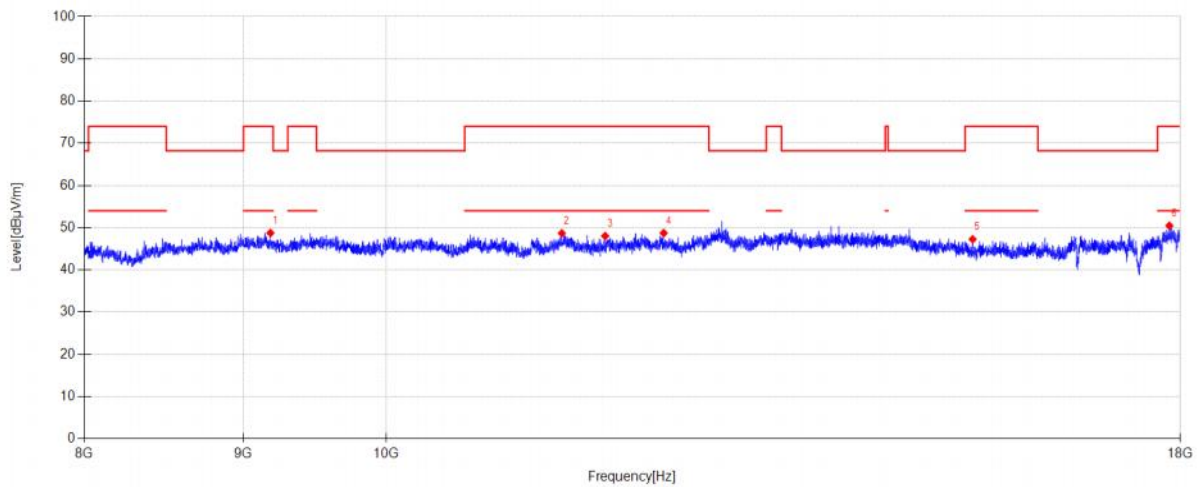


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9181.000	41.86	38.63	7.06	-38.80	48.75	74.00	25.25	PK	Vertical
2	11390.000	41.21	39.68	7.40	-39.60	48.69	74.00	25.31	PK	Vertical
3	11761.000	41.48	38.56	7.60	-39.60	48.04	74.00	25.96	PK	Vertical
4	12282.000	41.04	39.36	7.70	-39.37	48.73	74.00	25.27	PK	Vertical
5	15436.000	39.47	38.50	8.27	-38.98	47.26	74.00	26.74	PK	Vertical
6	17855.000	38.90	41.70	9.11	-39.23	50.48	74.00	23.52	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6475
Polarity:	Horizontal	Test Voltage:	DC 20V

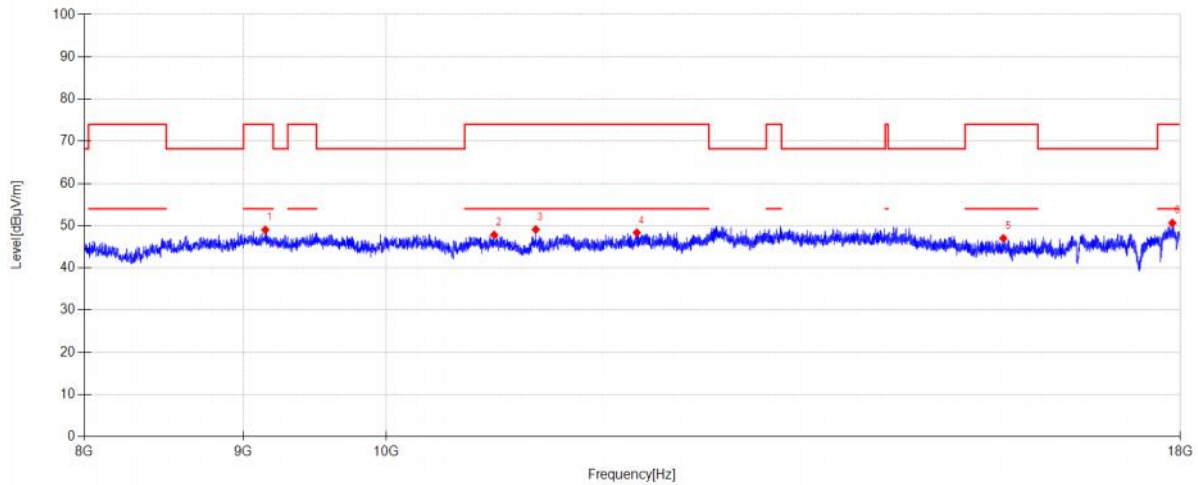


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9146.000	41.80	38.92	7.06	-38.76	49.02	74.00	24.98	PK	Horizontal
2	10834.000	41.06	39.20	7.20	-39.62	47.84	74.00	26.16	PK	Horizontal
3	11172.000	42.57	38.83	7.29	-39.60	49.09	74.00	24.91	PK	Horizontal
4	12040.000	41.01	39.20	7.72	-39.57	48.36	74.00	25.64	PK	Horizontal
5	15791.000	39.47	38.23	8.67	-39.37	47.00	74.00	27.00	PK	Horizontal
6	17894.000	38.75	42.05	9.10	-39.25	50.65	74.00	23.35	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6475
Polarity:	Vertical	Test Voltage:	DC 20V

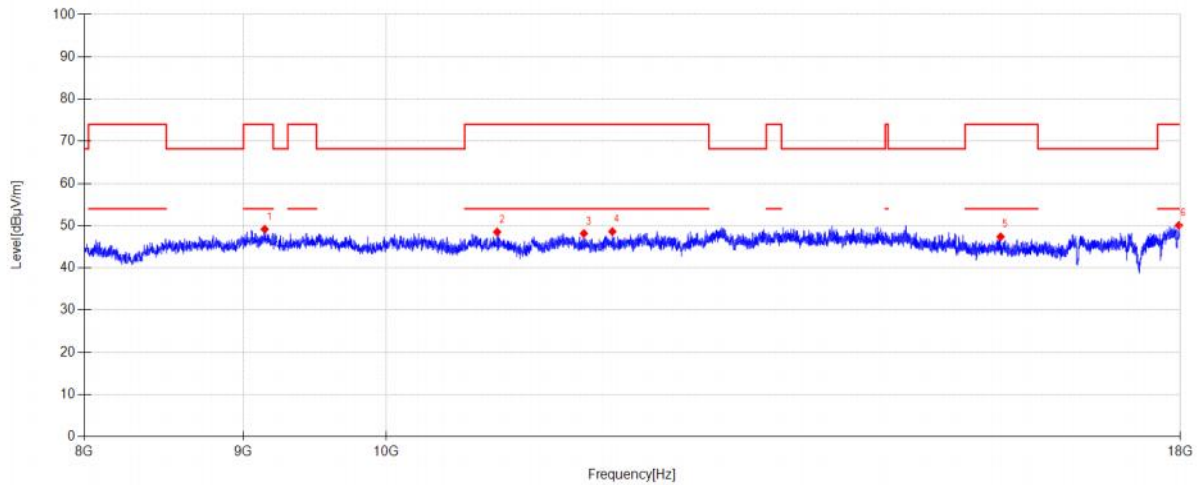


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9142.000	42.02	38.84	7.06	-38.76	49.16	74.00	24.84	PK	Vertical
2	10858.000	41.58	39.35	7.20	-39.61	48.52	74.00	25.48	PK	Vertical
3	11577.000	41.60	38.65	7.50	-39.60	48.15	74.00	25.85	PK	Vertical
4	11824.000	42.01	38.58	7.63	-39.60	48.62	74.00	25.38	PK	Vertical
5	15759.000	39.76	38.32	8.64	-39.33	47.39	74.00	26.61	PK	Vertical
6	17981.000	37.96	42.34	9.08	-39.29	50.09	74.00	23.91	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6435
Polarity:	Horizontal	Test Voltage:	DC 20V

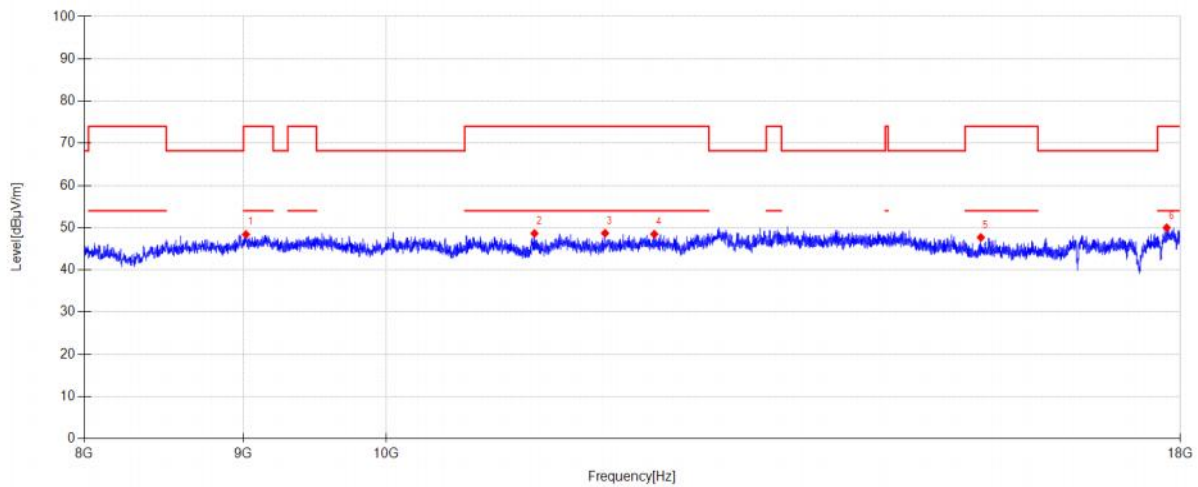


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9016.000	41.36	38.63	7.03	-38.62	48.40	74.00	25.60	PK	Horizontal
2	11162.000	42.13	38.84	7.28	-39.60	48.65	74.00	25.35	PK	Horizontal
3	11760.000	42.14	38.56	7.60	-39.60	48.70	74.00	25.30	PK	Horizontal
4	12197.000	40.99	39.21	7.71	-39.44	48.47	74.00	25.53	PK	Horizontal
5	15530.000	39.76	38.65	8.37	-39.08	47.70	74.00	26.30	PK	Horizontal
6	17819.000	38.71	41.37	9.12	-39.21	49.99	74.00	24.01	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6435
Polarity:	Vertical	Test Voltage:	DC 20V

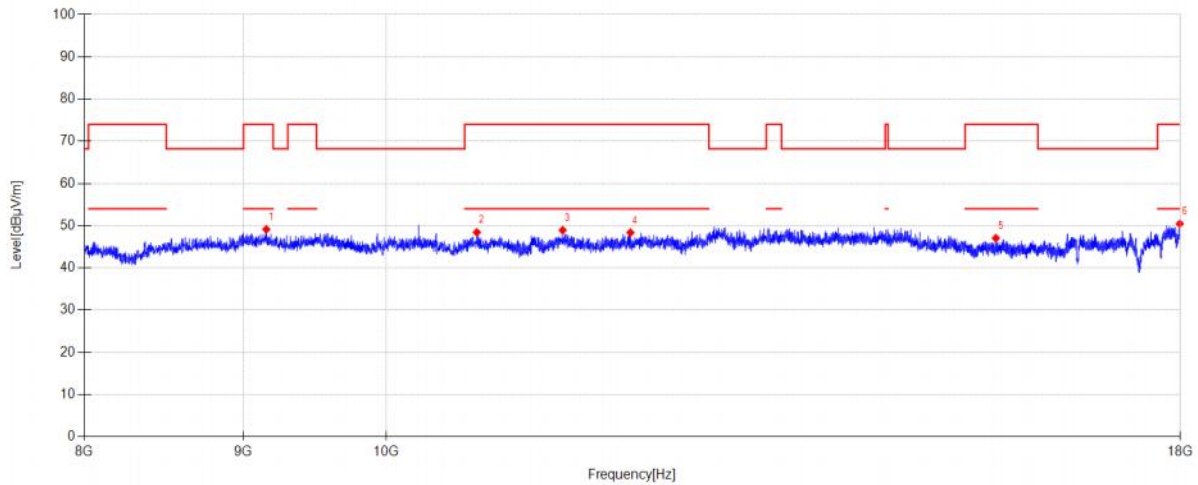


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9153.000	41.88	38.96	7.06	-38.77	49.13	74.00	24.87	PK	Vertical
2	10696.000	41.37	39.49	7.21	-39.63	48.44	74.00	25.56	PK	Vertical
3	11397.000	41.36	39.76	7.41	-39.60	48.93	74.00	25.07	PK	Vertical
4	11983.000	41.33	38.92	7.71	-39.60	48.36	74.00	25.64	PK	Vertical
5	15704.000	39.25	38.49	8.57	-39.27	47.04	74.00	26.96	PK	Vertical
6	17993.000	38.32	42.38	9.07	-39.30	50.47	74.00	23.53	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6415
Polarity:	Horizontal	Test Voltage:	DC 20V

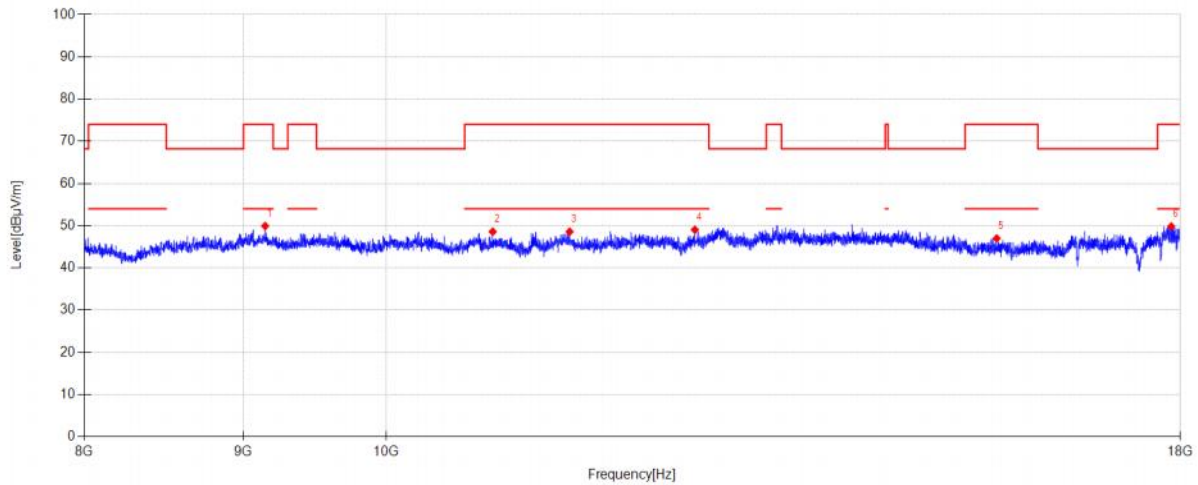


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9145.000	42.73	38.90	7.06	-38.76	49.93	74.00	24.07	PK	Horizontal
2	10822.000	41.88	39.13	7.20	-39.62	48.59	74.00	25.41	PK	Horizontal
3	11456.000	41.52	39.24	7.44	-39.60	48.60	74.00	25.40	PK	Horizontal
4	12568.000	41.23	39.29	7.68	-39.15	49.05	74.00	24.95	PK	Horizontal
5	15713.000	39.23	38.46	8.58	-39.28	46.99	74.00	27.01	PK	Horizontal
6	17880.000	38.06	41.92	9.10	-39.24	49.84	74.00	24.16	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6415
Polarity:	Vertical	Test Voltage:	DC 20V

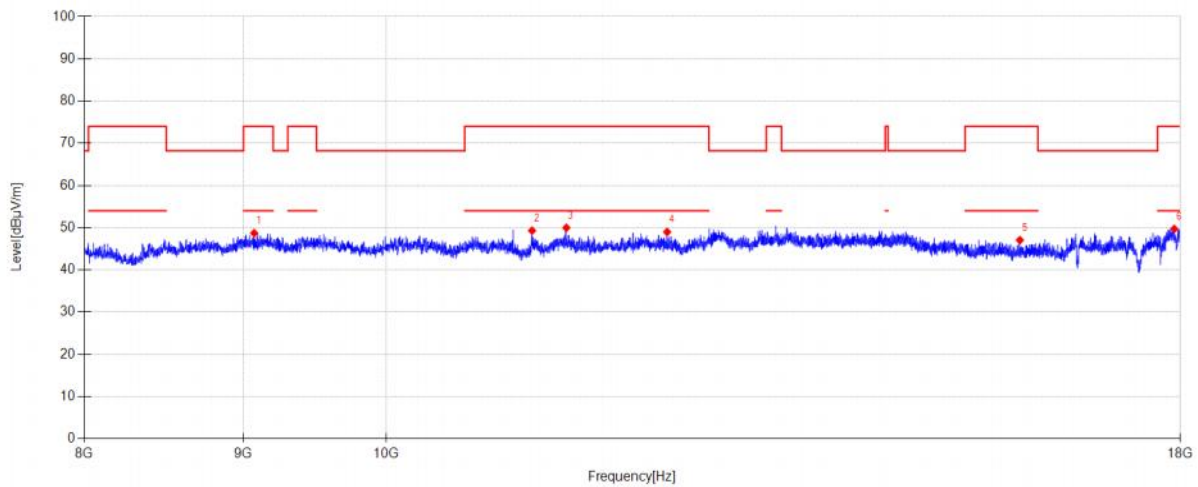


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9071.000	41.83	38.52	7.04	-38.68	48.71	74.00	25.29	PK	Vertical
2	11142.000	42.78	38.86	7.27	-39.60	49.31	74.00	24.69	PK	Vertical
3	11428.000	42.64	39.52	7.42	-39.60	49.98	74.00	24.02	PK	Vertical
4	12313.000	41.28	39.36	7.70	-39.35	48.99	74.00	25.01	PK	Vertical
5	15985.000	39.78	37.97	8.89	-39.58	47.06	74.00	26.94	PK	Vertical
6	17919.000	37.73	42.16	9.09	-39.26	49.72	74.00	24.28	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6175
Polarity:	Horizontal	Test Voltage:	DC 20V

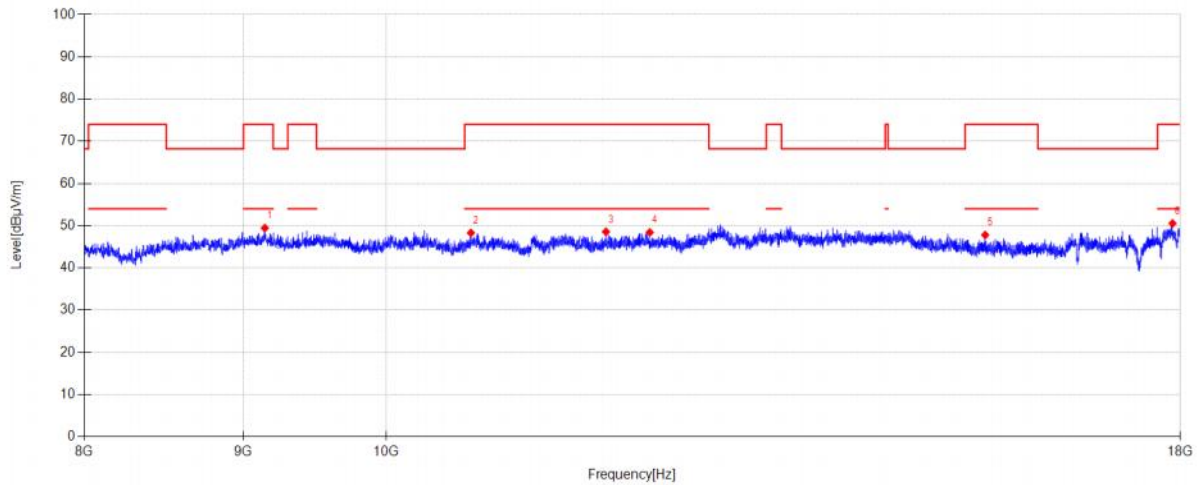


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9143.000	42.30	38.86	7.06	-38.76	49.46	74.00	24.54	PK	Horizontal
2	10649.000	41.38	39.35	7.21	-39.64	48.30	74.00	25.70	PK	Horizontal
3	11768.000	42.00	38.57	7.60	-39.60	48.57	74.00	25.43	PK	Horizontal
4	12156.000	40.86	39.33	7.71	-39.48	48.42	74.00	25.58	PK	Horizontal
5	15580.000	39.61	38.90	8.43	-39.14	47.80	74.00	26.20	PK	Horizontal
6	17897.000	38.63	42.07	9.10	-39.25	50.55	74.00	23.45	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6175
Polarity:	Vertical	Test Voltage:	DC 20V

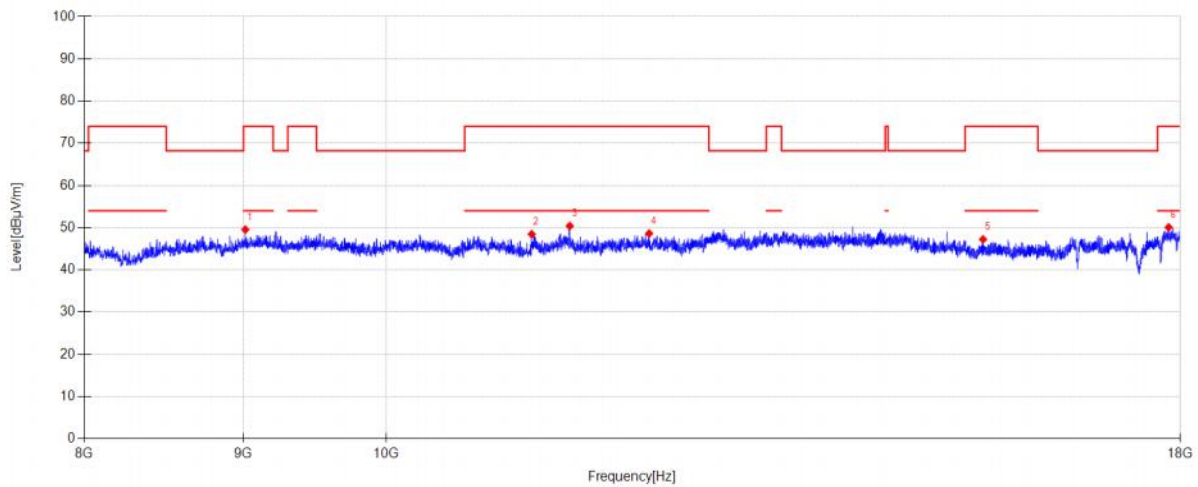


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9012.000	42.54	38.60	7.03	-38.61	49.56	74.00	24.44	PK	Vertical
2	11139.000	41.94	38.86	7.27	-39.60	48.47	74.00	25.53	PK	Vertical
3	11457.000	43.34	39.23	7.44	-39.60	50.41	74.00	23.59	PK	Vertical
4	12150.000	41.05	39.35	7.71	-39.48	48.63	74.00	25.37	PK	Vertical
5	15555.000	39.17	38.78	8.40	-39.11	47.24	74.00	26.76	PK	Vertical
6	17845.000	38.60	41.61	9.11	-39.22	50.10	74.00	23.90	PK	Vertical

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

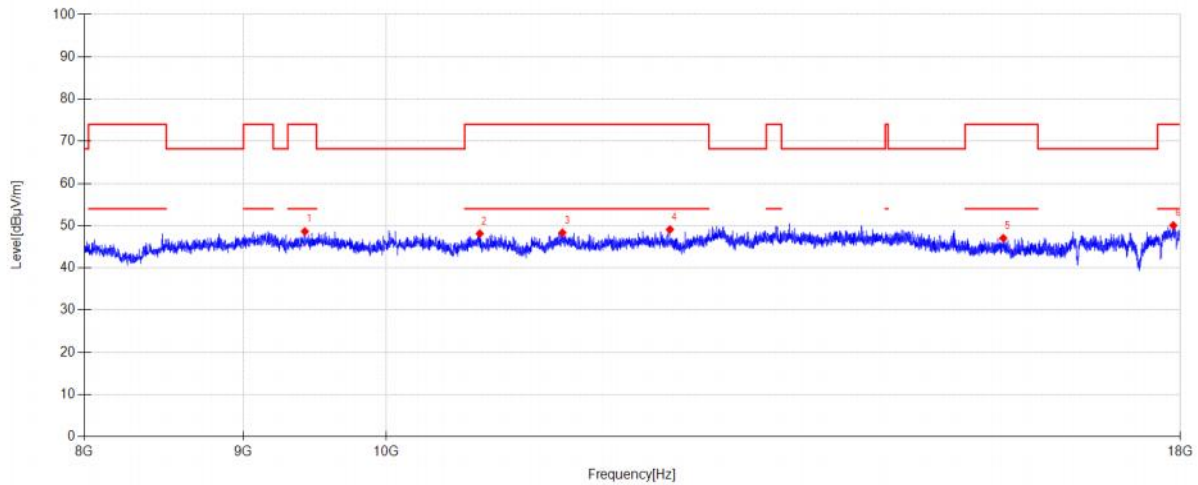


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9418.000	42.08	38.52	7.11	-39.06	48.65	74.00	25.35	PK	Horizontal
2	10719.000	41.14	39.41	7.21	-39.63	48.13	74.00	25.87	PK	Horizontal
3	11395.000	40.79	39.74	7.41	-39.60	48.34	74.00	25.66	PK	Horizontal
4	12338.000	41.44	39.29	7.70	-39.33	49.10	74.00	24.90	PK	Horizontal
5	15790.000	39.51	38.23	8.67	-39.37	47.04	74.00	26.96	PK	Horizontal
6	17907.000	38.10	42.12	9.10	-39.25	50.07	74.00	23.93	PK	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

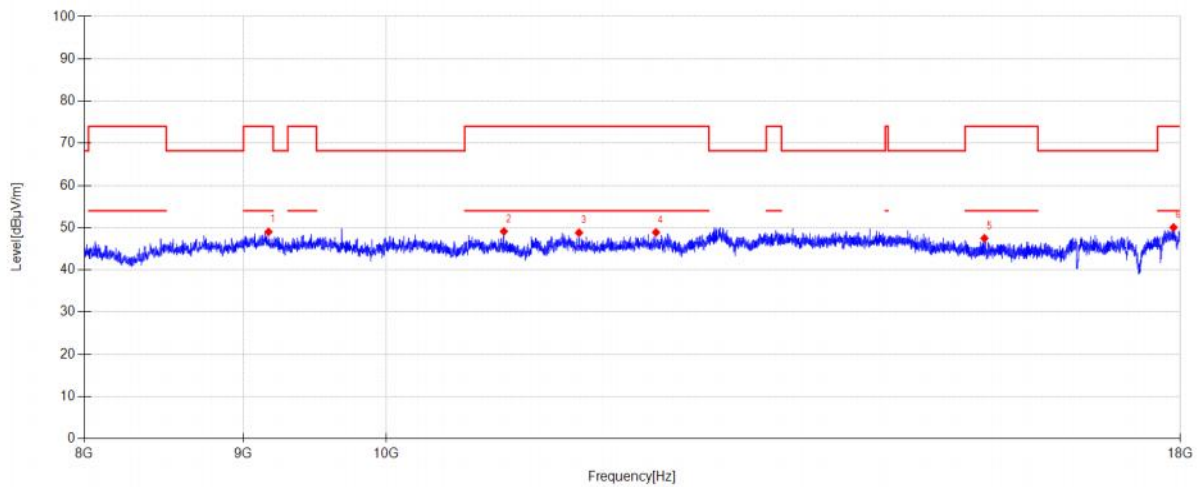

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9168.000	41.95	38.78	7.06	-38.78	49.01	74.00	24.99	PK	Vertical
2	10912.000	41.93	39.61	7.20	-39.61	49.13	74.00	24.87	PK	Vertical
3	11536.000	42.20	38.73	7.48	-39.60	48.81	74.00	25.19	PK	Vertical
4	12212.000	41.39	39.22	7.71	-39.43	48.89	74.00	25.11	PK	Vertical
5	15571.000	39.35	38.86	8.42	-39.13	47.50	74.00	26.50	PK	Vertical
6	17910.000	38.10	42.13	9.09	-39.26	50.06	74.00	23.94	PK	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

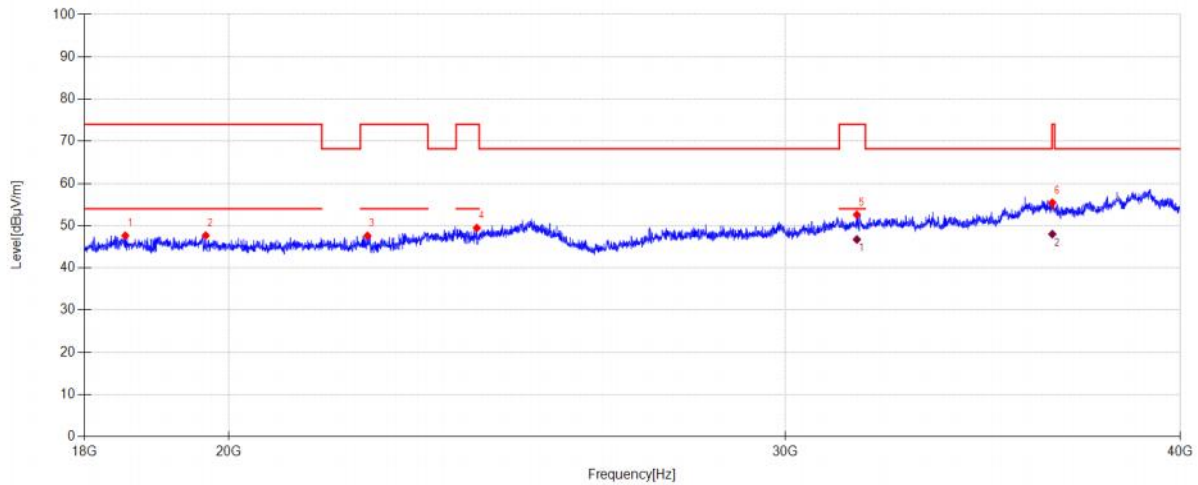

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18545.552	39.68	38.42	9.55	-40.00	47.65	74.00	26.35	PK	Horizontal
2	19664.770	40.67	38.67	9.84	-41.50	47.68	74.00	26.32	PK	Horizontal
3	22124.042	40.82	39.05	10.79	-43.06	47.60	74.00	26.40	PK	Horizontal
4	23958.904	39.66	40.60	11.42	-42.22	49.46	74.00	24.54	PK	Horizontal
5	31601.580	37.67	41.98	12.65	-39.70	52.60	74.00	21.40	PK	Horizontal
6	36438.737	37.69	43.28	14.46	-40.00	55.43	74.00	18.57	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31601.580	31.80	41.98	12.65	46.73	54.00	7.27	AV	Horizontal	
2	36438.737	30.27	43.28	14.46	48.01	54.00	5.99	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

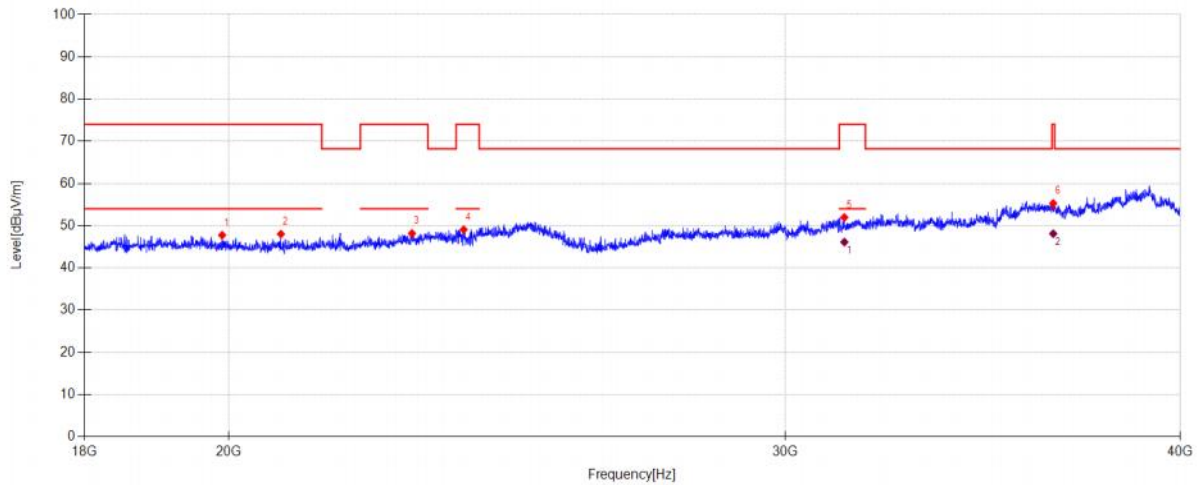

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	19901.676	41.11	38.64	9.86	-41.85	47.76	74.00	26.24	PK	Vertical
2	20771.781	41.37	38.60	9.90	-41.85	48.02	74.00	25.98	PK	Vertical
3	22852.895	40.01	40.05	10.96	-42.84	48.18	74.00	25.82	PK	Vertical
4	23730.469	39.52	40.60	11.32	-42.36	49.08	74.00	24.92	PK	Vertical
5	31315.273	37.17	41.83	12.53	-39.56	51.97	74.00	22.03	PK	Vertical
6	36462.017	37.59	43.28	14.47	-40.04	55.30	74.00	18.70	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31315.273	31.32	41.83	12.53	46.12	54.00	7.88	AV	Vertical	
2	36462.017	30.40	43.28	14.47	48.11	54.00	5.89	AV	Vertical	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6175
Polarity:	Horizontal	Test Voltage:	DC 20V

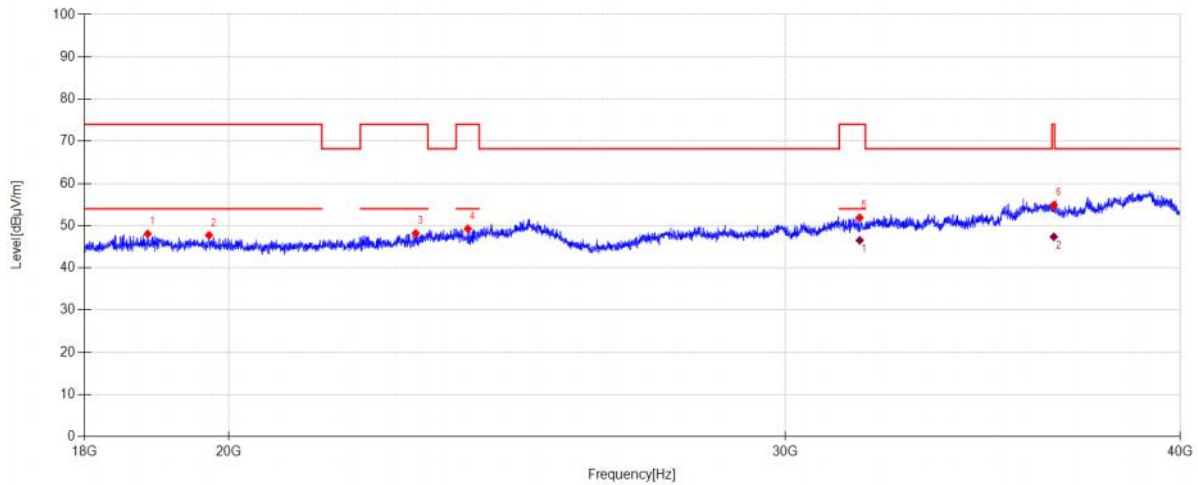

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18850.063	40.19	38.50	9.70	-40.34	48.05	74.00	25.95	PK	Horizontal
2	19711.925	40.79	38.68	9.84	-41.57	47.74	74.00	26.26	PK	Horizontal
3	22915.011	39.86	40.20	10.98	-42.83	48.21	74.00	25.79	PK	Horizontal
4	23802.570	39.64	40.60	11.35	-42.32	49.27	74.00	24.73	PK	Horizontal
5	31667.244	36.92	42.03	12.68	-39.73	51.90	74.00	22.10	PK	Horizontal
6	36479.487	37.22	43.29	14.47	-40.07	54.91	74.00	19.09	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31667.244	31.55	42.03	12.68	46.53	54.00	7.47	AV	Horizontal	
2	36479.487	29.68	43.29	14.47	47.37	54.00	6.63	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6175
Polarity:	Vertical	Test Voltage:	DC 20V

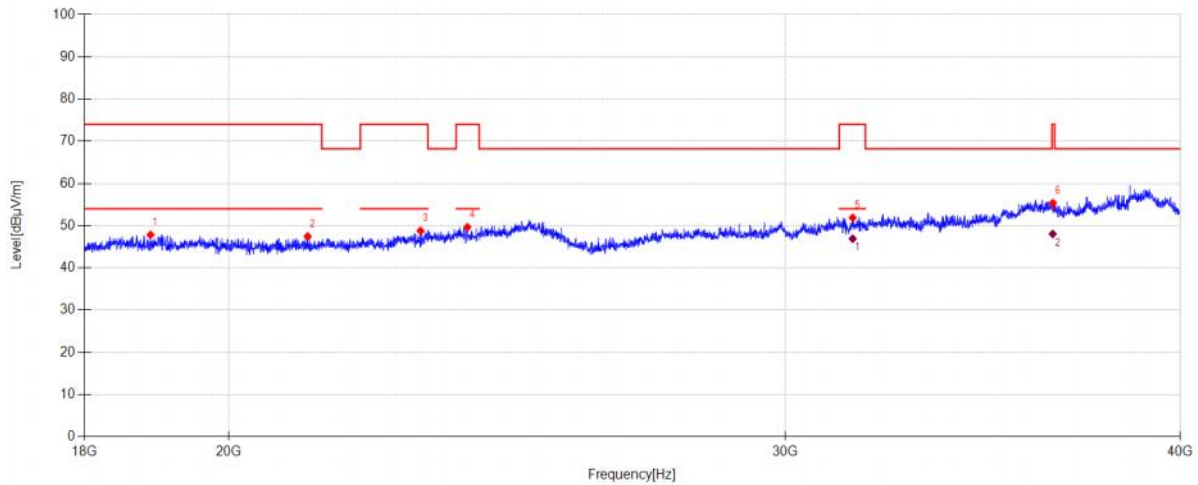

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18889.231	40.00	38.50	9.72	-40.38	47.84	74.00	26.16	PK	Vertical
2	21180.376	40.77	38.67	10.06	-42.03	47.47	74.00	26.53	PK	Vertical
3	22995.647	40.20	40.39	11.00	-42.80	48.79	74.00	25.21	PK	Vertical
4	23794.970	40.02	40.60	11.35	-42.32	49.65	74.00	24.35	PK	Vertical
5	31505.855	37.03	41.90	12.61	-39.65	51.89	74.00	22.11	PK	Vertical
6	36450.375	37.64	43.28	14.47	-40.02	55.37	74.00	18.63	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31505.855	32.06	41.90	12.61	46.92	54.00	7.08	AV	Vertical
2	36450.375	30.32	43.28	14.47	48.05	54.00	5.95	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6415
Polarity:	Horizontal	Test Voltage:	DC 20V

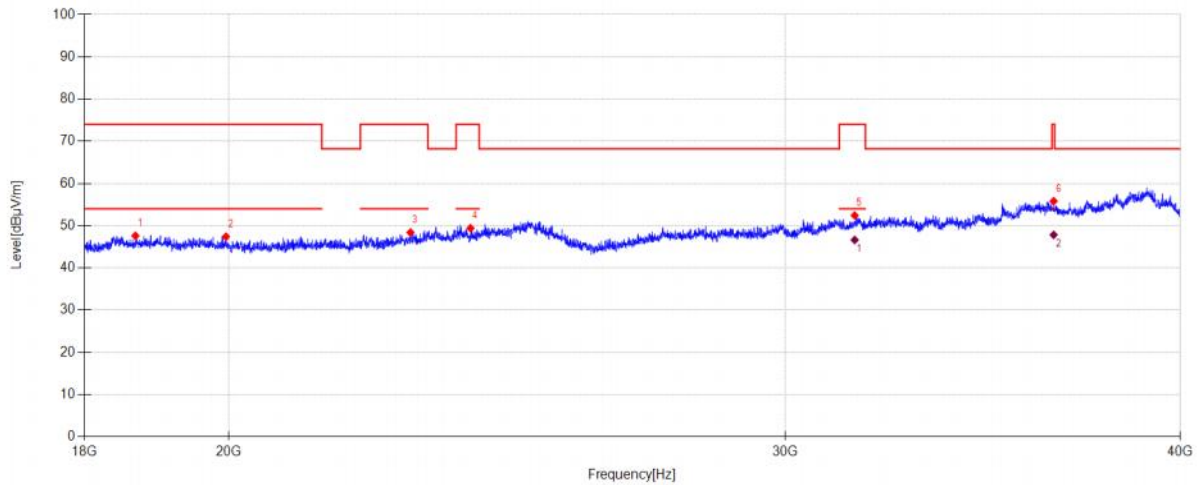

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18682.267	39.68	38.47	9.61	-40.15	47.61	74.00	26.39	PK	Horizontal
2	19955.770	40.83	38.62	9.87	-41.93	47.39	74.00	26.61	PK	Horizontal
3	22827.367	40.30	39.99	10.96	-42.85	48.40	74.00	25.60	PK	Horizontal
4	23848.221	39.73	40.60	11.37	-42.29	49.41	74.00	24.59	PK	Horizontal
5	31551.162	37.54	41.94	12.63	-39.68	52.43	74.00	21.57	PK	Horizontal
6	36473.662	38.12	43.29	14.47	-40.06	55.82	74.00	18.18	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31551.162	31.74	41.94	12.63	46.63	54.00	7.37	AV	Horizontal
2	36473.662	30.13	43.29	14.47	47.83	54.00	6.17	AV	Horizontal


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6415
Polarity:	Vertical	Test Voltage:	DC 20V

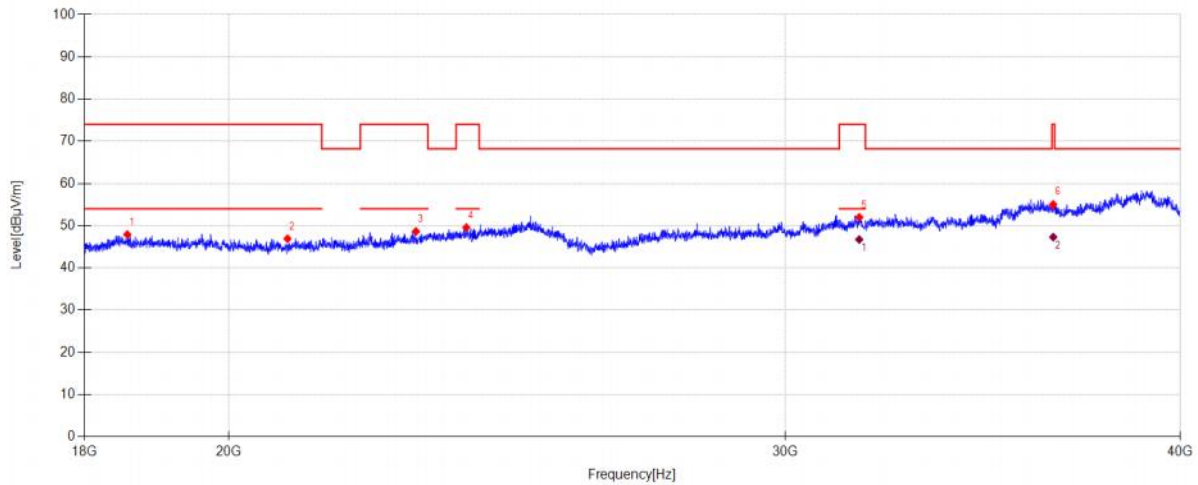

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18572.222	39.96	38.43	9.56	-40.03	47.92	74.00	26.08	PK	Vertical
2	20871.519	40.25	38.60	9.90	-41.83	46.92	74.00	27.08	PK	Vertical
3	22918.670	40.28	40.20	10.98	-42.82	48.64	74.00	25.36	PK	Vertical
4	23775.981	39.96	40.60	11.34	-42.33	49.57	74.00	24.43	PK	Vertical
5	31657.133	37.01	42.03	12.68	-39.73	51.99	74.00	22.01	PK	Vertical
6	36462.017	37.36	43.28	14.47	-40.04	55.07	74.00	18.93	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31657.133	31.75	42.03	12.68	46.73	54.00	7.27	AV	Vertical
2	36462.017	29.59	43.28	14.47	47.30	54.00	6.70	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6435
Polarity:	Horizontal	Test Voltage:	DC 20V

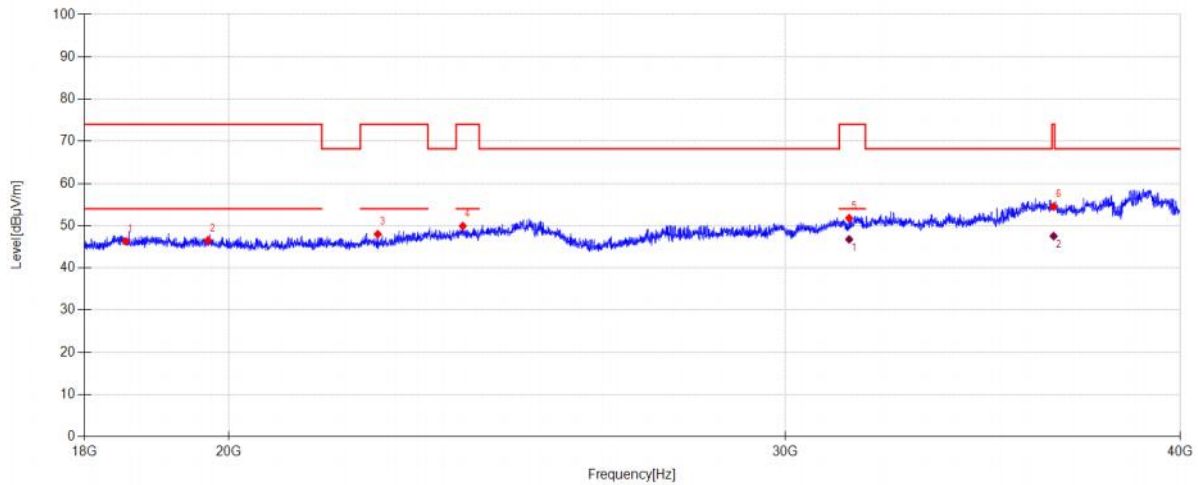

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18551.475	38.37	38.42	9.55	-40.01	46.33	74.00	26.16	PK	Horizontal
2	19696.194	39.55	38.68	9.84	-41.54	46.53	74.00	26.01	PK	Horizontal
3	22290.696	41.03	39.15	10.83	-43.01	48.00	74.00	25.06	PK	Horizontal
4	23715.318	40.39	40.60	11.31	-42.37	49.93	74.00	24.07	PK	Horizontal
5	31425.469	36.95	41.87	12.58	-39.61	51.79	74.00	21.71	PK	Horizontal
6	36473.662	36.81	43.29	14.47	-40.06	54.51	74.00	18.49	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31425.469	31.92	41.87	12.58	46.76	54.00	7.24	AV	Horizontal
2	36473.662	29.84	43.29	14.47	47.54	54.00	6.46	AV	Horizontal


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6435
Polarity:	Vertical	Test Voltage:	DC 20V

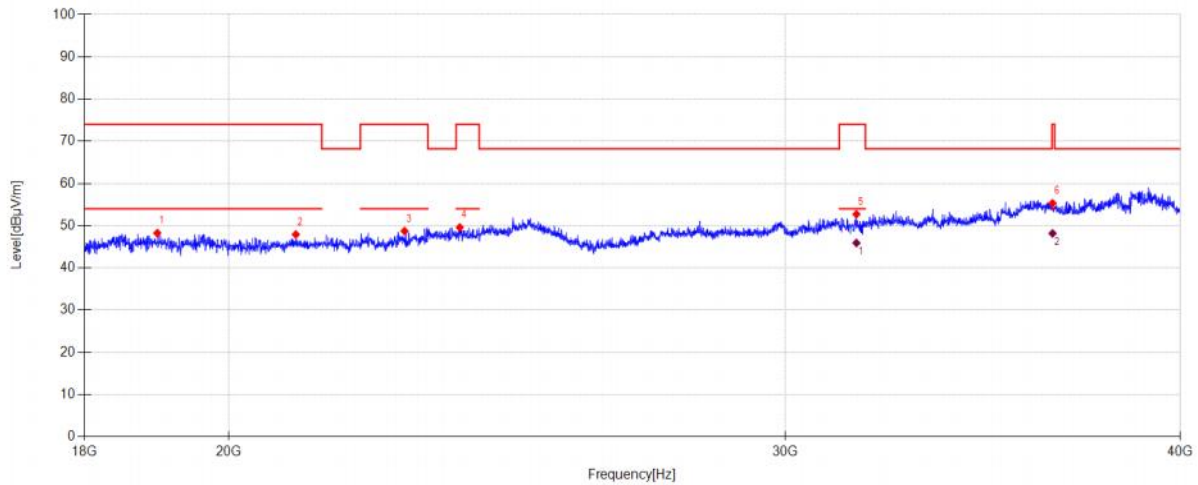

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18982.960	40.47	38.50	9.76	-40.48	48.25	74.00	25.75	PK	Vertical
2	20998.540	41.21	38.60	9.91	-41.80	47.92	74.00	26.08	PK	Vertical
3	22729.168	40.90	39.77	10.94	-42.88	48.73	74.00	25.27	PK	Vertical
4	23662.365	40.11	40.60	11.29	-42.40	49.60	74.00	24.40	PK	Vertical
5	31591.490	37.80	41.97	12.65	-39.70	52.72	74.00	21.28	PK	Vertical
6	36444.555	37.58	43.28	14.46	-40.01	55.31	74.00	18.69	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31591.490	30.99	41.97	12.65	45.91	54.00	8.09	AV	Vertical	
2	36444.555	30.45	43.28	14.46	48.18	54.00	5.82	AV	Vertical	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6475
Polarity:	Horizontal	Test Voltage:	DC 20V

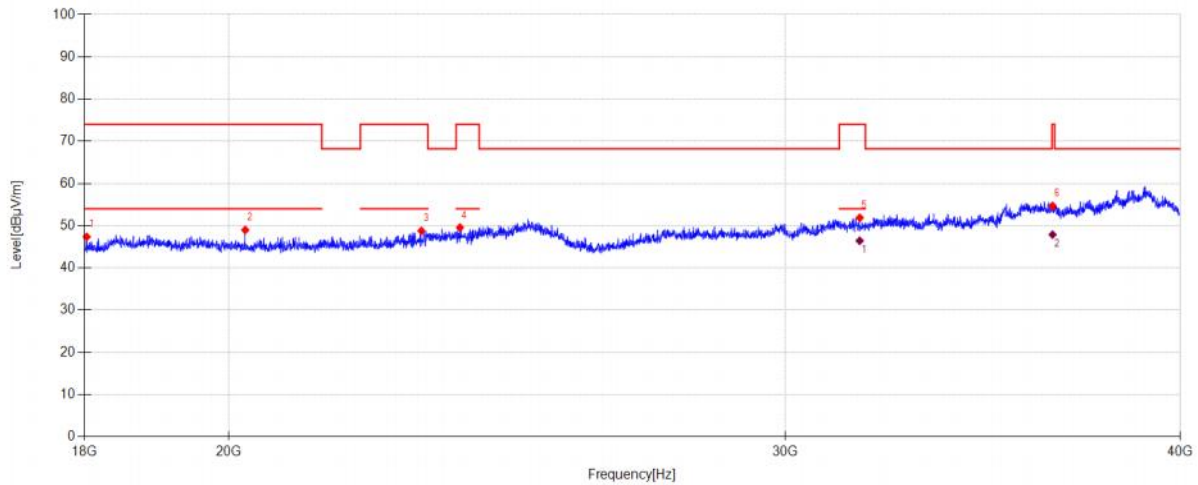

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18031.642	39.19	38.31	9.30	-39.43	47.37	74.00	26.63	PK	Horizontal
2	20238.146	42.46	38.60	9.88	-41.95	48.99	74.00	25.01	PK	Horizontal
3	23010.338	40.17	40.40	11.00	-42.79	48.78	74.00	25.22	PK	Horizontal
4	23666.143	40.09	40.60	11.29	-42.40	49.58	74.00	24.42	PK	Horizontal
5	31667.244	36.90	42.03	12.68	-39.73	51.88	74.00	22.12	PK	Horizontal
6	36444.555	36.98	43.28	14.46	-40.01	54.71	74.00	19.29	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31667.244	31.46	42.03	12.68	46.44	54.00	7.56	AV	Horizontal	
2	36444.555	30.15	43.28	14.46	47.88	54.00	6.12	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6475
Polarity:	Vertical	Test Voltage:	DC 20V

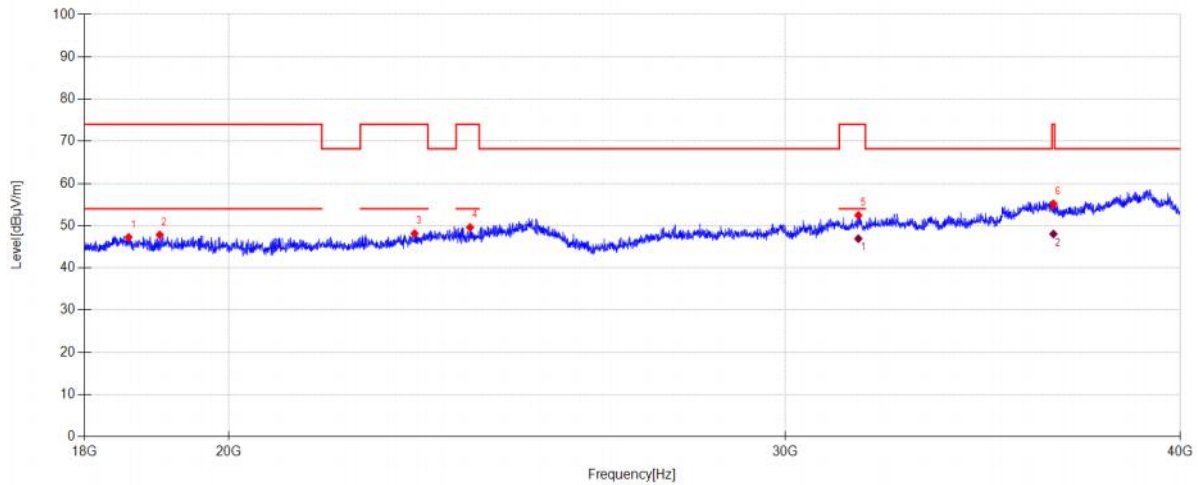

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18590.023	39.30	38.44	9.57	-40.05	47.26	74.00	26.74	PK	Vertical
2	19016.330	40.07	38.51	9.77	-40.52	47.83	74.00	26.17	PK	Vertical
3	22896.724	39.87	40.15	10.98	-42.83	48.17	74.00	25.83	PK	Vertical
4	23840.606	39.92	40.60	11.37	-42.30	49.59	74.00	24.41	PK	Vertical
5	31636.920	37.51	42.01	12.67	-39.72	52.47	74.00	21.53	PK	Vertical
6	36467.839	37.48	43.29	14.47	-40.05	55.19	74.00	18.81	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31636.920	31.96	42.01	12.67	46.92	54.00	7.08	AV	Vertical	
2	36467.839	30.33	43.29	14.47	48.04	54.00	5.96	AV	Vertical	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6515
Polarity:	Horizontal	Test Voltage:	DC 20V

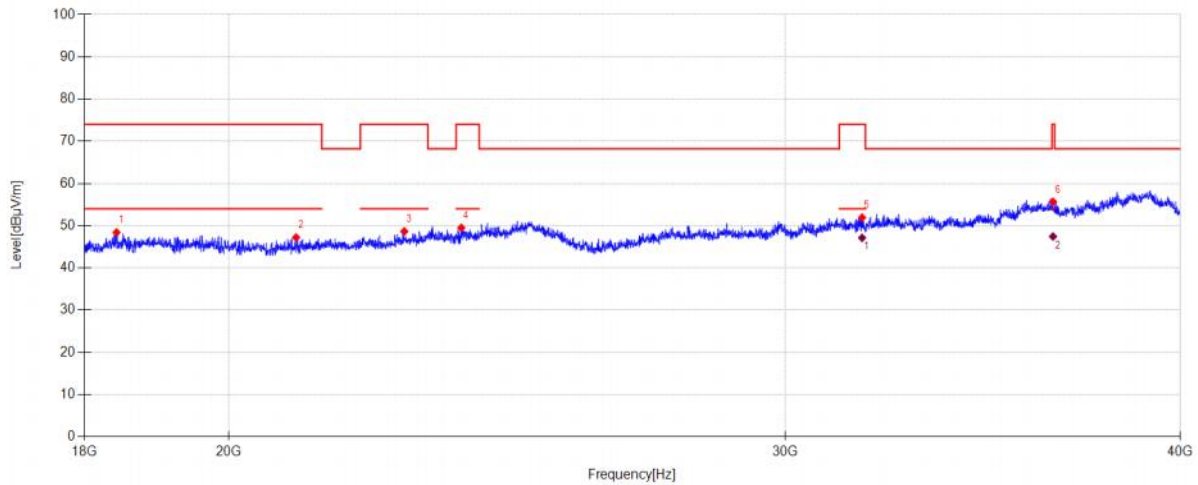

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18427.483	40.38	38.40	9.49	-39.87	48.40	74.00	25.60	PK	Horizontal
2	21001.893	40.49	38.60	9.91	-41.80	47.20	74.00	26.80	PK	Horizontal
3	22725.540	40.85	39.76	10.93	-42.88	48.66	74.00	25.34	PK	Horizontal
4	23688.826	39.98	40.60	11.30	-42.39	49.49	74.00	24.51	PK	Horizontal
5	31722.912	36.89	42.08	12.71	-39.76	51.92	74.00	22.08	PK	Horizontal
6	36456.195	37.95	43.28	14.47	-40.03	55.67	74.00	18.33	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31722.912	32.09	42.08	12.71	47.12	54.00	6.88	AV	Horizontal	
2	36456.195	29.73	43.28	14.47	47.45	54.00	6.55	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6515
Polarity:	Vertical	Test Voltage:	DC 20V

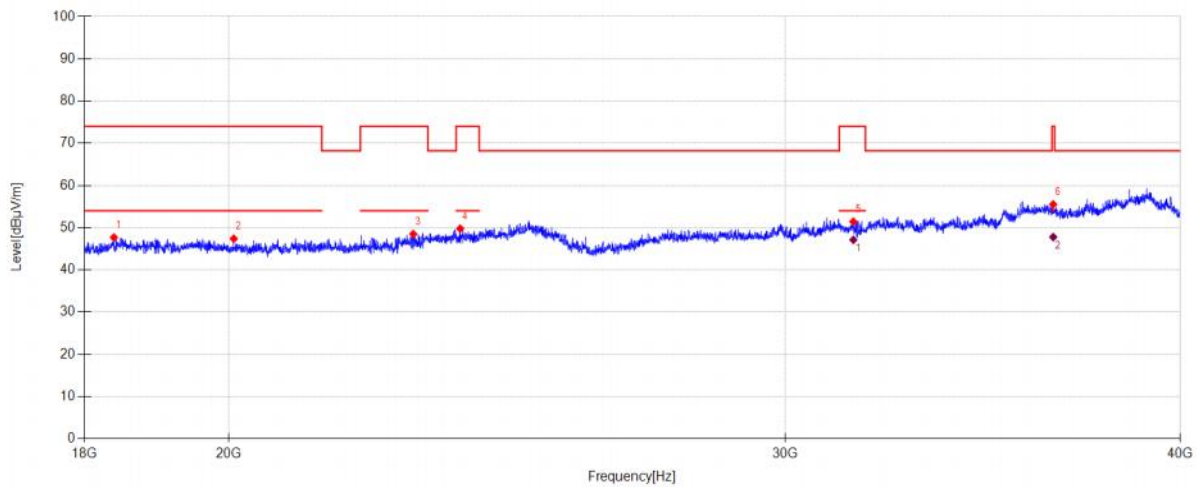

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18392.209	39.66	38.40	9.47	-39.83	47.70	74.00	26.30	PK	Vertical
2	20070.808	40.91	38.60	9.87	-41.99	47.39	74.00	26.61	PK	Vertical
3	22874.799	40.27	40.10	10.97	-42.84	48.50	74.00	25.50	PK	Vertical
4	23669.922	40.28	40.60	11.29	-42.40	49.77	74.00	24.23	PK	Vertical
5	31520.950	36.55	41.92	12.62	-39.66	51.43	74.00	22.57	PK	Vertical
6	36462.017	37.82	43.28	14.47	-40.04	55.53	74.00	18.47	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31520.950	32.24	41.92	12.62	47.12	54.00	6.88	AV	Vertical
2	36462.017	30.07	43.28	14.47	47.78	54.00	6.22	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6535
Polarity:	Horizontal	Test Voltage:	DC 20V

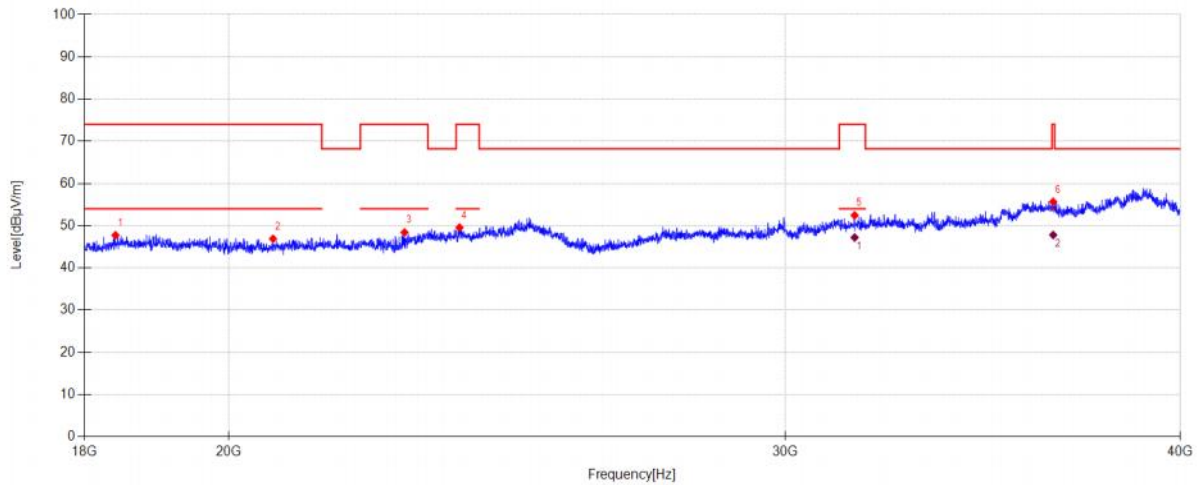

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18412.777	39.72	38.40	9.48	-39.85	47.75	74.00	26.25	PK	Horizontal
2	20652.725	40.26	38.60	9.90	-41.87	46.89	74.00	27.11	PK	Horizontal
3	22729.168	40.57	39.77	10.94	-42.88	48.40	74.00	25.60	PK	Horizontal
4	23658.587	40.07	40.60	11.29	-42.40	49.56	74.00	24.44	PK	Horizontal
5	31551.162	37.56	41.94	12.63	-39.68	52.45	74.00	21.55	PK	Horizontal
6	36462.017	37.95	43.28	14.47	-40.04	55.66	74.00	18.34	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31551.162	32.31	41.94	12.63	47.20	54.00	6.80	AV	Horizontal	
2	36462.017	30.09	43.28	14.47	47.80	54.00	6.20	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6535
Polarity:	Vertical	Test Voltage:	DC 20V

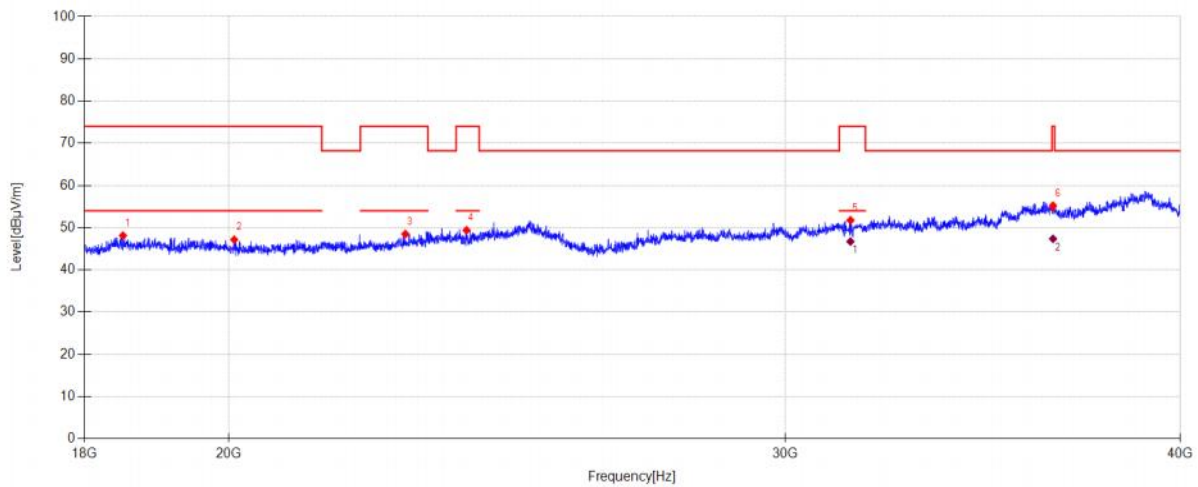

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18513.008	40.16	38.41	9.53	-39.96	48.14	74.00	25.86	PK	Vertical
2	20077.219	40.67	38.60	9.87	-41.98	47.16	74.00	26.84	PK	Vertical
3	22743.690	40.66	39.79	10.94	-42.88	48.51	74.00	25.49	PK	Vertical
4	23779.778	39.79	40.60	11.34	-42.33	49.40	74.00	24.60	PK	Vertical
5	31455.590	36.93	41.88	12.59	-39.63	51.77	74.00	22.23	PK	Vertical
6	36456.195	37.51	43.28	14.47	-40.03	55.23	74.00	18.77	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31455.590	31.89	41.88	12.59	46.73	54.00	7.27	AV	Vertical	
2	36456.195	29.65	43.28	14.47	47.37	54.00	6.63	AV	Vertical	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6695
Polarity:	Horizontal	Test Voltage:	DC 20V

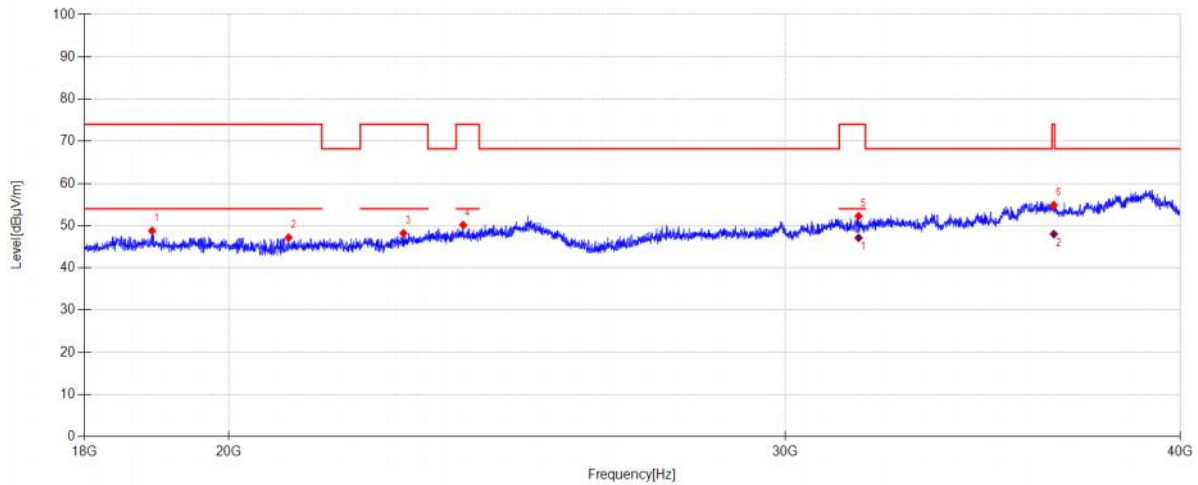

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18910.355	40.97	38.50	9.73	-40.40	48.80	74.00	25.20	PK	Horizontal
2	20888.188	40.47	38.60	9.91	-41.82	47.16	74.00	26.84	PK	Horizontal
3	22711.030	40.44	39.74	10.93	-42.89	48.22	74.00	25.78	PK	Horizontal
4	23722.892	40.60	40.60	11.32	-42.37	50.15	74.00	23.85	PK	Horizontal
5	31641.972	37.31	42.01	12.67	-39.72	52.27	74.00	21.73	PK	Horizontal
6	36479.487	37.20	43.29	14.47	-40.07	54.89	74.00	19.11	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31641.972	32.16	42.01	12.67	47.12	54.00	6.88	AV	Horizontal	
2	36479.487	30.33	43.29	14.47	48.02	54.00	5.98	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6695
Polarity:	Vertical	Test Voltage:	DC 20V

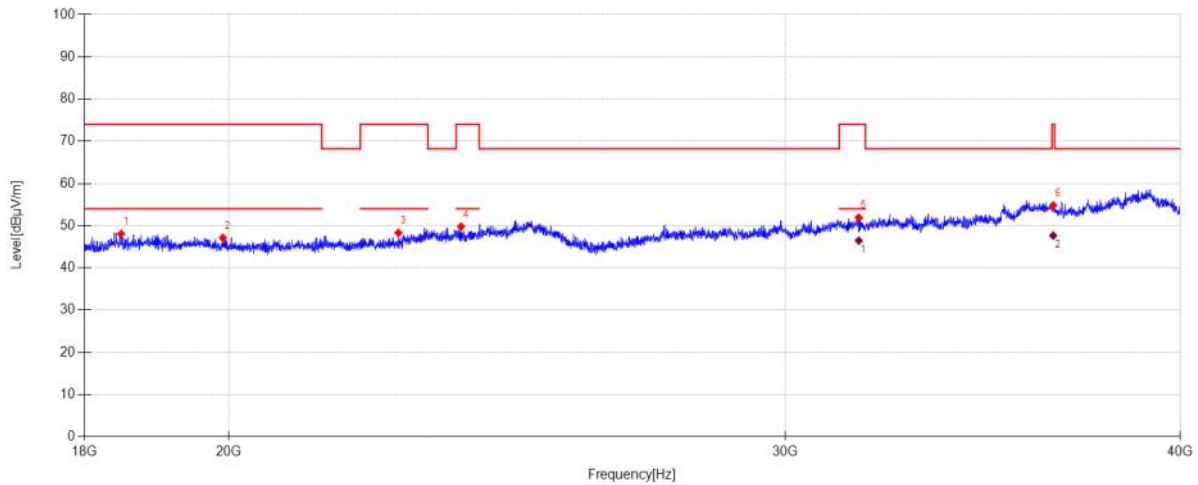

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18489.375	40.09	38.40	9.52	-39.94	48.07	74.00	25.93	PK	Vertical
2	19911.211	40.49	38.64	9.86	-41.87	47.12	74.00	26.88	PK	Vertical
3	22627.779	40.71	39.60	10.91	-42.91	48.31	74.00	25.69	PK	Vertical
4	23685.044	40.28	40.60	11.30	-42.39	49.79	74.00	24.21	PK	Vertical
5	31647.025	36.95	42.02	12.67	-39.72	51.92	74.00	22.08	PK	Vertical
6	36462.017	37.10	43.28	14.47	-40.04	54.81	74.00	19.19	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31647.025	31.49	42.02	12.67	46.46	54.00	7.54	AV	Vertical
2	36462.017	29.94	43.28	14.47	47.65	54.00	6.35	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6855
Polarity:	Horizontal	Test Voltage:	DC 20V

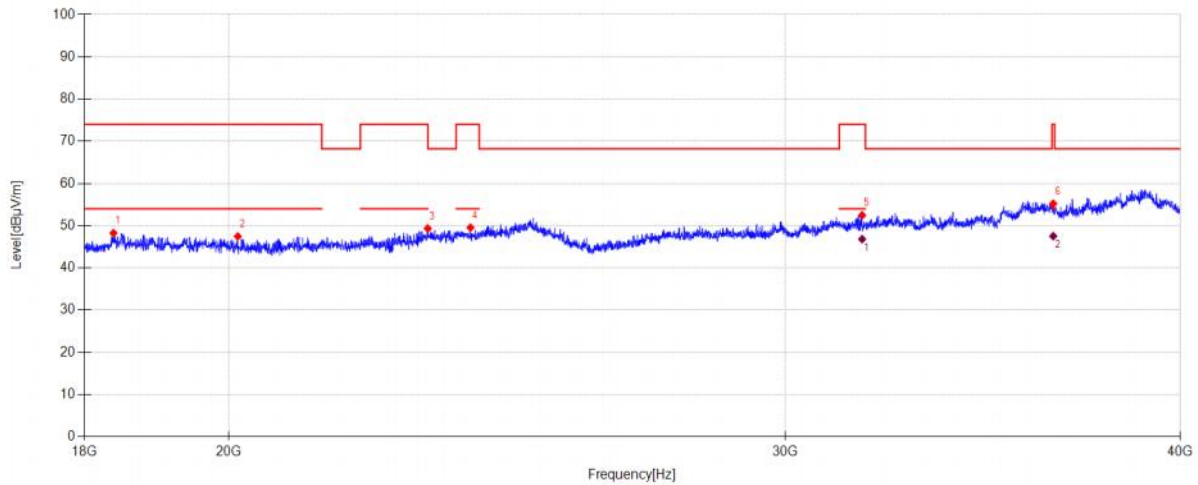

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18386.337	40.21	38.40	9.47	-39.82	48.26	74.00	25.74	PK	Horizontal
2	20128.576	40.96	38.60	9.88	-41.97	47.47	74.00	26.53	PK	Horizontal
3	23117.133	40.58	40.45	11.05	-42.73	49.35	74.00	24.65	PK	Horizontal
4	23848.221	39.86	40.60	11.37	-42.29	49.54	74.00	24.46	PK	Horizontal
5	31722.912	37.43	42.08	12.71	-39.76	52.46	74.00	21.54	PK	Horizontal
6	36462.017	37.50	43.28	14.47	-40.04	55.21	74.00	18.79	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31722.912	31.79	42.08	12.71	46.82	54.00	7.18	AV	Horizontal	
2	36462.017	29.82	43.28	14.47	47.53	54.00	6.47	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6855
Polarity:	Vertical	Test Voltage:	DC 20V

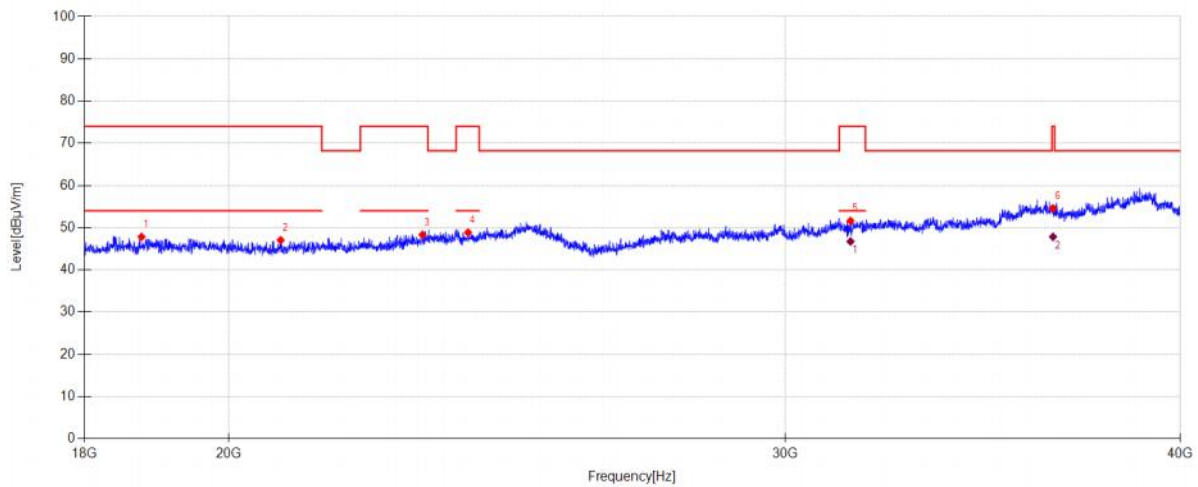

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18765.978	39.92	38.50	9.66	-40.24	47.84	74.00	26.16	PK	Vertical
2	20768.465	40.39	38.60	9.90	-41.85	47.04	74.00	26.96	PK	Vertical
3	23028.716	39.68	40.41	11.01	-42.78	48.32	74.00	25.68	PK	Vertical
4	23806.371	39.23	40.60	11.35	-42.32	48.86	74.00	25.14	PK	Vertical
5	31455.590	36.78	41.88	12.59	-39.63	51.62	74.00	22.38	PK	Vertical
6	36456.195	36.88	43.28	14.47	-40.03	54.60	74.00	19.40	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31455.590	31.90	41.88	12.59	46.74	54.00	7.26	AV	Vertical
2	36456.195	30.12	43.28	14.47	47.84	54.00	6.16	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6875
Polarity:	Horizontal	Test Voltage:	DC 20V

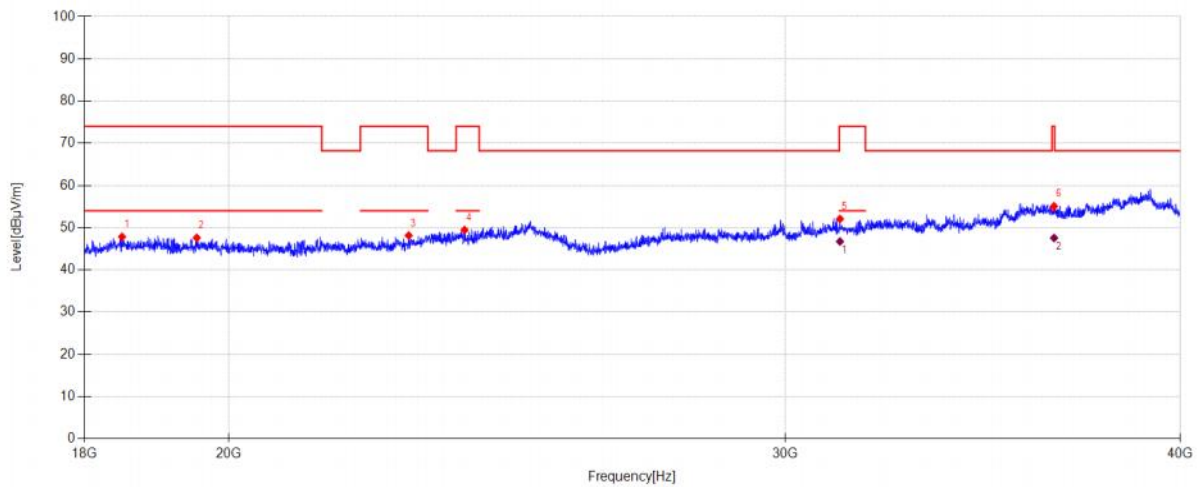

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18501.188	39.86	38.40	9.53	-39.95	47.84	74.00	26.16	PK	Horizontal
2	19536.456	40.48	38.61	9.82	-41.30	47.61	74.00	26.39	PK	Horizontal
3	22798.227	40.15	39.92	10.95	-42.86	48.16	74.00	25.84	PK	Horizontal
4	23745.630	39.88	40.60	11.33	-42.35	49.46	74.00	24.54	PK	Horizontal
5	31215.431	37.35	41.76	12.48	-39.51	52.08	74.00	21.92	PK	Horizontal
6	36485.312	37.41	43.29	14.47	-40.08	55.09	74.00	18.91	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31215.431	32.01	41.76	12.48	46.74	54.00	7.26	AV	Horizontal
2	36485.312	29.89	43.29	14.47	47.57	54.00	6.43	AV	Horizontal


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6875
Polarity:	Vertical	Test Voltage:	DC 20V

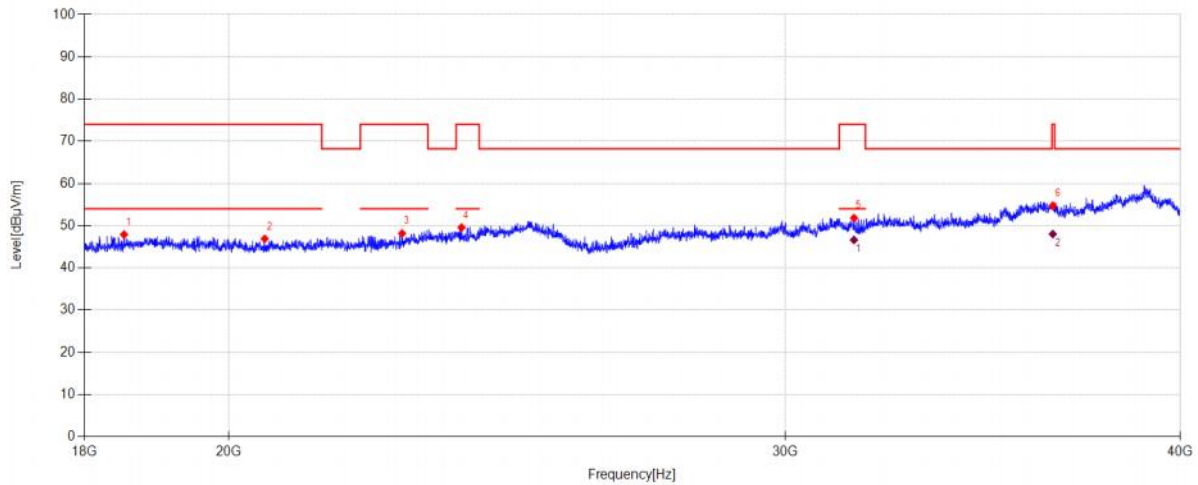

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18527.794	39.93	38.41	9.54	-39.98	47.90	74.00	26.10	PK	Vertical
2	20527.795	40.30	38.60	9.89	-41.89	46.90	74.00	27.10	PK	Vertical
3	22689.283	40.44	39.70	10.93	-42.89	48.18	74.00	25.82	PK	Vertical
4	23692.609	40.05	40.60	11.30	-42.38	49.57	74.00	24.43	PK	Vertical
5	31536.052	36.93	41.93	12.63	-39.67	51.82	74.00	22.18	PK	Vertical
6	36450.375	37.03	43.28	14.47	-40.02	54.76	74.00	19.24	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31536.052	31.74	41.93	12.63	46.63	54.00	7.37	AV	Vertical
2	36450.375	30.29	43.28	14.47	48.02	54.00	5.98	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6895
Polarity:	Horizontal	Test Voltage:	DC 20V

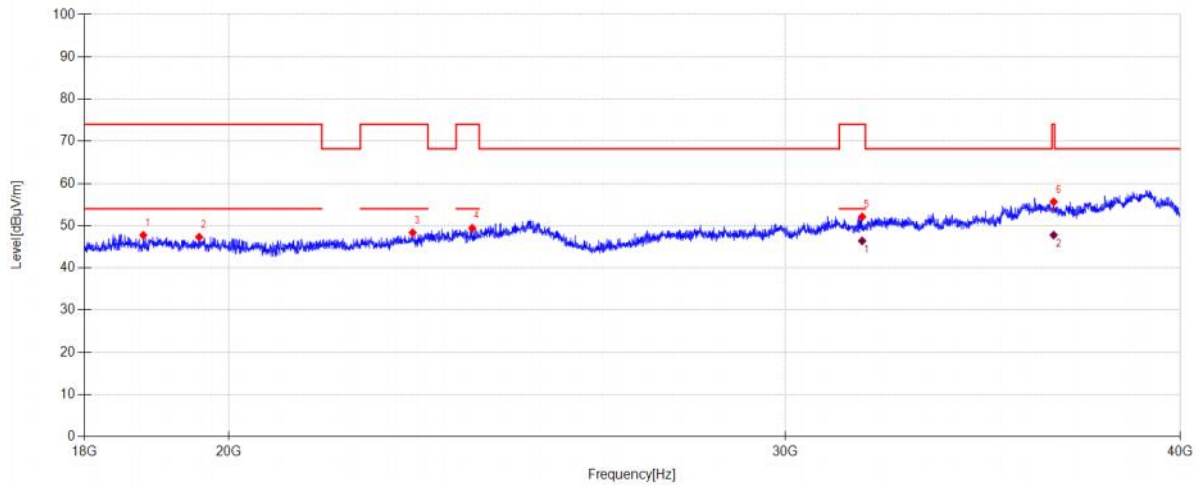

Suspected Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18789.964	39.86	38.50	9.67	-40.27	47.76	74.00	26.24	PK	Horizontal
2	19570.799	40.22	38.63	9.83	-41.36	47.32	74.00	26.68	PK	Horizontal
3	22863.845	40.16	40.07	10.97	-42.84	48.36	74.00	25.64	PK	Horizontal
4	23878.703	39.71	40.60	11.39	-42.27	49.43	74.00	24.57	PK	Horizontal
5	31722.912	37.08	42.08	12.71	-39.76	52.11	74.00	21.89	PK	Horizontal
6	36473.662	37.96	43.29	14.47	-40.06	55.66	74.00	18.34	PK	Horizontal

Final Data List										
NO .	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31722.912	31.37	42.08	12.71	46.40	54.00	7.60	AV	Horizontal	
2	36473.662	30.08	43.29	14.47	47.78	54.00	6.22	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6895
Polarity:	Vertical	Test Voltage:	DC 20V

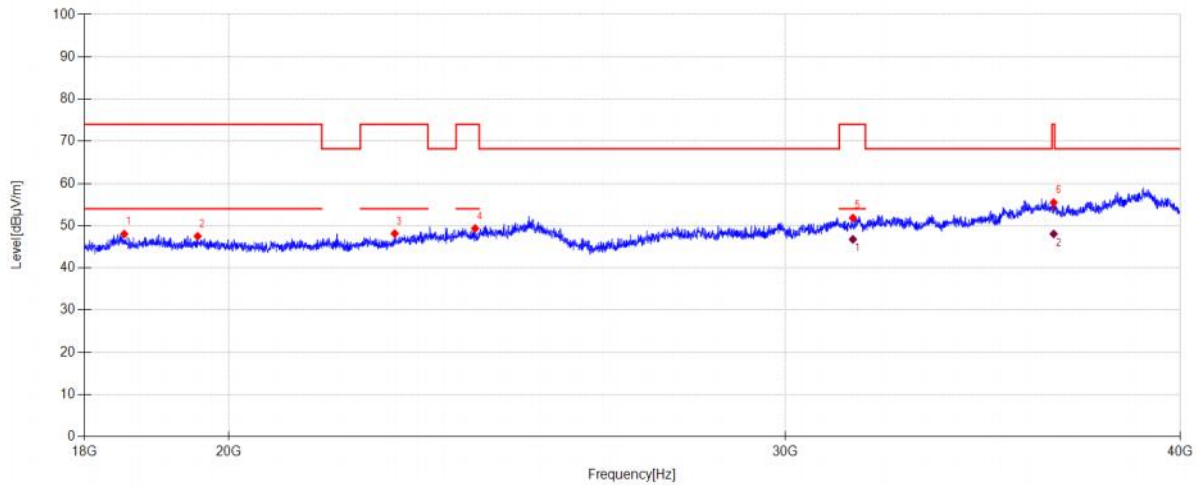

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18530.752	40.07	38.41	9.54	-39.98	48.04	74.00	25.96	PK	Vertical
2	19548.938	40.38	38.62	9.82	-41.32	47.50	74.00	26.50	PK	Vertical
3	22566.442	40.66	39.51	10.90	-42.93	48.14	74.00	25.86	PK	Vertical
4	23928.319	39.59	40.60	11.41	-42.24	49.36	74.00	24.64	PK	Vertical
5	31510.886	36.97	41.91	12.61	-39.66	51.83	74.00	22.17	PK	Vertical
6	36473.662	37.79	43.29	14.47	-40.06	55.49	74.00	18.51	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31510.886	31.91	41.91	12.61	46.77	54.00	7.23	AV	Vertical
2	36473.662	30.36	43.29	14.47	48.06	54.00	5.94	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6995
Polarity:	Horizontal	Test Voltage:	DC 20V

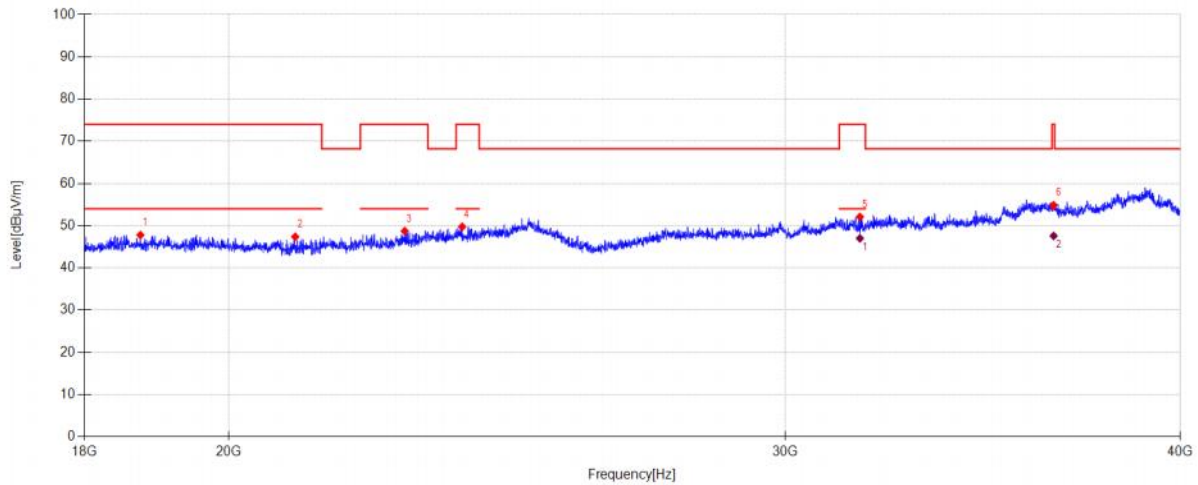

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18751.002	39.87	38.50	9.65	-40.23	47.79	74.00	26.21	PK	Horizontal
2	20988.484	40.68	38.60	9.91	-41.80	47.39	74.00	26.61	PK	Horizontal
3	22732.798	40.90	39.77	10.94	-42.88	48.73	74.00	25.27	PK	Horizontal
4	23703.961	40.22	40.60	11.31	-42.38	49.75	74.00	24.25	PK	Horizontal
5	31672.300	37.11	42.04	12.69	-39.74	52.10	74.00	21.90	PK	Horizontal
6	36473.662	37.17	43.29	14.47	-40.06	54.87	74.00	19.13	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31672.300	32.01	42.04	12.69	47.00	54.00	7.00	AV	Horizontal	
2	36473.662	29.88	43.29	14.47	47.58	54.00	6.42	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	6995
Polarity:	Vertical	Test Voltage:	DC 20V

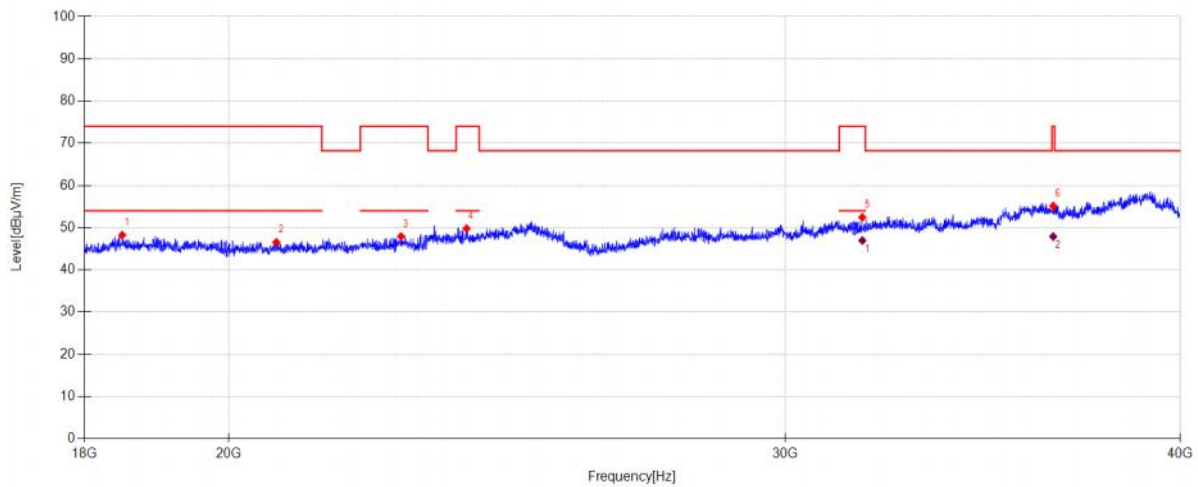

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18504.142	40.26	38.40	9.53	-39.95	48.24	74.00	25.76	PK	Vertical
2	20702.249	39.92	38.60	9.90	-41.86	46.56	74.00	27.44	PK	Vertical
3	22671.176	40.23	39.67	10.92	-42.90	47.92	74.00	26.08	PK	Vertical
4	23779.778	40.20	40.60	11.34	-42.33	49.81	74.00	24.19	PK	Vertical
5	31727.977	37.42	42.08	12.71	-39.76	52.45	74.00	21.55	PK	Vertical
6	36462.017	37.46	43.28	14.47	-40.04	55.17	74.00	18.83	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31727.977	31.94	42.08	12.71	46.97	54.00	7.03	AV	Vertical
2	36462.017	30.19	43.28	14.47	47.90	54.00	6.10	AV	Vertical


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

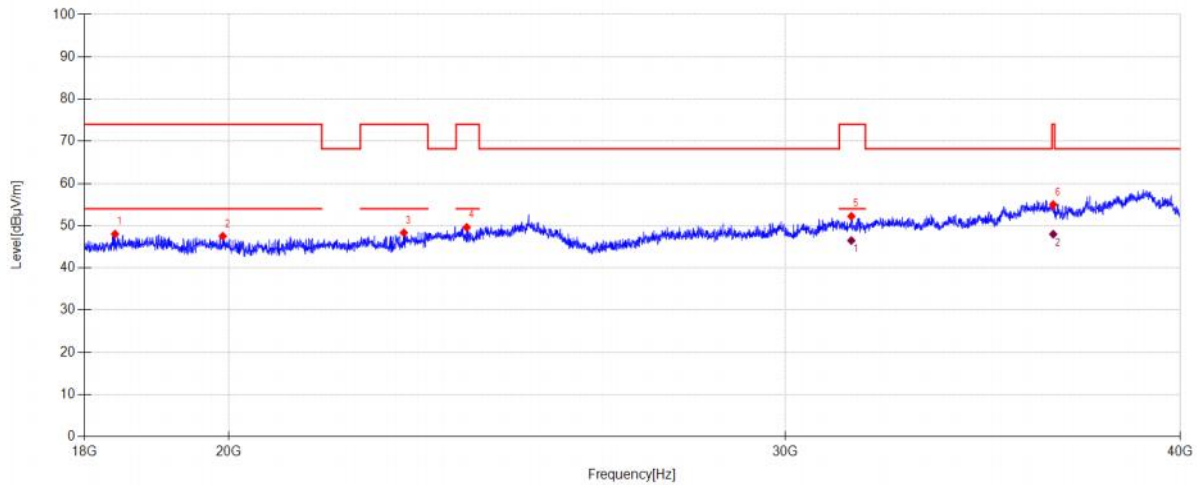

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18406.898	40.00	38.40	9.48	-39.85	48.03	74.00	25.97	PK	Horizontal
2	19911.211	40.90	38.64	9.86	-41.87	47.53	74.00	26.47	PK	Horizontal
3	22718.284	40.53	39.75	10.93	-42.88	48.33	74.00	25.67	PK	Horizontal
4	23783.575	40.00	40.60	11.34	-42.33	49.61	74.00	24.39	PK	Horizontal
5	31475.686	37.38	41.89	12.60	-39.64	52.23	74.00	21.77	PK	Horizontal
6	36462.017	37.32	43.28	14.47	-40.04	55.03	74.00	18.97	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	31475.686	31.64	41.89	12.60	46.49	54.00	7.51	AV	Horizontal	
2	36462.017	30.28	43.28	14.47	47.99	54.00	6.01	AV	Horizontal	


Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

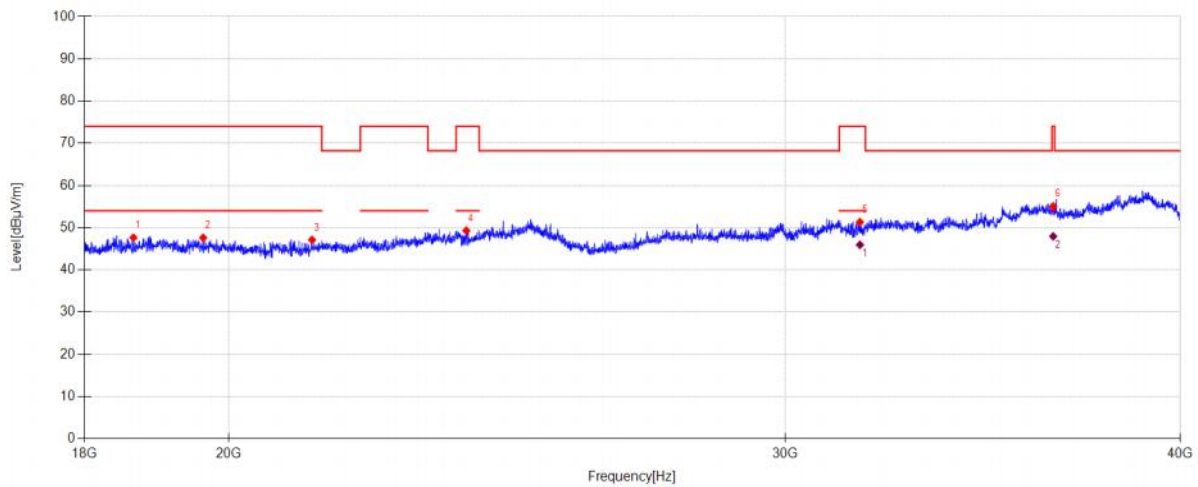

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	18655.439	39.71	38.46	9.60	-40.12	47.65	74.00	26.35	PK	Vertical
2	19627.128	40.58	38.65	9.83	-41.44	47.62	74.00	26.38	PK	Vertical
3	21248.121	40.43	38.70	10.12	-42.12	47.13	74.00	26.87	PK	Vertical
4	23775.981	39.69	40.60	11.34	-42.33	49.30	74.00	24.70	PK	Vertical
5	31672.300	36.35	42.04	12.69	-39.74	51.34	74.00	22.66	PK	Vertical
6	36462.017	37.37	43.28	14.47	-40.04	55.08	74.00	18.92	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31672.300	30.96	42.04	12.69	45.95	54.00	8.05	AV	Vertical
2	36462.017	30.24	43.28	14.47	47.95	54.00	6.05	AV	Vertical

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

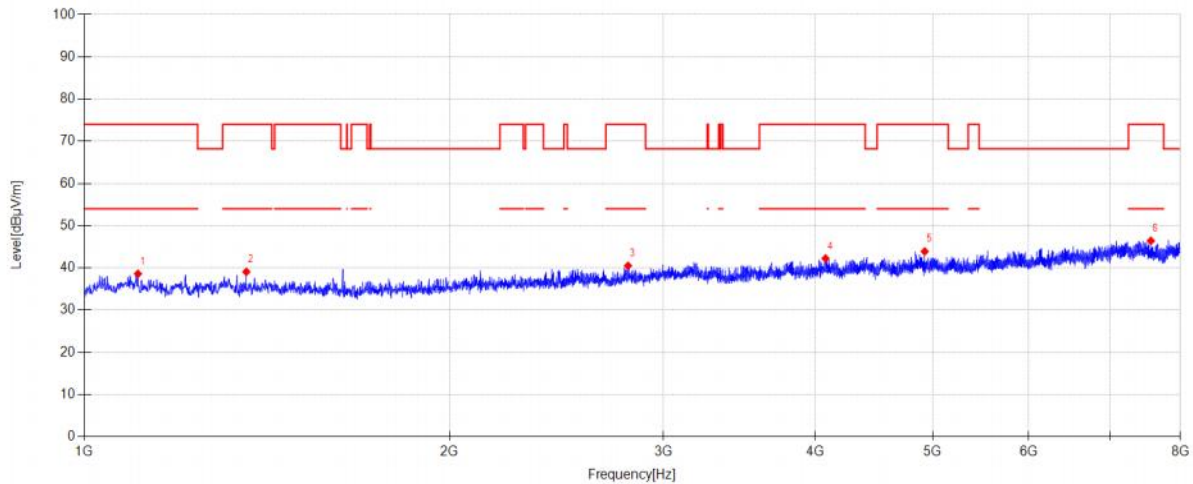


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1107.100	47.38	25.63	2.20	-36.59	38.62	74.00	35.38	PK	Horizontal
2	1359.800	48.16	25.48	2.49	-37.05	39.08	74.00	34.92	PK	Horizontal
3	2805.300	46.56	29.06	3.98	-39.09	40.51	74.00	33.49	PK	Horizontal
4	4080.700	46.31	31.14	4.50	-39.71	42.24	74.00	31.76	PK	Horizontal
5	4925.600	45.68	33.10	4.92	-39.79	43.91	74.00	30.09	PK	Horizontal
6	7565.300	43.94	36.20	6.13	-39.84	46.43	74.00	27.57	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

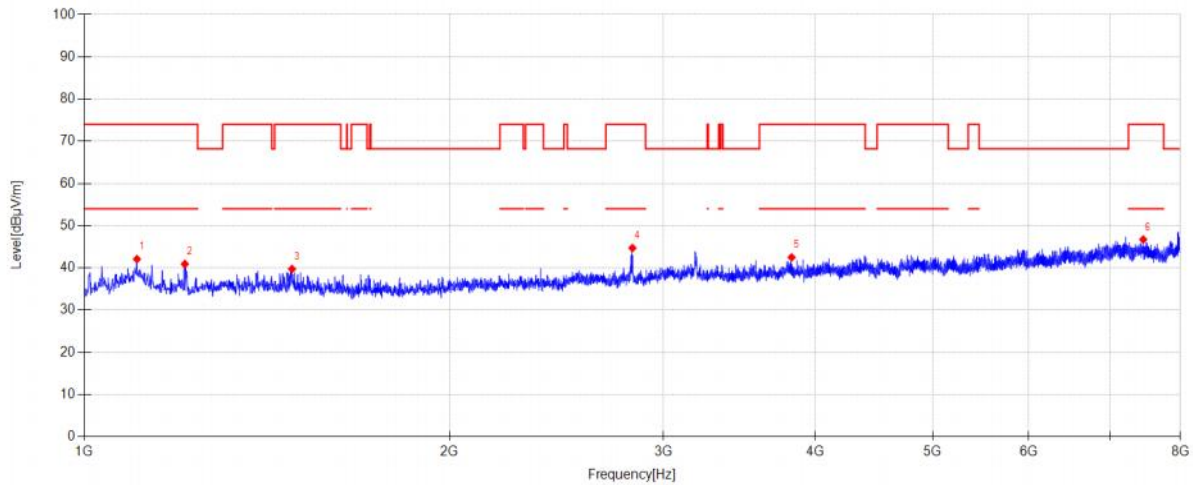


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1105.000	50.86	25.62	2.20	-36.59	42.09	74.00	31.91	PK	Vertical
2	1210.000	49.86	25.52	2.32	-36.78	40.92	74.00	33.08	PK	Vertical
3	1483.000	48.46	25.93	2.64	-37.27	39.76	74.00	34.24	PK	Vertical
4	2829.100	50.96	28.87	4.00	-39.11	44.72	74.00	29.28	PK	Vertical
5	3826.600	47.14	30.58	4.41	-39.63	42.50	74.00	31.50	PK	Vertical
6	7456.100	43.85	36.64	6.10	-39.85	46.74	74.00	27.26	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

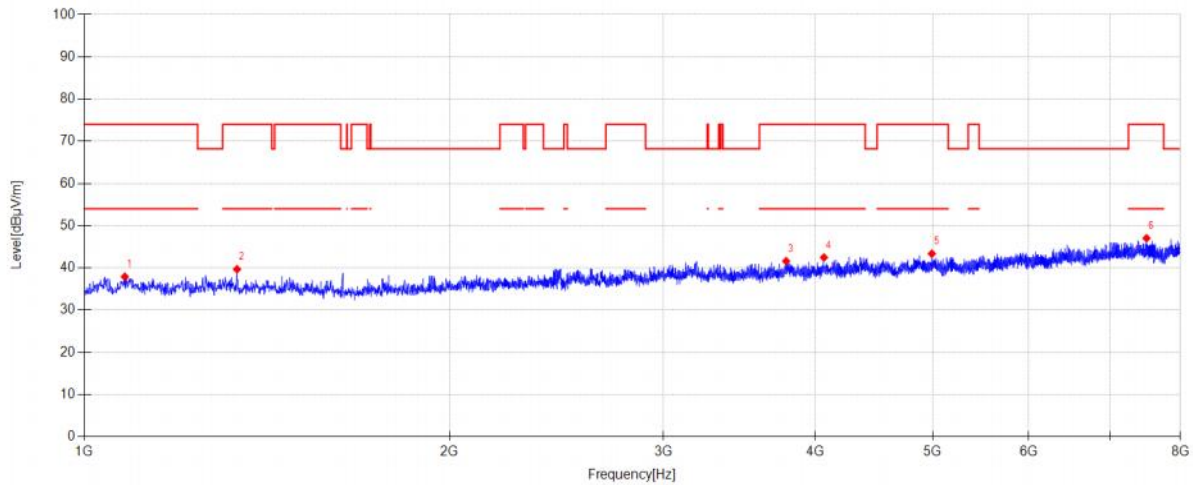


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1079.800	46.65	25.64	2.17	-36.54	37.92	74.00	36.08	PK	Horizontal
2	1336.000	48.70	25.52	2.47	-37.00	39.69	74.00	34.31	PK	Horizontal
3	3786.700	46.21	30.61	4.40	-39.61	41.61	74.00	32.39	PK	Horizontal
4	4068.800	46.54	31.16	4.49	-39.71	42.48	74.00	31.52	PK	Horizontal
5	4992.800	45.19	33.01	4.96	-39.80	43.36	74.00	30.64	PK	Horizontal
6	7503.000	43.91	36.86	6.11	-39.85	47.03	74.00	26.97	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

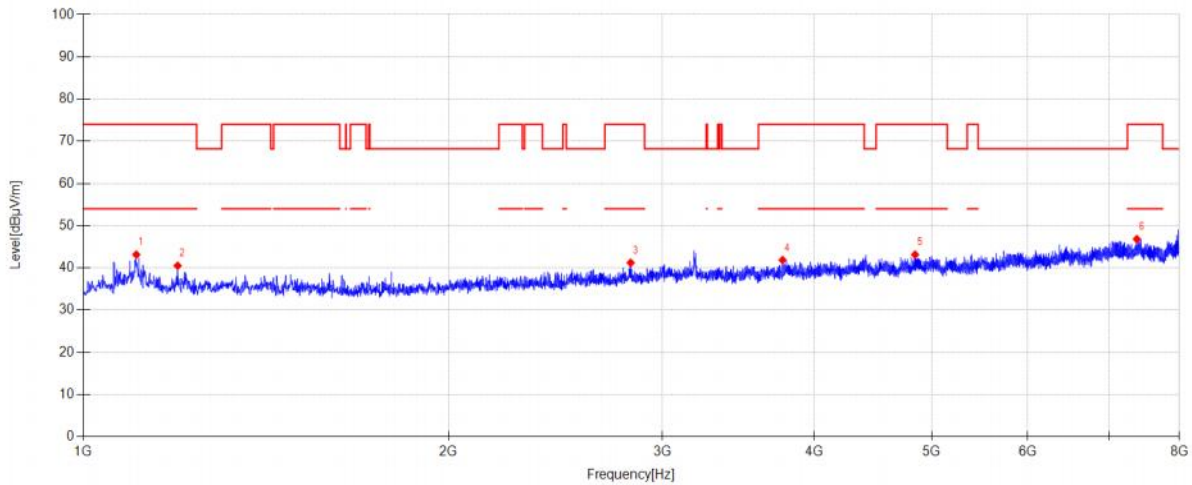


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1105.700	51.93	25.62	2.20	-36.59	43.16	74.00	30.84	PK	Vertical
2	1196.000	49.44	25.52	2.31	-36.75	40.52	74.00	33.48	PK	Vertical
3	2824.900	47.44	28.90	4.00	-39.11	41.23	74.00	32.77	PK	Vertical
4	3768.500	46.88	30.21	4.39	-39.61	41.87	74.00	32.13	PK	Vertical
5	4845.800	45.21	32.83	4.88	-39.78	43.14	74.00	30.86	PK	Vertical
6	7380.500	43.80	36.82	6.07	-39.86	46.83	74.00	27.17	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 20V

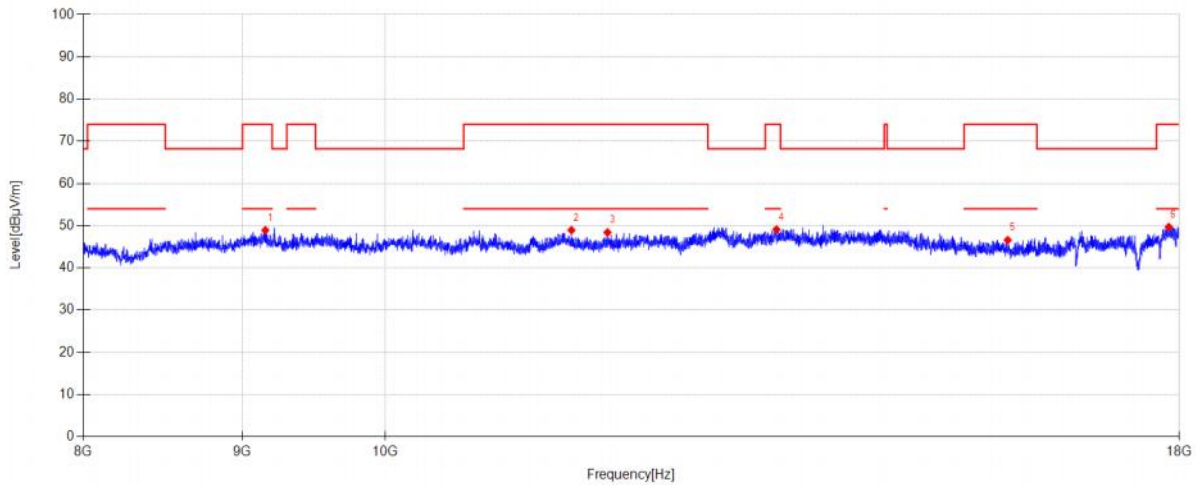


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9153.000	41.67	38.96	7.06	-38.77	48.92	74.00	25.08	PK	Horizontal
2	11480.000	42.09	39.00	7.45	-39.60	48.94	74.00	25.06	PK	Horizontal
3	11790.000	41.81	38.59	7.61	-39.60	48.41	74.00	25.59	PK	Horizontal
4	13360.000	40.05	39.94	7.95	-38.84	49.10	74.00	24.90	PK	Horizontal
5	15853.000	39.30	37.99	8.74	-39.44	46.59	74.00	27.41	PK	Horizontal
6	17860.000	38.08	41.74	9.11	-39.23	49.70	74.00	24.30	PK	Horizontal

Test Mode:	802.11 AX20 MIMO RU8	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 20V

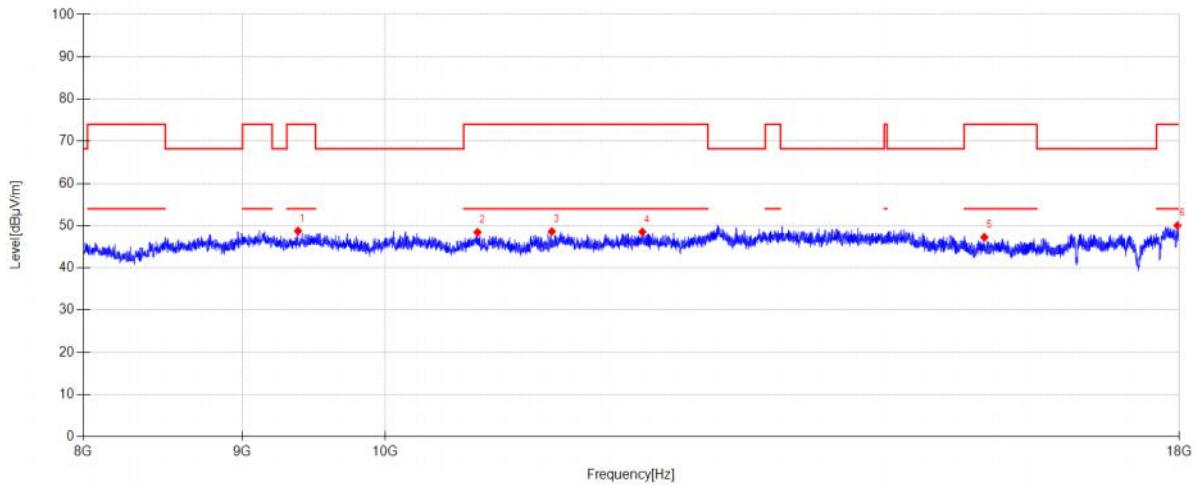


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9377.000	41.91	38.75	7.10	-39.01	48.75	74.00	25.25	PK	Vertical
2	10709.000	41.41	39.46	7.21	-39.63	48.45	74.00	25.55	PK	Vertical
3	11314.000	42.09	38.77	7.36	-39.60	48.62	74.00	25.38	PK	Vertical
4	12098.000	40.86	39.49	7.71	-39.52	48.54	74.00	25.46	PK	Vertical
5	15582.000	39.06	38.91	8.43	-39.14	47.26	74.00	26.74	PK	Vertical
6	17976.000	37.92	42.33	9.08	-39.29	50.04	74.00	23.96	PK	Vertical

Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

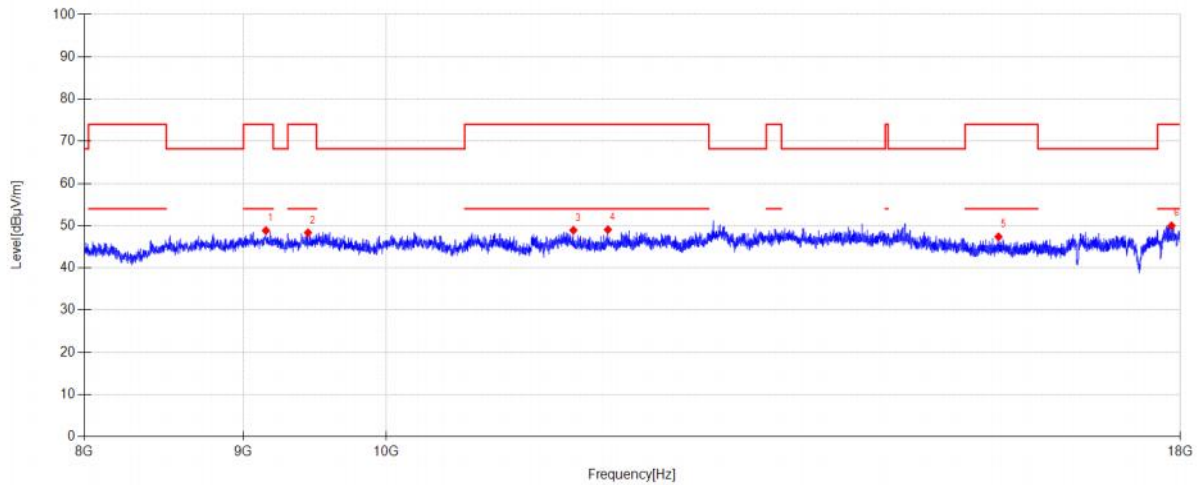

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9150.000	41.56	39.00	7.06	-38.77	48.85	74.00	25.15	PK	Horizontal
2	9440.000	42.03	38.30	7.11	-39.08	48.36	74.00	25.64	PK	Horizontal
3	11488.000	42.15	38.92	7.45	-39.60	48.92	74.00	25.08	PK	Horizontal
4	11785.000	42.46	38.59	7.61	-39.60	49.06	74.00	24.94	PK	Horizontal
5	15734.000	39.68	38.40	8.61	-39.31	47.38	74.00	26.62	PK	Horizontal
6	17883.000	38.19	41.95	9.10	-39.24	50.00	74.00	24.00	PK	Horizontal


Test Mode:	802.11 AX20 MIMO RU0	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

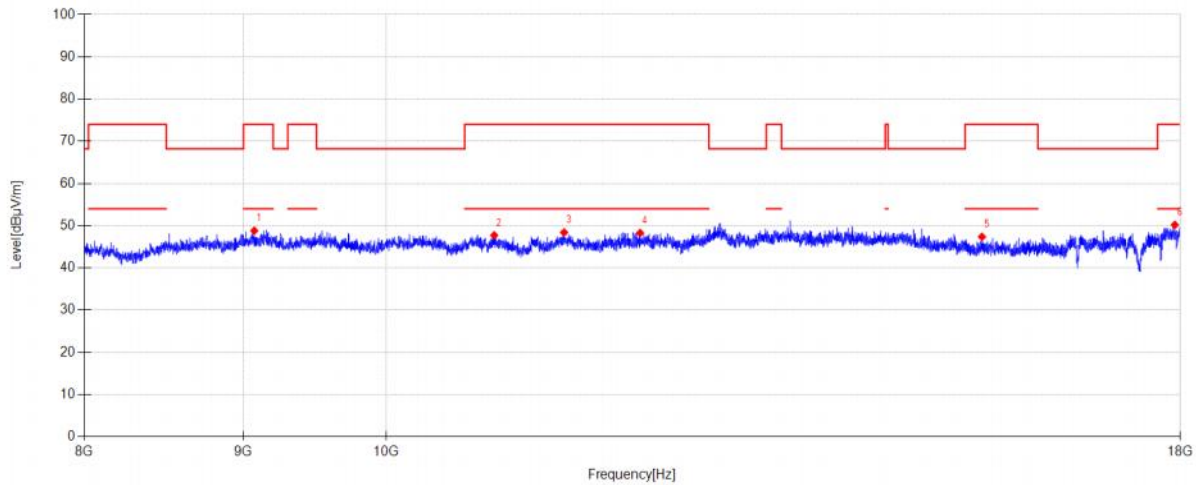

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	9072.000	41.96	38.50	7.04	-38.68	48.82	74.00	25.18	PK	Vertical
2	10834.000	40.95	39.20	7.20	-39.62	47.73	74.00	26.27	PK	Vertical
3	11409.000	40.88	39.71	7.41	-39.60	48.40	74.00	25.60	PK	Vertical
4	12069.000	40.75	39.35	7.72	-39.54	48.28	74.00	25.72	PK	Vertical
5	15543.000	39.36	38.72	8.39	-39.10	47.37	74.00	26.63	PK	Vertical
6	17927.000	38.20	42.18	9.09	-39.26	50.21	74.00	23.79	PK	Vertical


8.3. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 20V

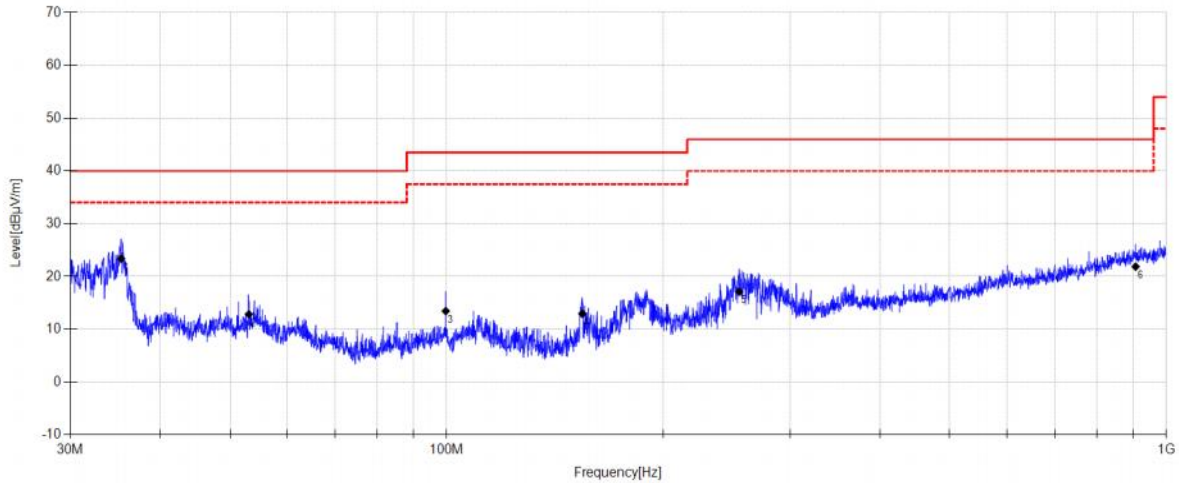

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.300	40.35	11.48	3.85	23.38	40.00	16.62	QP	Horizontal
2	53.125	27.9	13.23	4.01	12.84	40.00	27.16	QP	Horizontal
3	99.714	29.62	11.83	4.30	13.45	43.50	30.05	QP	Horizontal
4	154.336	31.64	9.06	4.62	12.97	43.50	30.53	QP	Horizontal
5	254.977	32.23	12.20	5.10	17.13	46.00	28.87	QP	Horizontal
6	906.500	24.38	22.21	7.13	21.86	46.00	24.14	QP	Horizontal

Test Mode:	802.11 BE20 MIMO	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 20V

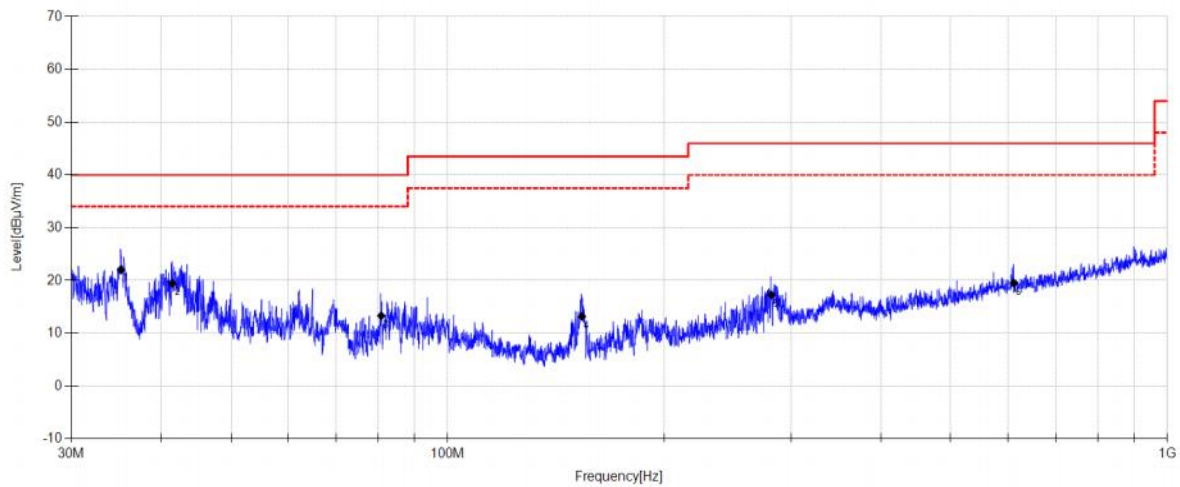

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.176	39.04	11.41	3.85	22.00	40.00	18.00	QP	Vertical
2	41.477	34.91	12.89	3.93	19.43	40.00	20.57	QP	Vertical
3	80.855	32.54	8.87	4.20	13.31	40.00	26.69	QP	Vertical
4	153.688	31.9	9.02	4.61	13.18	43.50	30.32	QP	Vertical
5	281.671	31.36	13.10	5.21	17.27	46.00	28.73	QP	Vertical
6	611.695	26.79	19.19	6.43	19.53	46.00	26.47	QP	Vertical

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. TEST DATA

10.1. APPENDIX A: MAXIMUM CONDUCTED OUTPUT POWER

10.1.1. Test Result-SU Mode

Test Mode	Antenna	Frequency [MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20 MIMO	Ant1	5955	3.06	≤25.79	4.21	7.27	≤24.00	PASS
	Ant2	5955	2.14	≤25.13	4.87	7.01	≤24.00	PASS
	total	5955	5.63	≤25.13	4.87	10.5	≤24.00	PASS
11AX20 SISO	Ant1	5955	5.47	≤25.79	4.21	9.68	≤24.00	PASS
	Ant2	5955	5.64	≤25.13	4.87	10.51	≤24.00	PASS
11AX40 MIMO	Ant1	7085	5.79	≤25.79	4.21	10	≤24.00	PASS
	Ant2	7085	5.85	≤25.13	4.87	10.72	≤24.00	PASS
	total	7085	8.83	≤25.13	4.87	13.7	≤24.00	PASS
11AX40 SISO	Ant1	7085	8.55	≤25.79	4.21	12.76	≤24.00	PASS
	Ant2	7085	8.94	≤25.13	4.87	13.81	≤24.00	PASS
11AX80MIMO	Ant1	6945	8.75	≤25.79	4.21	12.96	≤24.00	PASS
	Ant2	6945	9.01	≤25.13	4.87	13.88	≤24.00	PASS
	total	6945	11.89	≤25.13	4.87	16.76	≤24.00	PASS
11AX80 SISO	Ant1	6945	11.74	≤25.79	4.21	15.95	≤24.00	PASS
	Ant2	6945	11.91	≤25.13	4.87	16.78	≤24.00	PASS
11AX160 MIMO	Ant1	6505	11.49	≤25.79	4.21	15.7	≤24.00	PASS
	Ant2	6505	11.48	≤25.13	4.87	16.35	≤24.00	PASS
	total	6505	14.50	≤25.13	4.87	19.37	≤24.00	PASS
11AX160 SISO	Ant1	6505	11.47	≤25.79	4.21	15.68	≤24.00	PASS

	Ant2	6505	14.66	≤ 25.13	4.87	19.53	≤ 24.00	PASS
11BE320 MIMO	Ant1	6745	13.94	≤ 25.79	4.21	18.15	≤ 24.00	PASS
	Ant2	6745	14.00	≤ 25.13	4.87	18.87	≤ 24.00	PASS
	total	6745	16.98	≤ 25.13	4.87	21.85	≤ 24.00	PASS
11BE320 SISO	Ant1	6745	17.11	≤ 25.79	4.21	21.32	≤ 24.00	PASS
	Ant2	6745	16.84	≤ 25.13	4.87	21.71	≤ 24.00	PASS

10.2. APPENDIX B: CONTENTION BASED PROTOCOL

10.2.1. Test Result-SU Mode

Summary table

Contention Based protocol for 802.11be_Bandwidth_20MHz									
UNII Band	Channel Number	EUT Frequency (MHz)	AWGN Frequency (MHz)	AWGN Power (dBm)	Detection Limit (dBm)	Number Detected [n]	Result [%]	Limit [%]	Verdict
5	45	6175	6175	-63.40	-62	10	100	90	PASS
6	105	6475	6475	-63.40	-62	10	90	90	PASS
7	149	6695	6695	-64.40	-62	10	100	90	PASS
8	209	6995	6995	-70.40	-62	10	90	90	PASS


Contention Based protocol for 802.11be_Bandwidth_320MHz									
UNII Band	Channel Number	EUT Frequency (MHz)	AWGN Frequency (MHz)	AWGN Power (dBm)	Detection Limit (dBm)	Number Detected [n]	Result [%]	Limit [%]	Verdict
5	31	6265	6110	-63.16	-62	10	90	90	PASS
			6265	-63.40	-62	10	90	90	PASS
			6420	-63.21	-62	10	100	90	PASS
5-6-7	95	6425	6270	-63.29	-62	10	90	90	PASS
			6425	-63.40	-62	10	90	90	PASS
			6580	-63.73	-62	10	90	90	PASS
6-7	127	6585	6430	-63.60	-62	10	90	90	PASS
			6585	-63.26	-62	10	90	90	PASS
			6740	-62.97	-62	10	90	90	PASS
7-8	191	6905	6750	-63.73	-62	10	90	90	PASS
			6905	-63.26	-62	10	90	90	PASS
			7060	-63.02	-62	10	90	90	PASS


Result Tables

Contention-based Protocol Threshold minimum level


Test Mode	Channel	Interference Frequency [MHz]		Status	Awgn Power [dBm]	Gain [dB]	Path Loss [dB]	Adjusted Power [dBm]	Limit [dBm]	Detection Rate [%]	Detection Limit [%]	Verdict
11BE20 MIMO	6175	Center	6175	OFF	-62.52	1.38	0.5	-63.40	-62	100	90	PASS
		Center	6175	Minimal	-63.52	1.38	0.5	-64.40	-62	60	---	---
		Center	6175	ON	-68.52	1.38	0.5	-69.40	-62	0	---	---
	6475	Center	6475	OFF	-62.52	1.38	0.5	-63.40	-62	90	90	PASS
		Center	6475	Minimal	-63.52	1.38	0.5	-64.40	-62	30	---	---
		Center	6475	ON	-69.52	1.38	0.5	-70.40	-62	0	---	---
	6695	Center	6695	OFF	-63.52	1.38	0.5	-64.40	-62	100	90	PASS
		Center	6695	Minimal	-64.52	1.38	0.5	-65.40	-62	20	---	---
		Center	6695	ON	-71.52	1.38	0.5	-72.40	-62	0	---	---
	6995	Center	6995	OFF	-69.52	1.38	0.5	-70.40	-62	90	90	PASS
		Center	6995	Minimal	-70.52	1.38	0.5	-71.40	-62	30	---	---
		Center	6995	ON	-73.52	1.38	0.5	-74.40	-62	0	---	---
11BE320 MIMO	6265	Low	6110	OFF	-62.28	1.38	0.5	-63.16	-62	100	90	PASS
		Low	6110	Minimal	-63.23	1.38	0.5	-64.11	-62	60	---	---
		Low	6110	ON	-69.65	1.38	0.5	-70.53	-62	0	---	---
		Center	6265	OFF	-62.52	1.38	0.5	-63.40	-62	90	90	PASS
		Center	6265	Minimal	-63.52	1.38	0.5	-64.40	-62	30	---	---
		Center	6265	ON	-69.52	1.38	0.5	-70.40	-62	0	---	---
		High	6420	OFF	-62.33	1.38	0.5	-63.21	-62	90	90	PASS
		High	6420	Minimal	-63.46	1.38	0.5	-64.34	-62	30	---	---
		High	6420	ON	-69.75	1.38	0.5	-70.63	-62	0	---	---
	6425	Low	6270	OFF	-62.41	1.38	0.5	-63.29	-62	100	90	PASS
		Low	6270	Minimal	-63.68	1.38	0.5	-64.56	-62	30	---	---
		Low	6270	ON	-70.53	1.38	0.5	-71.41	-62	0	---	---
		Center	6425	OFF	-62.52	1.38	0.5	-63.40	-62	90	90	PASS
		Center	6425	Minimal	-63.52	1.38	0.5	-64.40	-62	30	---	---
		Center	6425	ON	-71.52	1.38	0.5	-72.40	-62	0	---	---
		High	6580	OFF	-62.85	1.38	0.5	-63.73	-62	90	90	PASS
		High	6580	Minimal	-63.29	1.38	0.5	-64.17	-62	30	---	---
		High	6580	ON	-70.03	1.38	0.5	-70.91	-62	0	---	---
	6585	Low	6430	OFF	-62.72	1.38	0.5	-63.60	-62	90	90	PASS
		Low	6430	Minimal	-63.55	1.38	0.5	-64.43	-62	30	---	---
		Low	6430	ON	-70.42	1.38	0.5	-71.30	-62	0	---	---
		Center	6585	OFF	-62.38	1.38	0.5	-63.26	-62	90	90	PASS
		Center	6585	Minimal	-63.44	1.38	0.5	-64.32	-62	30	---	---
		Center	6585	ON	-71.48	1.38	0.5	-72.36	-62	0	---	---
		High	6740	OFF	-62.09	1.38	0.5	-62.97	-62	90	90	PASS
		High	6740	Minimal	-63.83	1.38	0.5	-64.71	-62	30	---	---
		High	6740	ON	-70.77	1.38	0.5	-71.65	-62	0	---	---
	6905	Low	6750	OFF	-62.85	1.38	0.5	-63.73	-62	90	90	PASS
		Low	6750	Minimal	-63.74	1.38	0.5	-64.62	-62	30	---	---
		Low	6750	ON	-70.32	1.38	0.5	-71.20	-62	0	---	---
		Center	6905	OFF	-62.38	1.38	0.5	-63.26	-62	90	90	PASS
		Center	6905	Minimal	-63.44	1.38	0.5	-64.32	-62	30	---	---
		Center	6905	ON	-69.33	1.38	0.5	-70.21	-62	0	---	---
		High	7060	OFF	-62.14	1.38	0.5	-63.02	-62	90	90	PASS
		High	7060	Minimal	-63.25	1.38	0.5	-64.13	-62	30	---	---
		High	7060	ON	-62.54	1.38	0.5	-63.42	-62	0	---	---

10.2.2. Test Graphs

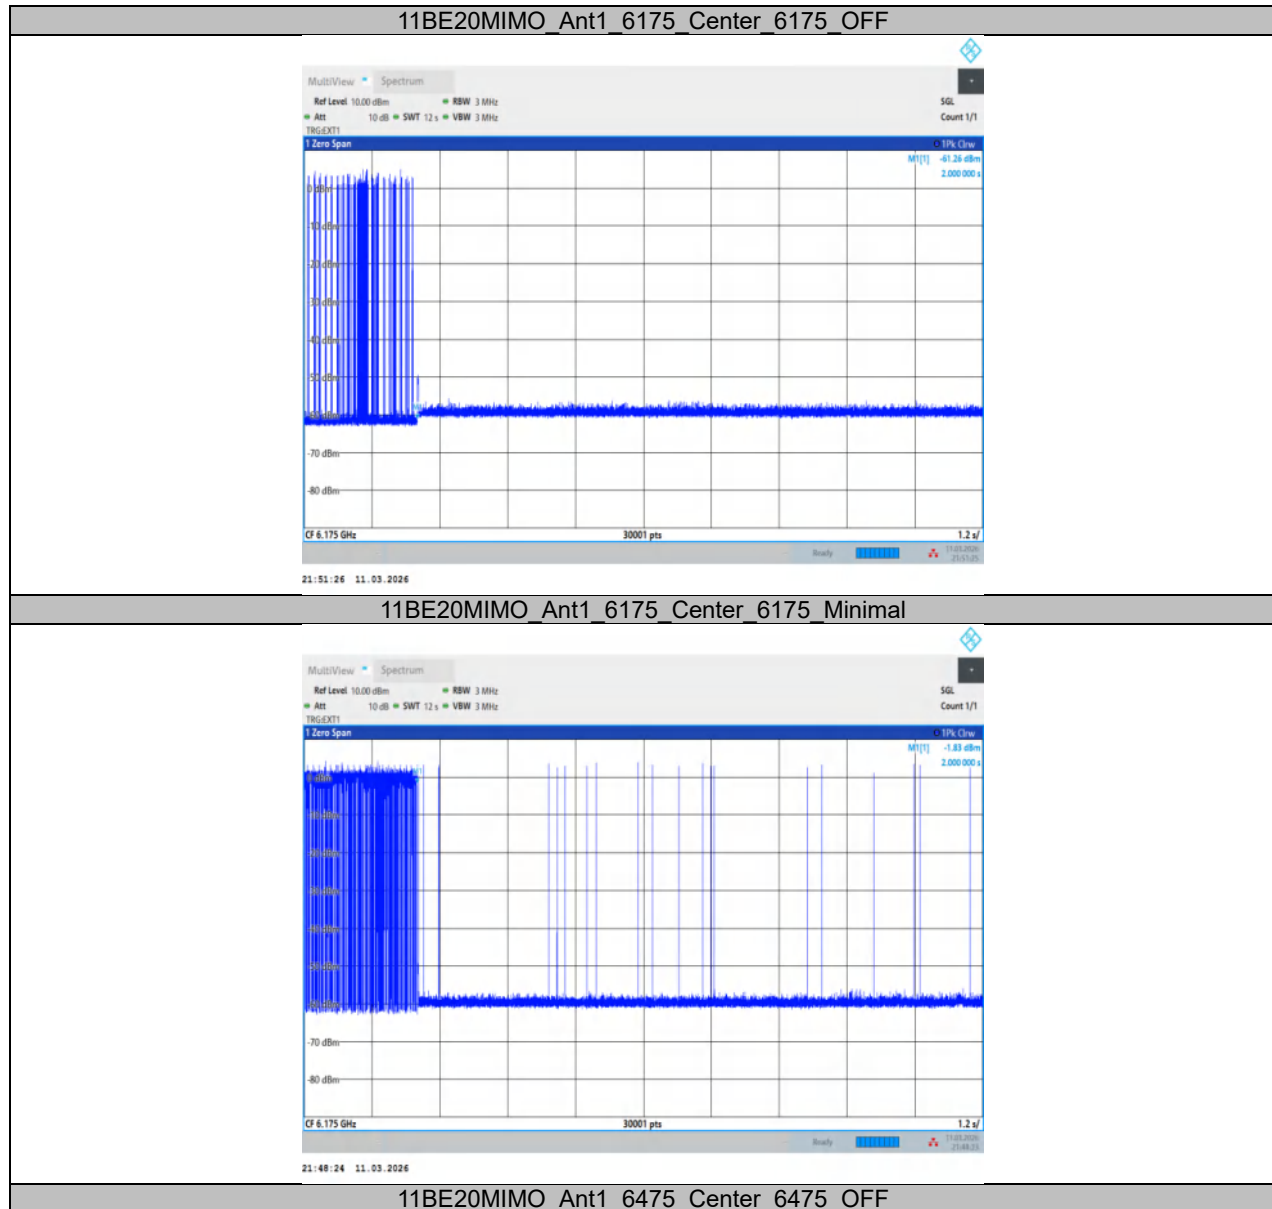


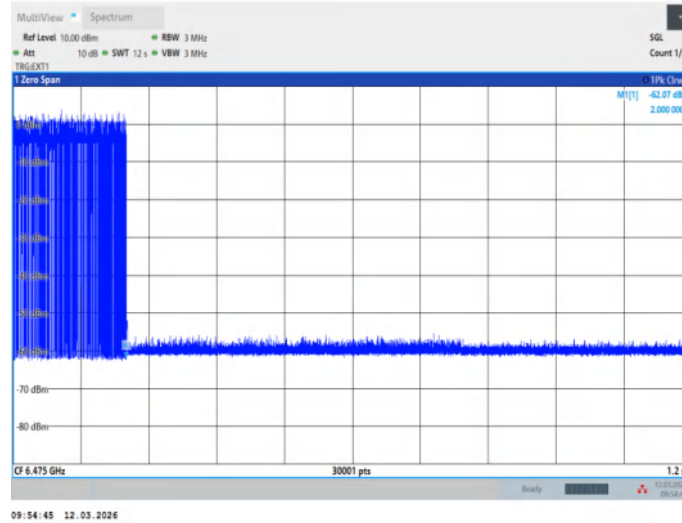


11BE20MIMO_Ant1_6475_Center_6475_Minimal

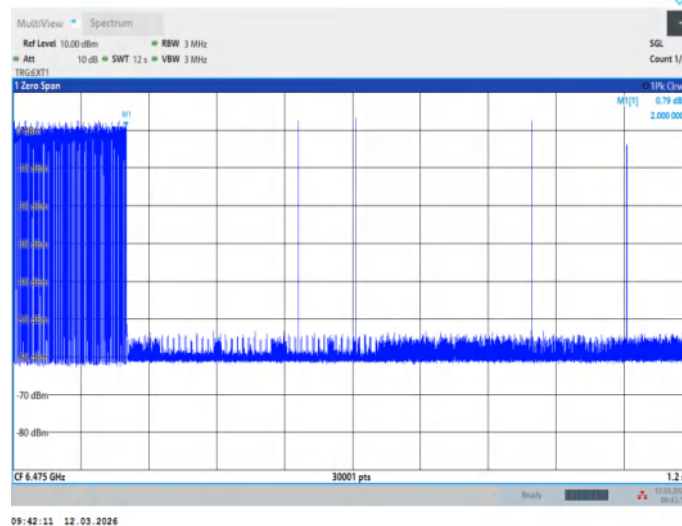


11BE20MIMO_Ant1_6695_Center_6695_OFF

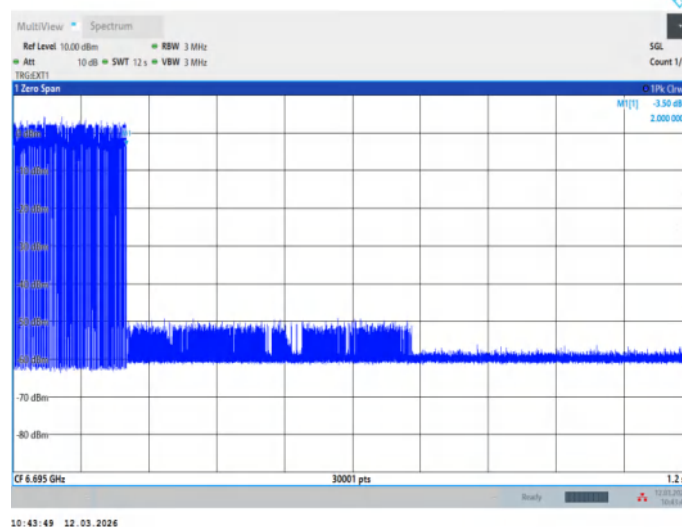


11BE20MIMO_Ant1_6695_Center_6695_Minimal

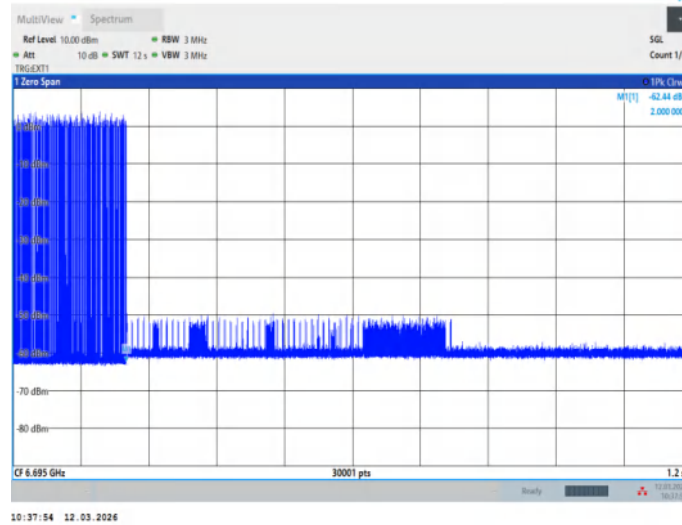


11BE20MIMO_Ant1_6995_Center_6995_OFF

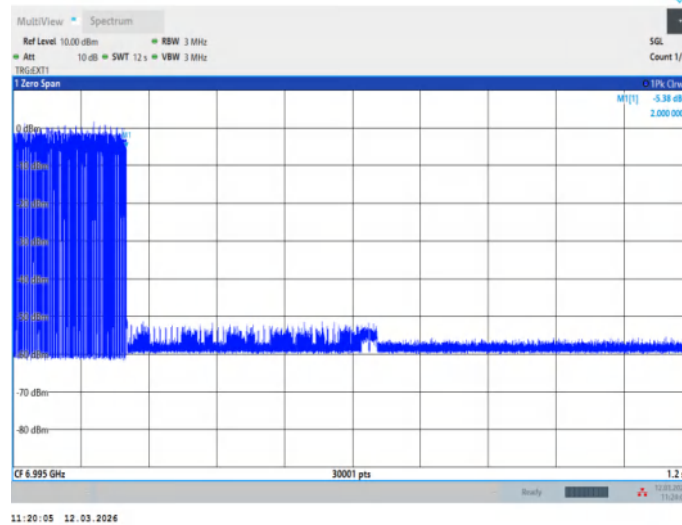


11BE20MIMO_Ant1_6995_Center_6995_Minimal

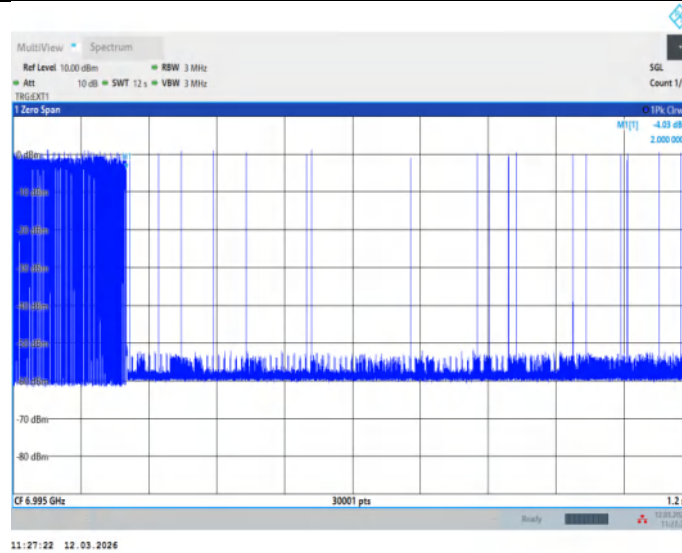


11BE320MIMO_Ant1_6265_Low_6110_OFF

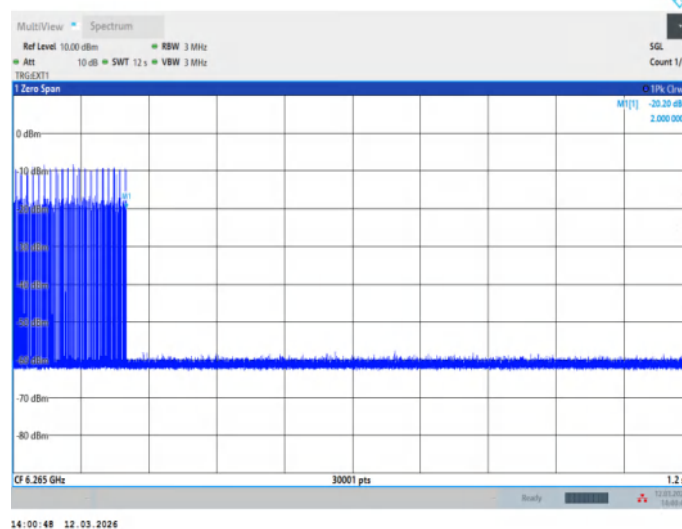


11BE320MIMO_Ant1_6265_Low_6110_Minimal

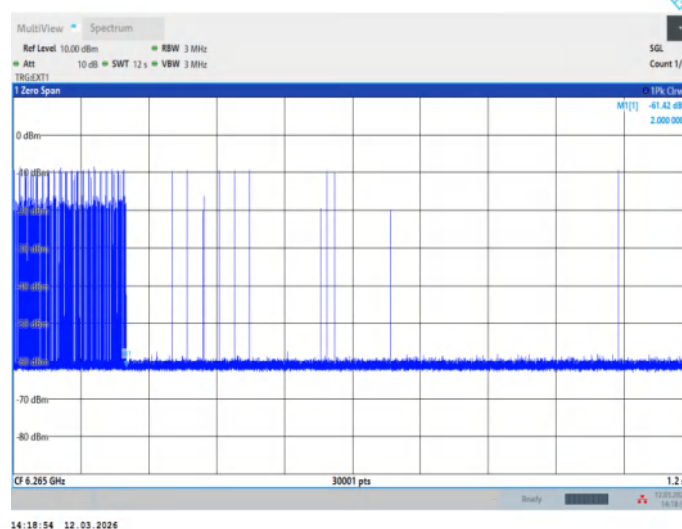


11BE320MIMO_Ant1_6265_Center_6265_OFF

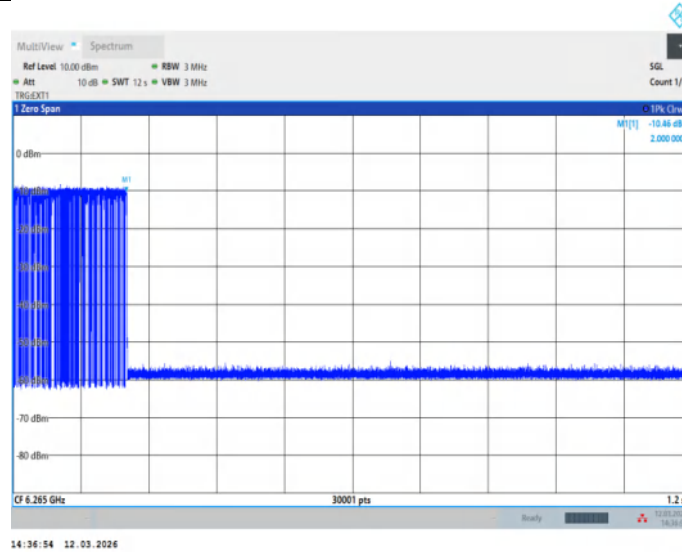


11BE320MIMO_Ant1_6265_Center_6265_Minimal

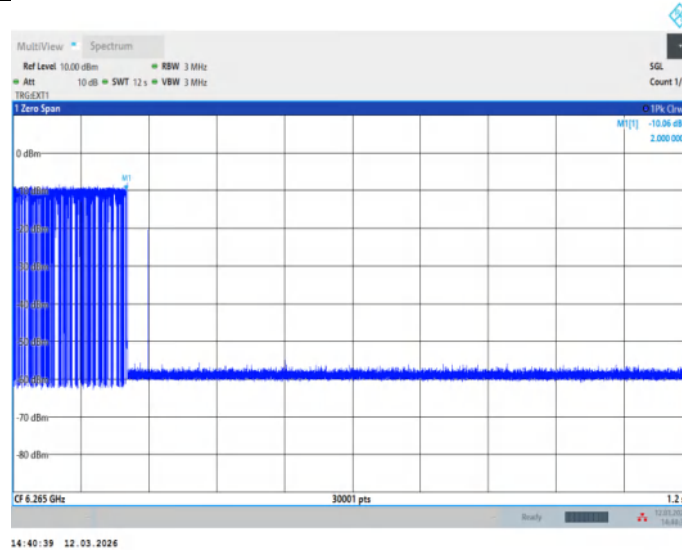


11BE320MIMO_Ant1_6265_High_6420_OFF

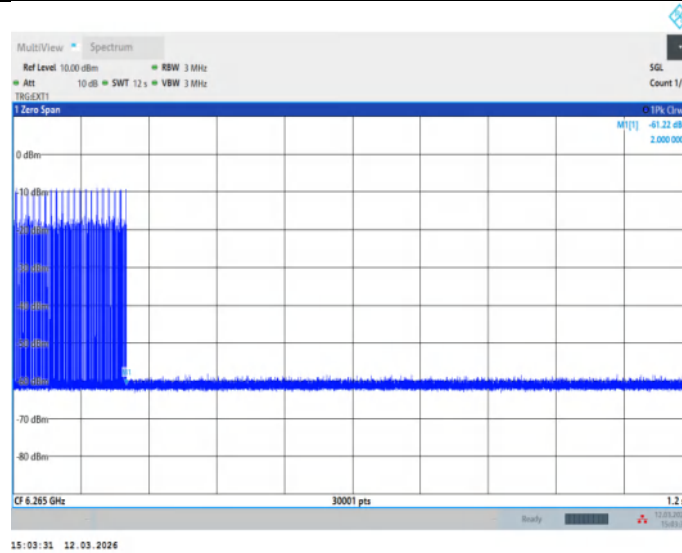


11BE320MIMO_Ant1_6265_High_6420_Minimal

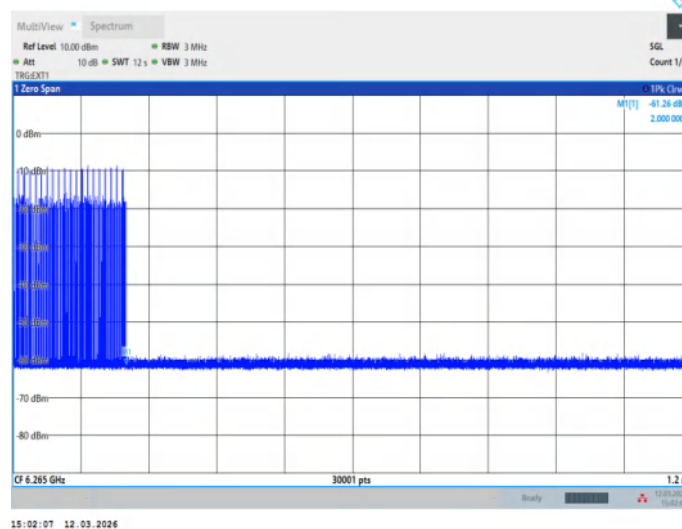

11BE320MIMO_Ant1_6425_Low_6270_OFF

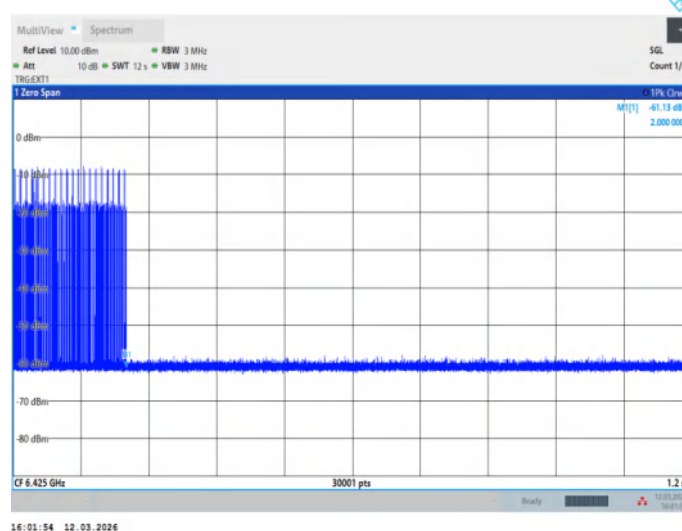


11BE320MIMO_Ant1_6425_Low_6270_Minimal

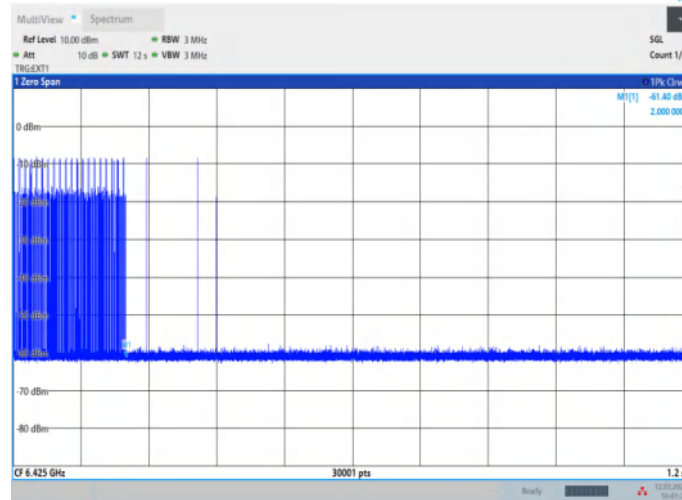


16:07:22 12.03.2026

11BE320MIMO_Ant1_6425_Center_6425_OFF

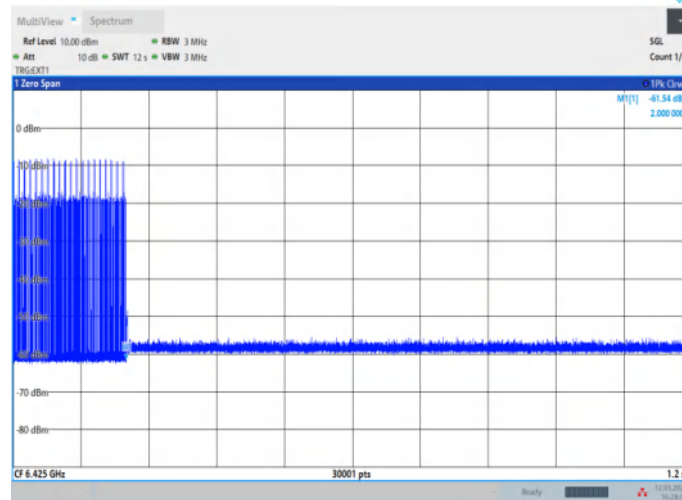


16:28:56 12.03.2026


11BE320MIMO_Ant1_6425_Center_6425_Minimal

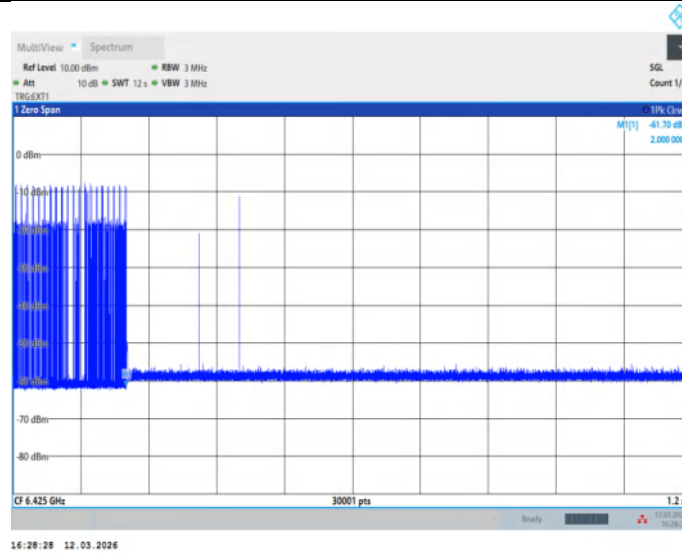


11BE320MIMO_Ant1_6425_High_6580_OFF

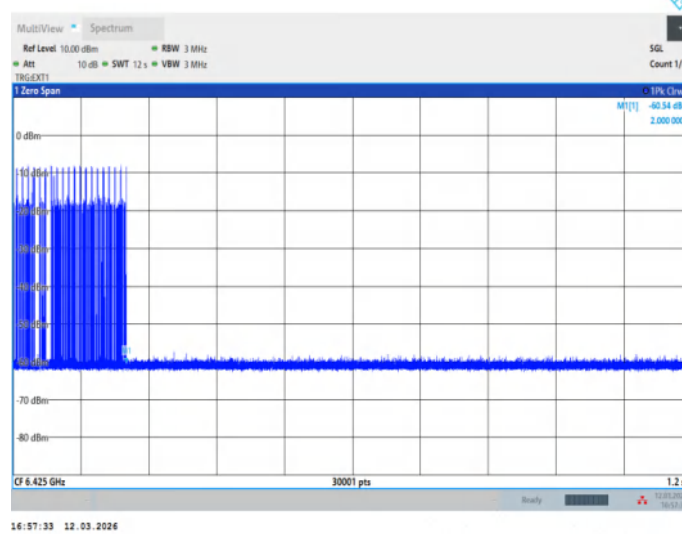


11BE320MIMO_Ant1_6425_High_6580_Minimal

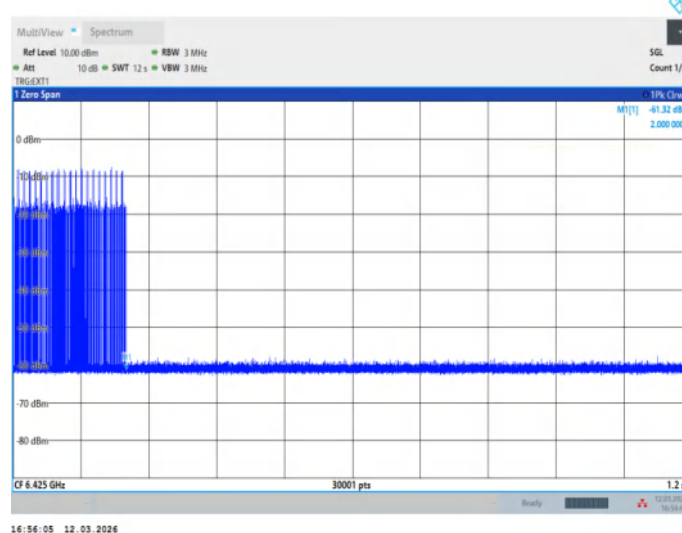


11BE320MIMO_Ant1_6585_Low_6430_OFF

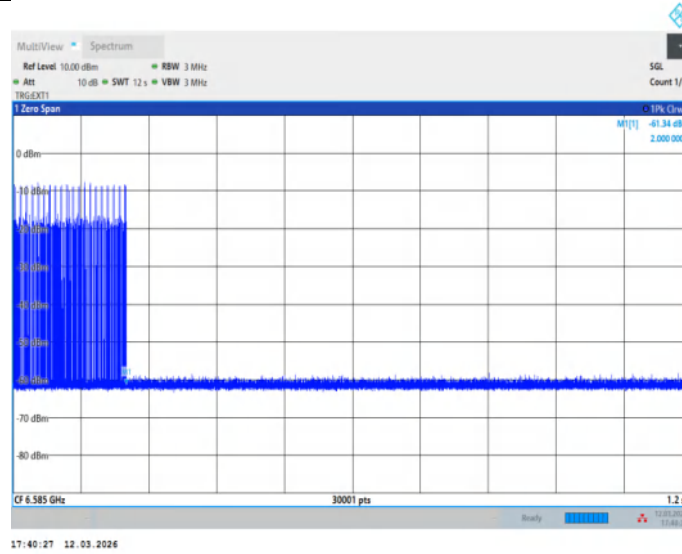


11BE320MIMO_Ant1_6585_Low_6430_Minimal

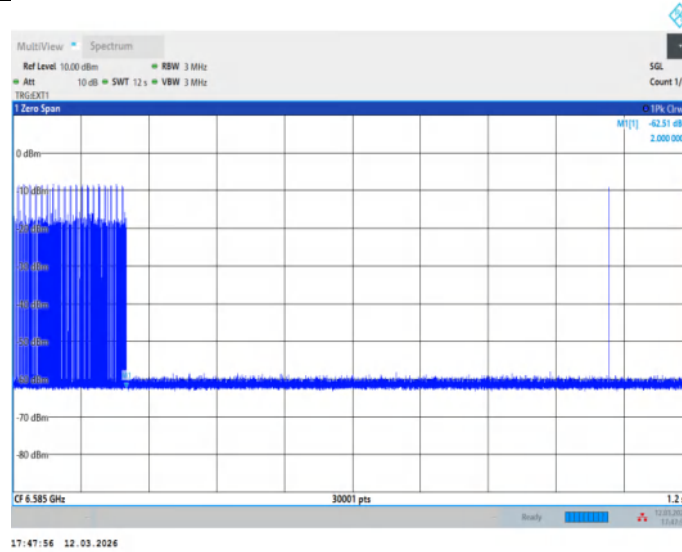


11BE320MIMO_Ant1_6585_Center_6585_OFF

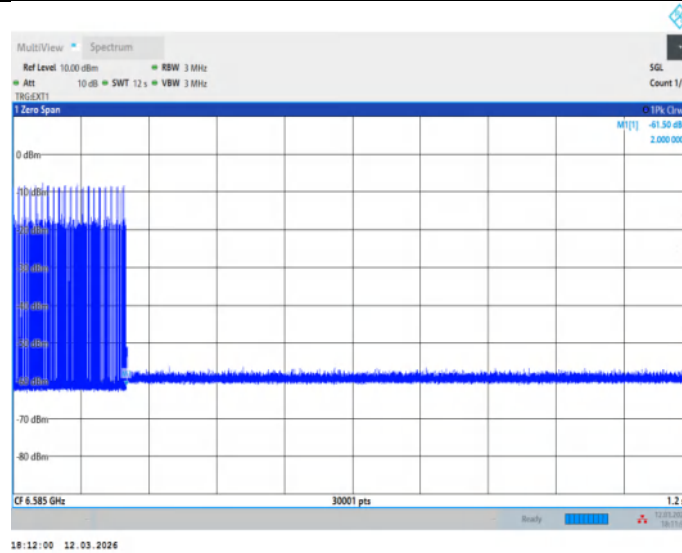


11BE320MIMO_Ant1_6585_Center_6585_Minimal

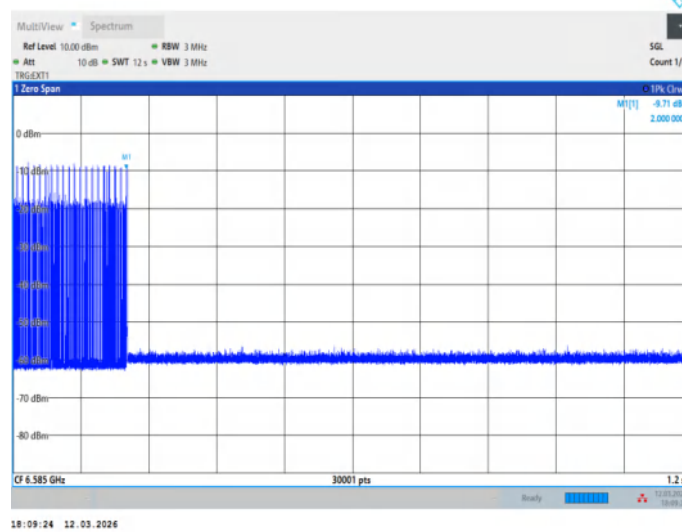


11BE320MIMO_Ant1_6585_High_6740_OFF

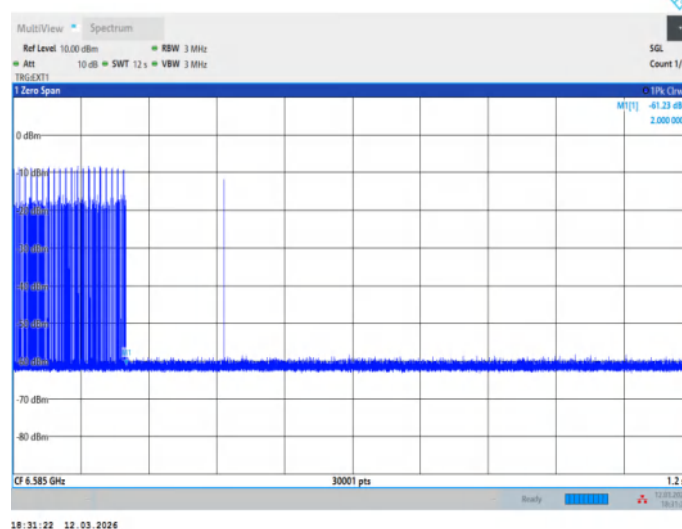


11BE320MIMO_Ant1_6585_High_6740_Minimal

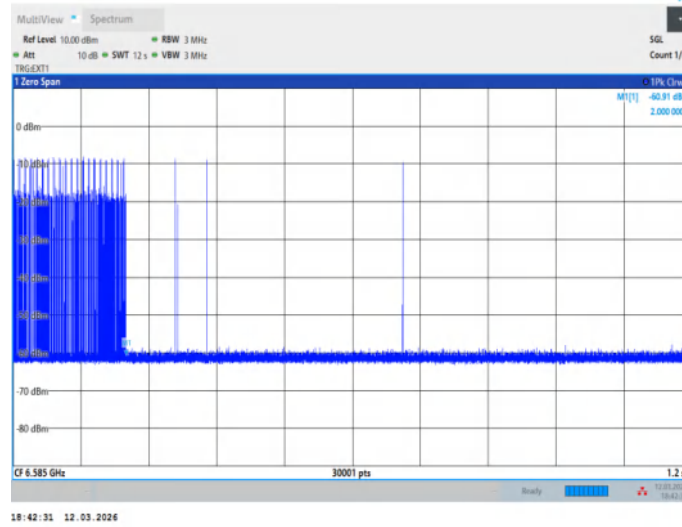


11BE320MIMO_Ant1_6905_Low_6750_OFF

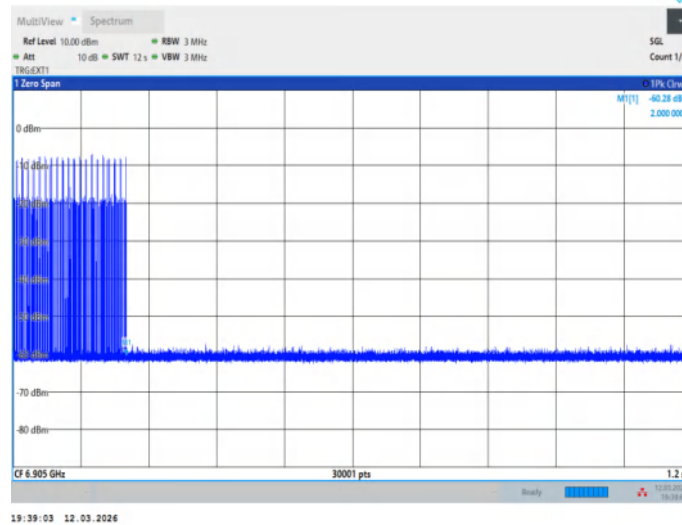


11BE320MIMO_Ant1_6905_Low_6750_Minimal

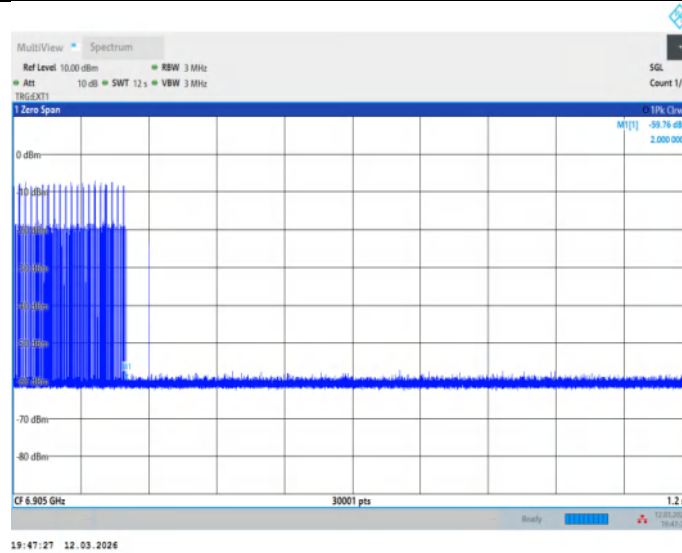


11BE320MIMO_Ant1_6905_Center_6905_OFF

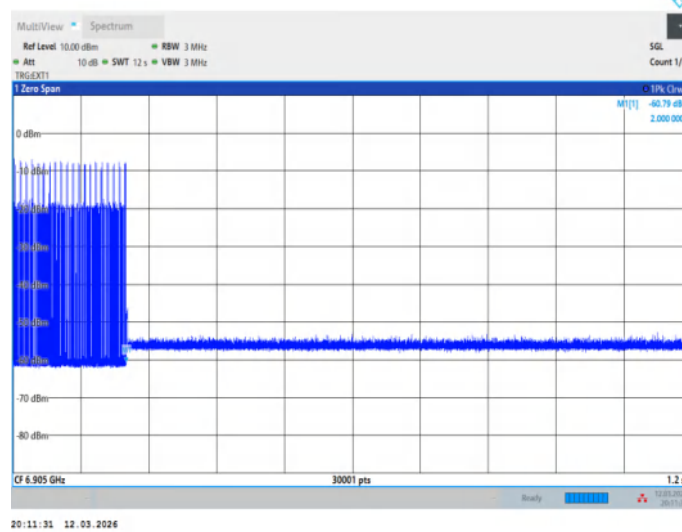


11BE320MIMO_Ant1_6905_Center_6905_Minimal

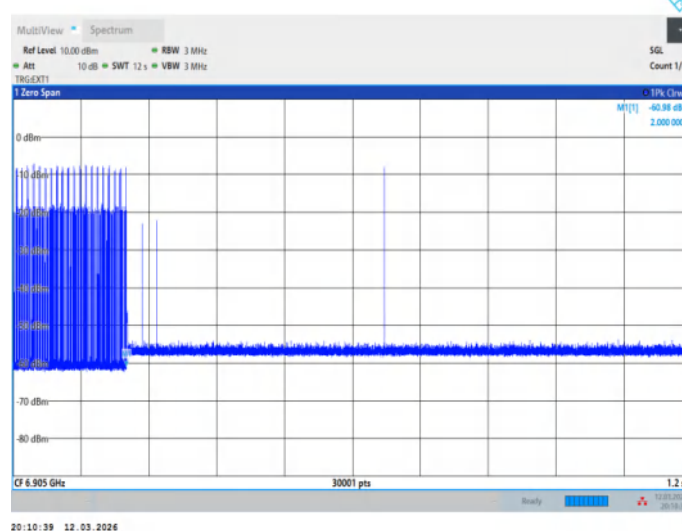

11BE320MIMO_Ant1_6905_High_7060_OFF

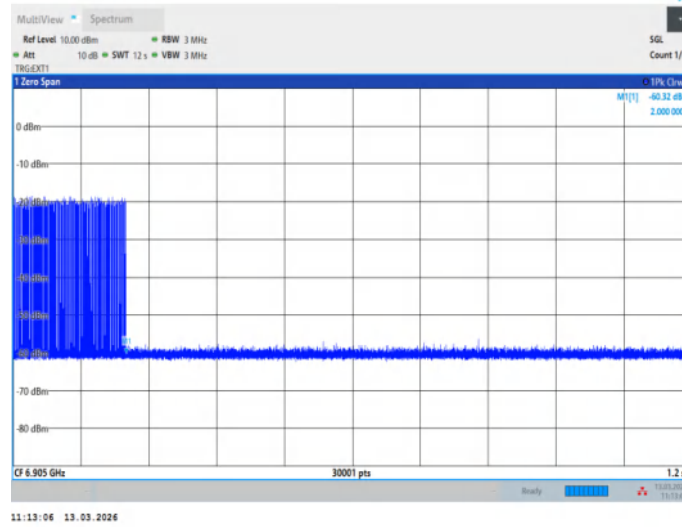

11BE320MIMO_Ant1_6905_High_7060_Minimal

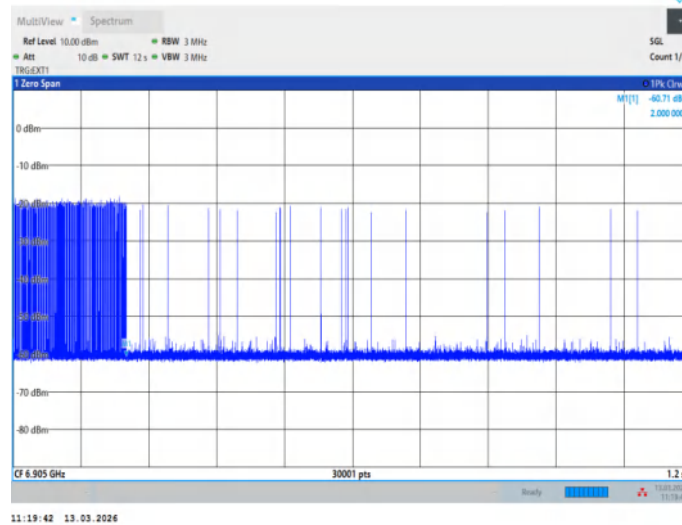

END OF REPORT