



产 品 规 格

SPECIFICATION

一、Product dimensions


Technical drawing of a circular magnetic tape with dimensions A, B, C, D, E, F, G. Labels include 'Solder Coat', 'TAPE', '正面双面胶' (Front double-sided adhesive), and '反面双面胶' (Back double-sided adhesive).	diameter A	42.4±0.5mm
	outer diameter B	40±1.5mm
	inner diameter C	21.7±0.5mm
	thickness D	<1.4mm
	Line length E	43mm±3mm
	Solder length F	3±2mm
	Magnetic opening diameter G	5±0.3mm
	Magnetic thickness	0.5±0.05mm
	Magnetic disk shape	Circular double groove
	Adhesive thickness	Ordinary double-sided adhesive tape on both sides
	Shattered black film	N/A

Company Name: Shenzhen Chenxing Electronic Technology Co., Ltd

Address: 5th Floor, Building 1, Xinkecheng Technology Industrial Park, No. 51 Dabao Road, Xinan Street, Bao'an District, Shenzhen



二、schematic diagram

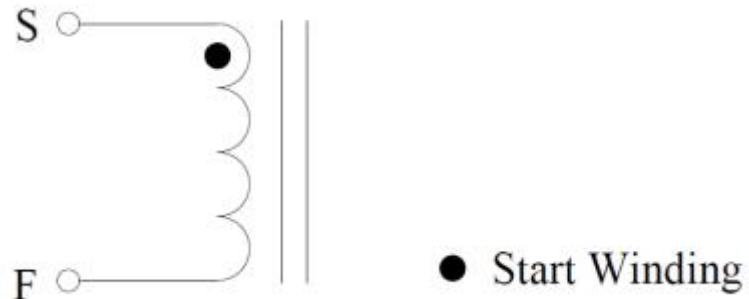

三、Winding parameters

端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
S	F	0.08*65P Double stranded and winding	11Ts	CCW

四、Electrical Characteristics:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND.	S-F	L: 8.1uH±10%	100KHz/1.0V	LCZ METER 1062B

五、Product physical image:



Company Name: Shenzhen Chenxing Electronic Technology Co., Ltd

Address: 5th Floor, Building 1, Xinkecheng Technology Industrial Park, No. 51 Dabao Road, Xinan Street, Bao'an District, Shenzhen