


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	2.088	2.176	95.96	0.18	0.48	0.23
NVNT	a	5200	2.088	2.176	95.96	0.18	0.48	0.27
NVNT	a	5240	2.088	2.176	95.96	0.18	0.48	0.26
NVNT	n20	5180	7.97	8.06	98.88	0.05	0.13	0.22
NVNT	n20	5200	7.975	8.06	98.95	0.05	0.13	0.29
NVNT	n20	5240	7.97	8.06	98.88	0.05	0.13	0.21
NVNT	n40	5190	7.955	8.045	98.88	0.05	0.13	0.31
NVNT	n40	5230	7.96	8.045	98.94	0.05	0.13	0.32

Test Graphs


Duty Cycle NVNT a 5180MHz

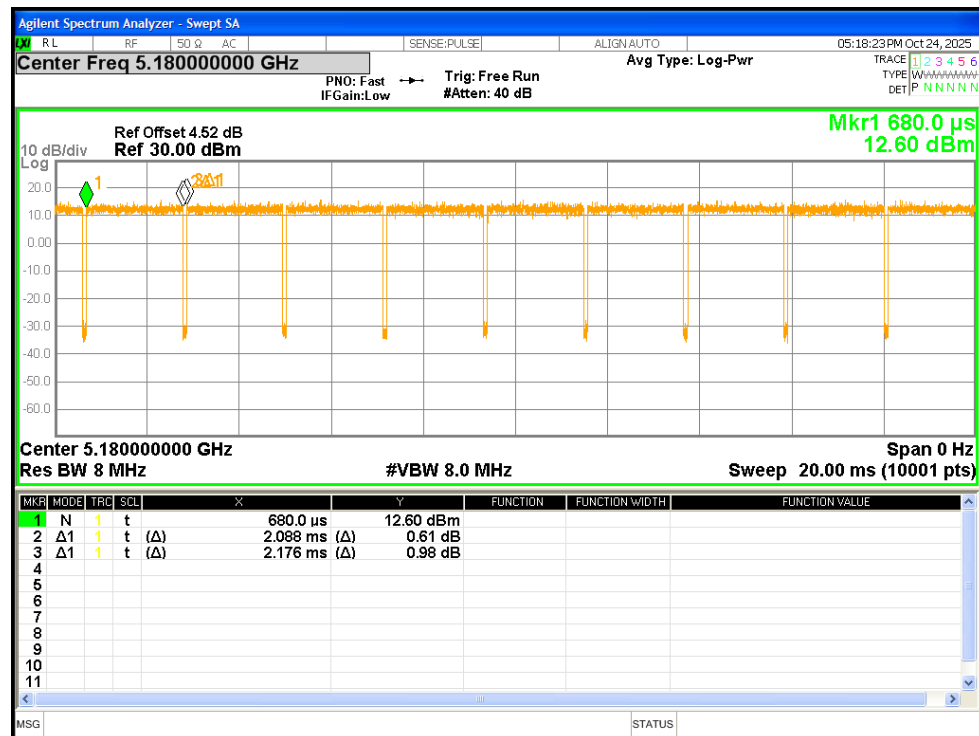


Duty Cycle NVNT a 5200MHz

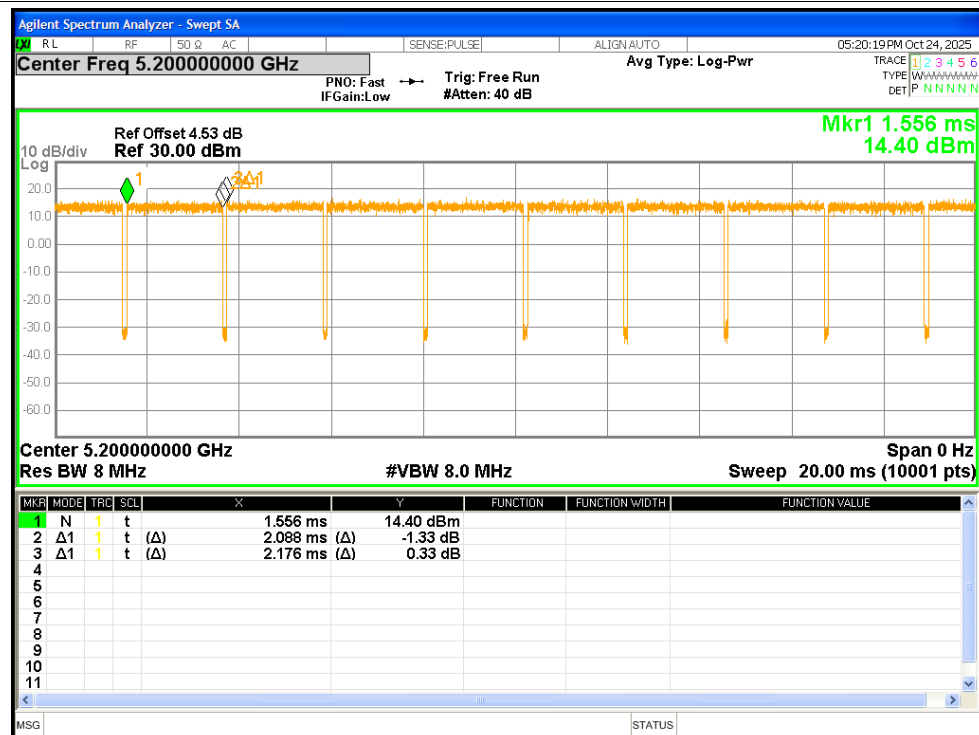



Duty Cycle NVNT a 5240MHz

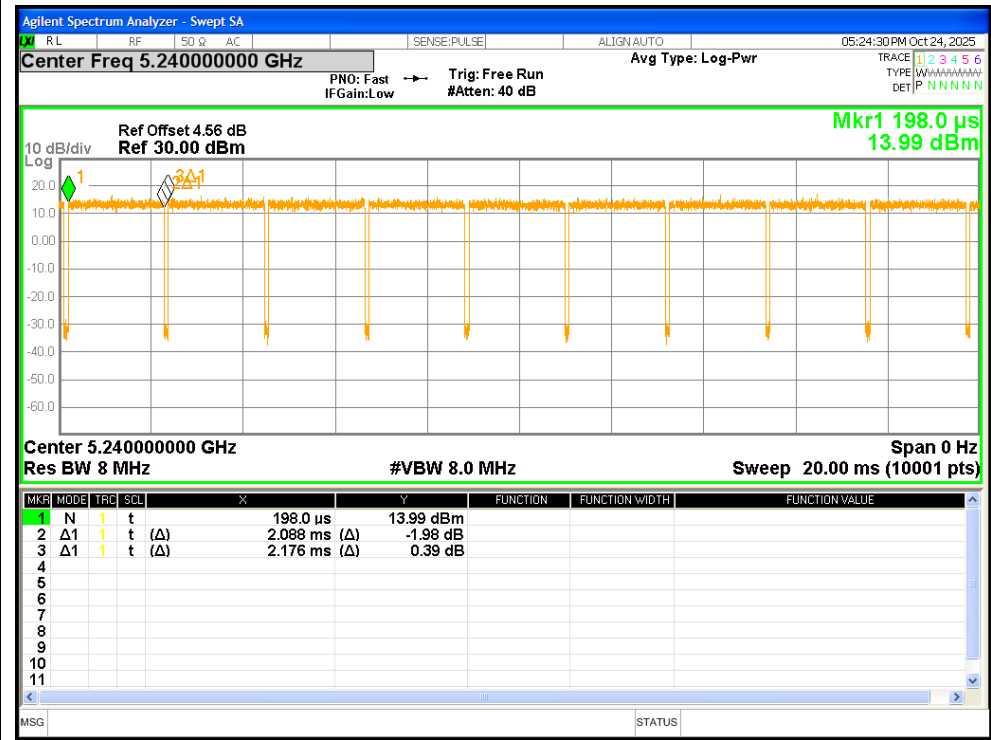

Duty Cycle NVNT n20 5180MHz


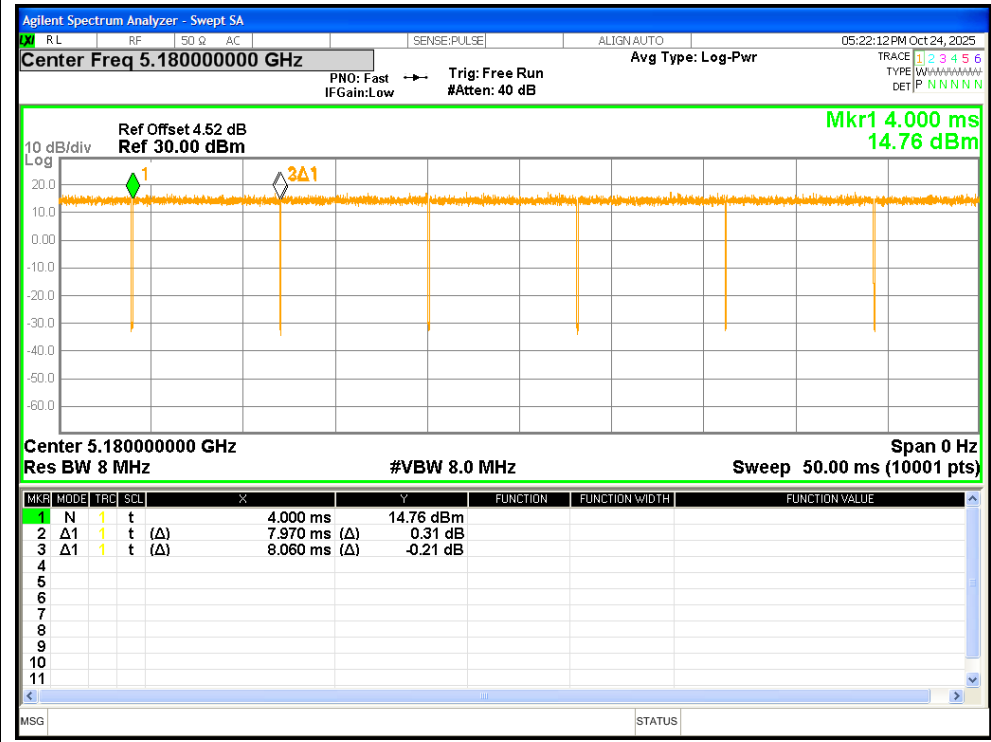




Duty Cycle NVNT n20 5200MHz

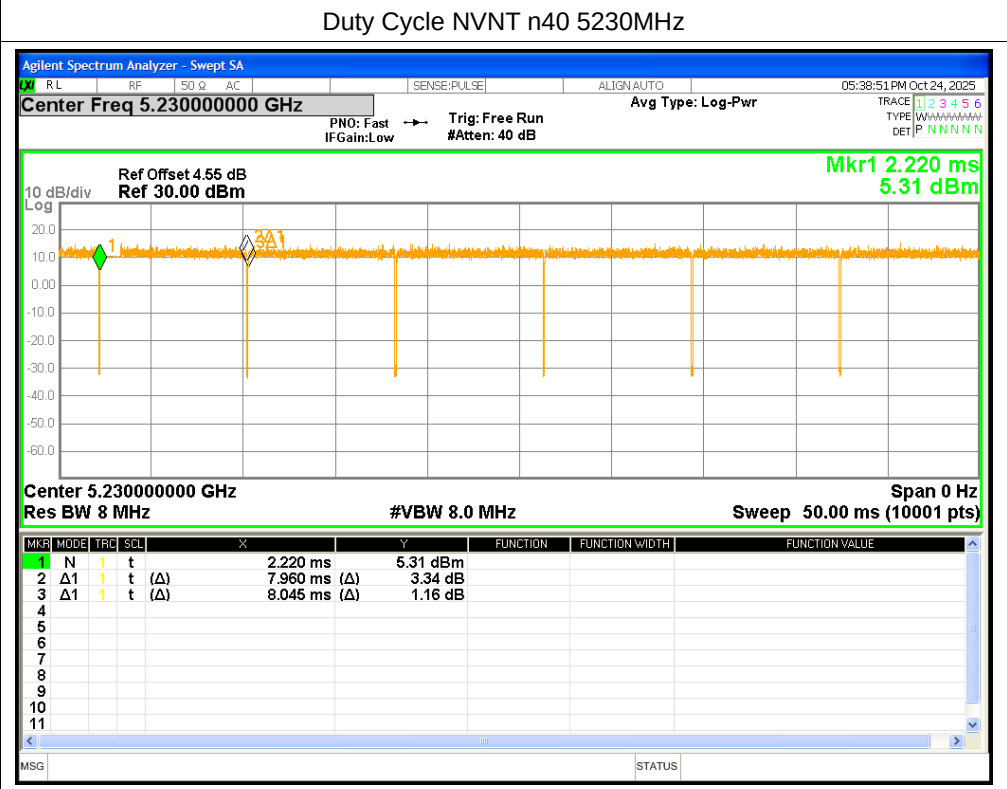
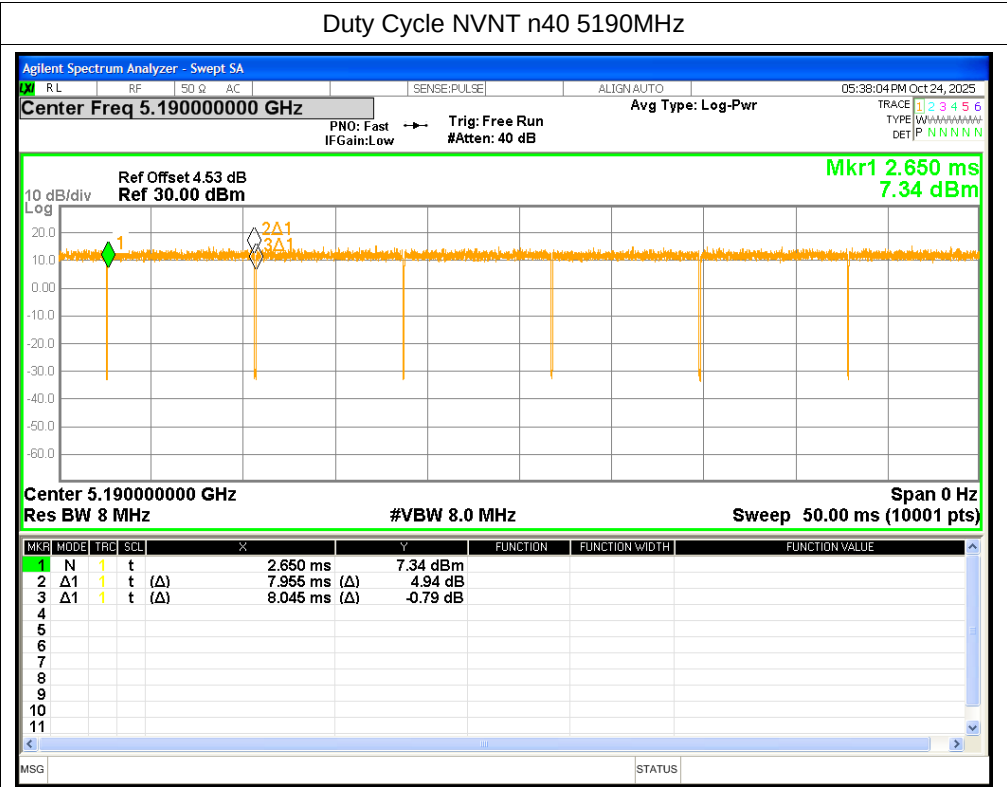




Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.27	0.18	11.45	<=24	Pass
NVNT	a	5200	11.19	0.18	11.37	<=24	Pass
NVNT	a	5240	11.9	0.18	12.08	<=24	Pass
NVNT	n20	5180	11.79	-	11.79	<=24	Pass
NVNT	n20	5200	12.09	-	12.09	<=24	Pass
NVNT	n20	5240	12.75	-	12.75	<=24	Pass
NVNT	n40	5190	12.15	-	12.15	<=24	Pass
NVNT	n40	5230	12.23	-	12.23	<=24	Pass

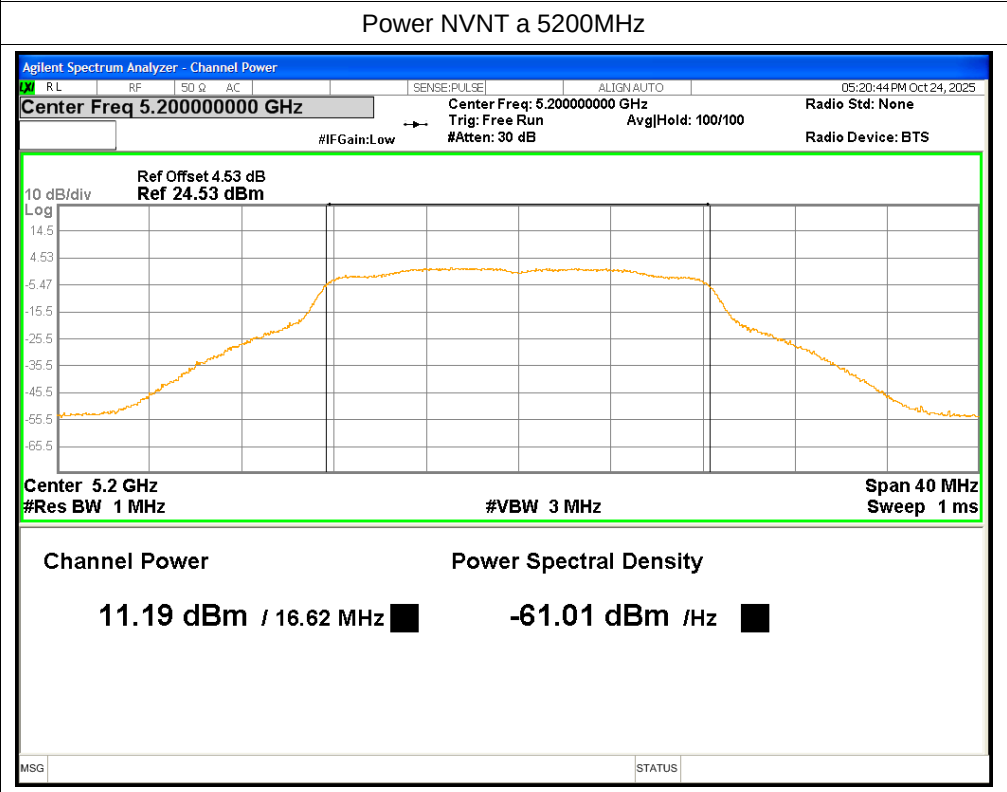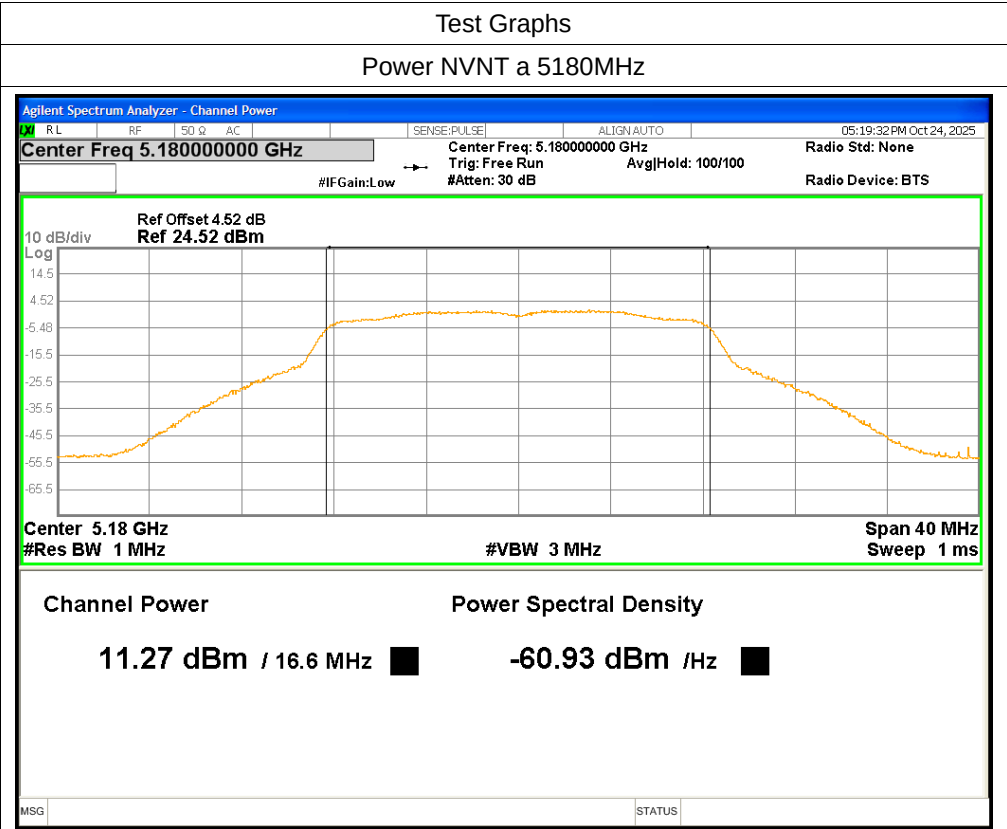

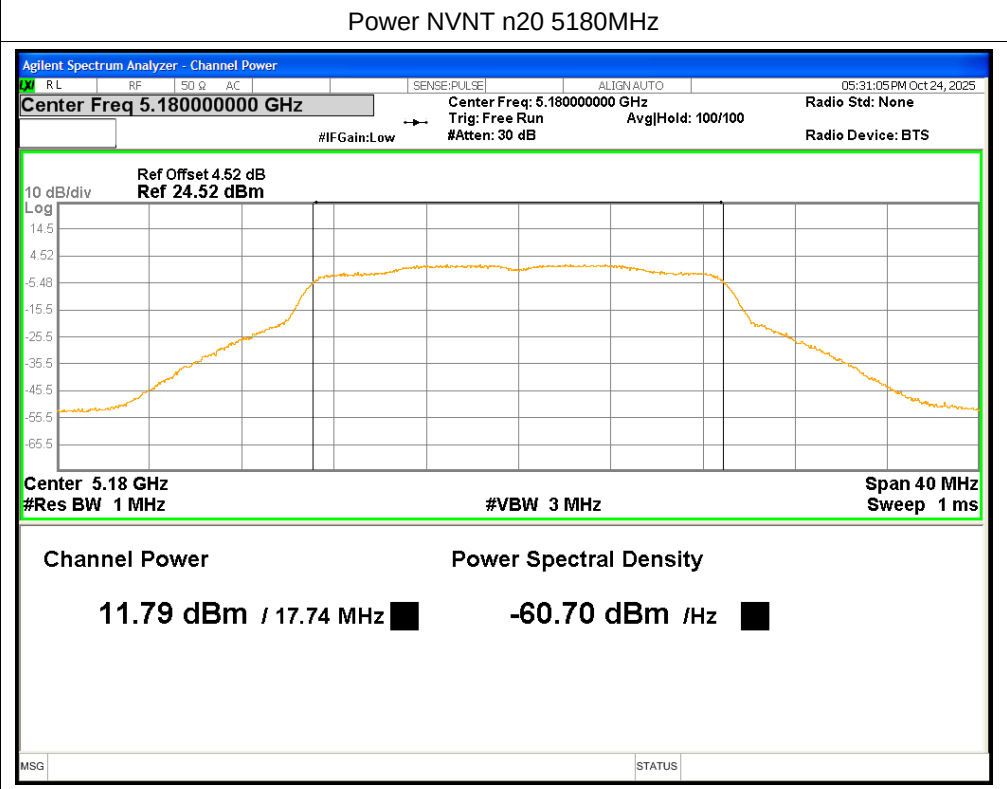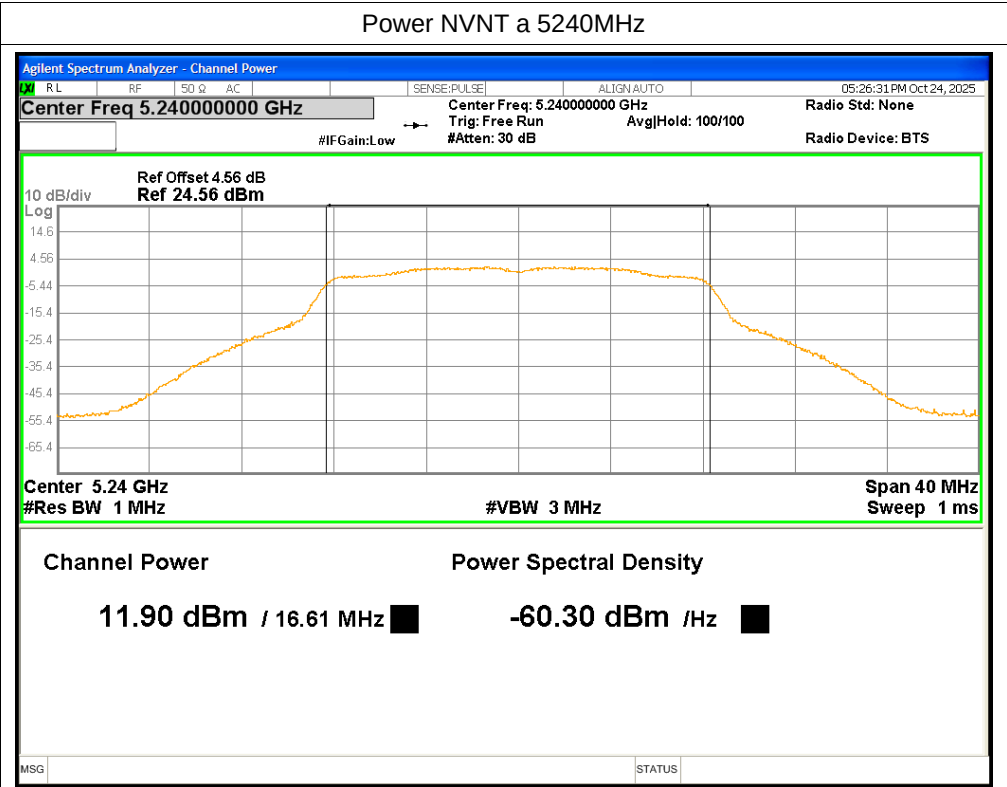

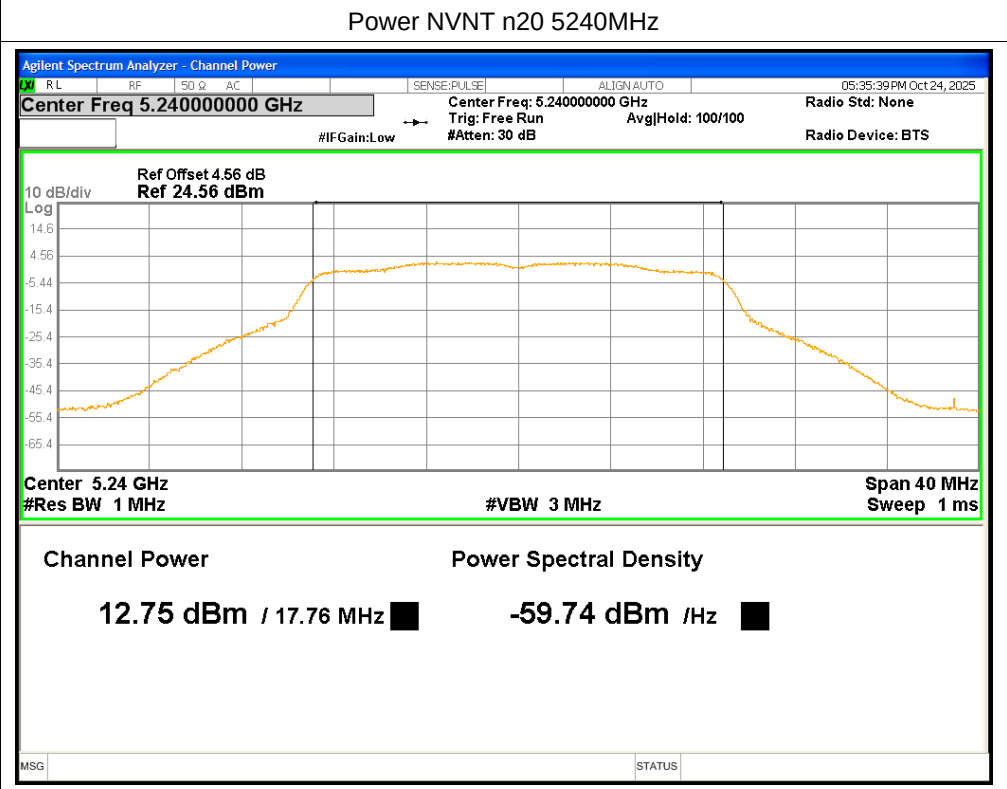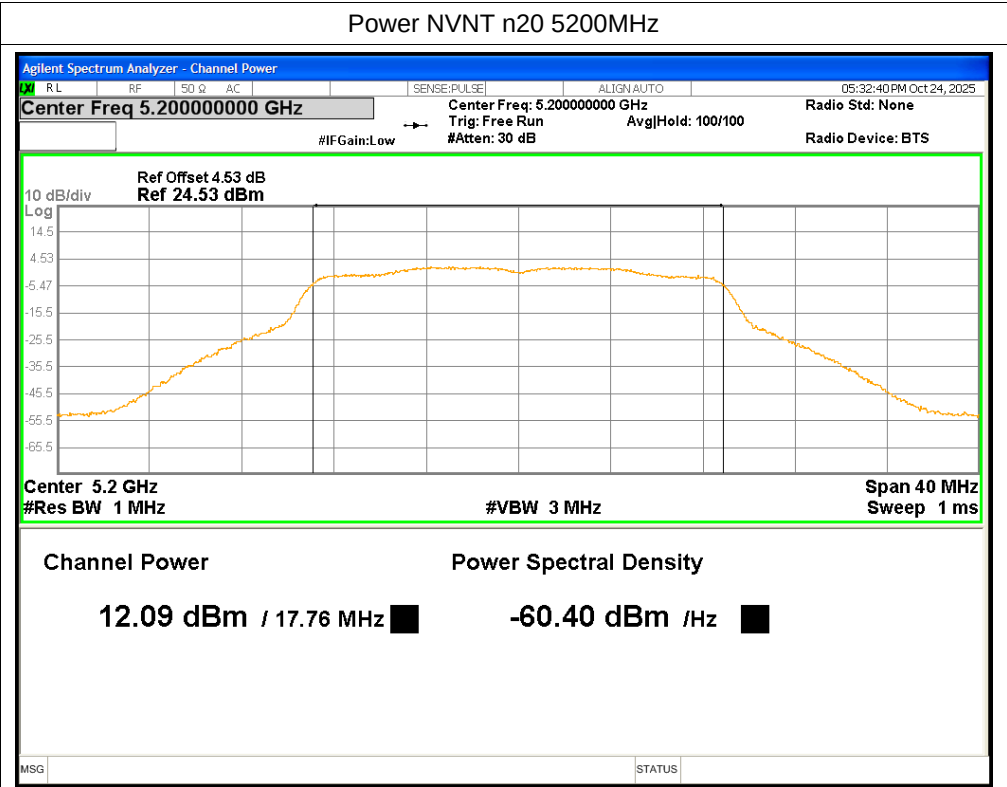

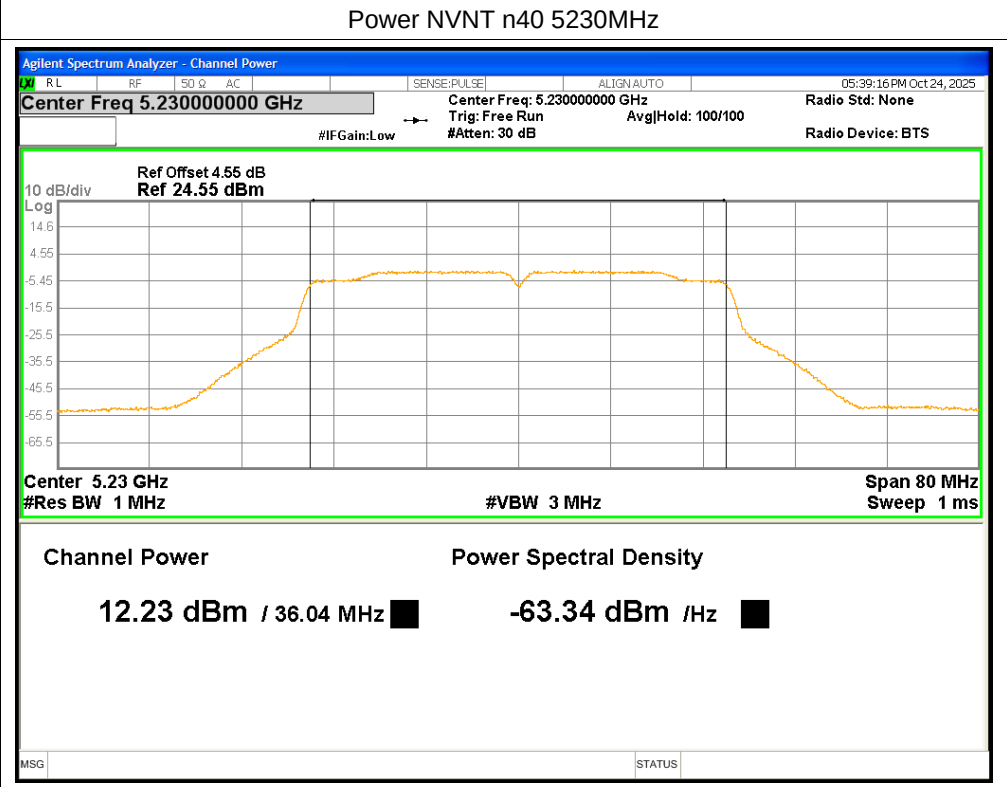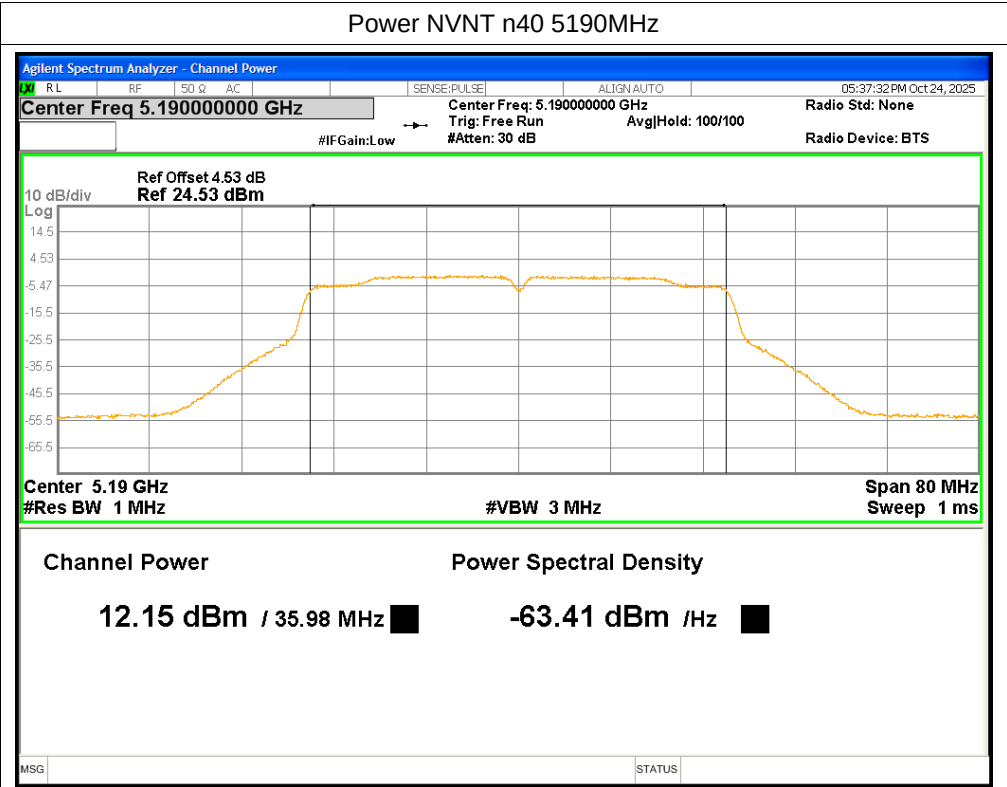


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	23.74	Pass
NVNT	a	5200	23.35	Pass
NVNT	a	5240	23.94	Pass
NVNT	n20	5180	23.78	Pass
NVNT	n20	5200	24.04	Pass
NVNT	n20	5240	24	Pass
NVNT	n40	5190	42.65	Pass
NVNT	n40	5230	43.98	Pass

Test Graphs


-26dB Bandwidth NVNT a 5180MHz

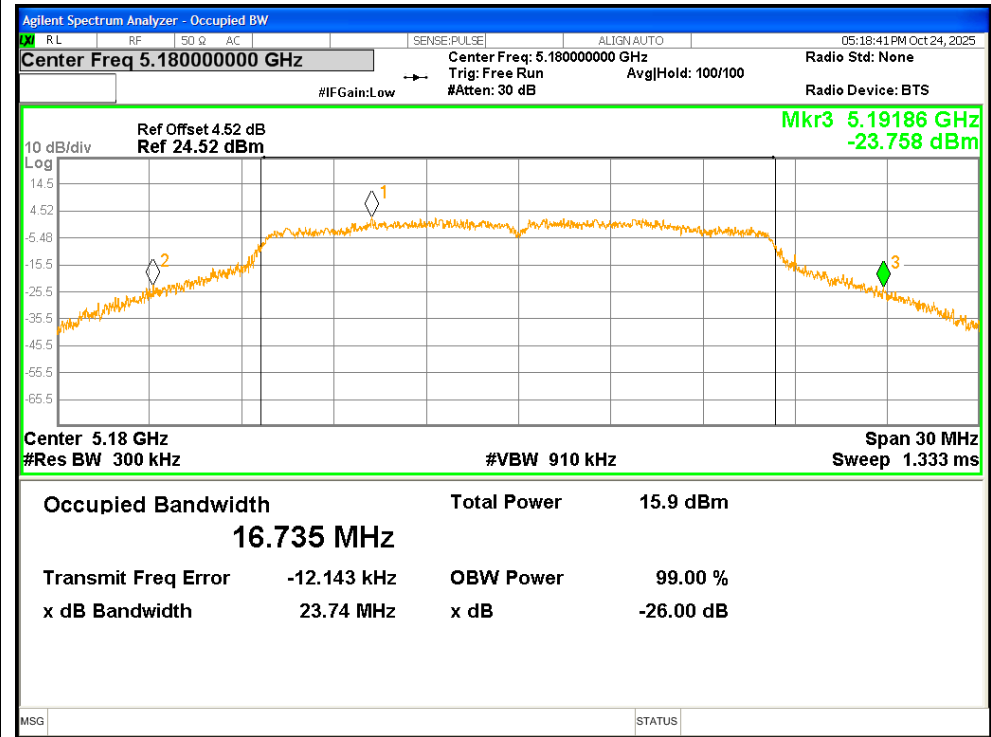


-26dB Bandwidth NVNT a 5200MHz

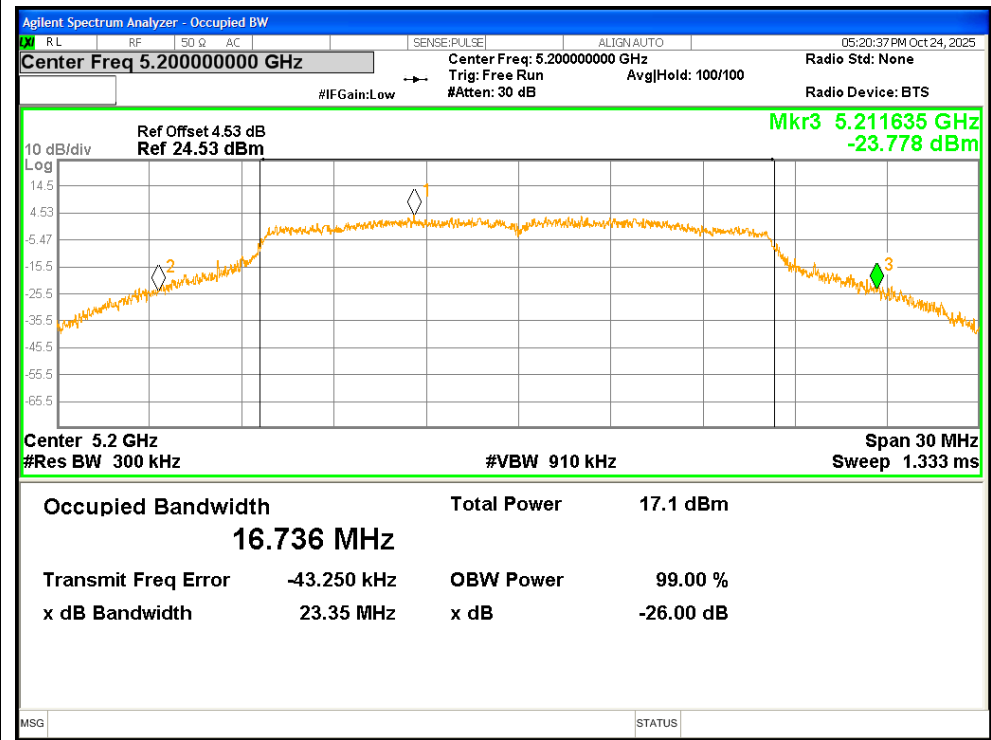


-26dB Bandwidth NVNT a 5240MHz

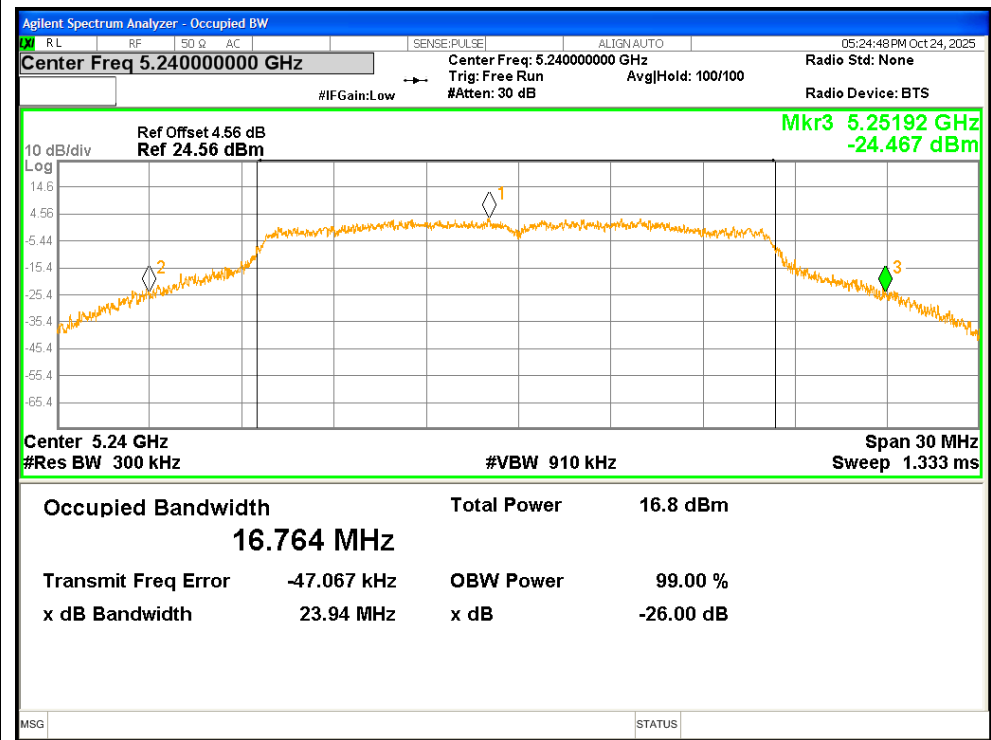


-26dB Bandwidth NVNT n20 5180MHz

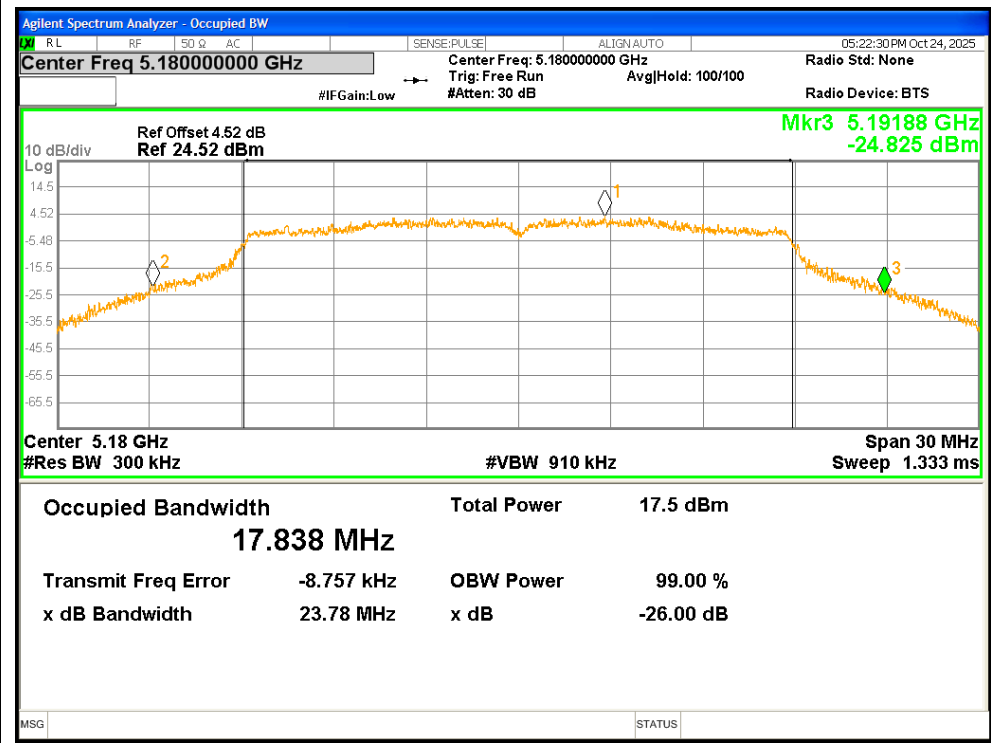


-26dB Bandwidth NVNT n20 5200MHz

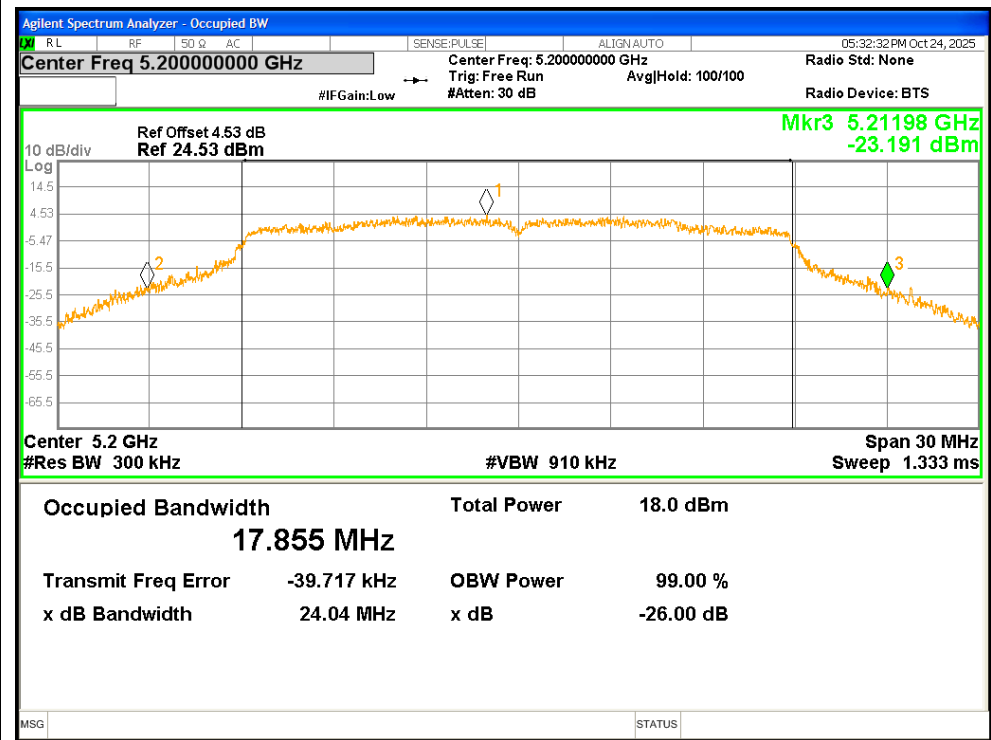


-26dB Bandwidth NVNT n20 5240MHz

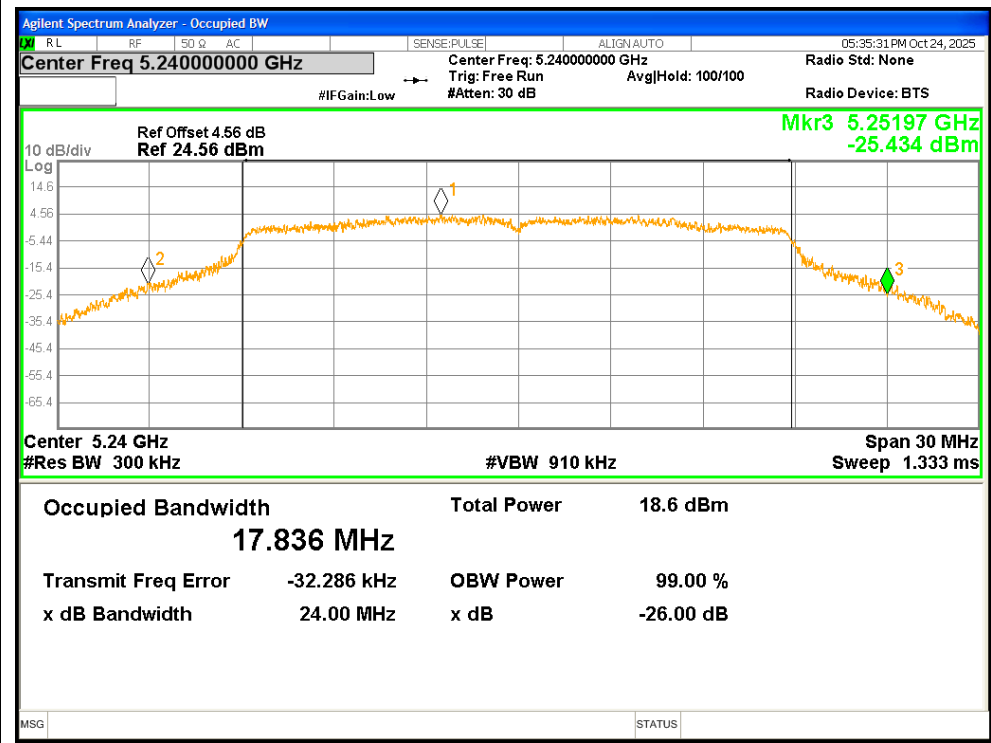

-26dB Bandwidth NVNT n40 5190MHz

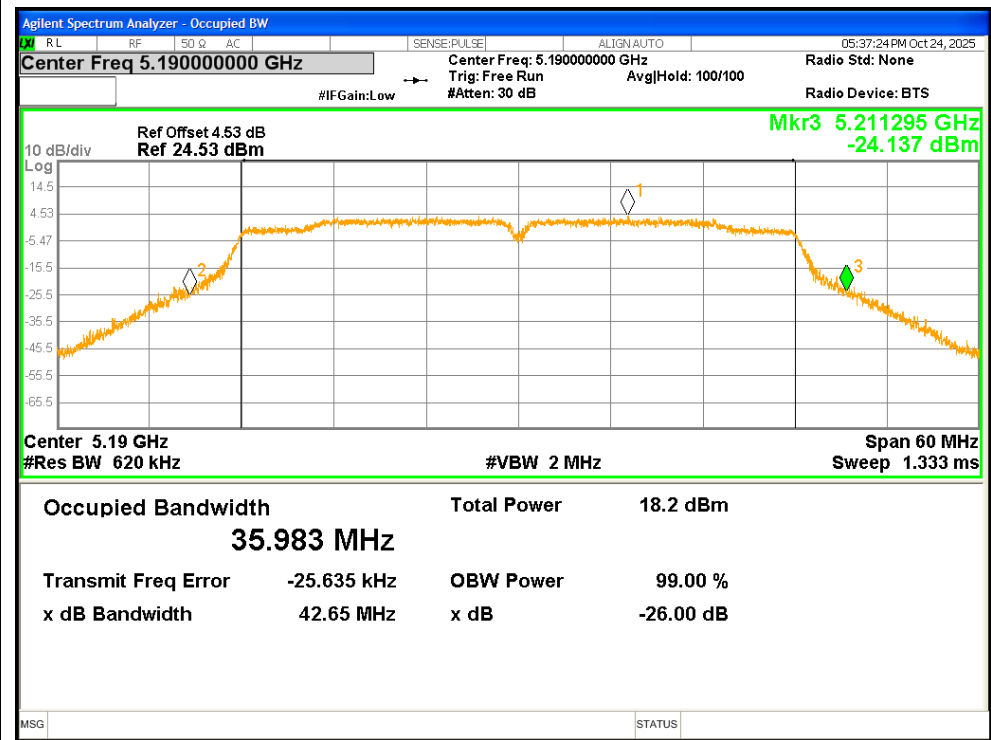




-26dB Bandwidth NVNT n40 5230MHz


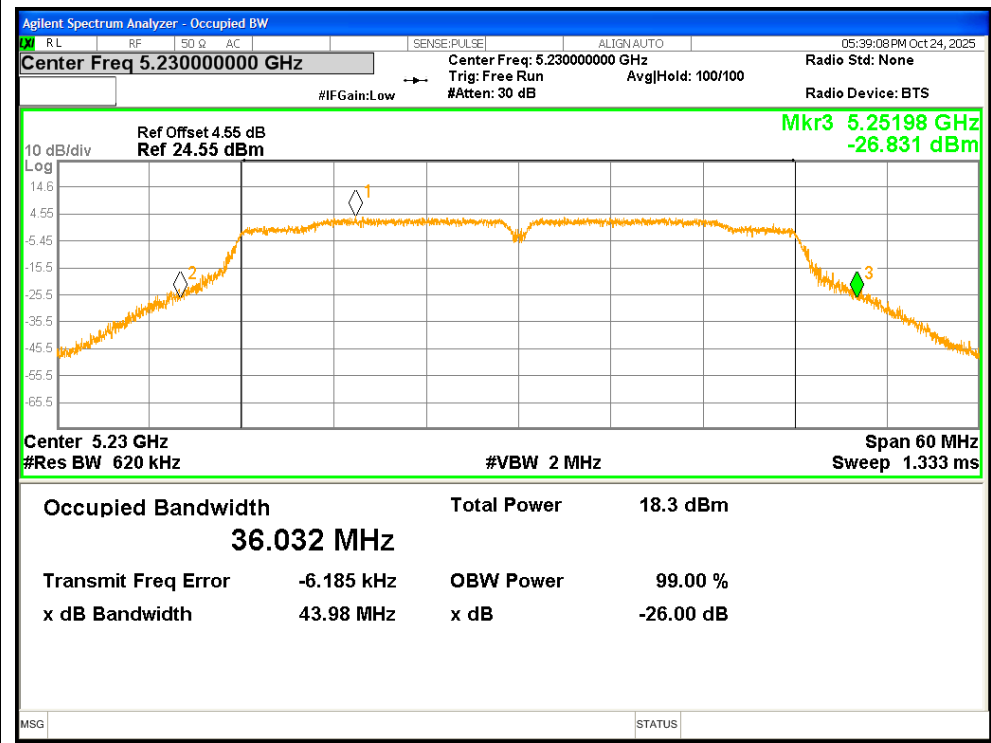




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.599
NVNT	a	5200	16.618
NVNT	a	5240	16.607
NVNT	n20	5180	17.736
NVNT	n20	5200	17.76
NVNT	n20	5240	17.763
NVNT	n40	5190	35.975
NVNT	n40	5230	36.043

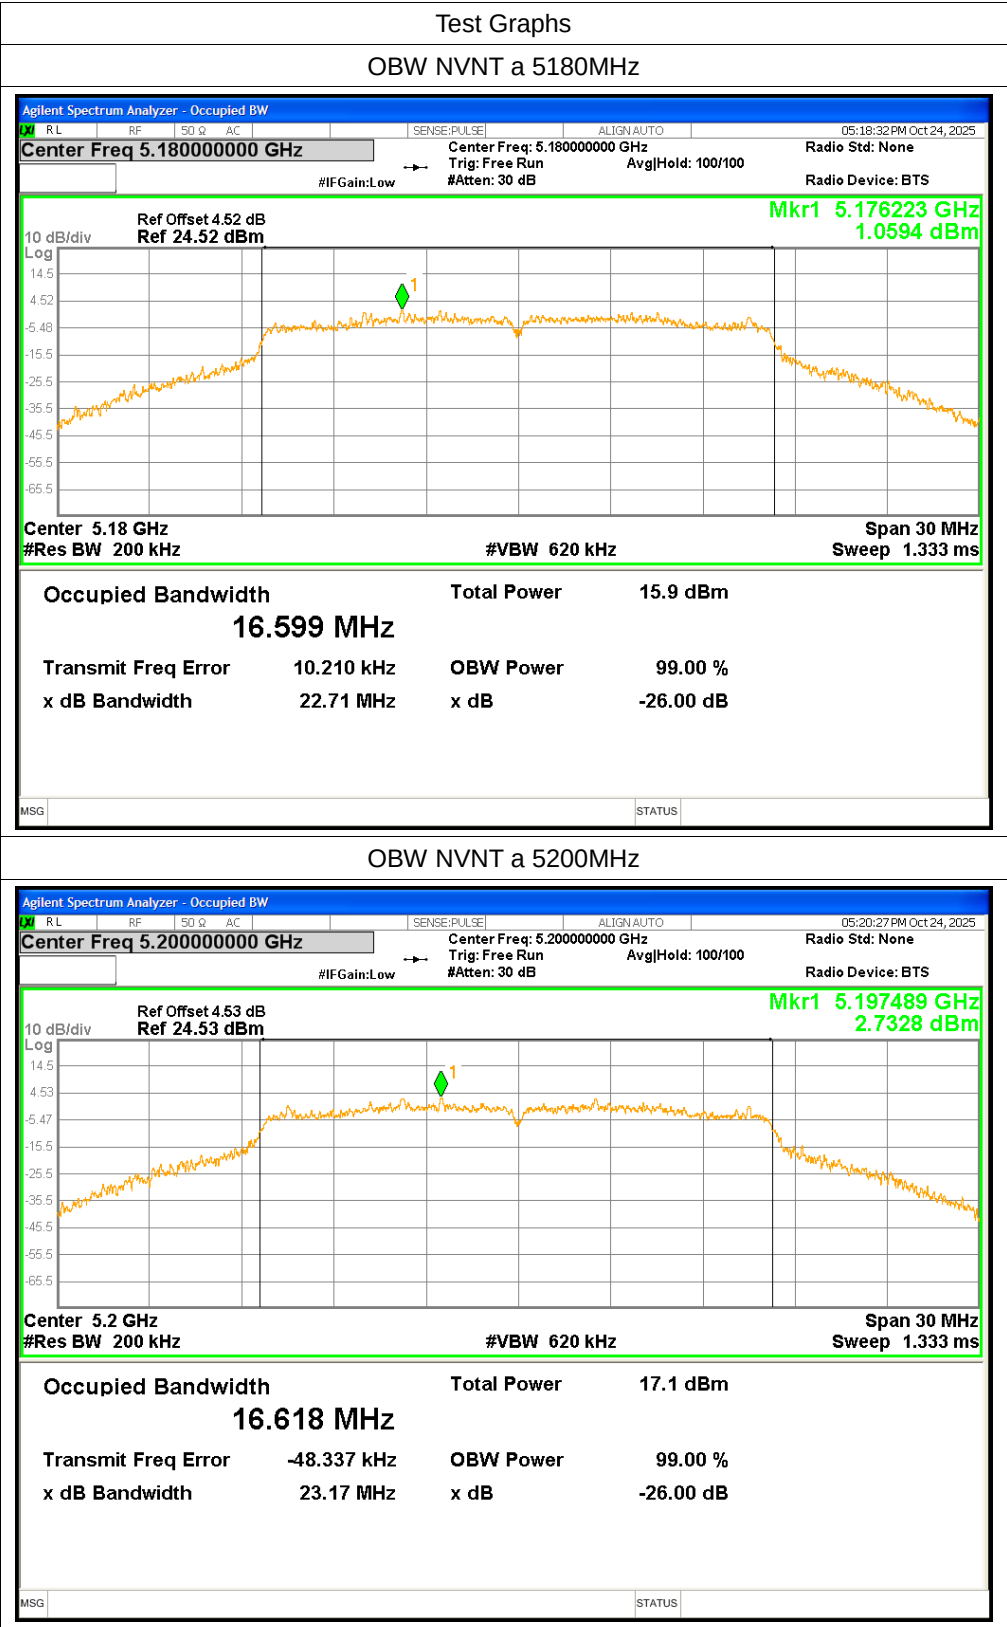

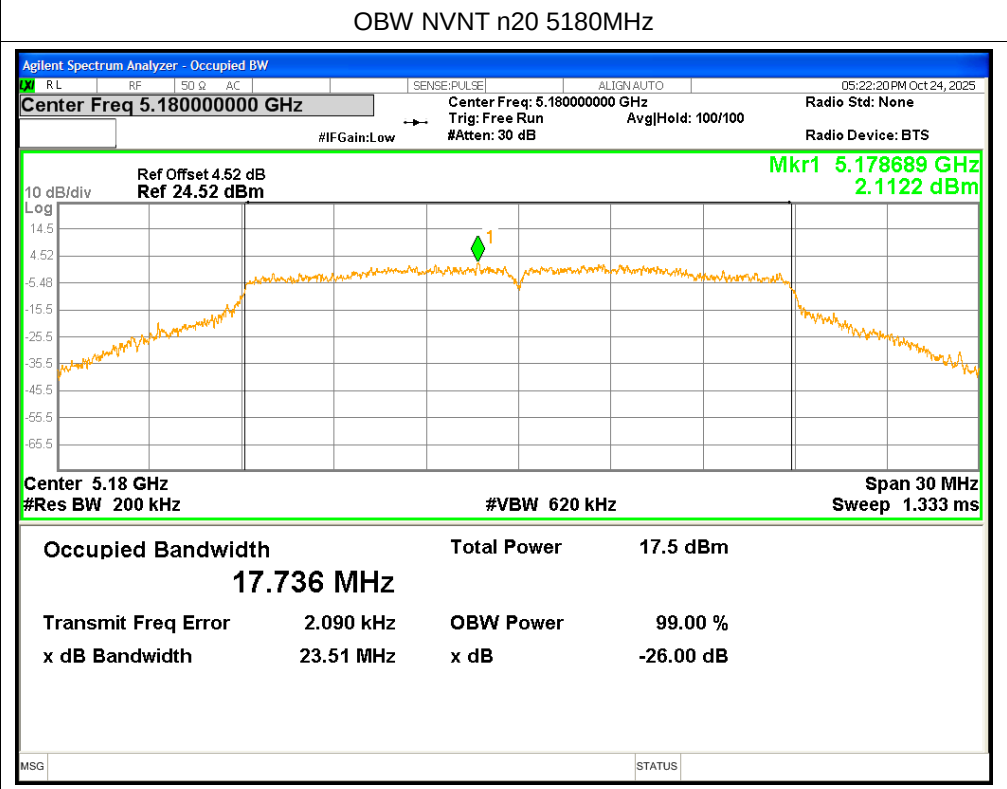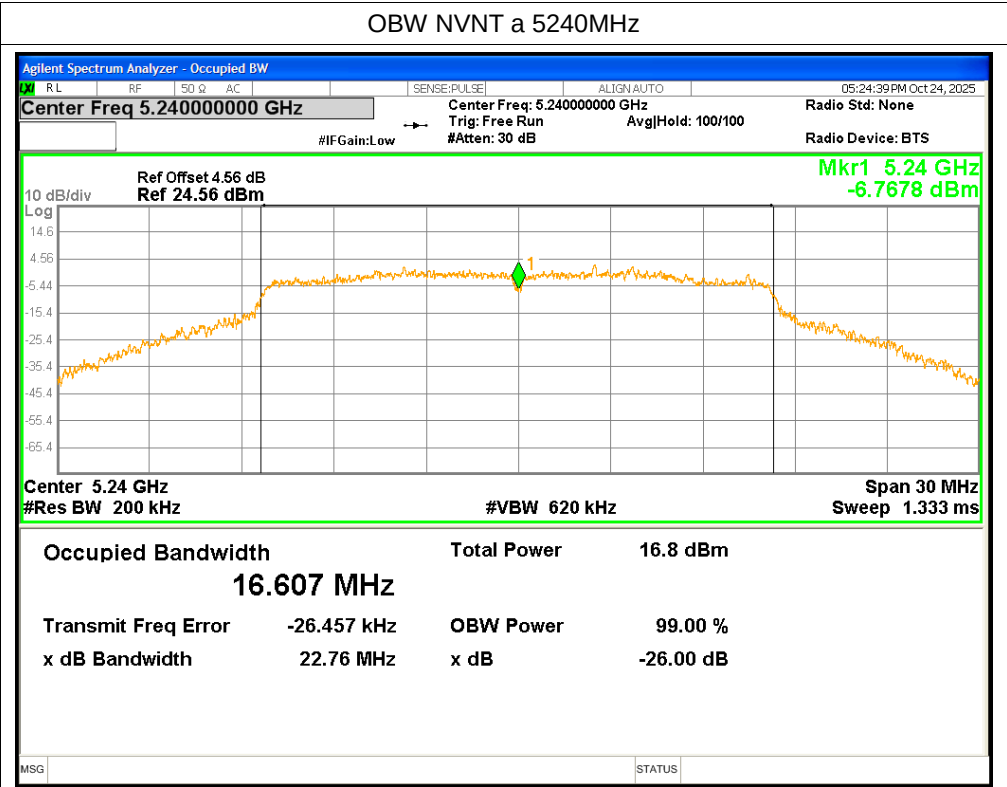

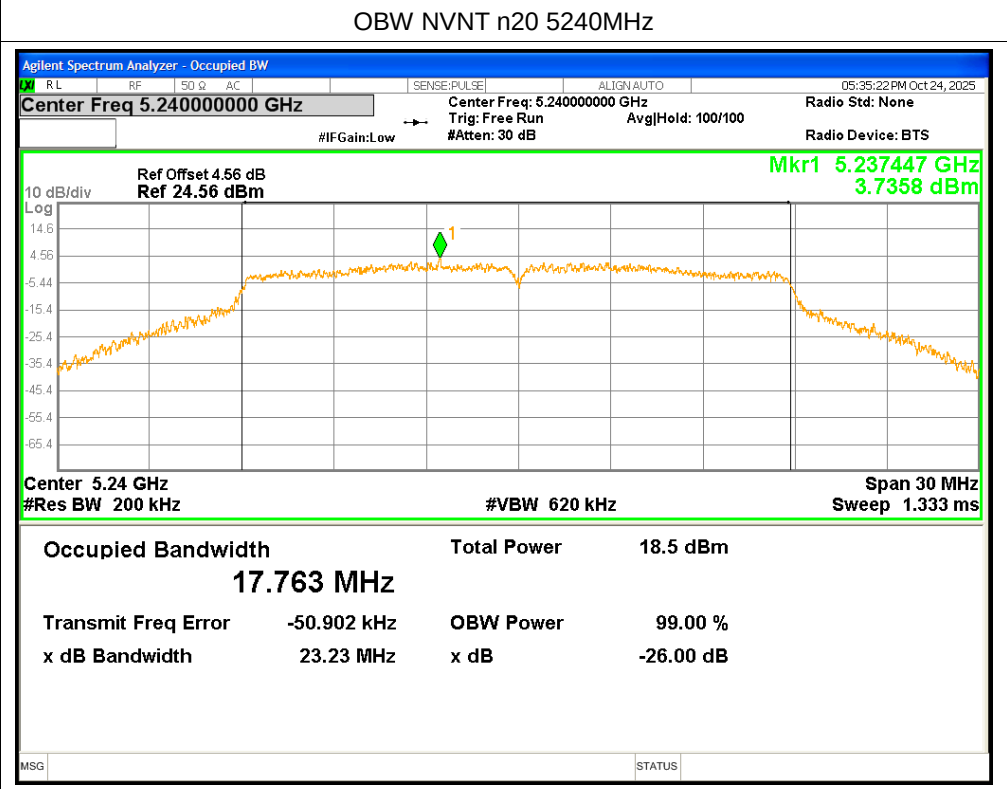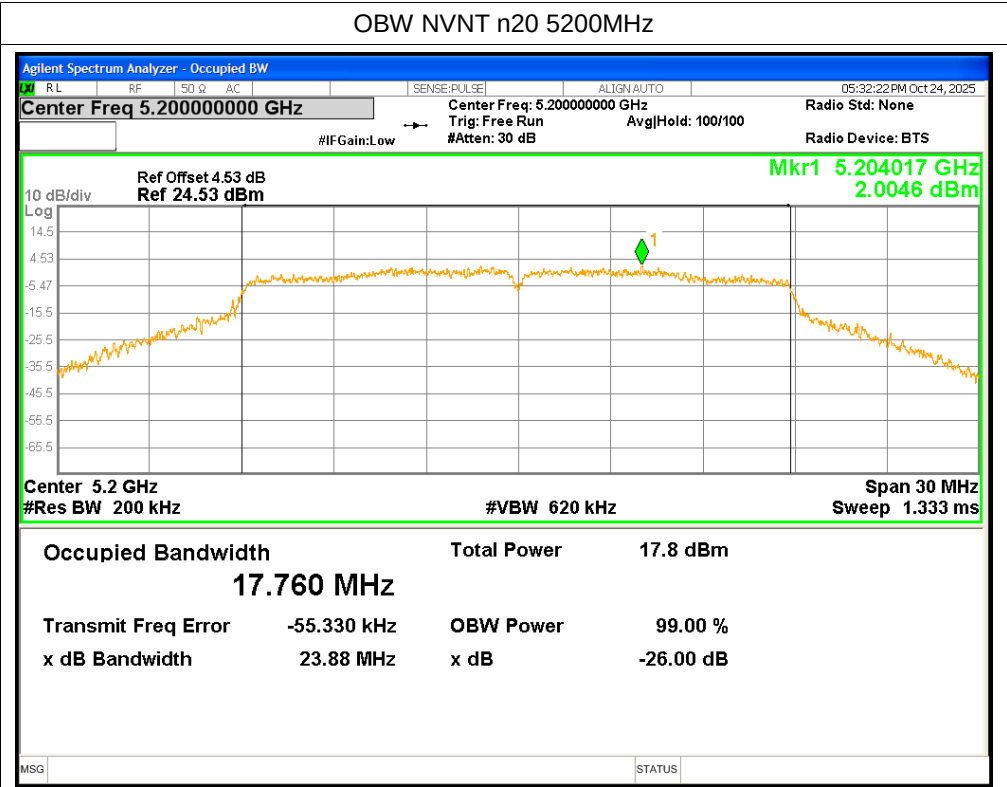

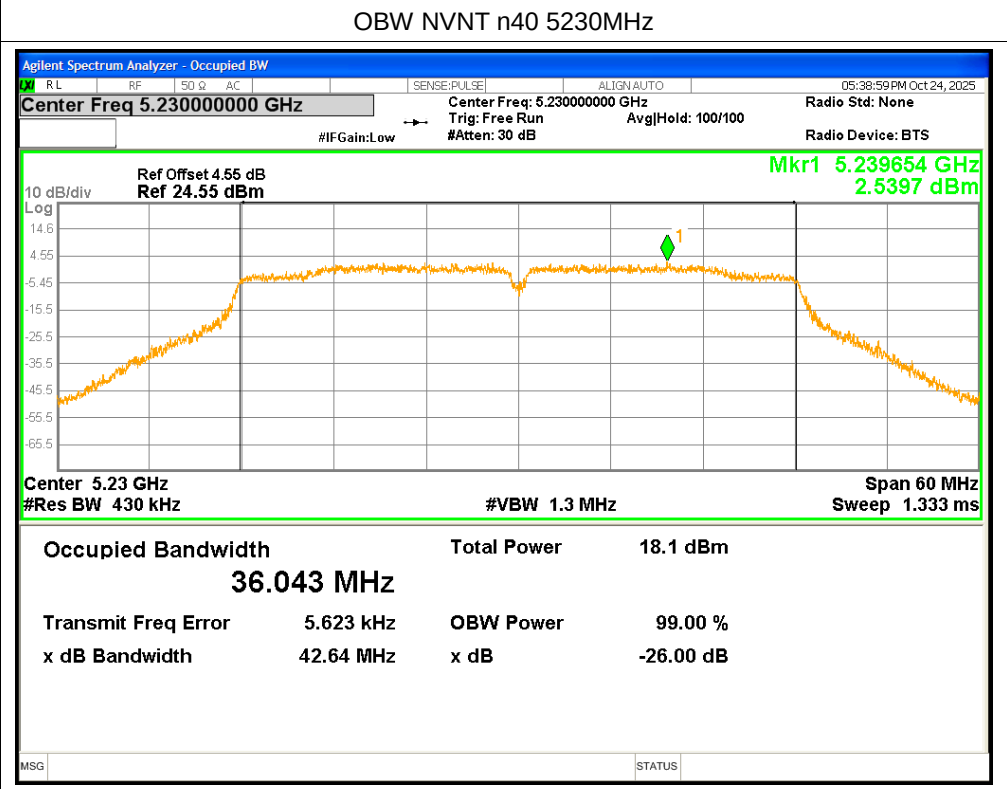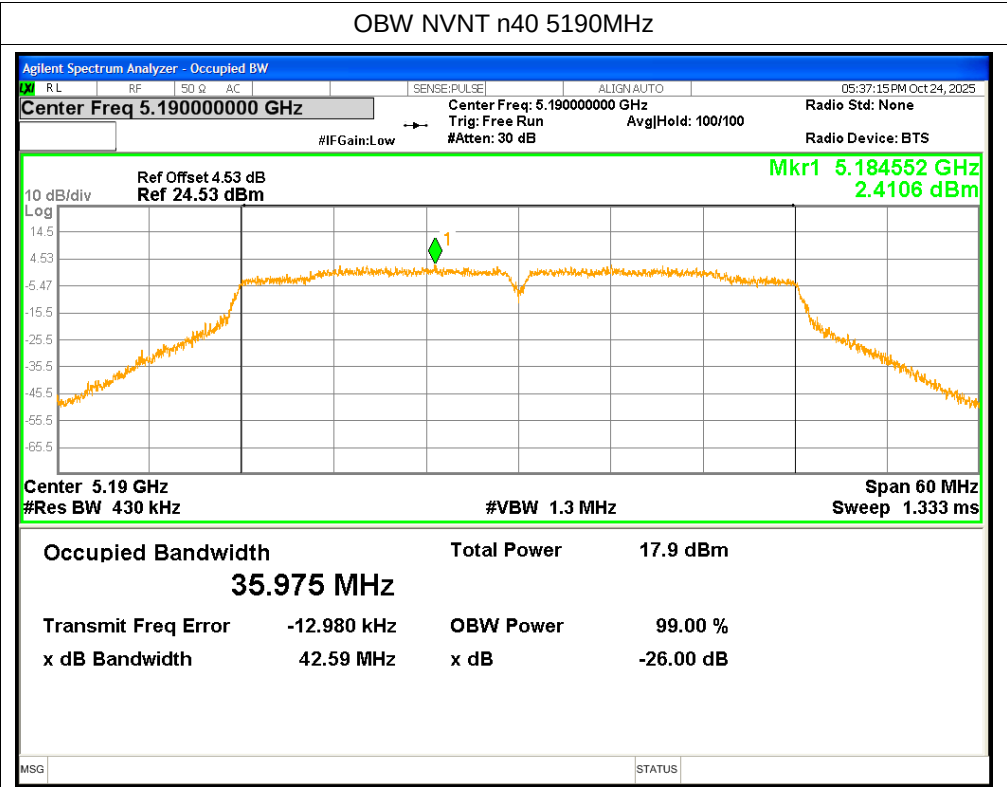

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	0.148	0.18	0.328	<=11	Pass
NVNT	a	5200	1.437	0.18	1.617	<=11	Pass
NVNT	a	5240	2.072	0.18	2.252	<=11	Pass
NVNT	n20	5180	1.894	-	1.894	<=11	Pass
NVNT	n20	5200	2.333	-	2.333	<=11	Pass
NVNT	n20	5240	2.653	-	2.653	<=11	Pass
NVNT	n40	5190	-1.203	-	-1.203	<=11	Pass
NVNT	n40	5230	-1.224	-	-1.224	<=11	Pass

