



Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: True Wireless Earbuds

Trade Mark: /

Test Model: Fire-Boltt Aero Shadow

FCC ID: 2BT26-AEROSHADOW

Environmental Conditions

Temperature:	23.5℃
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.960	2401.532	2402.492	---	---
DH5	Ant1	2441	0.951	2440.535	2441.486	---	---
DH5	Ant1	2480	0.960	2479.535	2480.495	---	---
2DH5	Ant1	2402	1.326	2401.334	2402.660	---	---
2DH5	Ant1	2441	1.260	2440.373	2441.633	---	---
2DH5	Ant1	2480	1.257	2479.388	2480.645	---	---
3DH5	Ant1	2402	1.290	2401.358	2402.648	---	---
3DH5	Ant1	2441	1.272	2440.364	2441.636	---	---
3DH5	Ant1	2480	1.272	2479.358	2480.630	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





DH5-Ant1-2480




2DH5-Ant1-2402





2DH5-Ant1-2441

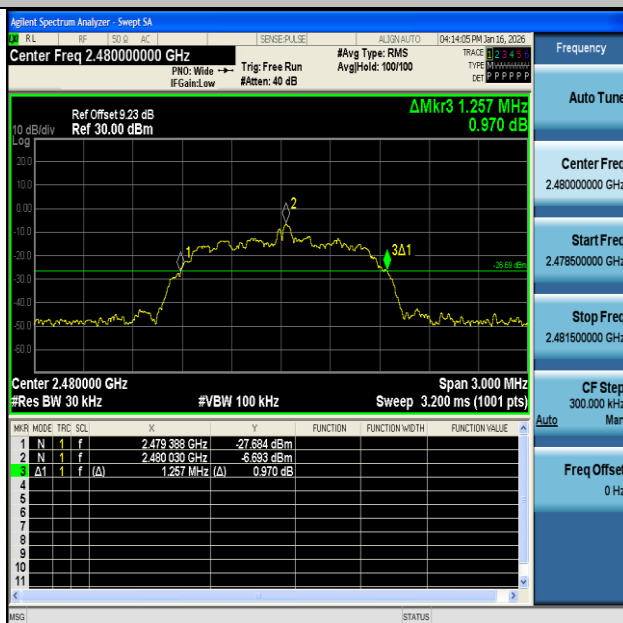

2DH5-Ant1-2480





3DH5-Ant1-2402



3DH5-Ant1-2441





3DH5-Ant1-2480





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.87688	2401.5656	2402.4425	---	---
DH5	Ant1	2441	0.85779	2440.5695	2441.4273	---	---
DH5	Ant1	2480	0.87898	2479.5635	2480.4424	---	---
2DH5	Ant1	2402	1.1623	2401.4190	2402.5813	---	---
2DH5	Ant1	2441	1.1788	2440.4094	2441.5882	---	---
2DH5	Ant1	2480	1.1772	2479.4110	2480.5882	---	---
3DH5	Ant1	2402	1.1975	2401.4011	2402.5986	---	---
3DH5	Ant1	2441	1.1714	2440.4164	2441.5878	---	---
3DH5	Ant1	2480	1.1714	2479.4193	2480.5907	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs



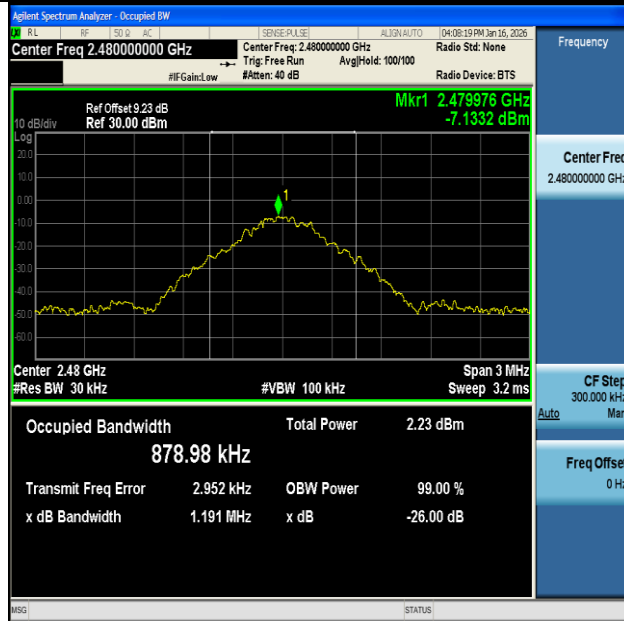


DH5-Ant1-2480

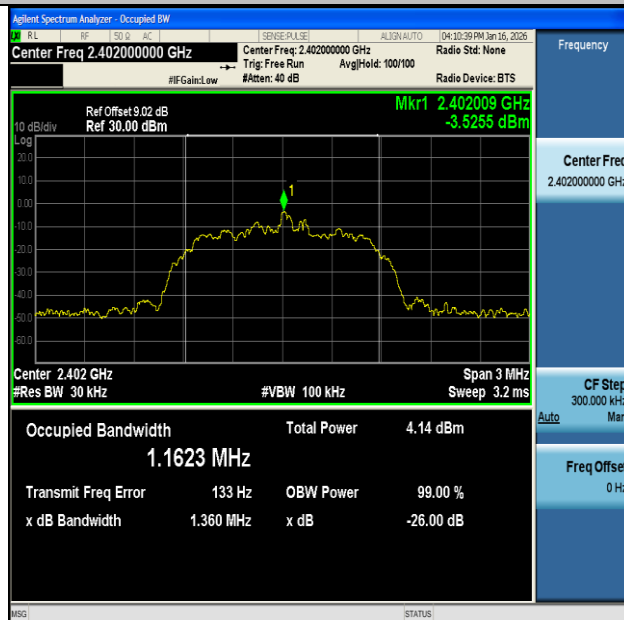


2DH5-Ant1-2402



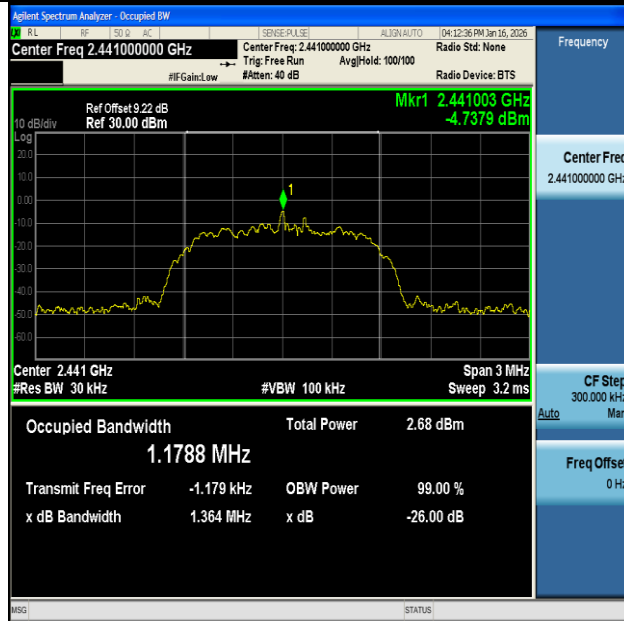


2DH5-Ant1-2441

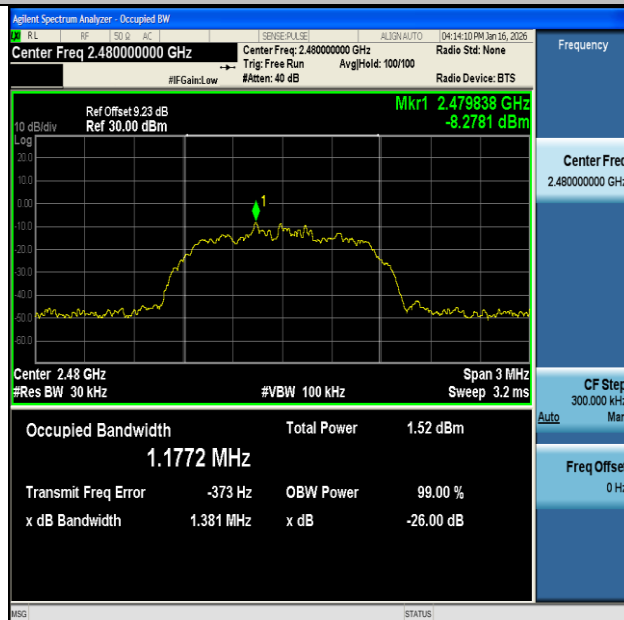


2DH5-Ant1-2480



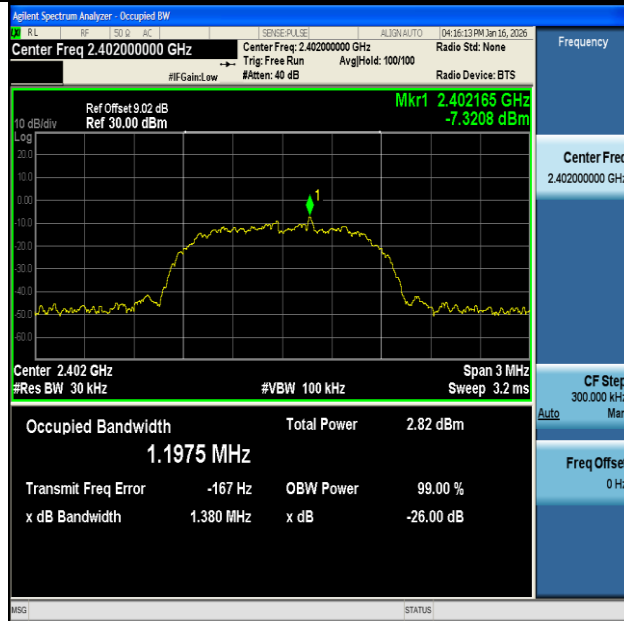


3DH5-Ant1-2402

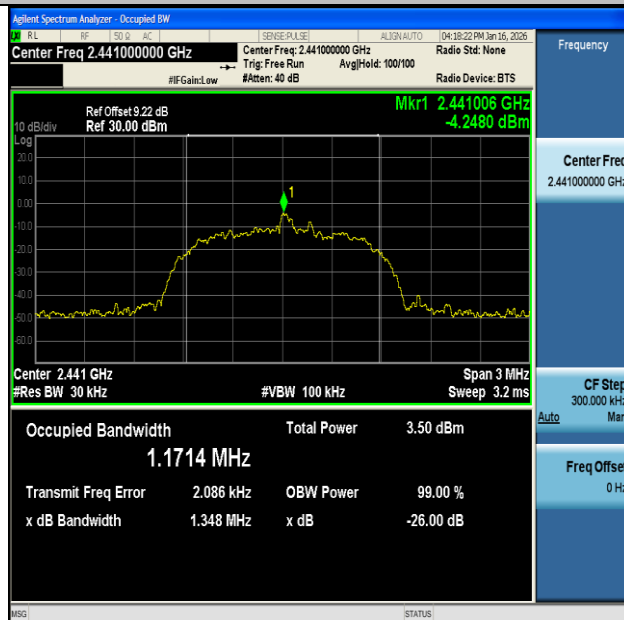

3DH5-Ant1-2441



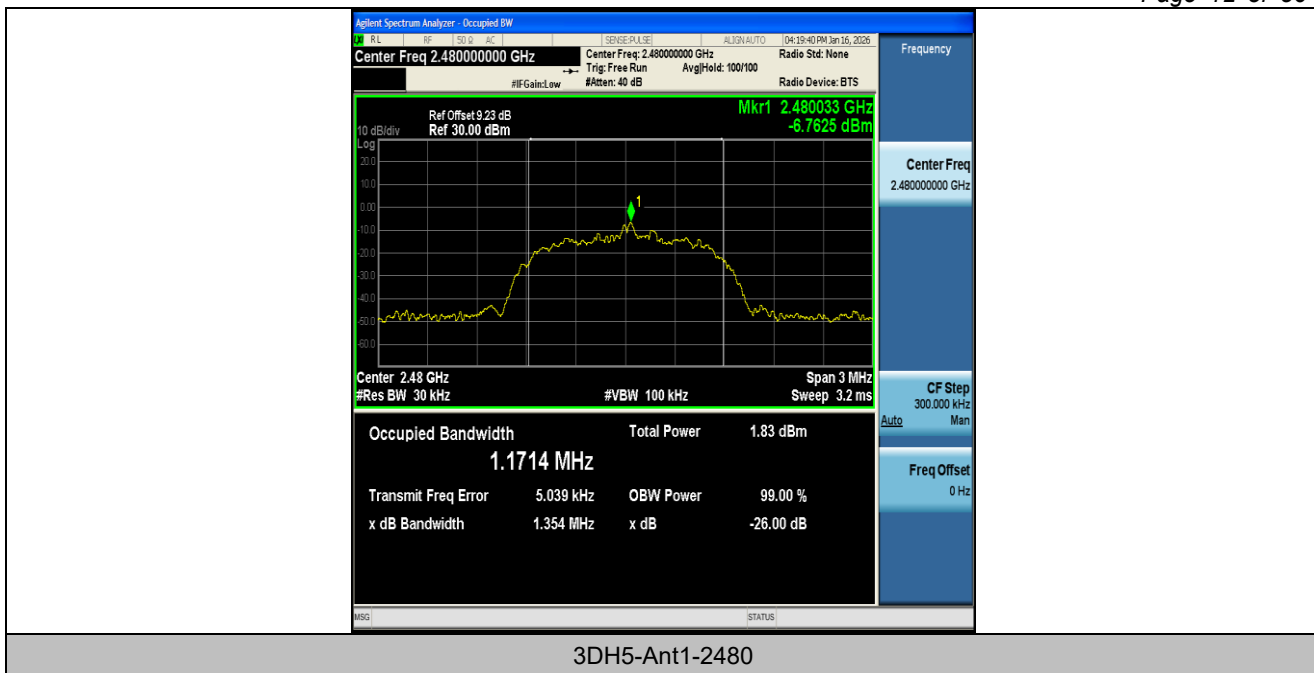



Appendix C: Maximum peak conducted output power

Test Result


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH5	Ant1	2402	-1.97	≤30	PASS
DH5	Ant1	2441	-2.47	≤30	PASS
DH5	Ant1	2480	-3.65	≤30	PASS
2DH5	Ant1	2402	-1.29	≤20.97	PASS
2DH5	Ant1	2441	-1.88	≤20.97	PASS
2DH5	Ant1	2480	-3.17	≤20.97	PASS
3DH5	Ant1	2402	-0.79	≤20.97	PASS
3DH5	Ant1	2441	-1.34	≤20.97	PASS
3DH5	Ant1	2480	-2.71	≤20.97	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

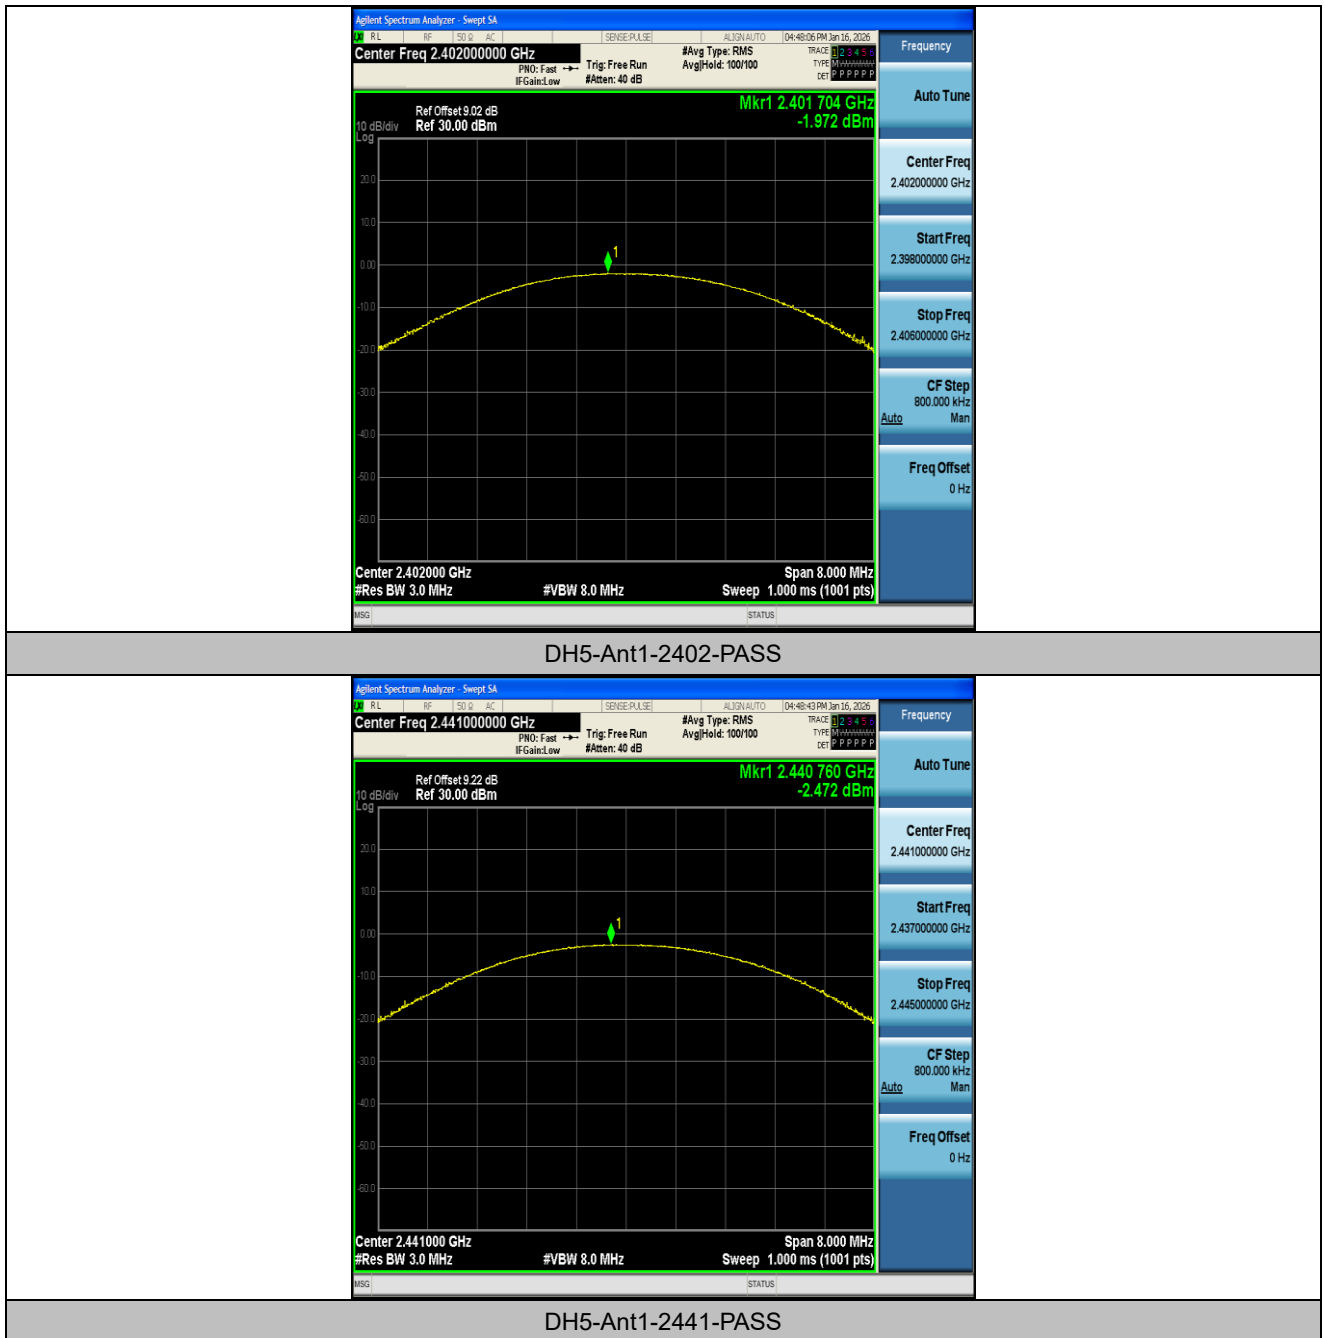



DH5-Ant1-2480-PASS




2DH5-Ant1-2402-PASS






2DH5-Ant1-2441-PASS

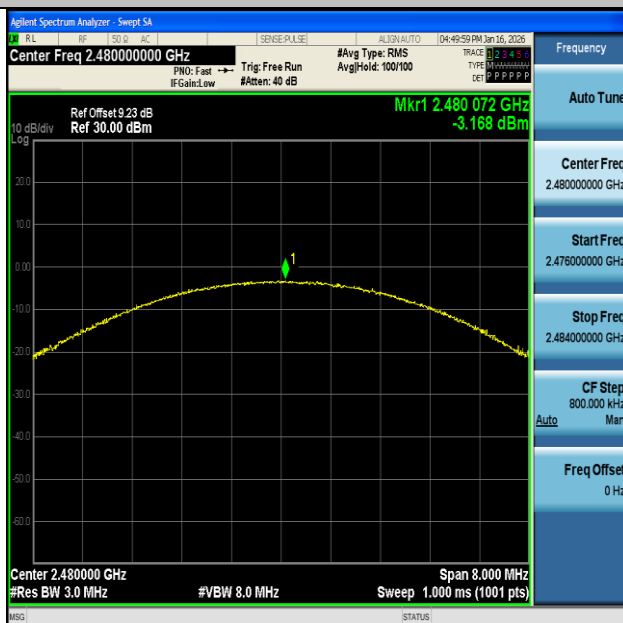


2DH5-Ant1-2480-PASS



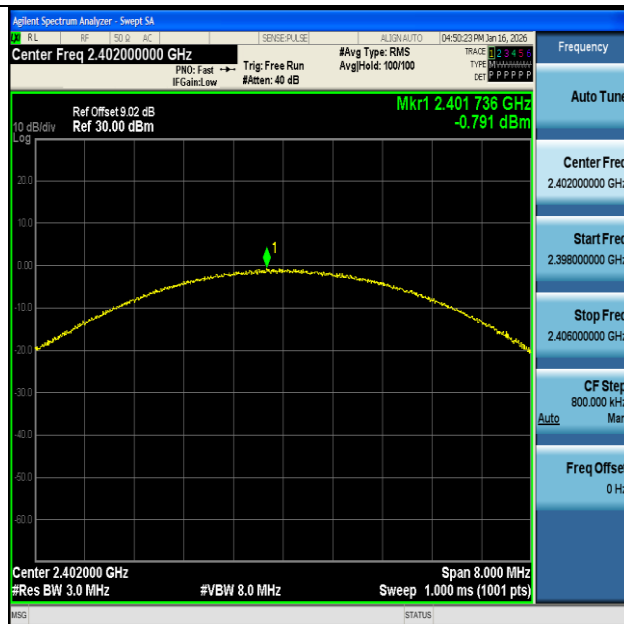


3DH5-Ant1-2402-PASS

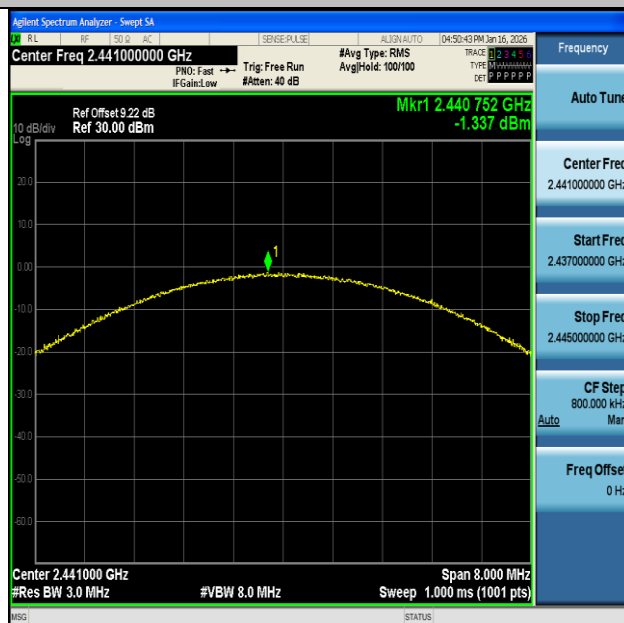

3DH5-Ant1-2441-PASS



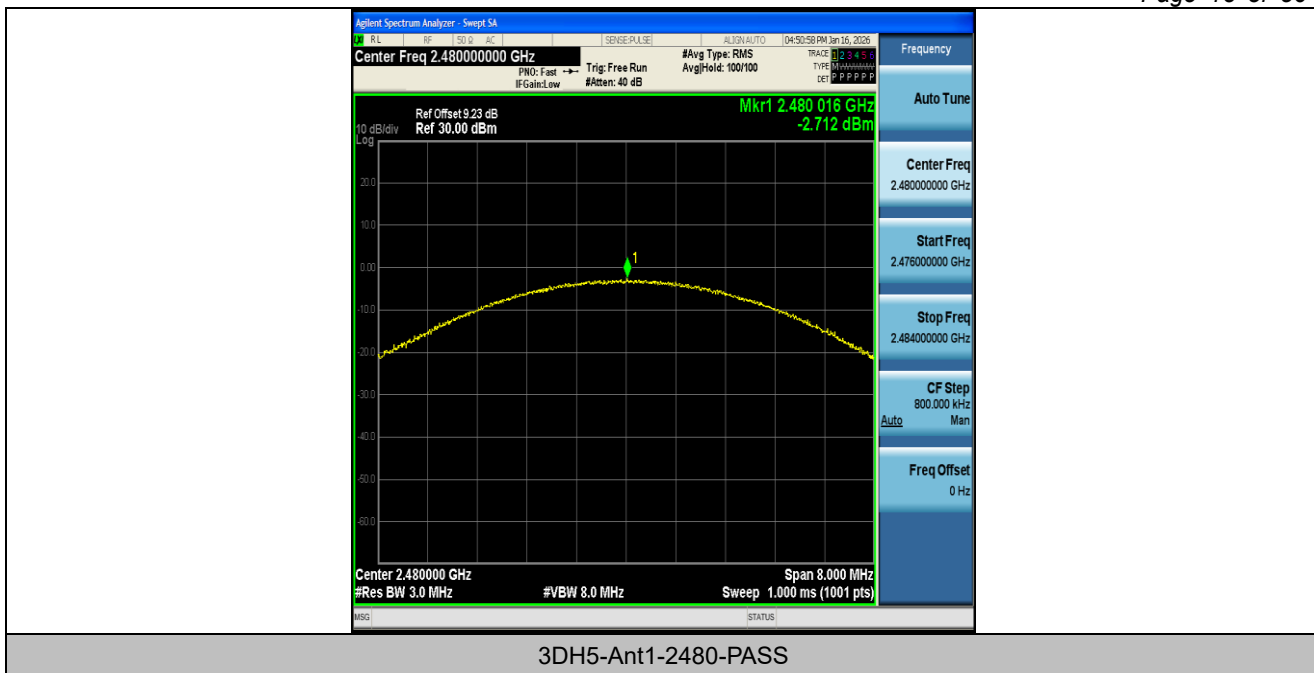



Appendix D: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.164	≥ 0.960	PASS
2DH5	Ant1	Hop	1.004	≥ 0.884	PASS
3DH5	Ant1	Hop	0.99	≥ 0.860	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



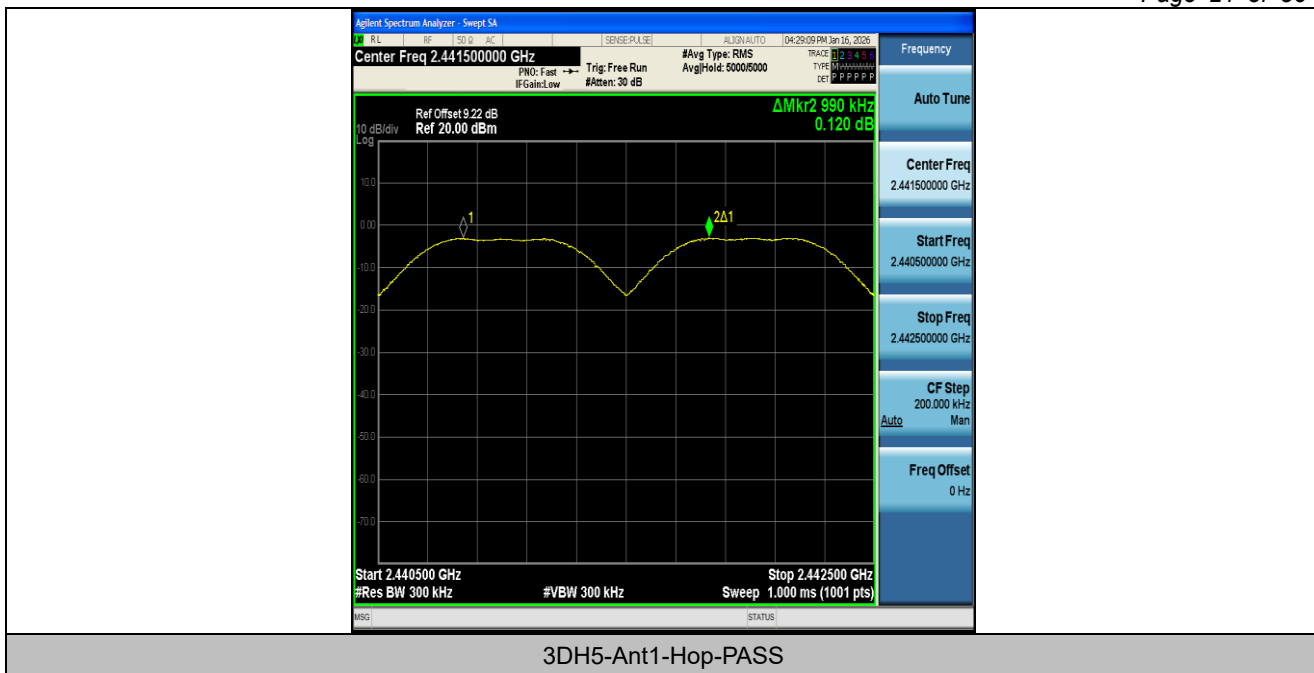



Appendix E: Time of occupancy

Test Result


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	TotalHops [Num]	Result [s]	Limit [s]	Verdict
DH5	Ant1	Hop	2.910	120	0.349	≤0.4	PASS
2DH5	Ant1	Hop	2.910	120	0.349	≤0.4	PASS
3DH5	Ant1	Hop	2.910	110	0.32	≤0.4	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)







Test Graphs

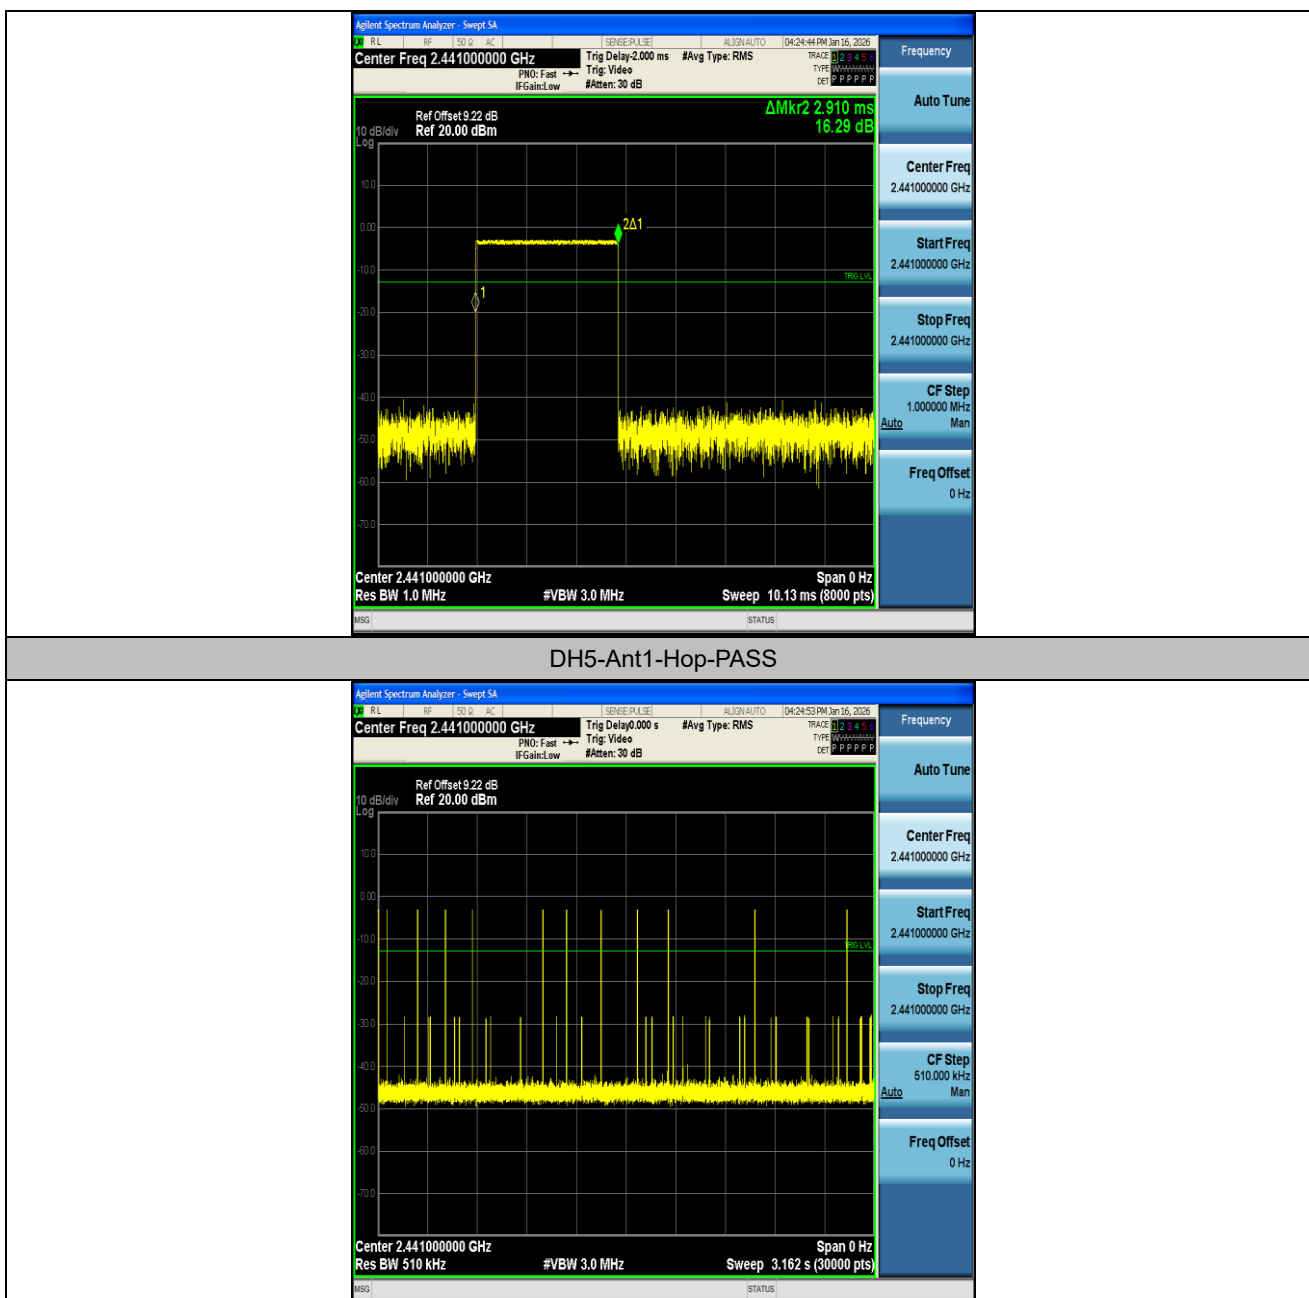

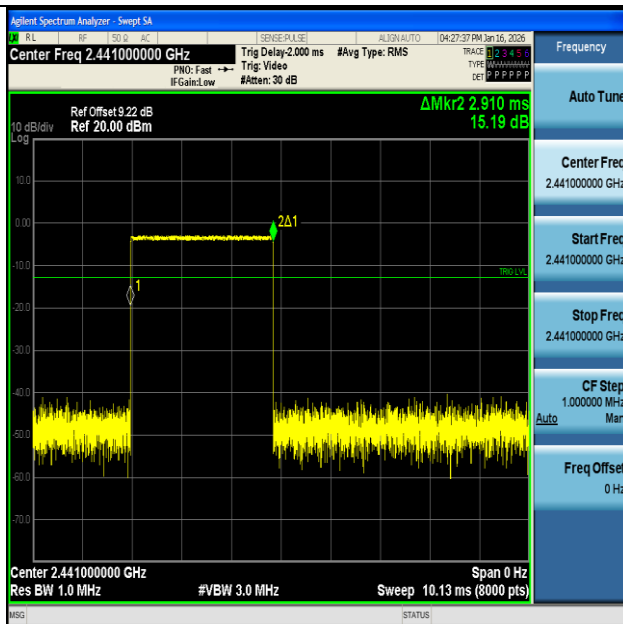


2DH5-Ant1-Hop-PASS

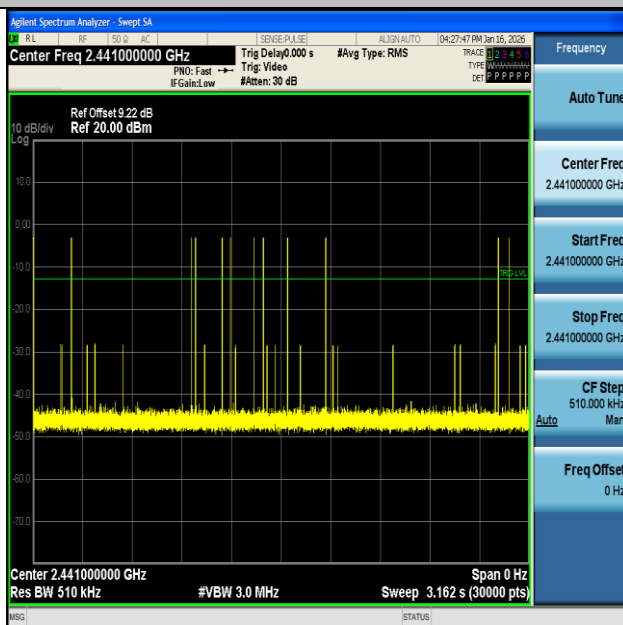

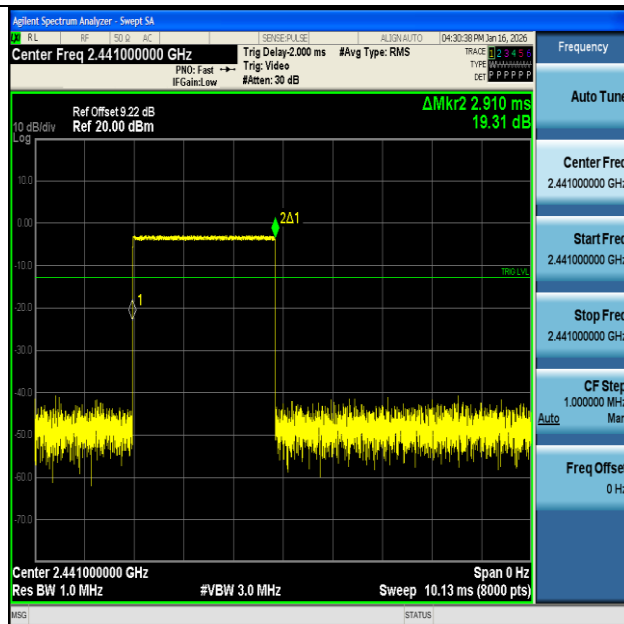

3DH5-Ant1-Hop-PASS

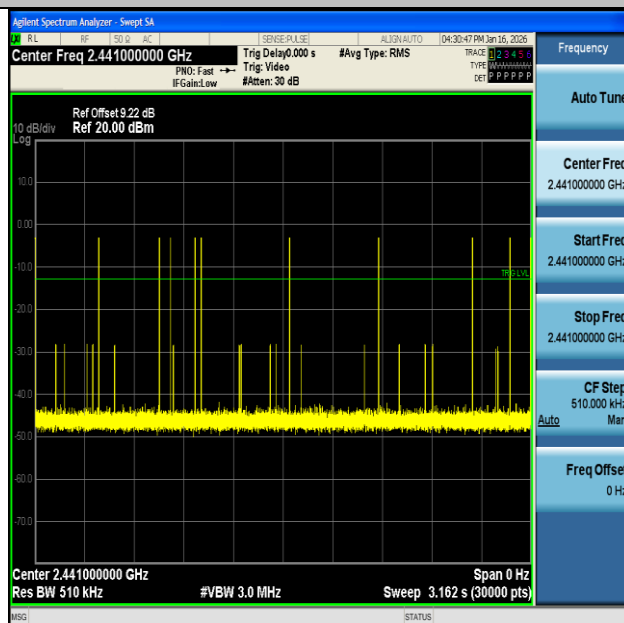



Appendix F: Number of hopping channels

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



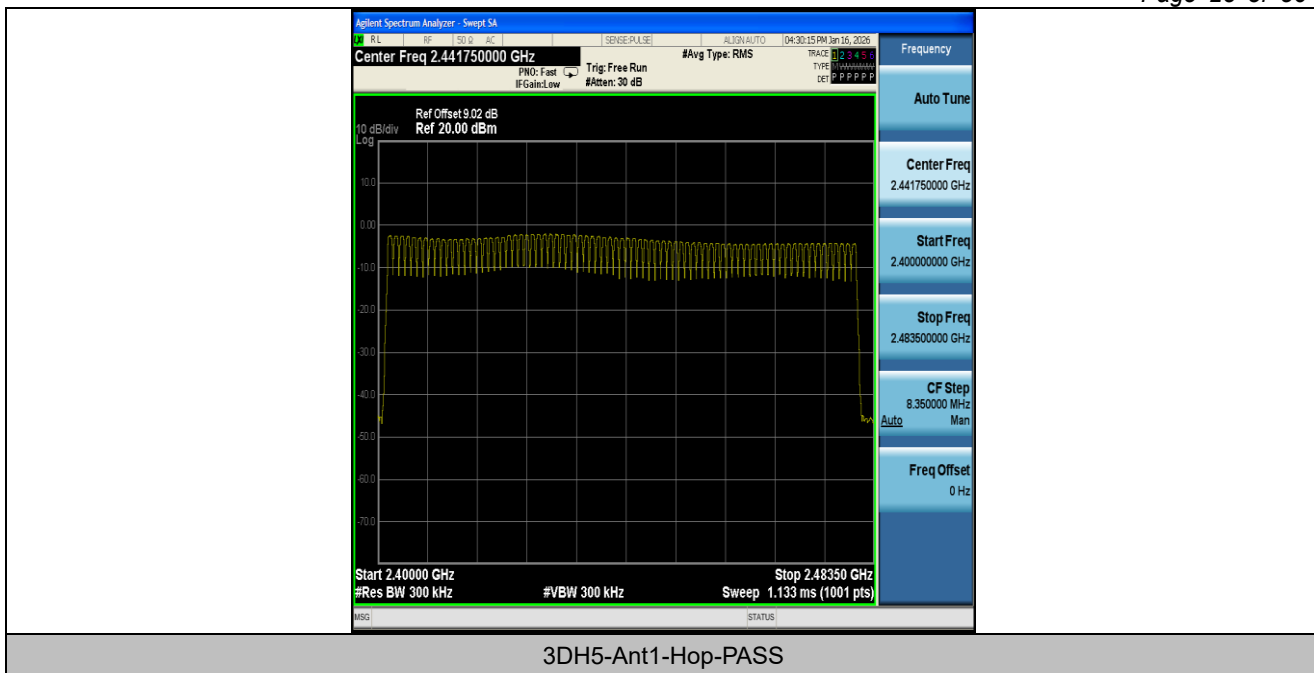



Appendix G: Band edge measurements

Test Result


Test Mode	Antenna	Ch.Name	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-2.48	-49.42	≤-22.48	PASS
DH5	Ant1	High	2480	-4.46	-48.7	≤-24.46	PASS
DH5	Ant1	Low	Hop_2402	-3.88	-48.69	≤-23.88	PASS
DH5	Ant1	High	Hop_2480	-4.65	-48.38	≤-24.65	PASS
2DH5	Ant1	Low	2402	-3.02	-48.83	≤-23.02	PASS
2DH5	Ant1	High	2480	-4.48	-48.64	≤-24.48	PASS
2DH5	Ant1	Low	Hop_2402	-3.72	-48.75	≤-23.72	PASS
2DH5	Ant1	High	Hop_2480	-4.49	-48.44	≤-24.49	PASS
3DH5	Ant1	Low	2402	-2.50	-48.72	≤-22.5	PASS
3DH5	Ant1	High	2480	-5.05	-48.23	≤-25.05	PASS
3DH5	Ant1	Low	Hop_2402	-2.86	-48.03	≤-22.86	PASS
3DH5	Ant1	High	Hop_2480	-4.57	-47.74	≤-24.57	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

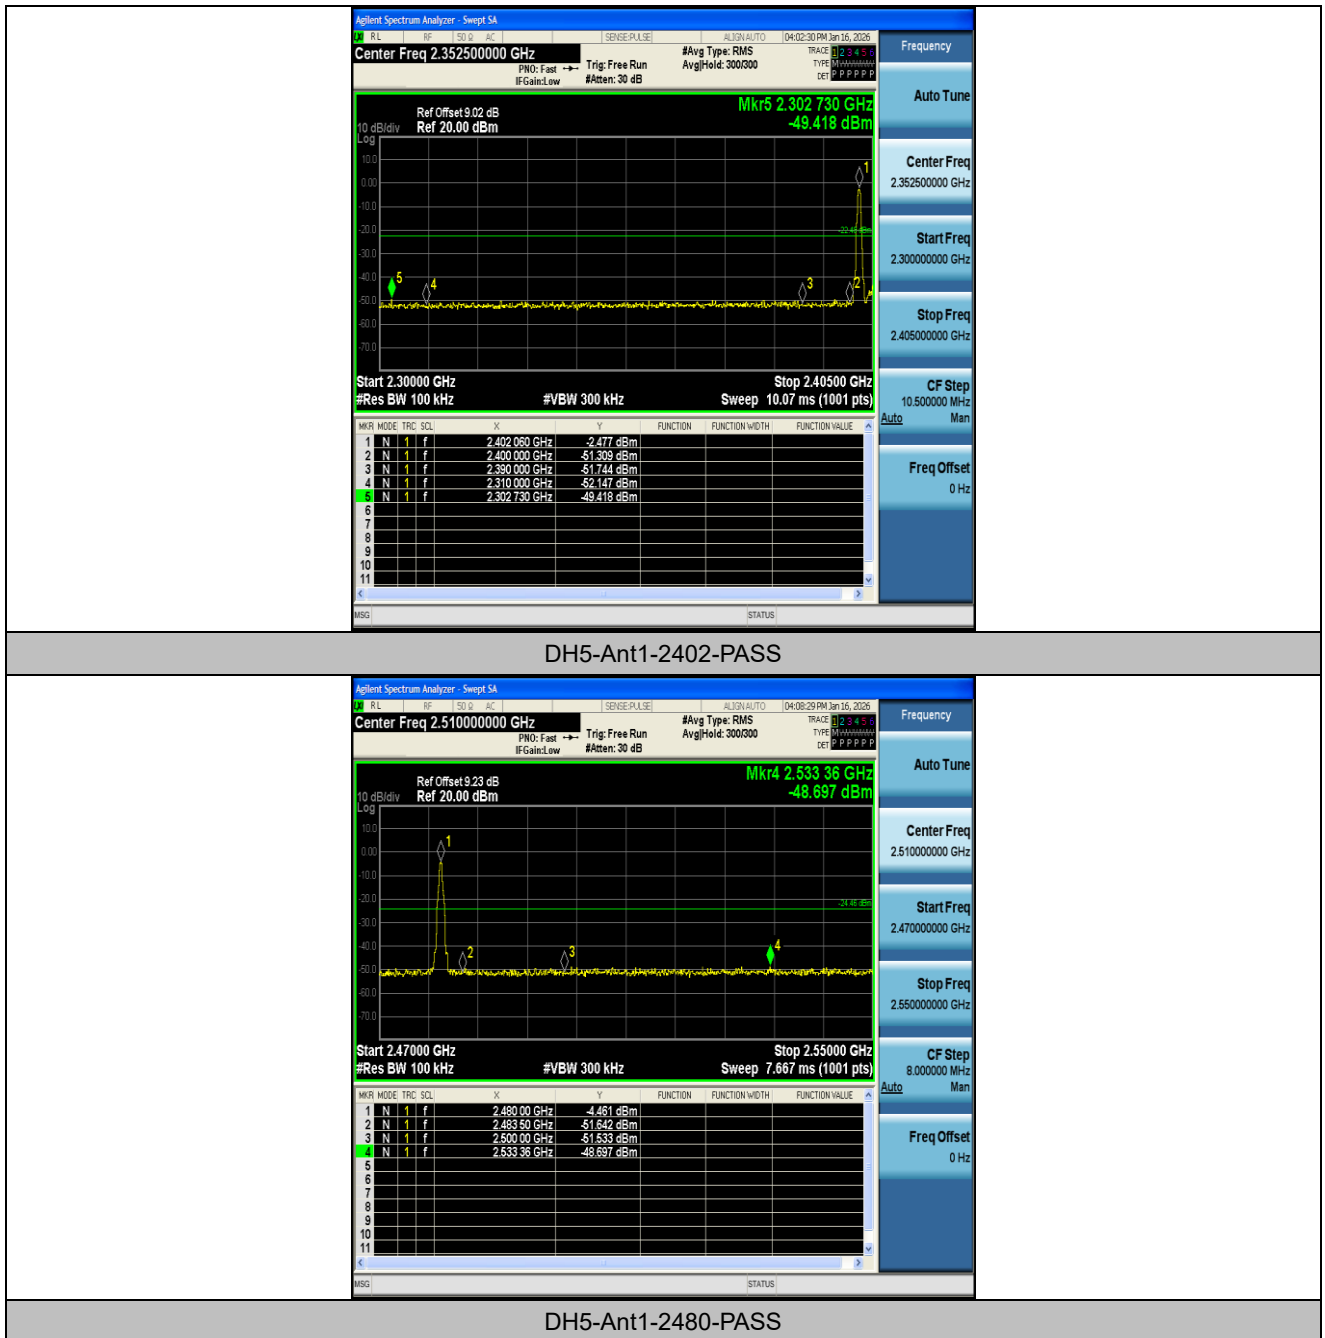

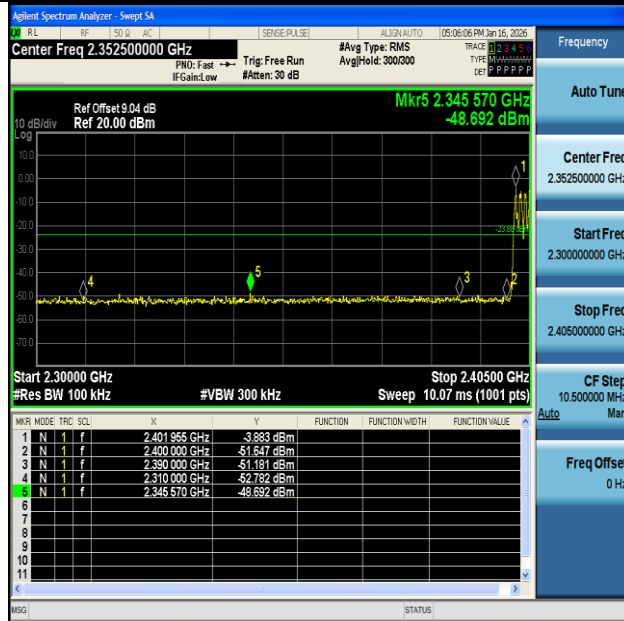


DH5-Ant1-Hop_2402-PASS

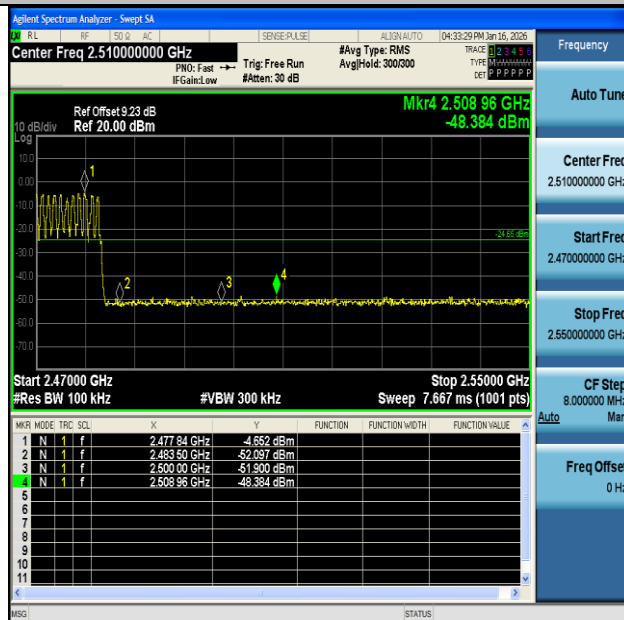


DH5-Ant1-Hop_2480-PASS



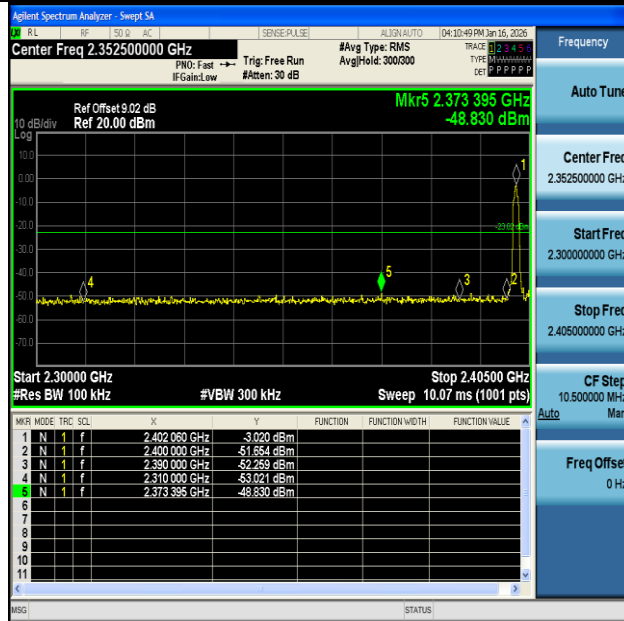


2DH5-Ant1-2402-PASS

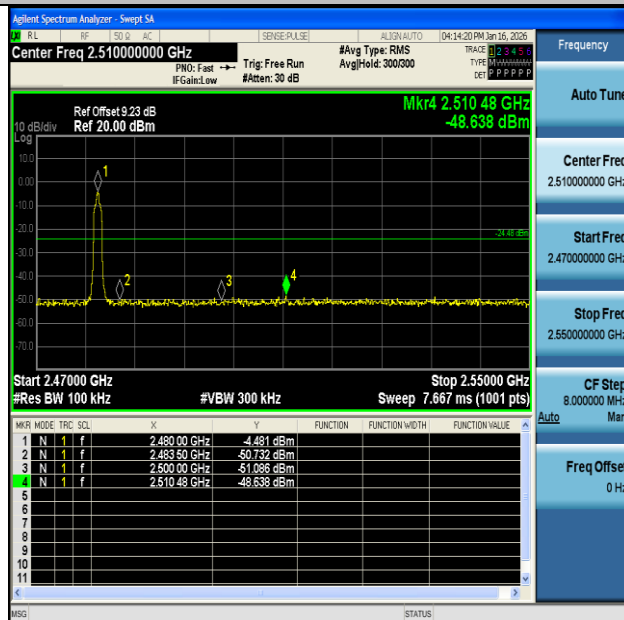


2DH5-Ant1-2480-PASS



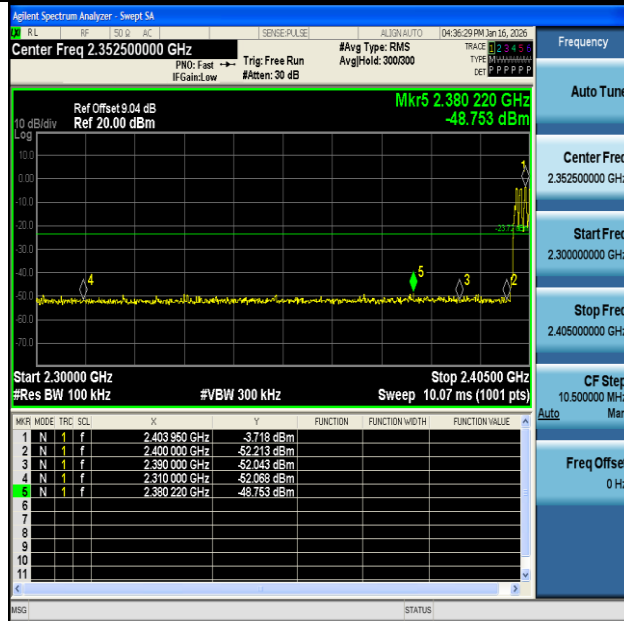


2DH5-Ant1-Hop_2402-PASS

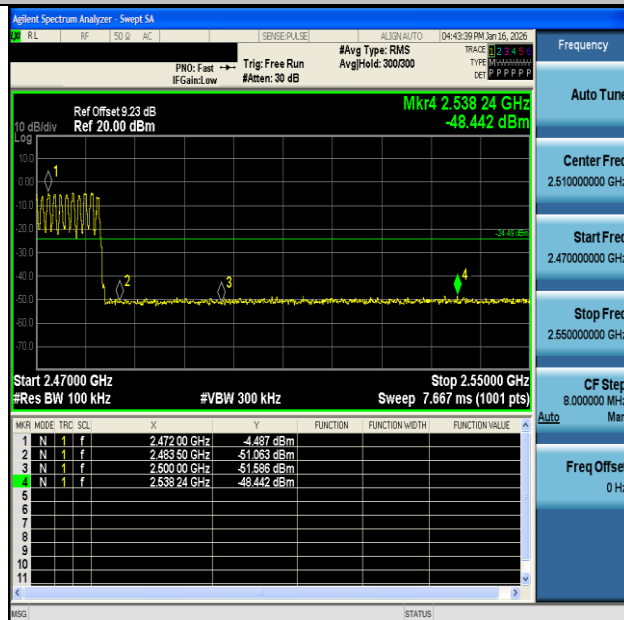


2DH5-Ant1-Hop_2480-PASS



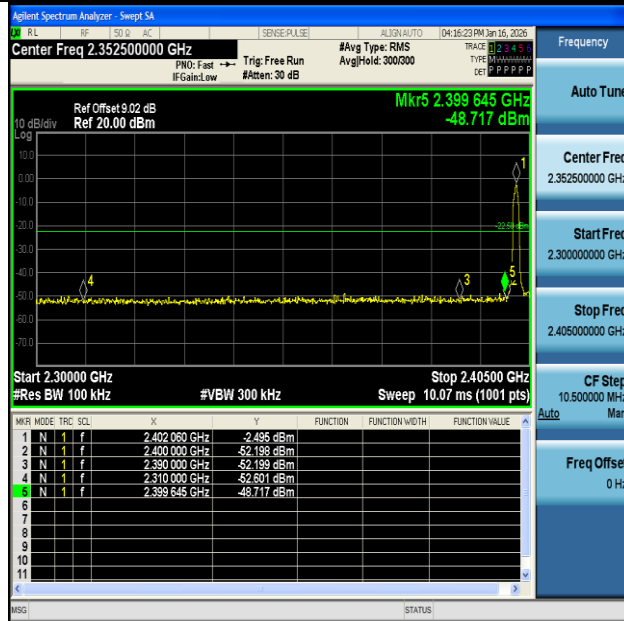


3DH5-Ant1-2402-PASS

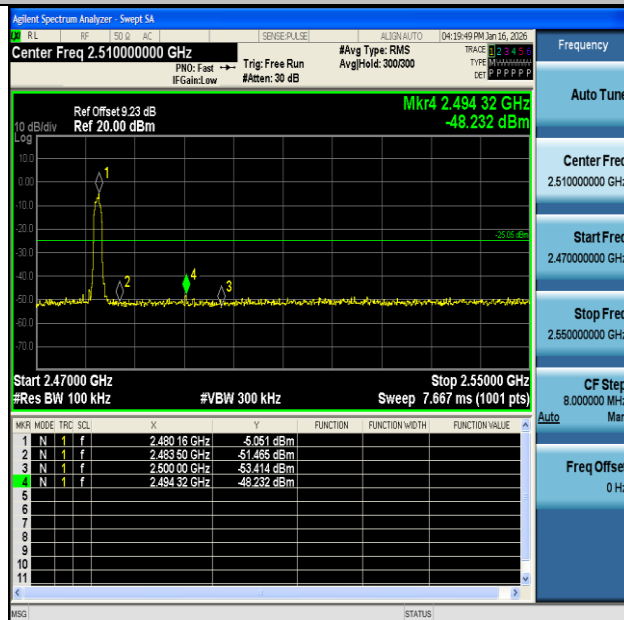


3DH5-Ant1-2480-PASS



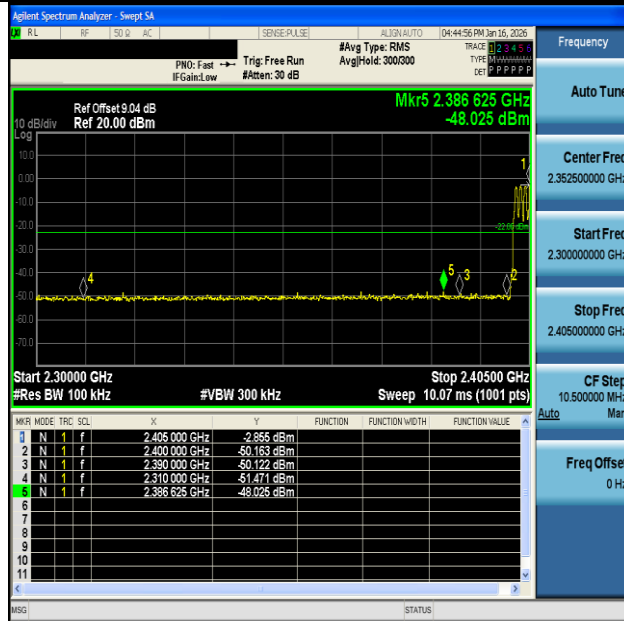

3DH5-Ant1-Hop_2402-PASS

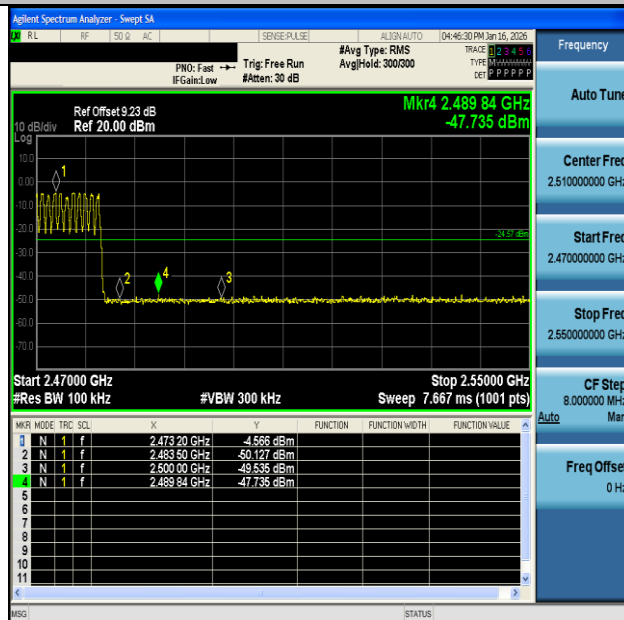

3DH5-Ant1-Hop_2480-PASS





Appendix H: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-3.14	-3.14	---	PASS
DH5	Ant1	2402	30~1000	-3.14	-62.71	≤-23.14	PASS
DH5	Ant1	2402	1000~26500	-3.14	-27.52	≤-23.14	PASS
DH5	Ant1	2441	0~Reference	-3.83	-3.83	---	PASS
DH5	Ant1	2441	30~1000	-3.83	-62.82	≤-23.83	PASS
DH5	Ant1	2441	1000~26500	-3.83	-27.7	≤-23.83	PASS
DH5	Ant1	2480	0~Reference	-4.56	-4.56	---	PASS
DH5	Ant1	2480	30~1000	-4.56	-62.89	≤-24.56	PASS
DH5	Ant1	2480	1000~26500	-4.56	-27.09	≤-24.56	PASS
2DH5	Ant1	2402	0~Reference	-6.63	-6.63	---	PASS
2DH5	Ant1	2402	30~1000	-6.63	-62.38	≤-26.63	PASS
2DH5	Ant1	2402	1000~26500	-6.63	-34.02	≤-26.63	PASS
2DH5	Ant1	2441	0~Reference	-5.43	-5.43	---	PASS
2DH5	Ant1	2441	30~1000	-5.43	-62.89	≤-25.43	PASS
2DH5	Ant1	2441	1000~26500	-5.43	-29.26	≤-25.43	PASS
2DH5	Ant1	2480	0~Reference	-4.79	-4.79	---	PASS
2DH5	Ant1	2480	30~1000	-4.79	-62.72	≤-24.79	PASS
2DH5	Ant1	2480	1000~26500	-4.79	-32.38	≤-24.79	PASS
3DH5	Ant1	2402	0~Reference	-6.89	-6.89	---	PASS
3DH5	Ant1	2402	30~1000	-6.89	-61.56	≤-26.89	PASS
3DH5	Ant1	2402	1000~26500	-6.89	-33.34	≤-26.89	PASS
3DH5	Ant1	2441	0~Reference	-3.48	-3.48	---	PASS
3DH5	Ant1	2441	30~1000	-3.48	-63.39	≤-23.48	PASS
3DH5	Ant1	2441	1000~26500	-3.48	-28.87	≤-23.48	PASS
3DH5	Ant1	2480	0~Reference	-4.80	-4.80	---	PASS
3DH5	Ant1	2480	30~1000	-4.80	-62.17	≤-24.8	PASS
3DH5	Ant1	2480	1000~26500	-4.80	-30.79	≤-24.8	PASS


Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.





Test Graphs

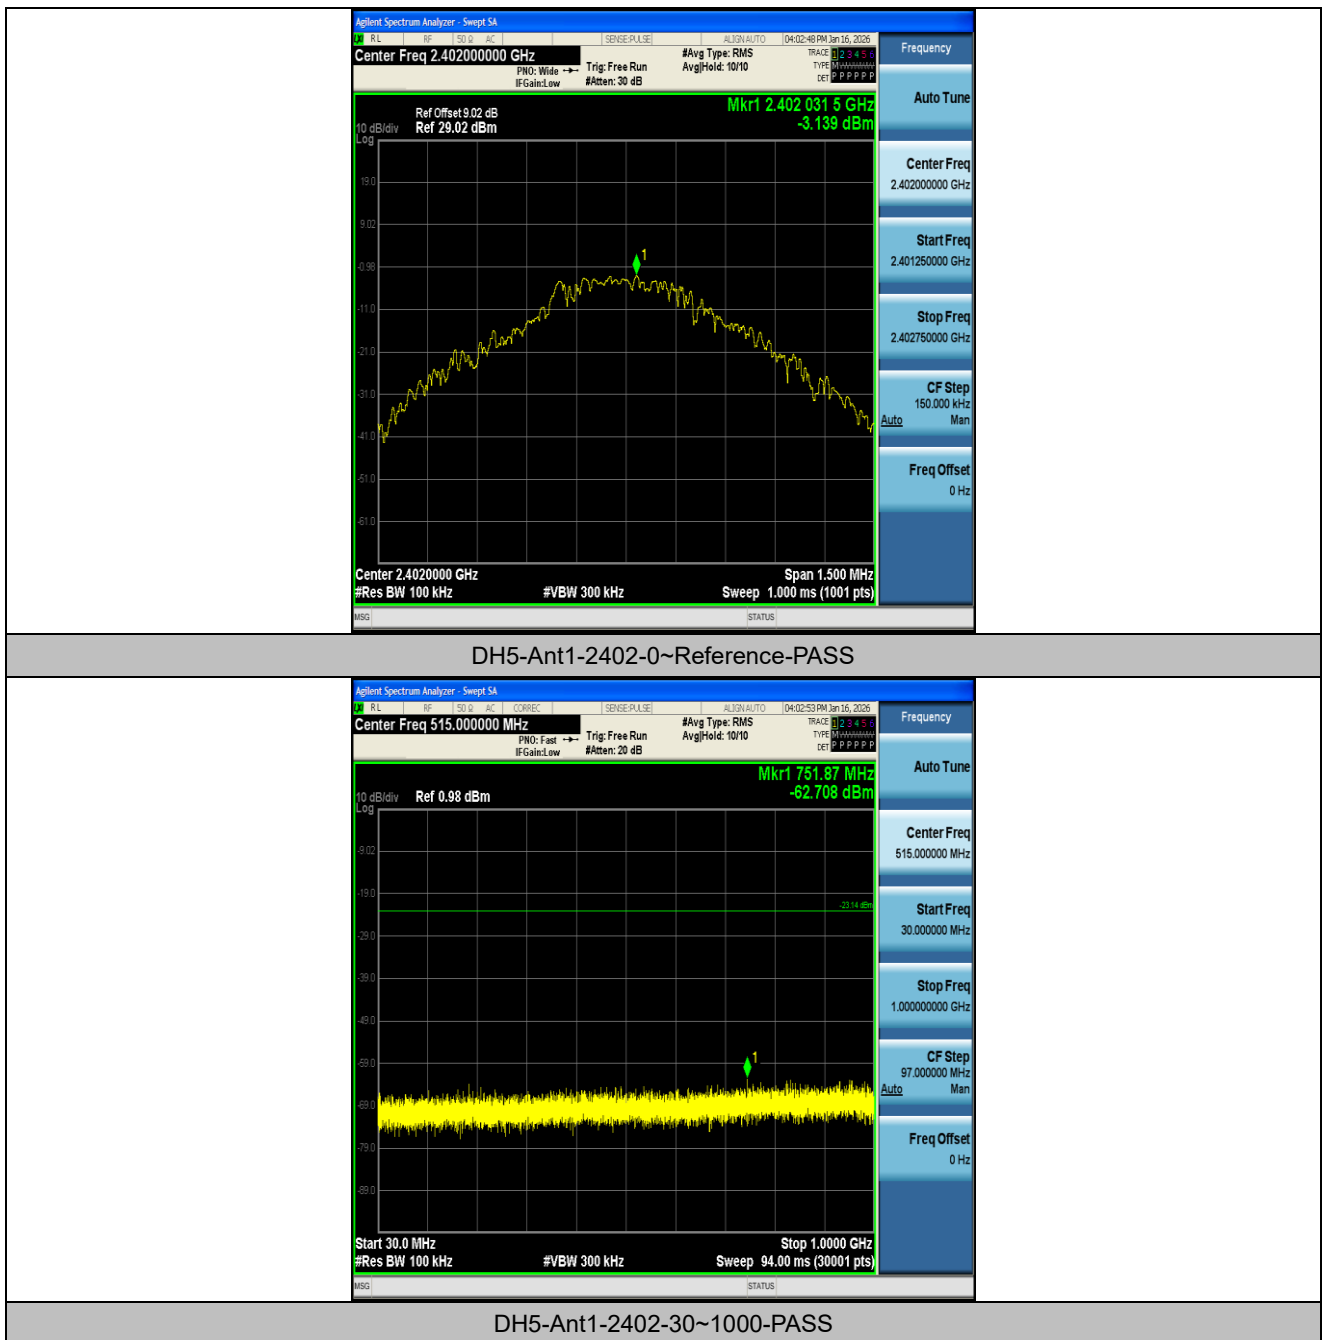

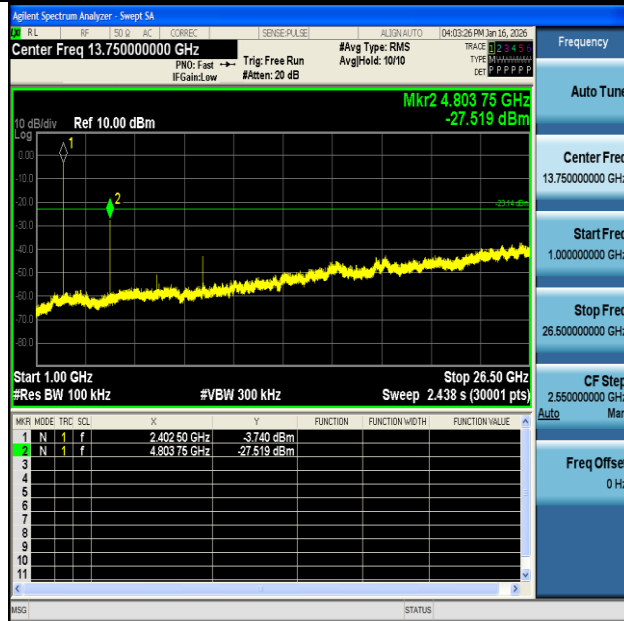


DH5-Ant1-2402-1000~26500-PASS




DH5-Ant1-2441-0~Reference-PASS



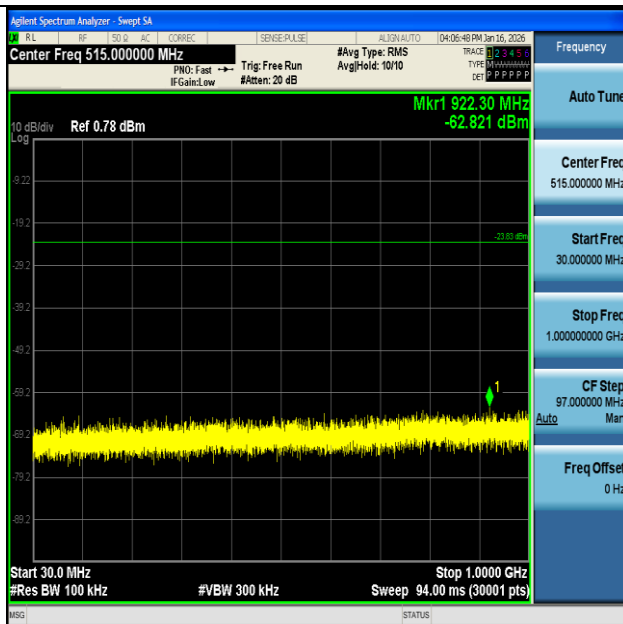

DH5-Ant1-2441-30~1000-PASS

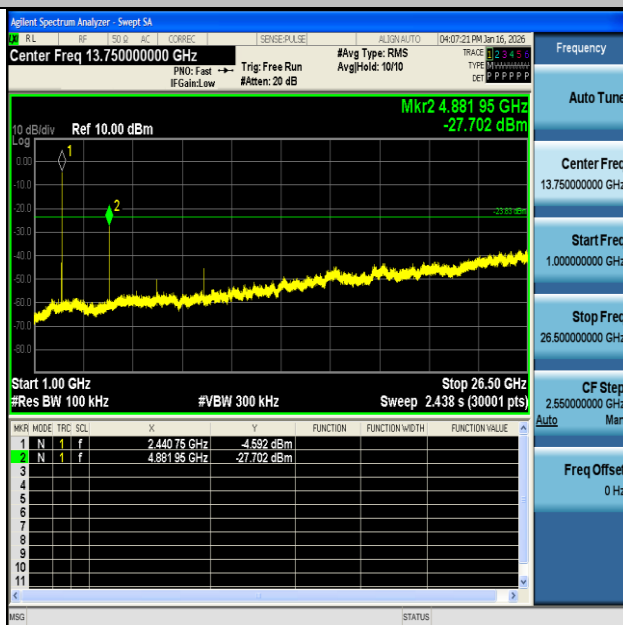


DH5-Ant1-2441-1000~26500-PASS






DH5-Ant1-2480-0~Reference-PASS

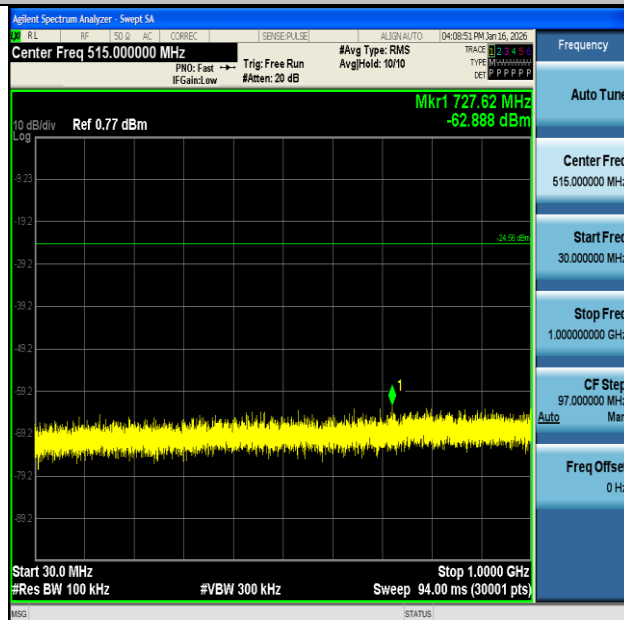


DH5-Ant1-2480-30~1000-PASS



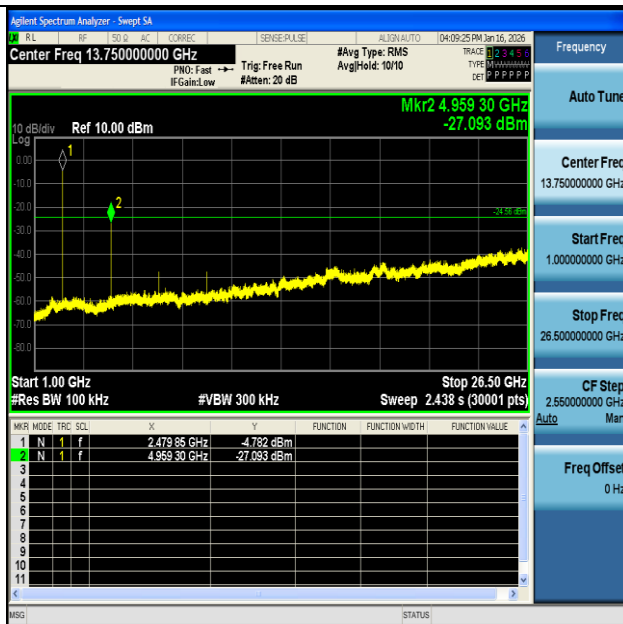

DH5-Ant1-2480-1000~26500-PASS

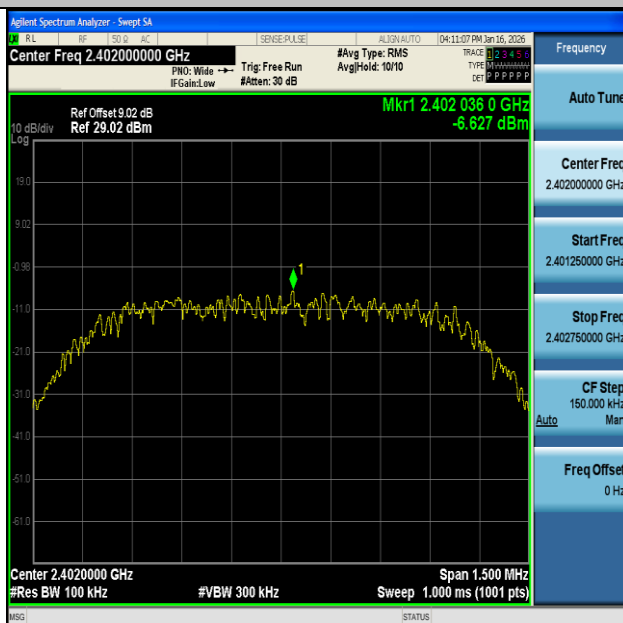


2DH5-Ant1-2402-0~Reference-PASS






2DH5-Ant1-2402-30~1000-PASS

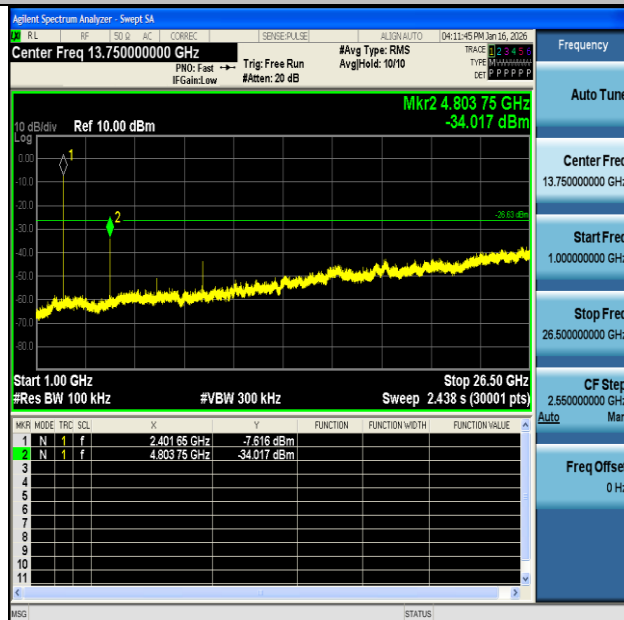


2DH5-Ant1-2402-1000~26500-PASS



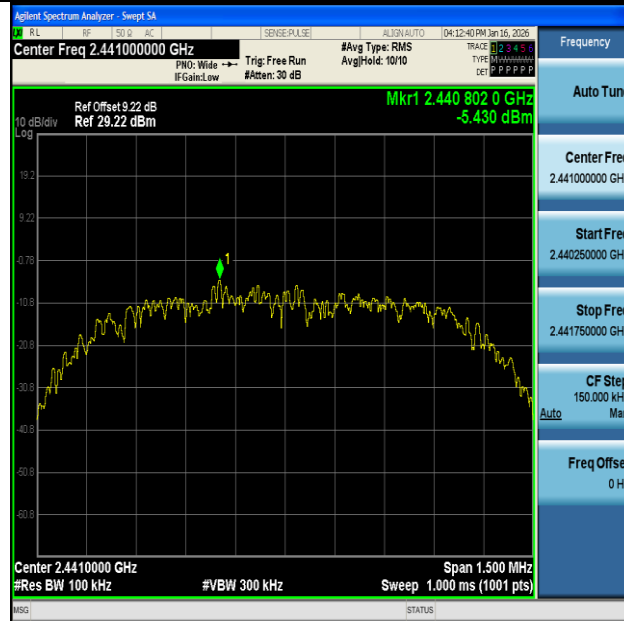


2DH5-Ant1-2441-0~Reference-PASS

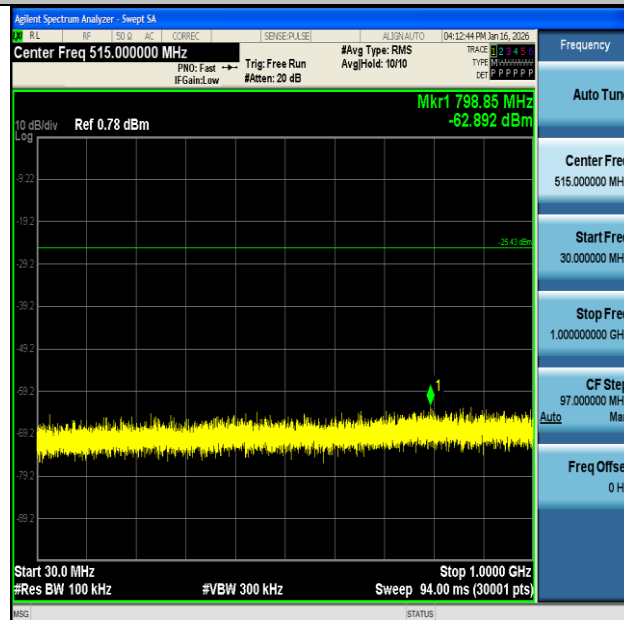


2DH5-Ant1-2441-30~1000-PASS



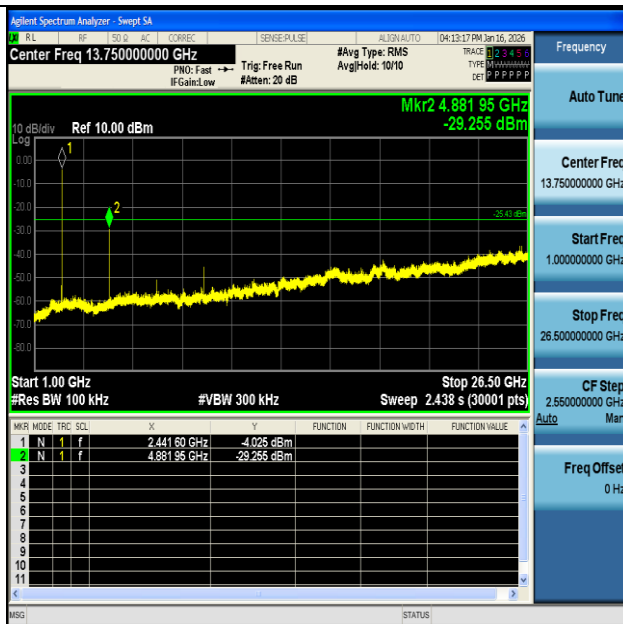


2DH5-Ant1-2441-1000~26500-PASS

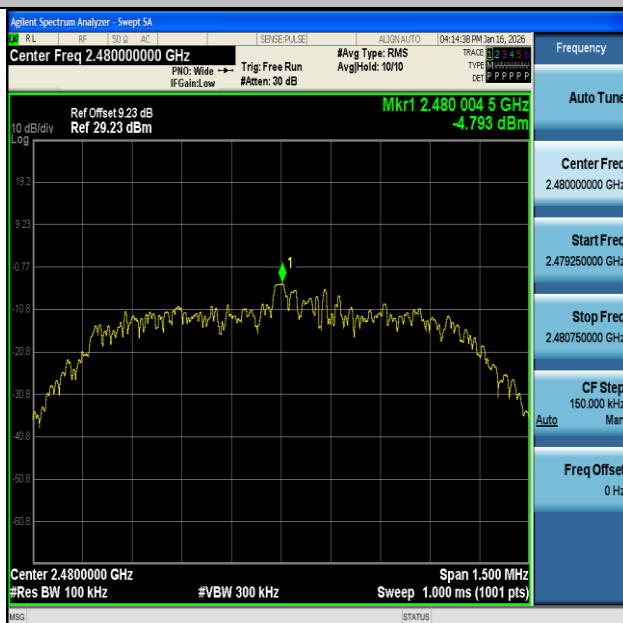


2DH5-Ant1-2480-0~Reference-PASS



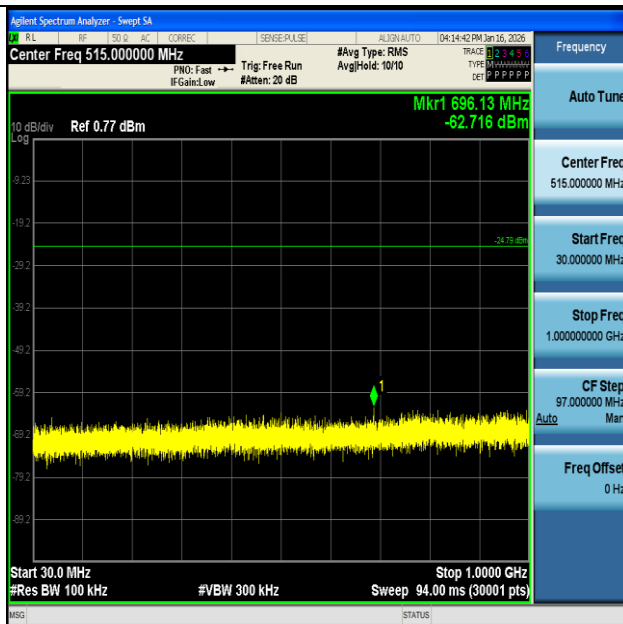

2DH5-Ant1-2480-30~1000-PASS

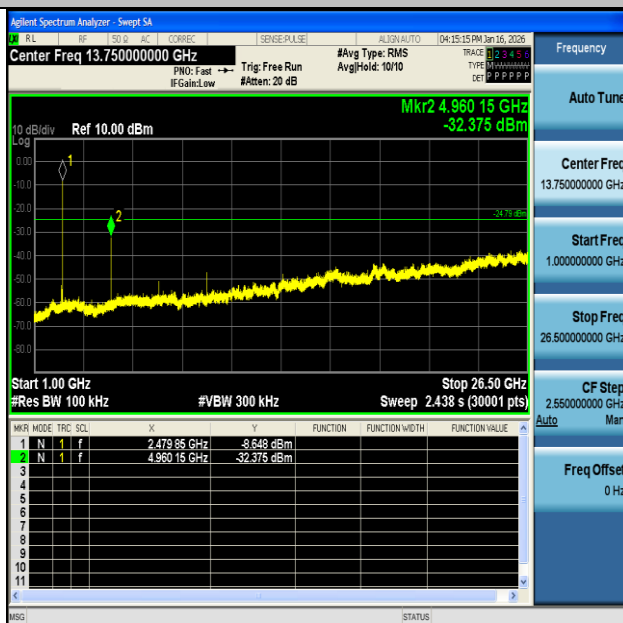


2DH5-Ant1-2480-1000~26500-PASS






3DH5-Ant1-2402-0~Reference-PASS

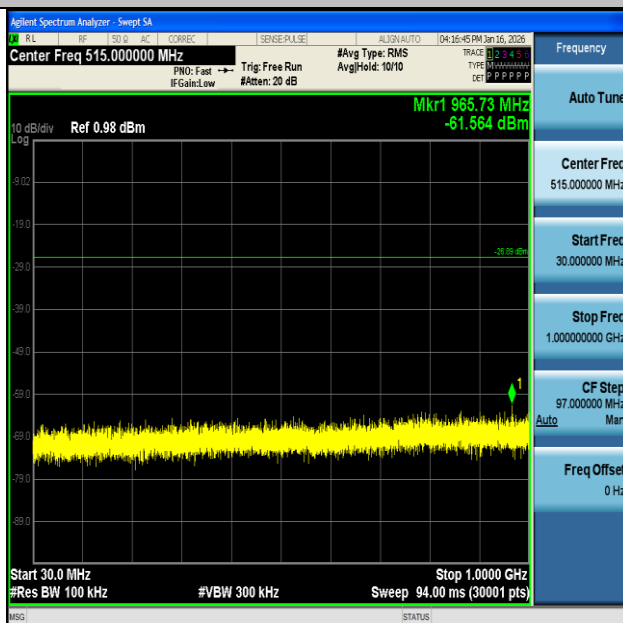


3DH5-Ant1-2402-30~1000-PASS



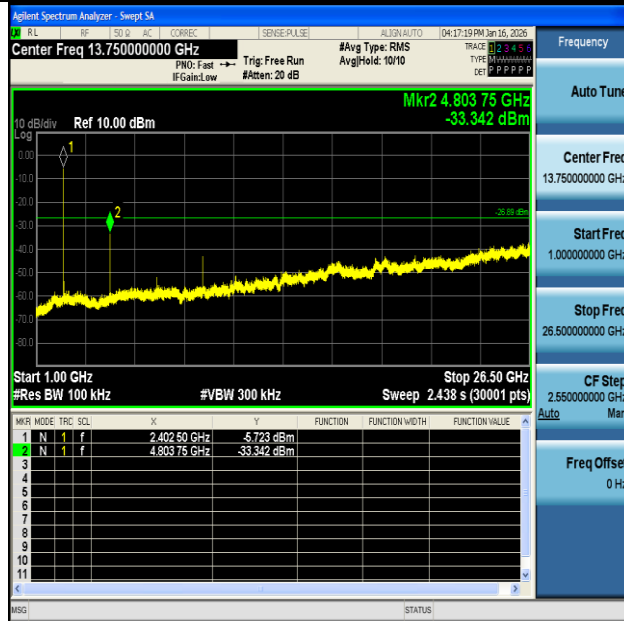

3DH5-Ant1-2402-1000~26500-PASS

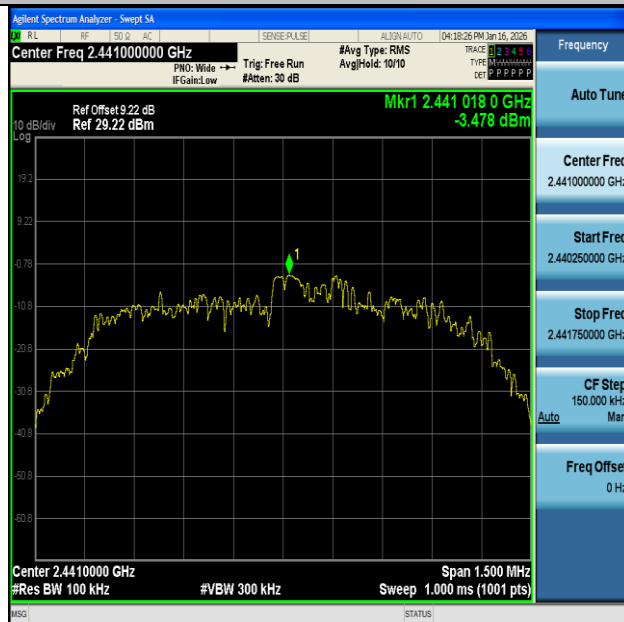


3DH5-Ant1-2441-0~Reference-PASS





3DH5-Ant1-2441-30~1000-PASS

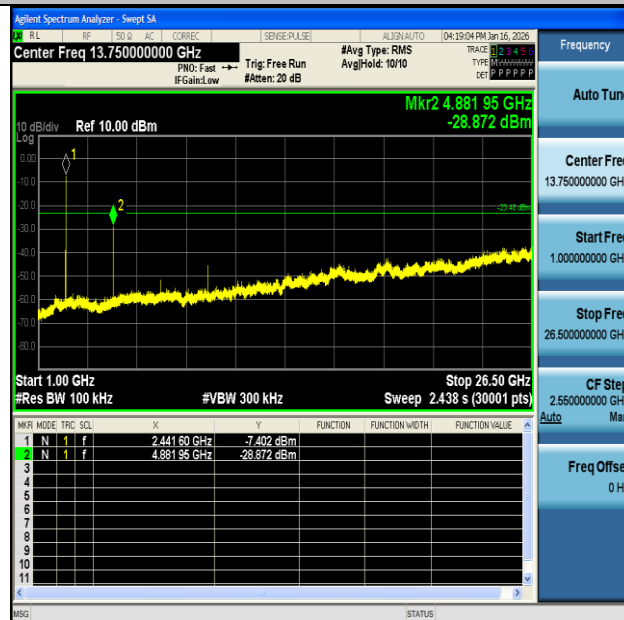


3DH5-Ant1-2441-1000~26500-PASS






3DH5-Ant1-2480-0~Reference-PASS

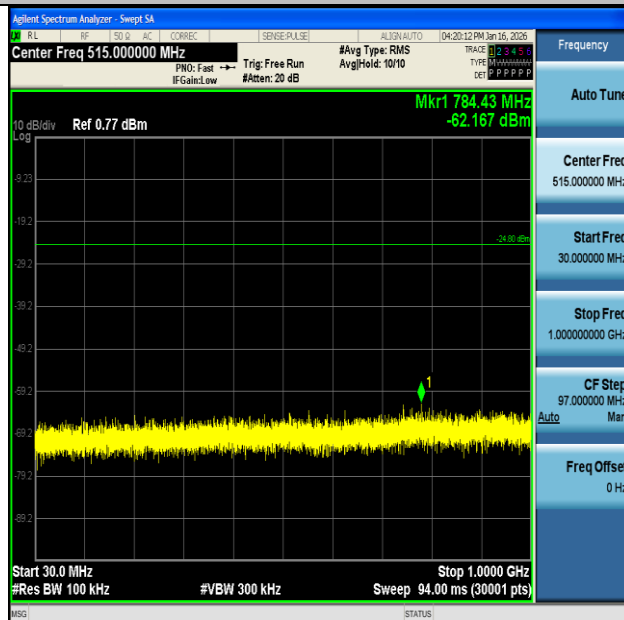

3DH5-Ant1-2480-30~1000-PASS



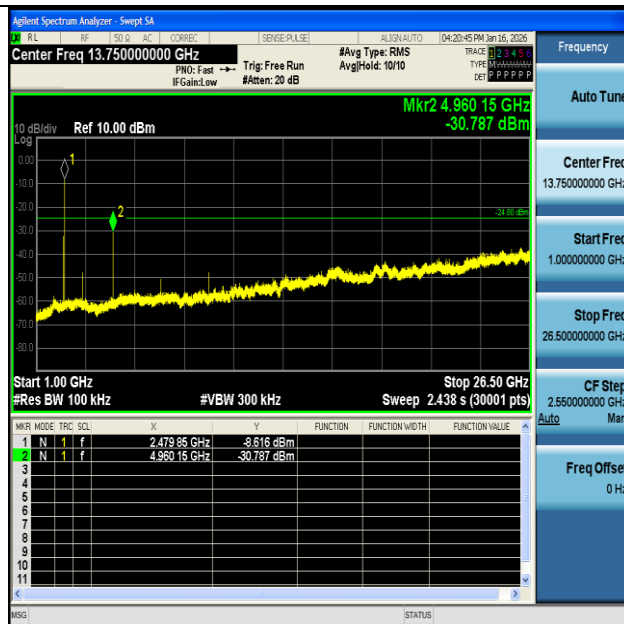

3DH5-Ant1-2480-1000~26500-PASS





Appendix I: Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.91	3.75	77.60	1.10
DH5	Ant1	2441	2.91	3.75	77.60	1.10
DH5	Ant1	2480	2.91	3.75	77.60	1.10
2DH5	Ant1	2402	2.91	3.75	77.60	1.10
2DH5	Ant1	2441	2.91	3.75	77.60	1.10
2DH5	Ant1	2480	2.91	3.75	77.60	1.10
3DH5	Ant1	2402	2.92	3.75	77.87	1.09
3DH5	Ant1	2441	2.92	3.75	77.87	1.09
3DH5	Ant1	2480	2.92	3.75	77.87	1.09


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

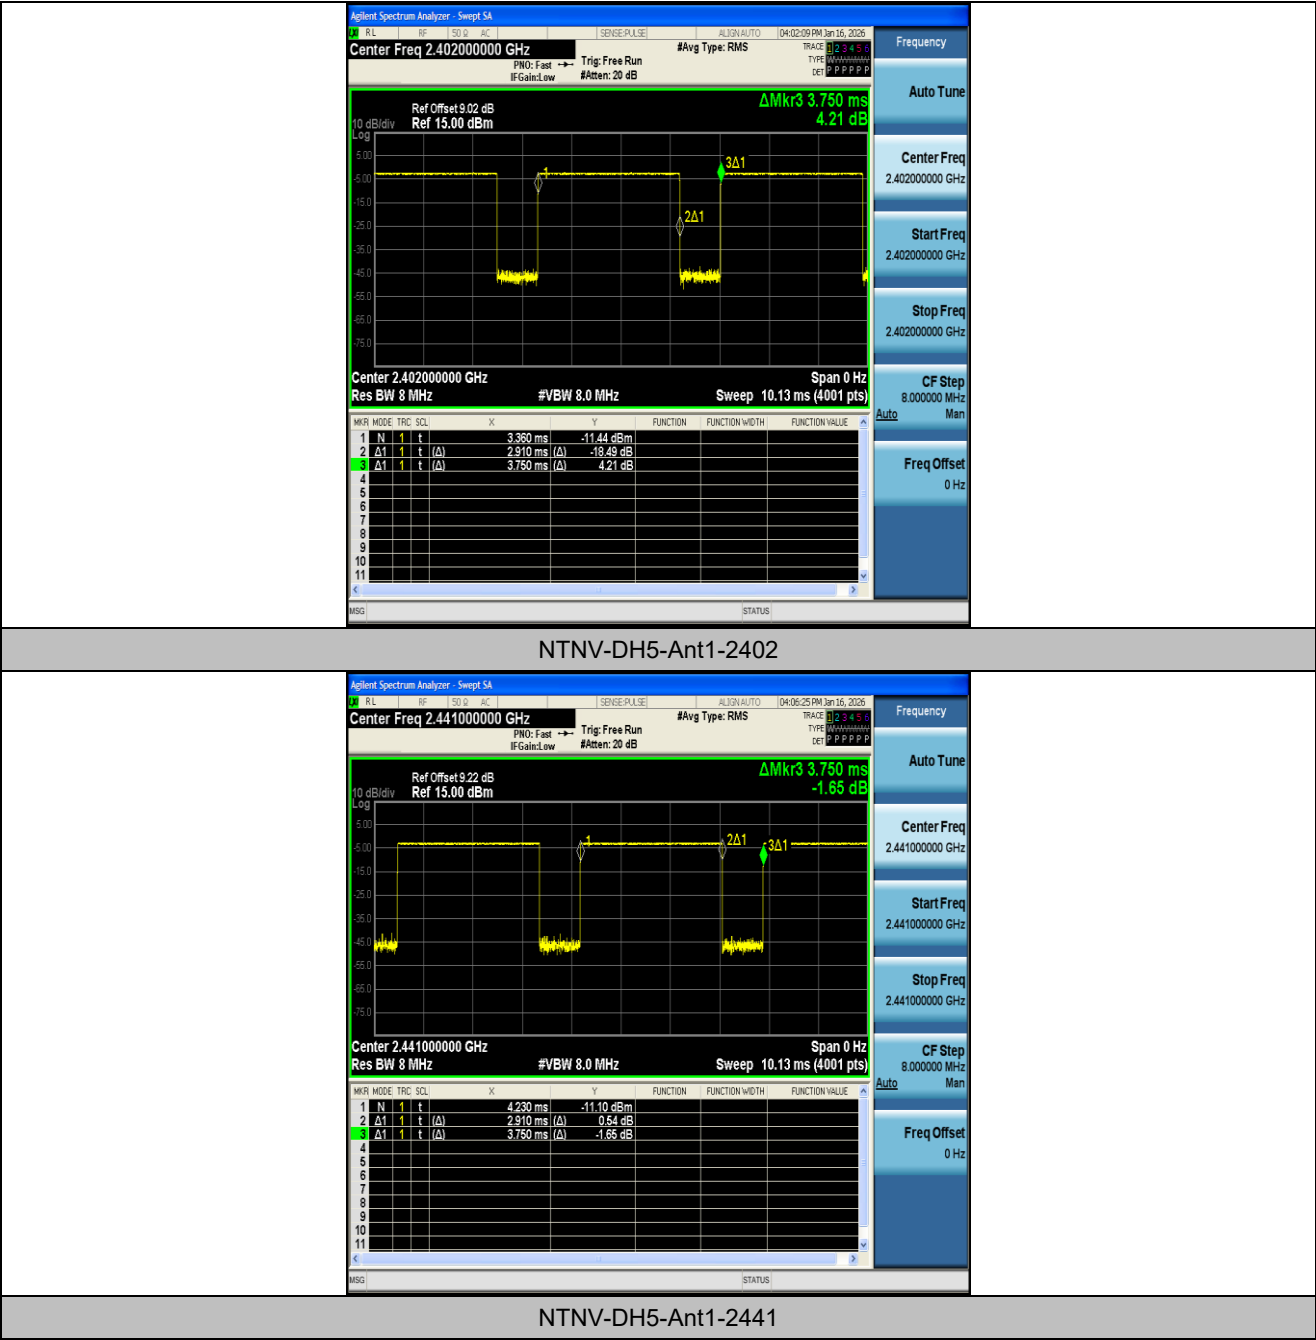

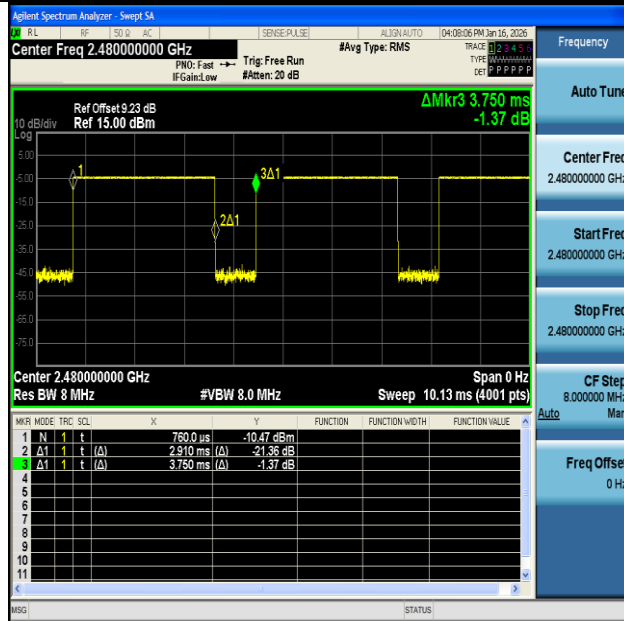


NTNV-DH5-Ant1-2480

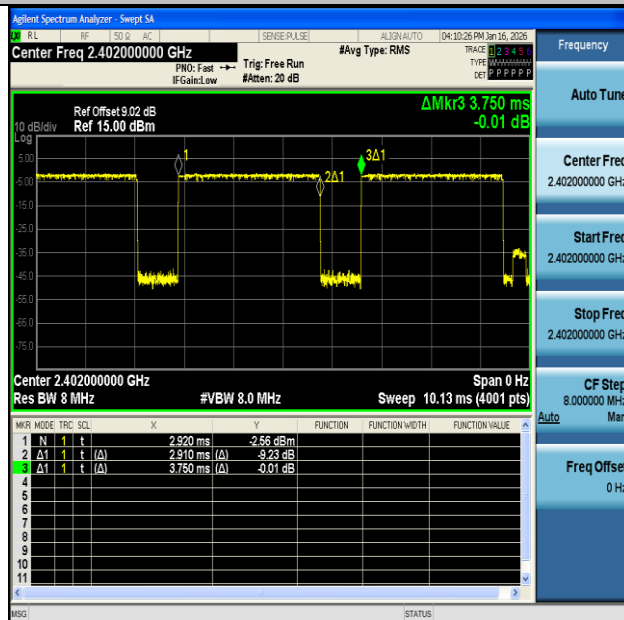


NTNV-2DH5-Ant1-2402



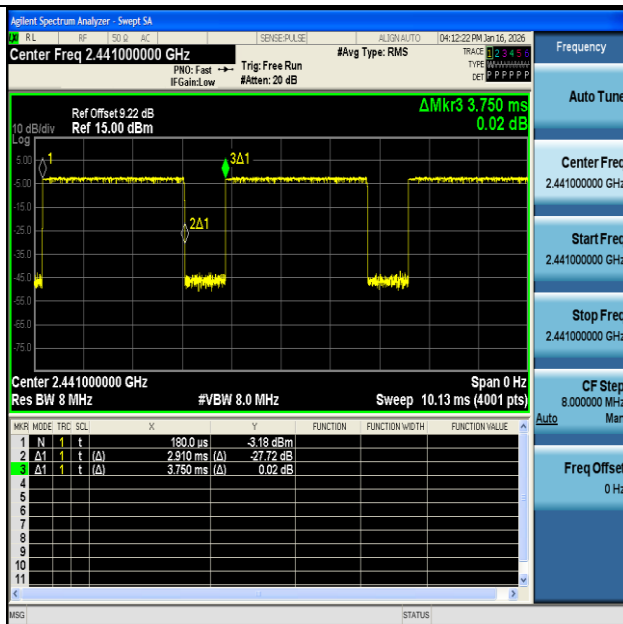


NTNV-2DH5-Ant1-2441

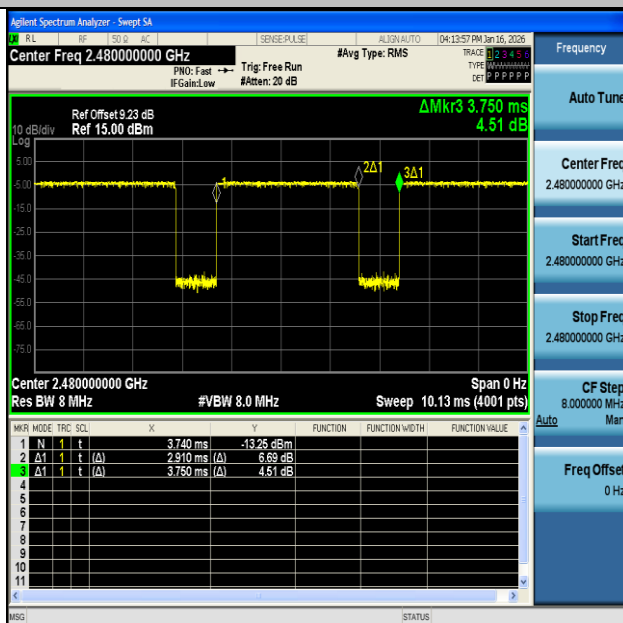


NTNV-2DH5-Ant1-2480



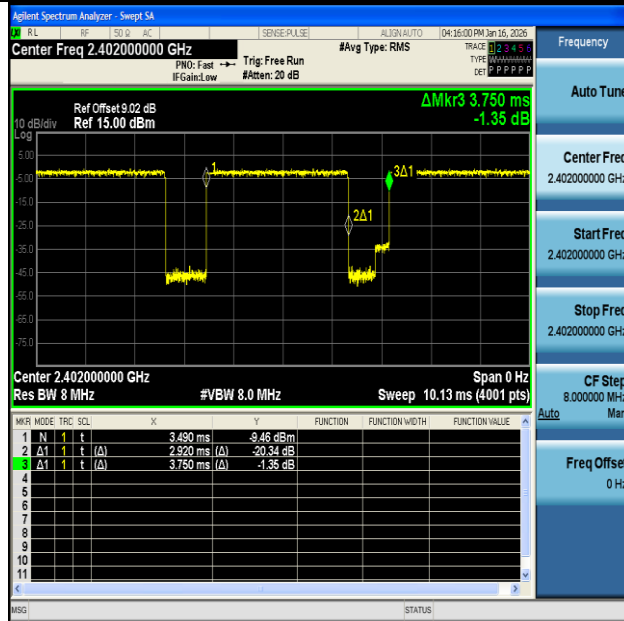


NTNV-3DH5-Ant1-2402

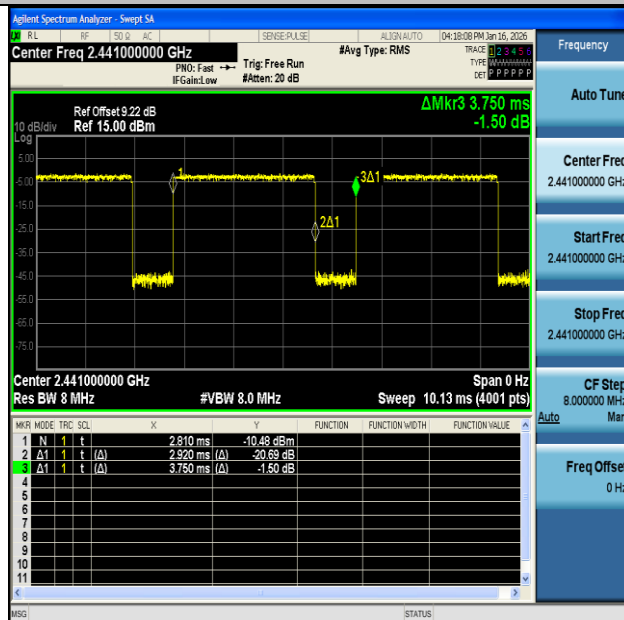

NTNV-3DH5-Ant1-2441



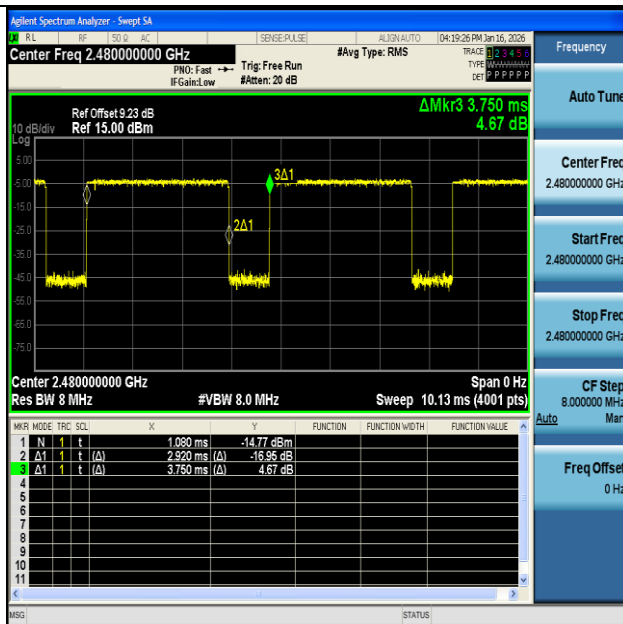

NTNV-3DH5-Ant1-2480

