

SUNNYWAY TECHNOLOGY(CHINA)

ANTENNA SPEC

Customer name: Shenzhen Asmax Infinite Technology Co., Ltd.	Entry name: WS16	
Working band: 2400-2500MHZ		
Motherboard version: WS16-V1.0-2700H-2700H-20250819		
Sunnyway Material specification		
Specification type	Sunnyway number	Customer number
GWB Antenna	SZ25512IB75	

Revision history			
Date of preparation/change	Change content	Altered person	Edition
2025.11.26	First edition release	Kunxiong Xiao	A

Sunnyway Countersign column				
R&D	ME:	To examine:	QE:	Approval:
	RF:	To examine:		

Customer will sign the column			
Electronic Engineer	Project manager	Structural Engineer	Quality Engineer

Sunnyway Technology(CHINA)

Add: 1F, Building 4, No.215-99, GaoGuang Road, QingPu District, Shanghai, China

Tel: +86-021-6083 5368 Fax: +86-021-6484 2328

Email: sales@sunnyway-iot.com Web: www.sunnyway-iot.com

Directory

ANTENNA SPEC	1
1. Project information	3
1.1 Mockup picture	3
1.2 Antenna product picture	错误！未定义书签。
2. Matching circuit	3
3. Antenna passive testing data	3
3.1 S11 Description of the test method	3
3.2 S11 Test parameters	4
3.3 Antenna efficiency and gain	5
4. Antenna active testing data	7
4.1 Test the environment	7
4.2 OTA Active testing data	8
4.2.1 WIFI Testing data	8
4.2.2 GPS Testing data:	错误！未定义书签。
5. Environmental treatment methods	9
6. Standard for mass production antennas	9
7. Engineering drawings	10

1. Project information

1.1 Mockup picture



Description:

The customer will finally verify the antenna performance and keep the machine in our company for at least one year, which is convenient to analyze and solve the abnormal situation in the antenna mass production and ensure the antenna delivery quality.

2. Matching circuit

Antenna matching has not been changed.


3. Antenna passive testing data

3.1 S11 Description of the test method

Test the equipment: Vector network analyzer (Agilent E5071C)

Test methodology: Use a 50 ohm CABLE cable to export from the instrument test port, use the calibration piece to calibrate and connect the SMA connector of the test fixture, and record the return loss and standing wave ratio corresponding to the relevant frequency point.

Below is a schematic picture of the test:

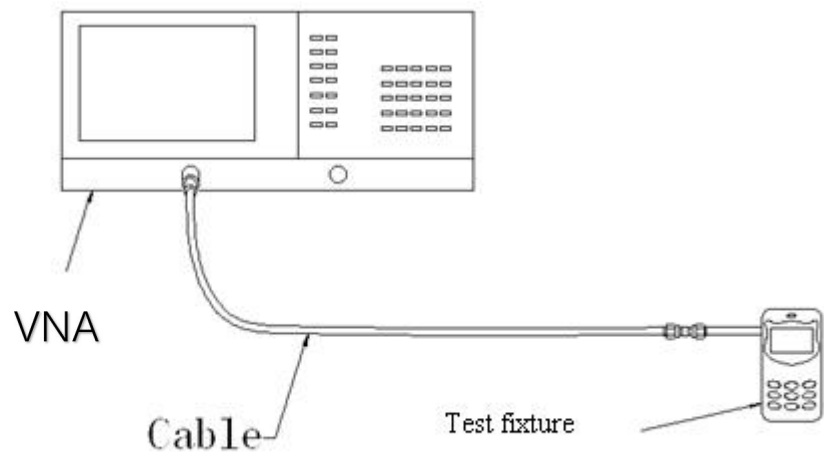

Test schematic diagram

3.2 S11 Test parameters

(Freq.) MHz	2400	2500
VSWR	1.84	1.44


VSWR




3.3 Antenna efficiency and gain


Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	-0.25	55.98
2410	0.37	55.31
2420	-0.77	54.08
2430	-0.98	51.29
2440	-0.89	53.83
2450	-0.39	58.08
2460	-0.59	52.36
2470	-0.76	50.09
2480	-0.41	52.72
2490	-0.04	55.85
2500	-0.33	50.23



2D Pattern(2450MHz)

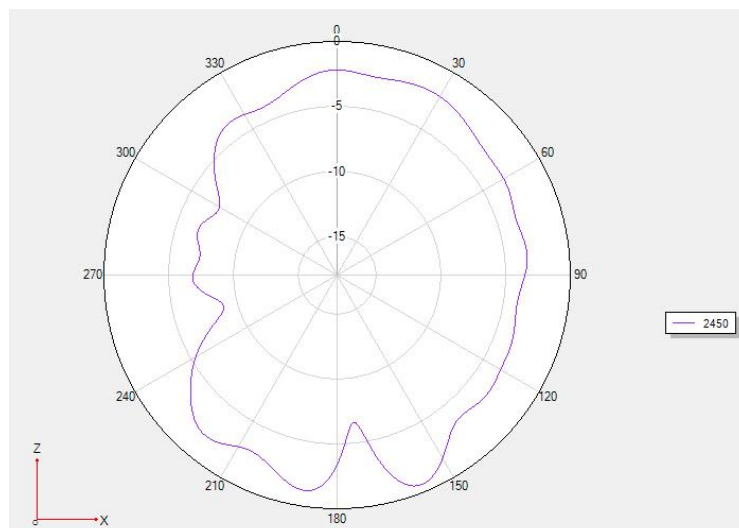

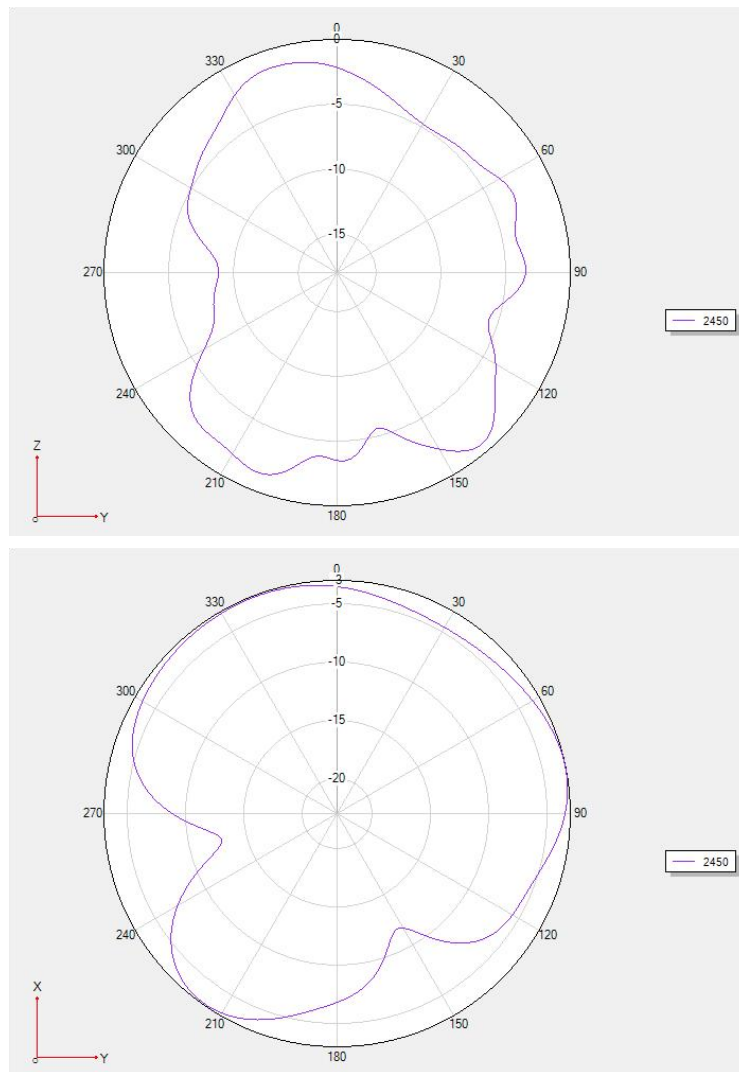

3D Apple chart(2450MHz)

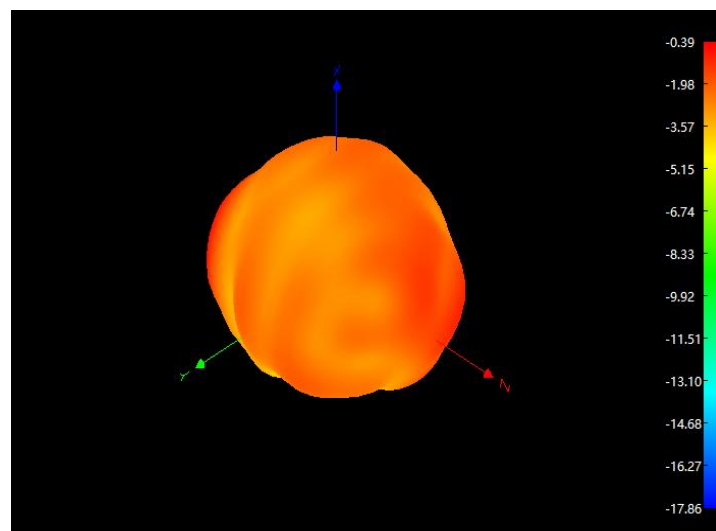

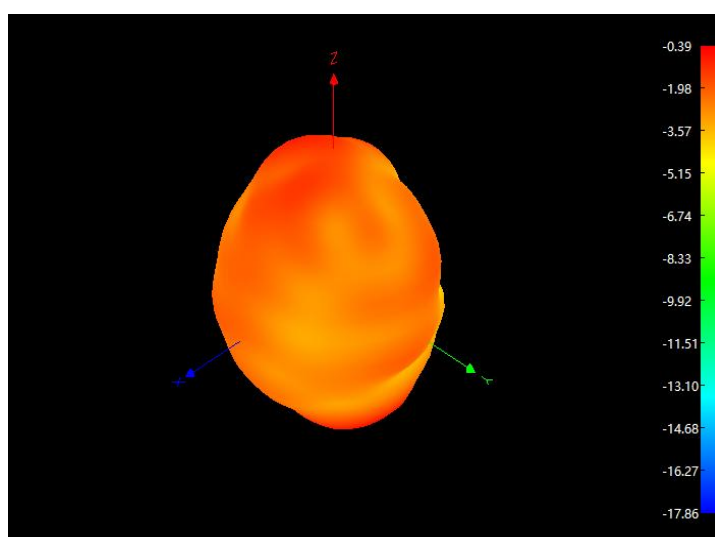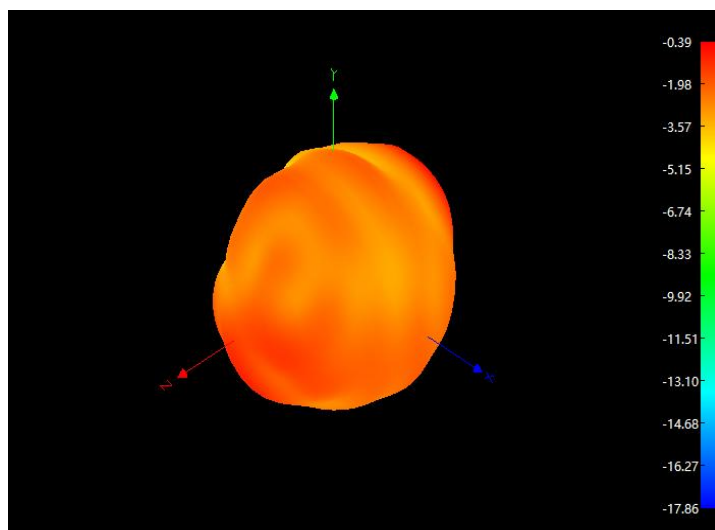

4. Antenna active testing data

4.1 Test the environment

Test the system: Multi-probe OTA measurement system (XH-IoT)

Test the environment: Temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $50\% \pm 15\%$

Test the equipment: When testing passive data, use the network analyzer R&S ZND/ Agilent E5071C
When testing active data, use the Agilent 8960/CMW500/SP9500E/SP8315

OTA实验室



综测仪器



SP9500-CTS-5G



CMW500

SP8315 NB-IoT
/eMTC

其他设备



OTA head hand



OTA ear hand




OTA arm hand

4.2 OTA Active testing data

4.2.1 WIFI Testing data

Band	Channel	TRP(dBm)
Classic	0	20.98
Classic	39	20.68
Classic	78	20.87
Classic	0	-88.52
Classic	39	-88.34
Classic	78	-89.69

5. Environmental treatment methods

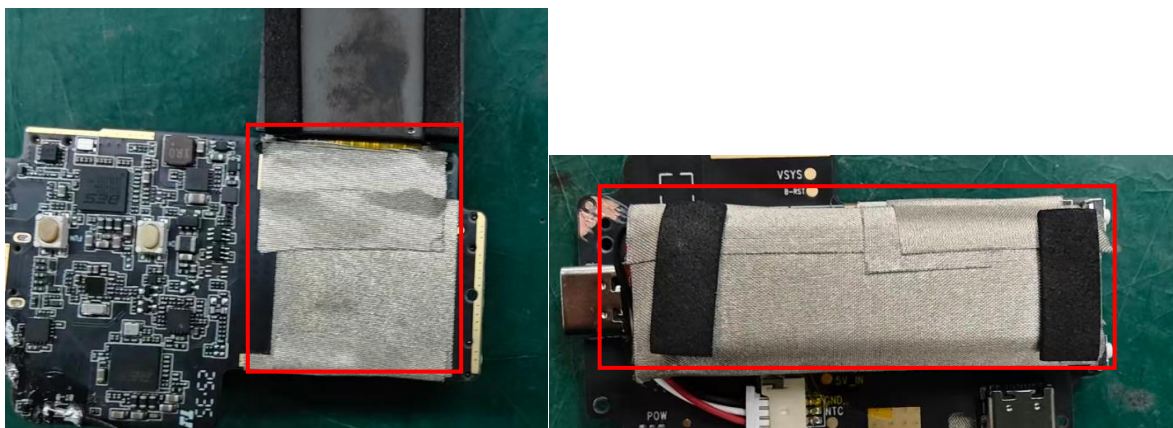

Wrap the screen cable and battery with conductive cloth and ground it

6. Standard for mass production antennas

When the antenna is mass-produced, the VSWR is used as the mass production test standard.

According to the differences in the project itself, the following criteria are given:

Freq. (MHz)	Mass production standards
2400-2500MHz	$VSWR(\text{Production performance}) < VSWR(\text{Confirmed performance}) \pm 0.5$

7. Engineering drawings

