


Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

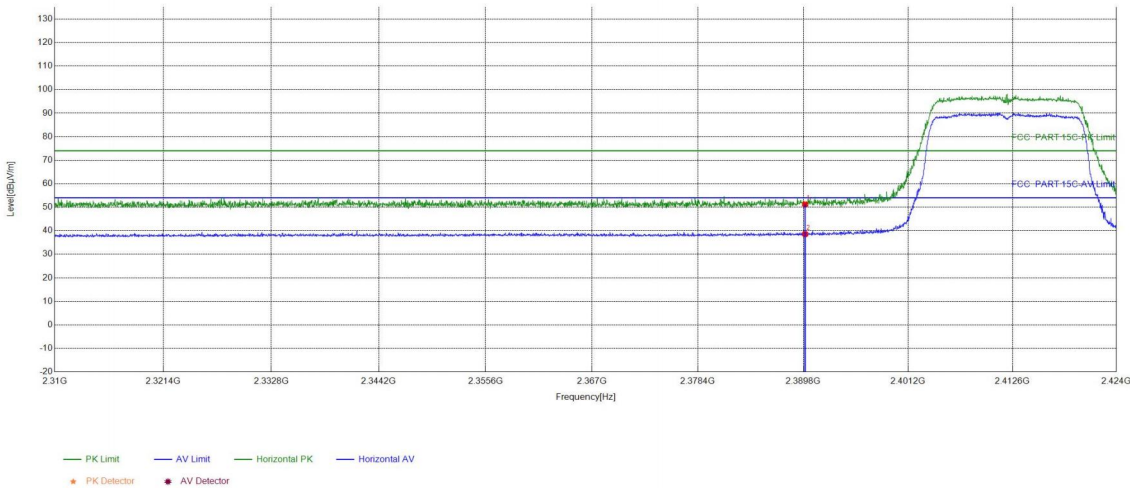

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.28	51.24	74.00	22.76	PASS	Horizon	PK
2	2390	15.96	22.60	38.56	54.00	15.44	PASS	Horizon	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

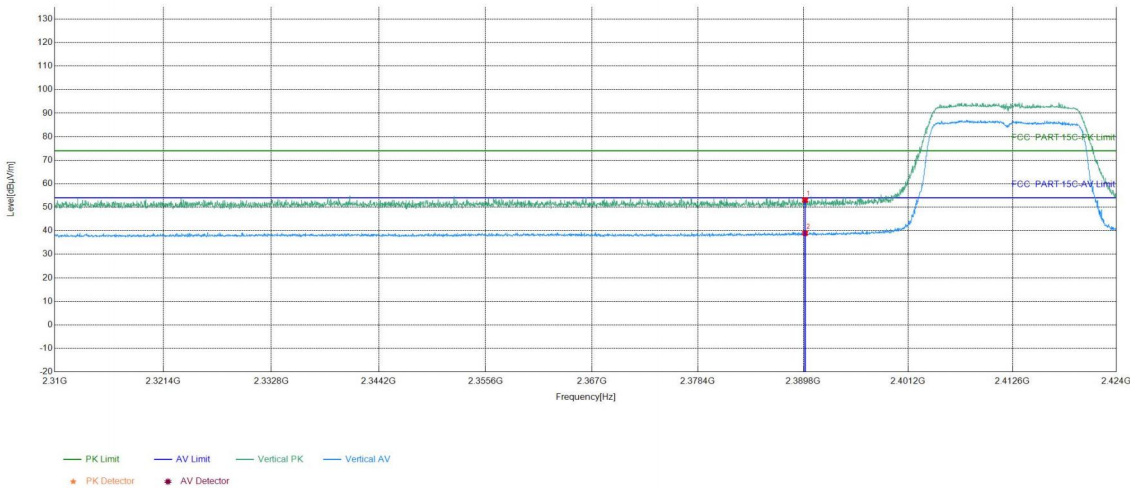

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.04	53.00	74.00	21.00	PASS	Vertical	PK
2	2390	15.96	22.99	38.95	54.00	15.05	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

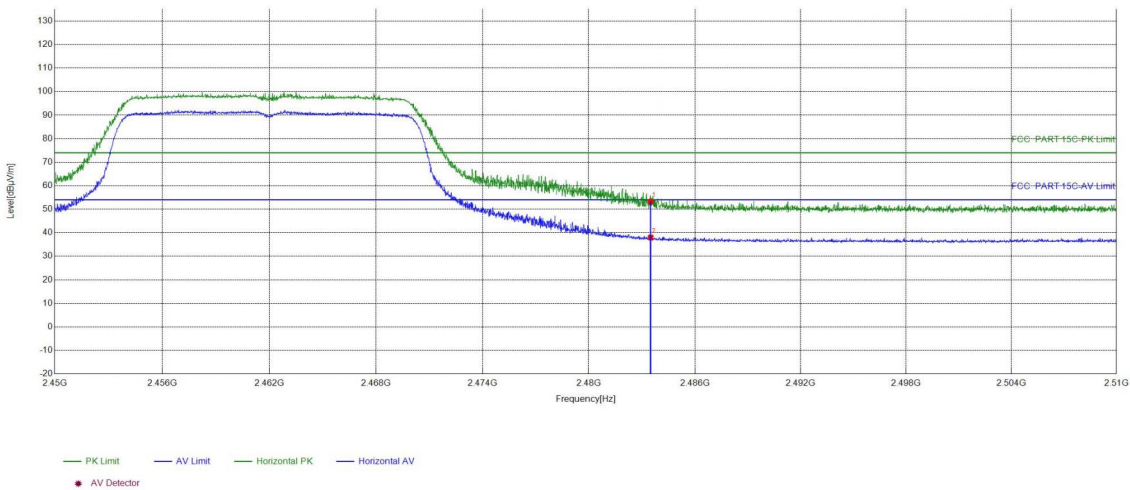

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.96	53.25	74.00	20.75	PASS	Horizon	PK
2	2483.5	16.29	21.69	37.98	54.00	16.02	PASS	Horizon	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

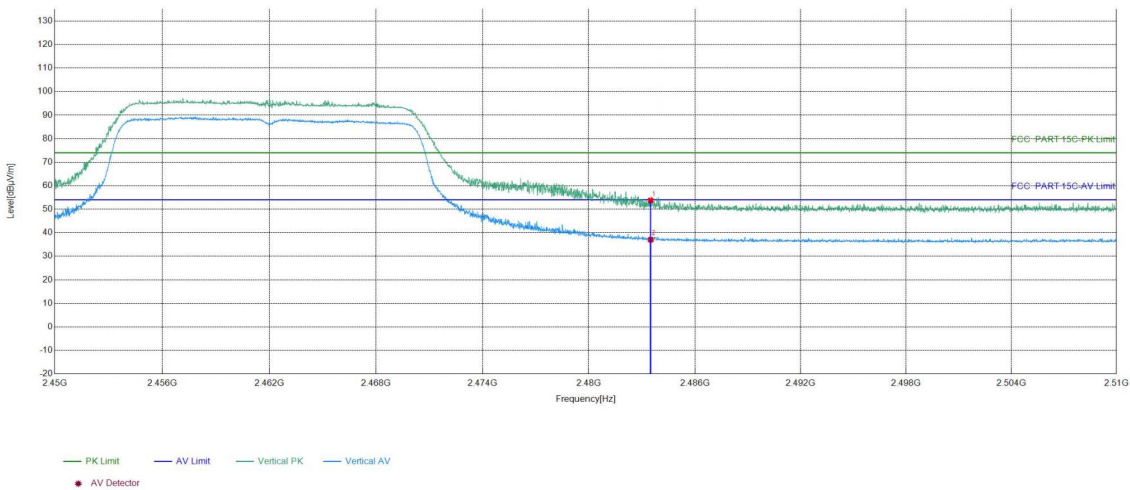

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.44	53.73	74.00	20.27	PASS	Vertical	PK
2	2483.5	16.29	20.76	37.05	54.00	16.95	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

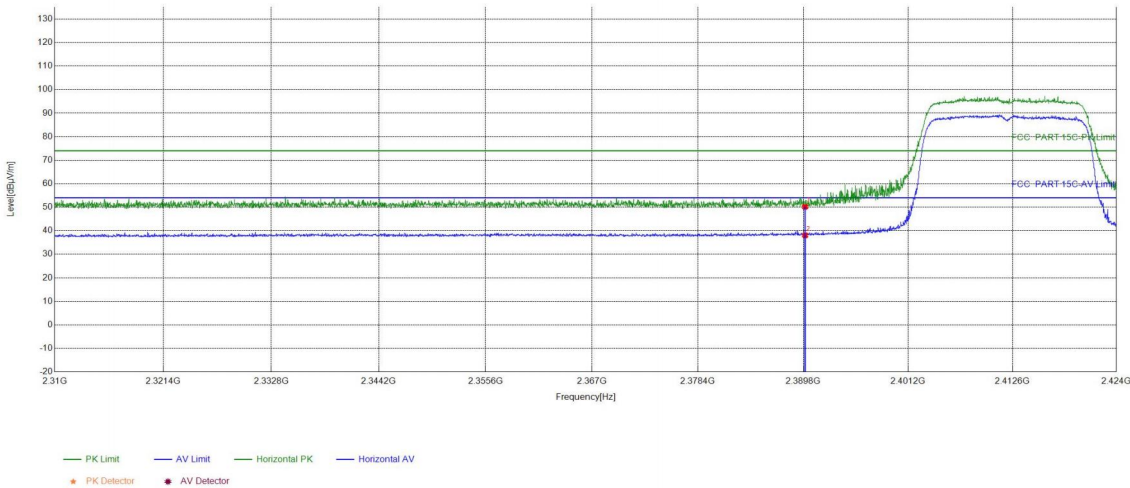

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.21	50.17	74.00	23.83	PASS	Horizon	PK
2	2390	15.96	22.10	38.06	54.00	15.94	PASS	Horizon	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

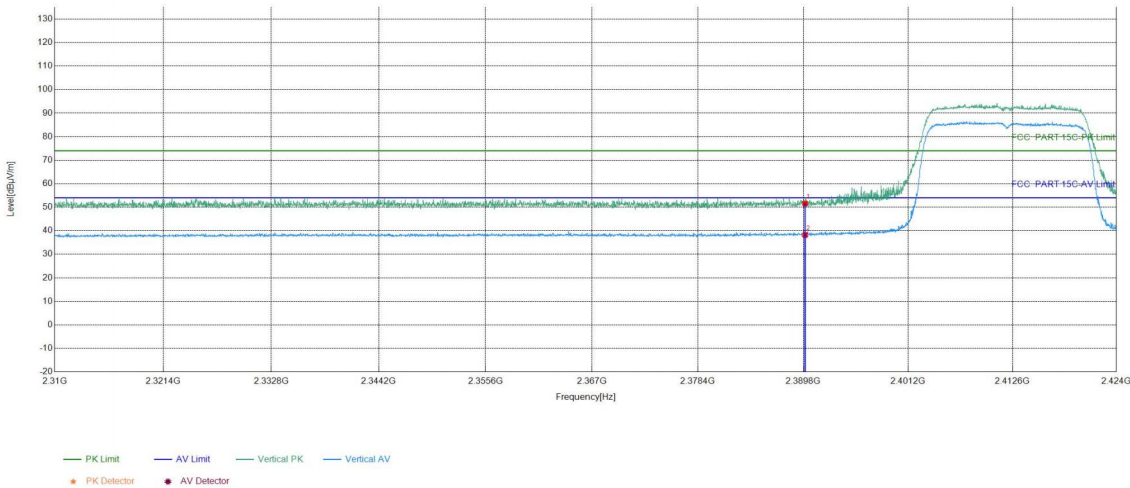

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.63	51.59	74.00	22.41	PASS	Vertical	PK
2	2390	15.96	22.24	38.20	54.00	15.80	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

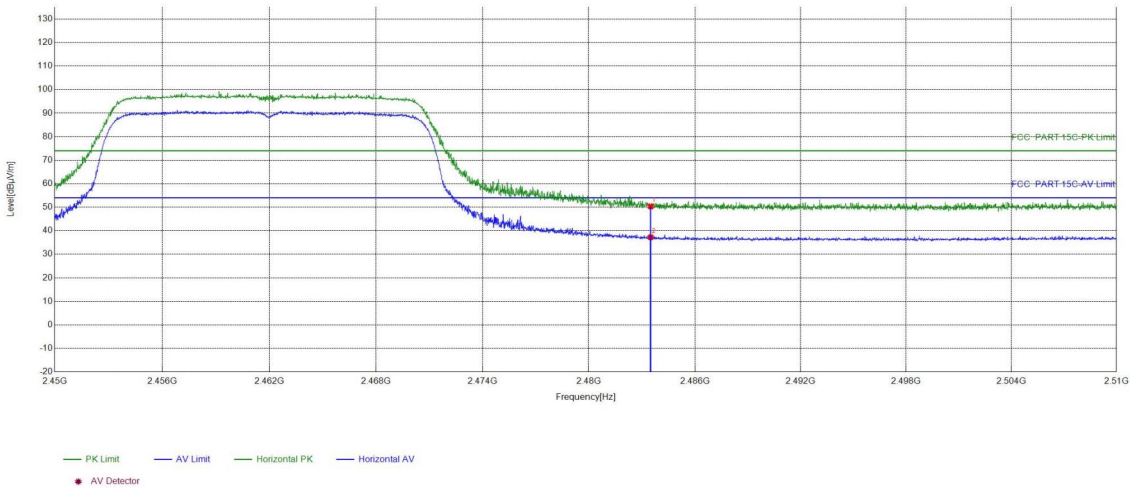

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.02	50.31	74.00	23.69	PASS	Horizon	PK
2	2483.5	16.29	20.93	37.22	54.00	16.78	PASS	Horizon	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

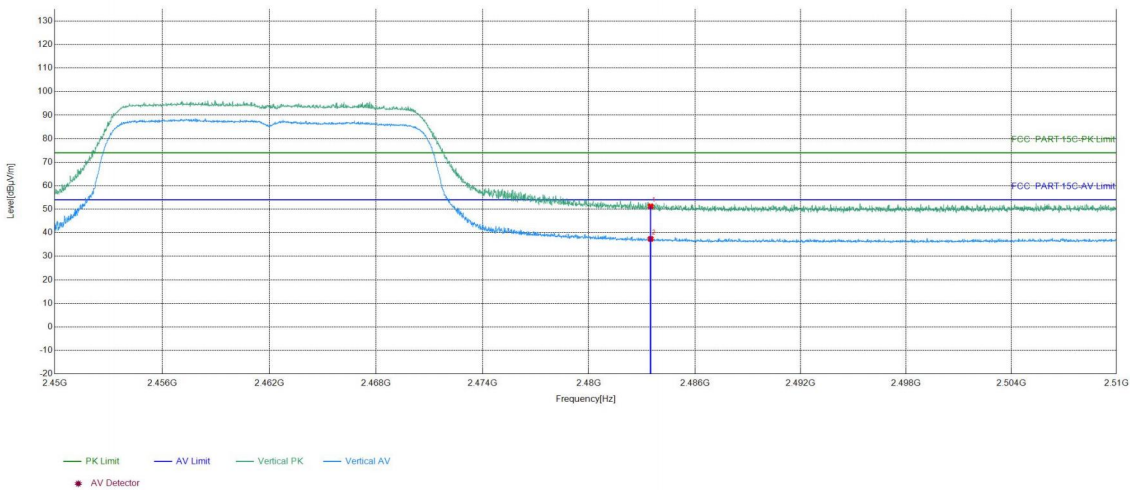

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.95	51.24	74.00	22.76	PASS	Vertical	PK
2	2483.5	16.29	21.09	37.38	54.00	16.62	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

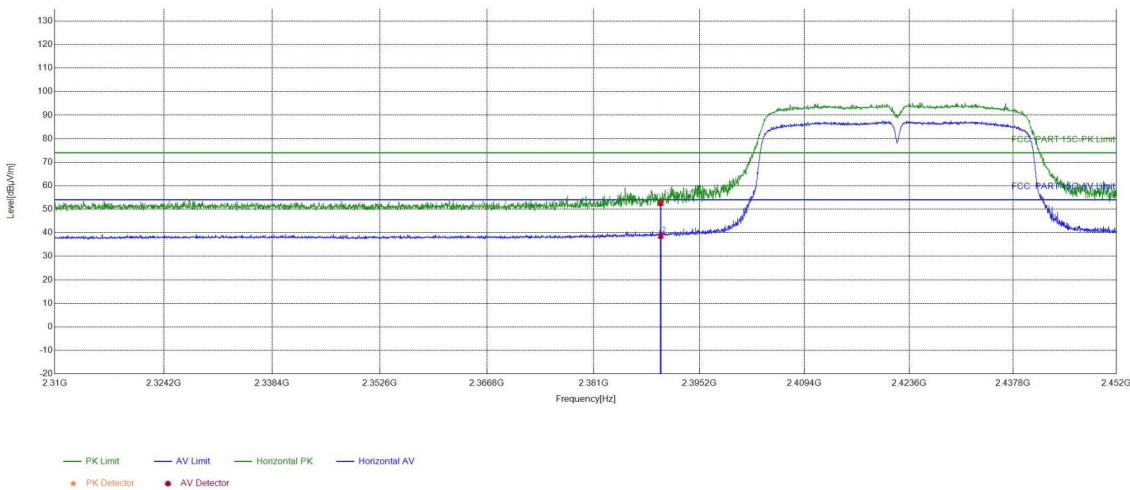

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.55	52.51	74.00	21.49	PASS	Horizon	PK
2	2390	15.96	22.63	38.59	54.00	15.41	PASS	Horizon	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

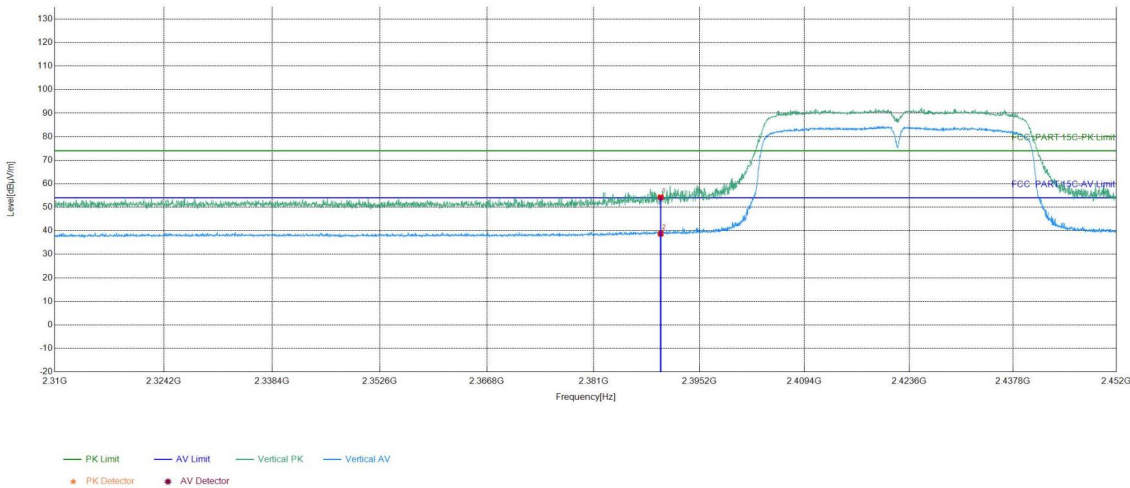

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	38.28	54.24	74.00	19.76	PASS	Vertical	PK
2	2390	15.96	22.79	38.75	54.00	15.25	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/4/19


Test Graph

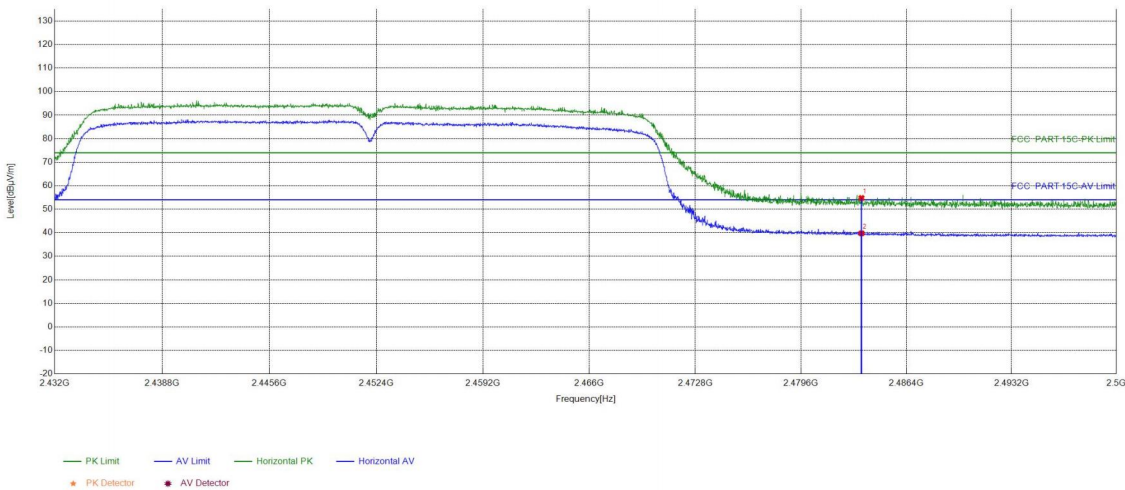

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.48	54.77	74.00	19.23	PASS	Horizon	PK
2	2483.5	16.29	23.47	39.76	54.00	14.24	PASS	Horizon	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Remark:	/	Test_Date	2026/4/19

Test Graph

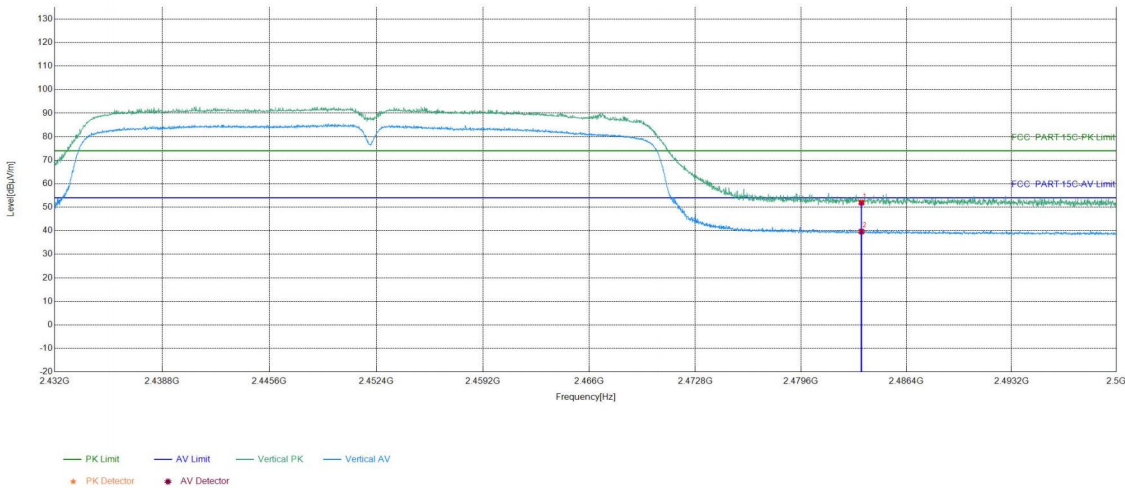

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.65	51.94	74.00	22.06	PASS	Vertical	PK
2	2483.5	16.29	23.37	39.66	54.00	14.34	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S80801402

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32R82488001.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***