

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: Shenzhen Zhonghexin Electronics Co. , Ltd
CUSTOMER:

客 戶 料 號:
CUST P/N:

DXD 料 號:
DXD P/N:

產 品 型 號: A11/G43*5*0.65mm-10mm inner diameter 20.
DESC: 5 number of turns 10TS
0.08*24*2P 6.6uH

日 期: 2025-8-09
DATE:

版 本: A.0
Version:

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Zhipeng Rao	Yan Xu	Liang Xie	

Address: 5th Floor, Building D, New Yongfeng Tianxin Industrial Park, Fengzheng Road, Kengwei Avenue, Shangwu Community, Shiyan Street, Bao'an District, Shenzhen City


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	A11/G43*5*0.65mm-10mm	版本 Rev: A.0	客戶 CUST:	
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

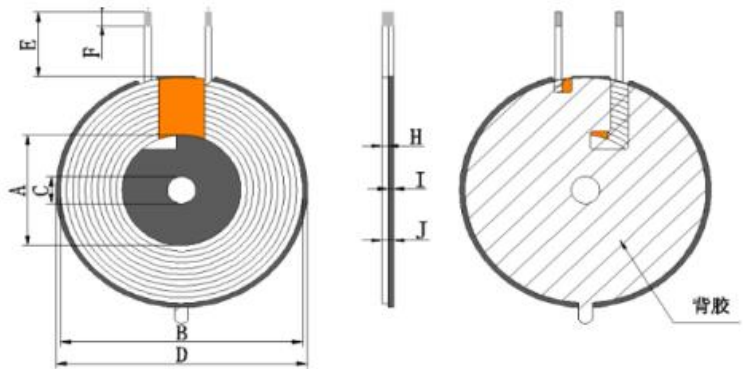

A	20.5±0.5 mm
B	38.5±1 mm
C	5±0.5 mm
D	43.5±0.5 mm
E	80±1mm
F	80±1 mm
I	0.65±0.1 mm
H	0.8Max
J	1.6±Max

二、产品参考图 SCHEMATIC DIAGRAM:

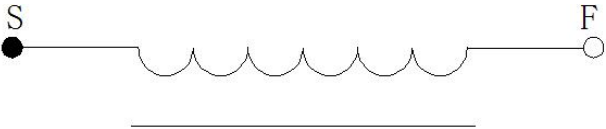

- Note:
- 1. Cross over outgoing lines;
 - 2. The size of the magnetic sheet is 43.5 ± 0.5mm, with a thickness of 0.65 ± 0.1mm,
 - 3. Stick adhesive on the back of the magnetic sheet,
 - 4. Tie the coil with 7mm brown tape and wrap it with 1.5TS

SPECIFICATION

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
L1	S	F	0.08*24*2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10% Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.6uH ±10%Add magnetic plates	100KHz/1.0V	LCZ METER 1062B
3	Q 值	S-F	35MIN	100KHz/1.0V	LCZ METER 1062B
4	DCR	S-F	≤50m Ω	100KHz/1.0V	LCZ METER 1062B

Proposed/Date	Reviewed/Date
Zhipeng Rao 2025-8-09	