



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

TEST REPORT

FCC Rules and Regulations Part 15 Subpart C (Section 15.209)

Report Reference No.....: GTS20251009001-1-01

FCC ID.....: 2BTAN-GM002

Compiled by

(position+printed name+signature)....: File administrators Peter Xiao

Peter Xiao

Supervised by

(position+printed name+signature)....: Test Engineer Evan Ouyang

Evan Ouyang

Approved by

(position+printed name+signature)....: Manager Jason Hu

Jason Hu



Date of issue.....: Nov.19, 2025

Representative Laboratory Name .: Shenzhen Global Test Service Co.,Ltd.

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China

Applicant's name Hangzhou Genmoor Technology Co., Ltd.

Address: Room 820, Building 1, No. 252 Wantang Road, Xihu District, 310012 Hangzhou, Zhejiang, China.

Test specification

Standard: FCC Rules and Regulations Part 15 Subpart C (Section 15.209)

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Cupboo AI robotic pet

Trade Mark: N/A

Manufacturer: Hangzhou Genmoor Technology Co., Ltd.

Model/Type reference.....: GM002

List Model: N/A

Modulation Type: ASK

Operation Frequency.....: 115-205KHz

Ratings: Input: DC5.0V/2.0A

Output: 10W(MAX)

Result.....: **PASS**

TEST REPORT

Test Report No. :	GTS20251009001-1-01	Nov.19, 2025
		Date of issue

Equipment under Test : Cupboo AI robotic pet

Model /Type : GM002

Listed Models : N/A

Applicant : **Hangzhou Genmoor Technology Co., Ltd.**

Address : Room 820, Building 1, No. 252 Wantang Road, Xihu District, 310012 Hangzhou, Zhejiang, China.

Manufacturer **Hangzhou Genmoor Technology Co., Ltd.**

Address : Room 820, Building 1, No. 252 Wantang Road, Xihu District, 310012 Hangzhou, Zhejiang, China.

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	5
2.4. EUT Exercise Software	6
2.5. Special Accessories	6
2.6. External I/O Cable	6
2.7. Modifications	6
3. TEST ENVIRONMENT	7
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Test Description	7
3.4. Statement of the measurement uncertainty	7
3.5. Equipments Used during the Test	8
4. TEST CONDITIONS AND RESULTS	9
4.1. AC Power Conducted Emission	9
4.2. Radiated Emission	12
4.3. Occupied Bandwidth	16
4.4. Antenna Requirement	17
5. TEST SETUP PHOTOS OF THE EUT	18
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	20

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules and Regulations Part 15 Subpart C \(Section 15.209\)](#): Radiated emission limits; general requirements.

[ANSI C63.10-2020+Cor.1-2023+C63.10a-2024](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Oct.19, 2025
Testing commenced on	:	Oct.19, 2025
Testing concluded on	:	Nov.18, 2025

2.2. Product Description

Product Name:	Cupboo AI robotic pet
Trade Mark:	N/A
Model/Type reference:	GM002
List Model:	N/A
Power supply:	Input: DC5.0V/2.0A Output: 10W(MAX)
Hardware Version	N/A
Software Version	N/A
WPT	
Frequency Range	115.0~205.0KHz
Modulation Type	ASK (Continuous Wave)
Load Sensing	Contact transmission
Antenna Type	Coil Antenna
Antenna gain	0dBi
Note :The EUT has two coils. These two coils cannot be used simultaneously. They are merely designed to increase the usable area.	

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 5.0V

Description of the test mode

Operation Frequency each of channel	
Channel	Frequency
1	138.7KHz

Mode	AC mode
Mode 1	Wireless Charging 10W(99% load)

- Note :1.EUT has one Type-C port, The Type-C supports wireless charging in AC mode.
2. All the modes have been tested and recorded worst mode in the report(Mode 1).
3. All modes were tested for load states less than 1%, less than 50%, and less than 99%.

2.4. EUT Exercise Software

N/A

2.5. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen Flypower Technology Co.,Ltd.	Adapter	PS10UA050K200 0UU	--	SDOC
Hangzhou Genmoor Technology Co., Ltd.	Cupboo AI robotic pet	GM002	--	SDOC

2.6. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	1.0M, Unscreened Cable

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong,China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is165725.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3. Test Description

Description Of Test	Result
Conducted Emissions Test	Compliant
Radiated Emission Test	Compliant
Occupied Bandwidth Measurement	Compliant
Antenna Requirement	Compliant

3.4. Statement of the measurement uncertainty

Measurement Uncertainty		
Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2

3.5. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Artificial Mains	CYBERTEK	EM5040A	E1850400205	2025/07/07	2026/07/06
LISN	R&S	ESH2-Z5	893606/008	2025/07/07	2026/07/06
EMI Test Receiver	R&S	ESPI 3	/	2025/07/04	2026/07/03
Test Receiver	R&S	ESCI 7	101102	2025/07/04	2026/07/03
Spectrum Analyzer	Agilent	N9020A	MY48010425	2025/07/04	2026/07/03
Spectrum Analyzer	R&S	FSV40-N	101800	2025/07/04	2026/07/03
Vector Signal generator	Agilent	N5181A	MY49060502	2025/07/15	2026/07/14
Signal generator	Agilent	N5182A	MY50141550	2025/07/04	2026/07/03
Climate Chamber	ESPEC	EL-10KA	A20120523	2025/07/15	2026/07/14
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2024/12/16	2025/12/15
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	/	2025/07/04	2026/07/03
By-log Antenna	SCHWARZBECK	VULB9163	00976	2025/07/15	2026/07/14
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2025/07/15	2026/07/14
Amplifier	SKET	LAPA_30M01G-32	SK20240104001	2025/01/21	2026/01/20
Amplifier	EMCI	EMC012645SE	980340	2025/01/21	2026/01/20
Amplifier	Schwarzbeck	BBV9179	9719-025	2025/01/21	2026/01/20
Temperature/Humidity Meter	HUATU	HTC-1	/	2025/07/16	2026/07/15
High-Pass Filter	Stest	1	/	2025/07/04	2026/07/03
High-Pass Filter	Stest	2	/	2025/07/04	2026/07/03
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2025/07/15	2026/07/14
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2025/07/15	2026/07/14
Data acquisition card	Agilent	U2531A	TW53323507	2025/07/15	2026/07/14
Power Sensor	Keysight	E9301A	MY41495308	2025/07/04	2026/07/03
Control Unit	Tonscend	JS0806-2	/	2025/07/07	2026/07/06
Control Unit	Tonscend	JS0806-2	/	2025/07/07	2026/07/06
integrated measuring instrument	R&S	CMW500	107519	2025/07/04	2026/07/03
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

The calibration interval is 1 year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

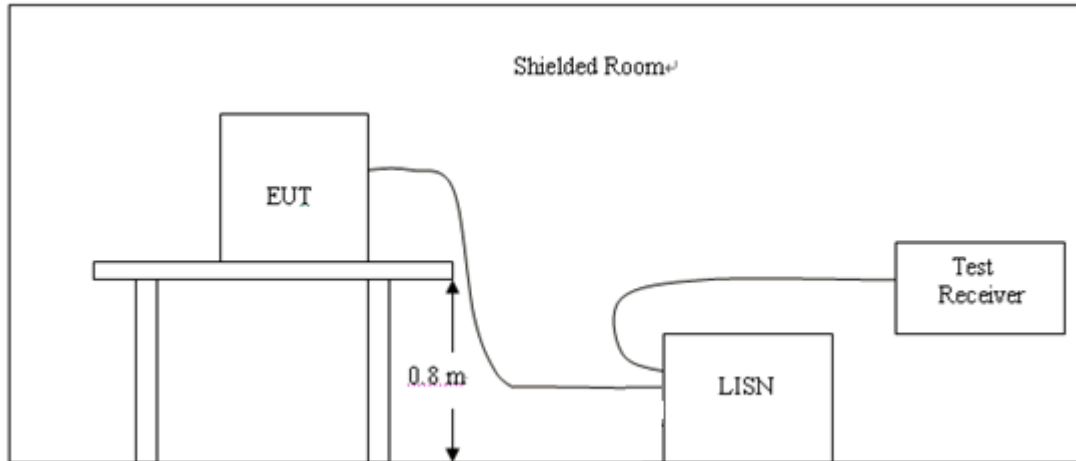

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSIC63.10-2020+Cor.1-2023+C63.10a-2024.
- 2 Support equipment, if needed, was placed as per ANSIC63.10-2020+Cor.1-2023+C63.10a-2024
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSIC63.10-2020+Cor.1-2023+C63.10a-2024
- 4 The EUT received DC 5.0V power, the adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.
- 9 The LISN is more than 40cm away from the vertical reference plane.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBuV)} = RA \text{ (dBuV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

TEST RESULTS

1. Both 120 VAC, 60 Hz and 240 VAC, 50 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:


Temperature	25°C	Humidity	60%
Test Engineer	Evan Ouyang	Configurations	WPT

Power supply:

AC 120V/60Hz

Polarization

L

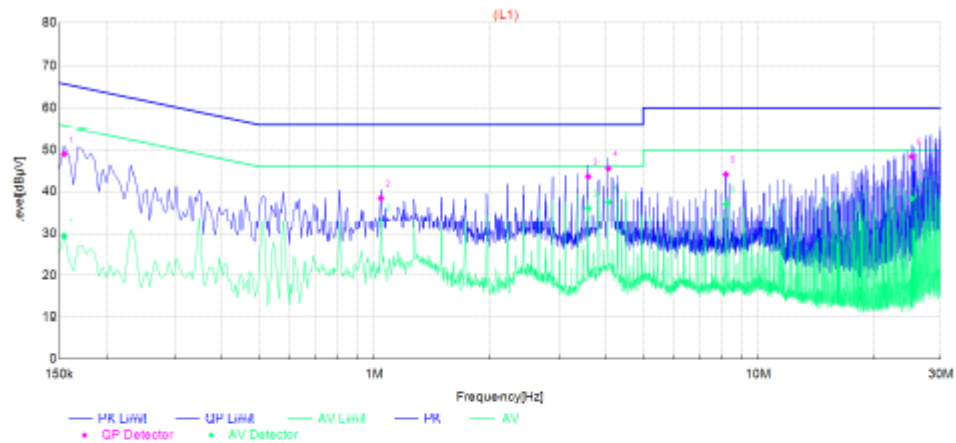Test Graph**Final Data List**

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1545	38.67	19.04	10.33	49.00	29.37	65.75	55.75	16.75	26.38	L1	PASS
2	1.041	28.25	22.44	10.20	38.45	32.64	56.00	46.00	17.55	13.36	L1	PASS
3	3.588	33.23	25.70	10.36	43.59	36.06	56.00	46.00	12.41	9.94	L1	PASS
4	4.0515	35.18	27.12	10.37	45.55	37.49	56.00	46.00	10.45	8.51	L1	PASS
5	8.2185	33.56	26.41	10.57	44.13	36.98	60.00	50.00	15.87	13.02	L1	PASS
6	25.2015	36.79	26.75	11.60	48.39	38.35	60.00	50.00	11.61	11.65	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

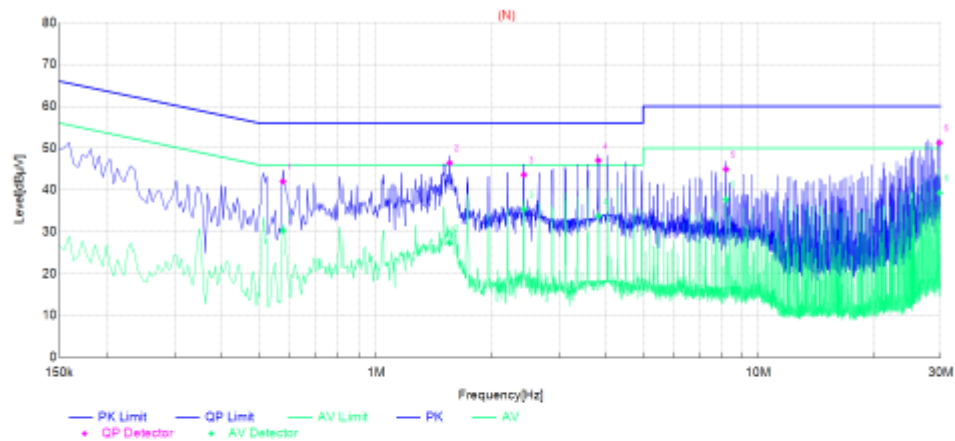

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.5775	31.83	20.10	10.20	42.03	30.30	56.00	46.00	13.97	15.70	N	PASS
2	1.5585	36.21	17.11	10.24	46.45	27.35	56.00	46.00	9.55	18.65	N	PASS
3	2.4315	33.34	25.11	10.30	43.64	35.41	56.00	46.00	12.36	10.59	N	PASS
4	3.813	36.72	23.39	10.36	47.08	33.75	56.00	46.00	8.92	12.25	N	PASS
5	8.223	34.38	27.14	10.57	44.95	37.71	60.00	50.00	15.05	12.29	N	PASS
6	29.751	39.57	27.59	11.71	51.28	39.30	60.00	50.00	8.72	10.70	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).


2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Note: All the modes have been tested and recorded worst mode in the report.


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

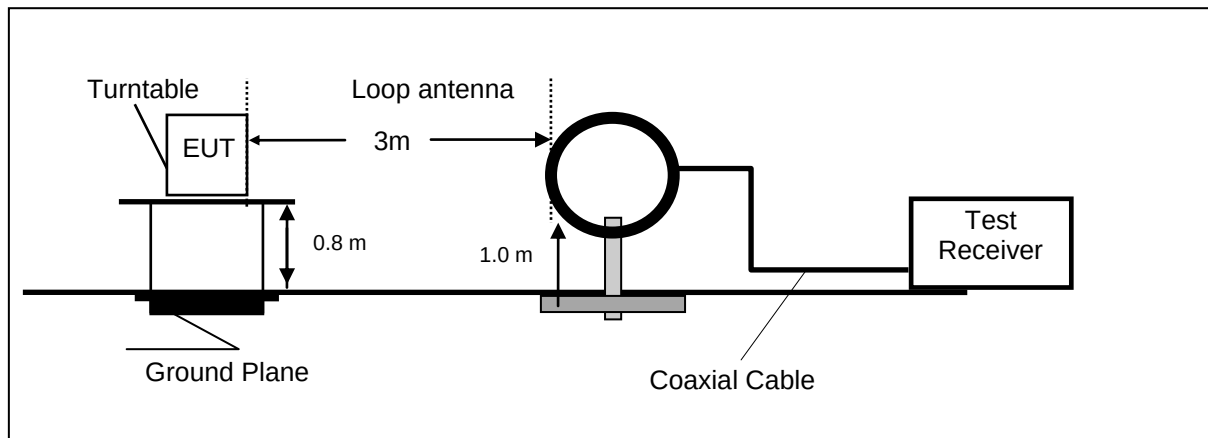

Frequency range 30MHz – 1000MHz

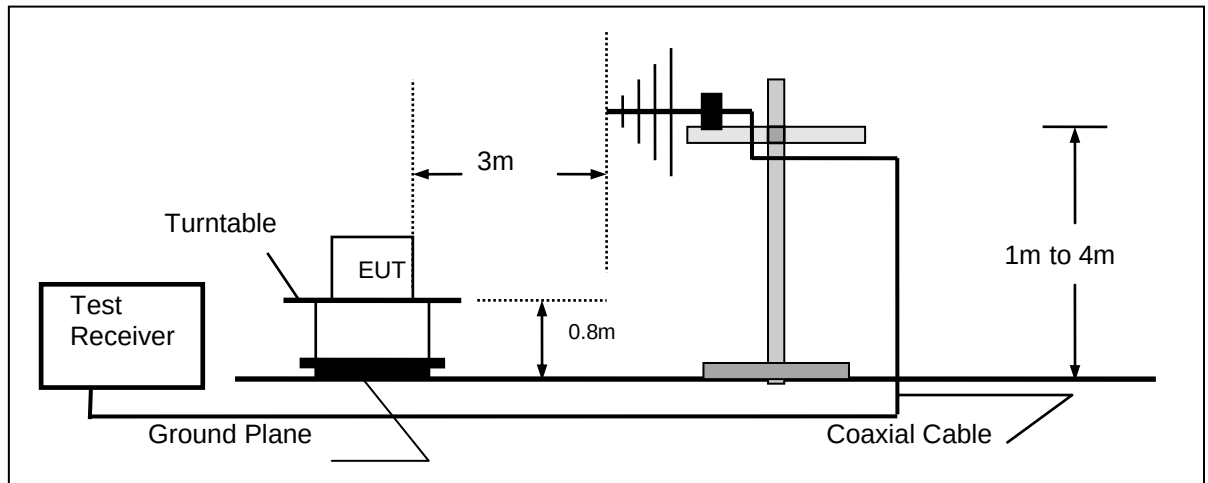

Frequency range above 1GHz-25GHz

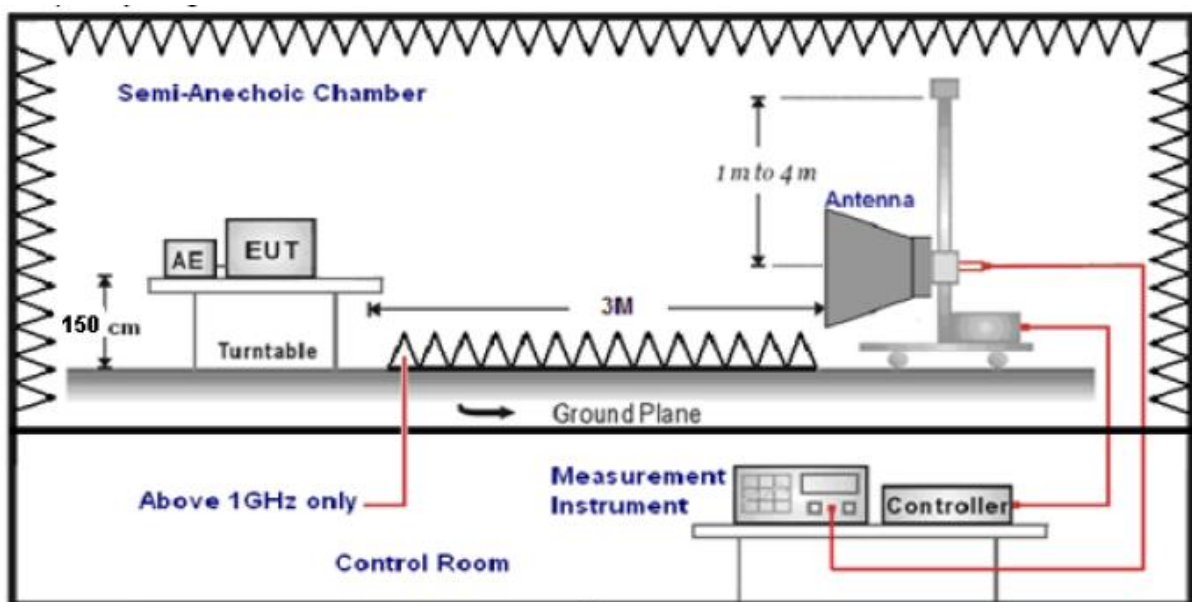

TEST PROCEDURE

- 1.The EUT was placed on a turn table which is 1.0m above ground plane when testing frequency range 9 KHz –25GHz.
- 2.Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
- 3.And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4.Repeat above procedures until all frequency measurements have been completed.
- 5.The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 205KHz.so radiated emission test frequency band from 9KHz to 1GHz.
- 6.The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- 7.Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Temperature	25°C	Humidity	58%
Test Engineer	Evan Ouyang	Configurations	WPT

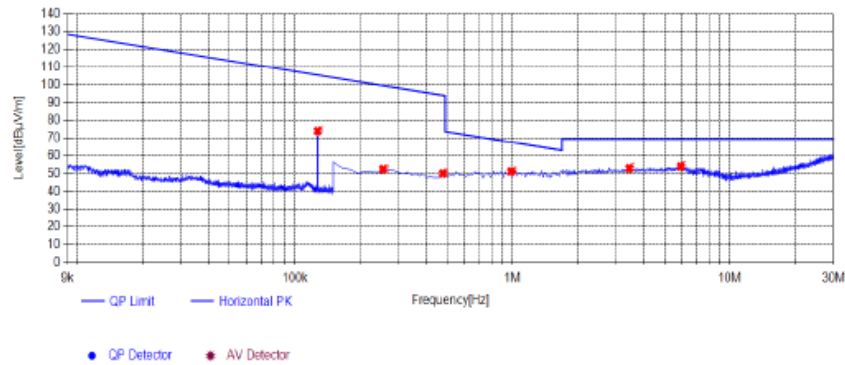For 9 KHz-30MHz**Coplanar****Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	0.138	73.82	0.34	74.16	105.53	31.37	100	260	PK	Coplanar	PASS
2	0.2545	51.99	0.44	52.43	99.49	47.06	100	279	PK	Coplanar	PASS
3	0.4784	49.51	0.58	50.09	94.01	43.92	100	279	PK	Coplanar	PASS
4	0.9858	50.30	0.88	51.18	87.73	36.55	100	184	PK	Coplanar	PASS
5	3.4484	50.61	2.34	52.95	89.54	36.59	100	48	PK	Coplanar	PASS
6	5.9409	50.20	3.80	54.00	89.54	35.54	100	148	PK	Coplanar	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

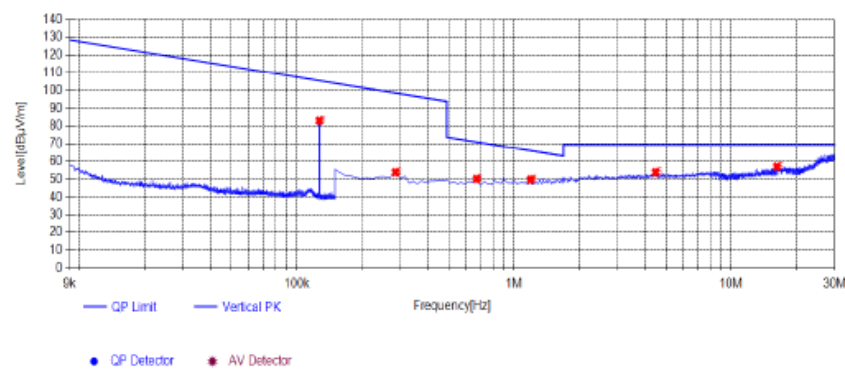Coaxial**Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	0.138	82.79	0.34	83.13	105.53	22.40	100	108	PK	Coaxial	PASS
2	0.2843	53.41	0.46	53.87	98.53	44.66	100	336	PK	Coaxial	PASS
3	0.6724	49.48	0.69	50.17	71.05	20.88	100	34	PK	Coaxial	PASS
4	1.1948	48.87	1.00	49.87	66.06	16.19	100	140	PK	Coaxial	PASS
5	4.4932	50.93	2.96	53.89	89.54	35.65	100	216	PK	Coaxial	PASS
6	16.269	47.25	9.75	57.00	89.54	32.54	100	95	PK	Coaxial	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 30MHz-1GHz

Horizontal

Test Graph

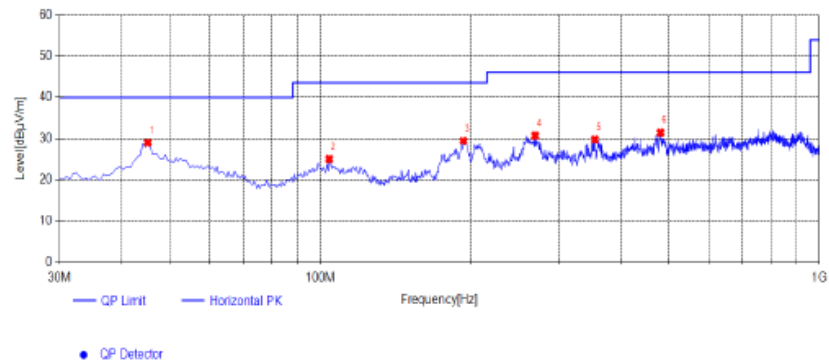

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	45.035	32.31	-3.32	28.99	40.00	11.01	100	235	PK	Horizontal	PASS
2	104.205	29.13	-4.17	24.96	43.50	18.54	100	316	PK	Horizontal	PASS
3	193.445	34.65	-5.19	29.46	43.50	14.04	100	33	PK	Horizontal	PASS
4	269.59	33.78	-2.97	30.81	46.00	15.19	100	286	PK	Horizontal	PASS
5	354.95	30.11	-0.29	29.82	46.00	16.18	100	83	PK	Horizontal	PASS
6	480.565	29.33	2.18	31.51	46.00	14.49	100	90	PK	Horizontal	PASS

Note: 1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

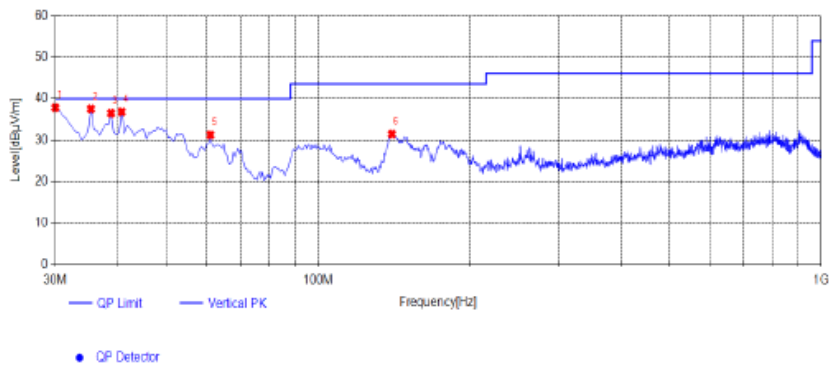

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	30	44.34	-6.50	37.84	40.00	2.16	100	276	PK	Vertical	PASS
2	35.335	44.27	-6.72	37.55	40.00	2.45	100	43	PK	Vertical	PASS
3	38.73	41.42	-4.90	36.52	40.00	3.48	100	357	PK	Vertical	PASS
4	40.67	41.08	-4.24	36.84	40.00	3.16	100	300	PK	Vertical	PASS
5	61.04	36.21	-4.87	31.34	40.00	8.66	100	127	PK	Vertical	PASS
6	140.095	39.77	-8.23	31.54	43.50	11.96	100	40	PK	Vertical	PASS


Note: 1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Note: All the modes have been tested and recorded worst mode in the report.

4.3. Occupied Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=1KHz and VBW=3KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


LIMIT

/

TEST RESULTS

Temperature	24.5°C	Humidity	53.9%
Test Engineer	Evan Ouyang	Configurations	WPT

Mode	Freq (KHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
Tx Mode	138.7	2.46	/	PASS

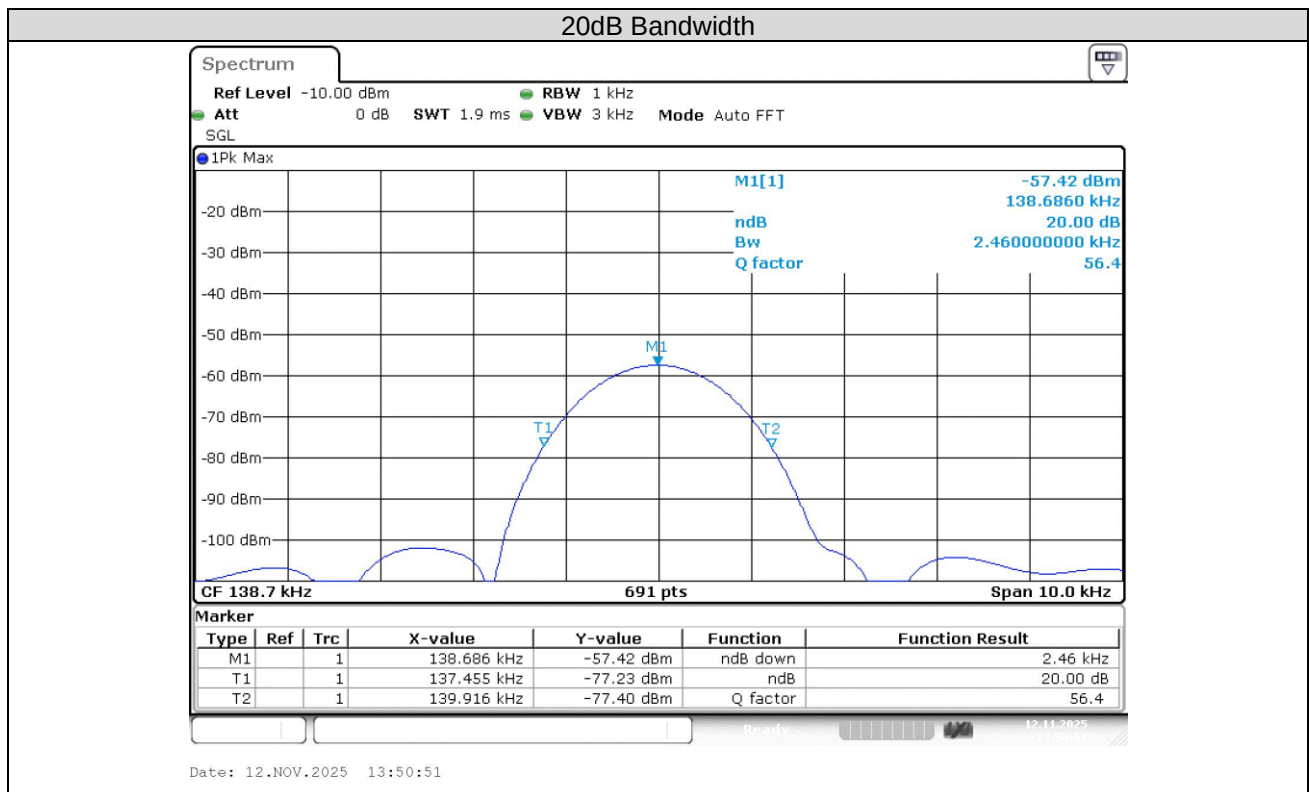

4.4. Antenna Requirement

Standard Applicable

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Information

The antenna used in this product is a Coil Antenna, The directional gains of antenna used for transmitting is 0dBi.

Reference to the **Internal photos**.

5. Test Setup Photos of the EUT

Photo of Radiated Emissions Measurement

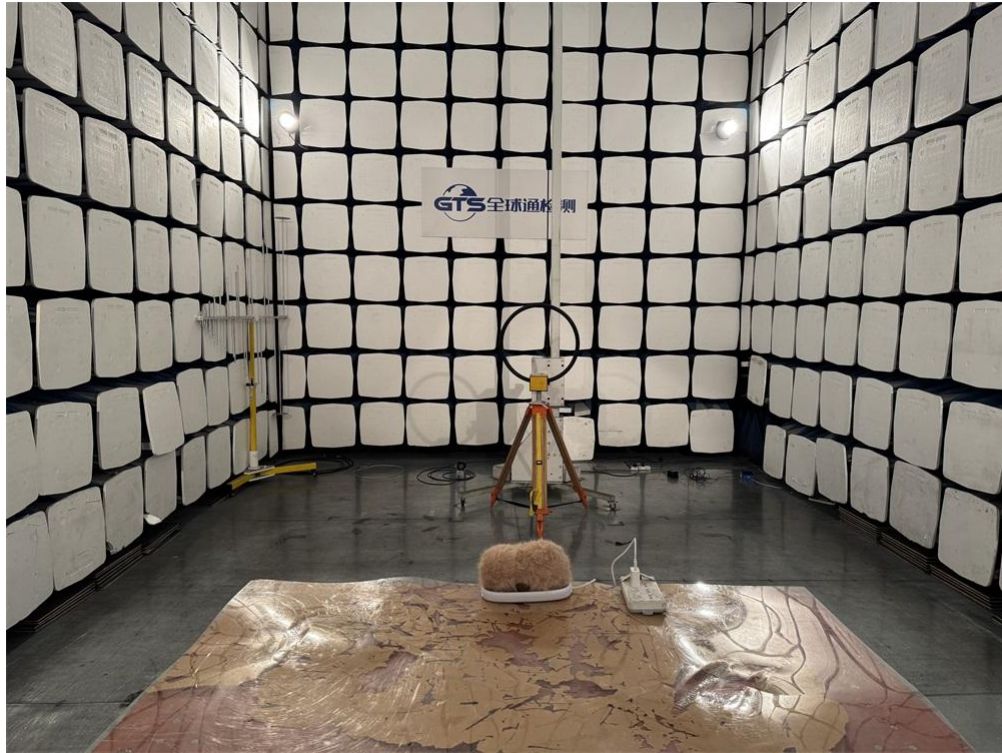


Fig. 1



Fig. 2

Photo of Conducted Emissions Measurement



Fig. 3

6. External and Internal Photos of the EUT



Fig. 1



Fig. 2

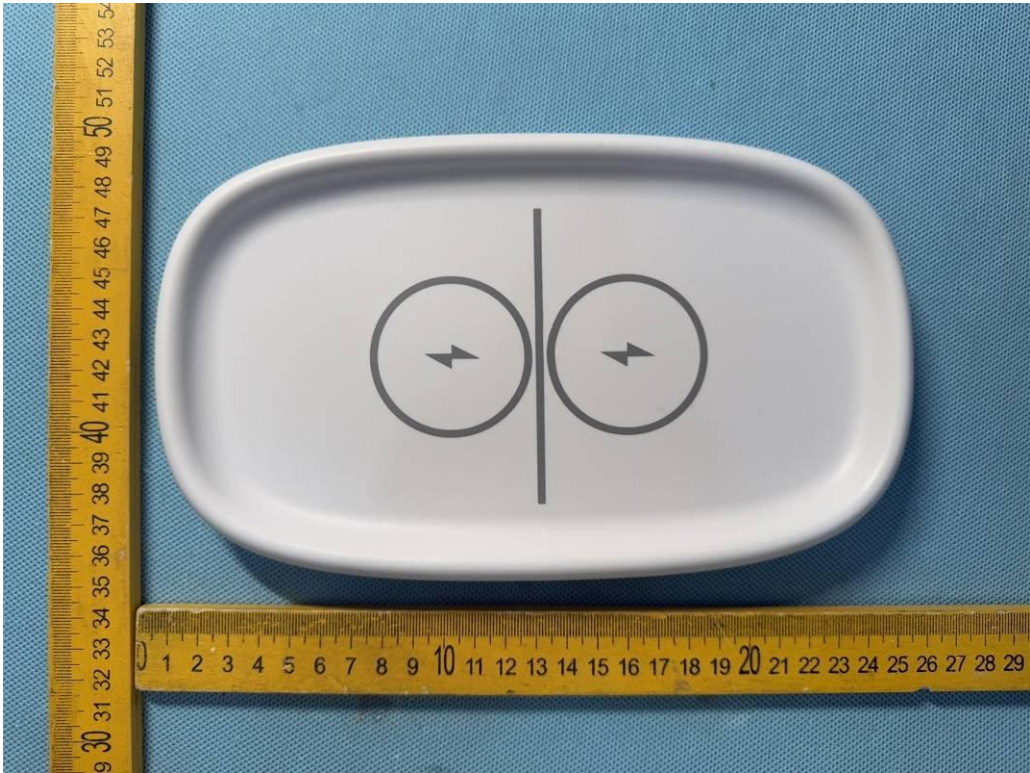


Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7



Fig. 8

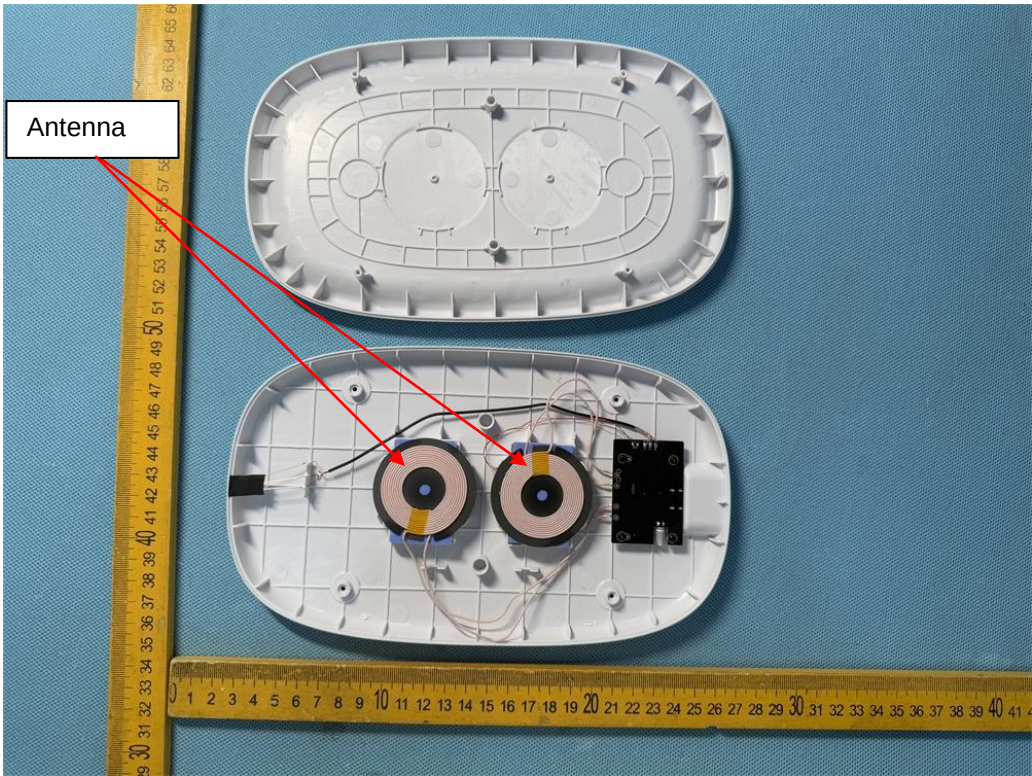


Fig. 9

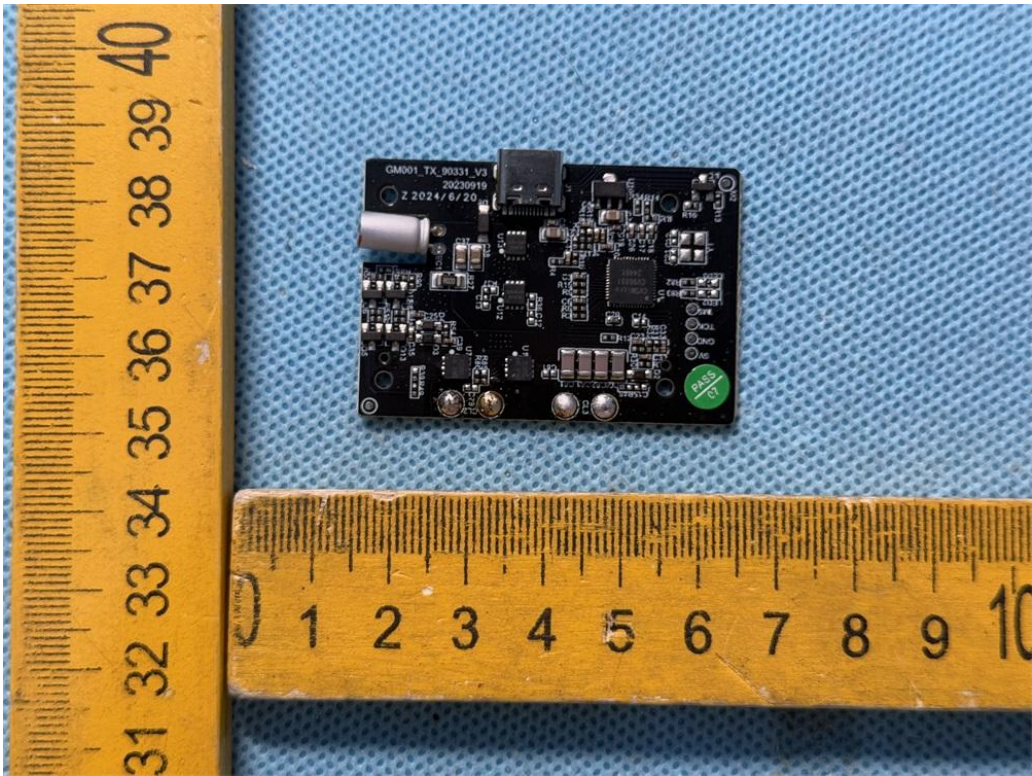


Fig. 10

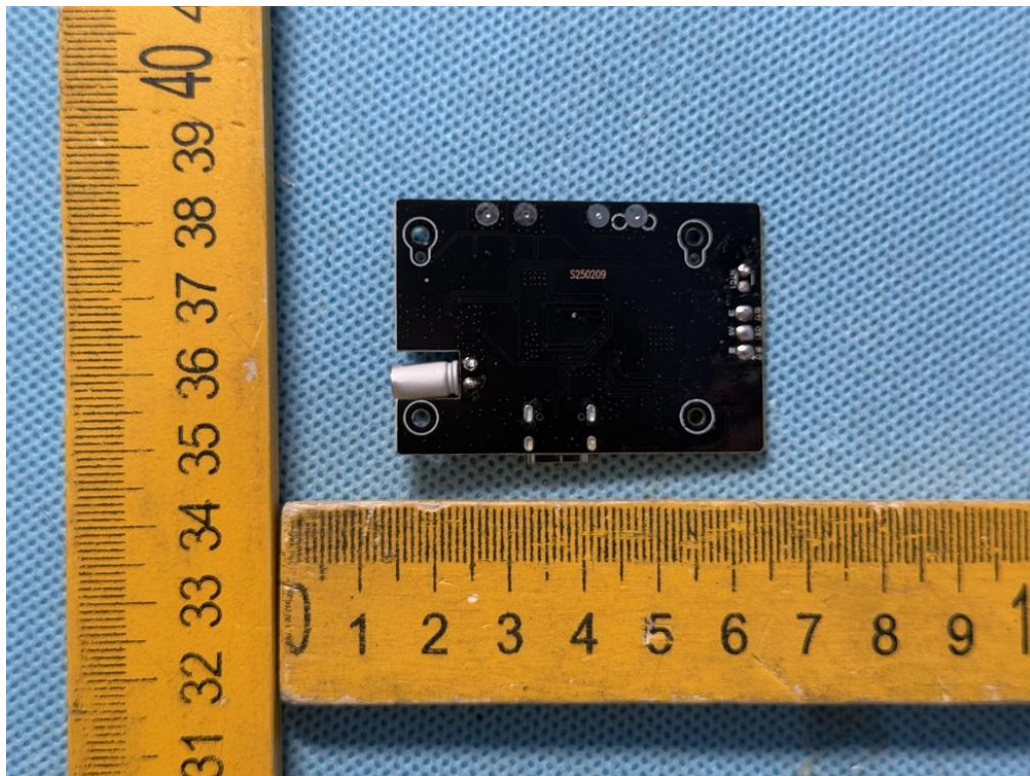


Fig. 11



Fig. 12

.....End of Report.....