



FCC TEST REPORT

FCC ID: 2BTC4-SB924163

On Behalf of

Snakebyte Ltd.

GAMEPAD RGB S2

Model No.: SB924163, SB924286, SBU024166, SBU024289

Prepared for : Snakebyte Ltd.
Address : Unit 907-908, Lu Plaza, 2 Wing Yip Street, Kwun Tong, Hong Kong

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2511046-C16-R01
Date of Receipt : November 11, 2025
Date of Test : November 11, 2025 - December 02, 2025
Date of Report : December 02, 2025
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	9
2.3. Tested Supporting System Details	9
2.4. Block Diagram of connection between EUT and simulators	9
2.5. Test Mode Description	9
2.6. Test Conditions	10
2.7. Test Facility.....	10
2.8. Measurement Uncertainty	10
2.9. Test Equipment List	11
3. Maximum Peak Output power	13
3.1. Limit	13
3.2. Test Procedure	13
3.3. Test Setup.....	13
3.4. Test Result.....	13
4. Bandwidth	14
4.1. Limit	14
4.2. Test Procedure	14
4.3. Test Result.....	14
5. Carrier Frequency Separation	19
5.1. Limit	19
5.2. Test Procedure	19
5.3. Test Result.....	19
6. Number Of Hopping Channel	20
6.1. Limit	20
6.2. Test Procedure	20
6.3. Test Result.....	20
7. Dwell Time	21
7.1. Test limit.....	21
7.2. Test Procedure	21
7.3. Test Result.....	21
8. Radiated emissions	23
8.1. Limit	23
8.2. Block Diagram of Test setup.....	24
8.3. Test Procedure	25
8.4. Test Result.....	25
9. RF Conducted Spurious Emissions	29
9.1. Block diagram of test setup	29

9.2. Limits	29
9.3. Test procedure	29
9.4. Test result.....	29
10. Band Edge Compliance	33
10.1. Block Diagram of Test Setup	33
10.2. Limit	33
10.3. Test Procedure	33
10.4. Test Result.....	33
11. Band Edge (Conducted).....	35
11.1. Block diagram of test setup	35
11.2. Test limits	35
11.3. Test Procedure	35
11.4. Test Results	36
12. Power Line Conducted Emissions.....	40
12.1. Block Diagram of Test Setup	40
12.2. Limit	40
12.3. Test Procedure	40
12.4. Test Result.....	40
13. Antenna Requirements	43
13.1. Limit.....	43
13.2. Result	43
14. Test setup photo.....	44
14.1. Photo of Radiated Emission test	44
14.2. Photo of Conducted Emission test	45
15. Photos of EUT	46

TEST REPORT DECLARATION

Applicant : Snakebyte Ltd.
Address : Unit 907-908, Lu Plaza, 2 Wing Yip Street, Kwun Tong, Hong Kong
Manufacturer : Shenzhen Zuanma Intelligent Control Technology Co.,Ltd.
715, Building 3, Zhonggang Plaza (Zone B), Exhibition Bay, No. 83 Zhanjing
Address : Road, Zhancheng Community, Fuhai street, Bao' an District, Shenzhen,
Guangdong Province
EUT Description : GAMEPAD RGB S2
(A) Model No. : SB924163, SB924286, SBU024166, SBU024289
(B) Trademark : **snakebyte**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2020

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer 

Approved by (name + signature).....: Jack Xu
Project Manager 

Date of issue.....: December 02, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	December 02, 2025	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2020	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2020	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2020	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2020	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2020	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2020	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2020	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2020	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : GAMEPAD RGB S2

Model Number : SB924163, SB924286, SBU024166, SBU024289

Diff : Except for the model name and color, everything else is identical. All tests were conducted using the SB924163 model.

Power supply : DC 5V from Type-C and DC 3.7V from battery.

Radio Technology	: 2.4G
Operation frequency	: 2402-2480MHz
Channel No.	: 79 channels
Channel spacing	: 1MHz
Modulation type	: GFSK
Antenna Type	: Internal Antenna, max gain 2.499dBi (Antenna information is provided by applicant.)

Software version : V1.0

Hardware version : V1.0

Intend use : Residential, commercial and light industrial environment

environment

Channel list:**2402-2480MHz**

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
CH0	2402	CH30	2432	CH60	2462
CH1	2403	CH31	2433	CH61	2463
CH2	2404	CH32	2434	CH62	2464
CH3	2405	CH33	2435	CH63	2465
CH4	2406	CH34	2436	CH64	2466
CH5	2407	CH35	2437	CH65	2467
CH6	2408	CH36	2438	CH66	2468
CH7	2409	CH37	2439	CH67	2469
CH8	2410	CH38	2440	CH68	2470
CH9	2411	CH39	2441	CH69	2471
CH10	2412	CH40	2442	CH70	2472
CH11	2413	CH41	2443	CH71	2473
CH12	2414	CH42	2444	CH72	2474
CH13	2415	CH43	2445	CH73	2475
CH14	2416	CH44	2446	CH74	2476
CH15	2417	CH45	2447	CH75	2477
CH16	2418	CH46	2448	CH76	2478
CH17	2419	CH47	2449	CH77	2479
CH18	2420	CH48	2450	CH78	2480
CH19	2421	CH49	2451		
CH20	2422	CH50	2452		
CH21	2423	CH51	2453		
CH22	2424	CH52	2454		
CH23	2425	CH53	2455		
CH24	2426	CH54	2456		
CH25	2427	CH55	2457		
CH26	2428	CH56	2458		
CH27	2429	CH57	2459		
CH28	2430	CH58	2460		
CH29	2431	CH59	2461		


2.2. Accessories of Device (EUT)

Accessories : /
 Manufacturer : /
 Model : /
 INPUT : /
 OUTPUT : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Notebook PC	Lenovo	ThinkPad L14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK Hopping-off TX mode	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
GFSK Hopping-off RX mode	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
GFSK Hopping-on mode	Hopping	2402-2480

Using QRCT testing software to control EUT work in Continuous TX mode, and select test channel, wireless mode, the power level of the test is set to default.

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	4Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	4Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2025.08.04	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2025.08.04	1Year
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03 -102082-Wa	2025.08.04	1Year
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2025.08.04	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	/	VULB 9168#627	2025.08.11	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2025.08.11	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2025.08.11	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2025.08.04	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2025.08.04	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2025.08.04	1Year
Amplifier	HP	HP8347A	/	2834A00455	2025.08.04	1Year
Amplifier	Agilent	8449B	/	3008A02664	2025.08.04	1Year
L.I.S.N.#1	SCHWARZBECK	NSLK8126	/	8126-466	2025.08.04	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2025.08.04	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2025.08.11	2Year
Preamplifier	SKET	LNPA_1840-5 0	/	SK201810180 1	2025.08.04	1 Year
Power Meter	Agilent	E4419B	/	GB40202122	2025.08.04	1 Year
Power Sensor	Agilent	E9300A	/	MY41496628	2025.08.04	1 Year
Power Sensor	Agilent	E9304A	/	MY41496815	2025.08.04	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205- 01	2025.07.14	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2025.08.04	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2025.08.04	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


Details see the ANSI C63.10:2020

3.2.1 Place the EUT on the table and connected to a power meter. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

3.2.2 At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.

3.2.3 Measure out each mode and each bands Peak output power of EUT

3.3. Test Setup

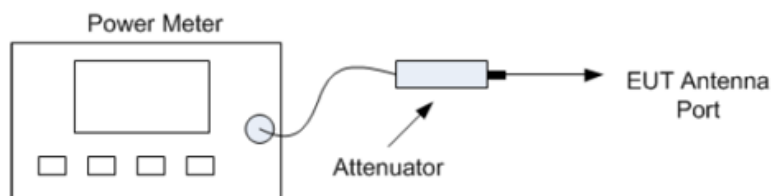

3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	GFSK	2402	Ant1	-4.771	21	Pass
NVNT	GFSK	2441	Ant1	-3.31	21	Pass
NVNT	GFSK	2480	Ant1	-3.075	21	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test Result

-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	GFSK	2402	Ant1	0.948	/	Pass
NVNT	GFSK	2441	Ant1	0.932	/	Pass
NVNT	GFSK	2480	Ant1	0.936	/	Pass

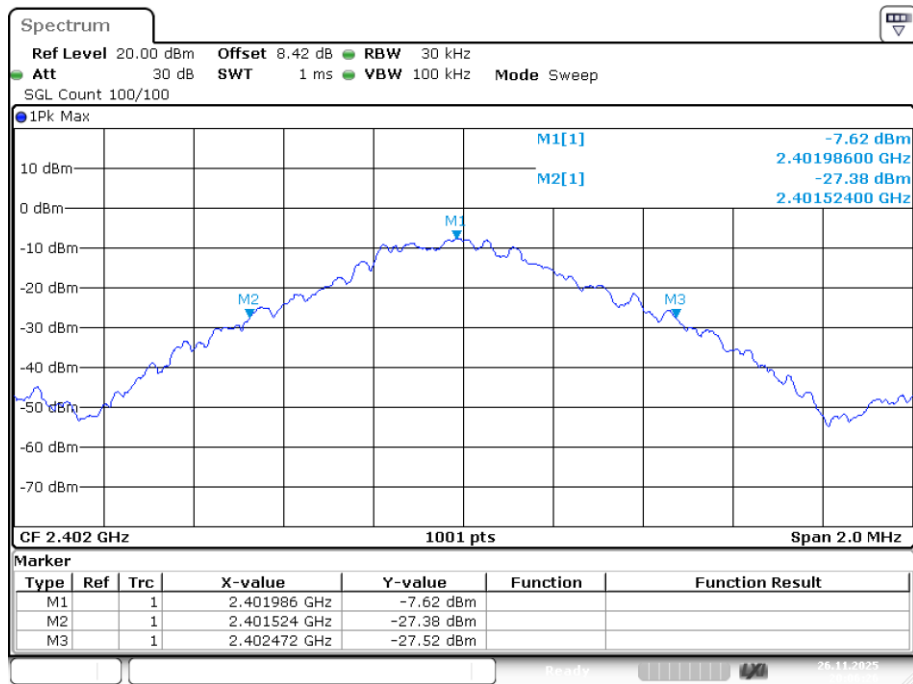
-20dB Bandwidth NVNT GFSK 2402MHz Ant1

Date: 26.NOV.2025 20:06:26

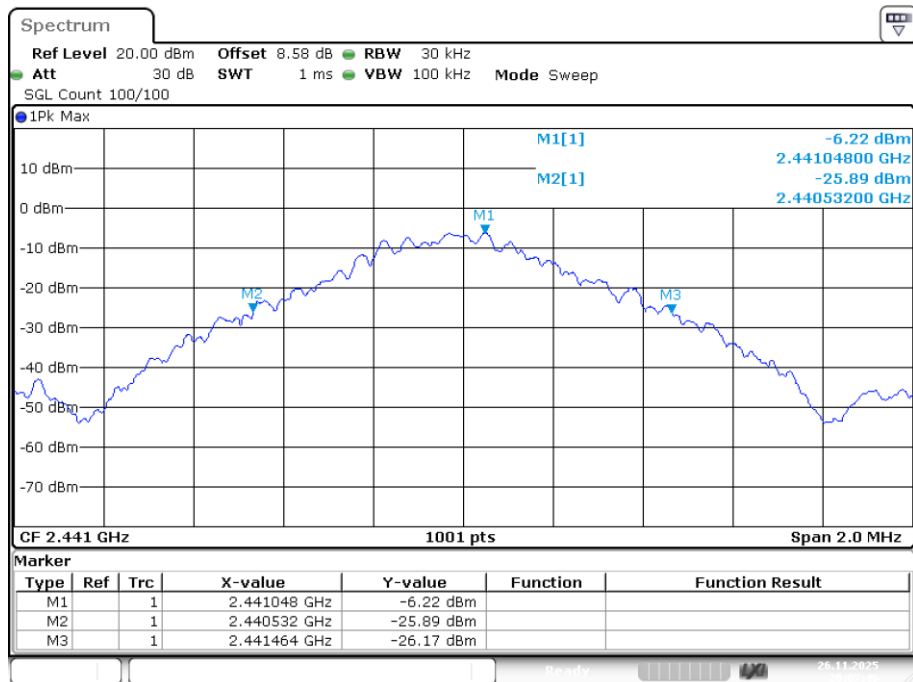-20dB Bandwidth NVNT GFSK 2441MHz Ant1

Date: 26.NOV.2025 20:07:46


-20dB Bandwidth NVNT GFSK 2480MHz Ant1

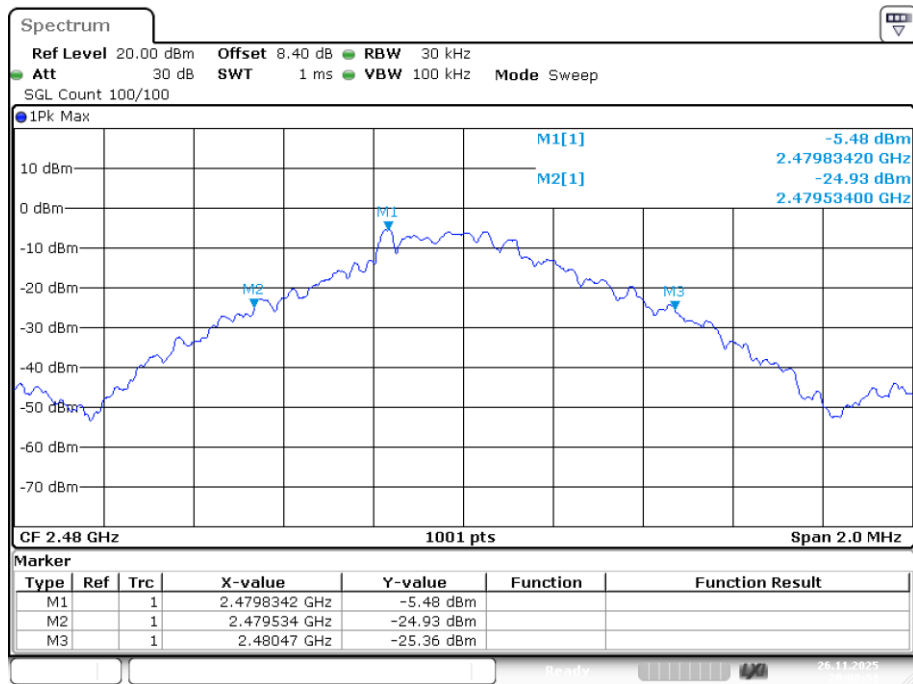


Date: 26.NOV.2025 20:08:51

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	GFSK	2402	Ant1	0.863
NVNT	GFSK	2441	Ant1	0.851
NVNT	GFSK	2480	Ant1	0.857

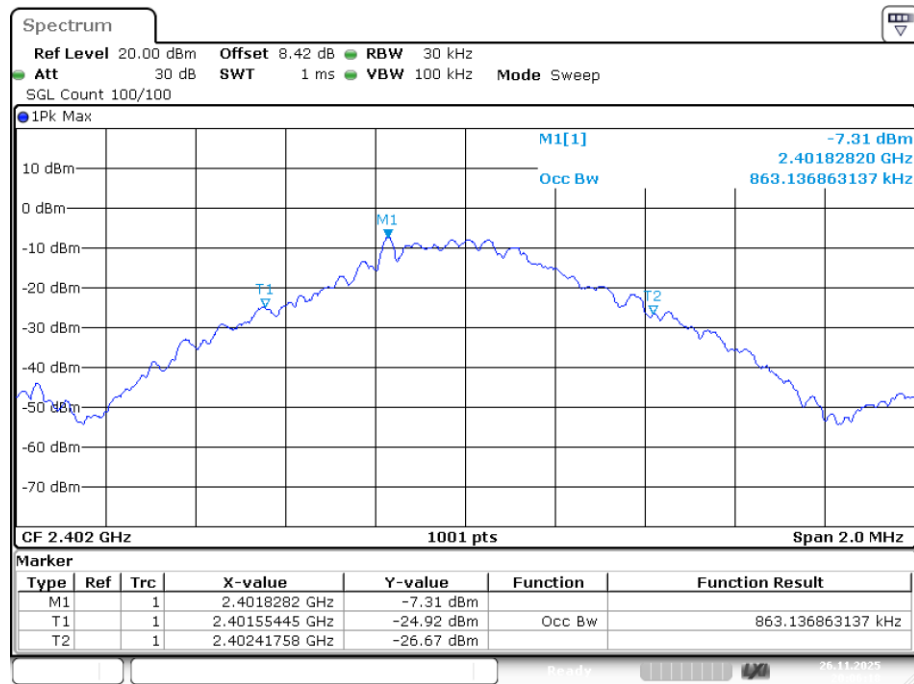
OBW NVNT GFSK 2402MHz Ant1

Date: 26.NOV.2025 20:06:18

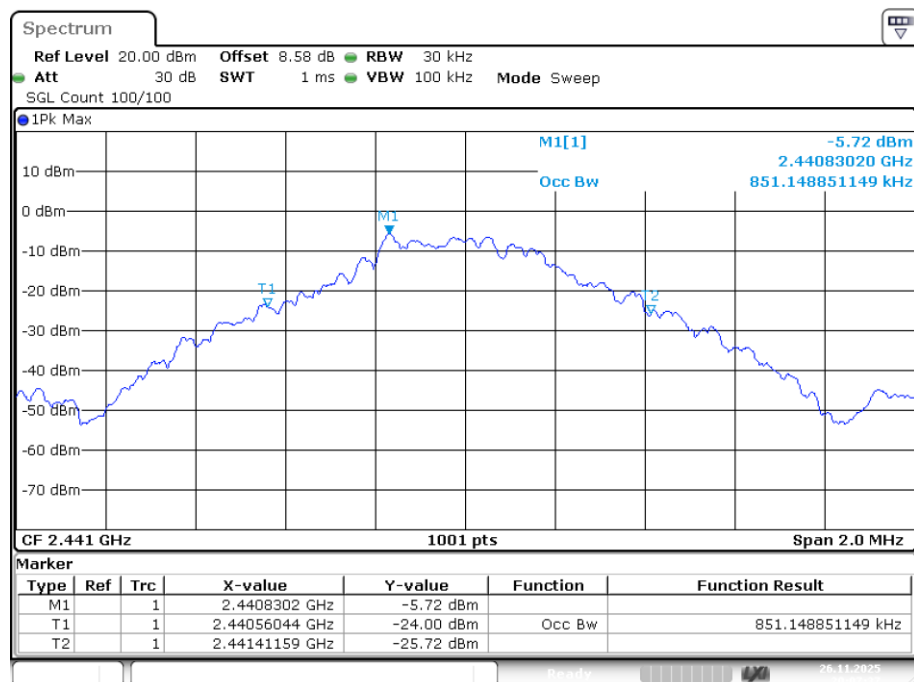OBW NVNT GFSK 2441MHz Ant1

Date: 26.NOV.2025 20:07:38

OBW NVNT GFSK 2480MHz Ant1

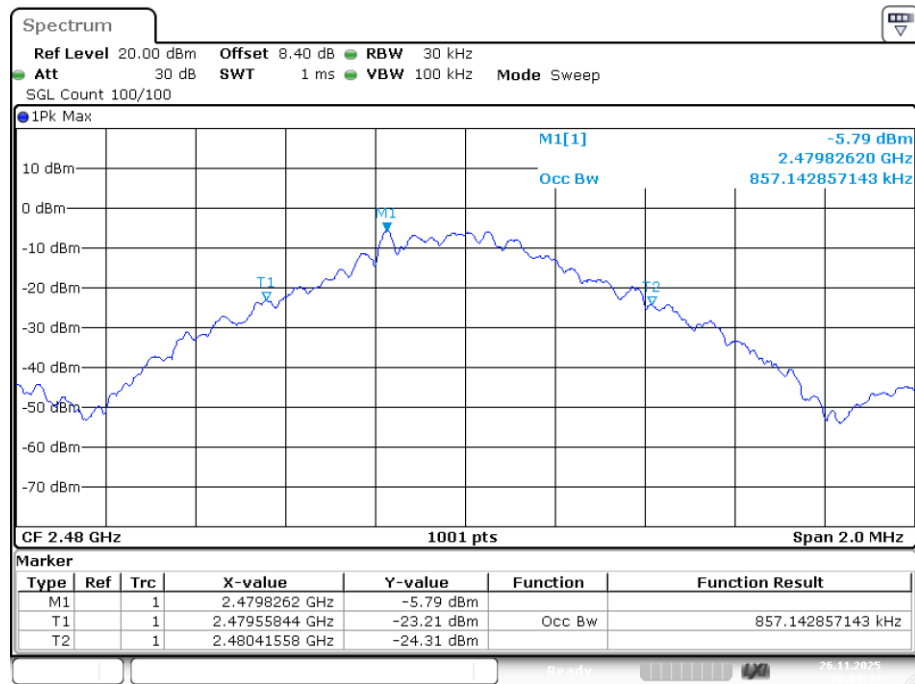

Date: 26.NOV.2025 20:08:43

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	GFSK	Ant1	2440.972	2441.991	1.019	0.932	Pass

CFS NVNT GFSK 2441MHz Ant1

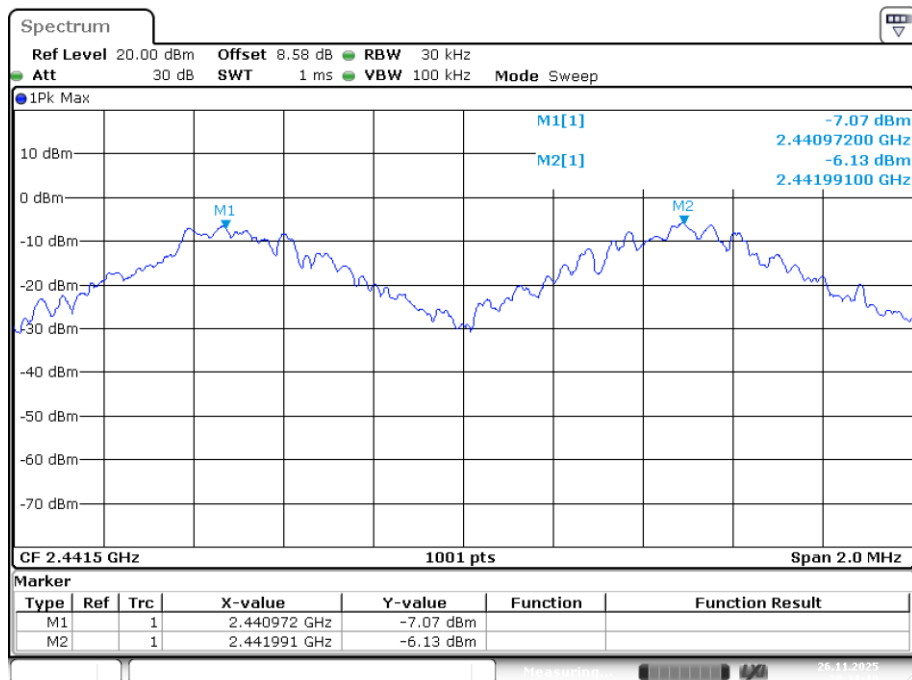

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	GFSK	Ant1	79	15	Pass

Hopping No. NVNT GFSK 2441MHz Ant1

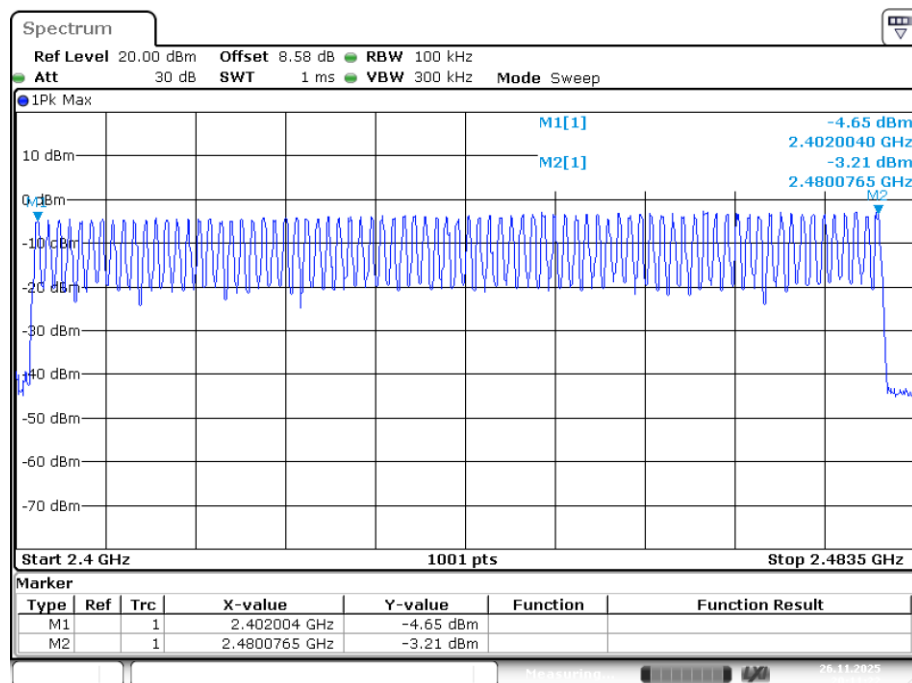

Date: 26.NOV.2025 20:11:22

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5

MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.


7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	GFSK	2441	Ant1	0.375	119.625	319	31600	400	Pass


Note: Total Dwell Time= Pulse Time* Burst Count

Dwell NVNT GFSK 2441MHz Ant1 One Burst

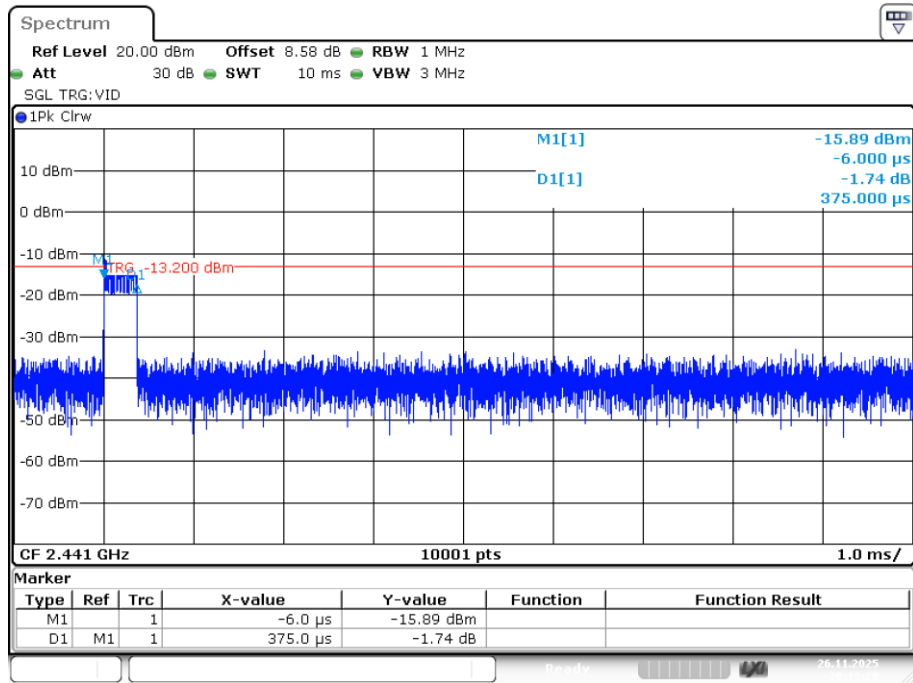

Date: 26.NOV.2025 20:13:20

Dwell NVNT GFSK 2441MHz Ant1 Accumulated

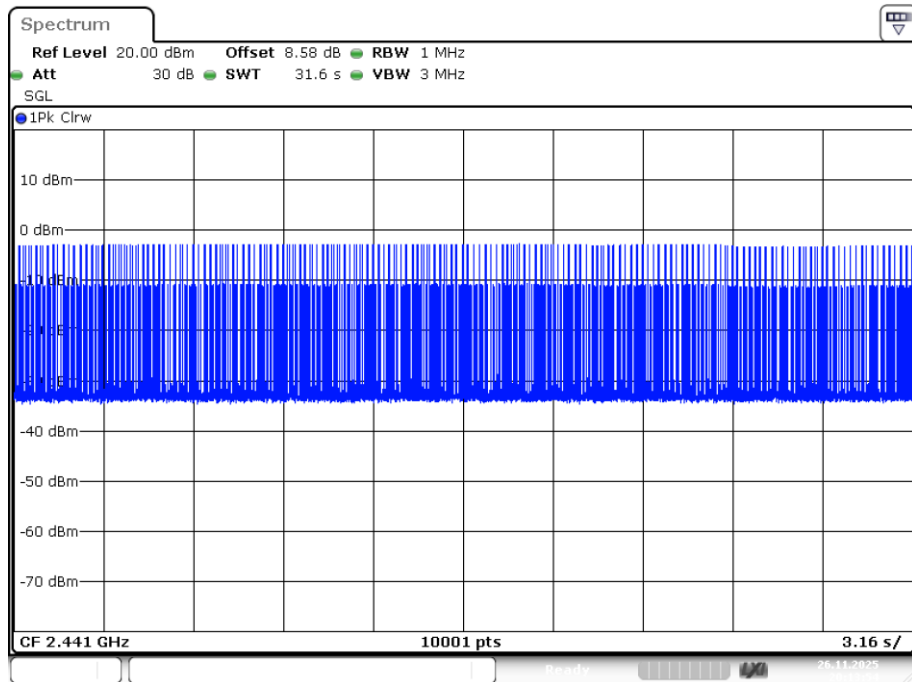

Date: 26.NOV.2025 20:13:54

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

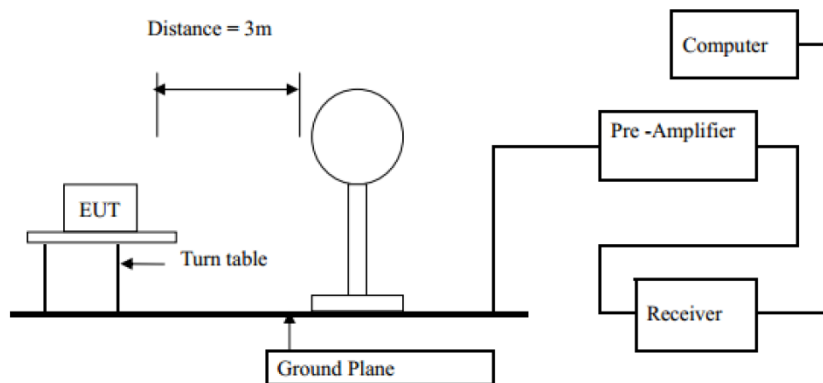

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

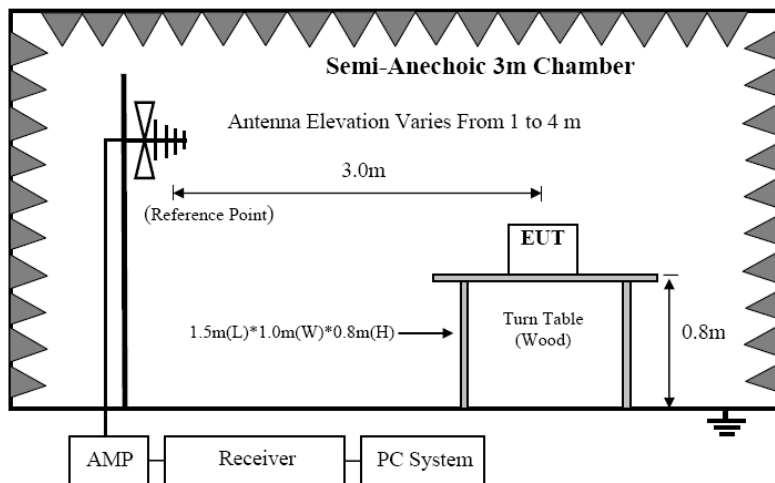

8.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

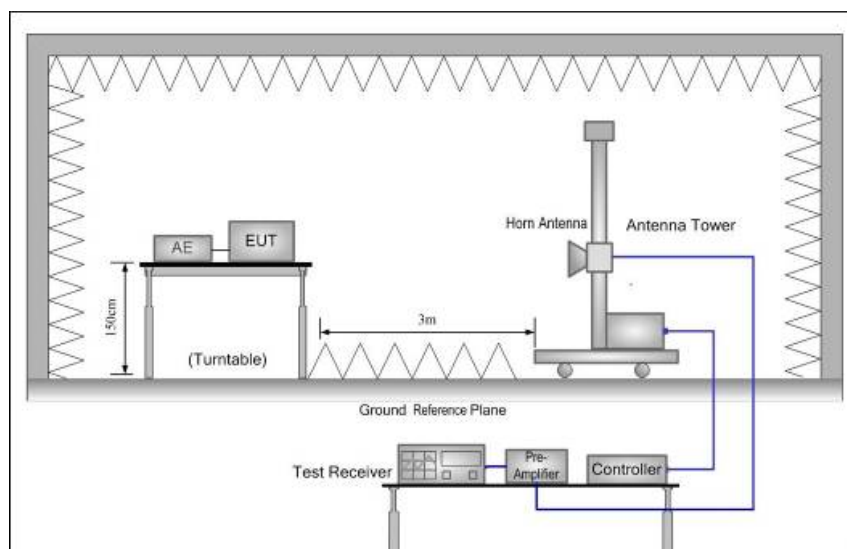

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2020on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

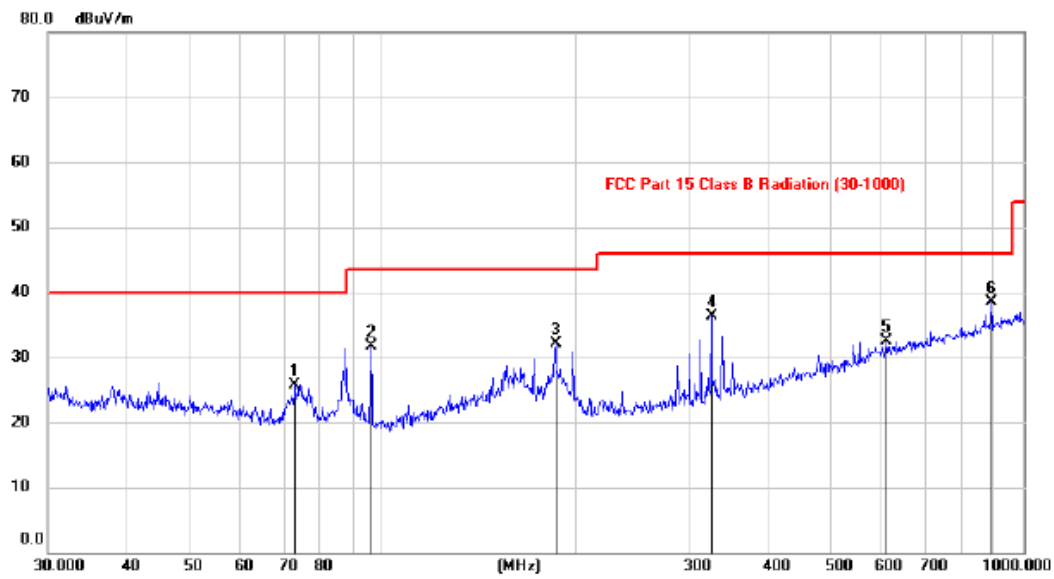

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		72.9148	14.93	10.84	25.77	40.00	-14.23	peak
2		95.9863	21.09	10.53	31.62	43.50	-11.88	peak
3		185.7882	20.13	11.98	32.11	43.50	-11.39	peak
4		326.2434	21.57	14.75	36.32	46.00	-9.68	peak
5		611.2063	12.13	20.42	32.55	46.00	-13.45	peak
6	*	891.0402	14.64	23.92	38.56	46.00	-7.44	peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

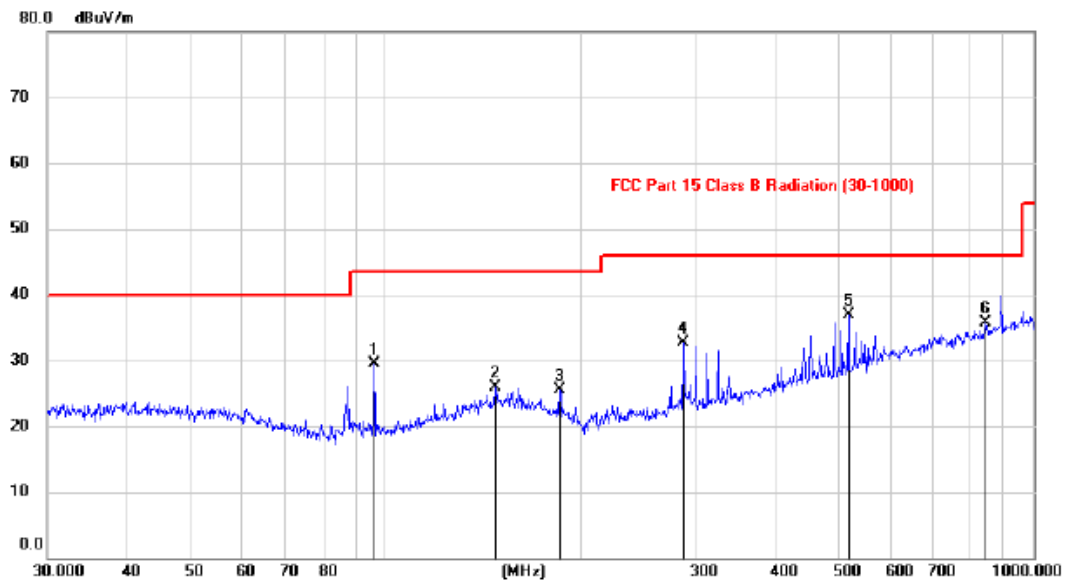Horizontal:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		96.0088	18.97	10.53	29.50	43.50	-14.00	peak
2		147.8868	10.92	14.90	25.82	43.50	-17.68	peak
3		185.7665	13.48	11.98	25.46	43.50	-18.04	peak
4		287.9904	18.90	13.82	32.72	46.00	-13.28	peak
5	*	518.2162	18.27	18.55	36.82	46.00	-9.18	peak
6		844.7915	12.37	23.30	35.67	46.00	-10.33	peak

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: 1. Test voltage: DC 5V

2. All modes have been tested, and only worst data of GFSK (2402MHz) was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.48	V	33.95	10.18	34.26	55.35	74	-18.65	PK
4804	36.27	V	33.95	10.18	34.26	46.14	54	-7.86	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.32	H	33.95	10.18	34.26	54.19	74	-19.81	PK
4804	37.39	H	33.95	10.18	34.26	47.26	54	-6.74	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	44.16	V	33.93	10.2	34.29	54.00	74	-20.00	PK
4882	34.87	V	33.93	10.2	34.29	44.71	54	-9.29	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	46.18	H	33.93	10.2	34.29	56.02	74	-17.98	PK
4882	34.73	H	33.93	10.2	34.29	44.57	54	-9.43	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	43.14	V	33.93	10.2	34.29	52.98	74	-21.02	PK
4960	33.28	V	33.93	10.2	34.29	43.12	54	-10.88	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.13	H	33.93	10.2	34.29	51.97	74	-22.03	PK
4960	32.89	H	33.93	10.2	34.29	42.73	54	-11.27	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. RF CONDUCTED SPURIOUS EMISSIONS

9.1. Block diagram of test setup

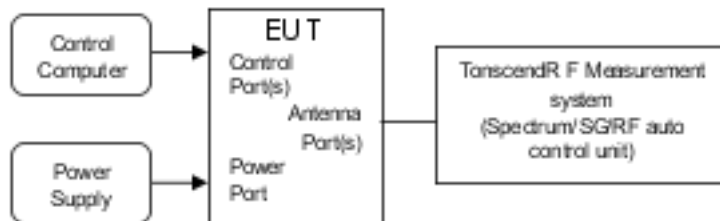

9.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


9.3. Test procedure

The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, sweep time set auto


9.4. Test result

PASS


Tx. Spurious NVNT GFSK 2402MHz Ant1 Ref

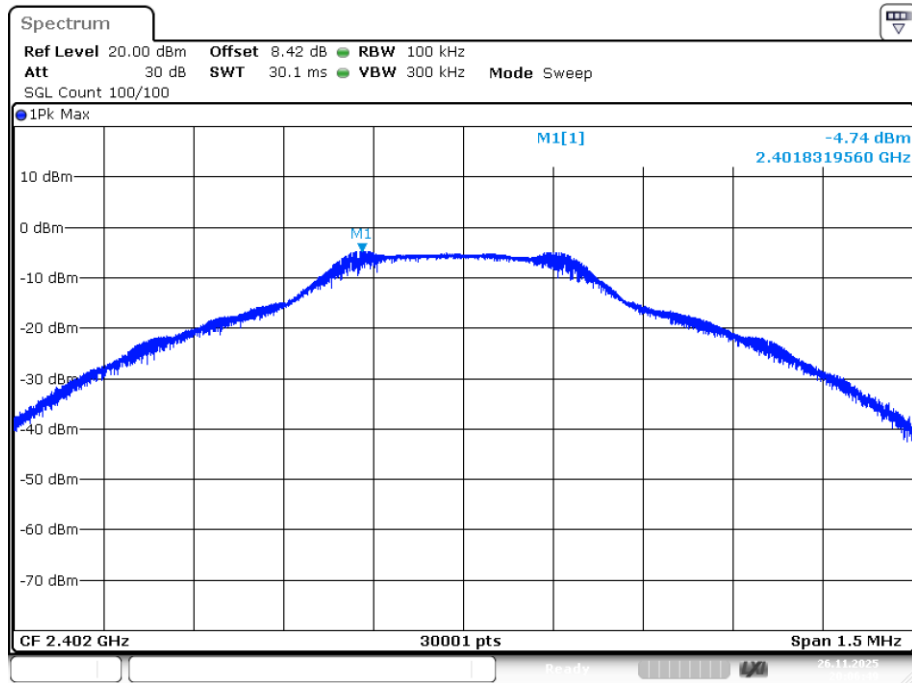


Tx. Spurious NVNT GFSK 2402MHz Ant1 Emission

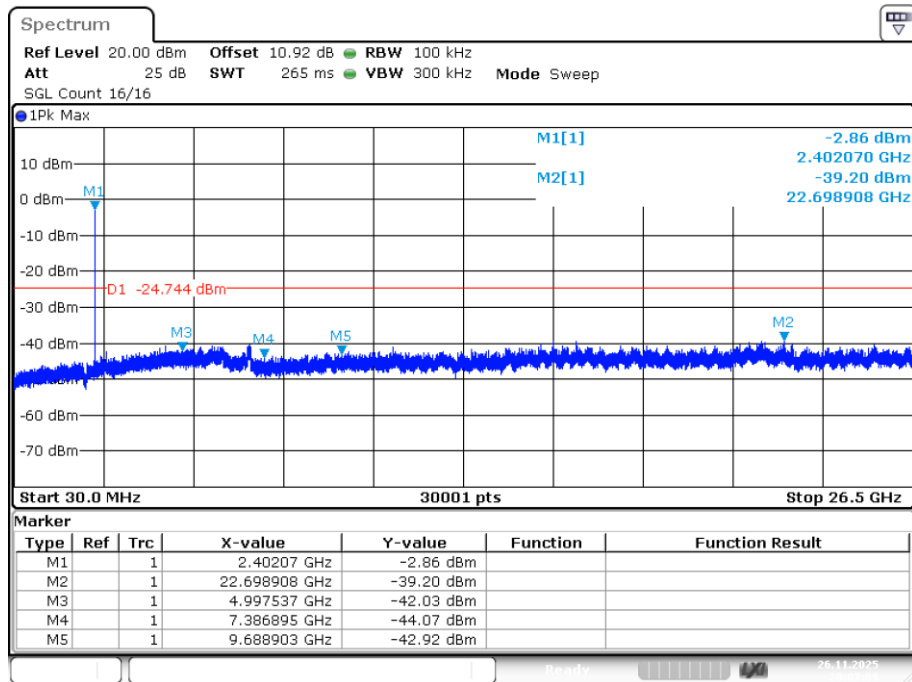


Tx. Spurious NVNT GFSK 2441MHz Ant1 Ref

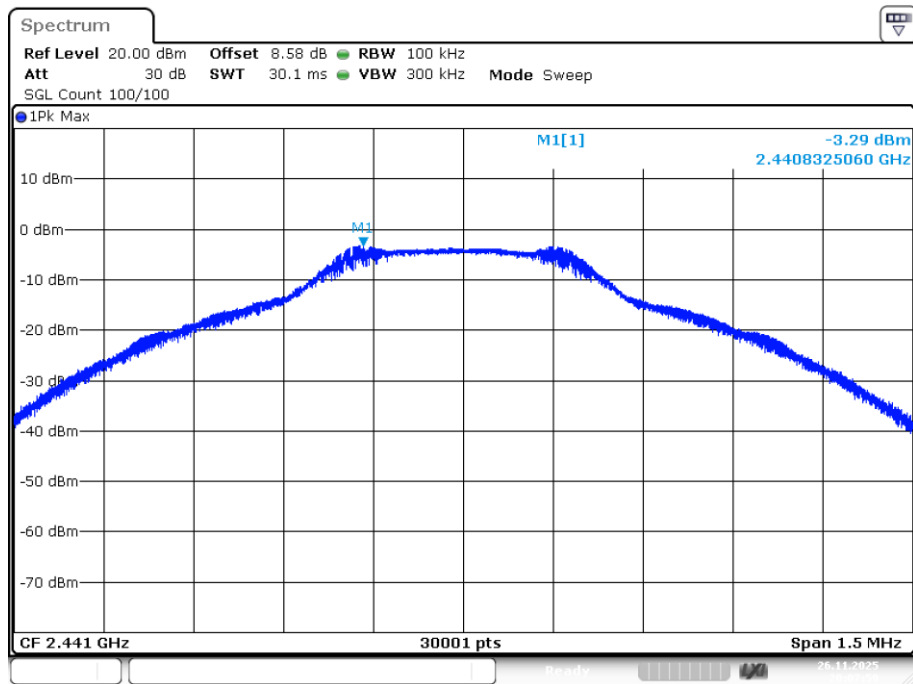


Tx. Spurious NVNT GFSK 2441MHz Ant1 Emission

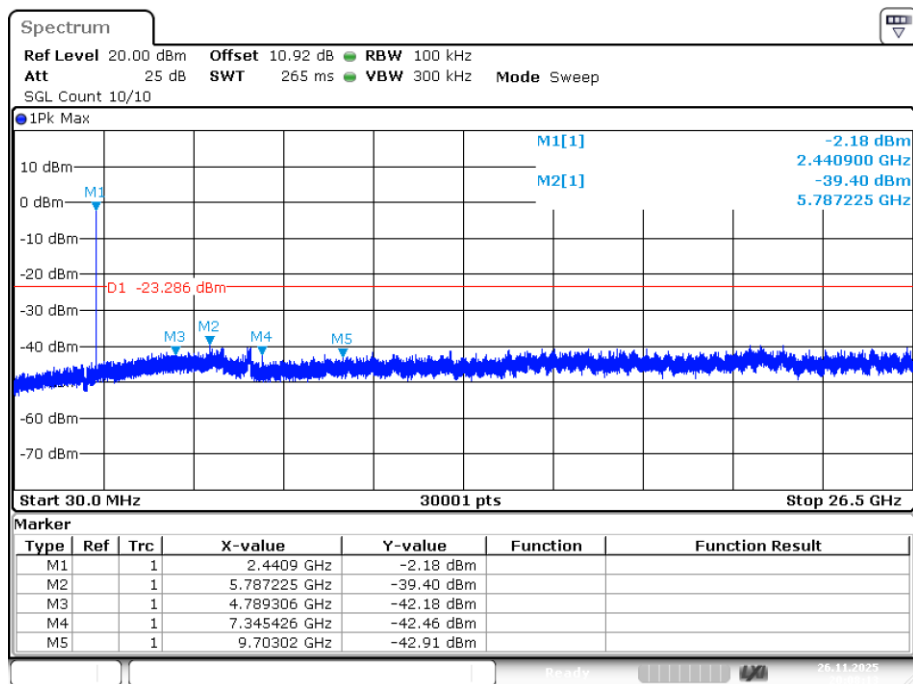

Tx. Spurious NVNT GFSK 2480MHz Ant1 Ref

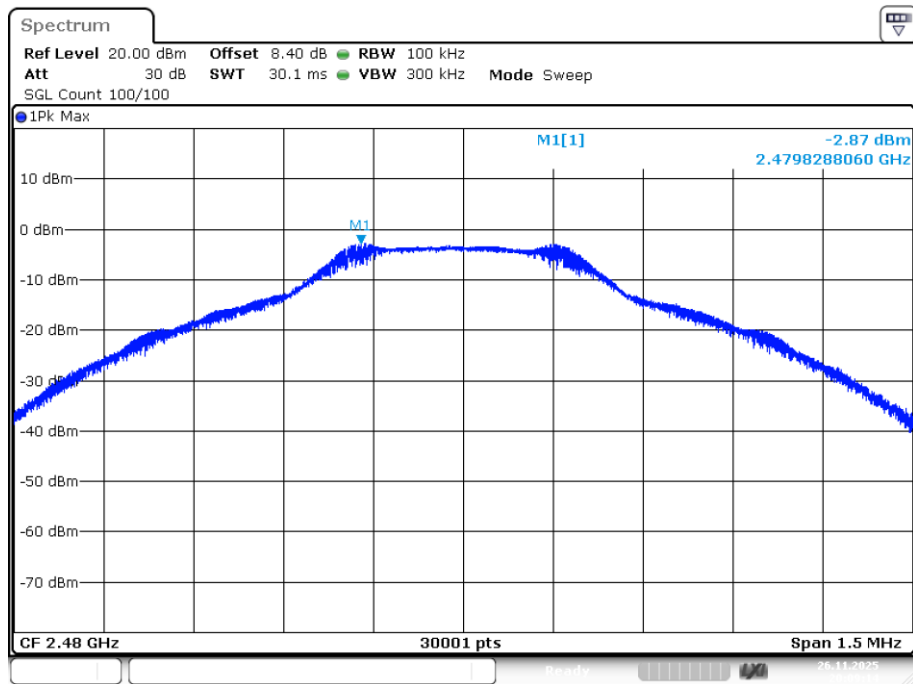


Tx. Spurious NVNT GFSK 2480MHz Ant1 Emission

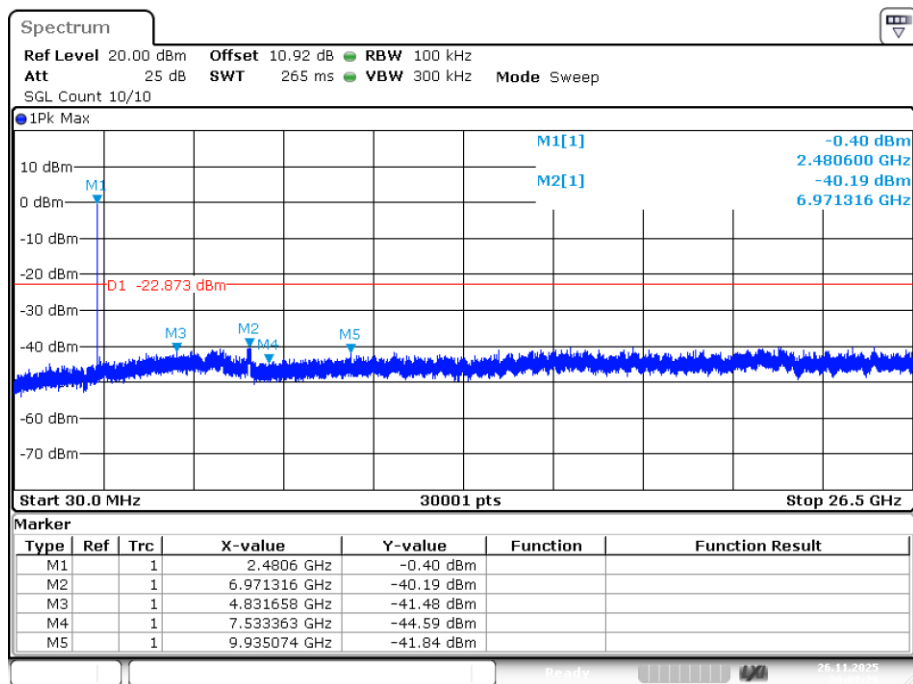

10. BAND EDGE COMPLIANCE

10.1. Block Diagram of Test Setup

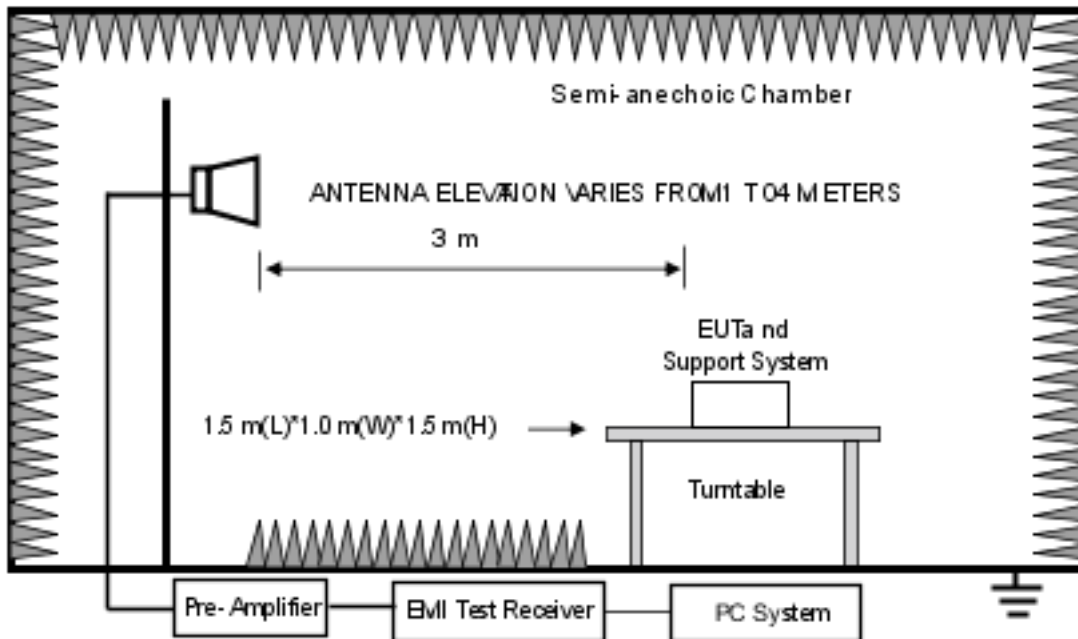

10.2. Limit

Please refer section 15.247.

10.3. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

10.3.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

10.3.2 Check the spurious emissions out of band.


10.3.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.

All restriction band and non- restriction band have been tested, only worse case is reported.


10.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

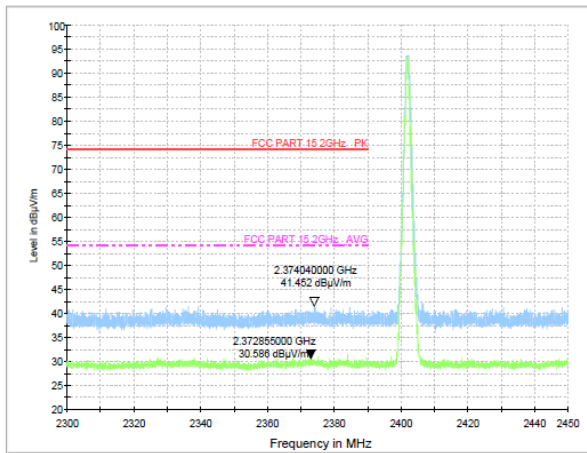


Test Mode: GFSK-High Hopping-off

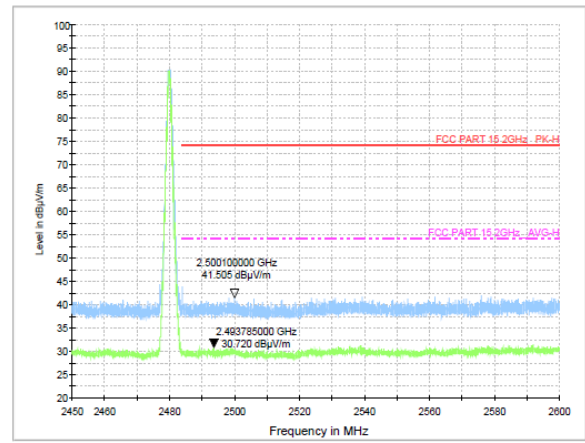

Test Mode: GFSK-Low Hopping-on

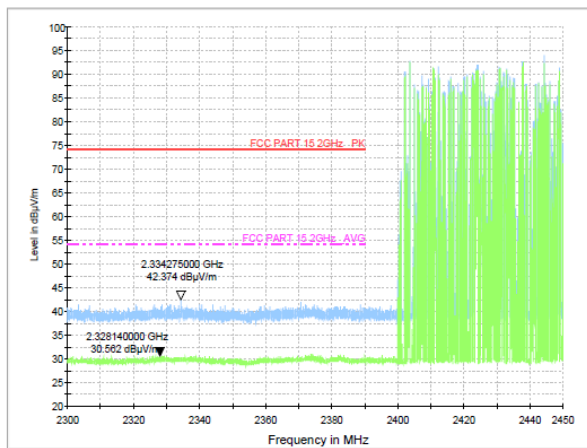

Test Mode: GFSK-High Hopping-on

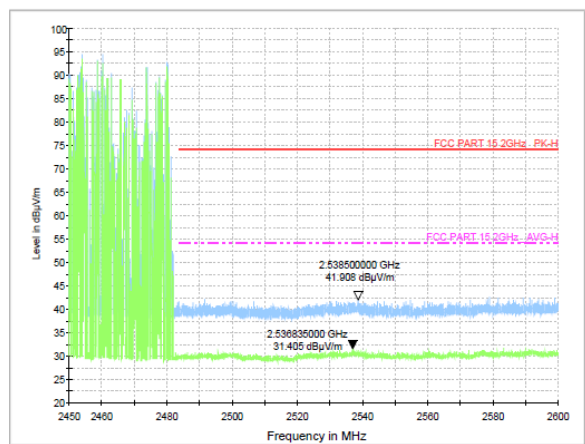


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

11. BAND EDGE (CONDUCTED)

11.1. Block diagram of test setup

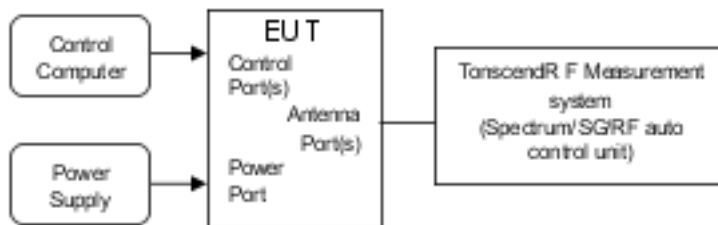

11.2. Test limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

11.3. Test Procedure

Details see the KDB 558074 D01 15.247 Meas Guidance v05r02

Place the EUT on the table and set it in transmitting mode.

11.3.1. Place the EUT on the table and set it in transmitting mode.

11.3.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.


11.3.3. Set the spectrum analyzer as RBW=100KHz, VBW=300KHz, Sweep = auto.

11.3.4. Repeat above procedures until all frequency measured were complete..

11.4. Test Results


Pass

Band Edge NVNT GFSK 2402MHz Ant1 No-Hopping Ref

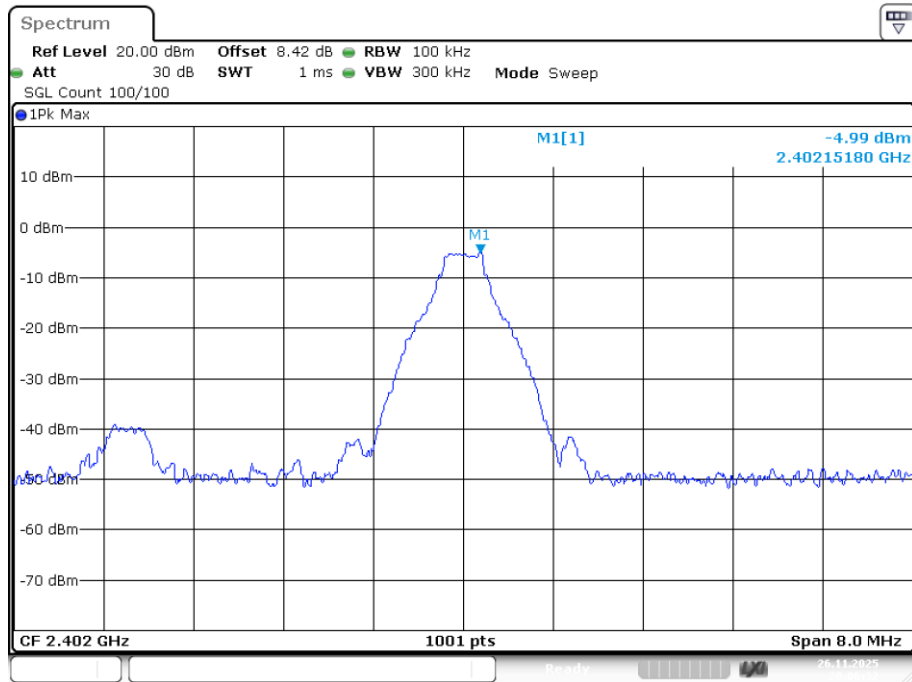


Date: 26.NOV.2025 20:06:33

Band Edge NVNT GFSK 2402MHz Ant1 No-Hopping Emission

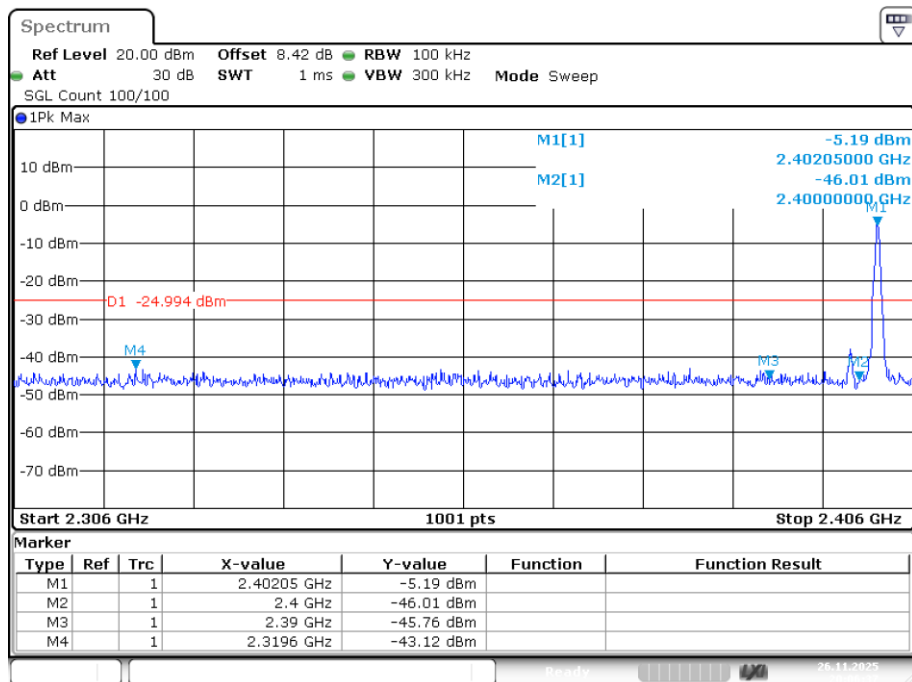


Date: 26.NOV.2025 20:06:37

Band Edge NVNT GFSK 2480MHz Ant1 No-Hopping Ref

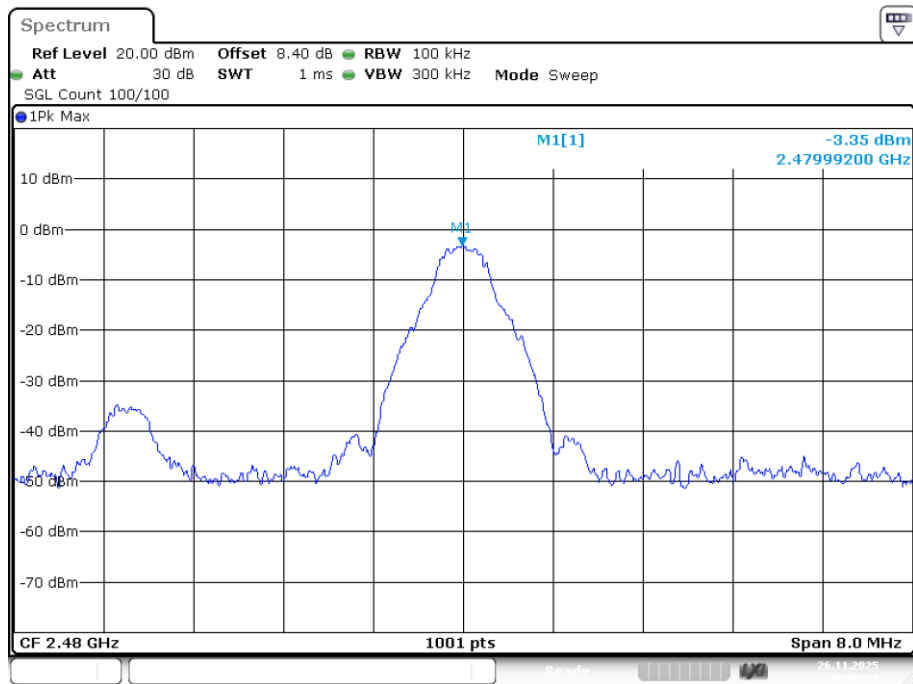


Date: 26.NOV.2025 20:08:58

Band Edge NVNT GFSK 2480MHz Ant1 No-Hopping Emission

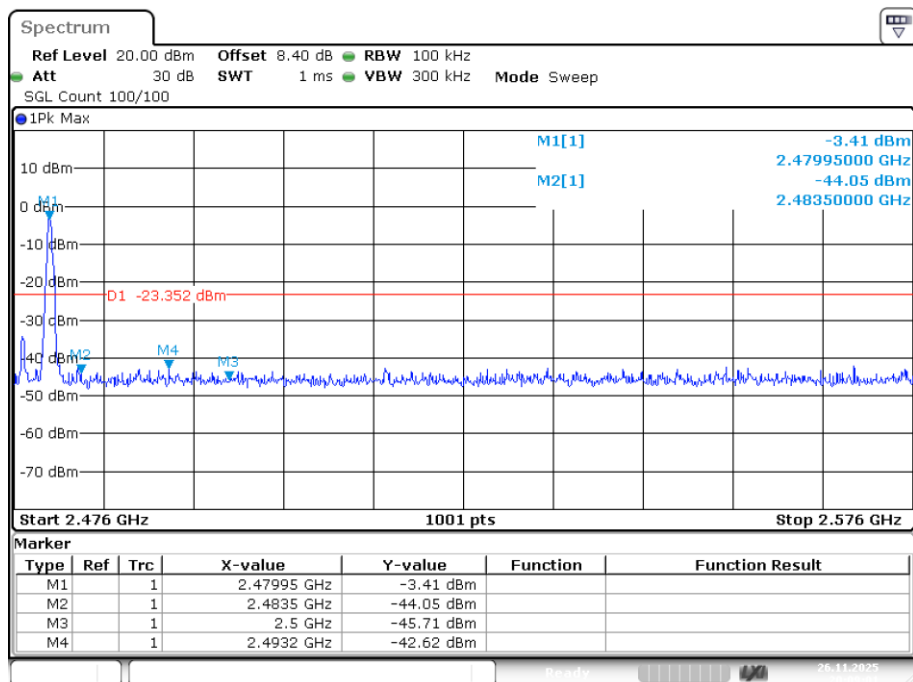


Date: 26.NOV.2025 20:09:01

Band Edge(Hopping) NVNT GFSK 2402MHz Ant1 Hopping Ref

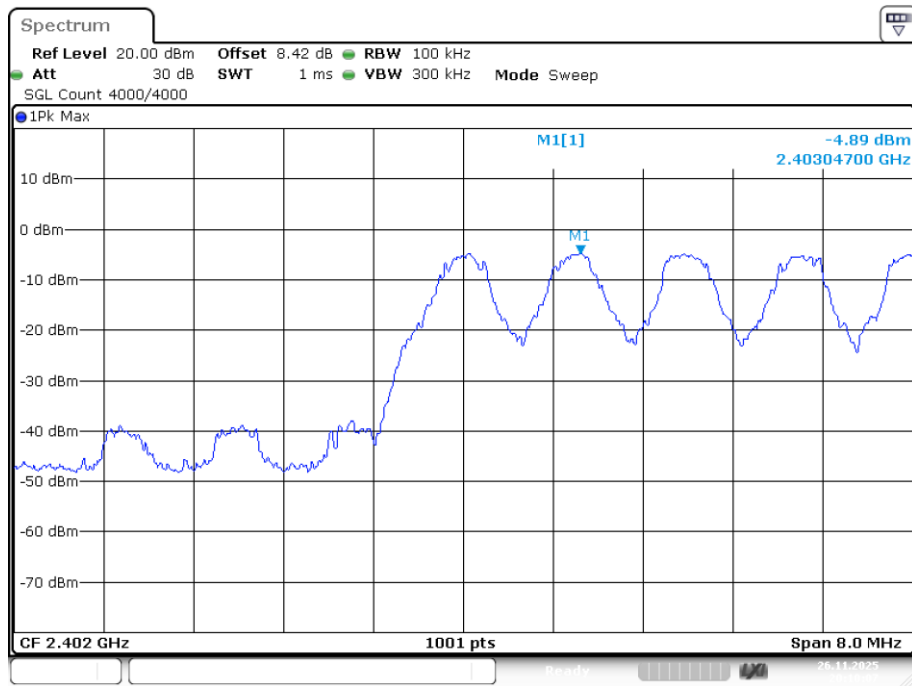


Date: 26.NOV.2025 20:10:06

Band Edge(Hopping) NVNT GFSK 2402MHz Ant1 Hopping Emission

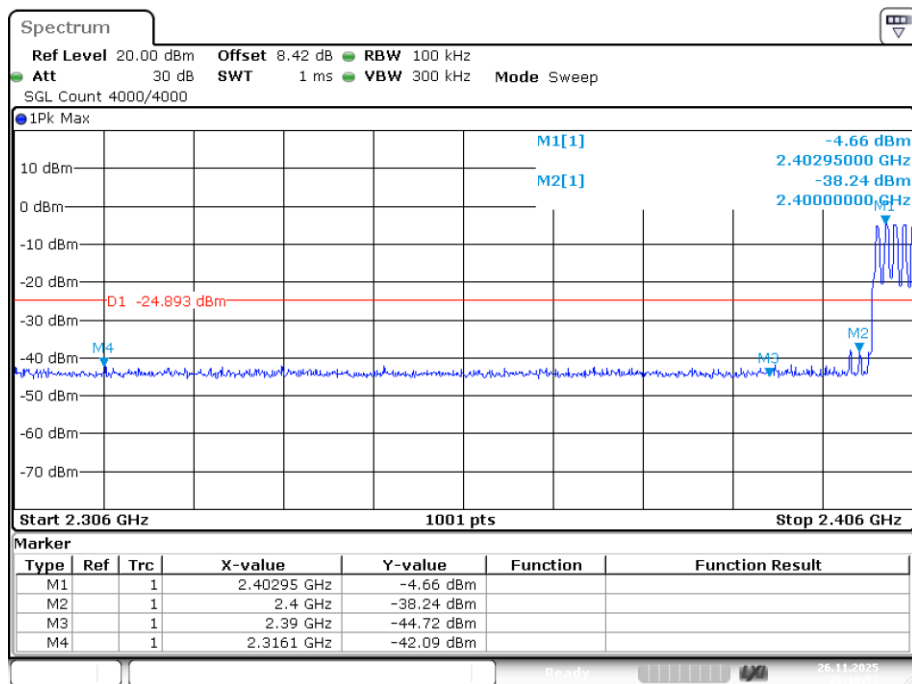


Date: 26.NOV.2025 20:10:53

Band Edge(Hopping) NVNT GFSK 2480MHz Ant1 Hopping Ref

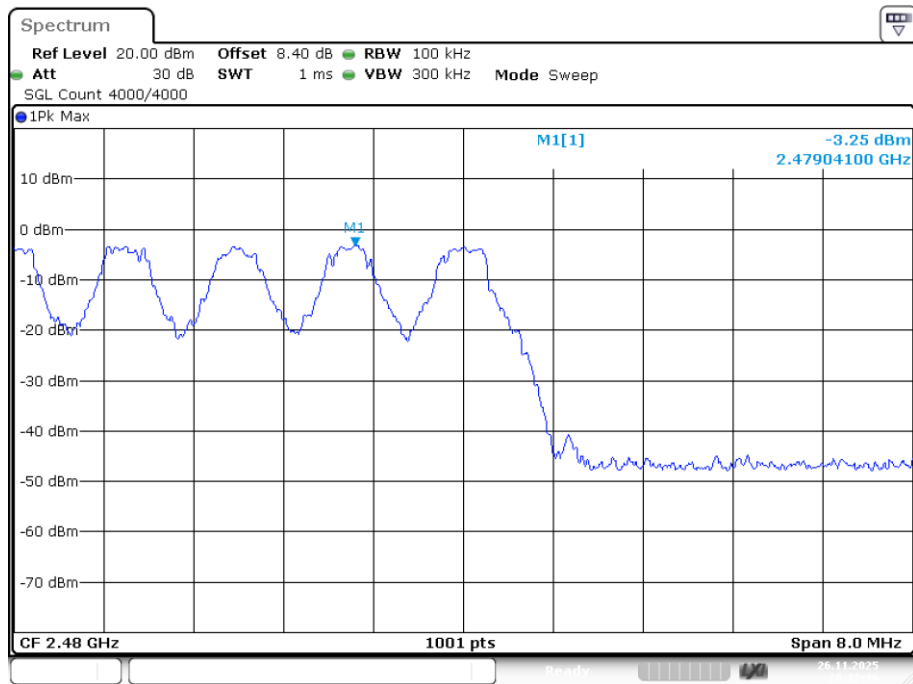

Date: 26.NOV.2025 20:12:36


Band Edge(Hopping) NVNT GFSK 2480MHz Ant1 Hopping Emission

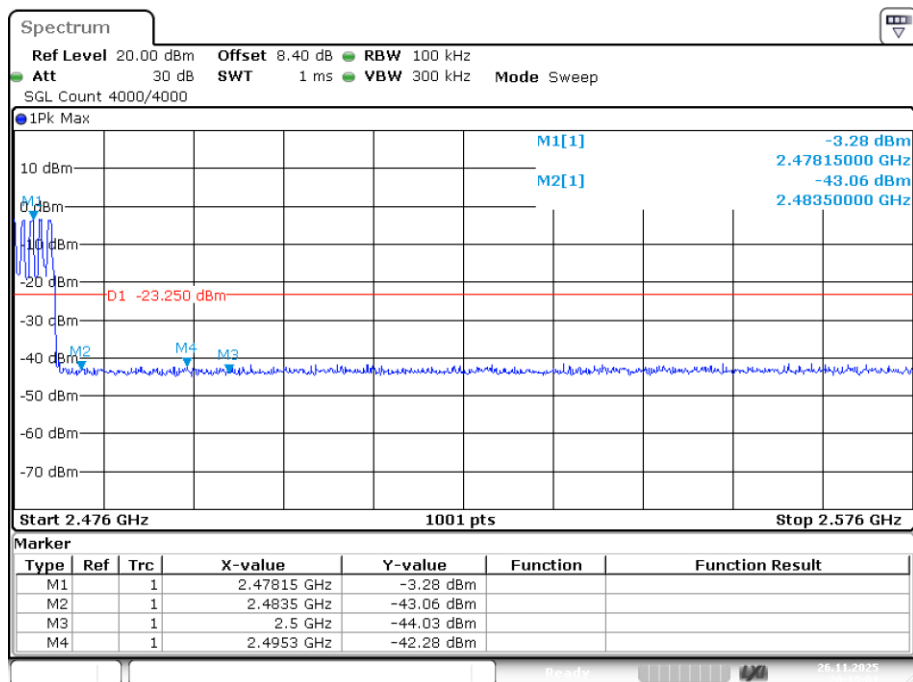

Date: 26.NOV.2025 20:13:01

12. POWER LINE CONDUCTED EMISSIONS

12.1. Block Diagram of Test Setup

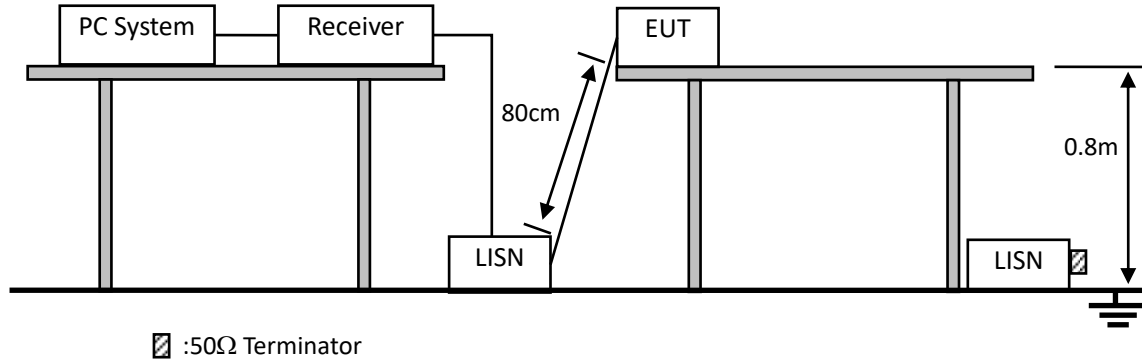

12.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

12.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2020on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

12.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

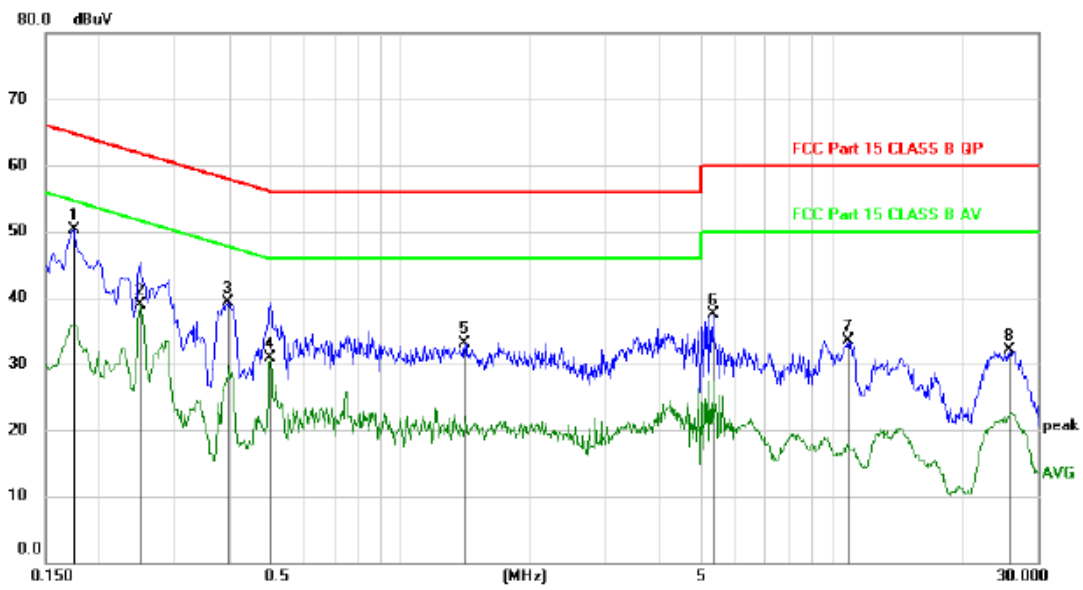


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1740	40.40	9.93	50.33	64.77	-14.44	peak	
2	*	0.2490	28.94	9.97	38.91	51.79	-12.88	AVG	
3		0.3960	29.46	9.94	39.40	57.94	-18.54	peak	
4		0.4980	20.89	9.96	30.85	46.03	-15.18	AVG	
5		1.4039	23.28	9.90	33.18	56.00	-22.82	peak	
6		5.2829	27.37	10.05	37.42	60.00	-22.58	peak	
7		10.9080	23.29	10.23	33.52	60.00	-26.48	peak	
8		25.7490	21.73	10.47	32.20	60.00	-27.80	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

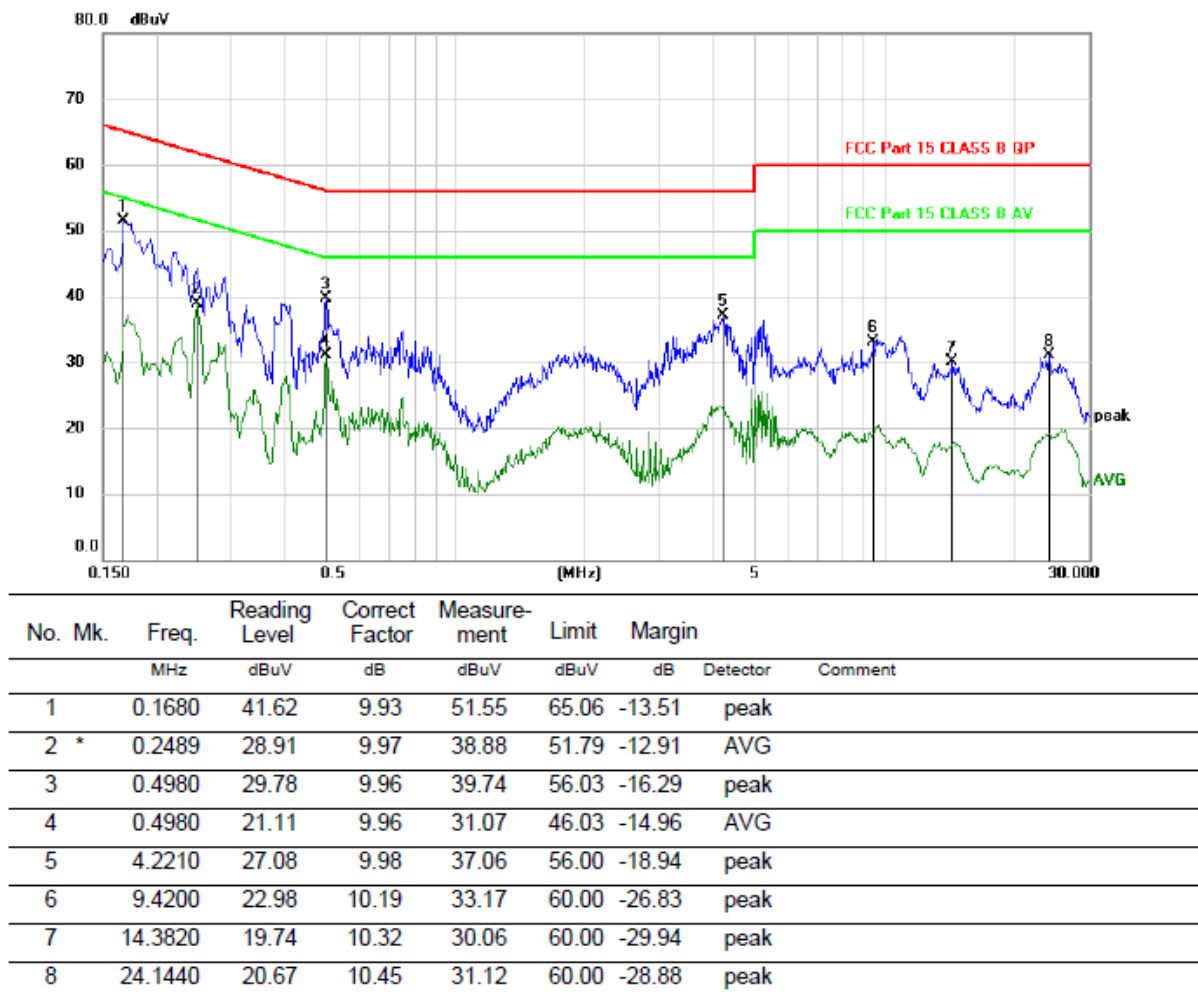

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: 1. Test voltage: DC 5V

2. All modes and channels have been tested and only the GFSK 2402MHz mode with the worst data is listed.

13. ANTENNA REQUIREMENTS

13.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2.Result

The EUT antenna is Internal Antenna. It complies with the standard requirement.

14. TEST SETUP PHOTO

14.1. Photo of Radiated Emission test

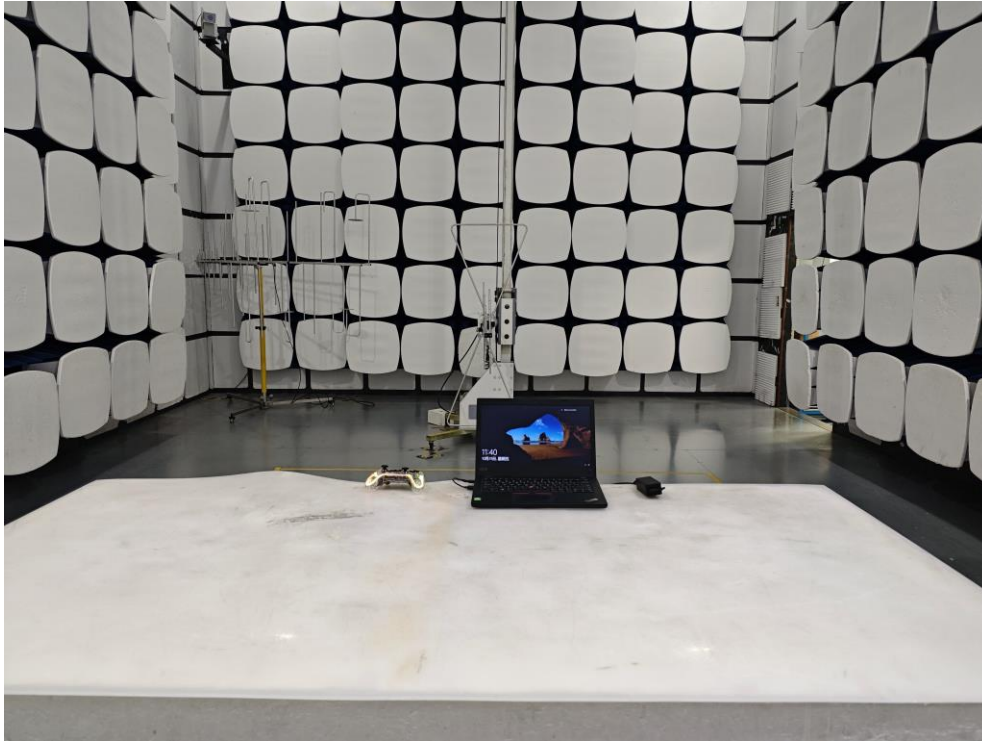

14.2.Photo of Conducted Emission test



15. PHOTOS OF EUT



