


1. 电性能指标 Electrical Performance Index

电 器 性 能 指 标		Electrical Specifications	
频率范围：2400-2500 MHz		2400-2500 MHz	
电压驻波比	≤2.0	VSWR	≤2.0
增益	≤3.96DBI	GAIN	≤3.96DBI
辐射方式	全向	Radiation	OMNI
极化方式	线极化	Polarizatin	LINEAR
输入阻抗	50 Ω	Input Impedance	50 Ω
Manufacturer: 5henzhen JLC Technology Group Co. , Ltd. Address: Advanced Electronic(zhuhai) production Base, Fu shan Industrial park, QianWu ToWn, Doumen District, zhuhai, Guangdong, p. R. China Model: BK7258-ANT			

2、测试报告 Test report


驻波图

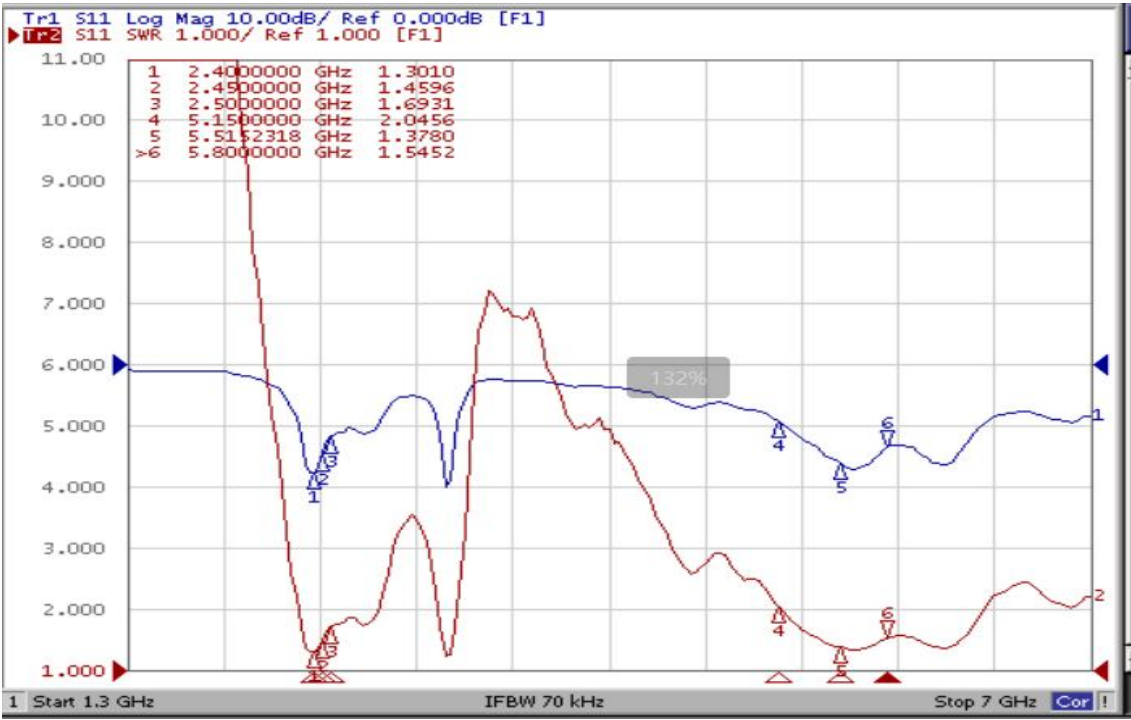


无源报告

Frequency/Mhz	Efficiency / %	MaxGain/dBi
2400	45.19	2.44
2410	47.1	3
2420	48.08	2.69
2430	52.36	3
2440	55.08	3.37
2450	49.2	2.97
2460	51.29	3.2
2470	46.24	3.09
2480	52.24	3.71
2490	50.23	3.41
2500	51.05	3.96

3. 天线 3D 图 2. 4G:

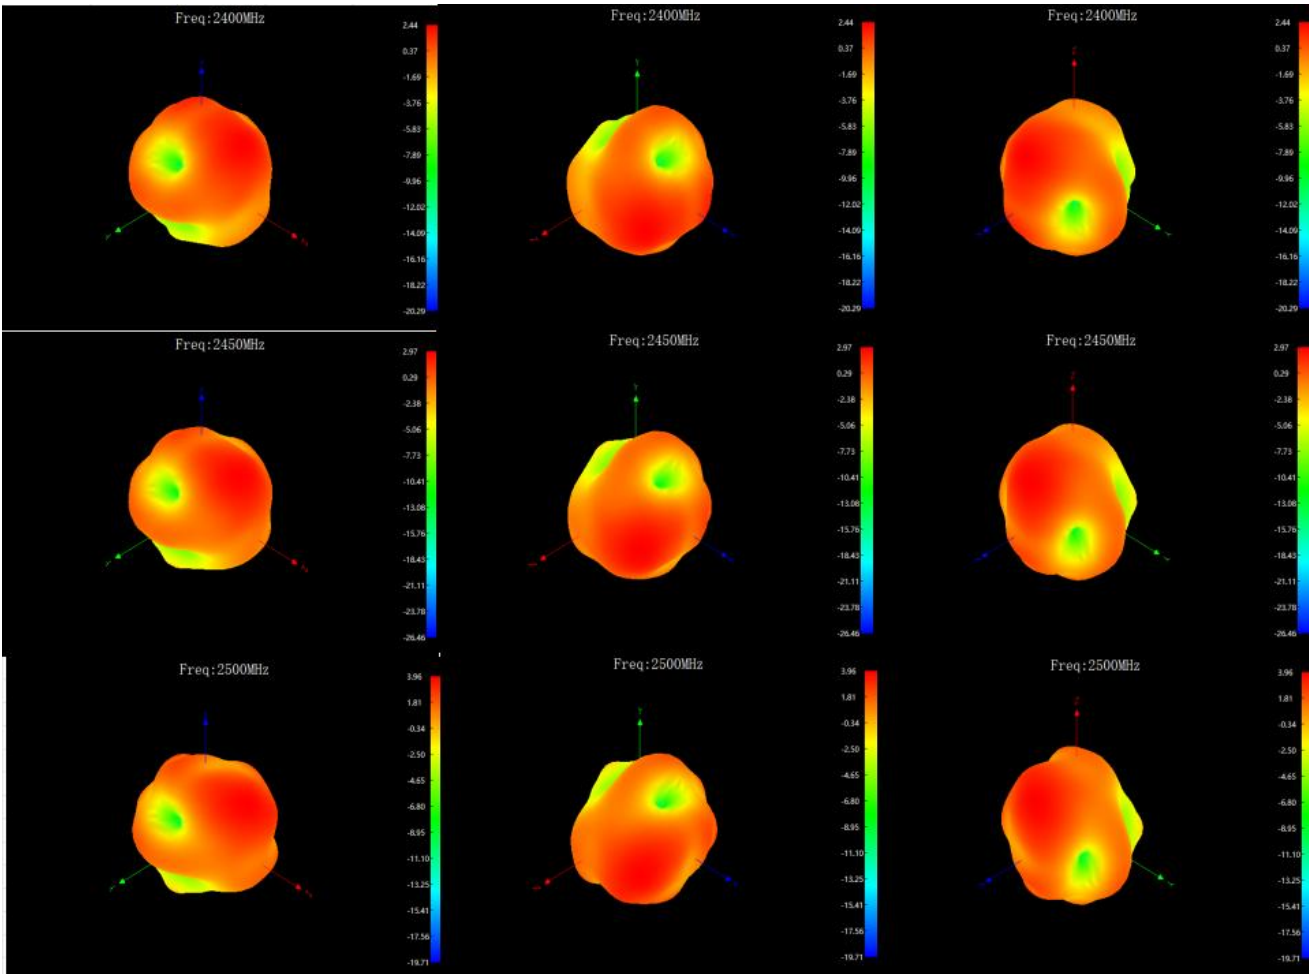

4. 产品形状Product picture

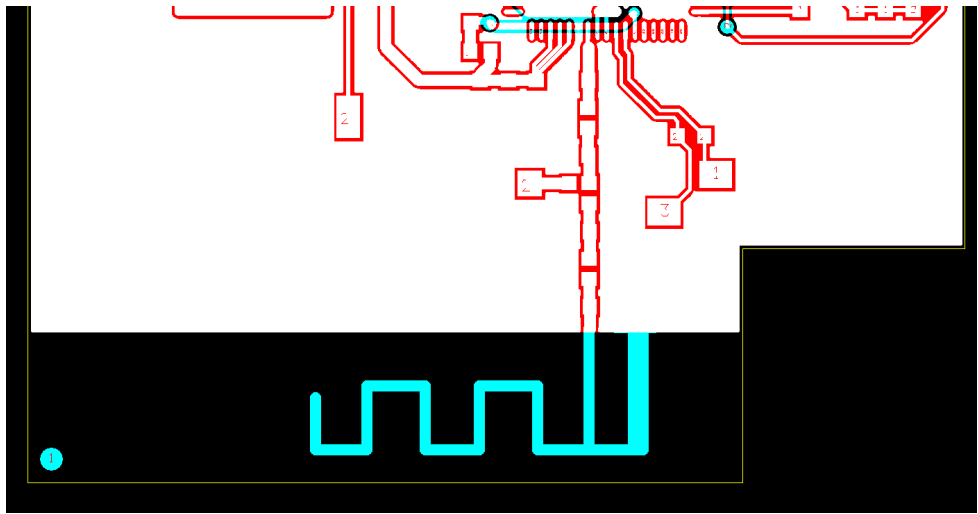

5. 测试设备及原理 Testing Equipment and Principle

1. 测试设备:

网络分析仪 Network Analyzers :

Agilent 8753D 5071B

综合测试仪 Communications Test Set:

Agilent E5515C

3D 暗室测试系统 3D Chamber Test System:

2. 测试原理:

