



Appendix A System Validation Plots

System Performance Check (750MHz)

Type: Validation measurement

Date of measurement: 12/24/2025

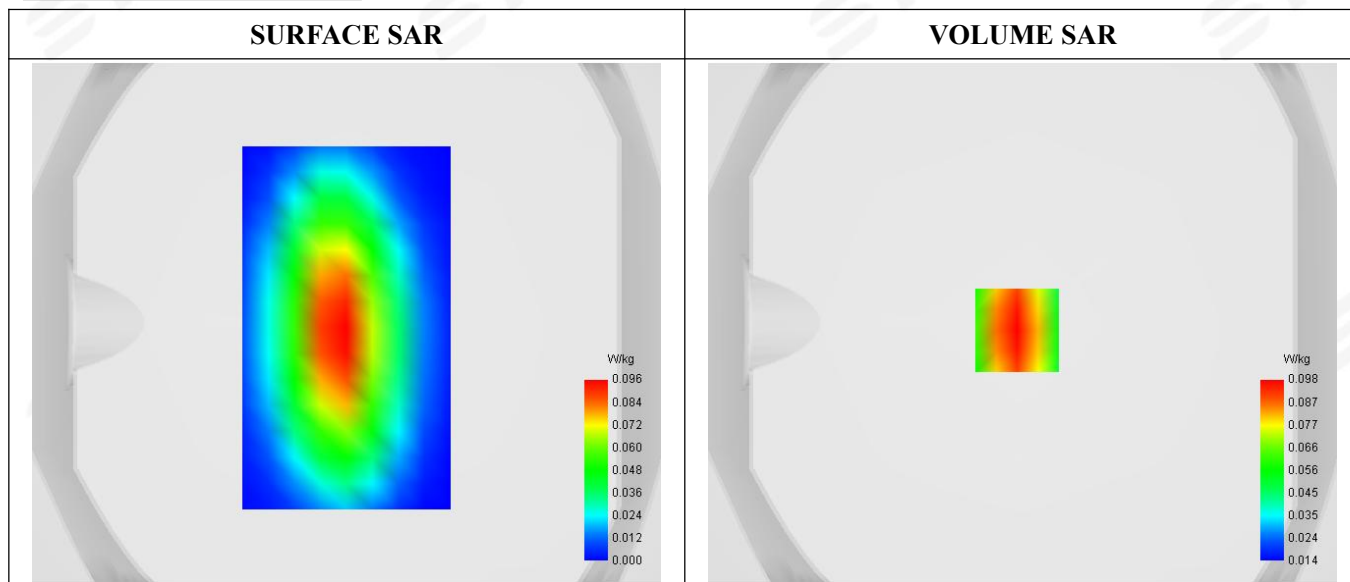
A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	750MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	750
Relative permittivity (real part)	42.65
Conductivity (S/m)	0.87

C. SAR Surface and Volume

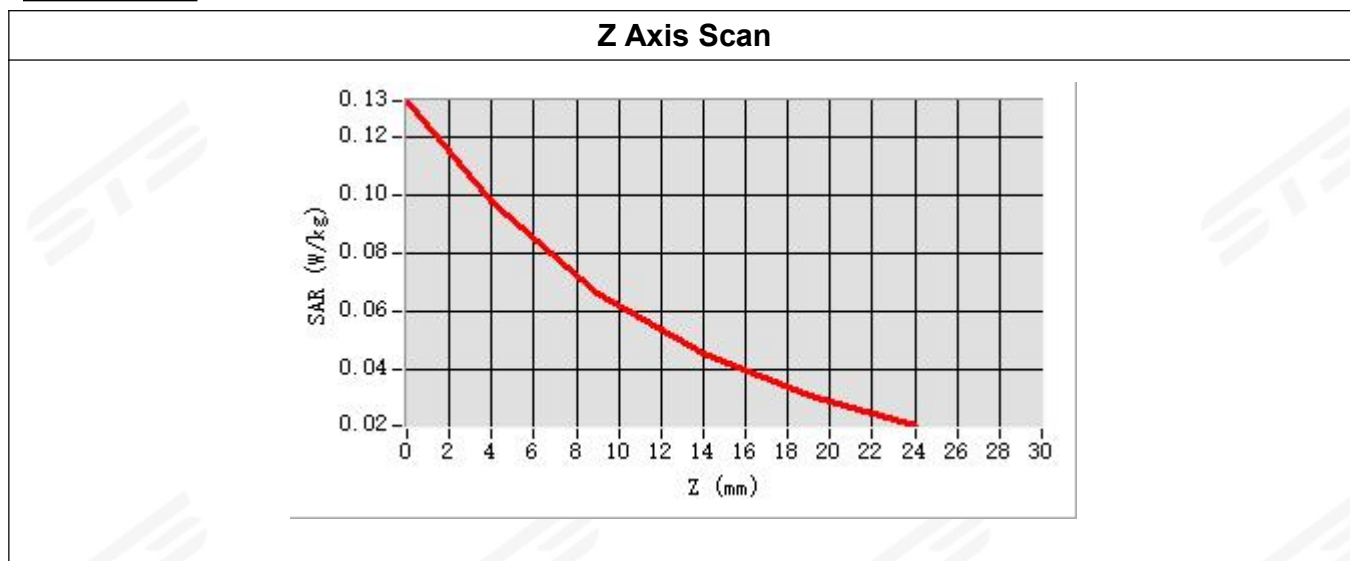


Maximum location: X=-2.00, Y=-3.00

SAR Peak: 0.13 W/kg

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.059799
SAR 1g (W/Kg)	0.092031
Variation (%)	-0.58
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	64.854850

E. Z Axis Scan

**System Performance Check (835MHz)**

Type: Validation measurement

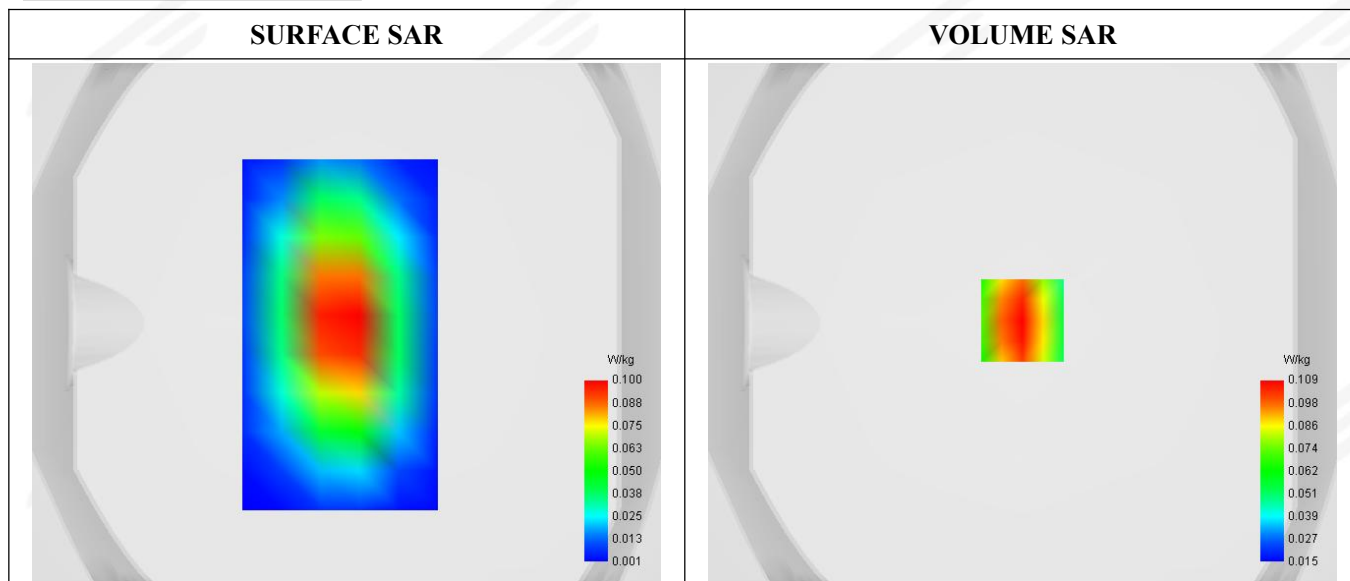
Date of measurement: 12/10/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	835MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

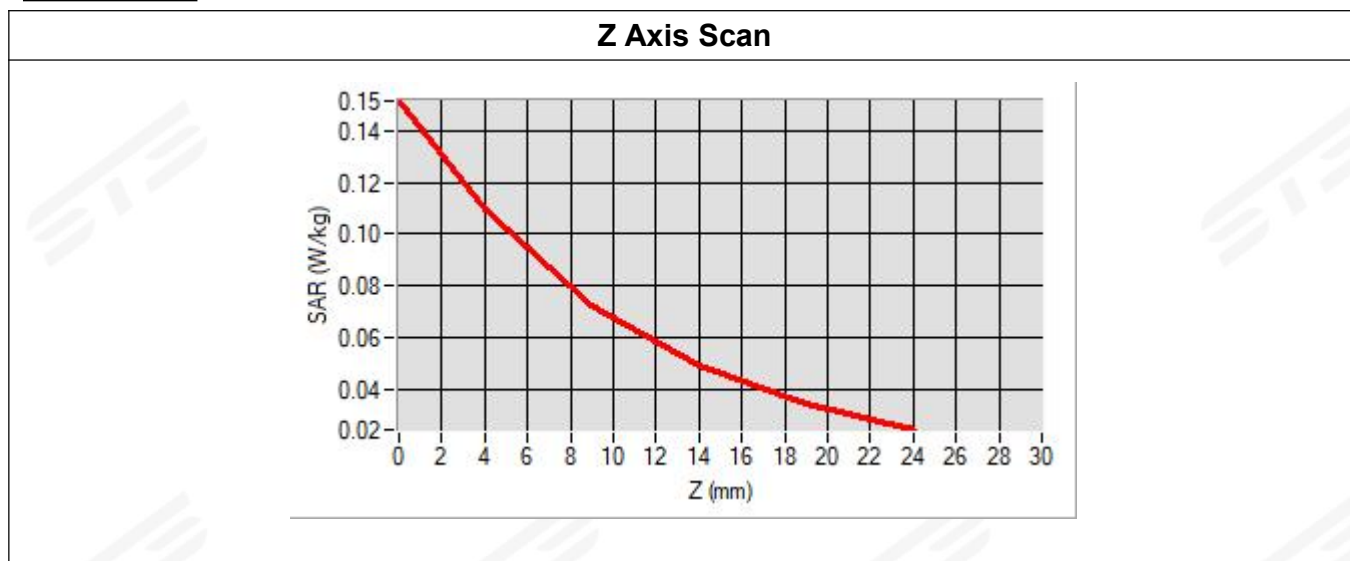
B. Permittivity

Frequency (MHz)	835
Relative permittivity (real part)	42.08
Conductivity (S/m)	0.91

C. SAR Surface and Volume**Maximum location: X=0.00, Y=1.00****SAR Peak: 0.15 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.066270
SAR 1g (W/Kg)	0.103915
Variation (%)	1.65
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	50.027469

E. Z Axis Scan

**System Performance Check (835MHz)**

Type: Validation measurement

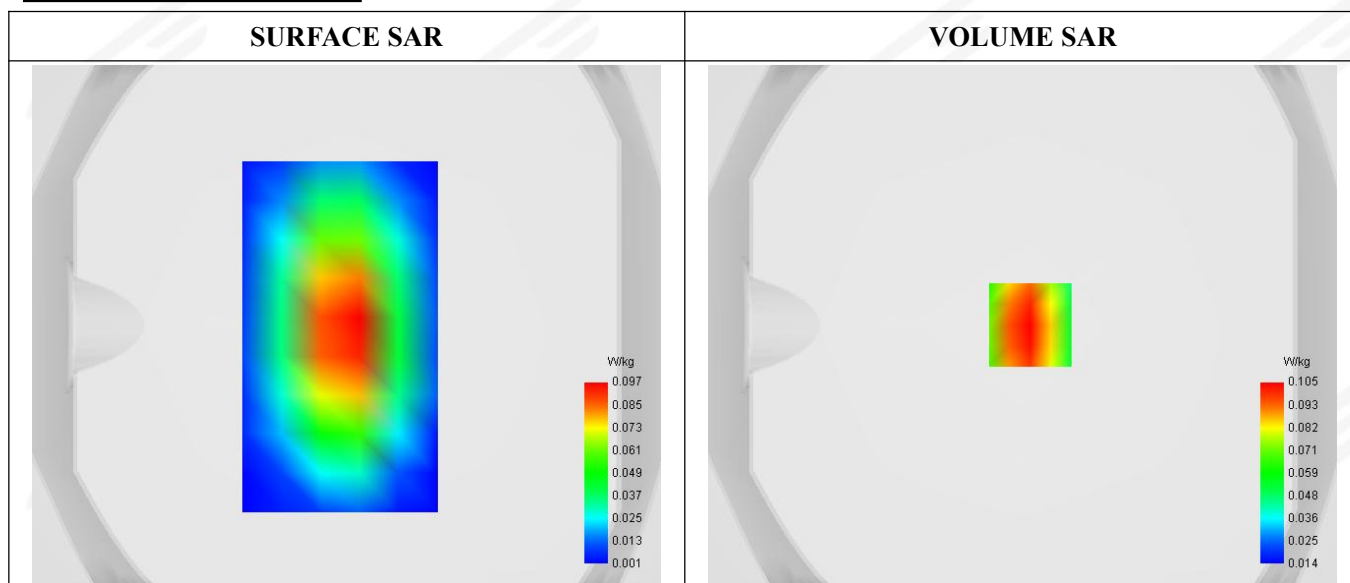
Date of measurement: 12/11/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	835MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

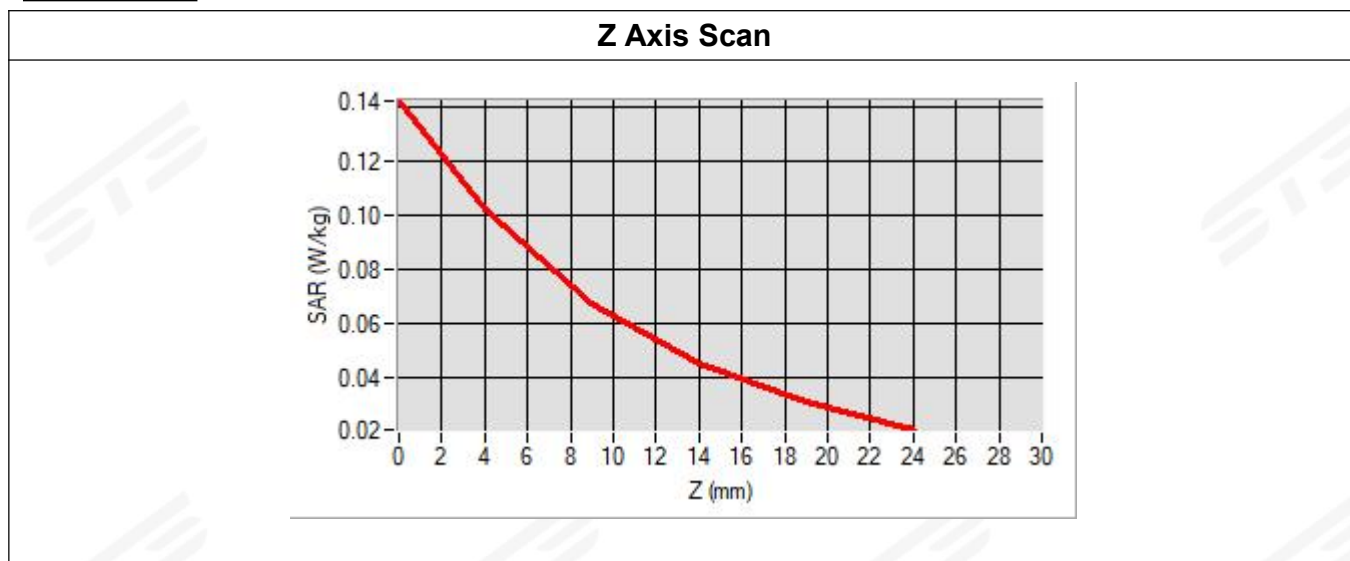
B. Permittivity

Frequency (MHz)	835
Relative permittivity (real part)	41.03
Conductivity (S/m)	0.93

C. SAR Surface and Volume**Maximum location: X=1.00, Y=0.00****SAR Peak: 0.14 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.063710
SAR 1g (W/Kg)	0.101402
Variation (%)	-1.03
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	48.580267

E. Z Axis Scan

**System Performance Check (835MHz)**

Type: Validation measurement

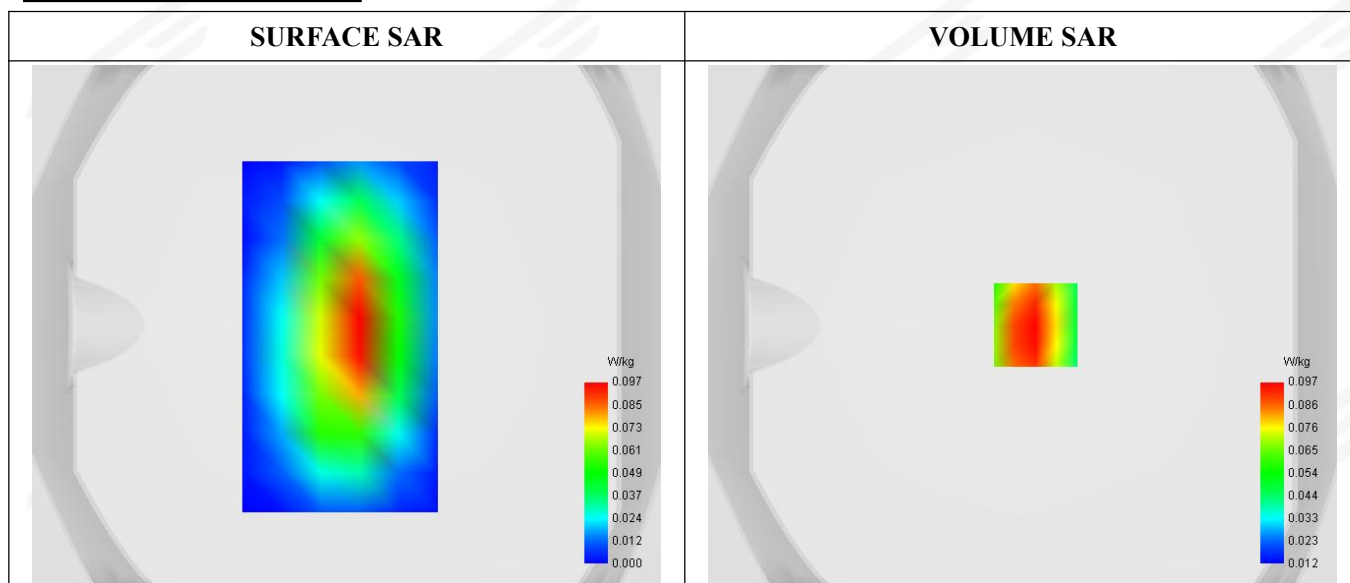
Date of measurement: 12/12/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	835MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

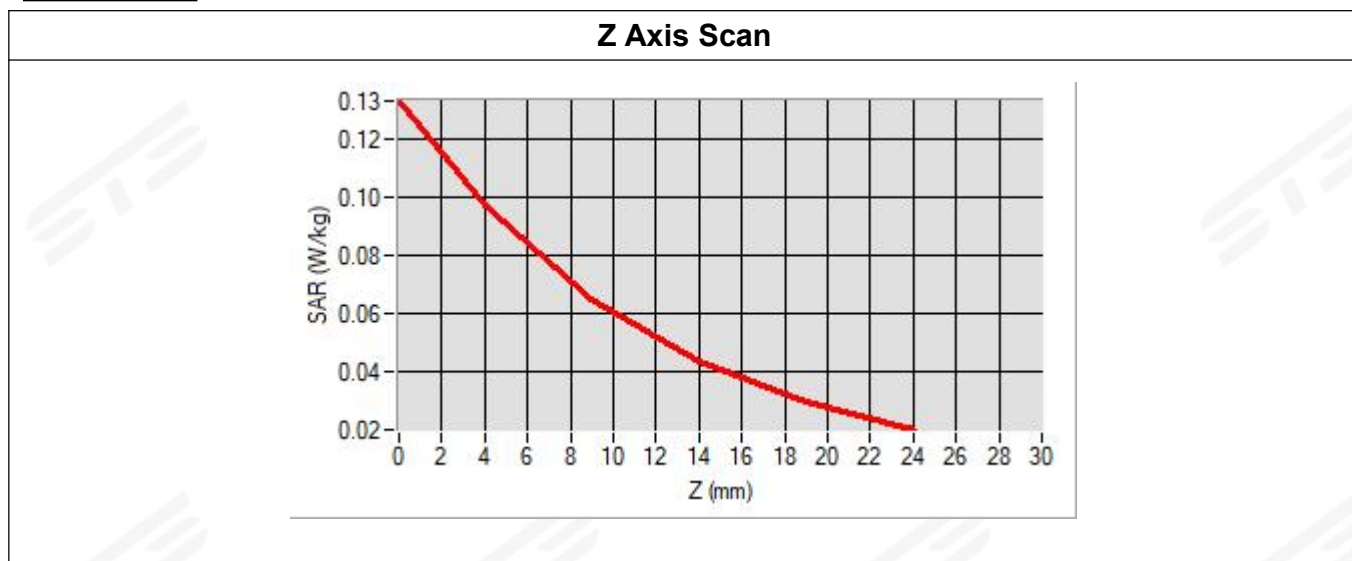
B. Permittivity

Frequency (MHz)	835
Relative permittivity (real part)	42.62
Conductivity (S/m)	0.89

C. SAR Surface and Volume**Maximum location: X=-2.00, Y=-3.00****SAR Peak: 0.13 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.061054
SAR 1g (W/Kg)	0.096180
Variation (%)	0.19
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	58.012125

E. Z Axis Scan

**System Performance Check (835MHz)**

Type: Validation measurement

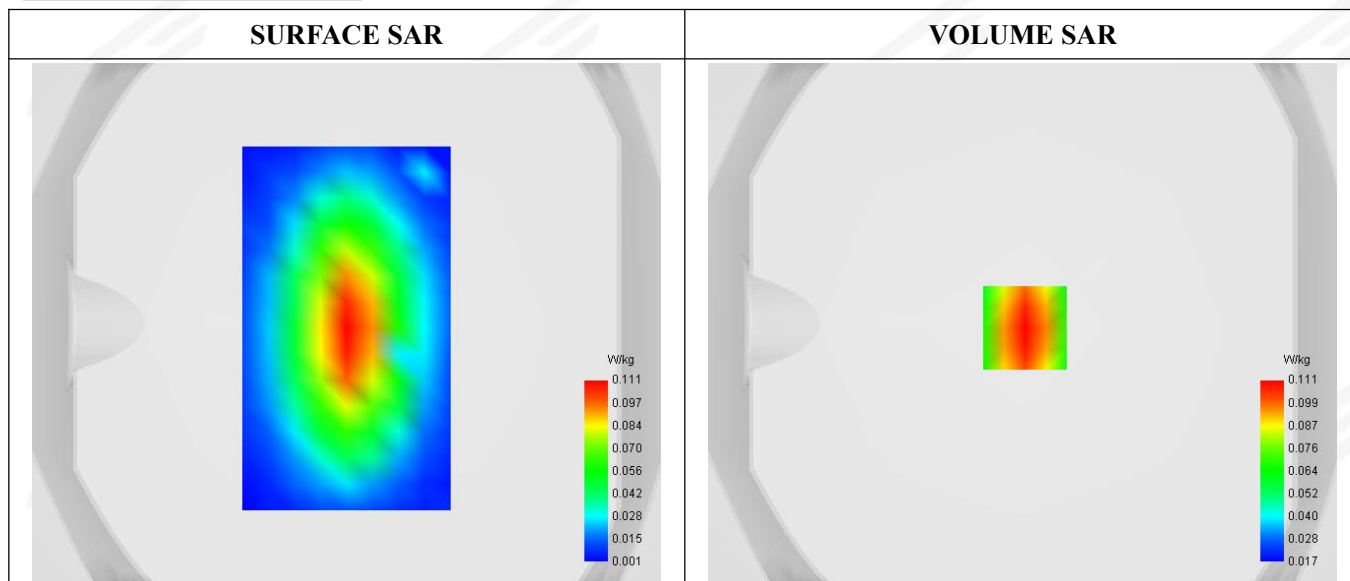
Date of measurement: 12/22/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	835MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

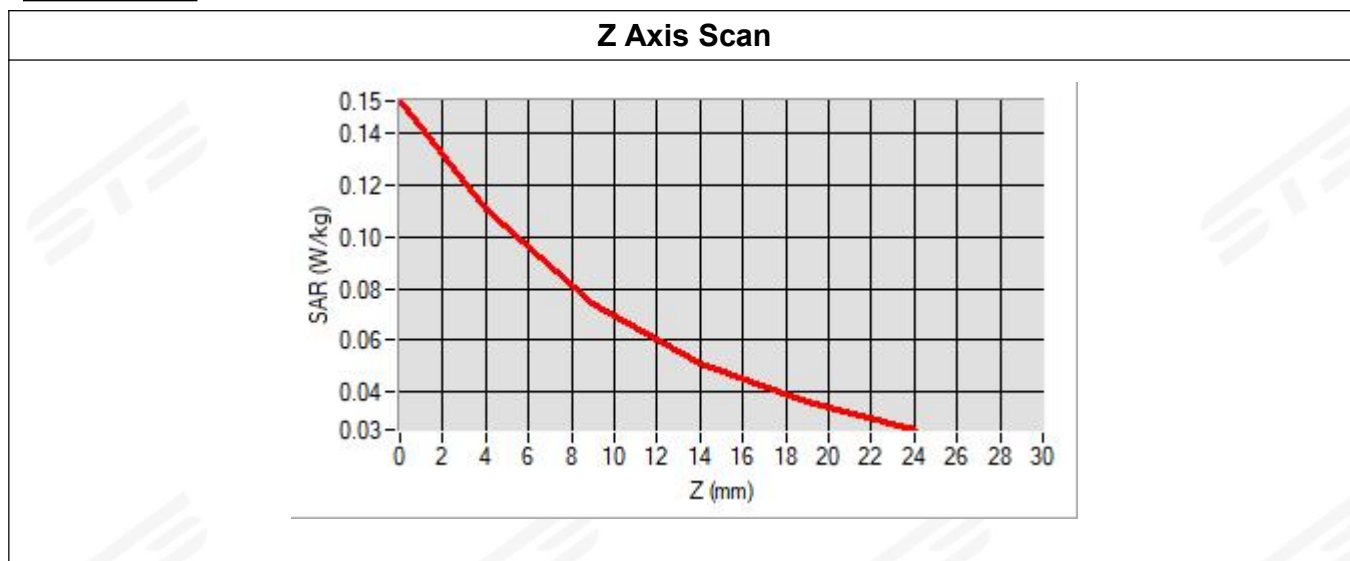
B. Permittivity

Frequency (MHz)	835
Relative permittivity (real part)	41.23
Conductivity (S/m)	0.88

C. SAR Surface and Volume**Maximum location: X=1.00, Y=-2.00****SAR Peak: 0.15 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.068381
SAR 1g (W/Kg)	0.104395
Variation (%)	-0.44
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	49.414405

E. Z Axis Scan

**System Performance Check (835MHz)**

Type: Validation measurement

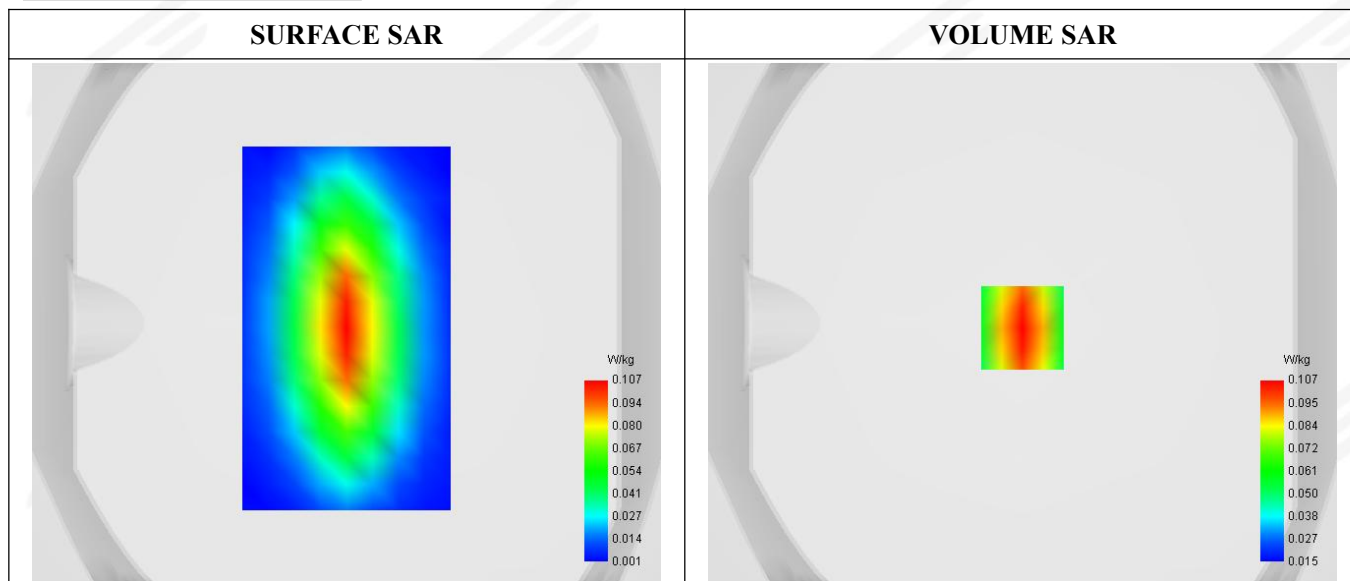
Date of measurement: 12/23/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	835MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

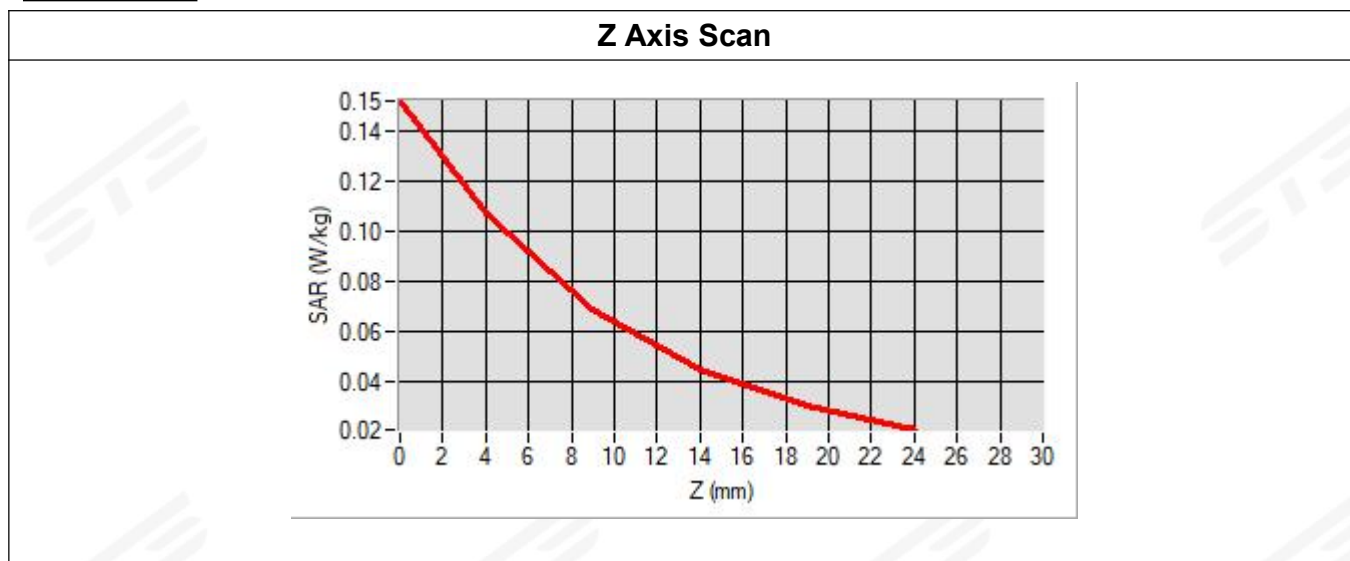
B. Permittivity

Frequency (MHz)	835
Relative permittivity (real part)	40.96
Conductivity (S/m)	0.90

C. SAR Surface and Volume**Maximum location: X=0.00, Y=-2.00****SAR Peak: 0.15 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.062810
SAR 1g (W/Kg)	0.101841
Variation (%)	-0.75
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	56.917401

E. Z Axis Scan

**System Performance Check (1800MHz)**

Type: Validation measurement

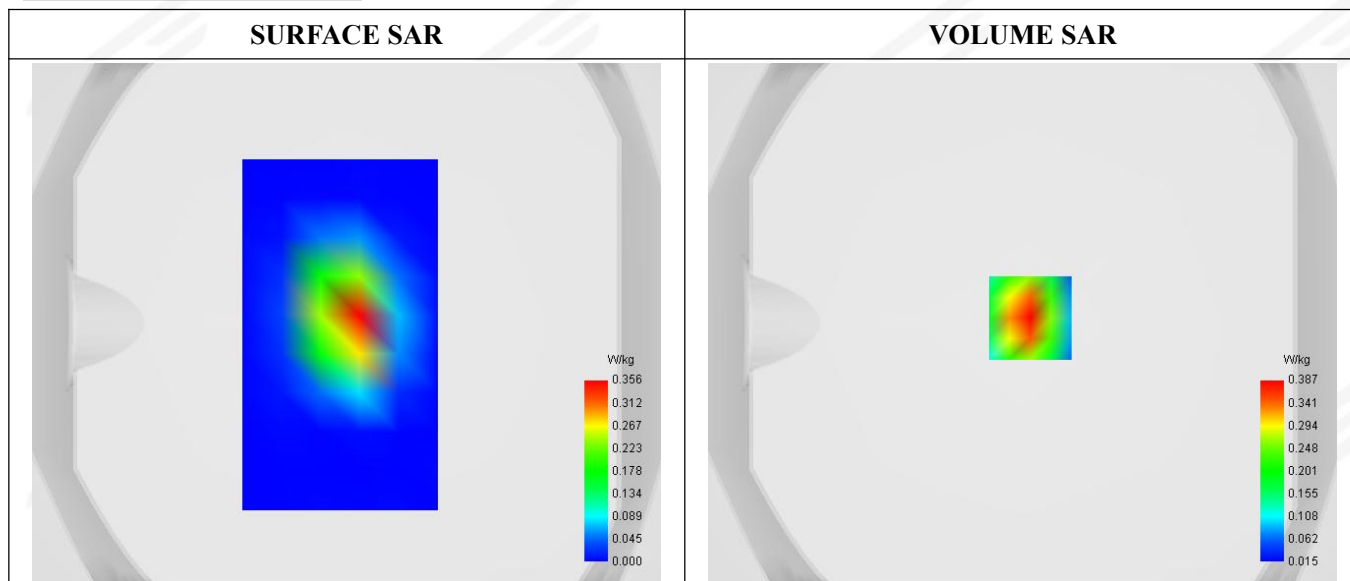
Date of measurement: 11/19/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	1800MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

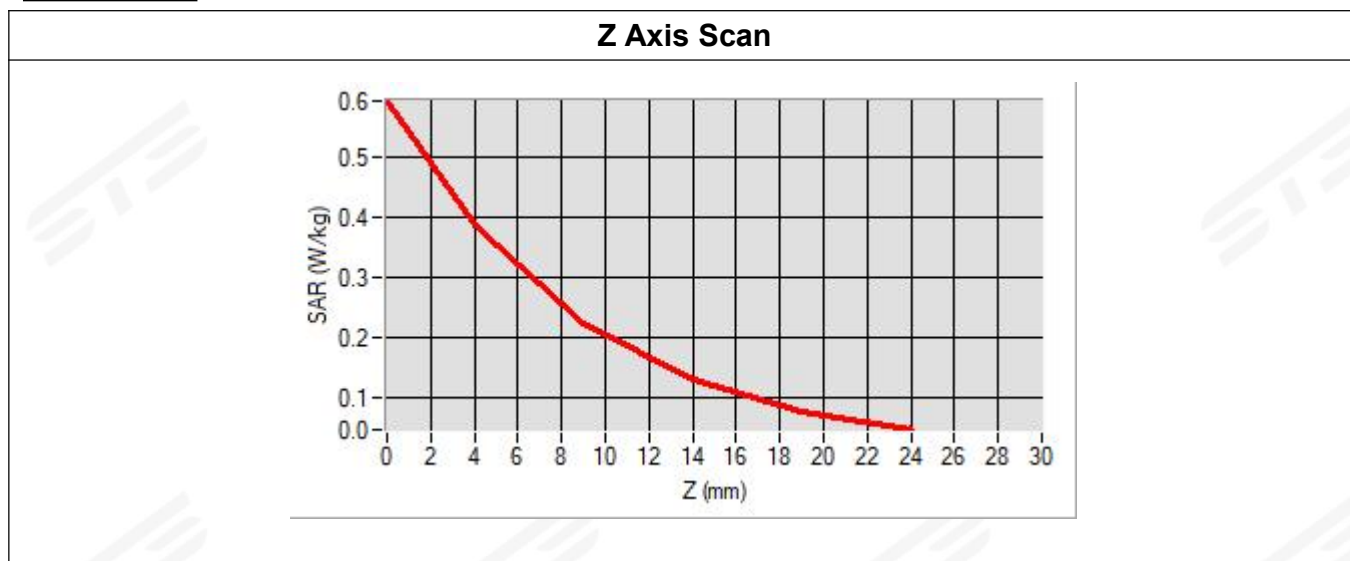
B. Permittivity

Frequency (MHz)	1800
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.38

C. SAR Surface and Volume**Maximum location: X=3.00, Y=2.00****SAR Peak: 0.60 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.192357
SAR 1g (W/Kg)	0.361223
Variation (%)	1.29
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	54.476305

E. Z Axis Scan

**System Performance Check (1800MHz)**

Type: Validation measurement

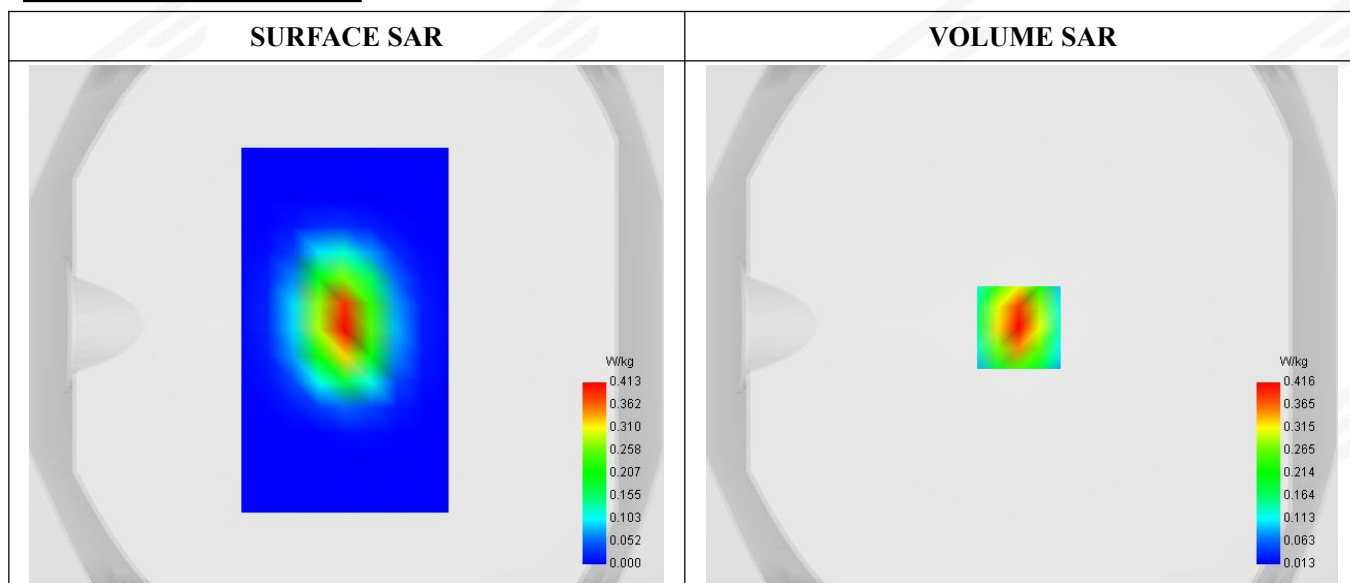
Date of measurement: 11/20/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	1800MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

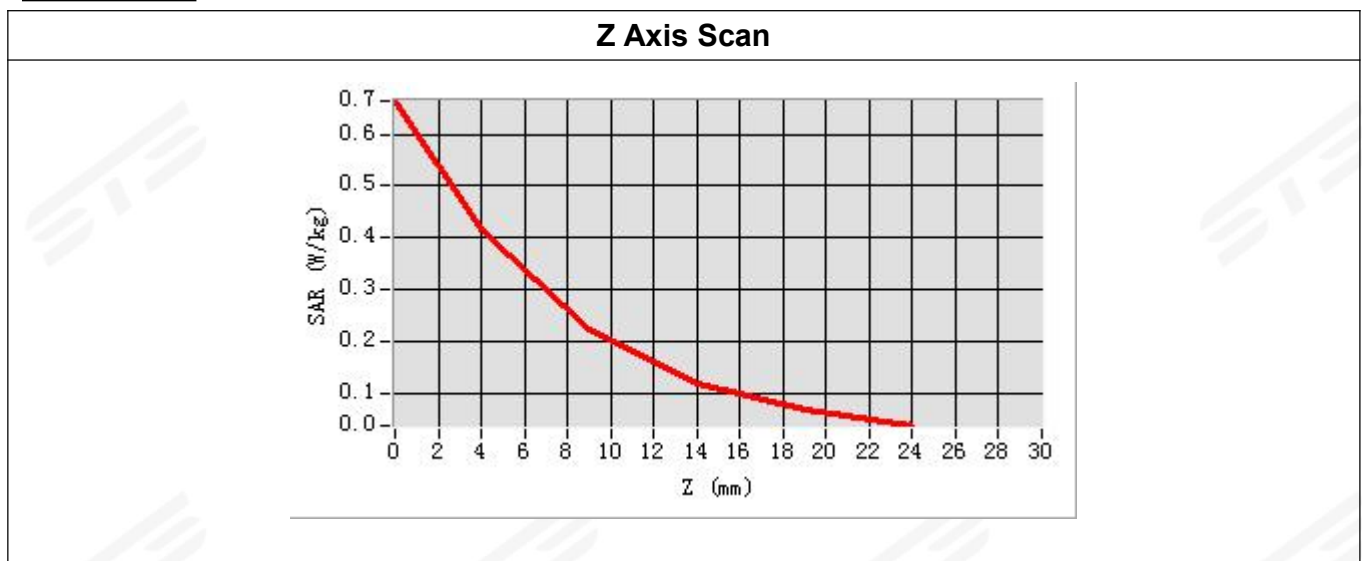
B. Permittivity

Frequency (MHz)	1800
Relative permittivity (real part)	40.51
Conductivity (S/m)	1.36

C. SAR Surface and Volume**Maximum location: X=0.00, Y=-1.00****SAR Peak: 0.66 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.205140
SAR 1g (W/Kg)	0.384665
Variation (%)	0.14
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	65.840825

E. Z Axis Scan

**System Performance Check (1800MHz)**

Type: Validation measurement

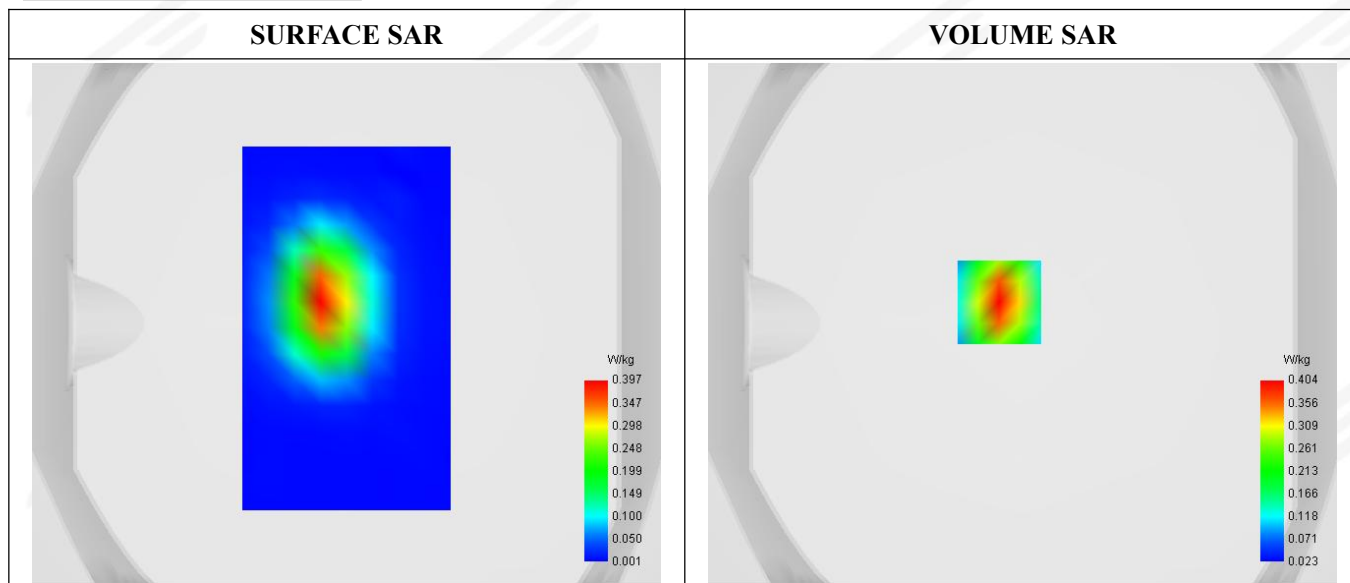
Date of measurement: 11/24/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	1800MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

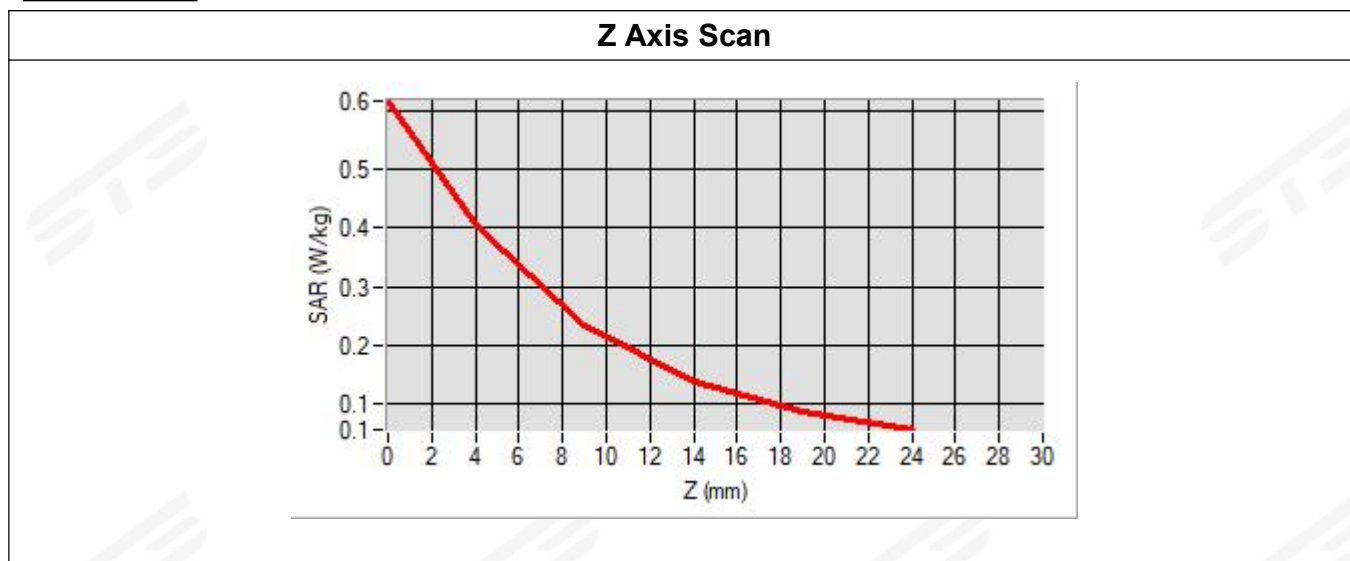
B. Permittivity

Frequency (MHz)	1800
Relative permittivity (real part)	40.87
Conductivity (S/m)	1.39

C. SAR Surface and Volume**Maximum location: X=-9.00, Y=8.00****SAR Peak: 0.62 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.203019
SAR 1g (W/Kg)	0.372855
Variation (%)	0.92
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.053753

E. Z Axis Scan

**System Performance Check (1900MHz)**

Type: Validation measurement

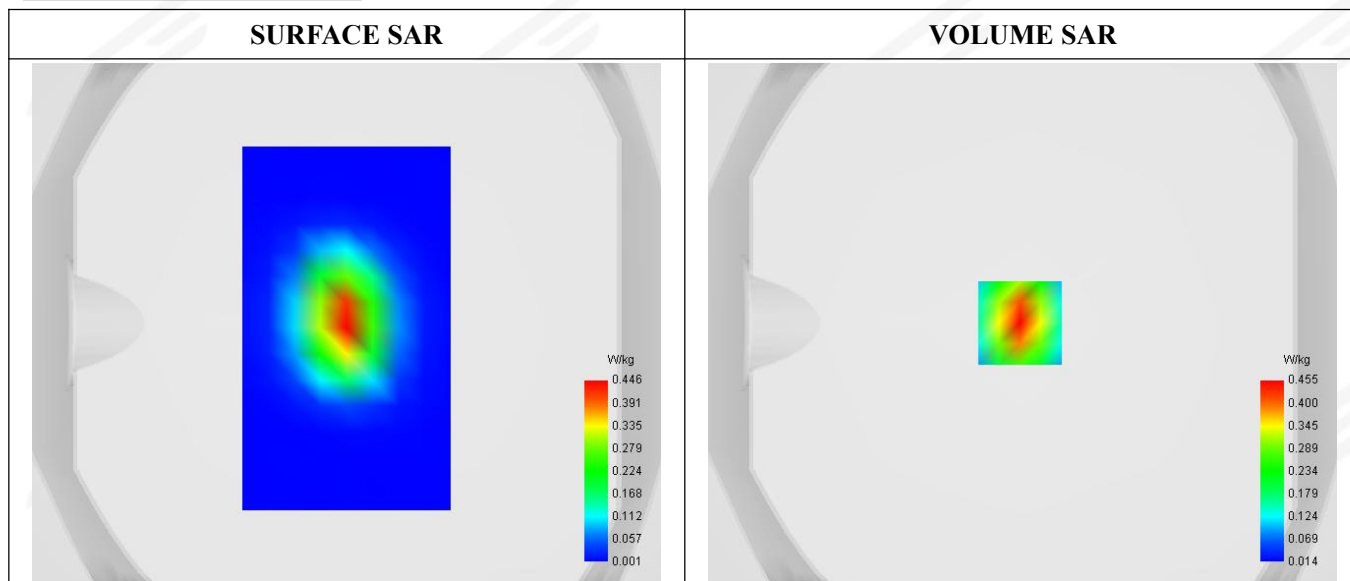
Date of measurement: 11/18/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	1900MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

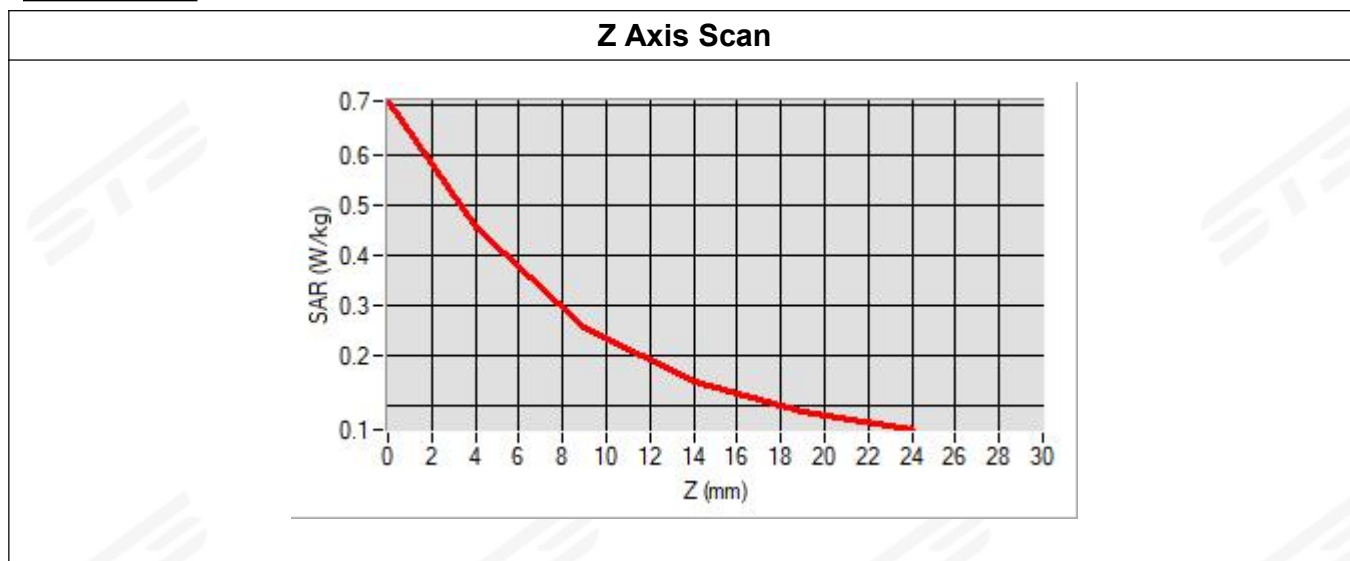
B. Permittivity

Frequency (MHz)	1900
Relative permittivity (real part)	40.22
Conductivity (S/m)	1.43

C. SAR Surface and Volume**Maximum location: X=-1.00, Y=0.00****SAR Peak: 0.71 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.220824
SAR 1g (W/Kg)	0.419350
Variation (%)	2.05
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	61.486486

E. Z Axis Scan

**System Performance Check (1900MHz)**

Type: Validation measurement

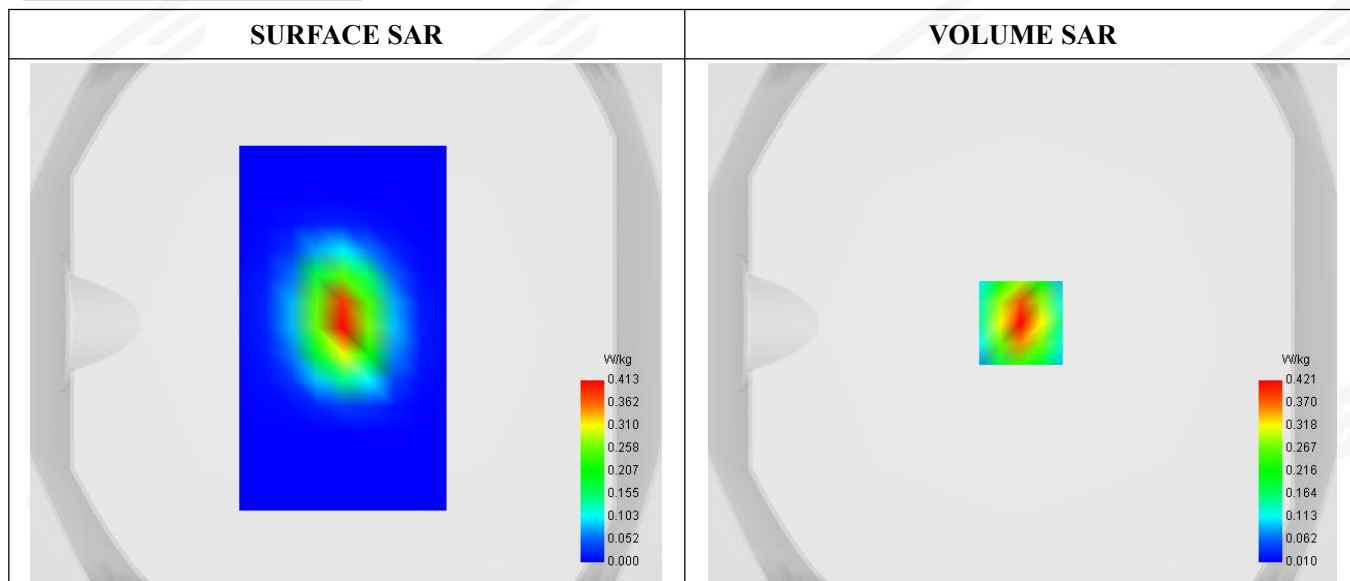
Date of measurement: 11/22/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	1900MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

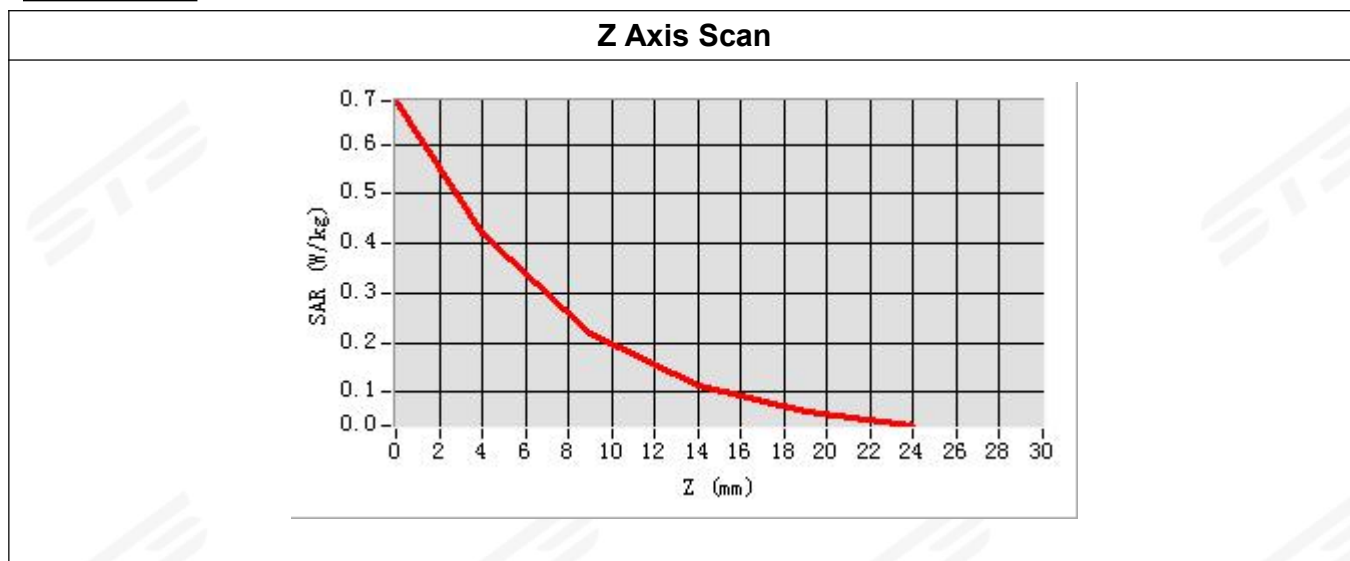
B. Permittivity

Frequency (MHz)	1900
Relative permittivity (real part)	39.59
Conductivity (S/m)	1.41

C. SAR Surface and Volume**Maximum location: X=0.00, Y=0.00****SAR Peak: 0.69 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.201544
SAR 1g (W/Kg)	0.408925
Variation (%)	1.43
Horizontal validation criteria: minimum distance (mm)	8.944272
Vertical validation criteria: SAR ratio M2/M1 (%)	58.919836

E. Z Axis Scan

**System Performance Check (2450MHz)**

Type: Validation measurement

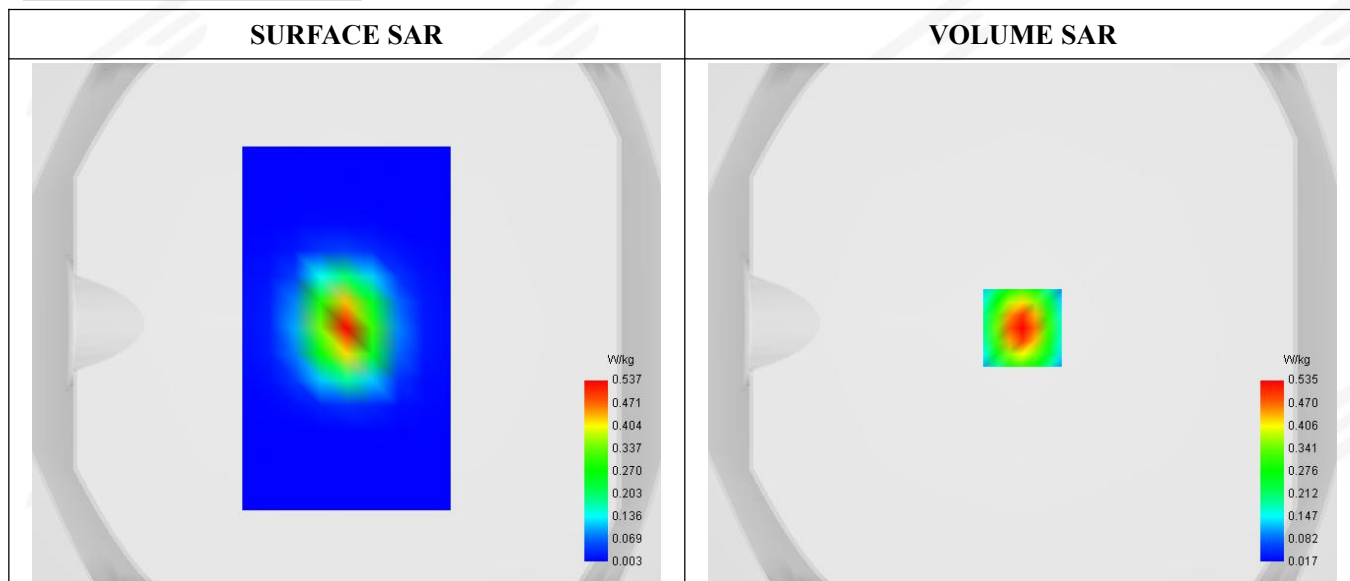
Date of measurement: 12/01/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

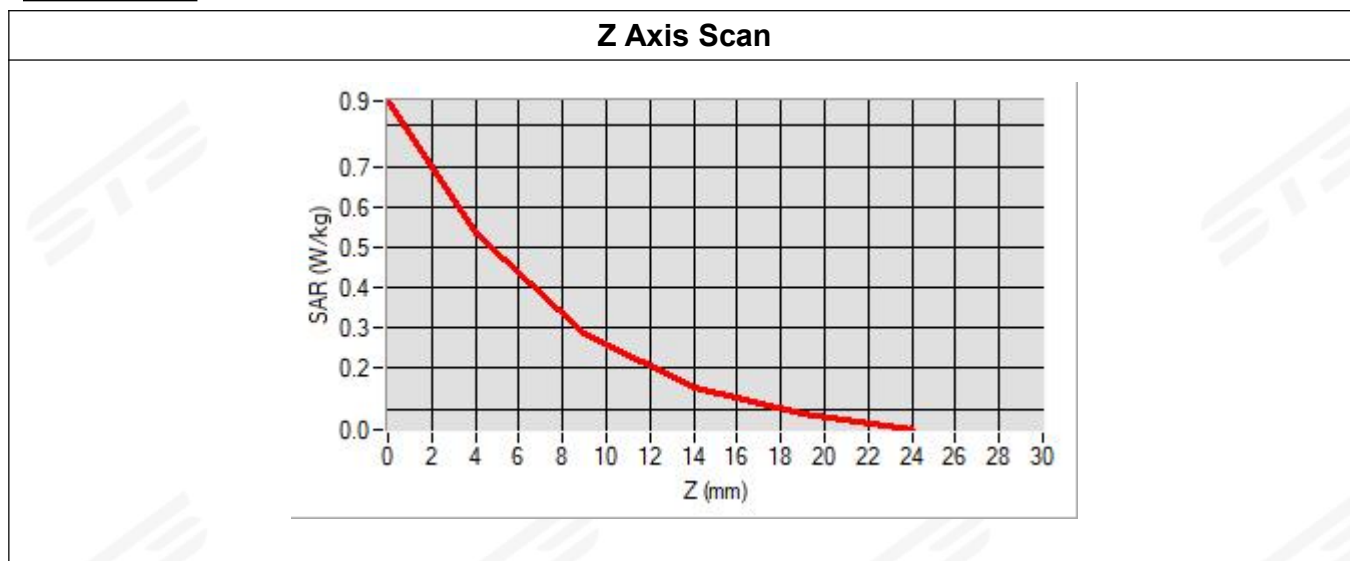
B. Permittivity

Frequency (MHz)	2450
Relative permittivity (real part)	38.76
Conductivity (S/m)	1.81

C. SAR Surface and Volume**Maximum location: X=0.00, Y=-2.00****SAR Peak: 0.87 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.242301
SAR 1g (W/Kg)	0.511589
Variation (%)	0.36
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	50.038482

E. Z Axis Scan

**System Performance Check (2600MHz)**

Type: Validation measurement

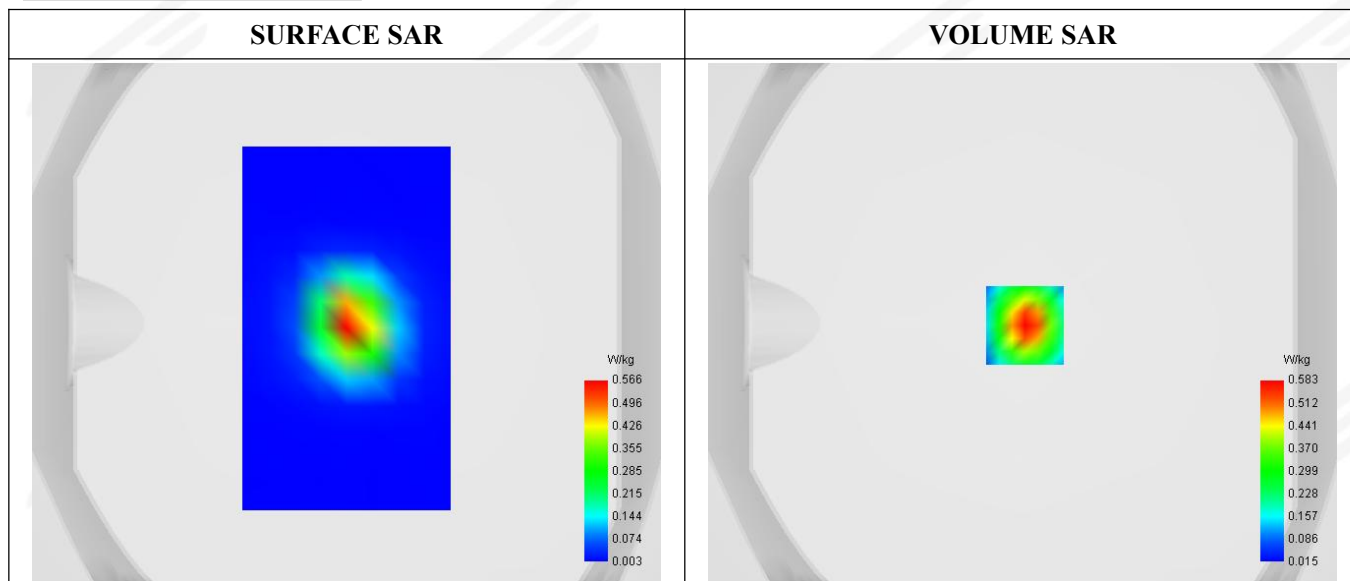
Date of measurement: 11/26/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	2600MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

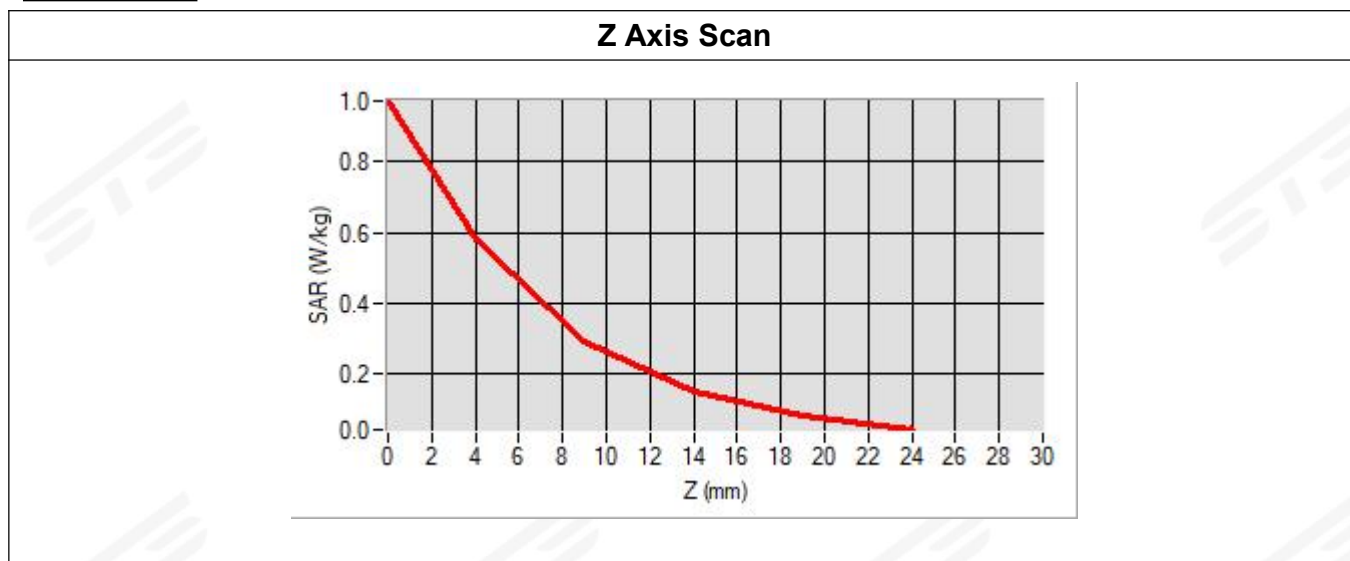
B. Permittivity

Frequency (MHz)	2600
Relative permittivity (real part)	39.65
Conductivity (S/m)	1.99

C. SAR Surface and Volume**Maximum location: X=1.00, Y=-1.00****SAR Peak: 0.97 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.248660
SAR 1g (W/Kg)	0.522186
Variation (%)	1.19
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	73.183329

E. Z Axis Scan

**System Performance Check (2600MHz)**

Type: Validation measurement

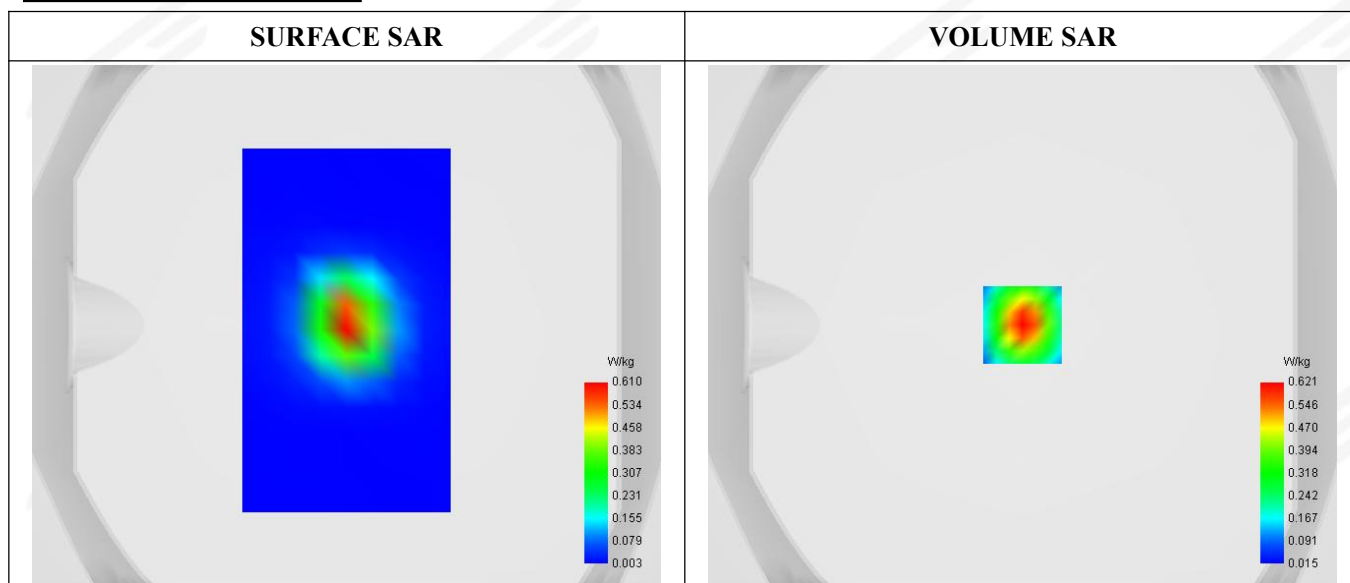
Date of measurement: 11/28/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	2600MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

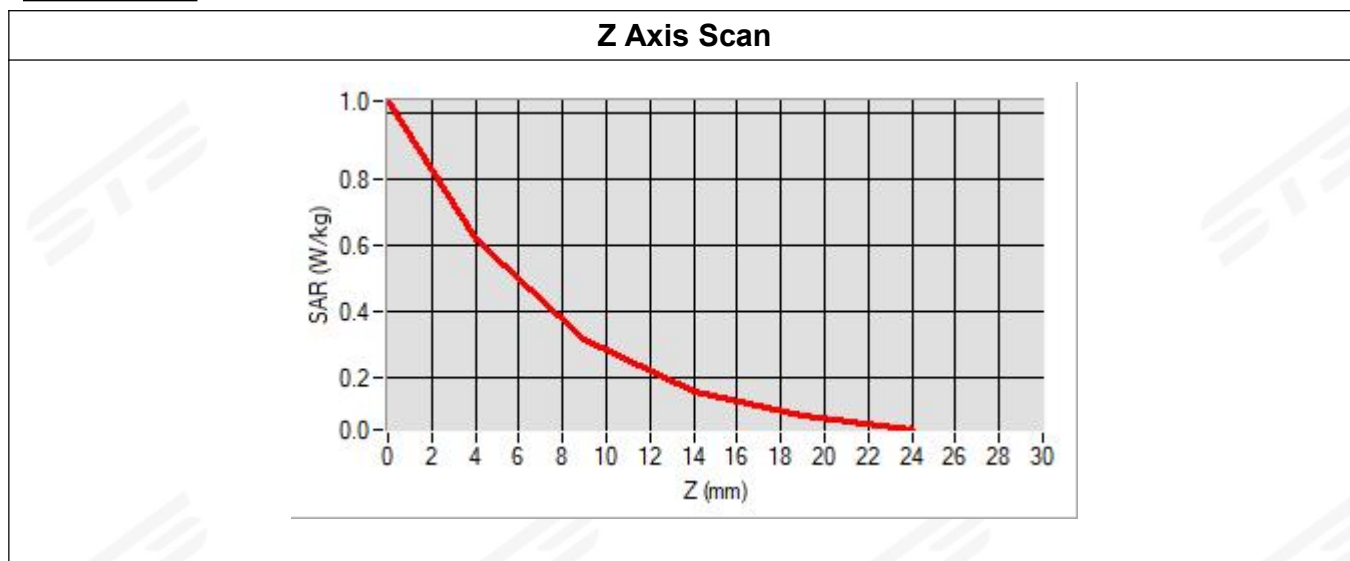
B. Permittivity

Frequency (MHz)	2600
Relative permittivity (real part)	39.48
Conductivity (S/m)	2.01

C. SAR Surface and Volume**Maximum location: X=0.00, Y=0.00****SAR Peak: 1.04 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.266475
SAR 1g (W/Kg)	0.567594
Variation (%)	0.55
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	59.940876

E. Z Axis Scan

**System Performance Check (2600MHz)**

Type: Validation measurement

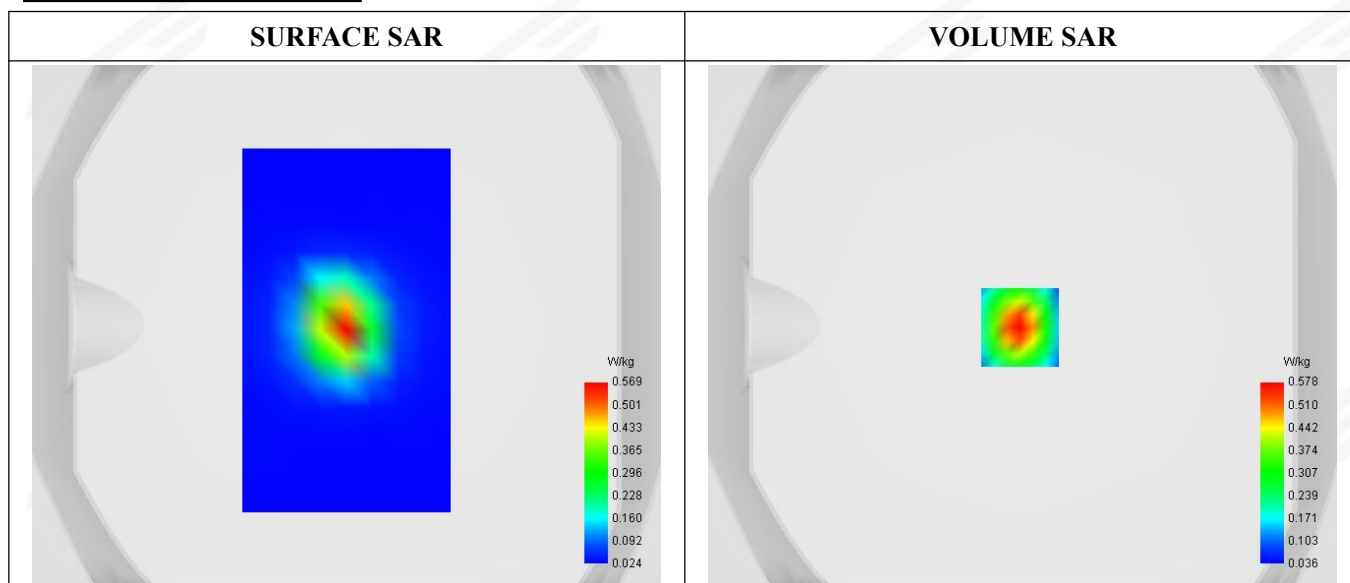
Date of measurement: 12/18/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	2600MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

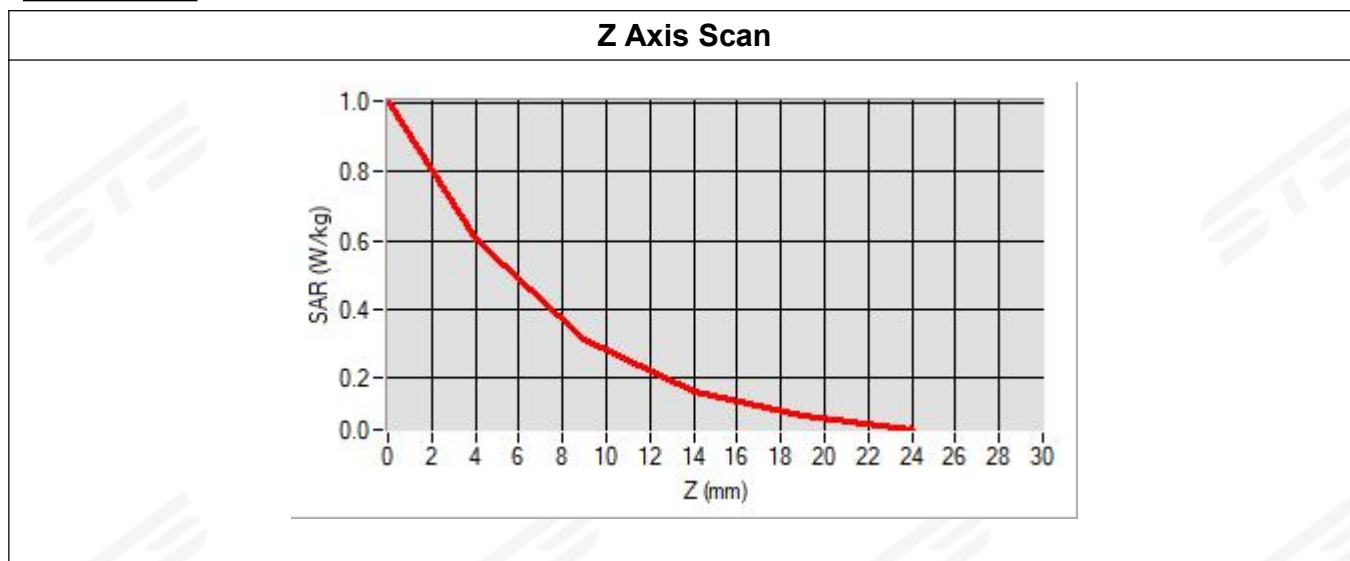
B. Permittivity

Frequency (MHz)	2600
Relative permittivity (real part)	38.81
Conductivity (S/m)	1.95

C. SAR Surface and Volume**Maximum location: X=1.00, Y=-2.00****SAR Peak: 1.00 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.259693
SAR 1g (W/Kg)	0.542933
Variation (%)	1.05
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	67.914438

E. Z Axis Scan

**System Performance Check (2600MHz)**

Type: Validation measurement

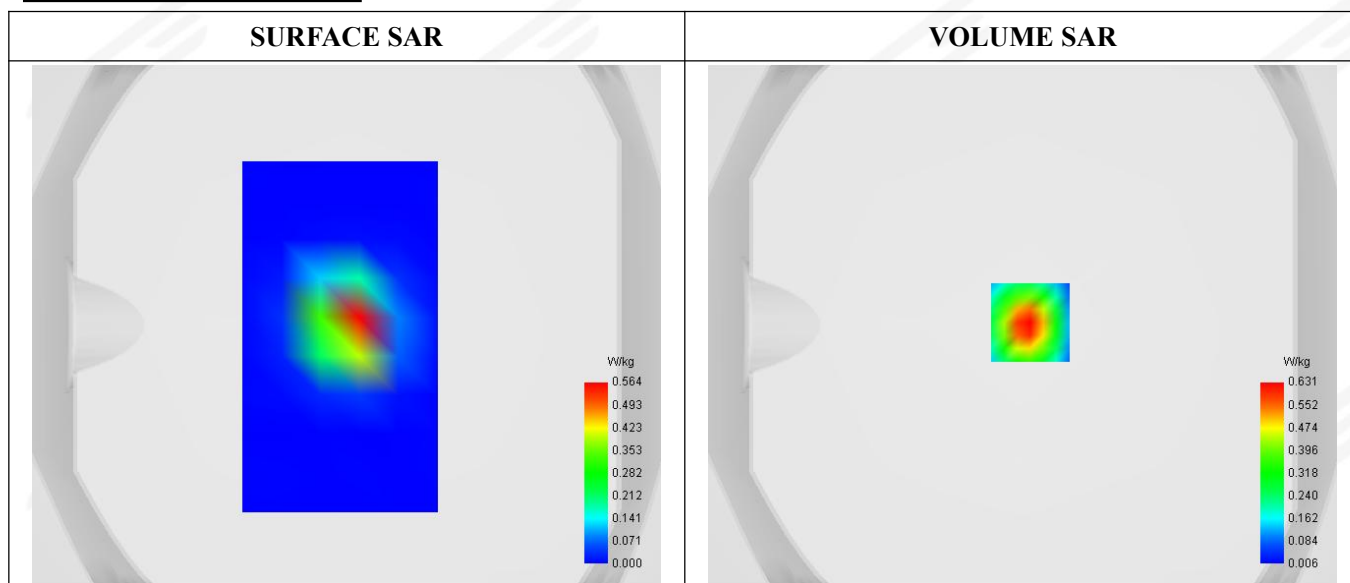
Date of measurement: 12/19/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	2600MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

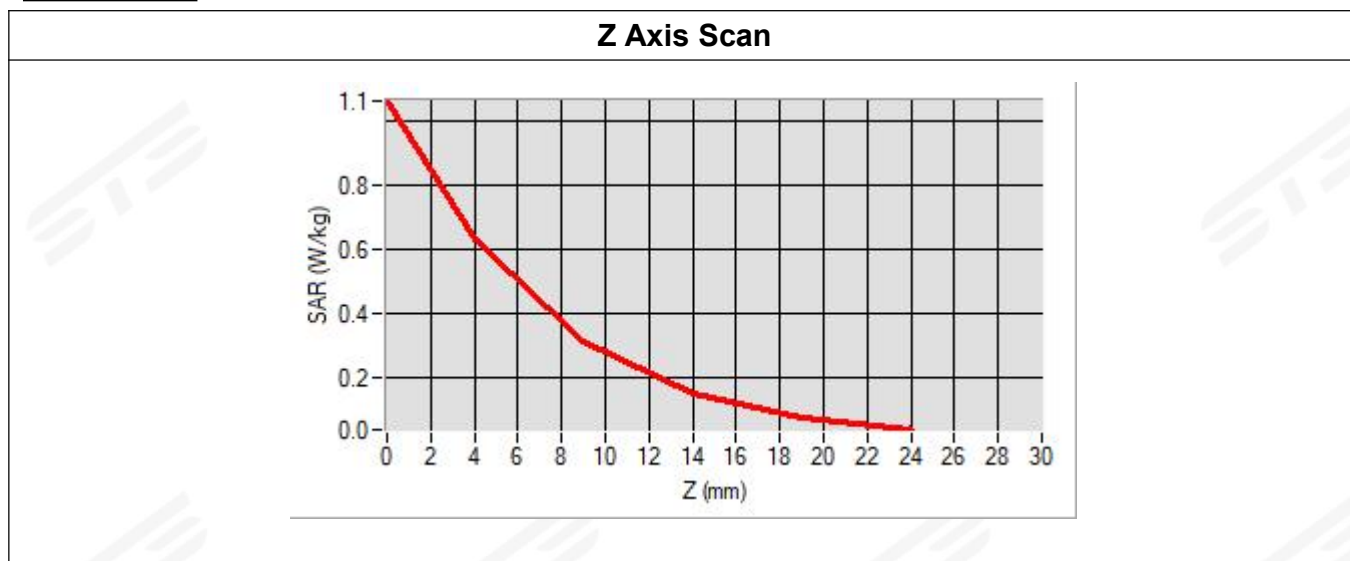
B. Permittivity

Frequency (MHz)	2600
Relative permittivity (real part)	38.29
Conductivity (S/m)	1.98

C. SAR Surface and Volume**Maximum location: X=3.00, Y=1.00****SAR Peak: 1.07 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.265127
SAR 1g (W/Kg)	0.578048
Variation (%)	0.37
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	63.668559

E. Z Axis Scan

**System Performance Check (3500MHz)**

Type: Validation measurement

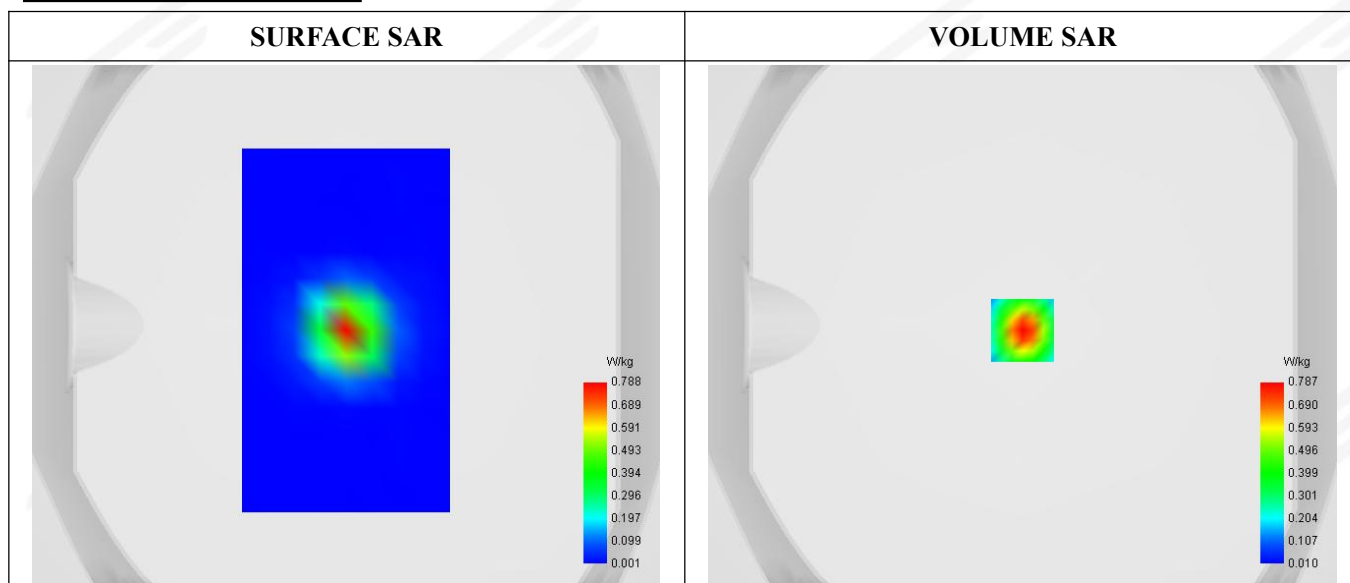
Date of measurement: 12/16/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPGO352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	3500MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	3500
Relative permittivity (real part)	38.60
Conductivity (S/m)	2.95

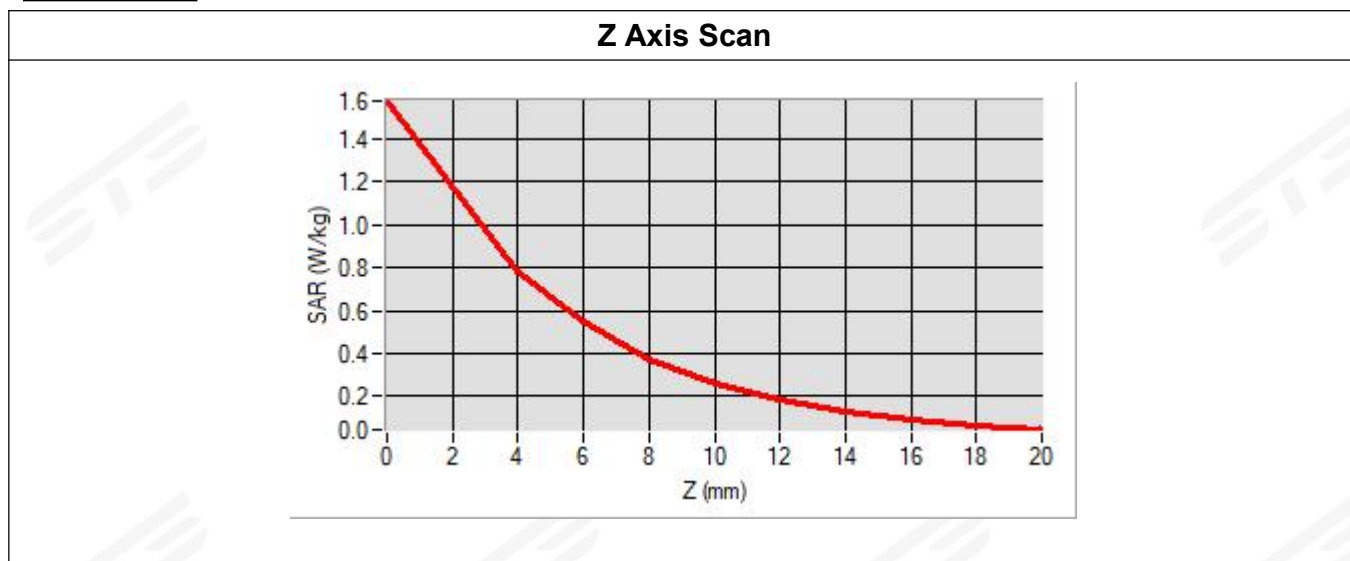
C. SAR Surface and Volume

Maximum location: X=0.00, Y=-2.00

SAR Peak: 1.58 W/kg

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.278110
SAR 1g (W/Kg)	0.702235
Variation (%)	-1.64
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.615063

E. Z Axis Scan

**System Performance Check (3500MHz)**

Type: Validation measurement

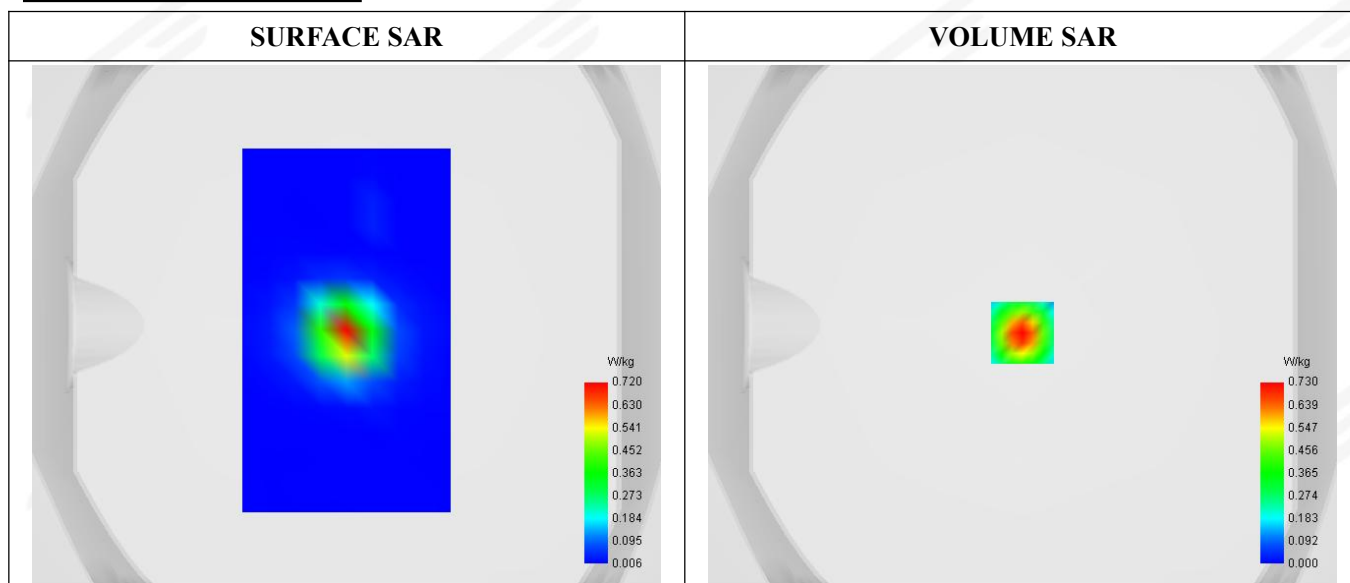
Date of measurement: 12/17/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	3500MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

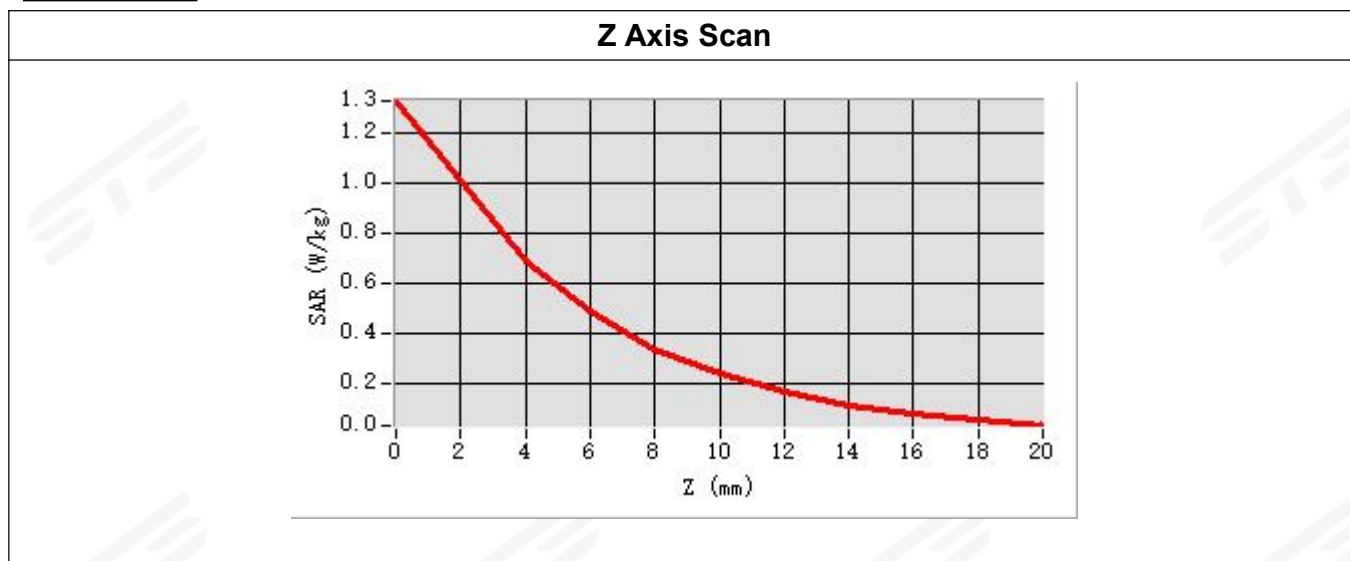
B. Permittivity

Frequency (MHz)	3500
Relative permittivity (real part)	38.95
Conductivity (S/m)	2.88

C. SAR Surface and Volume**Maximum location: X=0.00, Y=-2.00****SAR Peak: 1.34 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.254213
SAR 1g (W/Kg)	0.658298
Variation (%)	-1.38
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	75.634518

E. Z Axis Scan

**System Performance Check (5200MHz)**

Type: Validation measurement

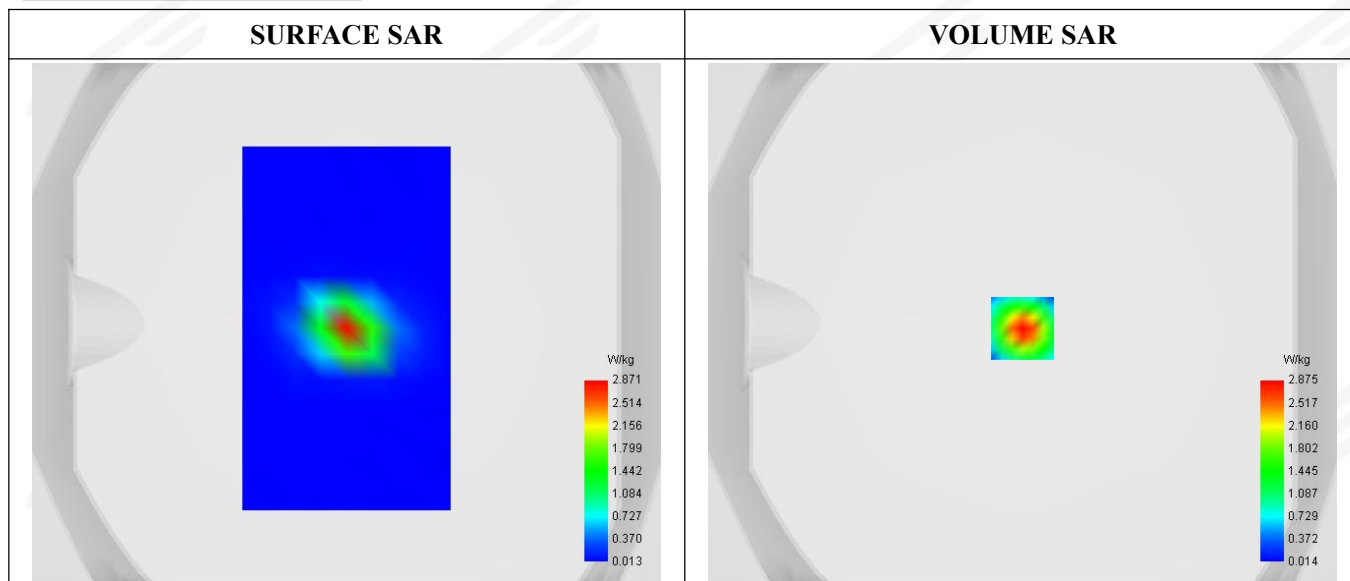
Date of measurement: 12/08/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	5200MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200
Relative permittivity (real part)	36.49
Conductivity (S/m)	4.74

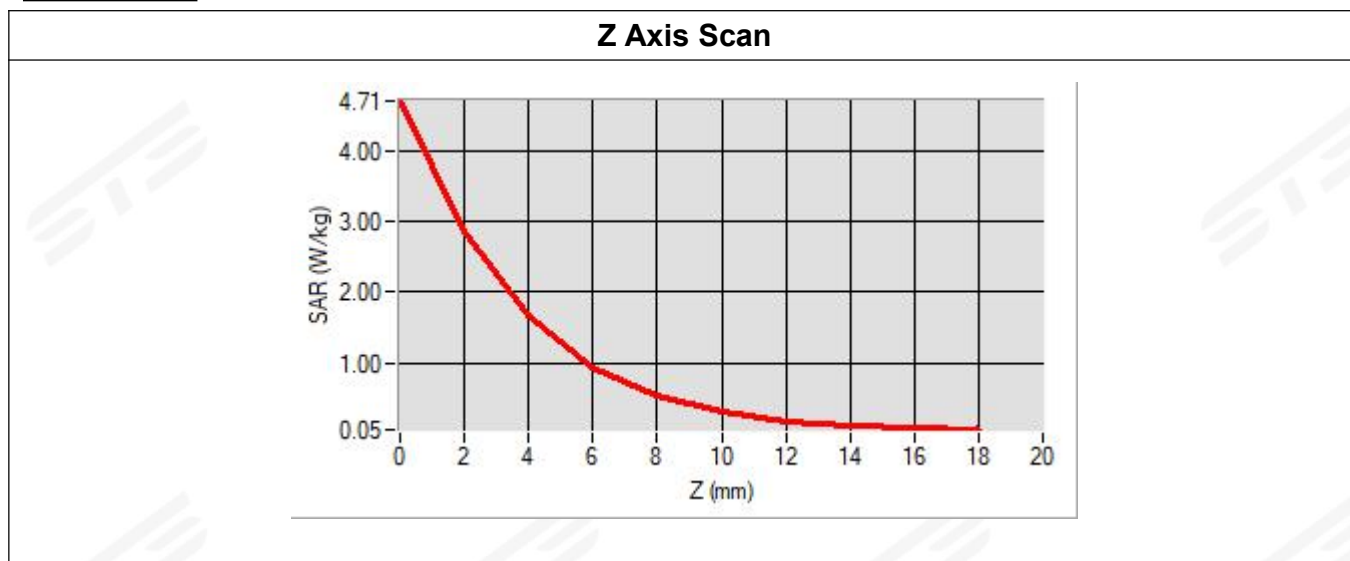
C. SAR Surface and Volume

Maximum location: X=0.00, Y=-2.00

SAR Peak: 4.71 W/kg

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.543924
SAR 1g (W/Kg)	1.570860
Variation (%)	2.47
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	50.084987

E. Z Axis Scan

**System Performance Check (5200MHz)**

Type: Validation measurement

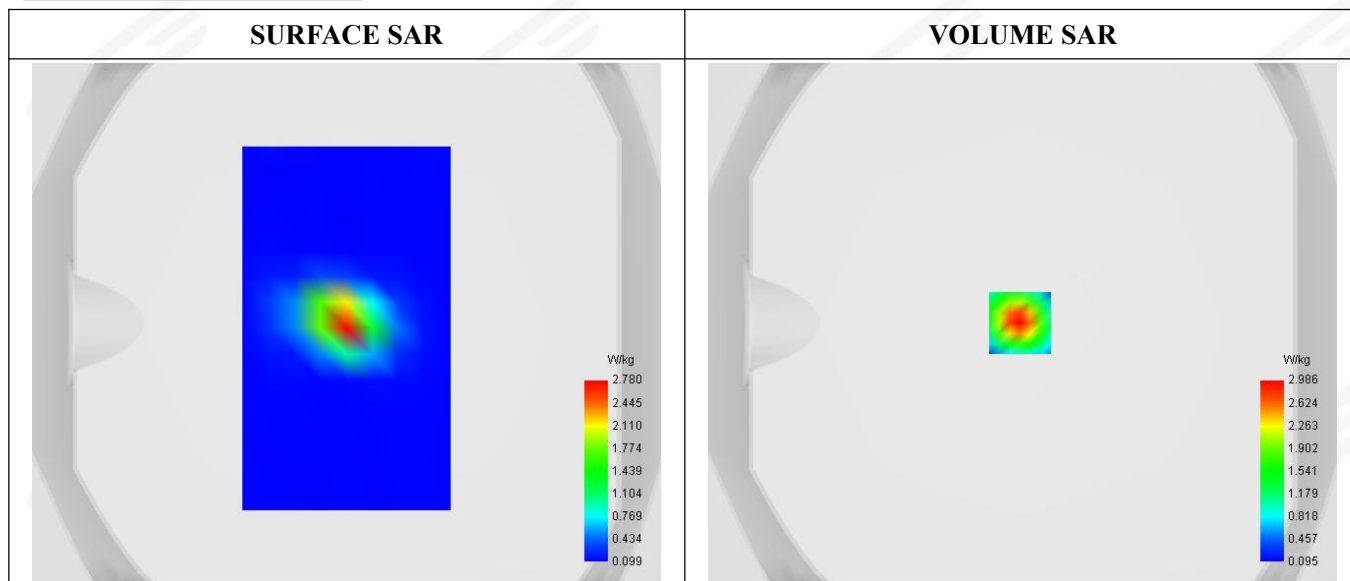
Date of measurement: 12/09/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	5200MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

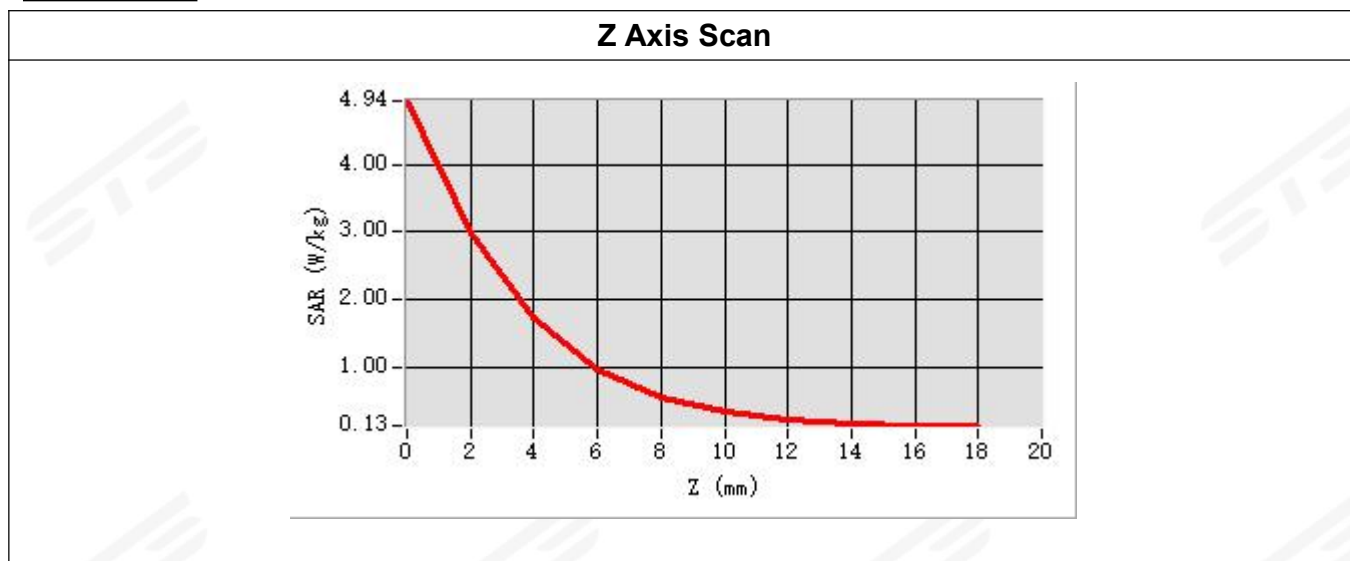
B. Permittivity

Frequency (MHz)	5200
Relative permittivity (real part)	35.68
Conductivity (S/m)	4.69

C. SAR Surface and Volume**Maximum location: X=-1.00, Y=0.00****SAR Peak: 4.94 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.599419
SAR 1g (W/Kg)	1.655209
Variation (%)	2.47
Horizontal validation criteria: minimum distance (mm)	28.844410
Vertical validation criteria: SAR ratio M2/M1 (%)	70.644239

E. Z Axis Scan

**System Performance Check (5300MHz)**

Type: Validation measurement

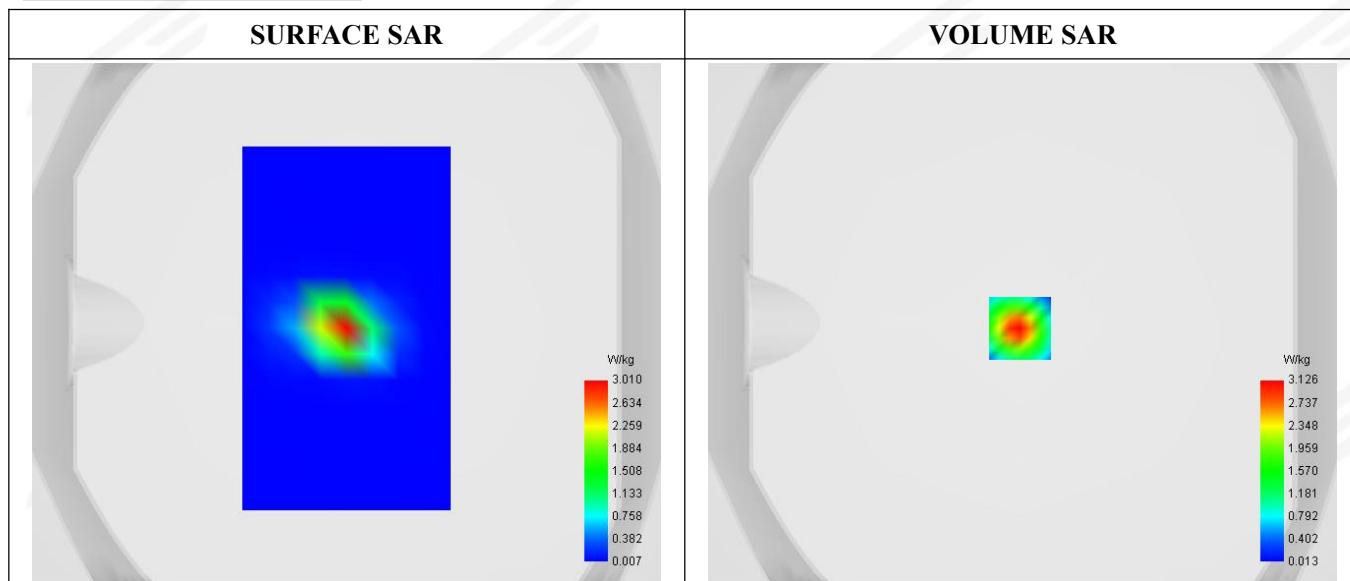
Date of measurement: 12/09/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	5300MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

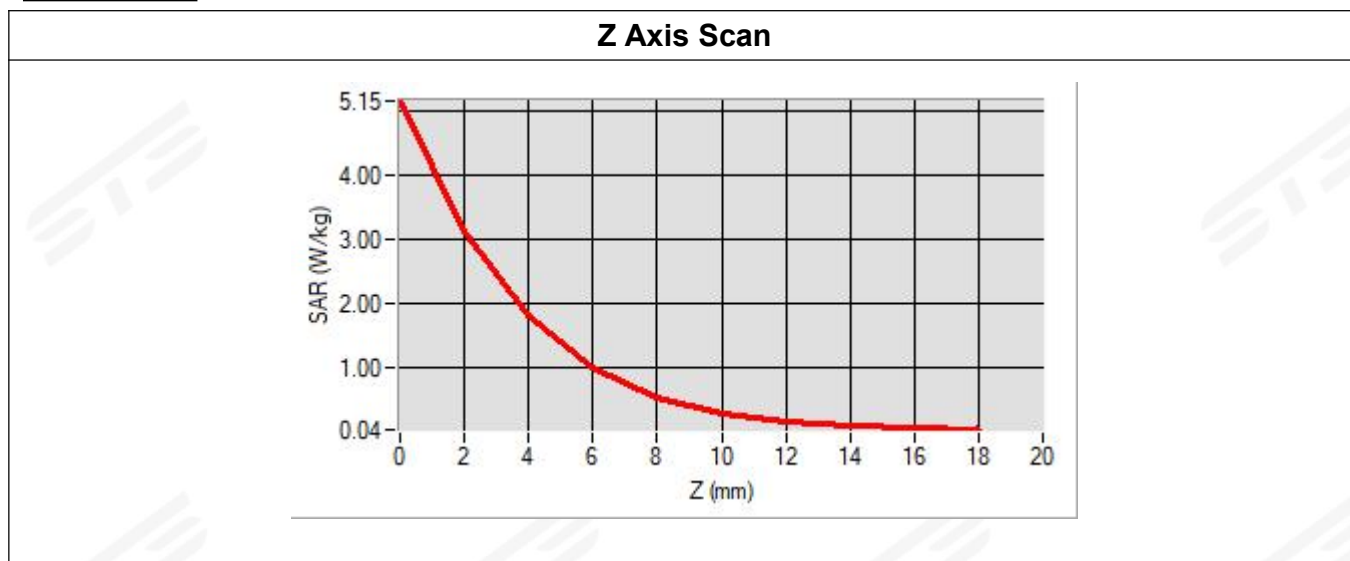
B. Permittivity

Frequency (MHz)	5300
Relative permittivity (real part)	35.42
Conductivity (S/m)	4.81

C. SAR Surface and Volume**Maximum location: X=-1.00, Y=-3.00****SAR Peak: 5.14 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.561286
SAR 1g (W/Kg)	1.707547
Variation (%)	-0.42
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	59.831500

E. Z Axis Scan

**System Performance Check (5600MHz)**

Type: Validation measurement

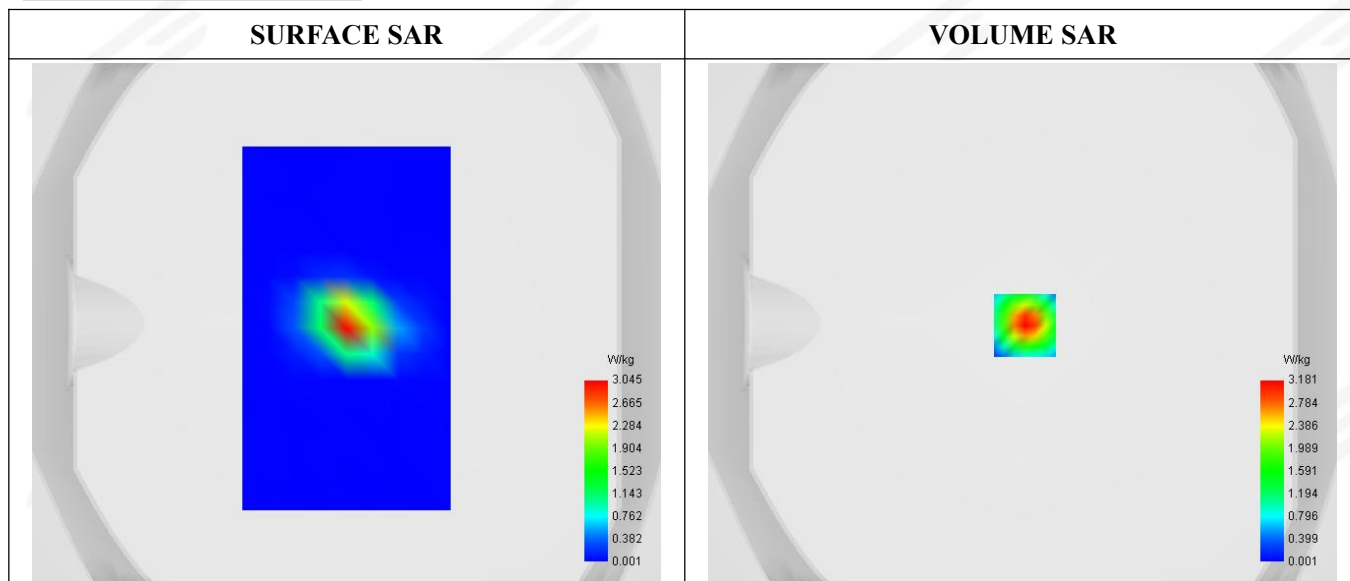
Date of measurement: 12/06/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	5600MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

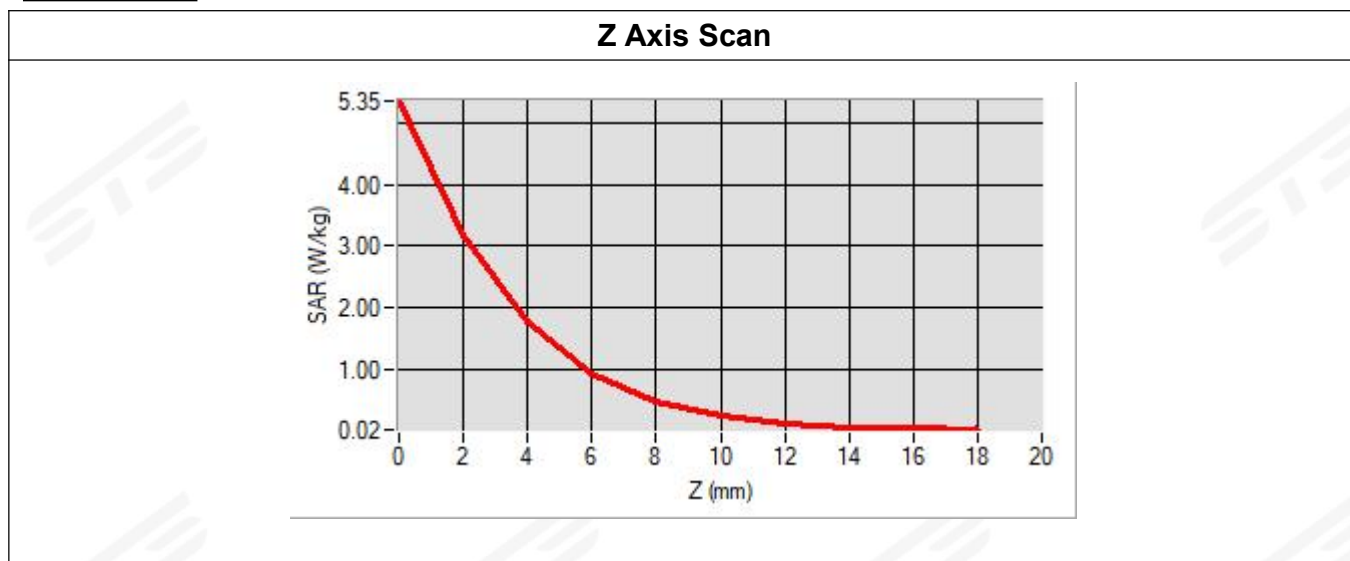
B. Permittivity

Frequency (MHz)	5600
Relative permittivity (real part)	35.95
Conductivity (S/m)	5.03

C. SAR Surface and Volume**Maximum location: X=1.00, Y=-1.00****SAR Peak: 5.28 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.576488
SAR 1g (W/Kg)	1.720350
Variation (%)	0.71
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	69.075851

E. Z Axis Scan

**System Performance Check (5800MHz)**

Type: Validation measurement

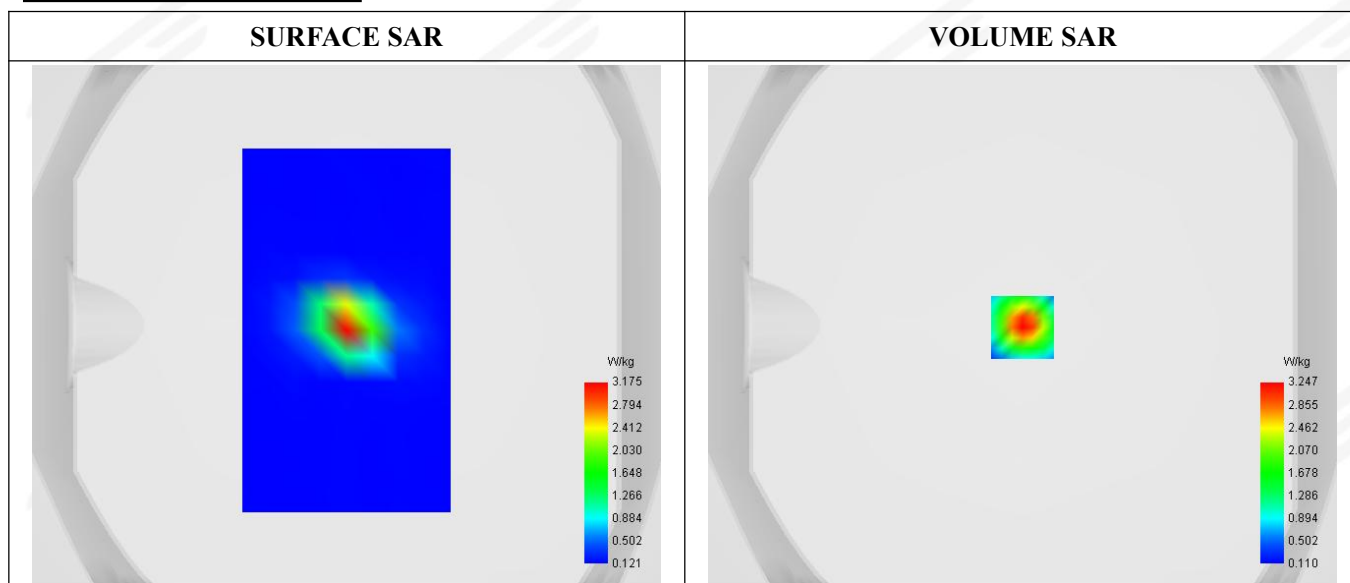
Date of measurement: 12/05/2025

A. Experimental conditions.

E-Field Probe	SN 08/21 EPG0352
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	5800MHz
Channels	Middle
Signal	CW(Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5800
Relative permittivity (real part)	35.18
Conductivity (S/m)	5.29

C. SAR Surface and Volume**Maximum location: X=0.00, Y=-1.00****SAR Peak: 5.54 W/kg**

**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.637346
SAR 1g (W/Kg)	1.781657
Variation (%)	0.82
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	39.529251

E. Z Axis Scan