

FCC AND ISCED CERTIFICATION TEST REPORT


Applicant:	McCoy Kreations LLC
Address:	1725 Courtney Landing Drive Suite 1306 Charlotte NC 28217
Manufacturer:	Guangzhou Xiaogongjiang Electronics Co., Ltd.
Address:	No. 6-3, Qingbuheng Road, Xinya Street, Huadu District, Guangzhou City (Airport Huadu)
Product Description:	NU B.A.E PILLO
Brand Name:	N/A
Tested Model:	MK1111
FCC ID:	2BTCW-MK1111
Report No.:	JCF251117021-002
Received Date:	Nov. 17, 2025
Tested Date:	Nov. 17, 2025 - Jan. 14, 2026
Issued Date:	Jan. 14, 2026
Test Standards:	FCC Rules and Regulations Part 15 Subpart C,
Test Procedure:	ANSI C63.10:2020, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01,
Test Result:	Pass

Prepared By:

Kennys Zhang/Engineer **Date:** Jan. 14, 2026

Reviewed By:

Roger Li/Engineer **Date:** Jan. 14, 2026

Approved By:

Talent Zhang/Engineer **Date:** Jan. 14, 2026

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
---	/	Jan. 14, 2026	Original Report	/

TABLE OF CONTENTS

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	7
4.4. Test environment conditions	8
4.5. The Worse Case Power Setting Parameter	8
4.6. Description of Available Antennas	8
5. Description of Test Setup	8
5.1. Accessory	8
5.2. Support Equipment	8
5.3. Test Setup	8
5.4. Setup Diagram for Tests	8
6. Measurement Uncertainty	9
7. Measuring Instrument and Software Used	9
8. On Time and Duty Cycle	11
8.1. Block diagram of test setup	11
8.2. Limits	11
8.3. Procedure	11
8.4. Results	11
8.5. Original test data	11
9. 6 dB DTS Bandwidth and 99 % Bandwidth	13
9.1. Block diagram of test setup	13
9.2. Limits	13
9.3. Test Procedure	13
9.4. Results	13
9.5. Original test data	14
10. Peak Conducted Output Power	16
10.1. Block diagram of test setup	16
10.2. Limits	16
10.3. Test Procedure	16
10.4. Results	16
10.5. Original test data	17
11. Power Spectral Density	18
11.1. Block diagram of test setup	18
11.2. Limits	18
11.3. Test Procedure	18
11.4. Results	18
11.5. Original test data	18
12. Conducted Bandedge and Spurious Emissions	20
12.1. Block diagram of test setup	20
12.2. Limits	20
12.3. Test Procedure	20
12.4. Results	20
12.5. Original test data	21
13. Radiated Emission	25
13.1. Block diagram of test setup	25
13.2. Limit	26
13.3. Test Procedure	27
13.4. Results	29

13.5. Original test data 29

14. AC Power Line Conducted Emissions 30

14.1. Block diagram of test setup 30

14.2. Limits 30

14.3. Test procedure 30

14.4. Test result 31

14.5. Original test data 31

15. Antenna Requirements 32

15.1. Limits 32

15.2. Result 32

APPENDIX A – Radiated Emission Below 1GHz Test Data 33

APPENDIX B – Radiated Emission Above 1GHz Test Data 35

APPENDIX C – AC Power Line Conducted Emission Test Data 45

1. Test Report Declare

Applicant:	McCoy Kreations LLC
Address:	1725 Courtney Landing Drive Suite 1306 Charlotte NC 28217
Manufacturer:	Guangzhou Xiaogongjiang Electronics Co., Ltd.
Address:	No. 6-3, Qingbuheng Road, Xinya Street, Huadu District, Guangzhou City (Airport Huadu)
Product Name:	NU B.A.E PILLO
Brand Name:	N/A
Model Name:	MK1111
Difference Description:	N/A

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6 dB Bandwidth and 99 % Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	NU B.A.E PILLO
Model Number:	MK1111
EUT Function Description:	Please refer to user manual of this device
Power Supply:	5V $\Rightarrow$ 2A, 9V $\Rightarrow$ 5A, 15V $\Rightarrow$ 3A
Sample No.:	251117021-01-01
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	SRD 2.4G
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK
Data Rate:	1Mbps
Antenna Type:	FPC Antenna, MAX. Gain: 4.11 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

4.3. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK	LCH:CH0	2402
	MCH:CH19	2440
	HCH:CH39	2480

4.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.5. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		FCC Assist 1.0.0.2		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	Default	Default	Default

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
N/A	N/A	N/A	N/A	N/A

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests


RF Connect Test:



Radiated Emission Test:



AC Power Line Conducted Emissions Test:



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☒	Incubator thermometer	GWS	EL-02JA	21107288	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul. 31, 2025	Jul. 30, 2026
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 01, 2025	Jul. 31, 2026
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5173B	MY62220145	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E3642A	MY40005294	Jul. 31, 2025	Jul. 30, 2026
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	

RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR26	101424	Feb. 24, 2025	Feb. 25, 2026
☒	Hybrid Antenna	Schwarzbeck	VULB9163	01361	May. 28, 2025	May. 27, 2026
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Aug. 31, 2025	Aug. 30, 2026
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Aug. 31, 2025	Aug. 30, 2026
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 12, 2025	Jan. 11, 2026
☒	Test path	/	Path2: WIFI-2.4G 1-3GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path7: ALL PASS 1-18GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path9: 3GHz High PASS 3-18GHz	/	Jul. 31, 2025	Jul. 30, 2026
☒	Test path	/	Path16: 30MHz-1GHz ALL PASS NO AMP	/	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Jul. 31, 2025	Jul. 30, 2026
☒	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	LISN	R&S	ENV216	102509	Aug. 01, 2025	Jul. 31, 2026
☒	EMI Receiver	R&S	ESR	102154	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Sep. 20, 2025	Sep. 21, 2026

8. On Time and Duty Cycle

8.1. Block diagram of test setup

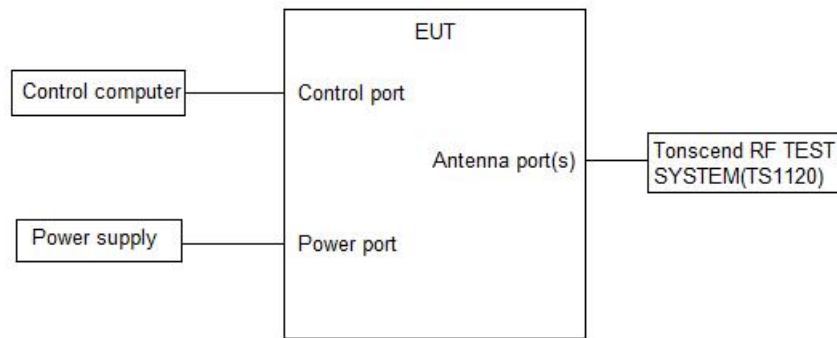

8.2. Limits

None; for reporting purposes only

8.3. Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method

8.4. Results

Test Mode	Ant.	Freq. (MHz)	ON Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
2.4G SRD	Ant1	2402	0.10	0.63	15.87	7.99
		2440	0.10	0.63	15.87	7.99
		2480	0.06	0.60	10.00	10.00

Note: Duty Cycle Correction Factor = $10\log(1/x)$.

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)

If that calculated VBW is not available on the analyzer, then the next higher value should be used.

8.5. Original test data





9. 6 dB DTS Bandwidth and 99 % Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limits

CFR 47FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100 kHz For 99 % Occupied Bandwidth :1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth : $\geq 3 \times$ RBW For 99 % Occupied Bandwidth : $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB/99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

Test Mode	Ant.	Freq. (MHz)	DTS BW (MHz)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
2.4G SRD	Ant1	2402	0.508	2401.684	2402.192	0.5	PASS
		2440	0.552	2439.672	2440.224	0.5	PASS
		2480	0.512	2479.684	2480.196	0.5	PASS


Test Mode	Antenna	Frequency (MHz)	OCB (MHz)	FL(MHz)	FH(MHz)	Limit(MHz)	Verdict
2.4G SRD	Ant1	2402	1.1620	2401.4622	2402.6242	---	---
		2440	1.0910	2439.4858	2440.5768	---	---
		2480	1.0882	2479.4854	2480.5736	---	---

9.5. Original test data

6 dB bandwidth:



99% bandwidth

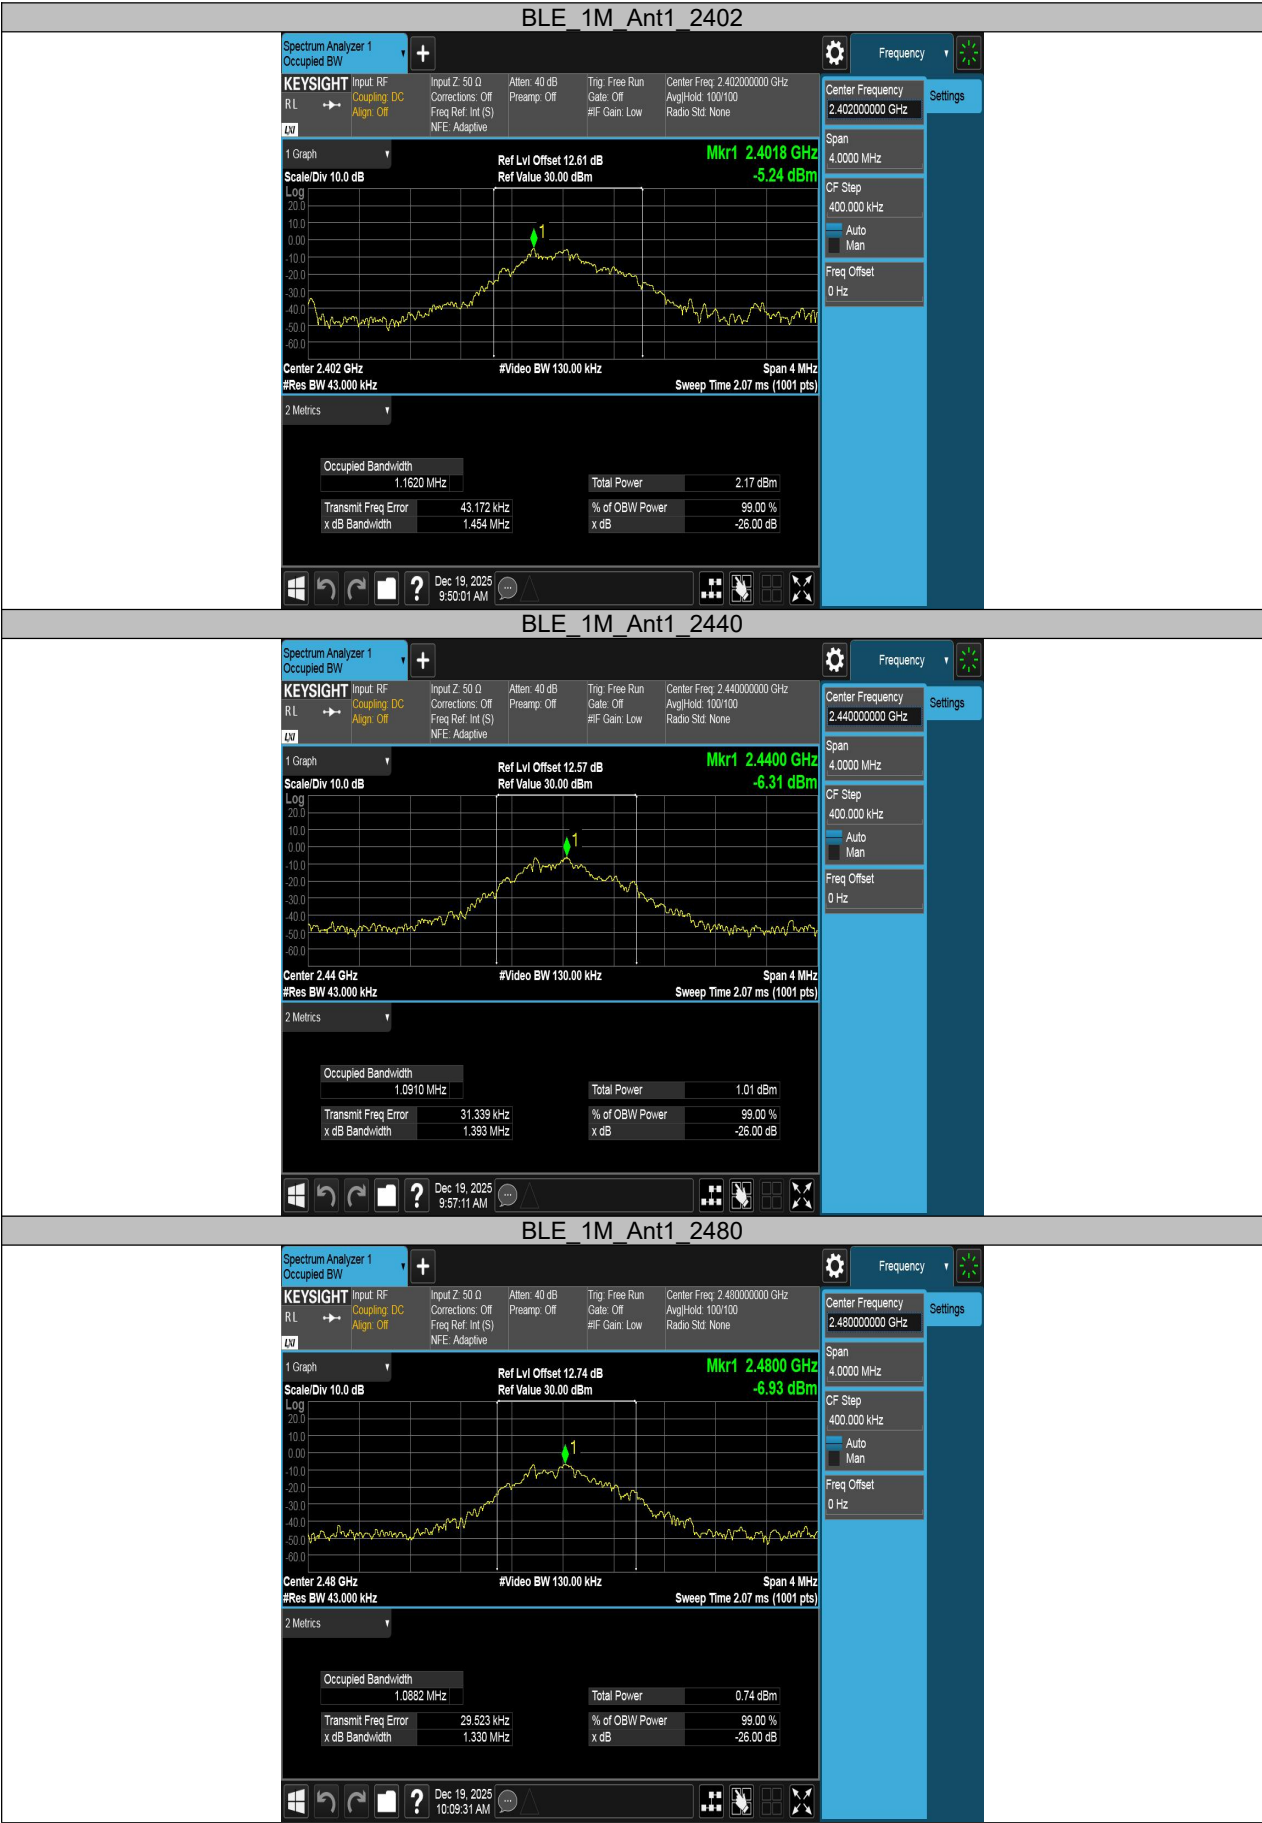

10. Peak Conducted Output Power

10.1. Block diagram of test setup

Same as section 8.1

10.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Output Power	1 watt or 30 dBm	2400 - 2483.5

10.3. Test Procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

99% Bandwidth set the spectrum analyzer as follows:

RBW:	30 kHz
VBW:	100 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

6 dB Bandwidth set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

Allow the trace to stabilize, measure the 6 dB and 99% bandwidth of signal.

10.4. Results

Test Mode	Ant.	Freq (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	Verdict
2.4G SRD	Ant1	2402	-1.96	≤30	PASS
		2440	-3.60	≤30	PASS
		2480	-3.85	≤30	PASS

10.5. Original test data

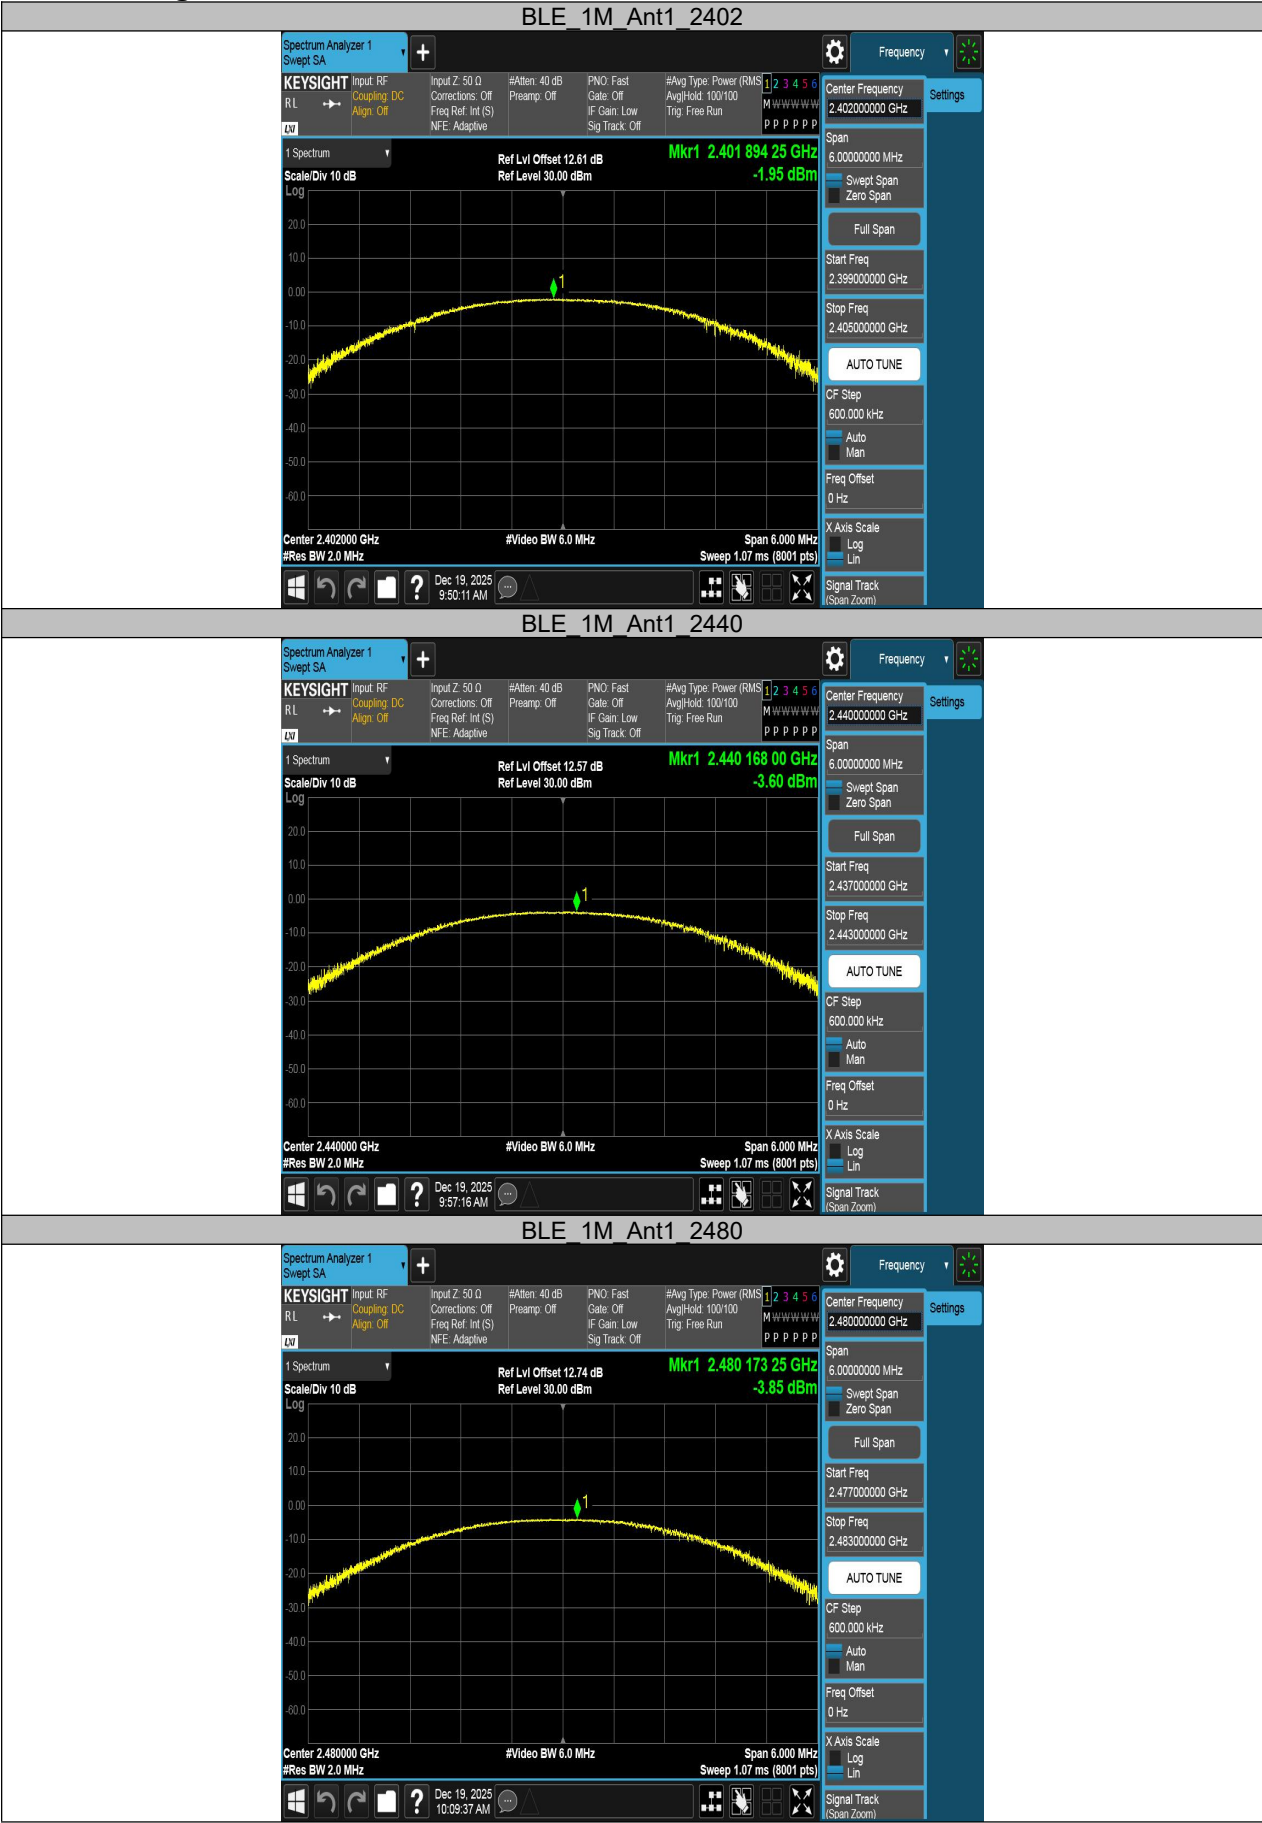

11. Power Spectral Density

11.1. Block diagram of test setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400 - 2483.5

11.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	3 kHz ≤ RBW ≤ 100 kHz
VBW	≥3 × RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
2.4G SRD	Ant1	2402	-21.45	≤8.00	PASS
		2440	-21.95	≤8.00	PASS
		2480	-23.33	≤8.00	PASS

11.5. Original test data





12. Conducted Bandedge and Spurious Emissions

12.1. Block diagram of test setup

Same as section 8.1

12.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Band edge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.3. Test Procedure

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Connect the UUT to the spectrum analyzer and use the following settings:

Use the peak marker function to determine the maximum peak power level to establish the reference level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span/RBW}$
Trace	Max hold
Sweep time	Auto couple

Use the peak marker function to determine the maximum amplitude level.

12.4. Results

Band edge

Test Mode	Ant.	Ch Name	Freq. (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
BLE_1M	Ant1	Low	2402	-2.14	-33.91	≤ -22.14	PASS
		High	2480	-4.43	-48.61	≤ -24.43	PASS

Spurious Emissions

Test Mode	Ant.	Freq. (MHz)	Freq Range (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
BLE_1M	Ant1	2402	Reference	-2.19	-2.19	---	PASS
			30~1000	-2.19	-61.53	≤ -22.19	PASS
			1000~26500	-2.19	-41.84	≤ -22.19	PASS
		2440	Reference	-4.26	-4.26	---	PASS
			30~1000	-4.26	-63.03	≤ -24.26	PASS

			1000~26500	-4.26	-42.22	≤-24.26	PASS
			Reference	-4.29	-4.29	---	PASS
		2480	30~1000	-4.29	-63.13	≤-24.29	PASS
			1000~26500	-4.29	-40.92	≤-24.29	PASS

Note: Offset=cable loss

12.5. Original test data

Band edge:



Spurious Emissions:

