

承認書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

Bapai Electric (Shenzhen) Co., Ltd.

客 戶 料 號:
CUST P/N:

Y.XQ.DIP43056U404

德欣达 料 號:
P/N:

DXD20260701

產 品 型 號:
DESC:

43*0.2 nanocrystalline magnetic sheet, line length 43MM, 0.08*20*2*10TS, 6.4UH

日 期:
DATE:

2026/7/1

版 本:
Version:

A.0


擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Rao Zhipeng	Liao Zhilin	Xie Liang	

Dongguan De Xinda Electronic Technology Co., Ltd.
Dongguan Address: 5th Floor, No. 191 Tai'an Road, Tingzhen
Town, Zhangmu Town, Dongguan City

SPECIFICATION

产品型号; DESC	43*0.2 nanocrystalline magnetic sheet, line length 43MM, 0.08*20*2*10TS, 6.4UH	Rev:A. 0	客户 CUST:	Bapai
			客户料号 CUST P/N	Y.XQ.DIP43056U404

一、尺寸 DIMENSION:(mm)

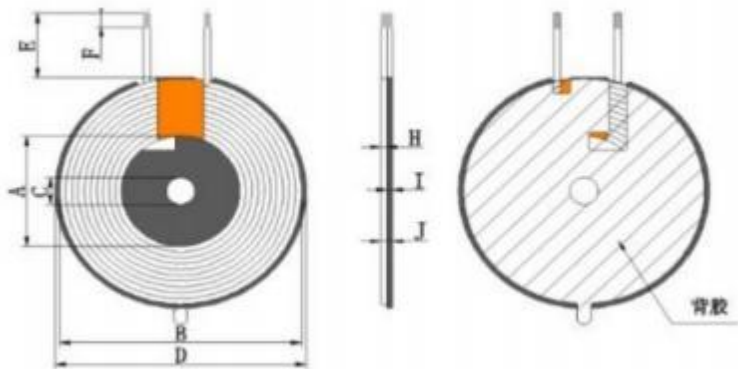

A	20.5±0.5 mm
B	39±1 mm
C	±0.5 mm
D	43±0.5 mm
E	43±2 mm
F	2±1 mm
I	0.2±0.1 mm
H	0.5mm Max
J	0.8mm Max

- Note:
1. Cross-line exit;
 2. Magnetic sheet size: 43.5 ± 0.5mm, thickness: 0.2 ± 0.1mm;
 3. The magnetic sheet does not require back adhesive;
 4. Coil binding: 3mm brown tape, wrap 1.5TS;
 5. J size does not include the thickness of the release paper on the back of the magnetic sheet.

二、原理图 SCHEMATIC DIAGRAM:

SPECIFICATION

三、绕线参数 Winding Specificatio

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
L1	S	F	Hot air line: 0.08 * 20 * 2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE

HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4uH ±10% single coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%	100KHz/1.0V	LCZ METER 1062B
3	Q value	S-F	30MIN	100KHz/1.0V	LCZ METER 1062B
4	DCR	S-F	≤120m Ω	100KHz/1.0V	LCZ METER 1062B

Draft / Date	Review / Date
2026-7-1	