Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.:	CQASZ20251102711E-01
Applicant:	Mingzhichuan (Shenzhen) Technology Co., LTD
Address of Applicant:	Room 403, Jiarun Industrial Zone, Yousongbai, Longhua District, Shenzhen City, Guangdong Province
Equipment Under Test (EUT):	
Product:	Wireless Visual Earpick
Model No.:	T1, T2pro, z8, z8pro, H1, H7, H9, z5, z5pro, z9
Test Model No.:	T2
Brand Name:	N/A
FCC ID:	2BTDN-T1
Standards:	47 CFR Part 15, Subpart C
	KDB558074 D01 15.247 Meas Guidance v05r02
	ANSI C63.10:2020
Date of Receipt:	2025-11-25
Date of Test:	2025-11-25 to 2025-12-22
Date of Issue:	2025-12-29
Test Result :	**PASS***

***In the configuration tested, the EUT complied with the standards specified above**

Tested By: Lewis Zhou

(Lewis Zhou)

Reviewed By: Timo Lei

(Timo Lei)

Approved By:

(Jack Ai)

.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20251102711E-01	Rev.01	Initial report	2025-12-29

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2020	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2020	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2020	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2020	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2020	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2020	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

Page

1 VERSION 2
2 TEST SUMMARY 3
3 CONTENTS 4
4 GENERAL INFORMATION 6
4.1 CLIENT INFORMATION 6
4.2 GENERAL DESCRIPTION OF EUT 6
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD 6
4.4 TEST ENVIRONMENT AND MODE 8
4.5 DESCRIPTION OF SUPPORT UNITS 11
4.6 TEST LOCATION 11
4.7 TEST FACILITY 11
4.8 TEST CONFIGURATION 12
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY 13
4.10 DEVIATION FROM STANDARDS 13
4.11 ABNORMALITIES FROM STANDARD CONDITIONS 13
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER 13
4.13 EQUIPMENT LIST 14
5 TEST RESULTS AND MEASUREMENT DATA 15
5.1 ANTENNA REQUIREMENT 15
5.2 CONDUCTED EMISSIONS 16
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER 20
Test Result 21
Note: Duty cycle correction factor details please see section 4.4. 21
When Duty cycle >98%, D.C.F is not required. 21
Test Graphs 22
5.4 99% OCCUPIED BANDWIDTH 26
Test Result 27
Test Graphs 28
5.5 6DB OCCUPIED BANDWIDTH 32
Test Result 33
Test Graphs 34
5.6 POWER SPECTRAL DENSITY 38
Test Result 39
Test Graphs 40
5.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS 44
Test Result 45
5.7.1 Test Graphs 46
5.8 RF CONDUCTED SPURIOUS EMISSIONS 49
Test Result 50
Test Graphs 51
5.9 RADIATED SPURIOUS EMISSIONS 62
5.9.1 Radiated emission below 1GHz 65
5.9.2 Transmitter emission above 1GHz 67
5.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY 73
6 PHOTOGRAPHS - EUT TEST SETUP 78
6.1 RADIATED SPURIOUS EMISSION 78
6.2 CONDUCTED EMISSION 79
6.3 RF CONDUCTED MEASUREMENT 80

7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS 81

4 General Information

4.1 Client Information

Applicant:	Mingzhichuan (Shenzhen) Technology Co., LTD
Address of Applicant:	Room 403, Jiarun Industrial Zone, Yousongbai, Longhua District, Shenzhen City, Guangdong Province
Manufacturer:	Mingzhichuan (Shenzhen) Technology Co., LTD
Address of Manufacturer:	Room 403, Jiarun Industrial Zone, Yousongbai, Longhua District, Shenzhen City, Guangdong Province
Factory:	Mingzhichuan (Shenzhen) Technology Co., LTD
Address of Factory:	Room 403, Jiarun Industrial Zone, Yousongbai, Longhua District, Shenzhen City, Guangdong Province

4.2 General Description of EUT

Product Name:	Wireless Visual Earpick
Model No.:	T1, T2pro, z8, z8pro, H1, H7, H9, z5, z5pro, z9
Test Model No.:	T2
Trade Mark:	N/A
Software Version:	V1.0
Hardware Version:	V1.0
Power Supply:	Li-ion battery: DC 3.7V 130mAh, Charge by DC 5V for adapter
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	WiFiTestTool_V1.1.7.sfx
Antenna Type:	SMD antenna
Antenna Gain:	0.89dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Note:
Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class13
Run Software:	

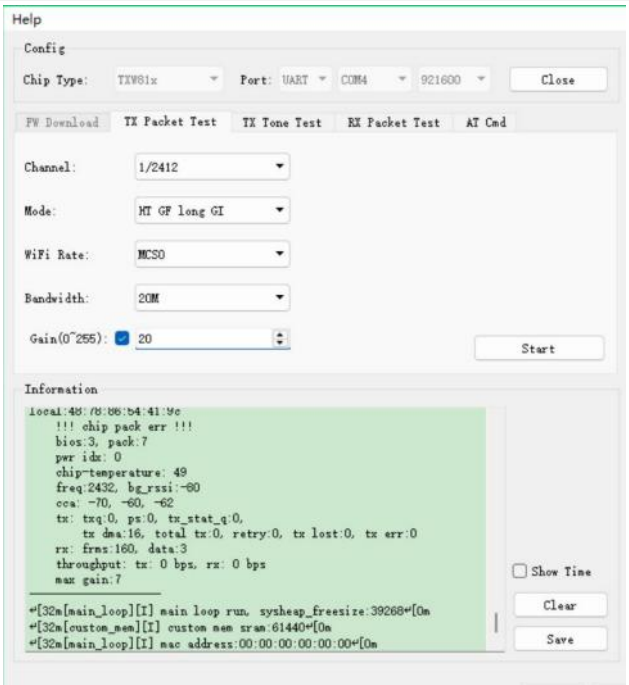

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	8.36	8.40	99.52	8.36
IEEE802.11g	1.38	1.42	97.18	1.38
IEEE802.11n (HT20)	1.29	1.33	96.99	1.29

Remark:

1) Duty cycle= On Time/ Period;

2) Duty Cycle factor = 10 * log(1/ Duty cycle);

Test Graph_IEEE802.11b Duty Cycle:

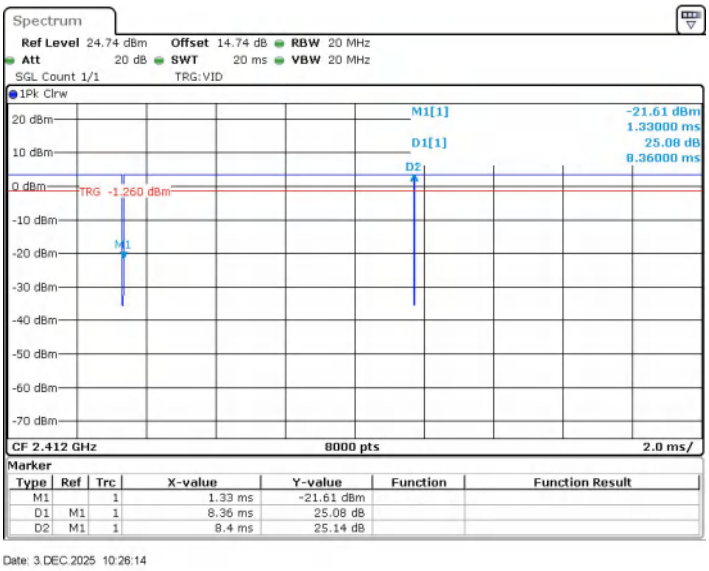

Test Graph_IEEE802.11g Duty Cycle:

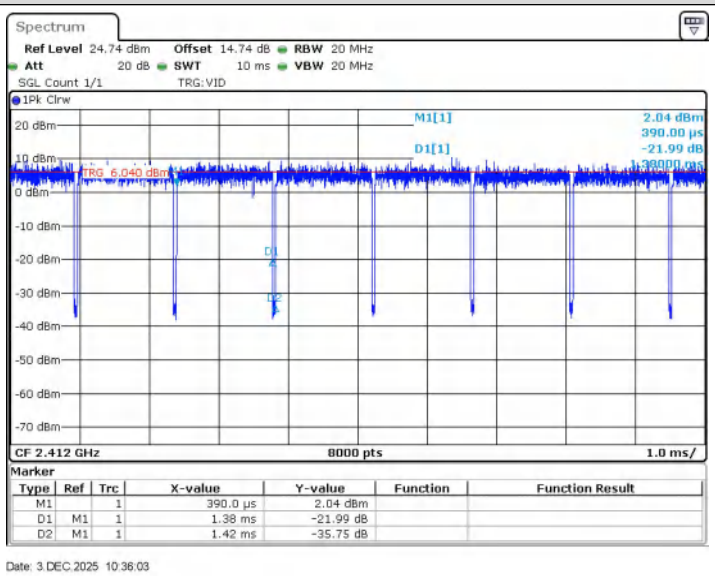

Test Graph_IEEE802.11 n (HT20) Duty Cycle:

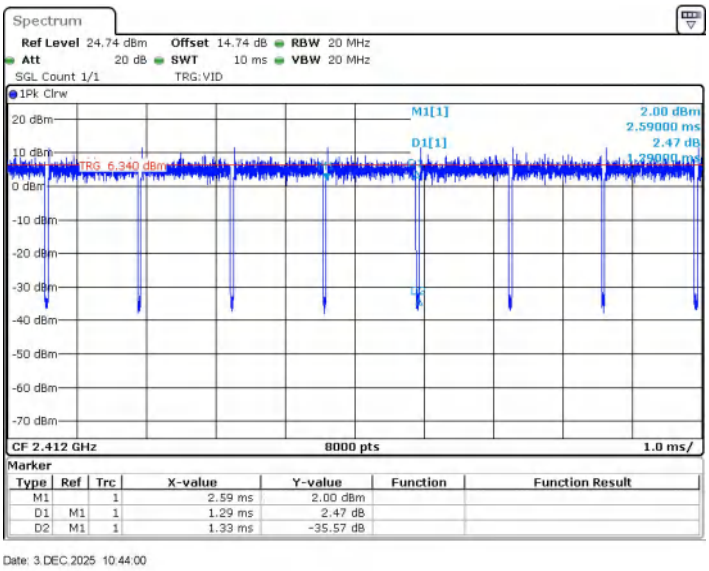

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	Mi	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4742.01)**
Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**
Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance

letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

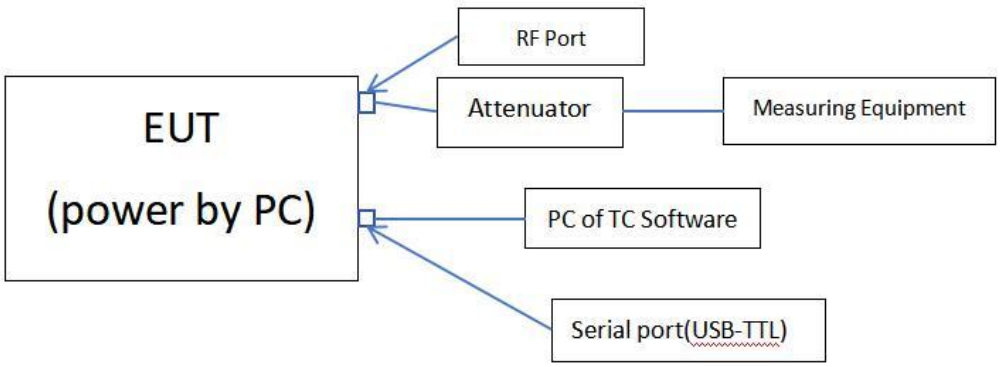

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is SMD antenna. The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment This is either permanently attachment or a unique coupling that satisfies the requirement.	

5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207
Test Method:	ANSI C63.10: 2020
Test Frequency Range:	150kHz to 30MHz
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Procedure:

1) The mains terminal disturbance voltage test was conducted in a shielded room.
2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.

Test Setup:

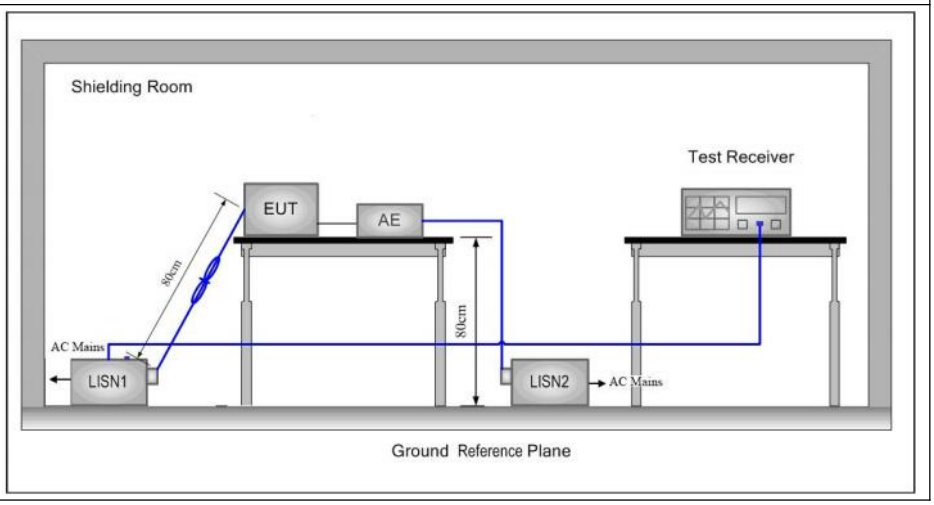

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

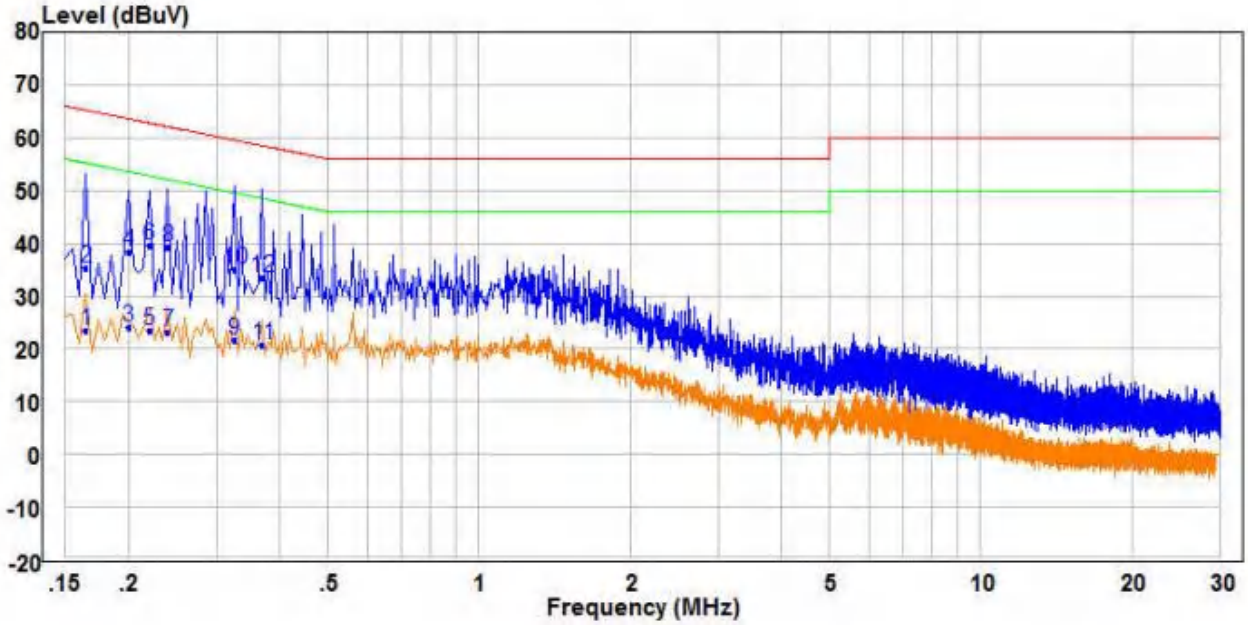

		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.165	14.12	9.49	23.61	55.21	-31.60	Average	Line
2		0.165	25.98	9.49	35.47	65.21	-29.74	QP	Line
3		0.200	14.45	9.49	23.94	53.61	-29.67	Average	Line
4		0.200	28.74	9.49	38.23	63.61	-25.38	QP	Line
5		0.220	14.04	9.49	23.53	52.82	-29.29	Average	Line
6		0.220	30.13	9.49	39.62	62.82	-23.20	QP	Line
7		0.240	13.67	9.49	23.16	52.10	-28.94	Average	Line
8	PP	0.240	29.70	9.49	39.19	62.10	-22.91	QP	Line
9		0.325	12.07	9.49	21.56	49.58	-28.02	Average	Line
10		0.325	25.45	9.49	34.94	59.58	-24.64	QP	Line
11	AV	0.370	11.21	9.50	20.71	48.50	-27.79	Average	Line
12		0.370	23.99	9.50	33.49	58.50	-25.01	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

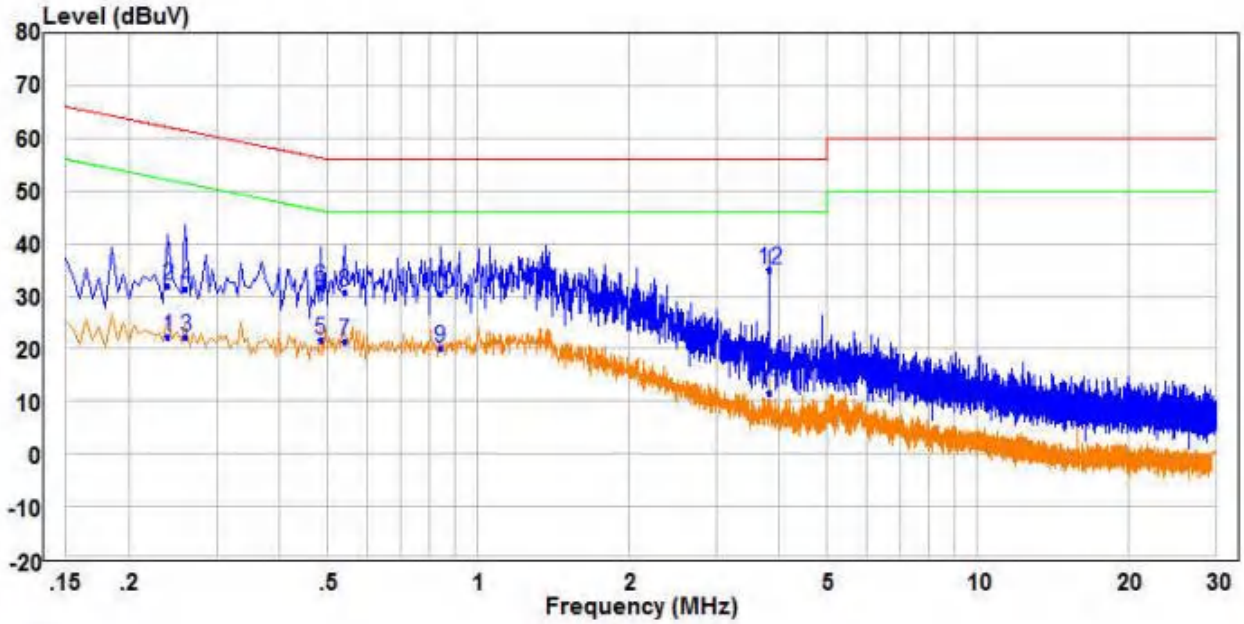

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.240	12.70	9.55	22.25	52.10	-29.85	Average	Neutral
2	0.240	22.55	9.55	32.10	62.10	-30.00	QP	Neutral
3	0.260	12.68	9.53	22.21	51.43	-29.22	Average	Neutral
4	0.260	21.85	9.53	31.38	61.43	-30.05	QP	Neutral
5 AV	0.485	11.97	9.69	21.66	46.25	-24.59	Average	Neutral
6	0.485	21.86	9.69	31.55	56.25	-24.70	QP	Neutral
7	0.540	11.58	9.74	21.32	46.00	-24.68	Average	Neutral
8	0.540	21.07	9.74	30.81	56.00	-25.19	QP	Neutral
9	0.840	10.31	9.81	20.12	46.00	-25.88	Average	Neutral
10	0.840	20.74	9.81	30.55	56.00	-25.45	QP	Neutral
11	3.840	1.91	9.78	11.69	46.00	-34.31	Average	Neutral
12 PP	3.840	25.17	9.78	34.95	56.00	-21.05	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2020
Test Setup:	*Setup for Power meter measurement method*  *Setup for Spectrum analyser measurement method* 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

Test Result

Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	1.05	≤30.00	PASS
	2437	2.43	≤30.00	PASS
	2462	3.24	≤30.00	PASS
11G	2412	-0.49	≤30.00	PASS
	2437	0.63	≤30.00	PASS
	2462	1.51	≤30.00	PASS
11N20SISO	2412	-0.84	≤30.00	PASS
	2437	0.43	≤30.00	PASS
	2462	1.27	≤30.00	PASS

Note: Duty cycle correction factor details please see section 4.4.

When Duty cycle >98%, D.C.F is not required.

Test Graphs

11B_Ant1_2412

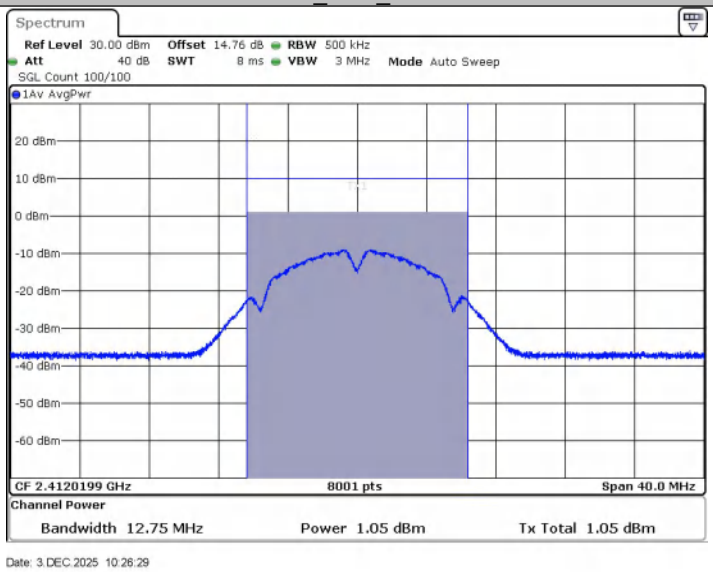

11B_Ant1_2437

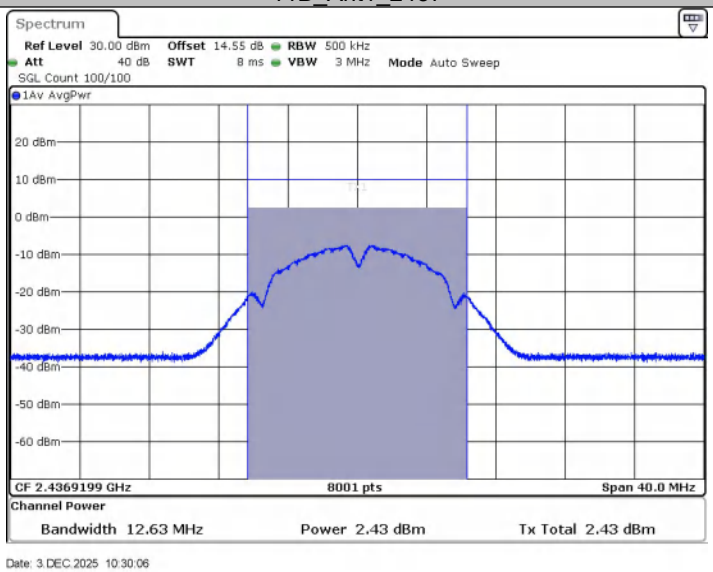

11B_Ant1_2462

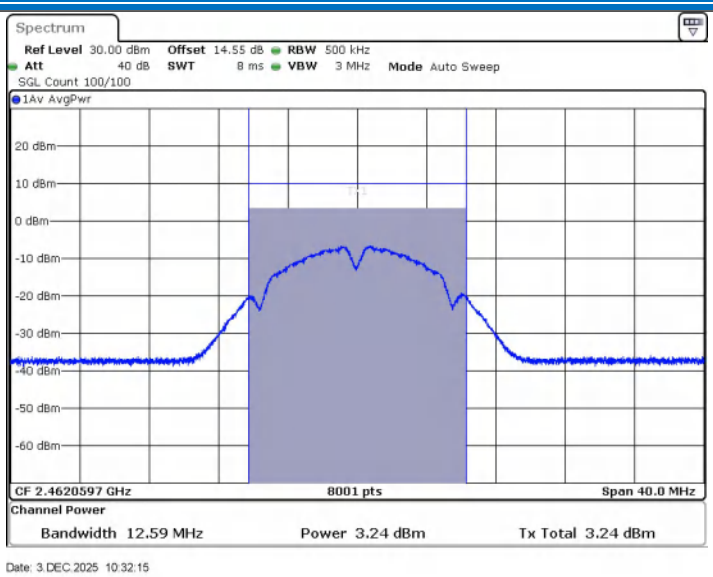

11G_Ant1_2412

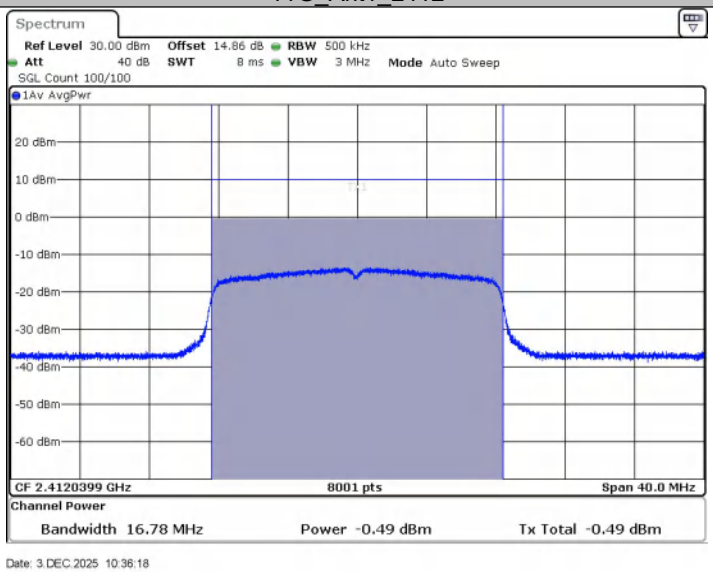

11G_Ant1_2437

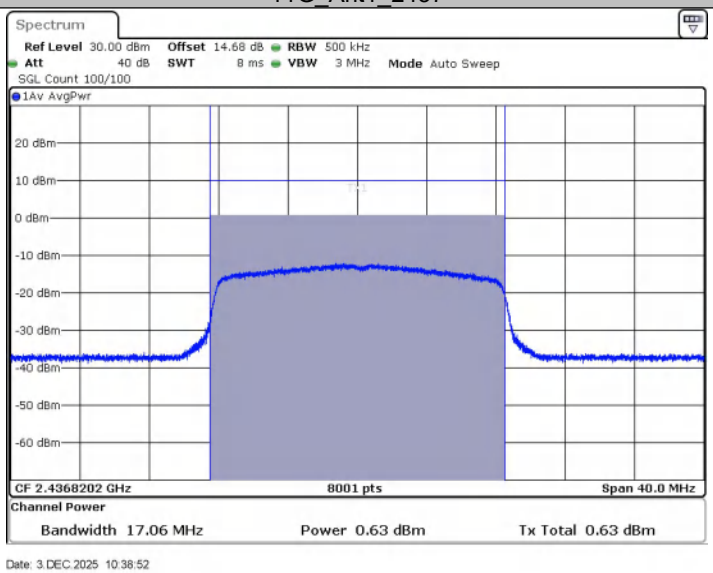

11G_Ant1_2462

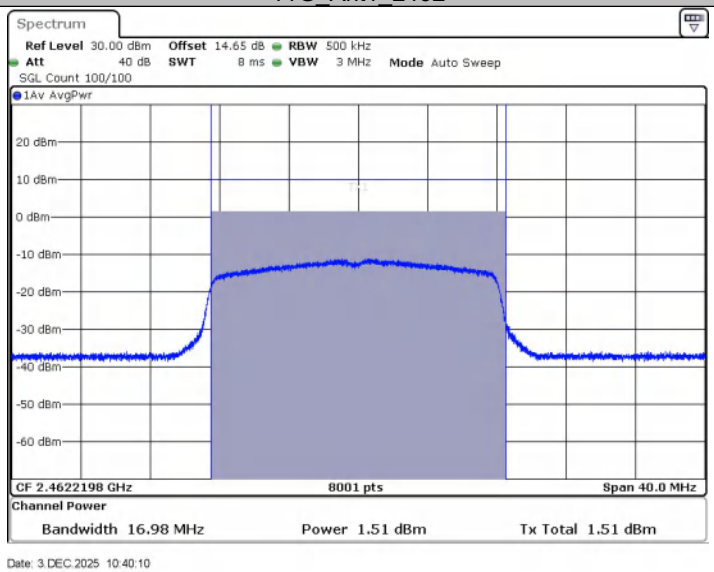

11N20SISO_Ant1_2412

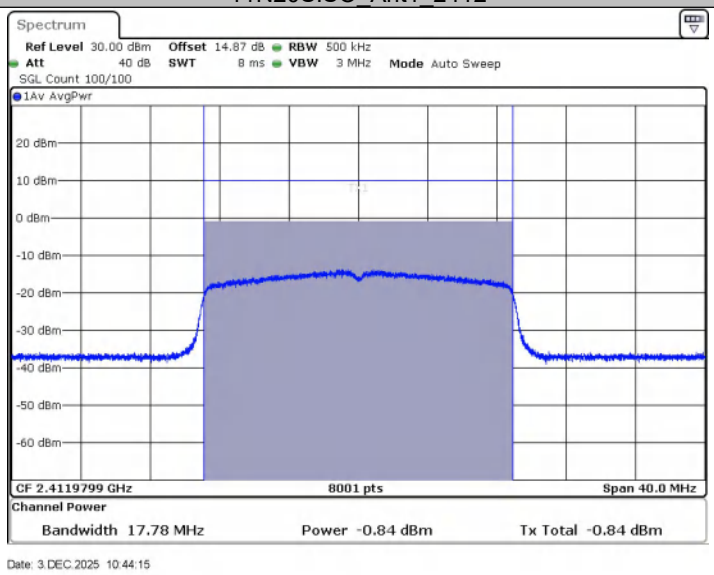

11N20SISO_Ant1_2437

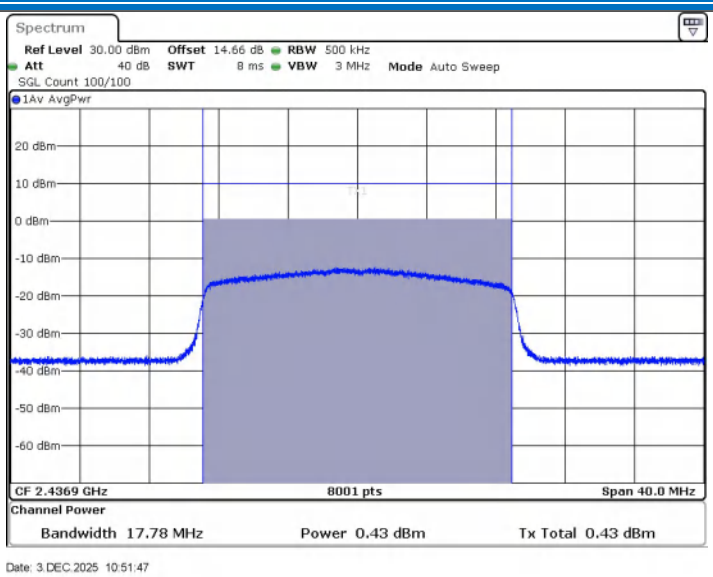

11N20SISO_Ant1_2462

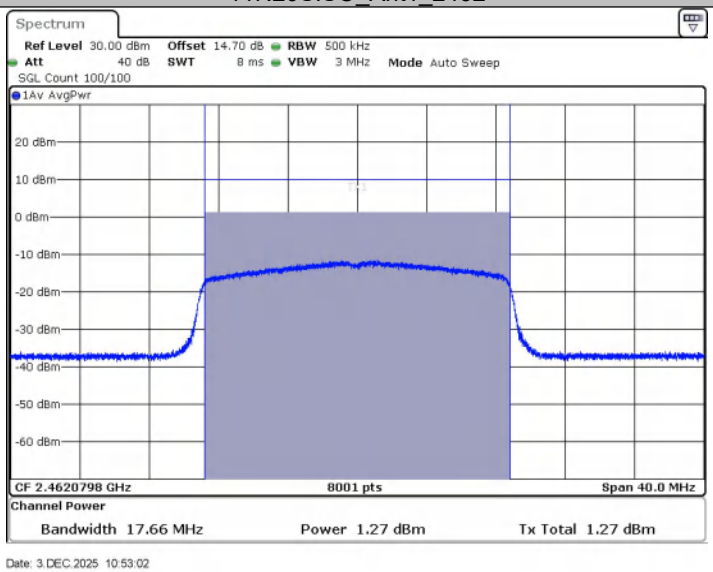

5.4 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Test Result

TestMode	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	2412	12.747	2405.6464	2418.3936
	2437	12.627	2430.6064	2443.2338
	2462	12.587	2455.7662	2468.3536
11G	2412	16.783	2403.6484	2420.4316
	2437	17.063	2428.2887	2445.3516
	2462	16.983	2453.7283	2470.7113
11N20SISO	2412	17.782	2403.0889	2420.8711
	2437	17.782	2428.0090	2445.7912
	2462	17.662	2453.2488	2470.9111

Test Graphs

11B_Ant1_2412

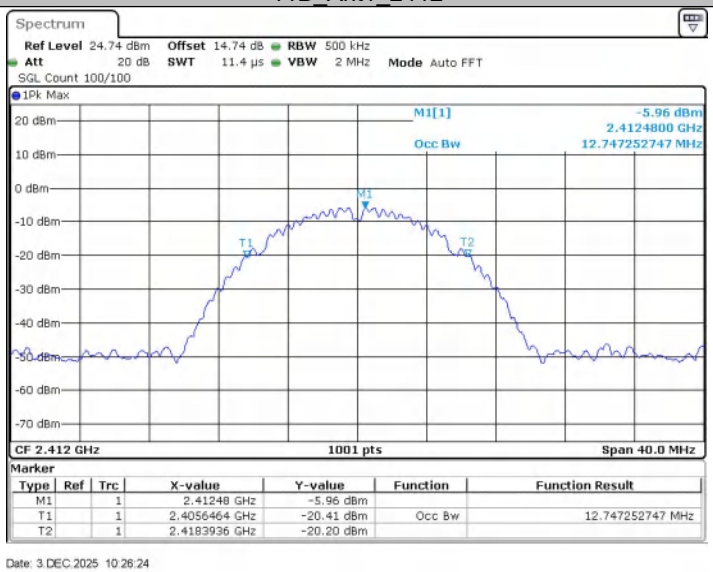

11B_Ant1_2437

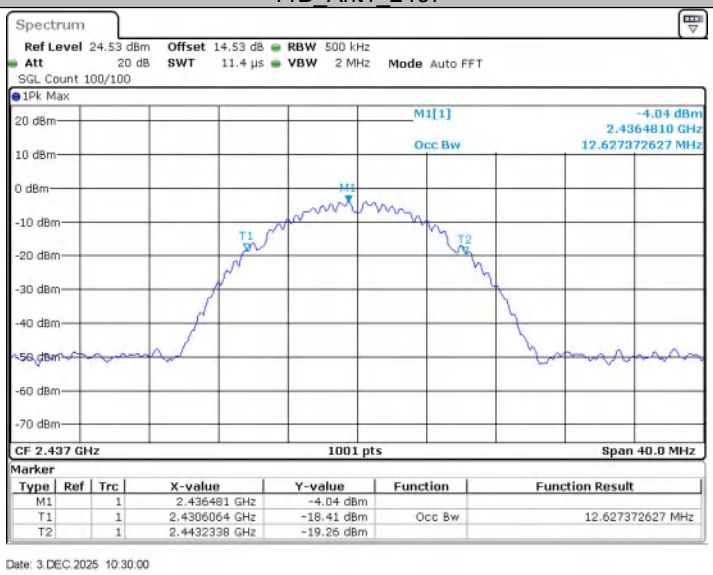

11B_Ant1_2462

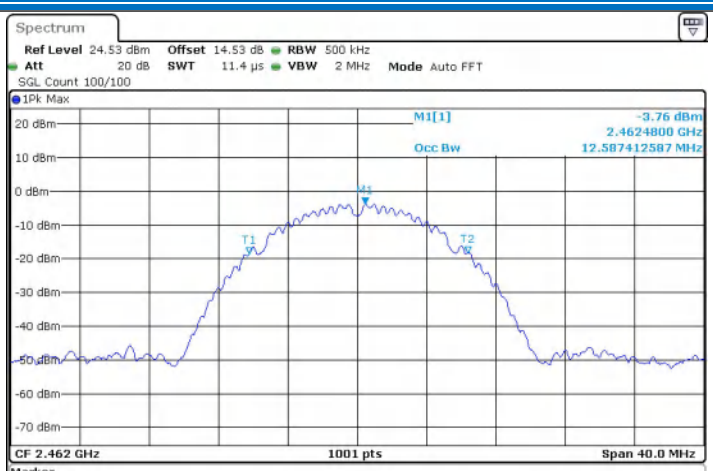

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.46248 GHz	-3.76 dBm		
T1		1	2.4557662 GHz	-18.61 dBm	Occ Bw	12.587412587 MHz
T2		1	2.4683536 GHz	-18.37 dBm		

Date: 3.DEC.2025 10:32:10

11G_Ant1_2412

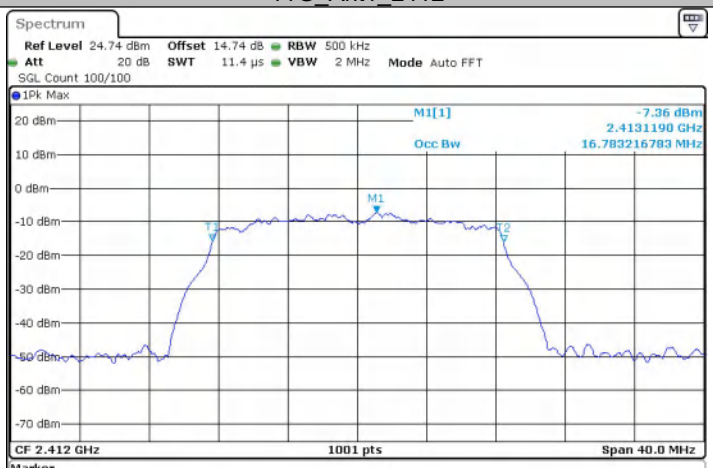

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.413119 GHz	-7.36 dBm		
T1		1	2.4036484 GHz	-15.64 dBm	Occ Bw	16.783216783 MHz
T2		1	2.4204316 GHz	-16.06 dBm		

Date: 3.DEC.2025 10:36:13

11G_Ant1_2437

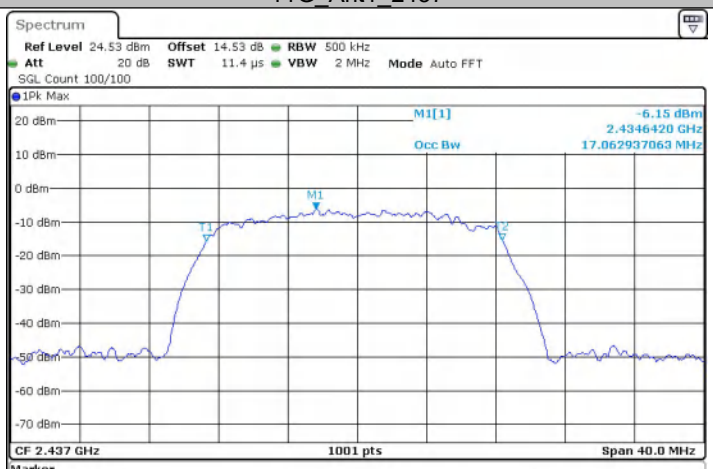

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.434642 GHz	-6.15 dBm		
T1		1	2.4282887 GHz	-15.64 dBm	Occ Bw	17.062937063 MHz
T2		1	2.4453516 GHz	-15.42 dBm		

Date: 3.DEC.2025 10:38:47

11G_Ant1_2462

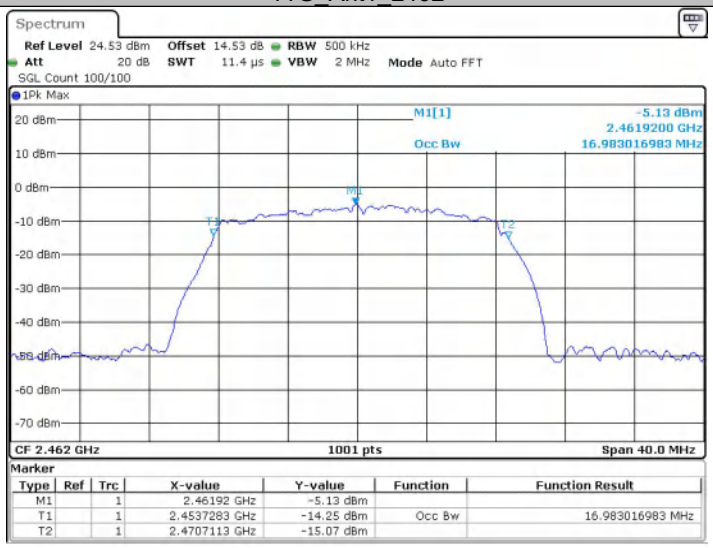

11N20SISO_Ant1_2412

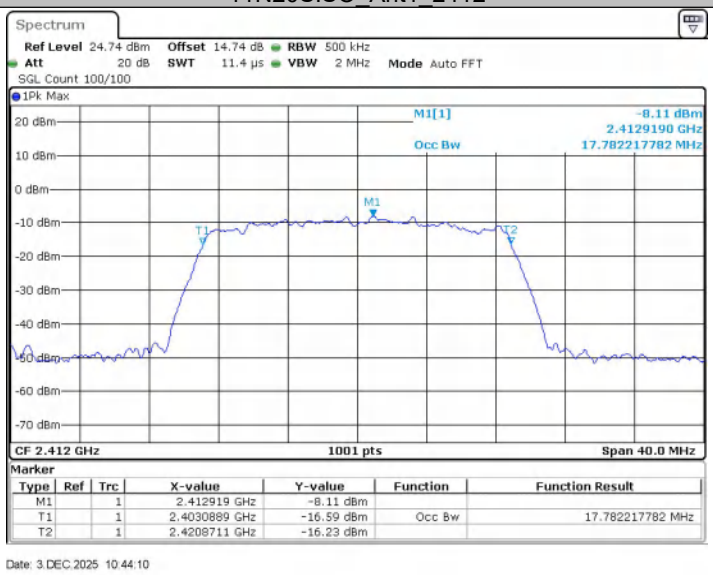

11N20SISO_Ant1_2437

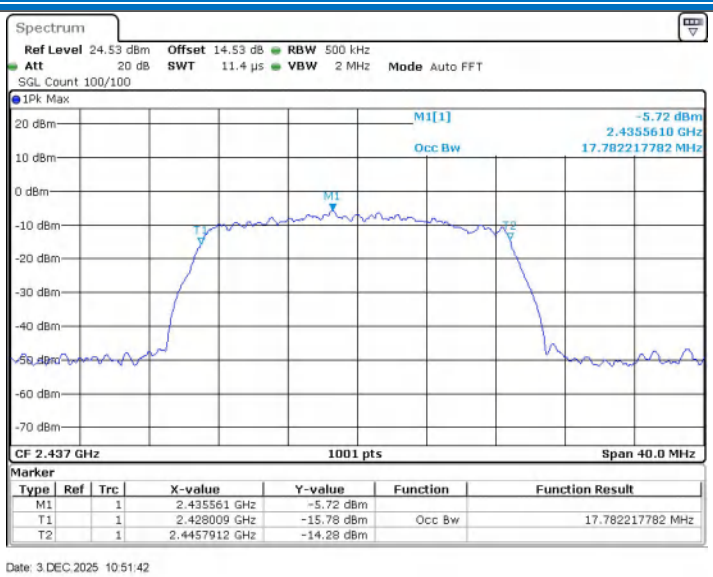

11N20SISO_Ant1_2462

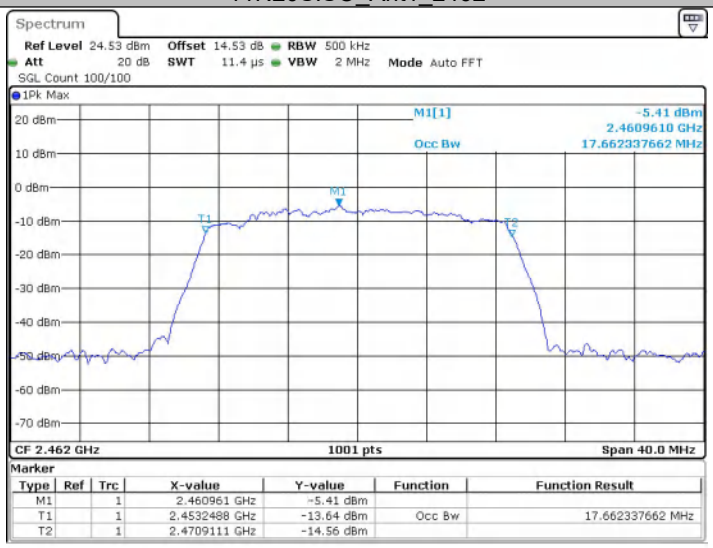

5.5 6dB Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.24	0.5	PASS
		2437	8.20	0.5	PASS
		2462	8.20	0.5	PASS
11G	Ant1	2412	15.96	0.5	PASS
		2437	16.24	0.5	PASS
		2462	15.92	0.5	PASS
11N20SISO	Ant1	2412	17.36	0.5	PASS
		2437	16.28	0.5	PASS
		2462	17.24	0.5	PASS

Test Graphs

11B_Ant1_2412

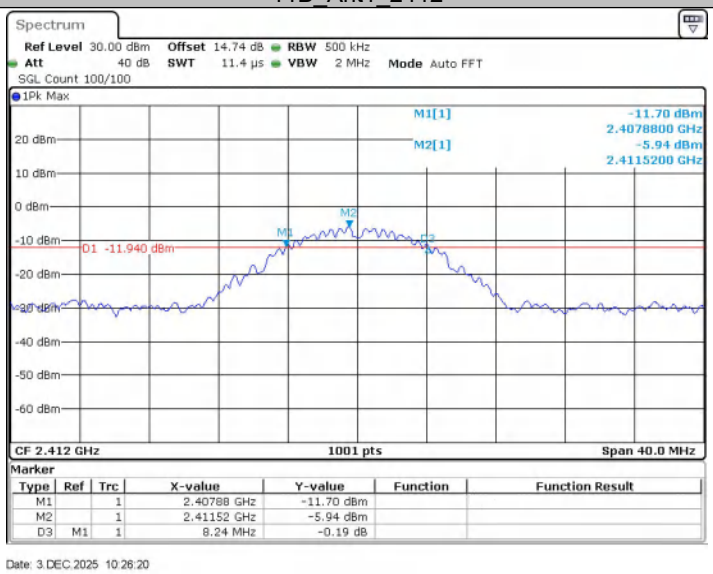

11B_Ant1_2437

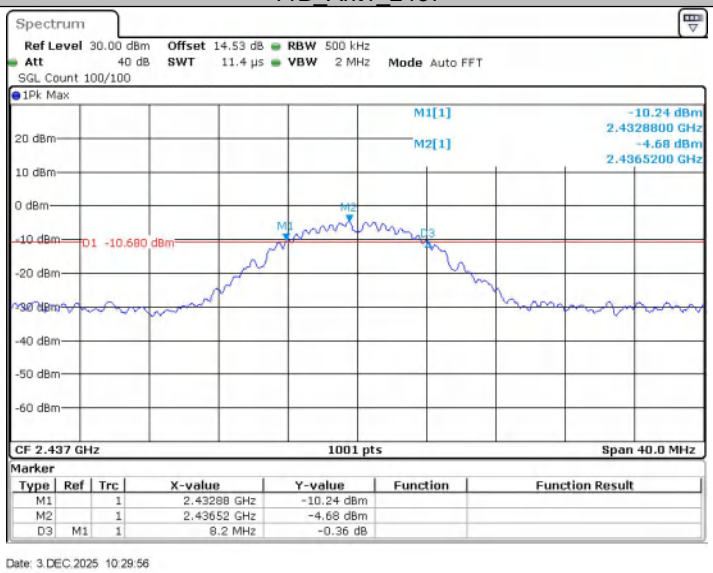

11B_Ant1_2462

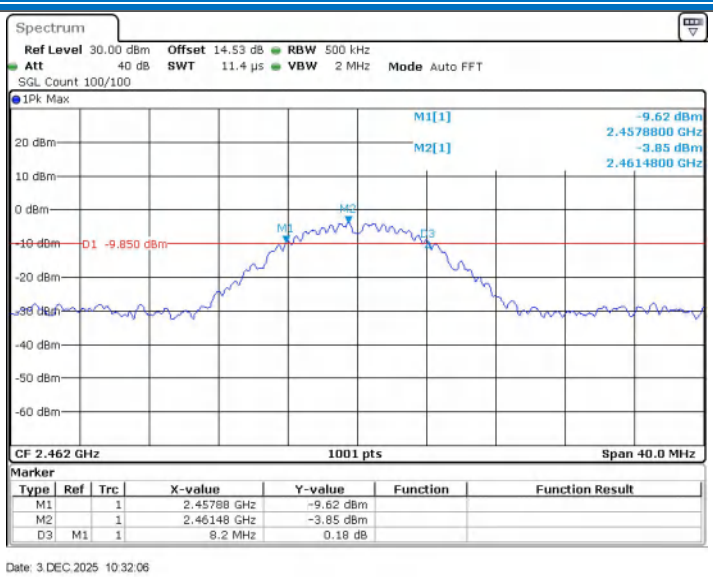

11G_Ant1_2412

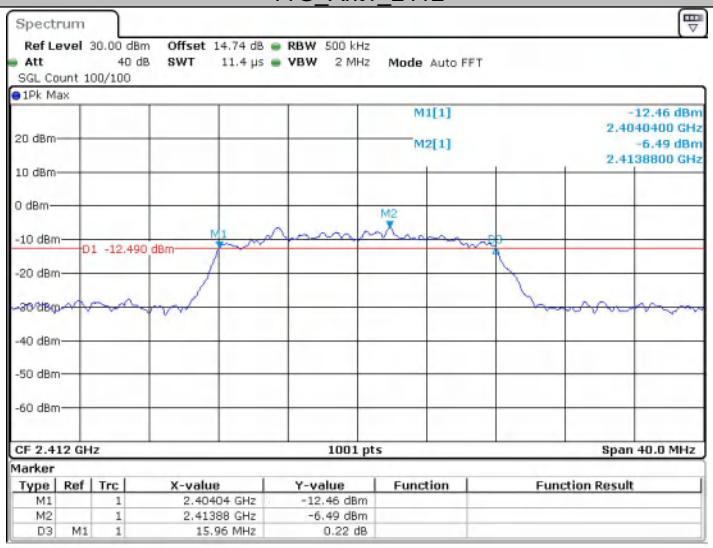

11G_Ant1_2437

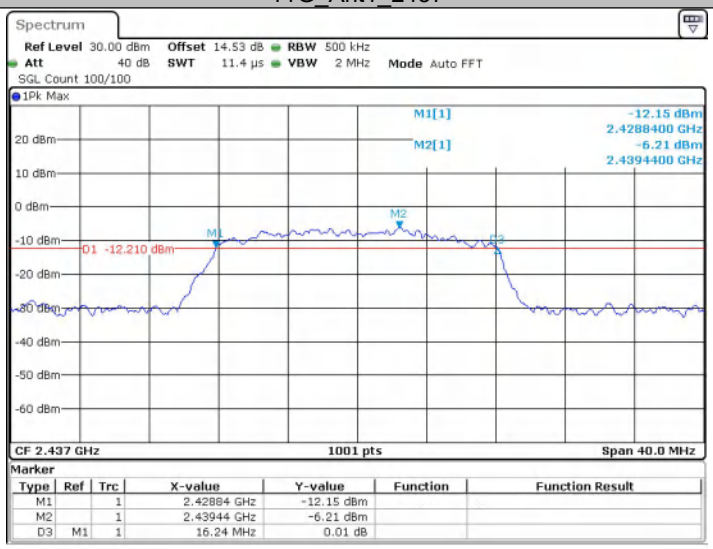

11G_Ant1_2462

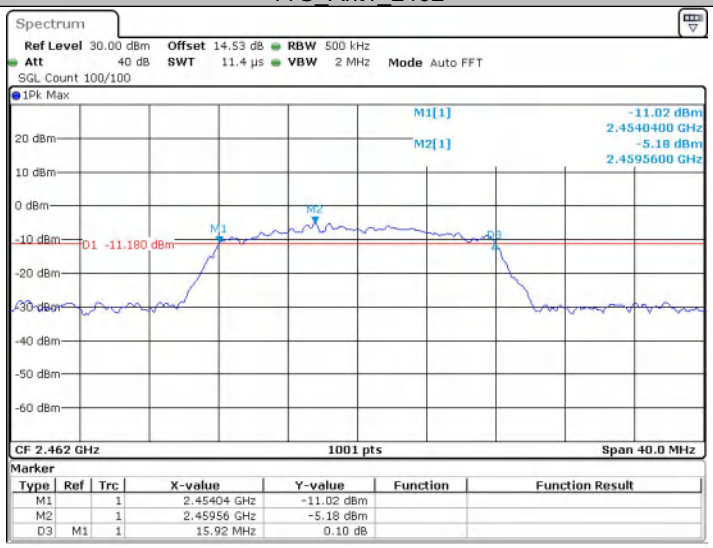

11N20SISO_Ant1_2412

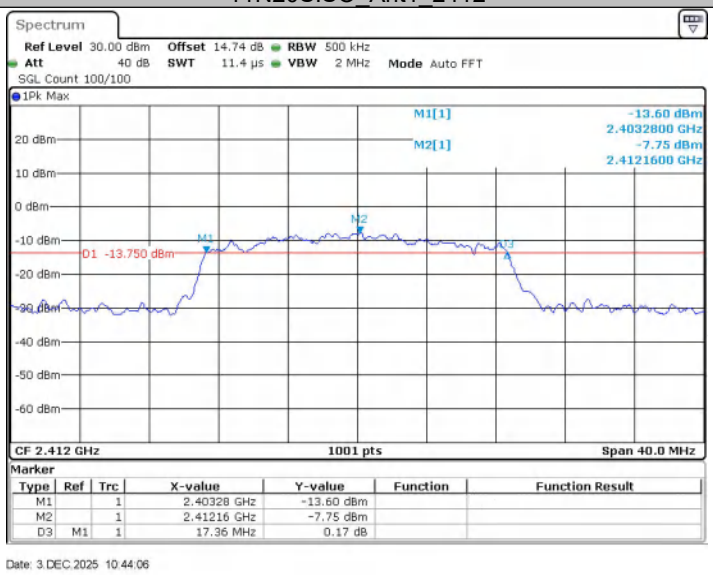

11N20SISO_Ant1_2437

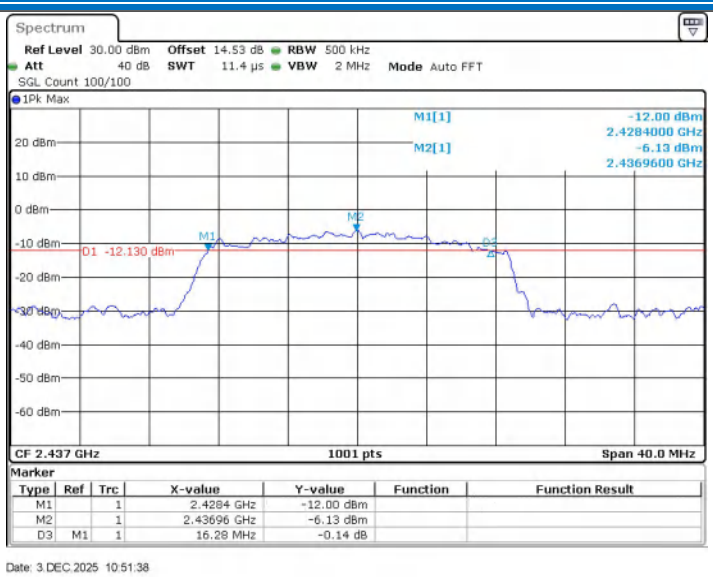

11N20SISO_Ant1_2462

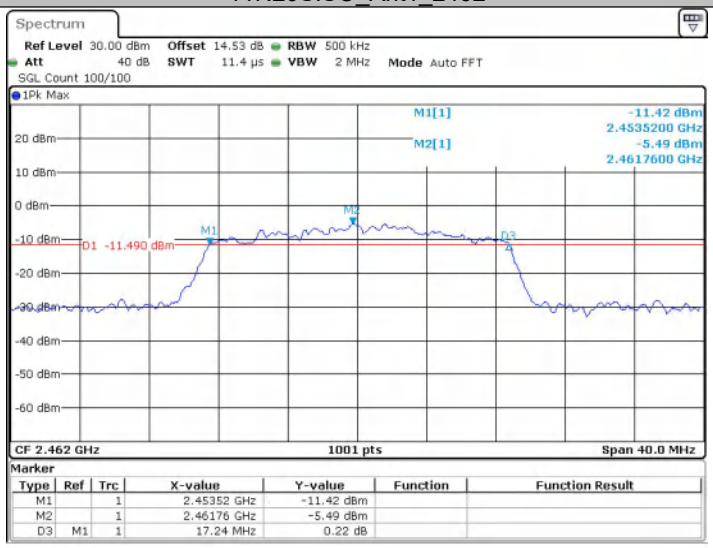

5.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-23.48	≤8.00	PASS
	2437	-22.76	≤8.00	PASS
	2462	-22.76	≤8.00	PASS
11G	2412	-22.19	≤8.00	PASS
	2437	-17.48	≤8.00	PASS
	2462	-17.15	≤8.00	PASS
11N20SISO	2412	-21.91	≤8.00	PASS
	2437	-17.28	≤8.00	PASS
	2462	-17.23	≤8.00	PASS

Note: Duty cycle correction factor details please see section 4.4.
When Duty cycle >98%, D.C.F is not required.

Test Graphs

11B_Ant1_2412

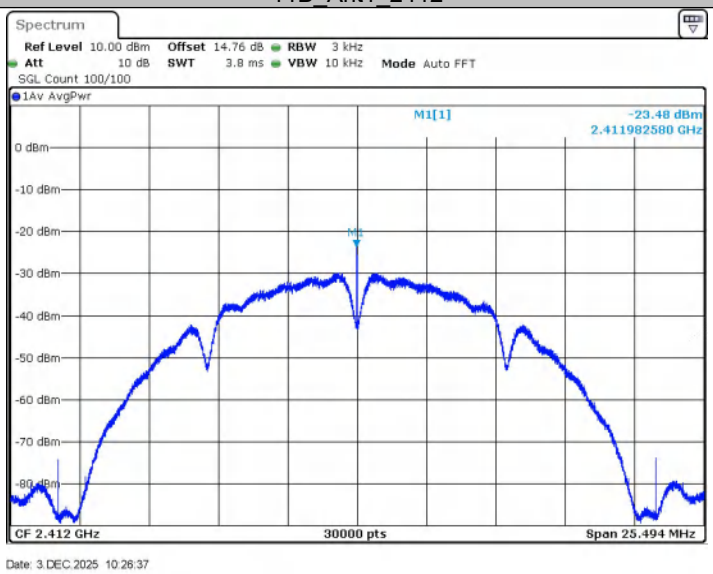

11B_Ant1_2437

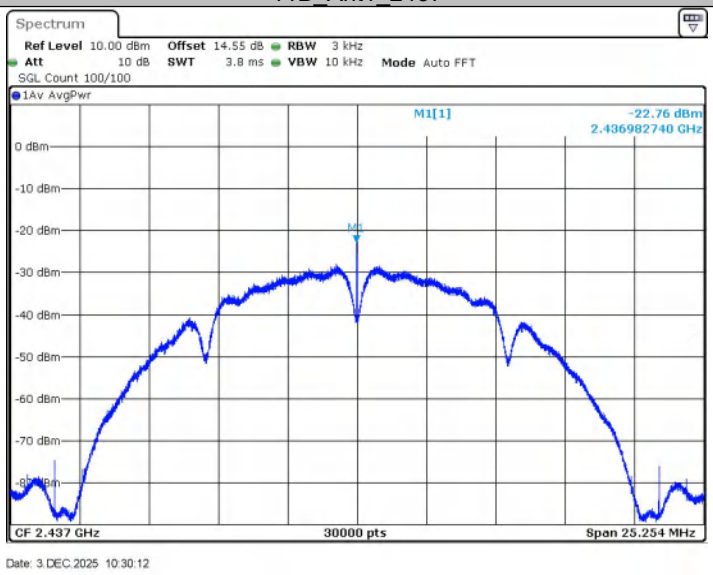

11B_Ant1_2462

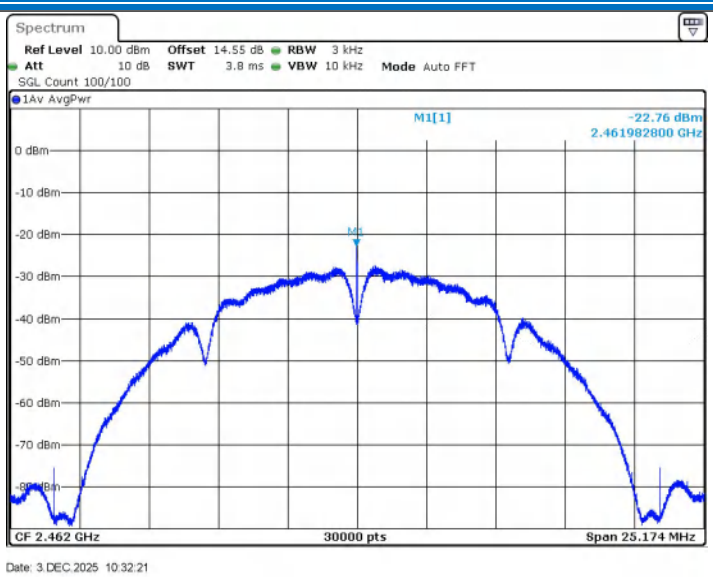

11G_Ant1_2412

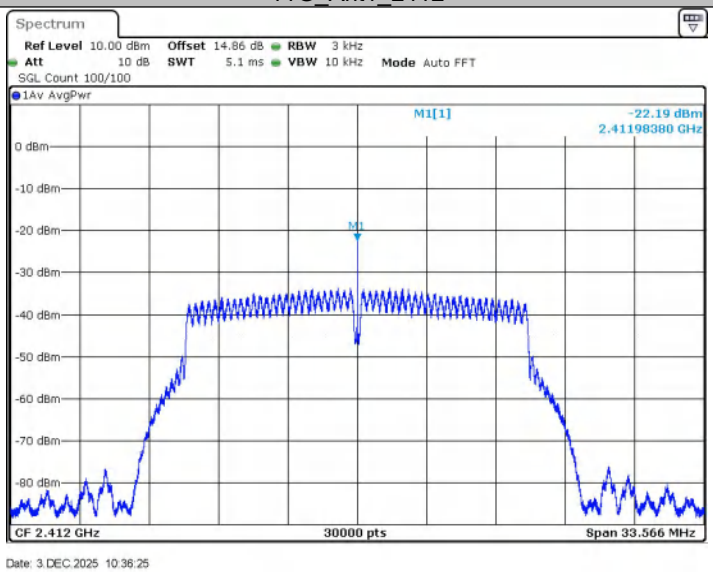

11G_Ant1_2437

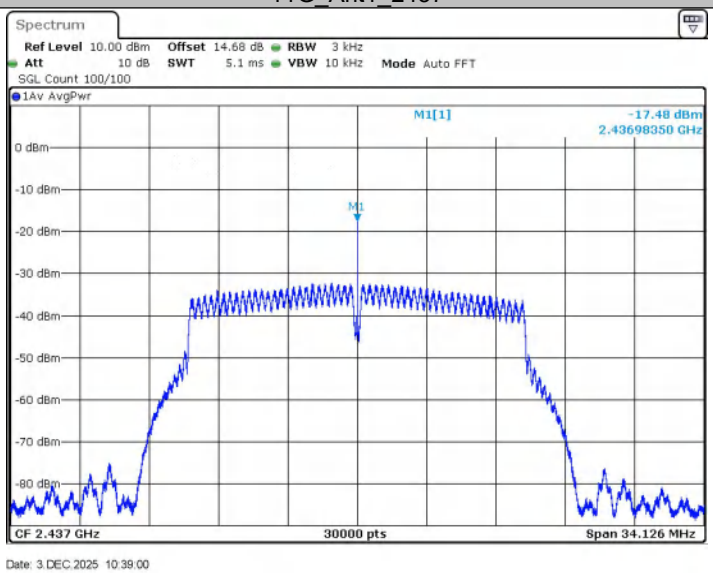

11G_Ant1_2462

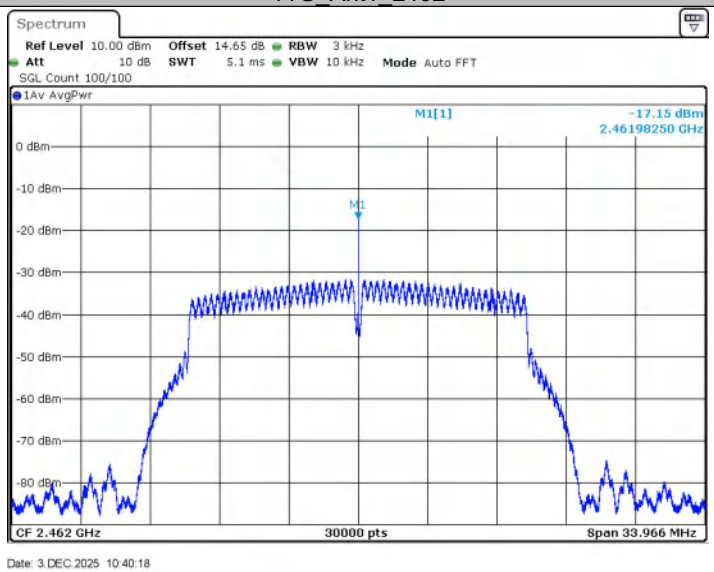

11N20SISO_Ant1_2412

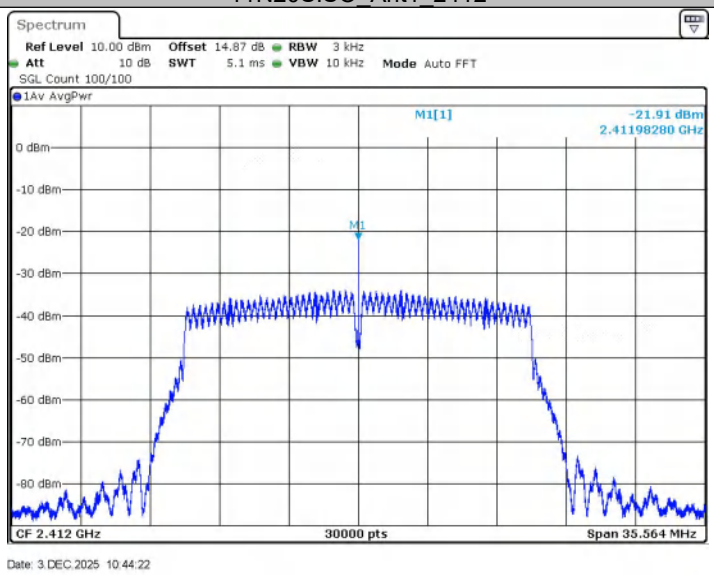

11N20SISO_Ant1_2437

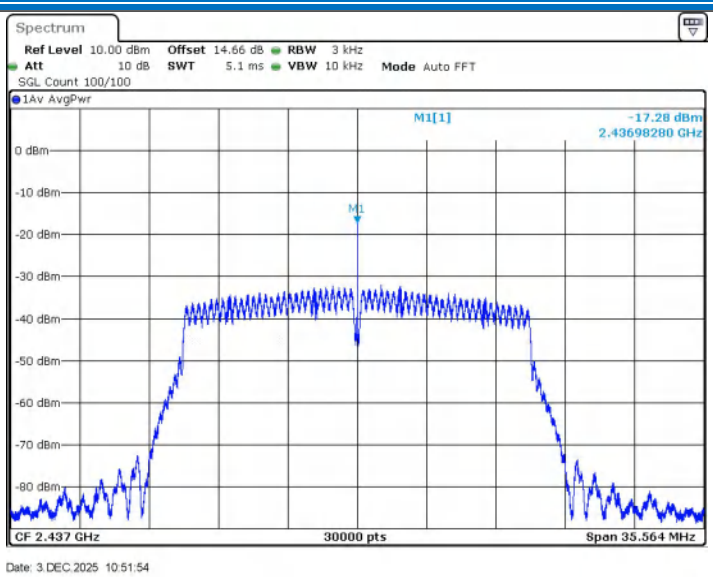

11N20SISO_Ant1_2462

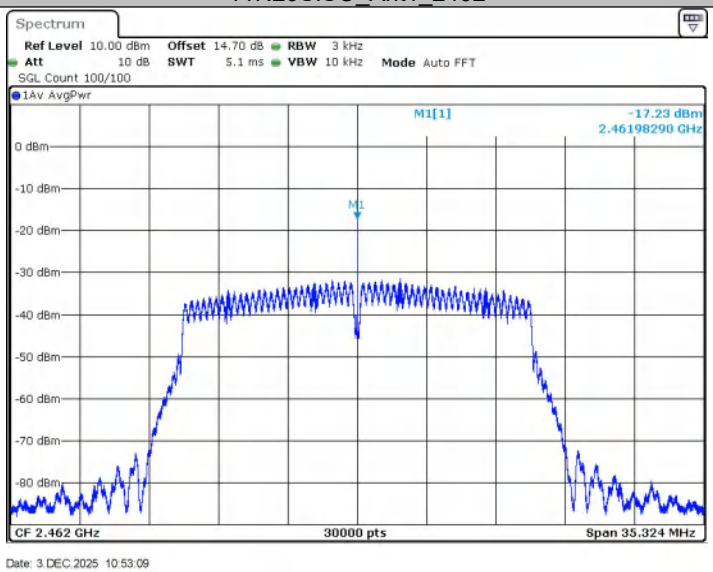

5.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
. Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	-7.42	-42.72	≤-37.42	PASS
	High	2462	-5.88	-41.52	≤-35.88	PASS
11G	Low	2412	-11.22	-42.86	≤-41.22	PASS
	High	2462	-9.29	-41.44	≤-39.29	PASS
11N20SISO	Low	2412	-11.69	-42.78	≤-41.69	PASS
	High	2462	-9.06	-41.2	≤-39.06	PASS

5.7.1 Test Graphs

11B_Ant1_Low_2412

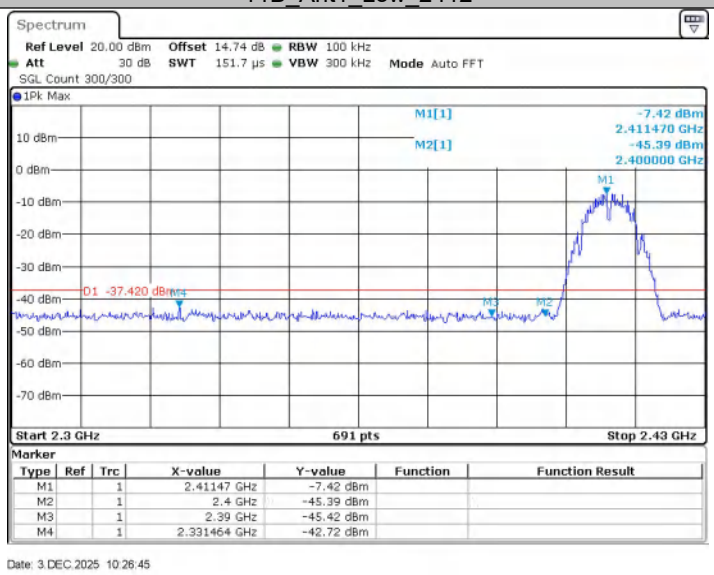

11B_Ant1_High_2462

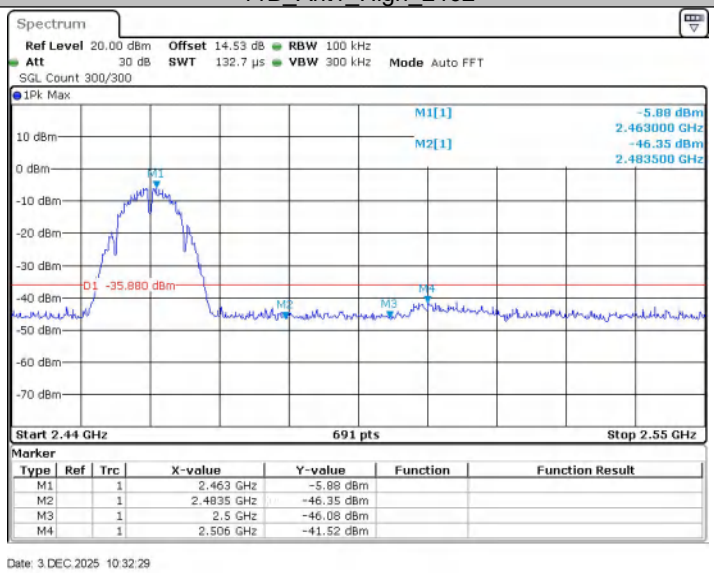

11G_Ant1_Low_2412

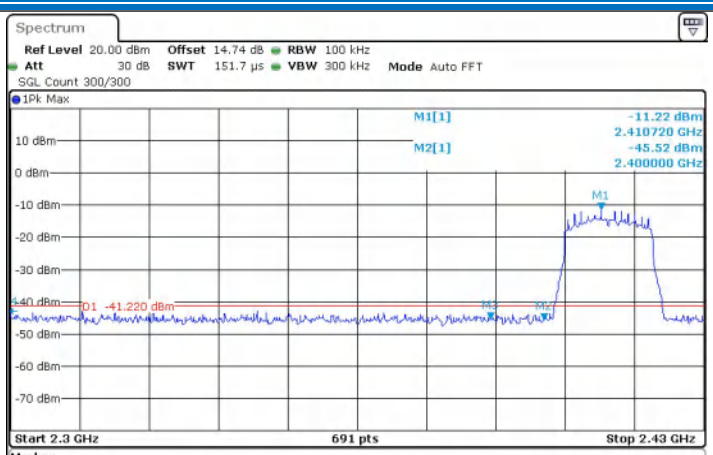

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.41072 GHz	-11.22 dBm		
M2		1	2.4 GHz	-45.52 dBm		
M3		1	2.39 GHz	-45.37 dBm		
M4		1	2.3 GHz	-42.86 dBm		

Date: 3.DEC.2025 10:36:33

11G_Ant1_High_2462

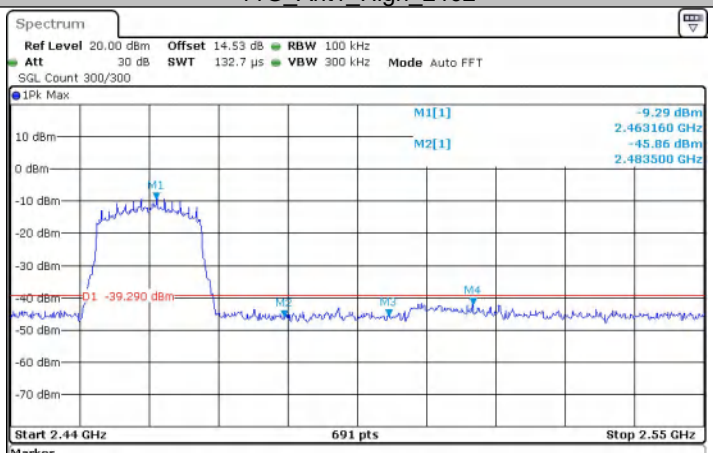

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.46316 GHz	-9.29 dBm		
M2		1	2.4835 GHz	-45.86 dBm		
M3		1	2.5 GHz	-45.72 dBm		
M4		1	2.513333 GHz	-41.44 dBm		

Date: 3.DEC.2025 10:40:26

11N20SISO_Ant1_Low_2412

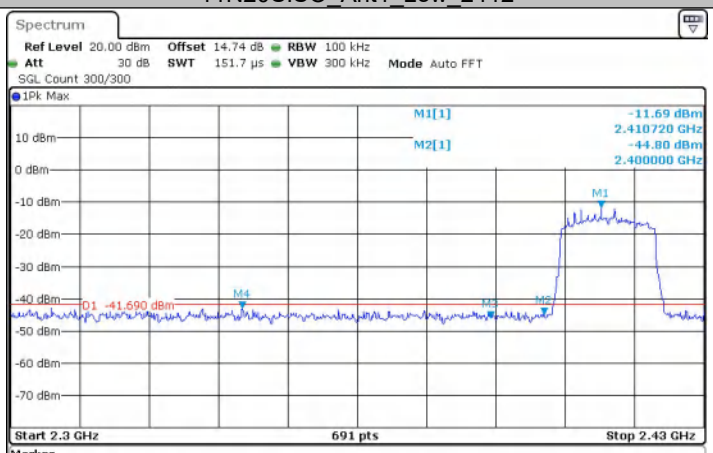

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.41072 GHz	-11.69 dBm		
M2		1	2.4 GHz	-44.80 dBm		
M3		1	2.39 GHz	-45.88 dBm		
M4		1	2.343522 GHz	-42.78 dBm		

Date: 3.DEC.2025 10:44:30

11N20SISO_Ant1_High_2462

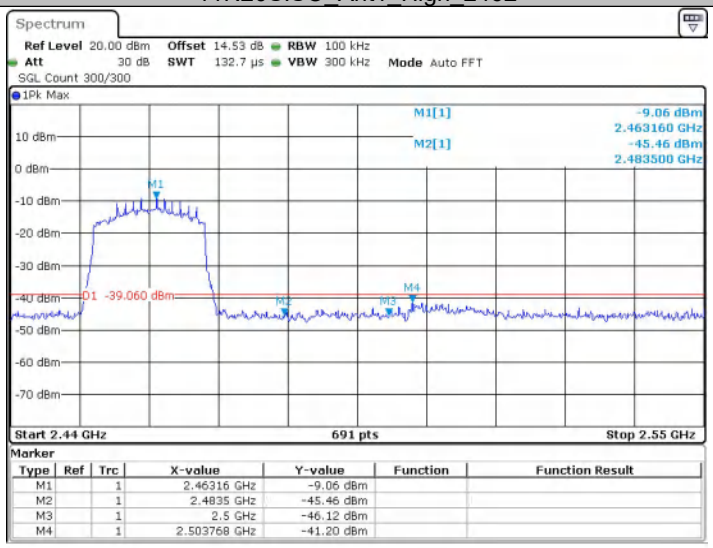

5.8 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2020
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	-10.22	-10.22	---	PASS
		30~1000	-10.22	-50.77	≤-40.22	PASS
		1000~26500	-10.22	-47.1	≤-40.22	PASS
	2437	Reference	-7.91	-7.91	---	PASS
		30~1000	-7.91	-51.4	≤-37.91	PASS
		1000~26500	-7.91	-47.91	≤-37.91	PASS
	2462	Reference	-7.02	-7.02	---	PASS
		30~1000	-7.02	-51.69	≤-37.02	PASS
		1000~26500	-7.02	-47.78	≤-37.02	PASS
11G	2412	Reference	-14.37	-14.37	---	PASS
		30~1000	-14.37	-51.43	≤-44.37	PASS
		1000~26500	-14.37	-47.58	≤-44.37	PASS
	2437	Reference	-13.58	-13.58	---	PASS
		30~1000	-13.58	-50.99	≤-43.58	PASS
		1000~26500	-13.58	-47.88	≤-43.58	PASS
	2462	Reference	-11.83	-11.83	---	PASS
		30~1000	-11.83	-51.64	≤-41.83	PASS
		1000~26500	-11.83	-48.1	≤-41.83	PASS
11N20SISO	2412	Reference	-14.94	-14.94	---	PASS
		30~1000	-14.94	-51.42	≤-44.94	PASS
		1000~26500	-14.94	-47.37	≤-44.94	PASS
	2437	Reference	-13.51	-13.51	---	PASS
		30~1000	-13.51	-50.12	≤-43.51	PASS
		1000~26500	-13.51	-47.88	≤-43.51	PASS
	2462	Reference	-10.11	-10.11	---	PASS
		30~1000	-10.11	-49.89	≤-40.11	PASS
		1000~26500	-10.11	-48.02	≤-40.11	PASS

Test Graphs

11B_Ant1_2412_0~Reference

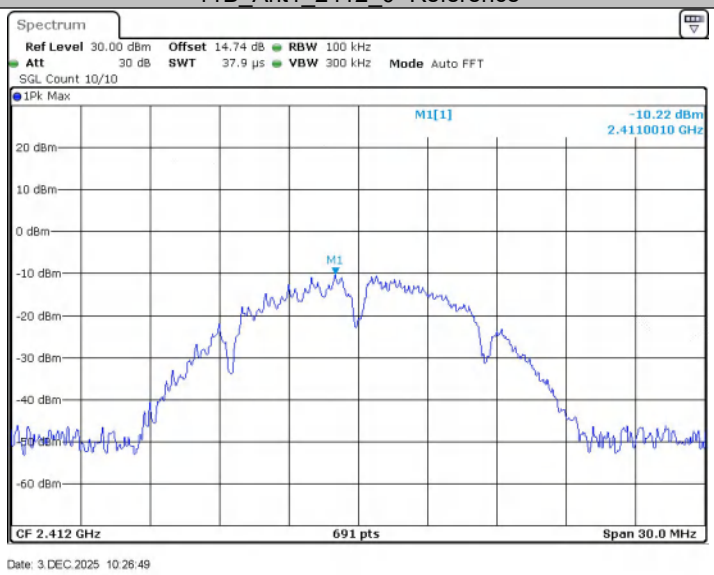

11B_Ant1_2412_30~1000

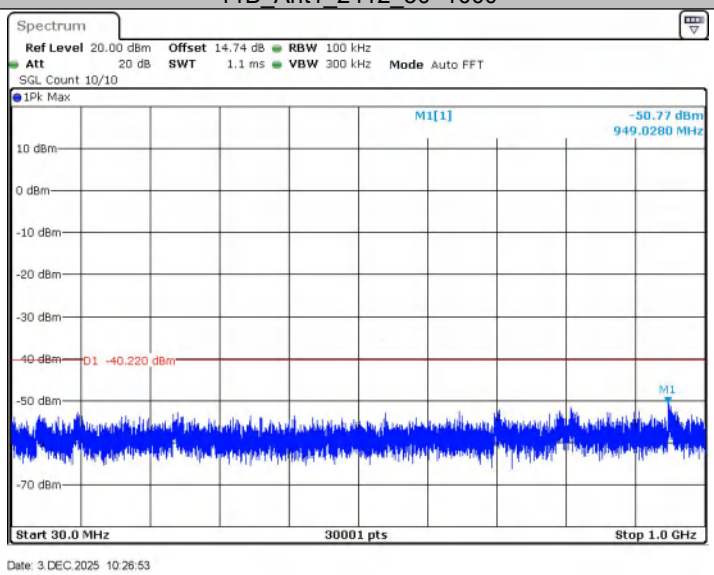

11B_Ant1_2412_1000~26500

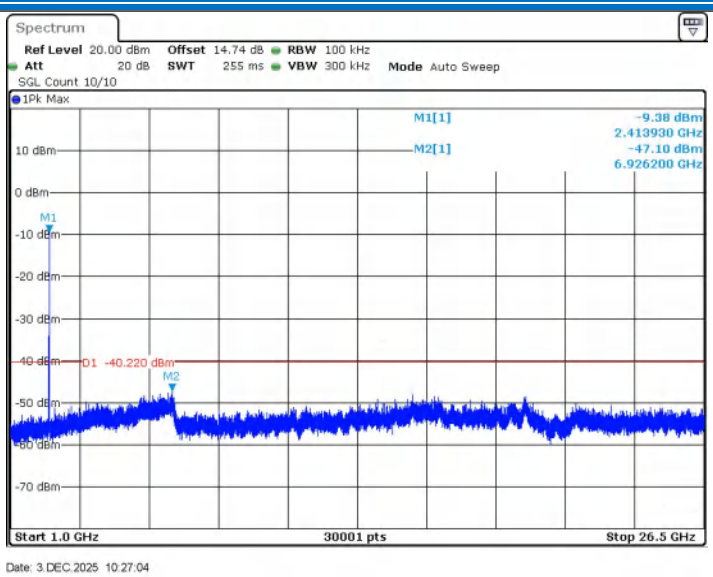

11B_Ant1_2437_0~Reference

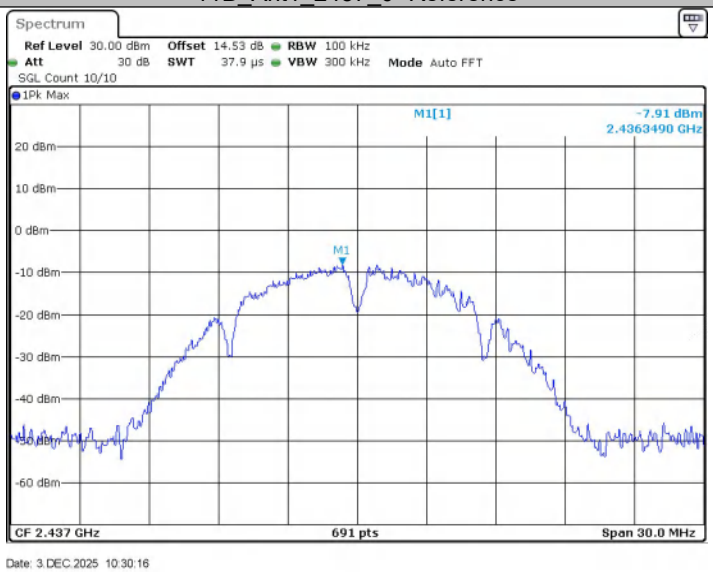

11B_Ant1_2437_30~1000

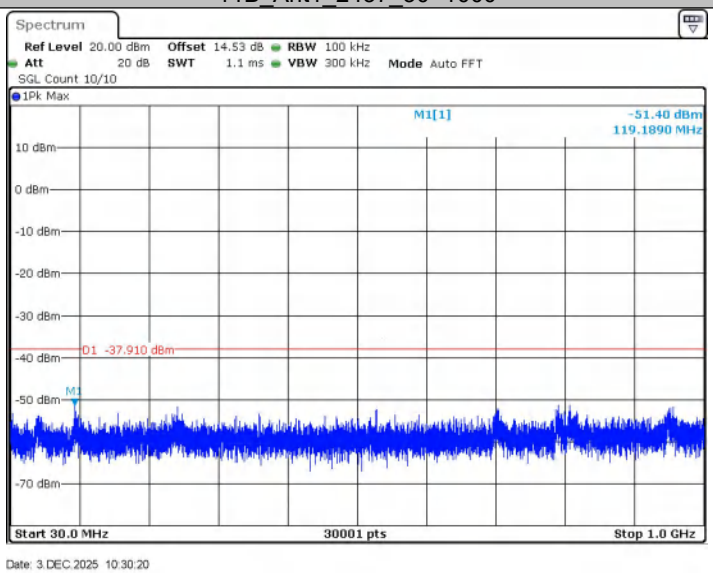

11B_Ant1_2437_1000~26500

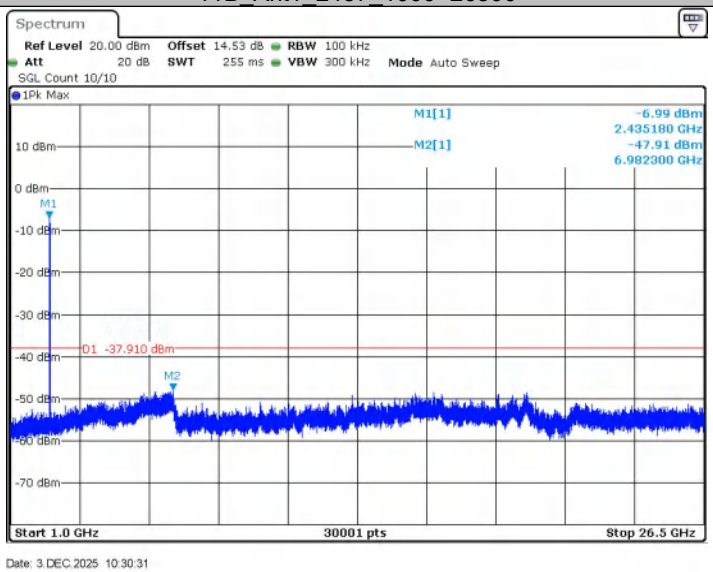

11B_Ant1_2462_0~Reference

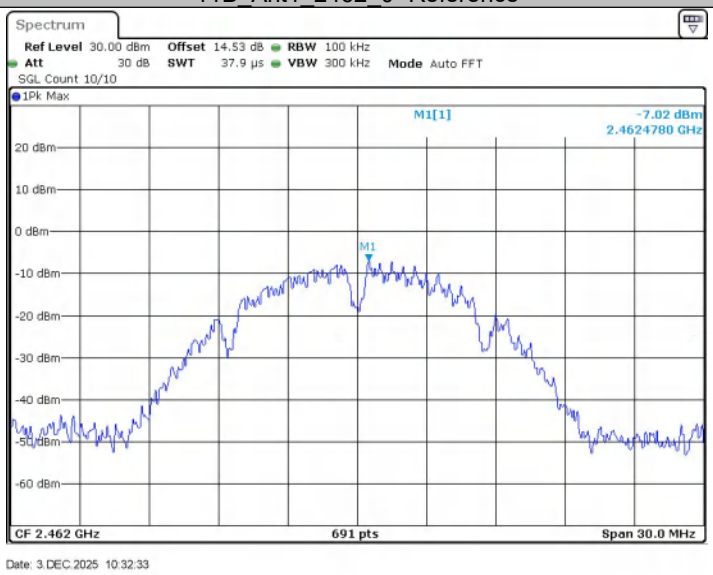

11B_Ant1_2462_30~1000

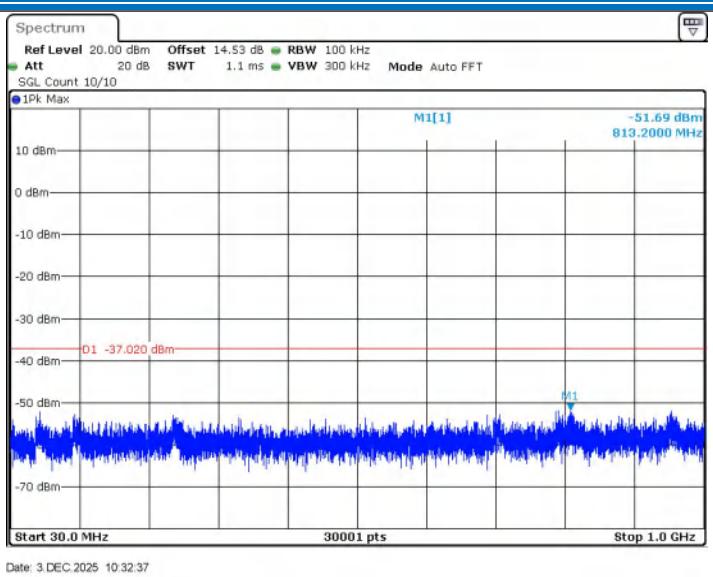

11B_Ant1_2462_1000~26500

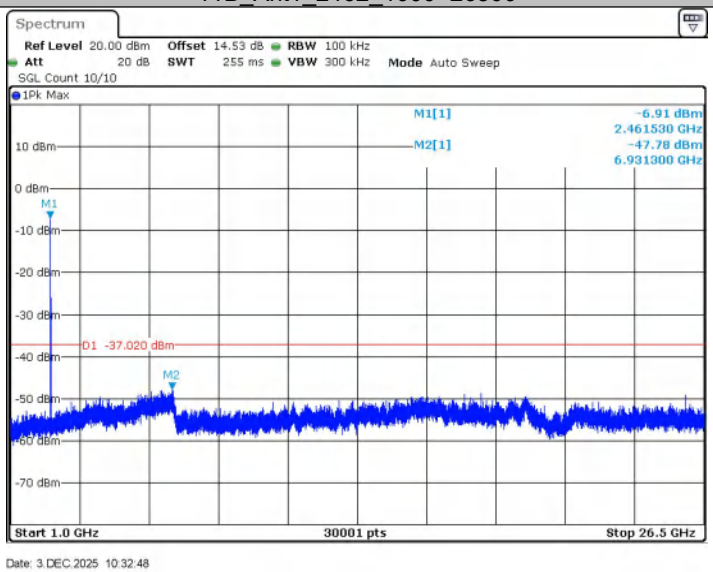

11G_Ant1_2412_0~Reference

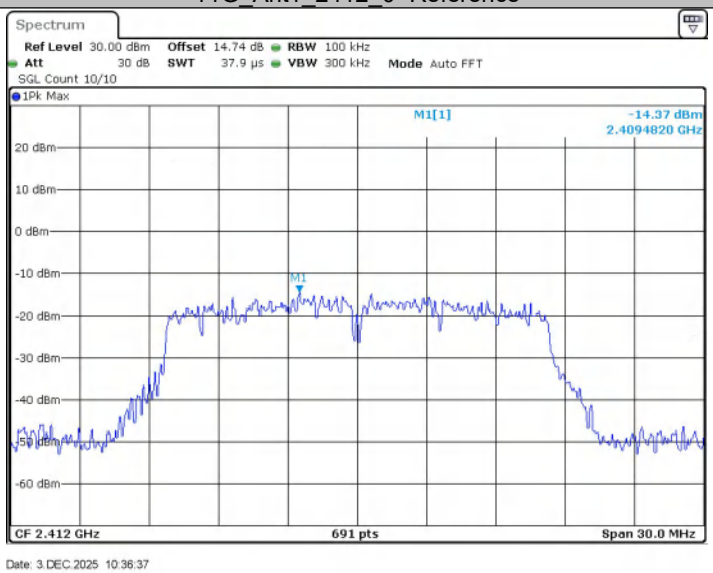

11G_Ant1_2412_30~1000

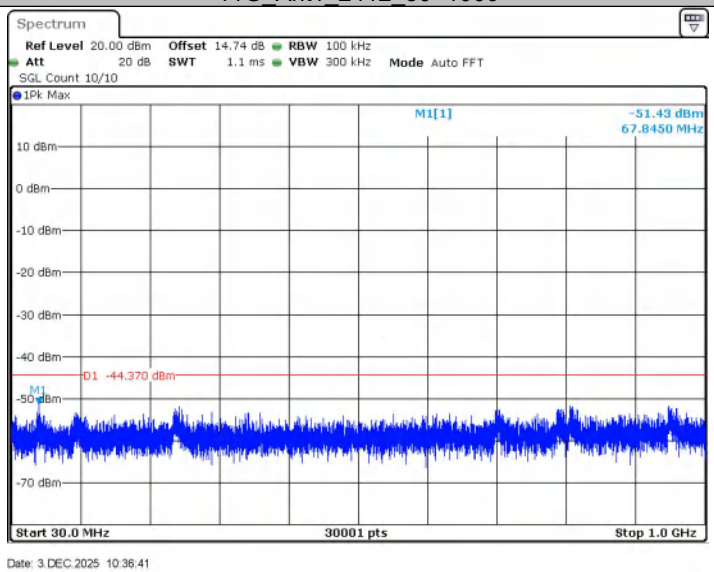

11G_Ant1_2412_1000~26500

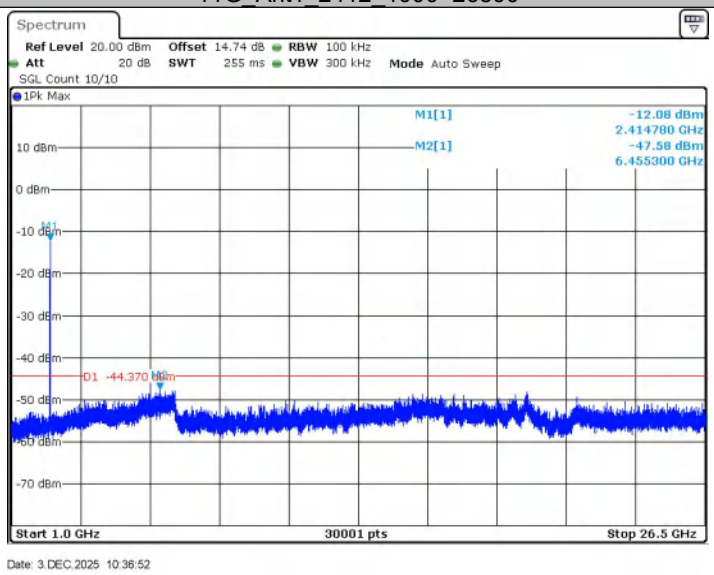

11G_Ant1_2437_0~Reference

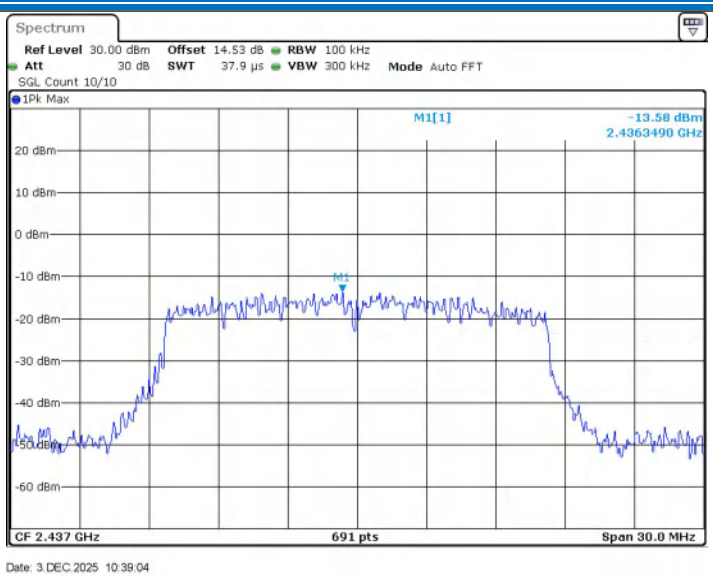

11G_Ant1_2437_30~1000

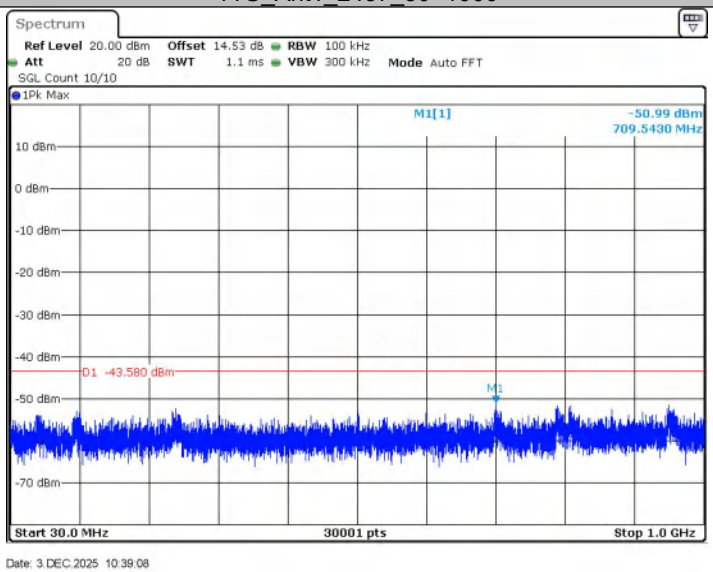

11G_Ant1_2437_1000~26500

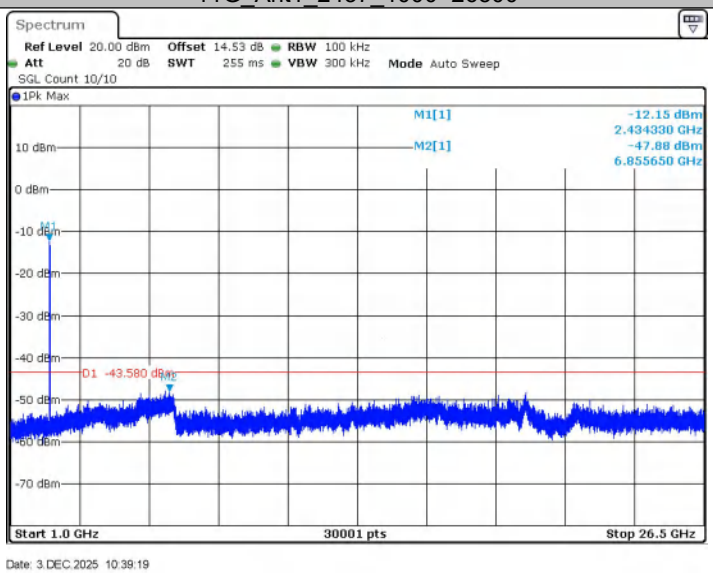

11G_Ant1_2462_0~Reference

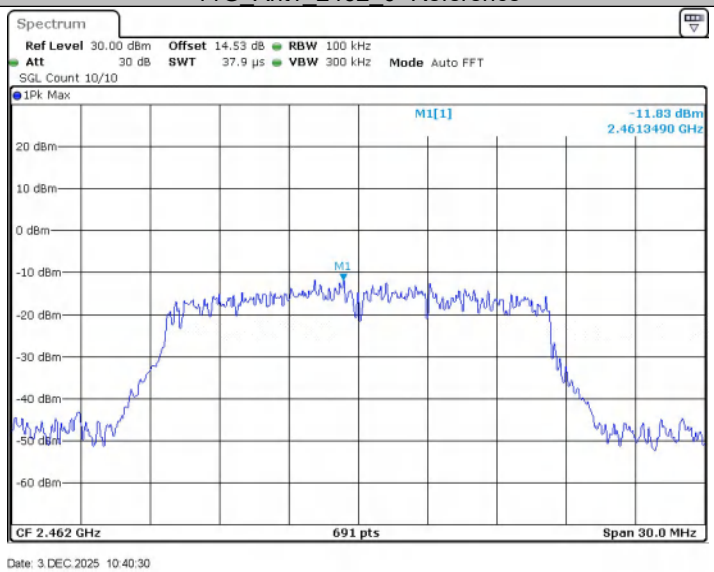

11G_Ant1_2462_30~1000

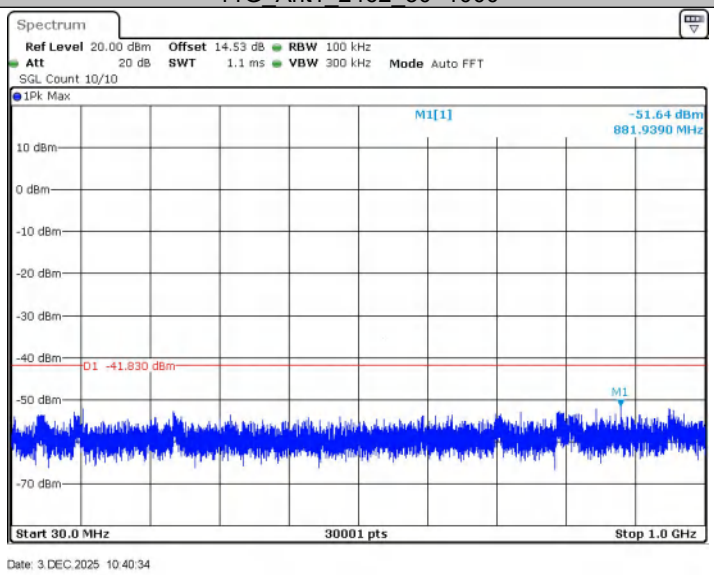

11G_Ant1_2462_1000~26500

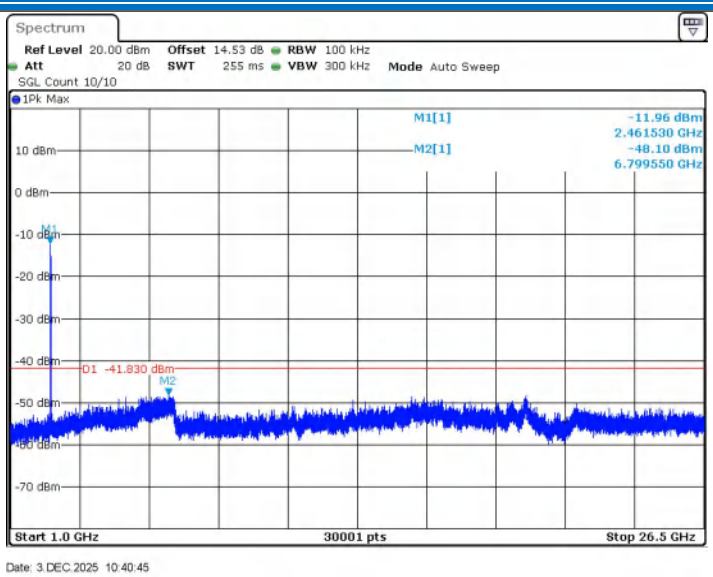

11N20SISO_Ant1_2412_0~Reference

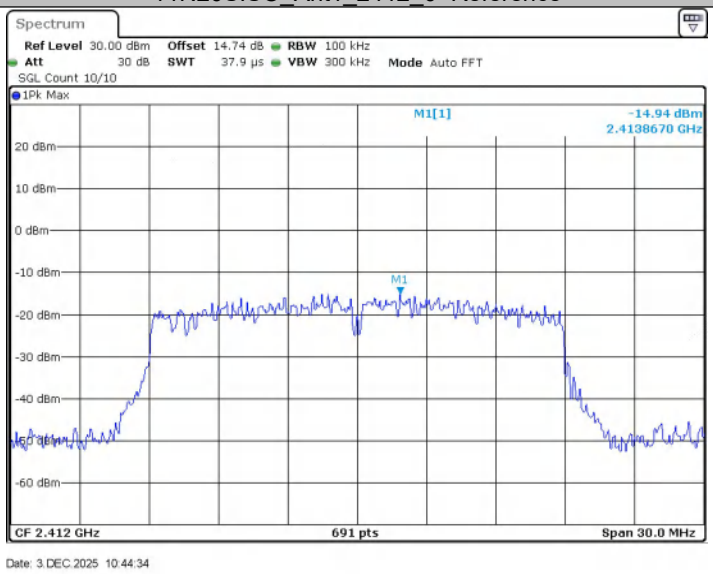

11N20SISO_Ant1_2412_30~1000

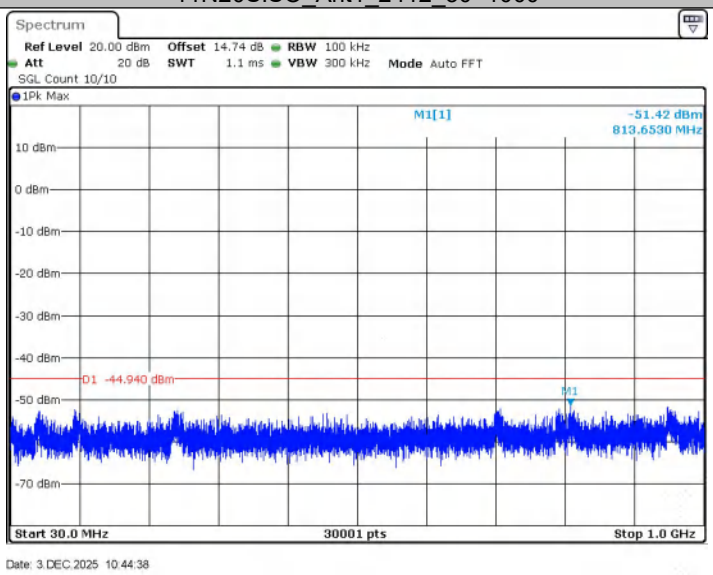

11N20SISO_Ant1_2412_1000~26500

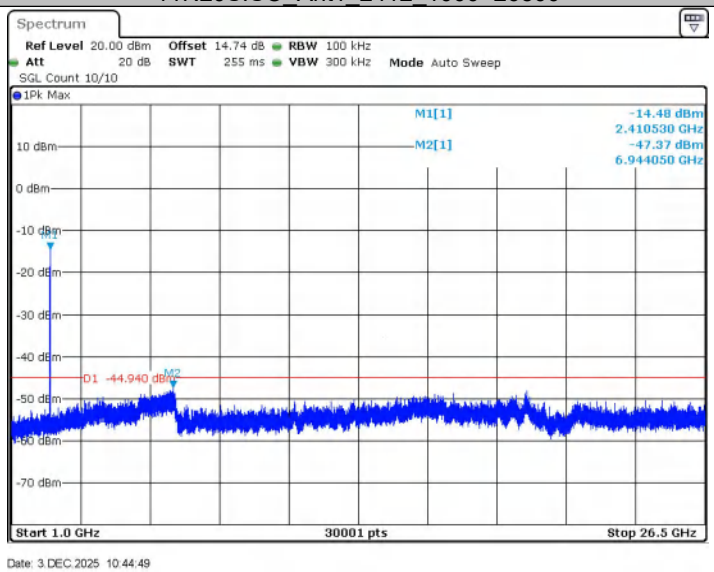

11N20SISO_Ant1_2437_0~Reference

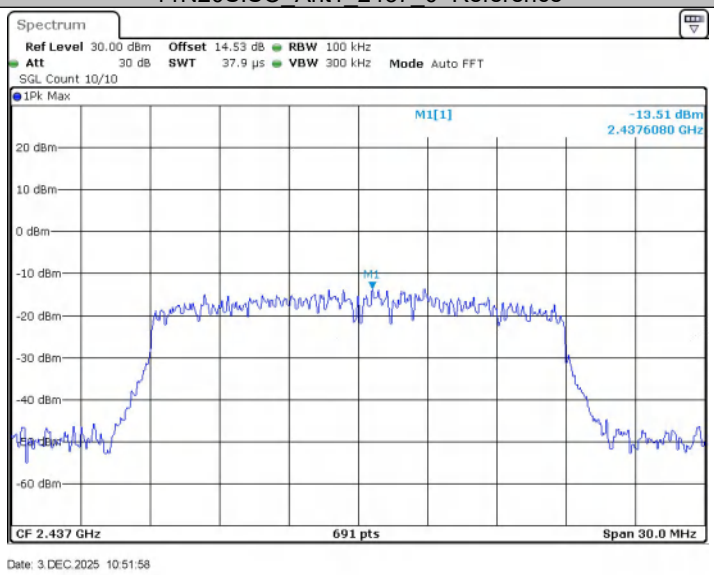

11N20SISO_Ant1_2437_30~1000

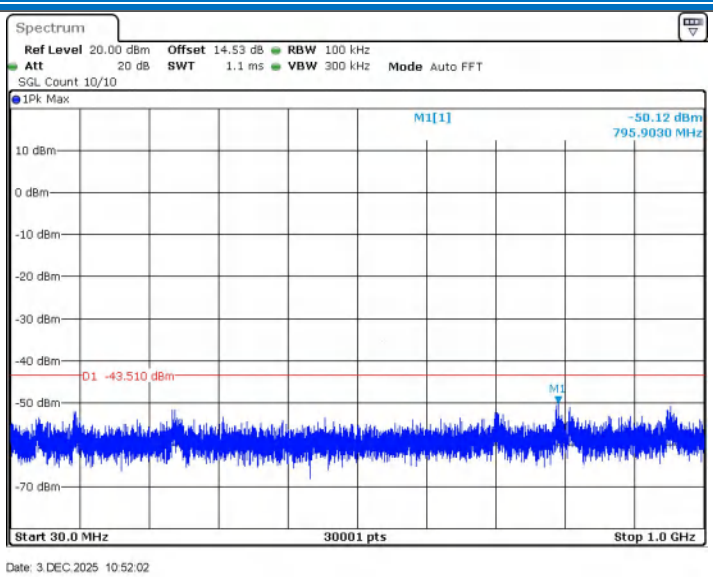

11N20SISO_Ant1_2437_1000~26500

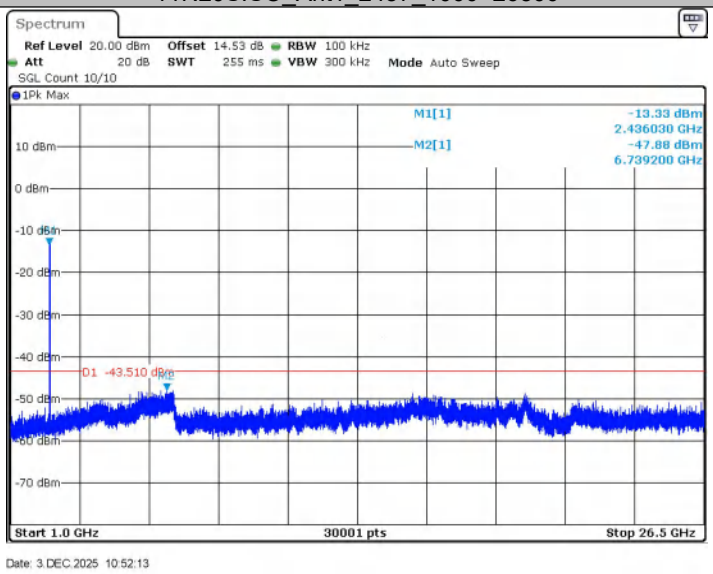

11N20SISO_Ant1_2462_0~Reference

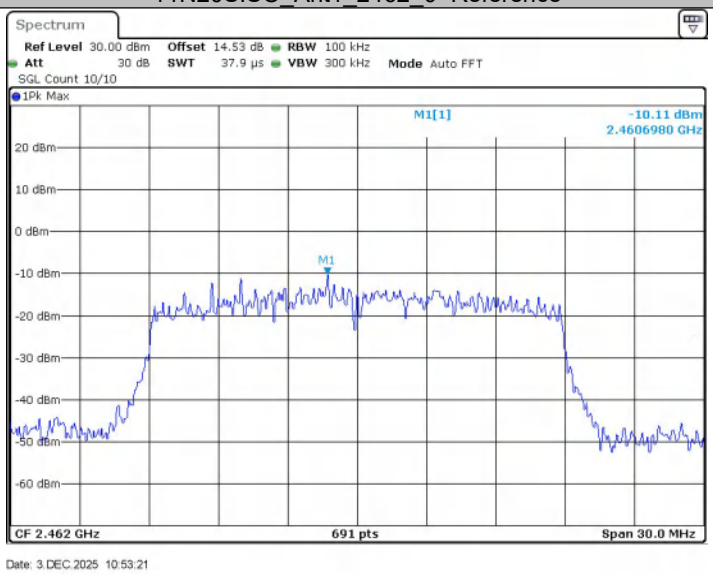

11N20SISO_Ant1_2462_30~1000

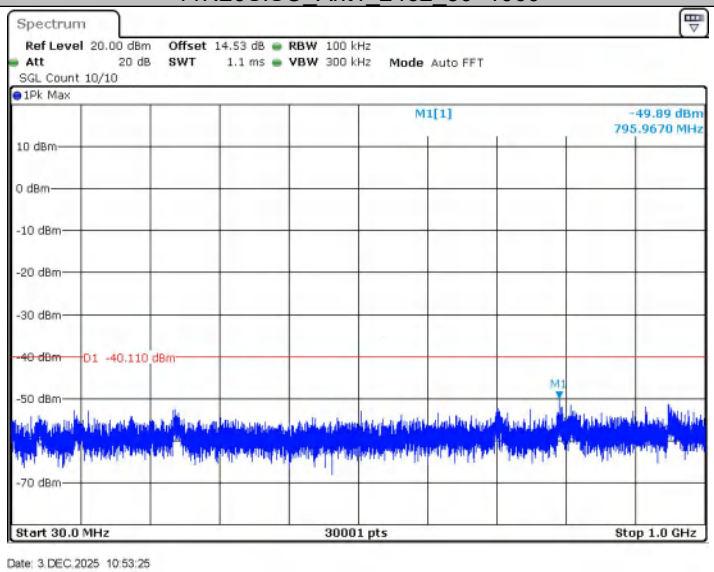

11N20SISO_Ant1_2462_1000~26500

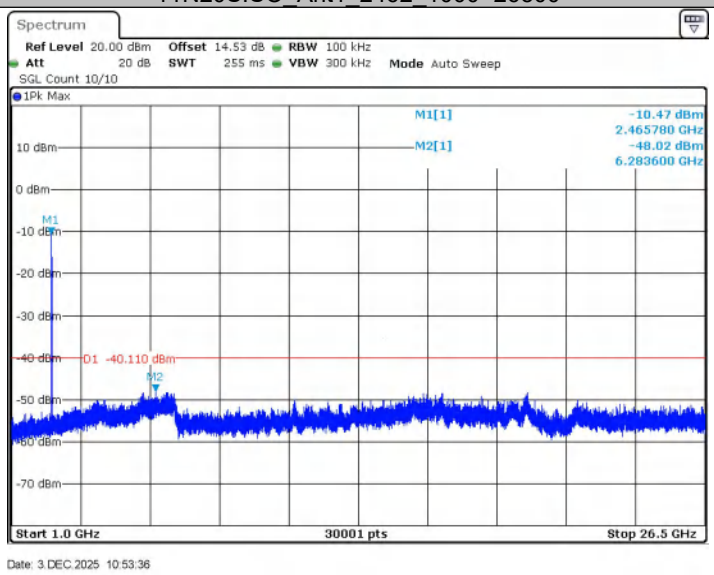

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205
Test Method:	ANSI C63.10 2020
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Receiver Setup:	

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Setup:	

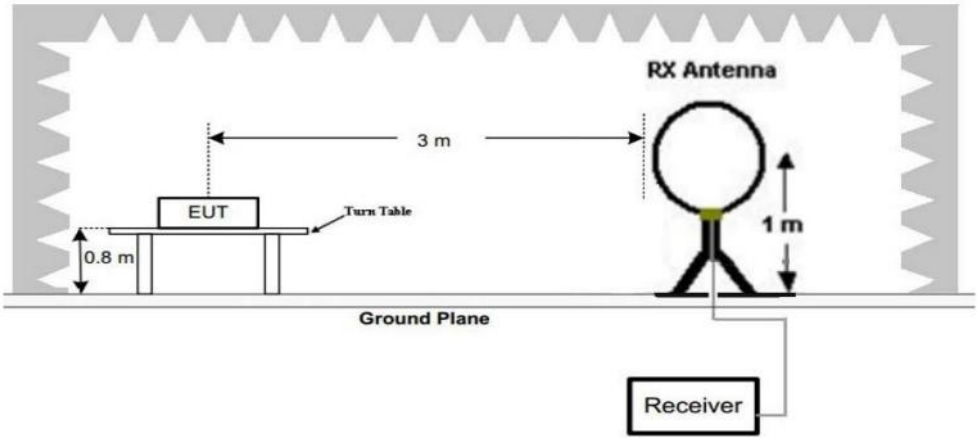

Figure 1. Below 30MHz

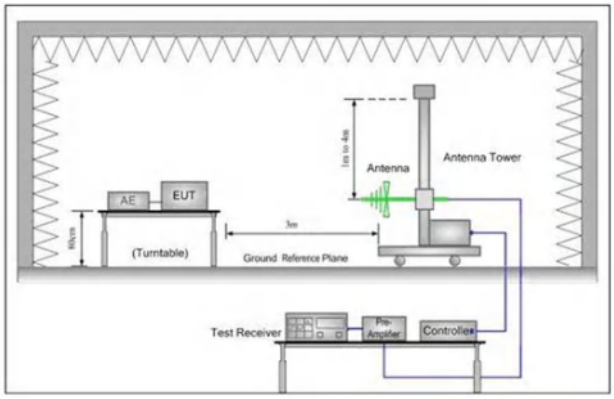

Figure 2. 30MHz to 1GHz

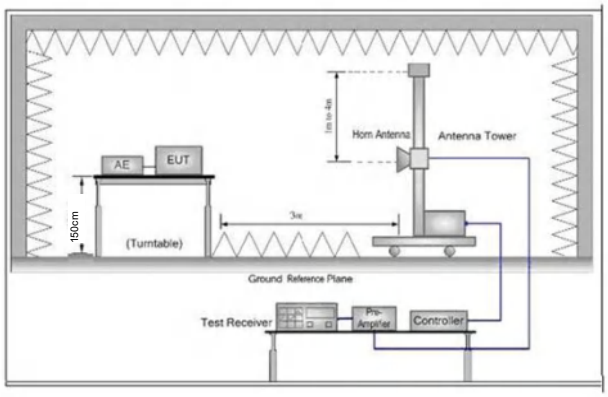

Figure 3. Above 1 GHz

Test Procedure:	a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.9.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

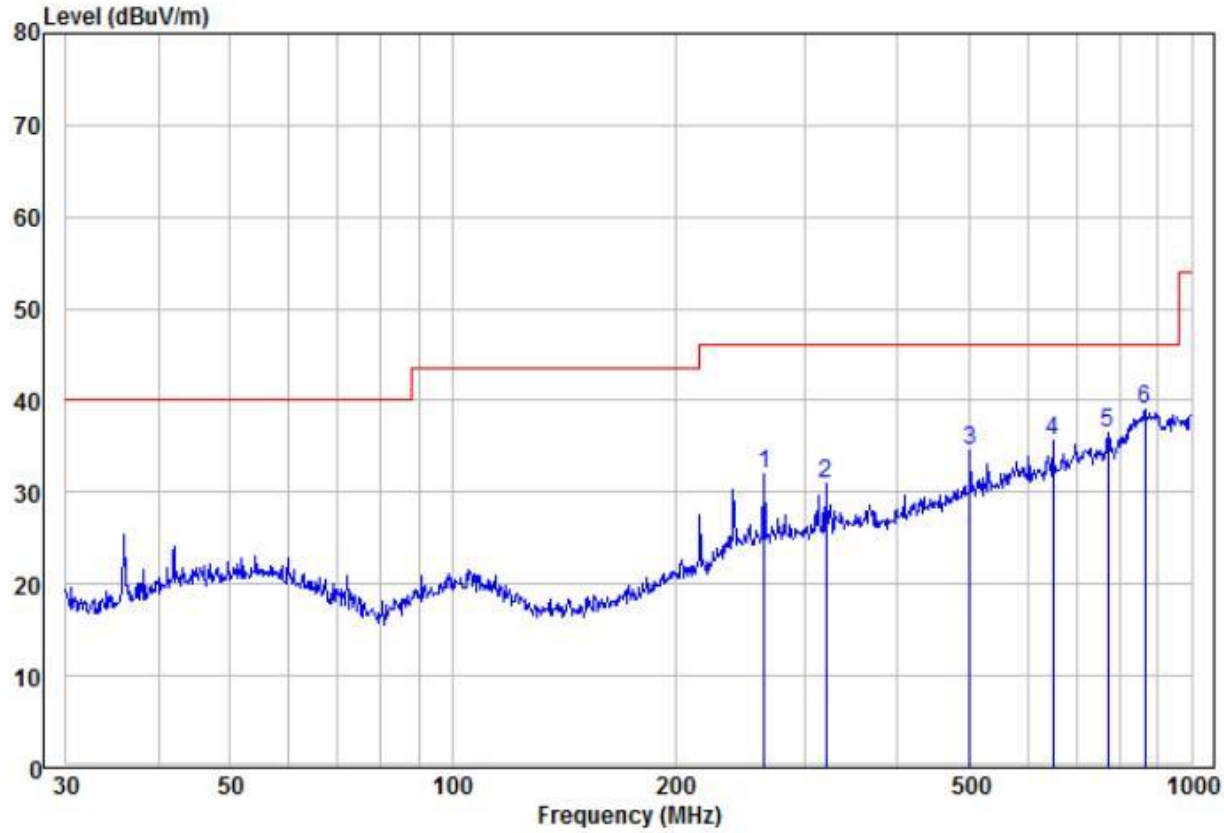

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	263.82	30.06	2.00	32.06	46.00	-13.94	Peak	VERTICAL	100	54
2	319.94	28.92	2.00	30.92	46.00	-15.08	Peak	VERTICAL	100	284
3	501.18	33.57	1.00	34.57	46.00	-11.43	Peak	VERTICAL	100	204
4	649.66	35.17	0.50	35.67	46.00	-10.33	Peak	VERTICAL	100	124
5	771.45	35.04	1.50	36.54	46.00	-9.46	Peak	VERTICAL	100	158
6 pp	866.09	35.49	3.50	38.99	46.00	-7.01	Peak	VERTICAL	100	360

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Factor= Antenna Factor + Cable Factor – Preamplifier Factor,
Level = Read Level + Factor,
Over Limit=Level-Limit Line.

Horizontal

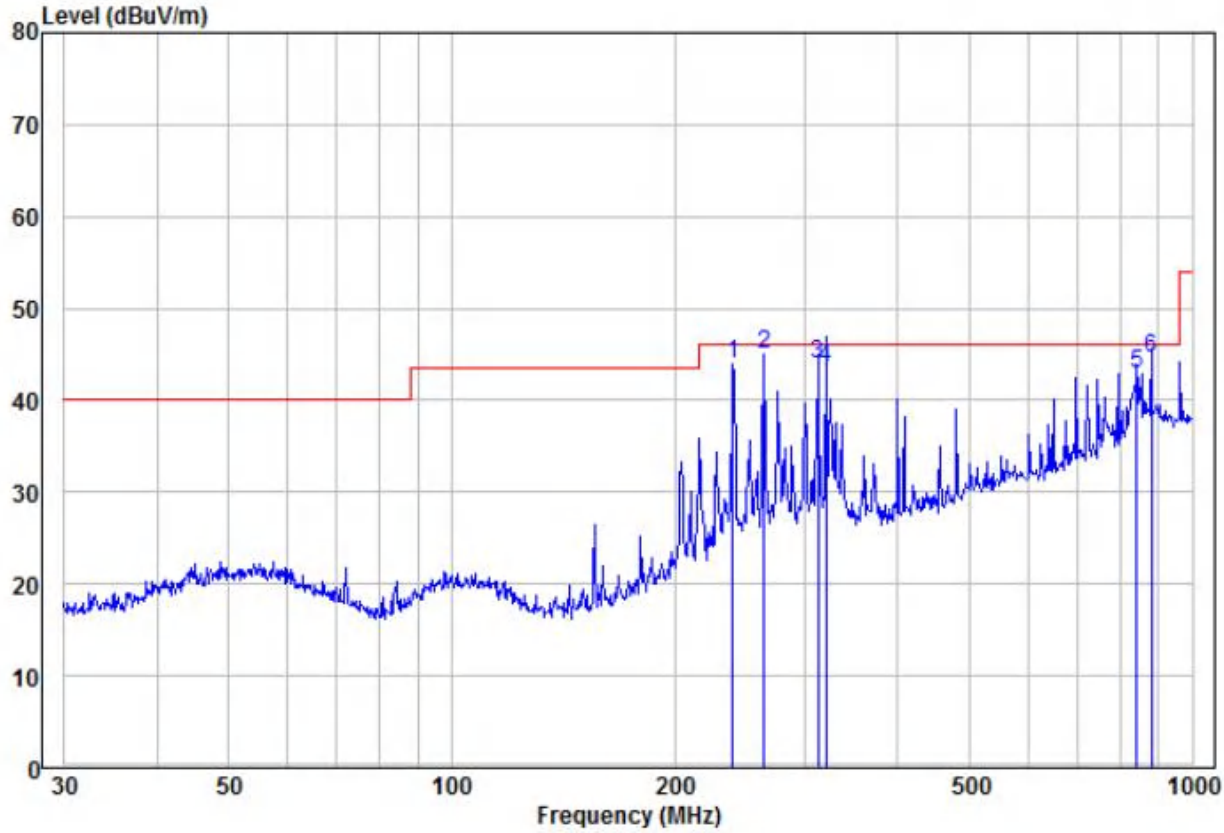

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	239.99	42.18	1.80	43.98	46.00	-2.02	QP	HORIZONTAL	100	255
2 pp	263.82	42.97	2.00	44.97	46.00	-1.03	QP	HORIZONTAL	100	221
3	312.18	42.01	2.00	44.01	46.00	-1.99	QP	HORIZONTAL	100	136
4	319.94	41.58	2.00	43.58	46.00	-2.42	QP	HORIZONTAL	100	162
5	842.13	39.42	3.50	42.92	46.00	-3.08	QP	HORIZONTAL	100	84
6	881.41	41.09	3.50	44.59	46.00	-1.41	QP	HORIZONTAL	100	121

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Factor= Antenna Factor + Cable Factor – Preamplifier Factor,
Level = Read Level + Factor,
Over Limit=Level-Limit Line.

5.9.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4824.000	52.82	-4.26	48.56	74	-25.44	peak	H	1.5	4
4824.000	37.92	-4.26	33.66	54	-20.34	AVG	H	1.5	138
7236.000	50.70	1.18	51.88	74	-22.12	peak	H	1.5	191
7236.000	38.87	1.18	40.05	54	-13.95	AVG	H	1.5	313
4824.000	54.71	-4.26	50.45	74	-23.55	peak	V	1.5	269
4824.000	38.47	-4.26	34.21	54	-19.79	AVG	V	1.5	3
7236.000	50.62	1.18	51.80	74	-22.20	peak	V	1.5	131
7236.000	34.99	1.18	36.17	54	-17.83	AVG	V	1.5	123

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4874.000	52.43	-4.12	48.31	74	-25.69	peak	H	1.5	201
4874.000	36.55	-4.12	32.43	54	-21.57	AVG	H	1.5	120
7311.000	48.99	1.46	50.45	74	-23.55	peak	H	1.5	237
7311.000	35.14	1.46	36.60	54	-17.40	AVG	H	1.5	33
4874.000	52.60	-4.12	48.48	74	-25.52	peak	V	1.5	96
4874.000	36.31	-4.12	32.19	54	-21.81	AVG	V	1.5	162
7311.000	48.27	1.46	49.73	74	-24.27	peak	V	1.5	149
7311.000	35.28	1.46	36.74	54	-17.26	AVG	V	1.5	51

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.88	-4.03	47.85	74	-26.15	peak	H	1.5	338
4924.000	38.75	-4.03	34.72	54	-19.28	AVG	H	1.5	42
7386.000	49.75	1.66	51.41	74	-22.59	peak	H	1.5	280
7386.000	37.03	1.66	38.69	54	-15.31	AVG	H	1.5	197
4924.000	54.29	-4.03	50.26	74	-23.74	peak	V	1.5	15
4924.000	37.76	-4.03	33.73	54	-20.27	AVG	V	1.5	120
7386.000	49.24	1.66	50.90	74	-23.10	peak	V	1.5	210
7386.000	36.31	1.66	37.97	54	-16.03	AVG	V	1.5	323

Remark:

1) The 1Mbps of rate of 802.11b is the worst case.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.11	-4.26	48.85	74	-25.15	peak	H	1.5	183
4824.000	37.44	-4.26	33.18	54	-20.82	AVG	H	1.5	282
7236.000	50.38	1.18	51.56	74	-22.44	peak	H	1.5	158
7236.000	37.74	1.18	38.92	54	-15.08	AVG	H	1.5	277
4824.000	54.72	-4.26	50.46	74	-23.54	peak	V	1.5	295
4824.000	39.43	-4.26	35.17	54	-18.83	AVG	V	1.5	108
7236.000	52.14	1.18	53.32	74	-20.68	peak	V	1.5	260
7236.000	36.49	1.18	37.67	54	-16.33	AVG	V	1.5	107

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.97	-4.12	47.85	74	-26.15	peak	H	1.5	340
4874.000	37.00	-4.12	32.88	54	-21.12	AVG	H	1.5	259
7311.000	49.18	1.46	50.64	74	-23.36	peak	H	1.5	58
7311.000	36.85	1.46	38.31	54	-15.69	AVG	H	1.5	145
4874.000	54.12	-4.12	50.00	74	-24.00	peak	V	1.5	133
4874.000	36.88	-4.12	32.76	54	-21.24	AVG	V	1.5	298
7311.000	49.49	1.46	50.95	74	-23.05	peak	V	1.5	198
7311.000	36.40	1.46	37.86	54	-16.14	AVG	V	1.5	254

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.73	-4.03	47.70	74	-26.30	peak	H	1.5	307
4924.000	38.96	-4.03	34.93	54	-19.07	AVG	H	1.5	21
7386.000	49.33	1.66	50.99	74	-23.01	peak	H	1.5	197
7386.000	37.54	1.66	39.20	54	-14.80	AVG	H	1.5	162
4924.000	54.95	-4.03	50.92	74	-23.08	peak	V	1.5	154
4924.000	37.01	-4.03	32.98	54	-21.02	AVG	V	1.5	64
7386.000	50.05	1.66	51.71	74	-22.29	peak	V	1.5	303
7386.000	36.98	1.66	38.64	54	-15.36	AVG	V	1.5	179

Remark:

1) The 6Mbps of rate of 802.11g is the worst case.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4824.000	53.96	-4.26	49.70	74	-24.30	peak	H	1.5	117
4824.000	36.95	-4.26	32.69	54	-21.31	AVG	H	1.5	293
7236.000	51.87	1.18	53.05	74	-20.95	peak	H	1.5	300
7236.000	38.11	1.18	39.29	54	-14.71	AVG	H	1.5	297
4824.000	55.21	-4.26	50.95	74	-23.05	peak	V	1.5	324
4824.000	38.19	-4.26	33.93	54	-20.07	AVG	V	1.5	265
7236.000	51.30	1.18	52.48	74	-21.52	peak	V	1.5	42
7236.000	35.53	1.18	36.71	54	-17.29	AVG	V	1.5	207

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
4874.000	52.40	-4.12	48.28	74	-25.72	peak	H	1.5	275
4874.000	36.24	-4.12	32.12	54	-21.88	AVG	H	1.5	95
7311.000	49.17	1.46	50.63	74	-23.37	peak	H	1.5	17
7311.000	36.90	1.46	38.36	54	-15.64	AVG	H	1.5	208
4874.000	53.25	-4.12	49.13	74	-24.87	peak	V	1.5	277
4874.000	36.03	-4.12	31.91	54	-22.09	AVG	V	1.5	300
7311.000	49.62	1.46	51.08	74	-22.92	peak	V	1.5	213
7311.000	35.54	1.46	37.00	54	-17.00	AVG	V	1.5	174

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	52.36	-4.03	48.33	74	-25.67	peak	H	1.5	201
4924.000	38.92	-4.03	34.89	54	-19.11	AVG	H	1.5	128
7386.000	50.81	1.66	52.47	74	-21.53	peak	H	1.5	359
7386.000	37.42	1.66	39.08	54	-14.92	AVG	H	1.5	328
4924.000	54.75	-4.03	50.72	74	-23.28	peak	V	1.5	234
4924.000	38.22	-4.03	34.19	54	-19.81	AVG	V	1.5	238
7386.000	50.08	1.66	51.74	74	-22.26	peak	V	1.5	182
7386.000	37.00	1.66	38.66	54	-15.34	AVG	V	1.5	342

Remark:

1) The MCS0 of rate of 802.11n20 is the worst case.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205
Test Method:	ANSI C63.10 2020
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

Test Setup:

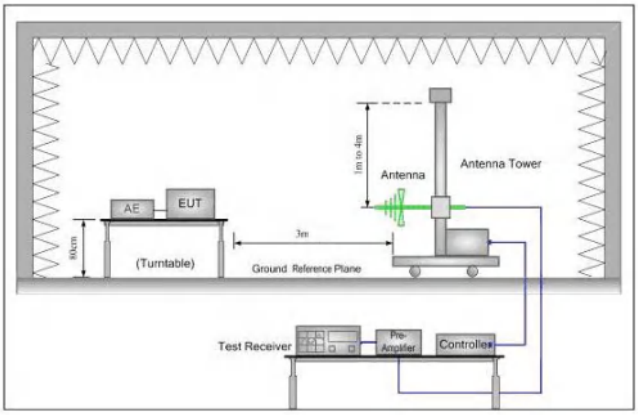

Figure 1. 30MHz to 1GHz

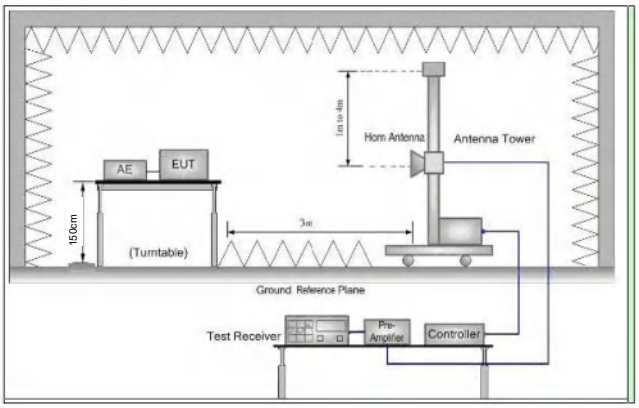

Figure 2. Above 1 GHz

Test Procedure:

a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2390.000	58.55	-9.2	49.35	74	-24.65	peak	H	1.5	91
2390.000	44.46	-9.2	35.26	54	-18.74	AVG	H	1.5	237
2400.000	59.64	-9.39	50.25	74	-23.75	peak	H	1.5	36
2400.000	46.33	-9.39	36.94	54	-17.06	AVG	H	1.5	60
2390.000	58.74	-9.2	49.54	74	-24.46	peak	V	1.5	2
2390.000	44.79	-9.2	35.59	54	-18.41	AVG	V	1.5	146
2400.000	60.03	-9.39	50.64	74	-23.36	peak	V	1.5	7
2400.000	46.77	-9.39	37.38	54	-16.62	AVG	V	1.5	317

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2483.500	57.95	-9.29	48.66	74	-25.34	peak	H	1.5	23
2483.500	43.95	-9.29	34.66	54	-19.34	AVG	H	1.5	127
2483.500	57.81	-9.29	48.52	74	-25.48	peak	V	1.5	66
2483.500	46.41	-9.29	37.12	54	-16.88	AVG	V	1.5	6

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2390.000	58.36	-9.2	49.16	74	-24.84	peak	H	1.5	214
2390.000	44.75	-9.2	35.55	54	-18.45	AVG	H	1.5	38
2400.000	59.57	-9.39	50.18	74	-23.82	peak	H	1.5	277
2400.000	46.75	-9.39	37.36	54	-16.64	AVG	H	1.5	28
2390.000	58.27	-9.2	49.07	74	-24.93	peak	V	1.5	176
2390.000	44.43	-9.2	35.23	54	-18.77	AVG	V	1.5	295
2400.000	59.32	-9.39	49.93	74	-24.07	peak	V	1.5	271
2400.000	46.25	-9.39	36.86	54	-17.14	AVG	V	1.5	19

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2483.500	57.84	-9.29	48.55	74	-25.45	peak	H	1.5	82
2483.500	44.05	-9.29	34.76	54	-19.24	AVG	H	1.5	9
2483.500	58.42	-9.29	49.13	74	-24.87	peak	V	1.5	332
2483.500	45.87	-9.29	36.58	54	-17.42	AVG	V	1.5	341

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2390.000	58.40	-9.2	49.20	74	-24.80	peak	H	1.5	293
2390.000	44.45	-9.2	35.25	54	-18.75	AVG	H	1.5	56
2400.000	60.19	-9.39	50.80	74	-23.20	peak	H	1.5	262
2400.000	46.53	-9.39	37.14	54	-16.86	AVG	H	1.5	41
2390.000	59.15	-9.2	49.95	74	-24.05	peak	V	1.5	233
2390.000	44.50	-9.2	35.30	54	-18.70	AVG	V	1.5	210
2400.000	59.77	-9.39	50.38	74	-23.62	peak	V	1.5	170
2400.000	46.63	-9.39	37.24	54	-16.76	AVG	V	1.5	156

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Over (dB)	Detector Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
2483.500	57.54	-9.29	48.25	74	-25.75	peak	H	1.5	110
2483.500	44.05	-9.29	34.76	54	-19.24	AVG	H	1.5	44
2483.500	58.14	-9.29	48.85	74	-25.15	peak	V	1.5	219
2483.500	46.01	-9.29	36.72	54	-17.28	AVG	V	1.5	231

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

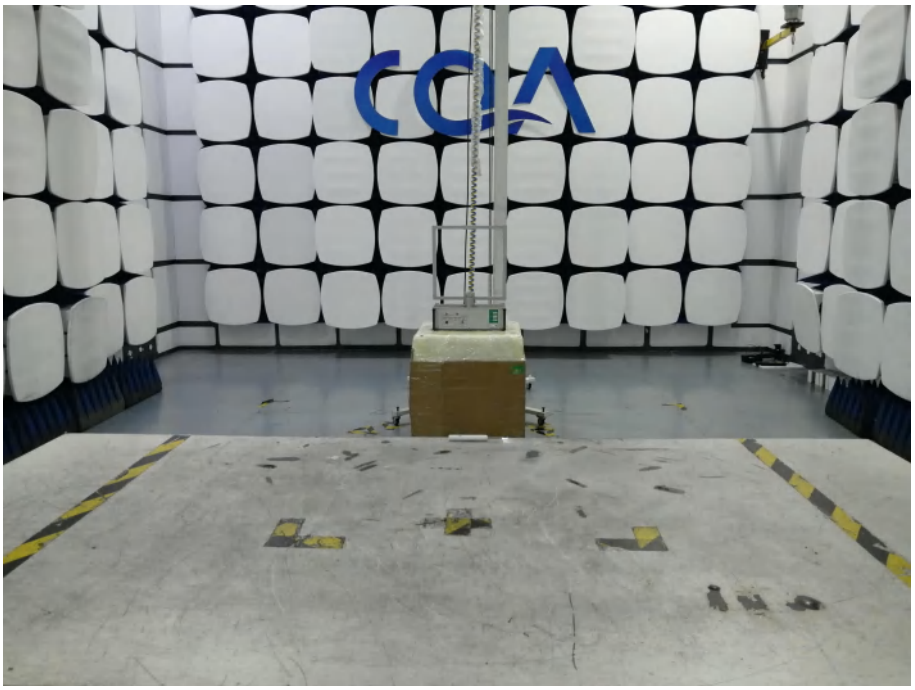

30MHz~1GHz:

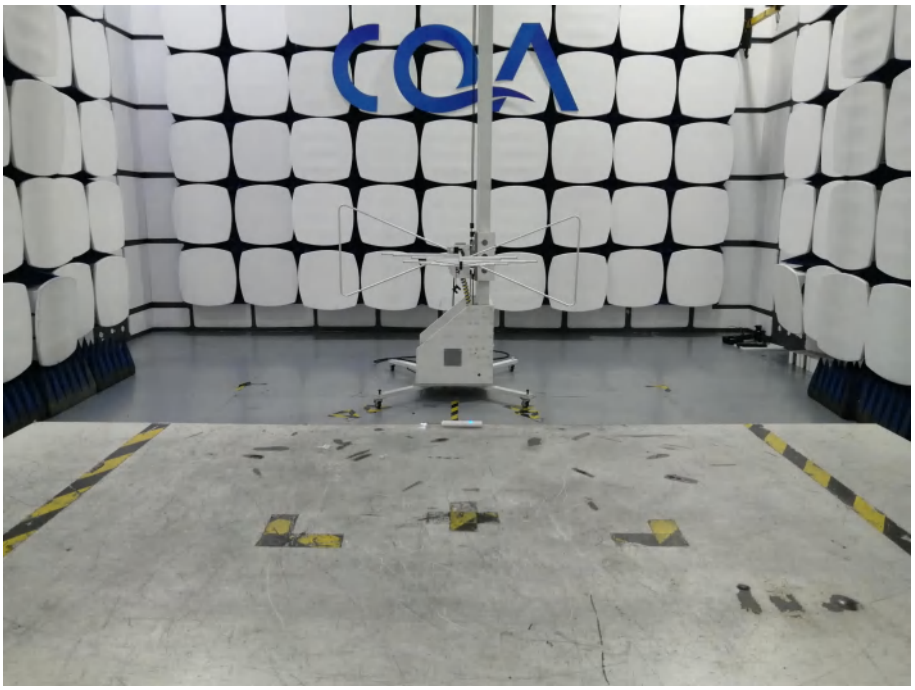

Above 1GHz:

6.2 Conducted Emission

6.3 RF Conducted measurement

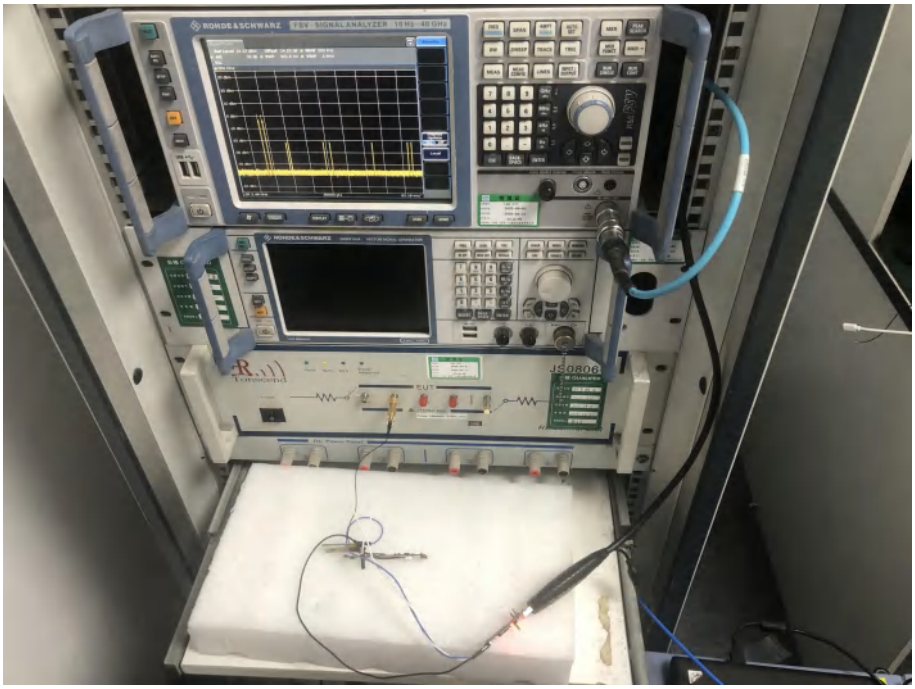

7 Photographs - EUT Constructional Details

Made in China
撸尺

Made in China
撸尺

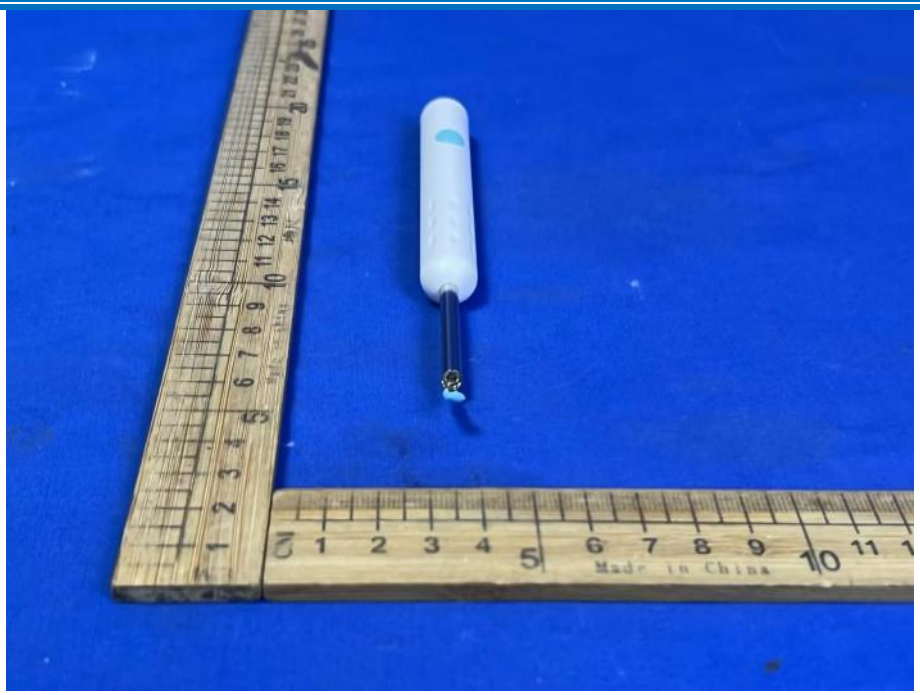
Made in China

Made in China
撸尺

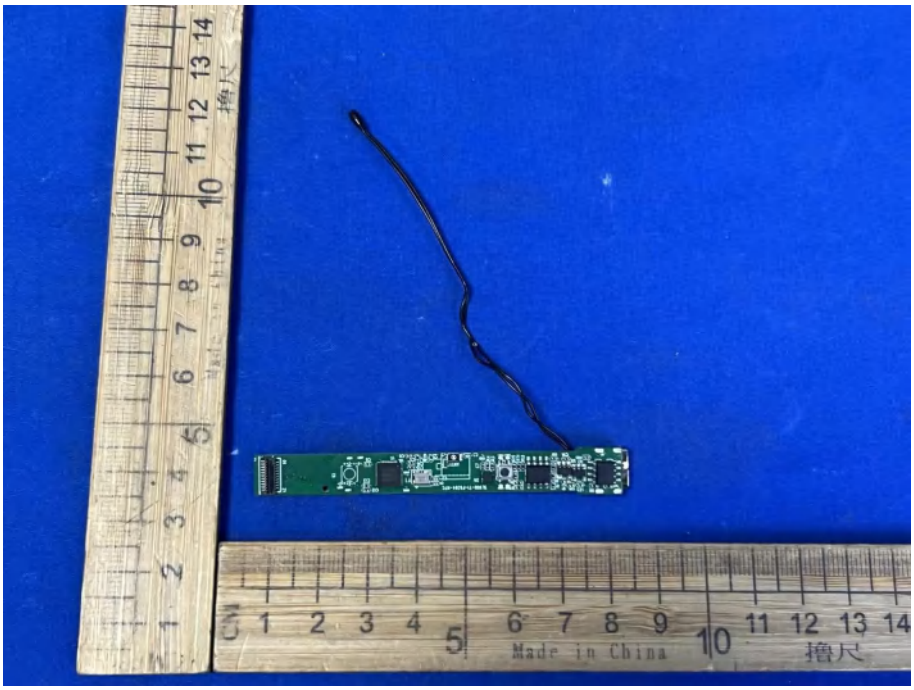
Made in China

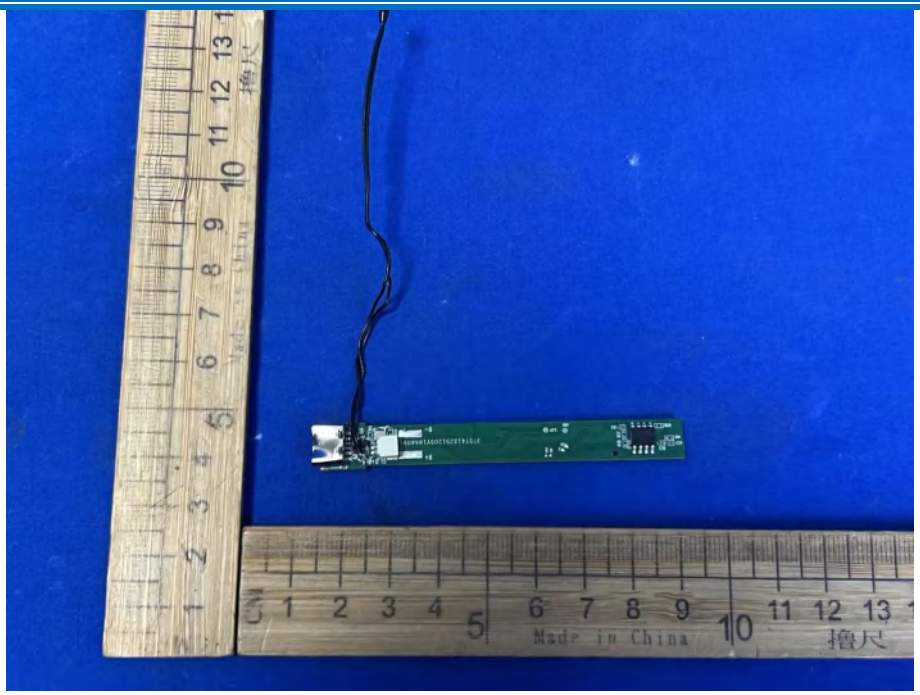
Made in China

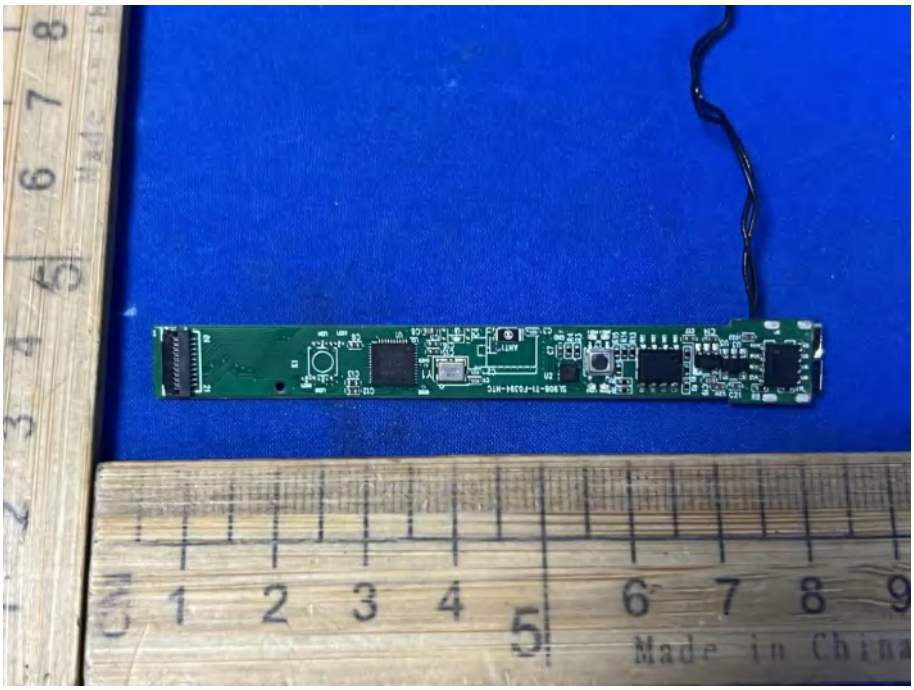
Made in China

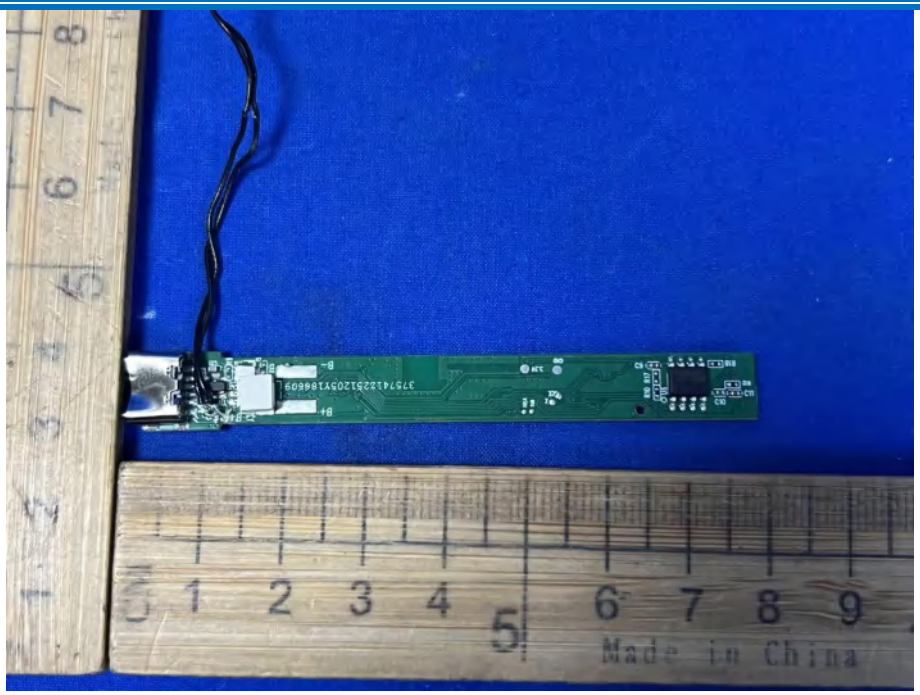

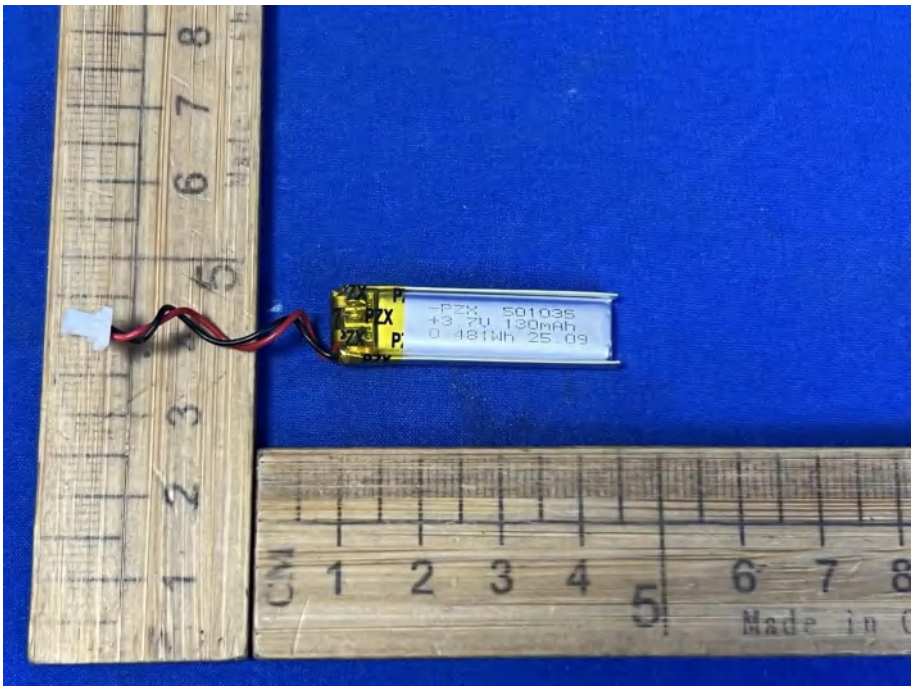

*** END OF REPORT ***