



FCC AND ISCED CERTIFICATION TEST REPORT

Applicant	:	Guangzhou Chuang Rui Automobile Electric Appliance Co., Ltd.
Address of Applicant	:	NO.8 Shenshan East Road Baiyun District, Guangzhou City, 510460, Guangdong, P.R. China
Manufacturer	:	Guangzhou Chuang Rui Automobile Electric Appliance Co., Ltd.
Address of Manufacturer	:	NO.8 Shenshan East Road Baiyun District, Guangzhou City, 510460, Guangdong, P.R. China
Equipment under Test	:	Meter
FVIN/Model No.	:	6AQ9-42, 6AQ4-73, 6AQ4-71
FCC ID	:	2BTEP-6AQ942
IC	:	34894-6AQ942
HVIN	:	6AQ9-42
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+ Errata to C63.10a-2024, RSS-247 Issue 4 July 24, 2025, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021) ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+ Errata to C63.10a-2024
Report No.	:	DDT-RE25032516-1E01
Issue Date	:	2026/09/15
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	8
2.3.	Block diagram of EUT configuration for test.....	8
2.4.	Decision of final test mode	8
2.5.	Deviations of test standard	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty	10
3.	Equipment Used During Conductive Test	11
4.	20 dB Bandwidth	12
4.1.	Block diagram of test setup	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Test graphs	14
5.	99% Bandwidth	17
5.1.	Block diagram of test setup	17
5.2.	Limits	17
5.3.	Test procedure	17
5.4.	Test result.....	18
5.5.	Test graphs	19
6.	Maximum Peak Output Power.....	22
6.1.	Block diagram of test setup	22
6.2.	Limits	22
6.3.	Test procedure	22
6.4.	Test result.....	23
6.5.	Test graphs	24
7.	Carrier Frequency Separation	27
7.1.	Block diagram of test setup	27
7.2.	Limits	27
7.3.	Test procedure	27
7.4.	Test result.....	28
7.5.	Test graphs	29
8.	Dwell Time.....	30

8.1.	Block diagram of test setup	30
8.2.	Limits	30
8.3.	Test procedure	30
8.4.	Test result.....	31
8.5.	Test graphs	32
9.	Number of Hopping Channel.....	38
9.1.	Block diagram of test setup	38
9.2.	Limits	38
9.3.	Test procedure	38
9.4.	Test result.....	39
9.5.	Test graphs	40
10.	Band Edge Compliance (Conducted Method).....	41
10.1.	Block diagram of test setup	41
10.2.	Limit.....	41
10.3.	Test procedure	41
10.4.	Test result.....	42
10.5.	Test graphs	43
11.	RF Conducted Spurious Emissions.....	47
11.1.	Block diagram of test setup	47
11.2.	Limits	47
11.3.	Test procedure	47
11.4.	Test result.....	48
11.5.	Test graphs	49
12.	Duty cycle.....	58
12.1.	Block diagram of test setup	58
12.2.	Limit.....	58
12.3.	Test procedure	58
12.4.	Test result.....	59
12.5.	Test graphs	60
13.	Antenna Requirements.....	63
13.1.	Limit.....	63
13.2.	Result	63
14.	Radiated Emission	64
14.1.	Test equipment.....	64
14.2.	Block diagram of test setup	65
14.3.	Limits	66
14.4.	Assistant equipment used for test	68
14.5.	Test procedure	68

14.6.	Test result.....	70
14.7.	Test data	71
15.	Band Edge Compliance.....	79
15.1.	Test equipment.....	79
15.2.	Block diagram of test setup	80
15.3.	Limits	80
15.4.	Assistant equipment used for test	80
15.5.	Test procedure	80
15.6.	Test result.....	80
15.7.	Test data	81
16.	Power Line Conducted Emissions.....	93
16.1.	Test equipment.....	93
16.2.	Block diagram of test setup	93
16.3.	Limits	93
16.4.	Assistant equipment used for test	93
16.5.	Test procedure	94
16.6.	Test result.....	94
17.	Test Setup Photograph	95
18.	Photos of the EUT	97

Test Report Declare

Applicant	:	Guangzhou Chuang Rui Automobile Electric Appliance Co., Ltd.
Address of Applicant	:	NO.8 Shenshan East Road Baiyun District, Guangzhou City, 510460, Guangdong, P.R. China
Equipment under Test	:	Meter
FVIN/Model No.	:	6AQ9-42, 6AQ4-73, 6AQ4-71
HVIN	:	6AQ9-42
Manufacturer	:	Guangzhou Chuang Rui Automobile Electric Appliance Co., Ltd.
Address of Manufacturer	:	NO.8 Shenshan East Road Baiyun District, Guangzhou City, 510460, Guangdong, P.R. China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024,
RSS-247 Issue 4 July 24, 2025,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
ANSI C63 10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25032516-1E01		
Date of Receipt:	2025/07/07	Date of Test:	2025/07/18 - 2025/09/02

Created: Jacky Huang	Reviewed: Johnson Huang	Approved: Damon Hu
		
2025/11/09	2026/09/15	2026/09/15

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/09/15	Damon Hu

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 4 clause 6.2.3	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 4 clause 6.2.1	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 4 clause 6.2.3	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 4 clause 6.2.3	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 4 clause 6.2.3	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 4 clause 6.6	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 4 clause 6.6, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 4 clause 6.6, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Antenna Requirement	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
11	Power Line Conducted Emissions	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	N/A
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: Meter
FVIN/Model Number	: 6AQ9-42, 6AQ4-73, 6AQ4-71
HVIN	: 6AQ9-42
Difference of model number	: The difference is model name and software function. So, choose 6AQ9-42 to test.
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 12V
Antenna Type	: ceramic antenna
Max Antenna Gain (dBi)	: 4.3
Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz-2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Rate	: 1 Mbps, 2 Mbps, 3 Mbps

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: BlueSuite 2.6.7.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	Default	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
8DPSK hopping off Tx mode	Default	CH0	2402
	Default	CH39	2441
	Default	CH78	2480
Worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date	Cal. Interval
☒ RF Connected Test (RF Measurement System 2#)					
SPECTRUM ANALYZER	R&S	FSU26	201124	2026/07/06	1 Year
Power Sensor	R&S	NRP-Z22	101254	2026/07/06	1 Year
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

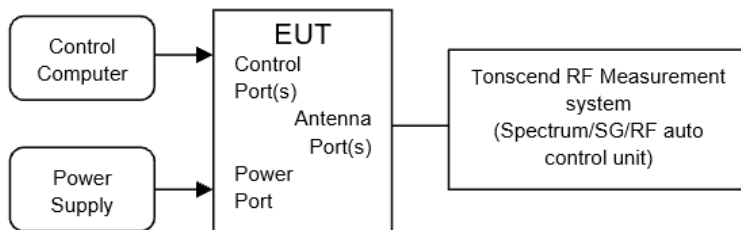

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold


- (5) Measure and record the results in the report.


4.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃,45.3%RH	Test Date:	2025.07.18
Test Power Supply:	DC 12V	Sample Number:	S25032516

Test Mode	Antenna	Frequency [MHz]	20dB EBW [MHz]
DH5	Ant1	2402	0.96
		2441	0.98
		2480	0.96
2DH5	Ant1	2402	1.29
		2441	1.28
		2480	1.28
3DH5	Ant1	2402	1.29
		2441	1.28
		2480	1.28

4.5. Test graphs

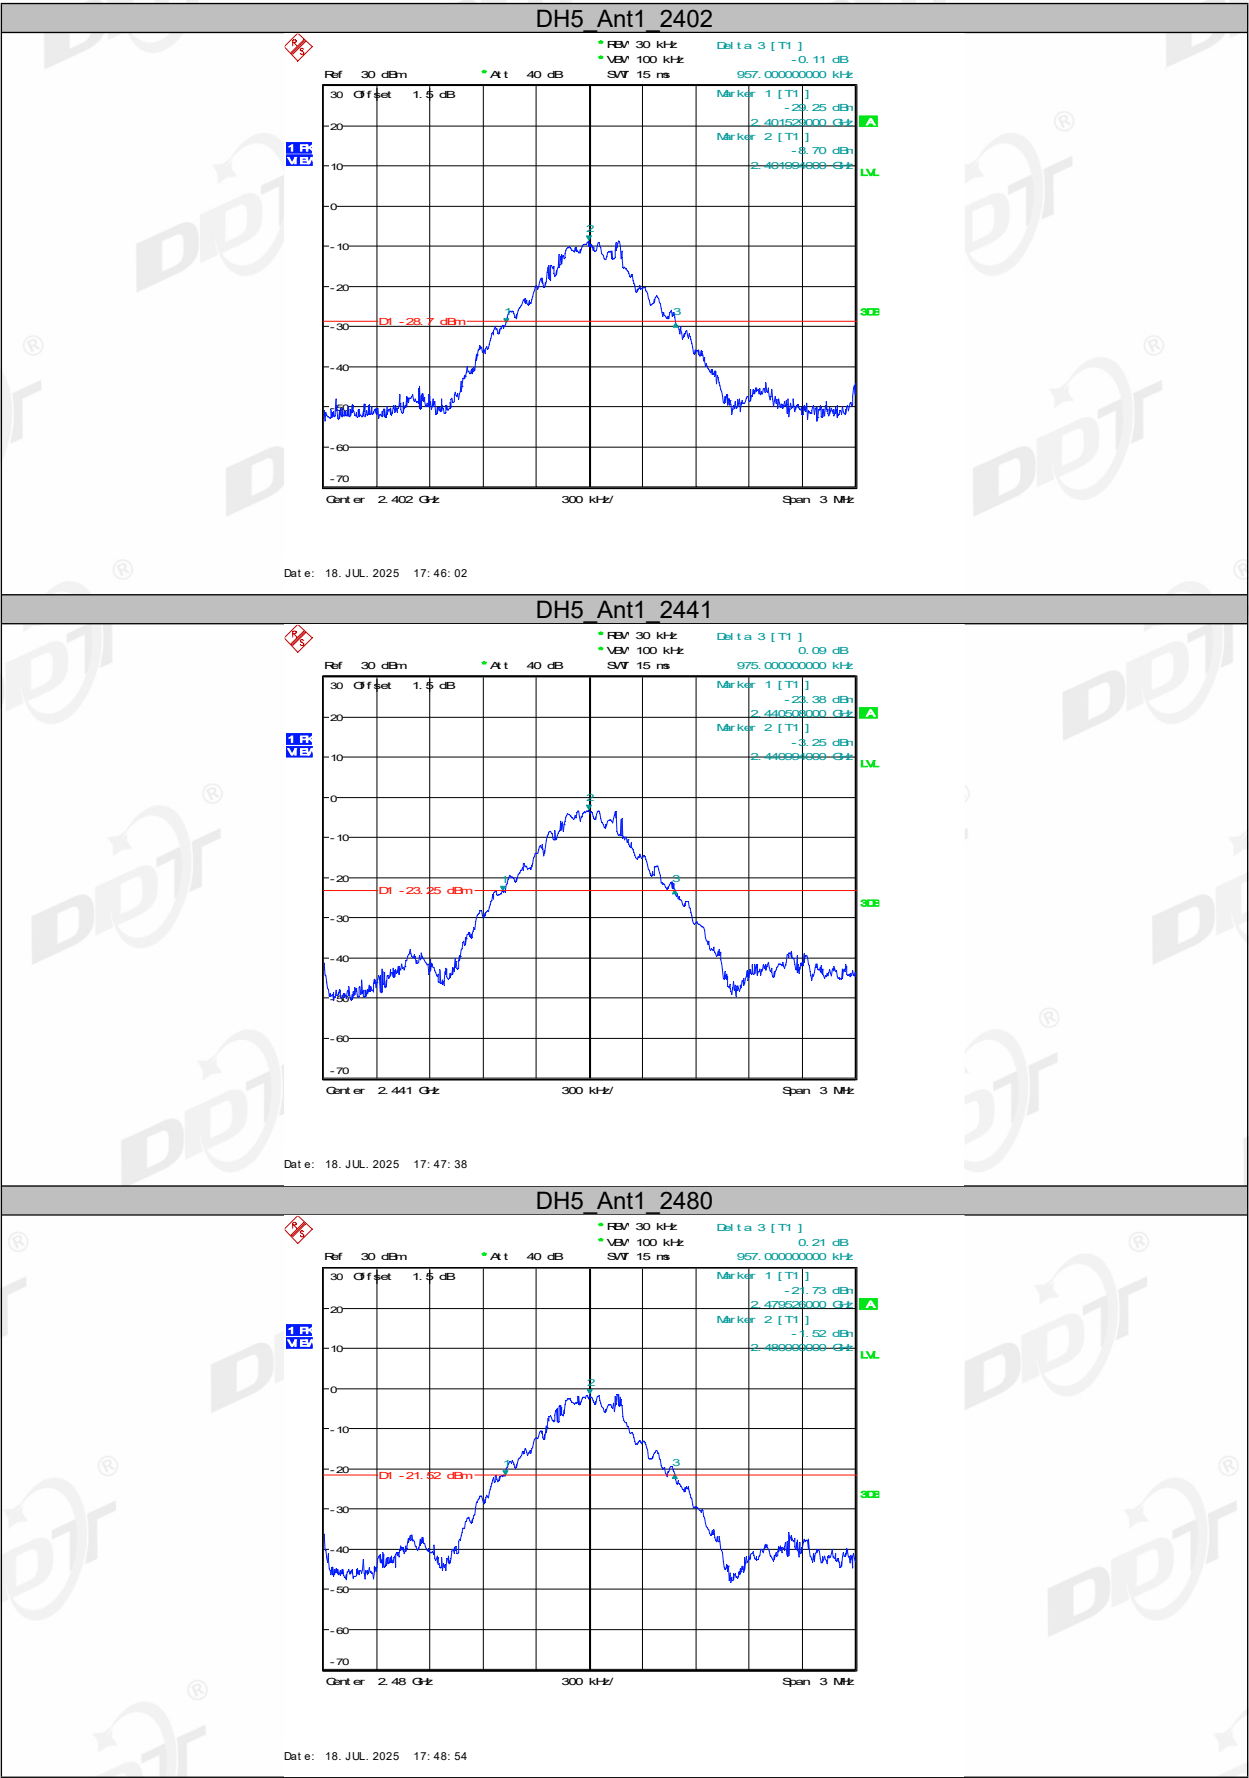


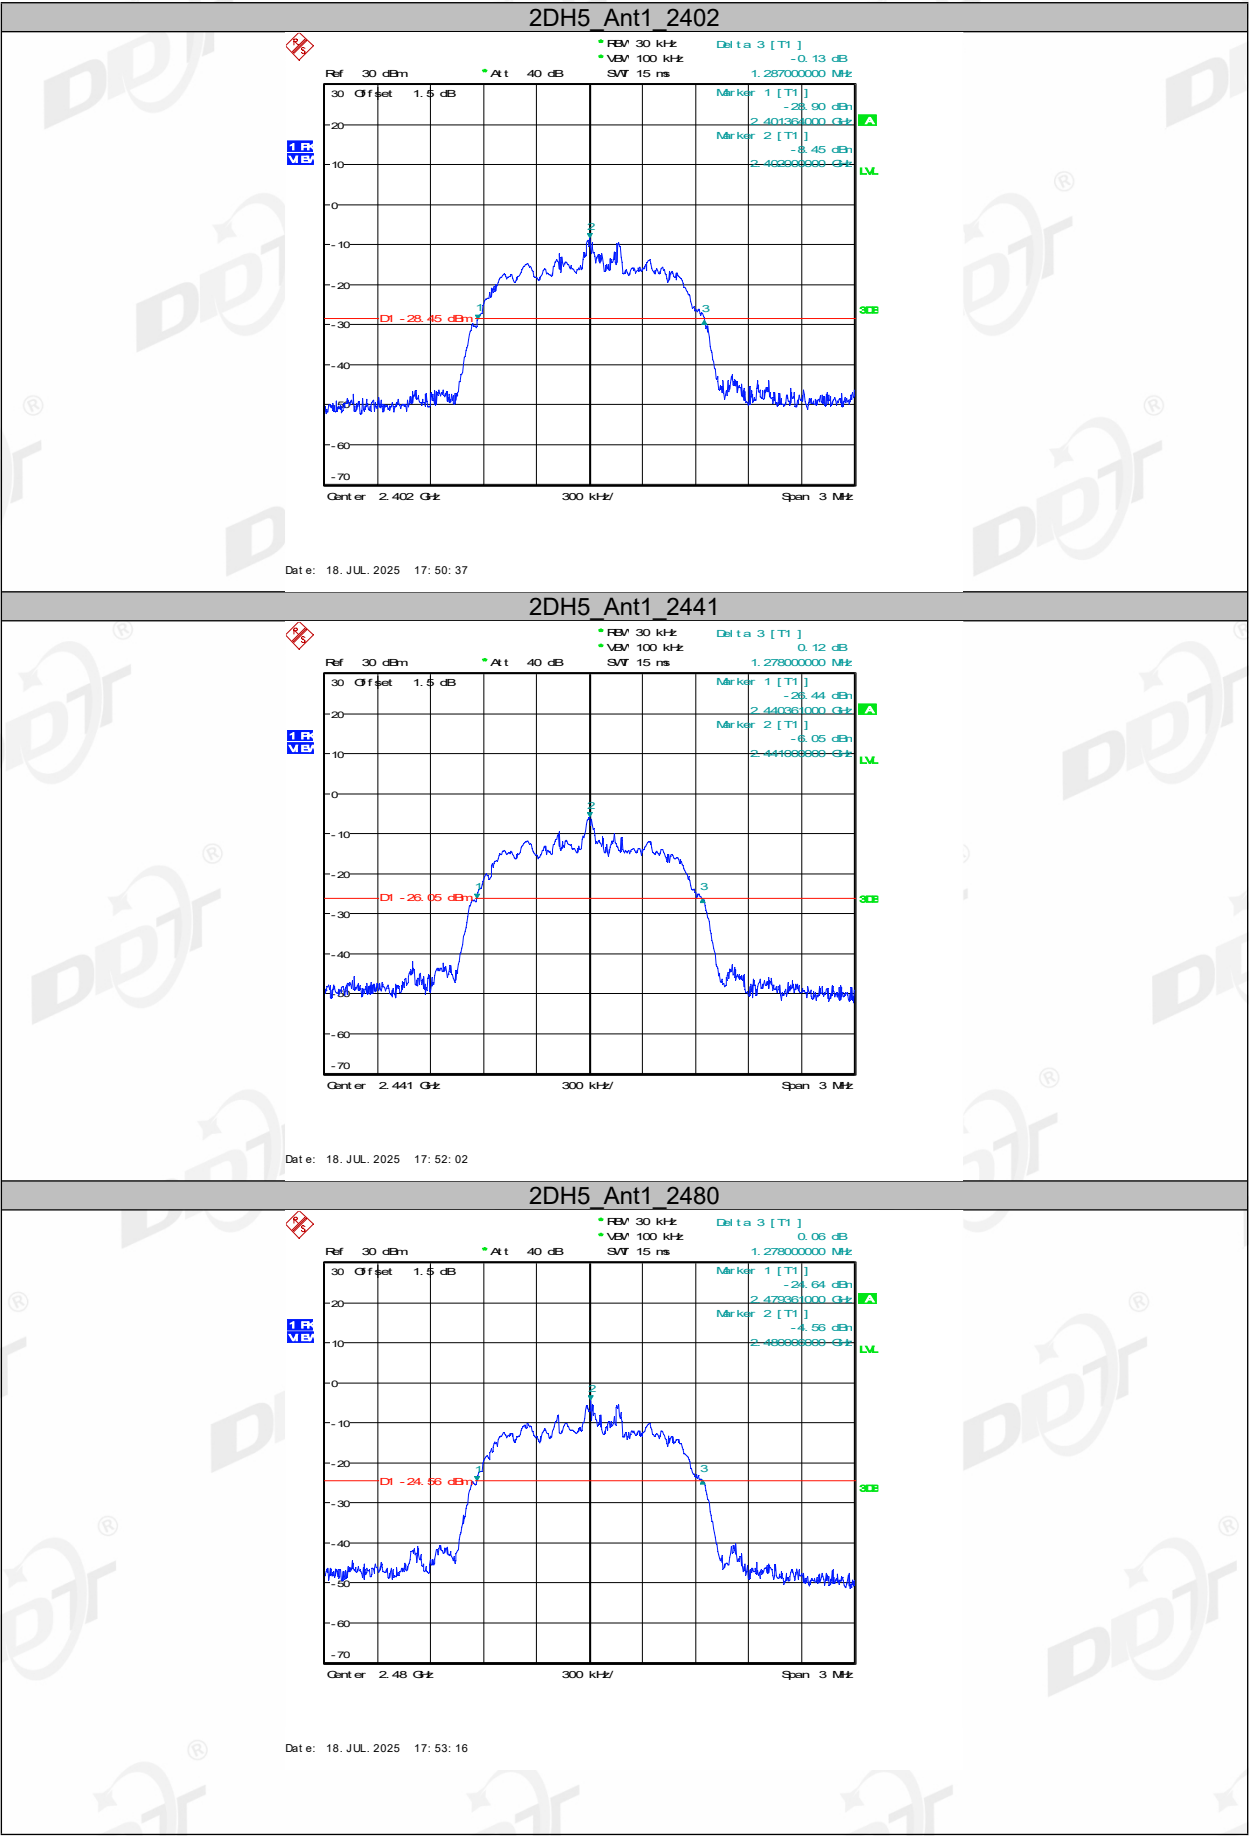

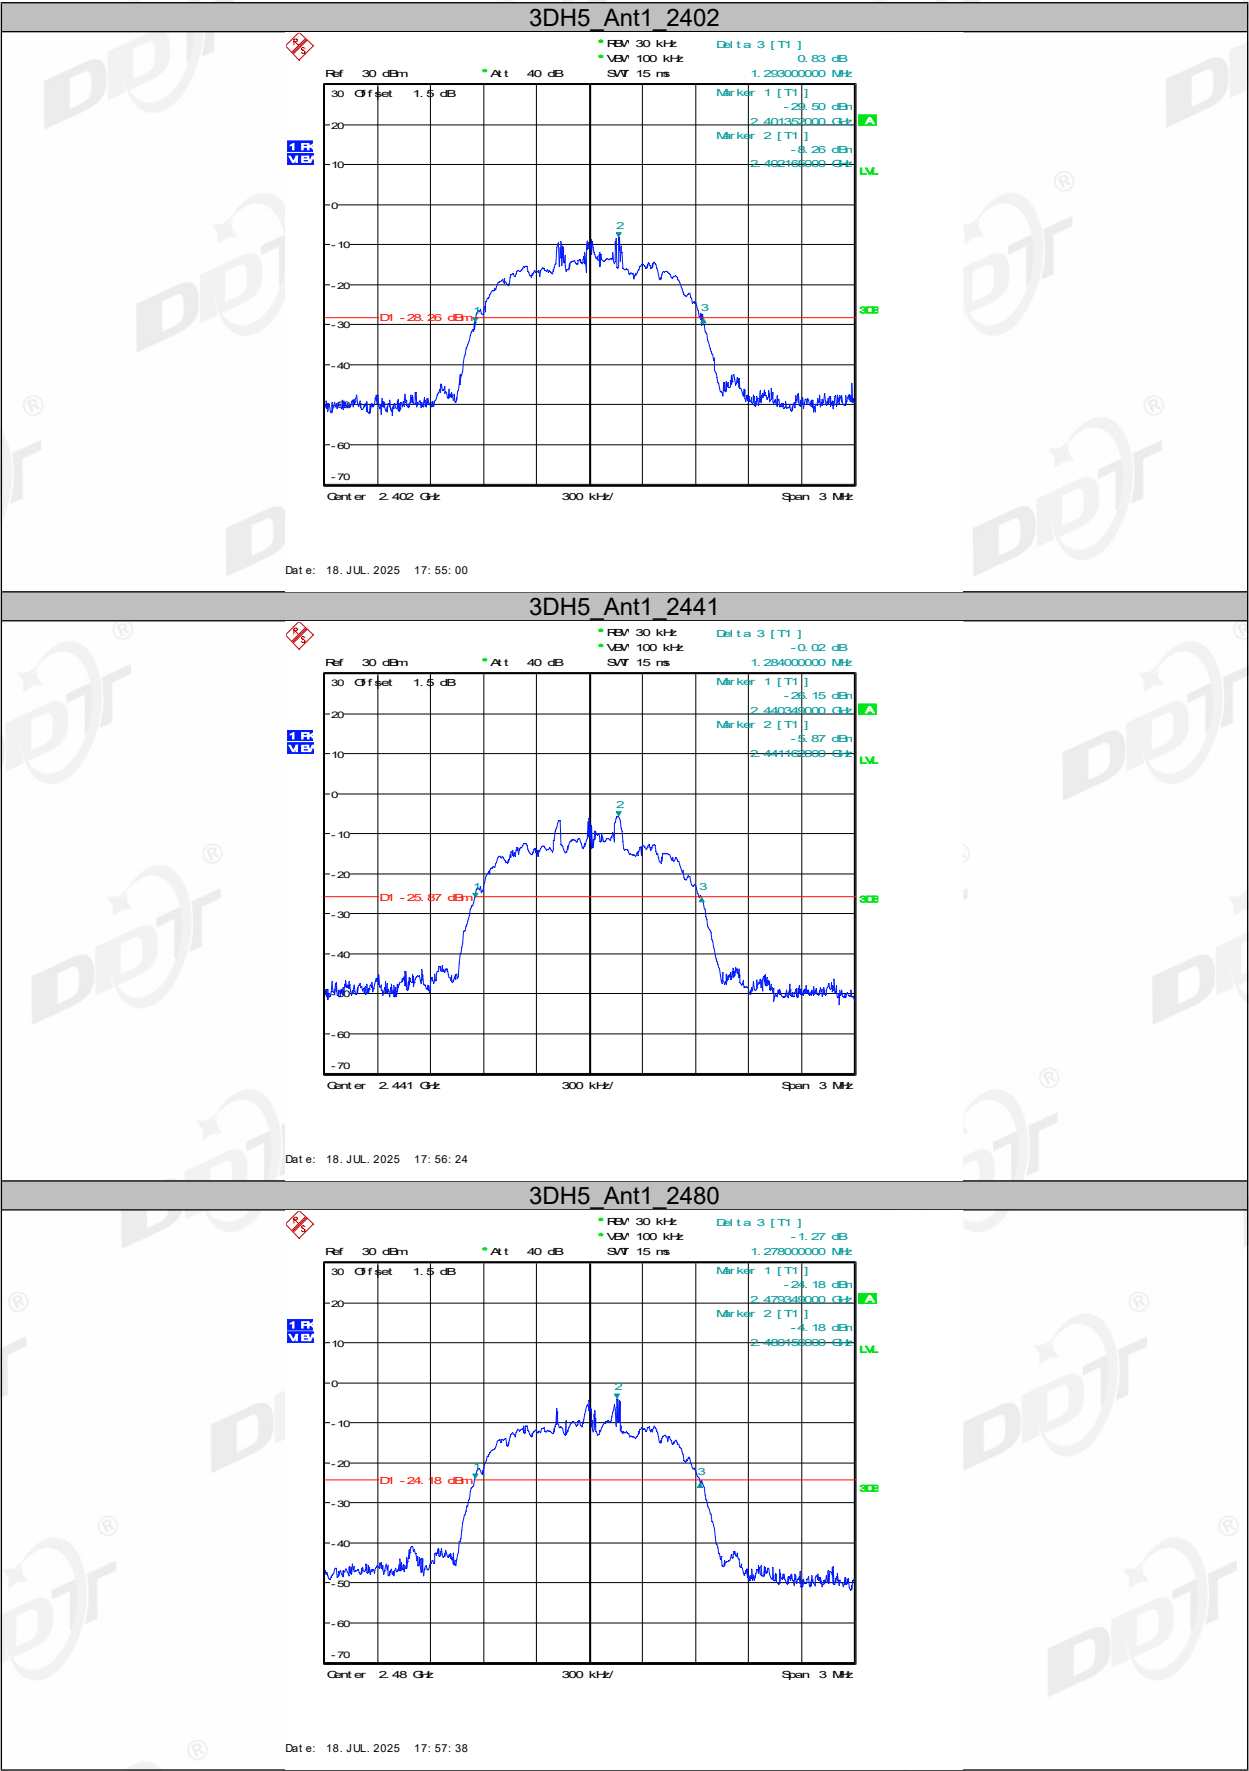

5. 99% Bandwidth

5.1. Block diagram of test setup

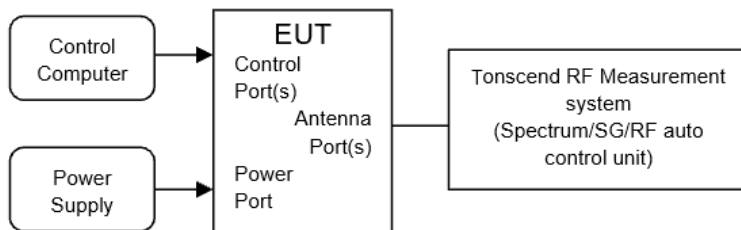

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW: 1% to 5% of the OBW

VBW: approximately three times RBW

Span: between 1.5 times and 5.0 times the OBW

Detector Mode: Peak

Sweep time: Auto

Trace mode: Max hold


- (5) Measure and record the results in the report.


5.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃, 45.3%RH	Test Date:	2025.07.18
Test Power Supply:	DC 12V	Sample Number:	S25032516

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]
DH5	Ant1	2402	0.891	2401.5590	2402.4500
		2441	0.879	2440.5500	2441.4290
		2480	0.882	2479.5500	2480.4320
2DH5	Ant1	2402	1.185	2401.4090	2402.5940
		2441	1.176	2440.4000	2441.5760
		2480	1.176	2479.4000	2480.5760
3DH5	Ant1	2402	1.179	2401.4120	2402.5910
		2441	1.173	2440.4030	2441.5760
		2480	1.173	2479.4030	2480.5760

5.5. Test graphs

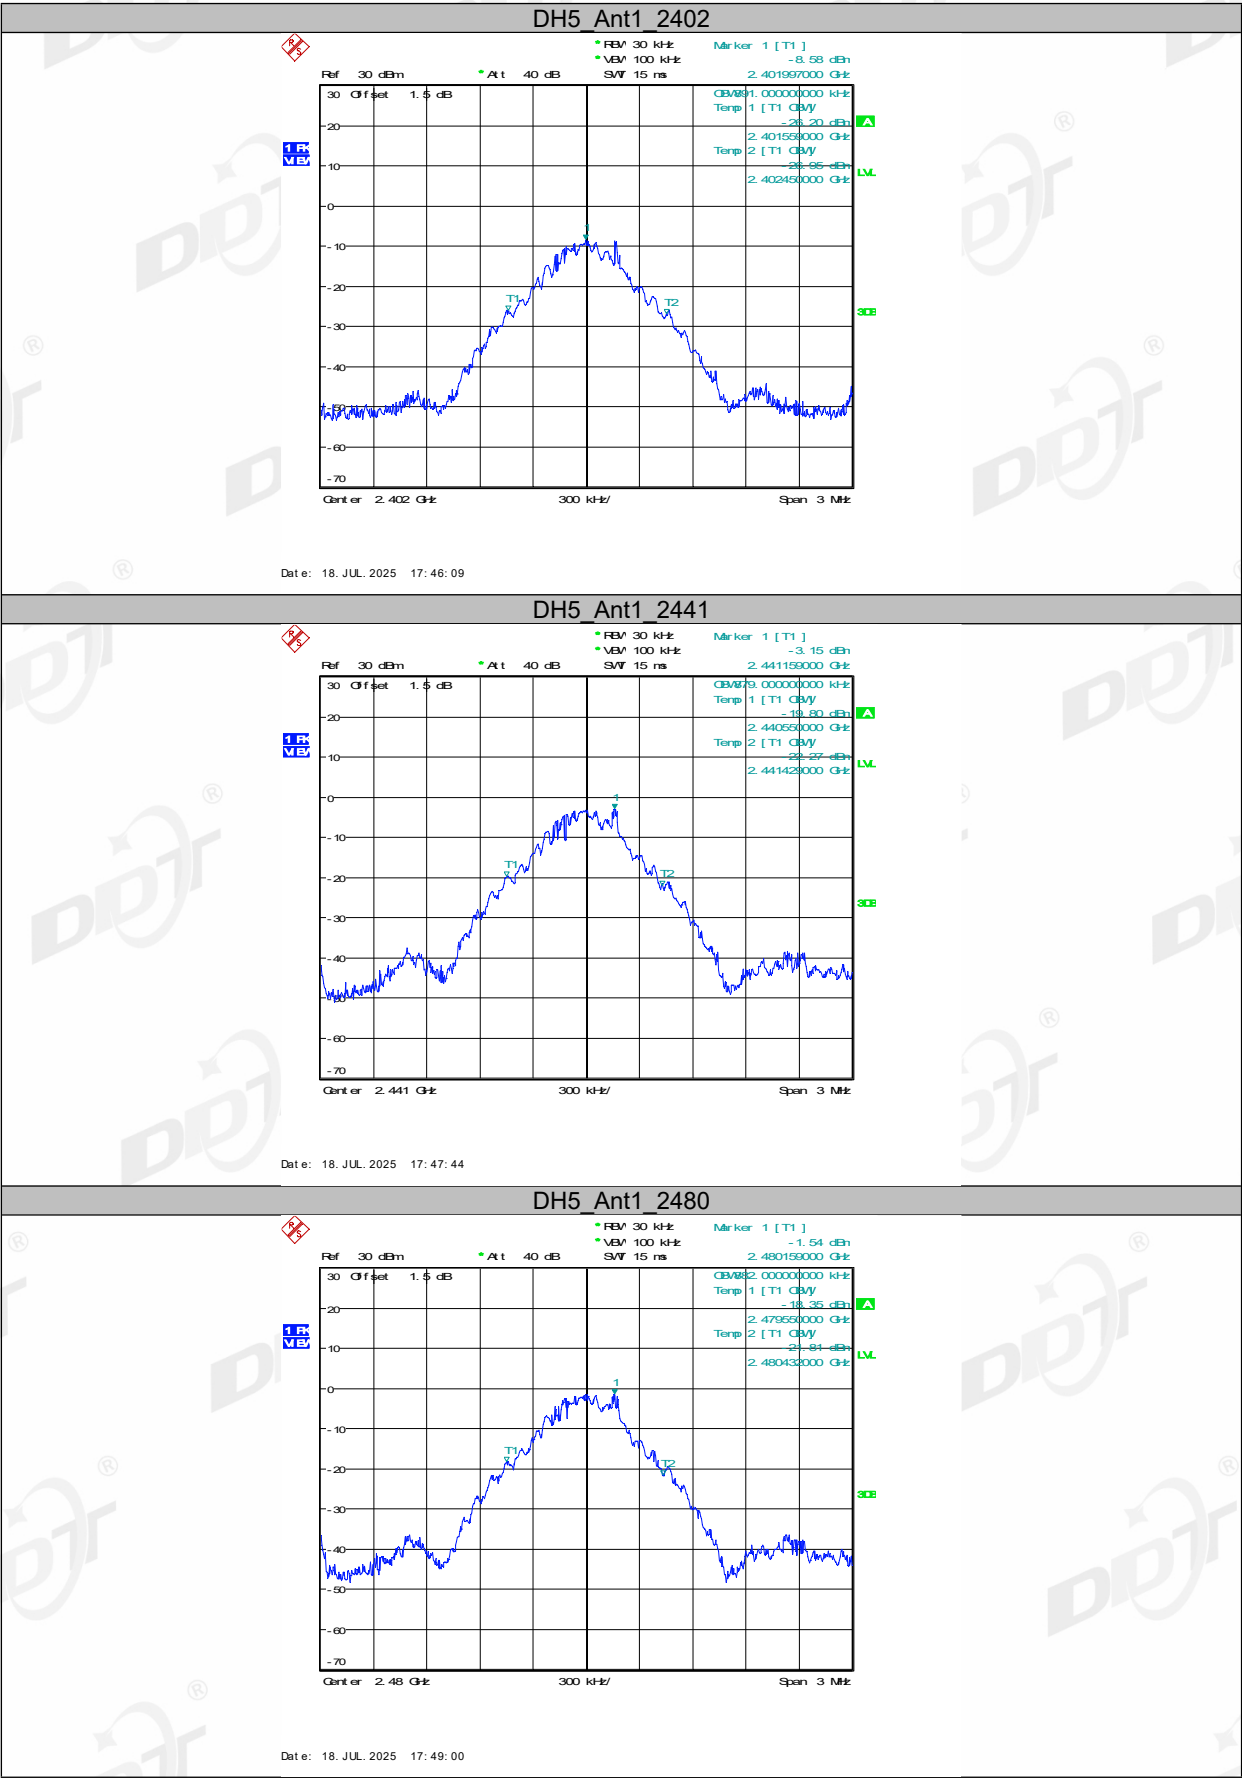


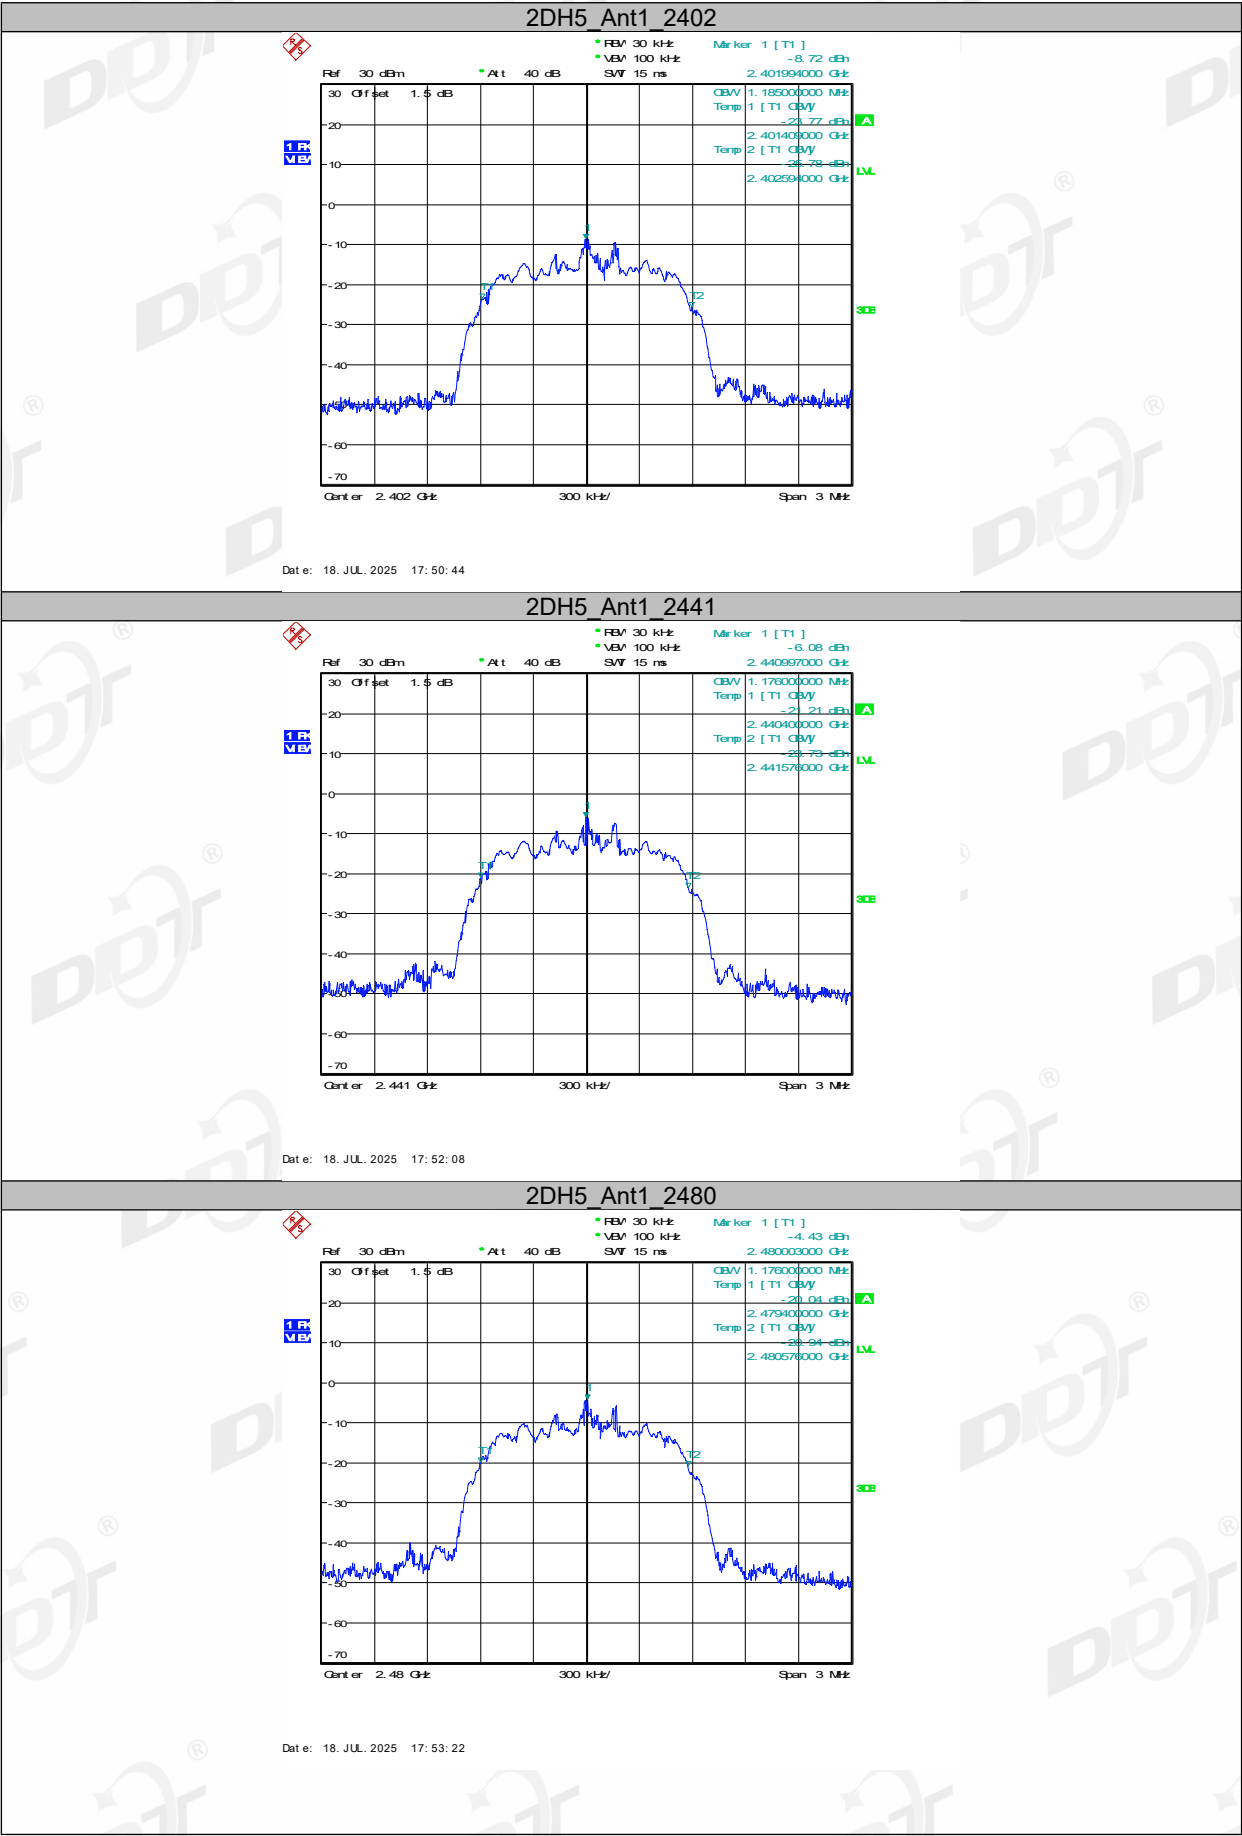

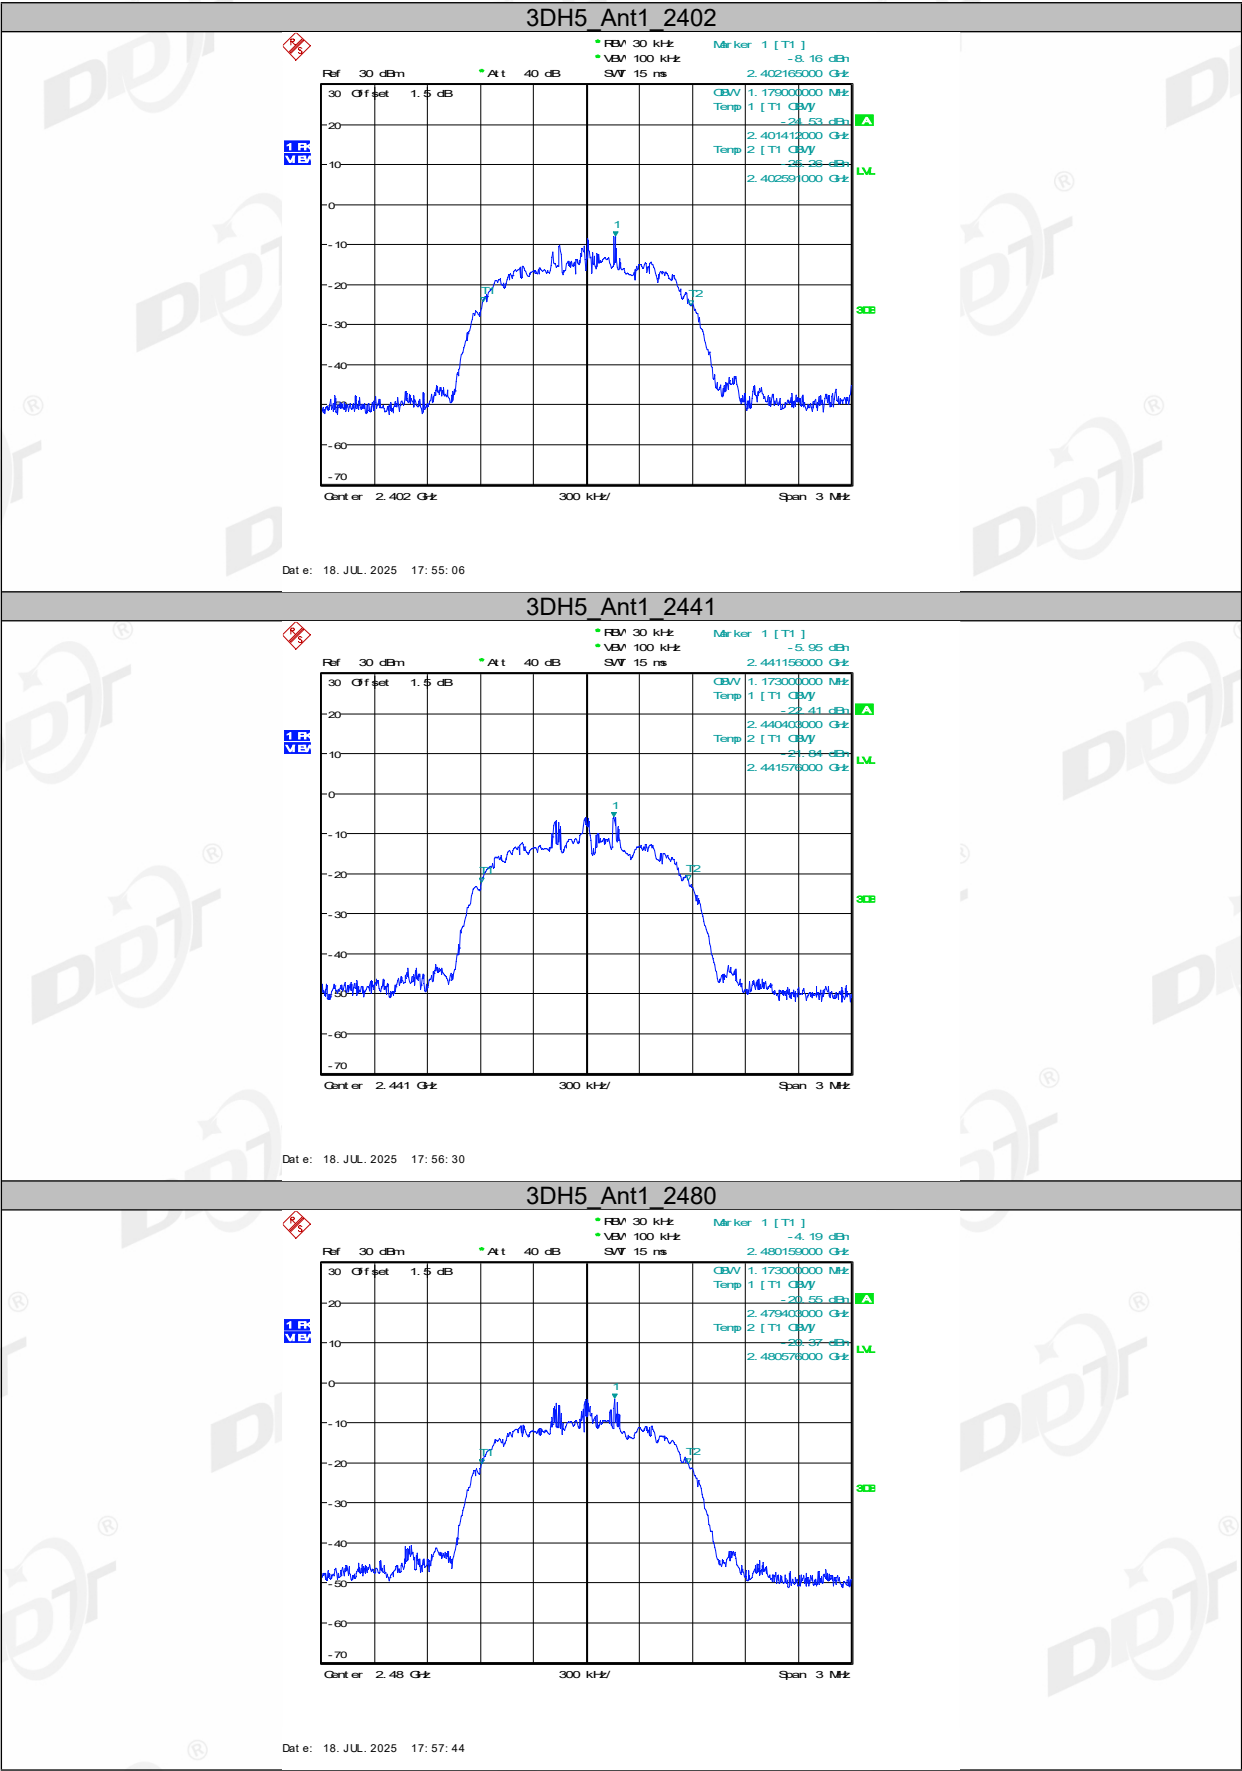

6. Maximum Peak Output Power

6.1. Block diagram of test setup

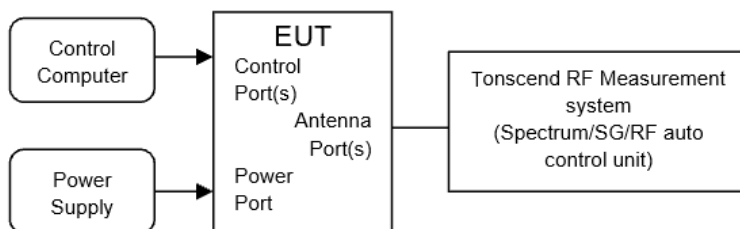

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure


- (1) The test according to ANSI C63.10-2020 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 - RBW: > 20 dB bandwidth of the emission being measured.
 - VBW: $VBW \geq RBW$.
 - Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - Detector Mode: Peak
 - Sweep time: Auto
 - Trace mode: Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

6.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃, 45.3%RH	Test Date:	2025.07.23
Test Power Supply:	DC 12V	Sample Number:	S25032516

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
DH5	Ant1	2402	-1.66	≤20.97	2.64	≤36	PASS
		2441	0.40	≤20.97	4.70	≤36	PASS
		2480	1.77	≤20.97	6.07	≤36	PASS
2DH5	Ant1	2402	-3.95	≤20.97	0.35	≤36	PASS
		2441	-1.79	≤20.97	2.51	≤36	PASS
		2480	-0.36	≤20.97	3.94	≤36	PASS
3DH5	Ant1	2402	-3.62	≤20.97	0.68	≤36	PASS
		2441	-1.43	≤20.97	2.87	≤36	PASS
		2480	0.10	≤20.97	4.40	≤36	PASS

6.5. Test graphs

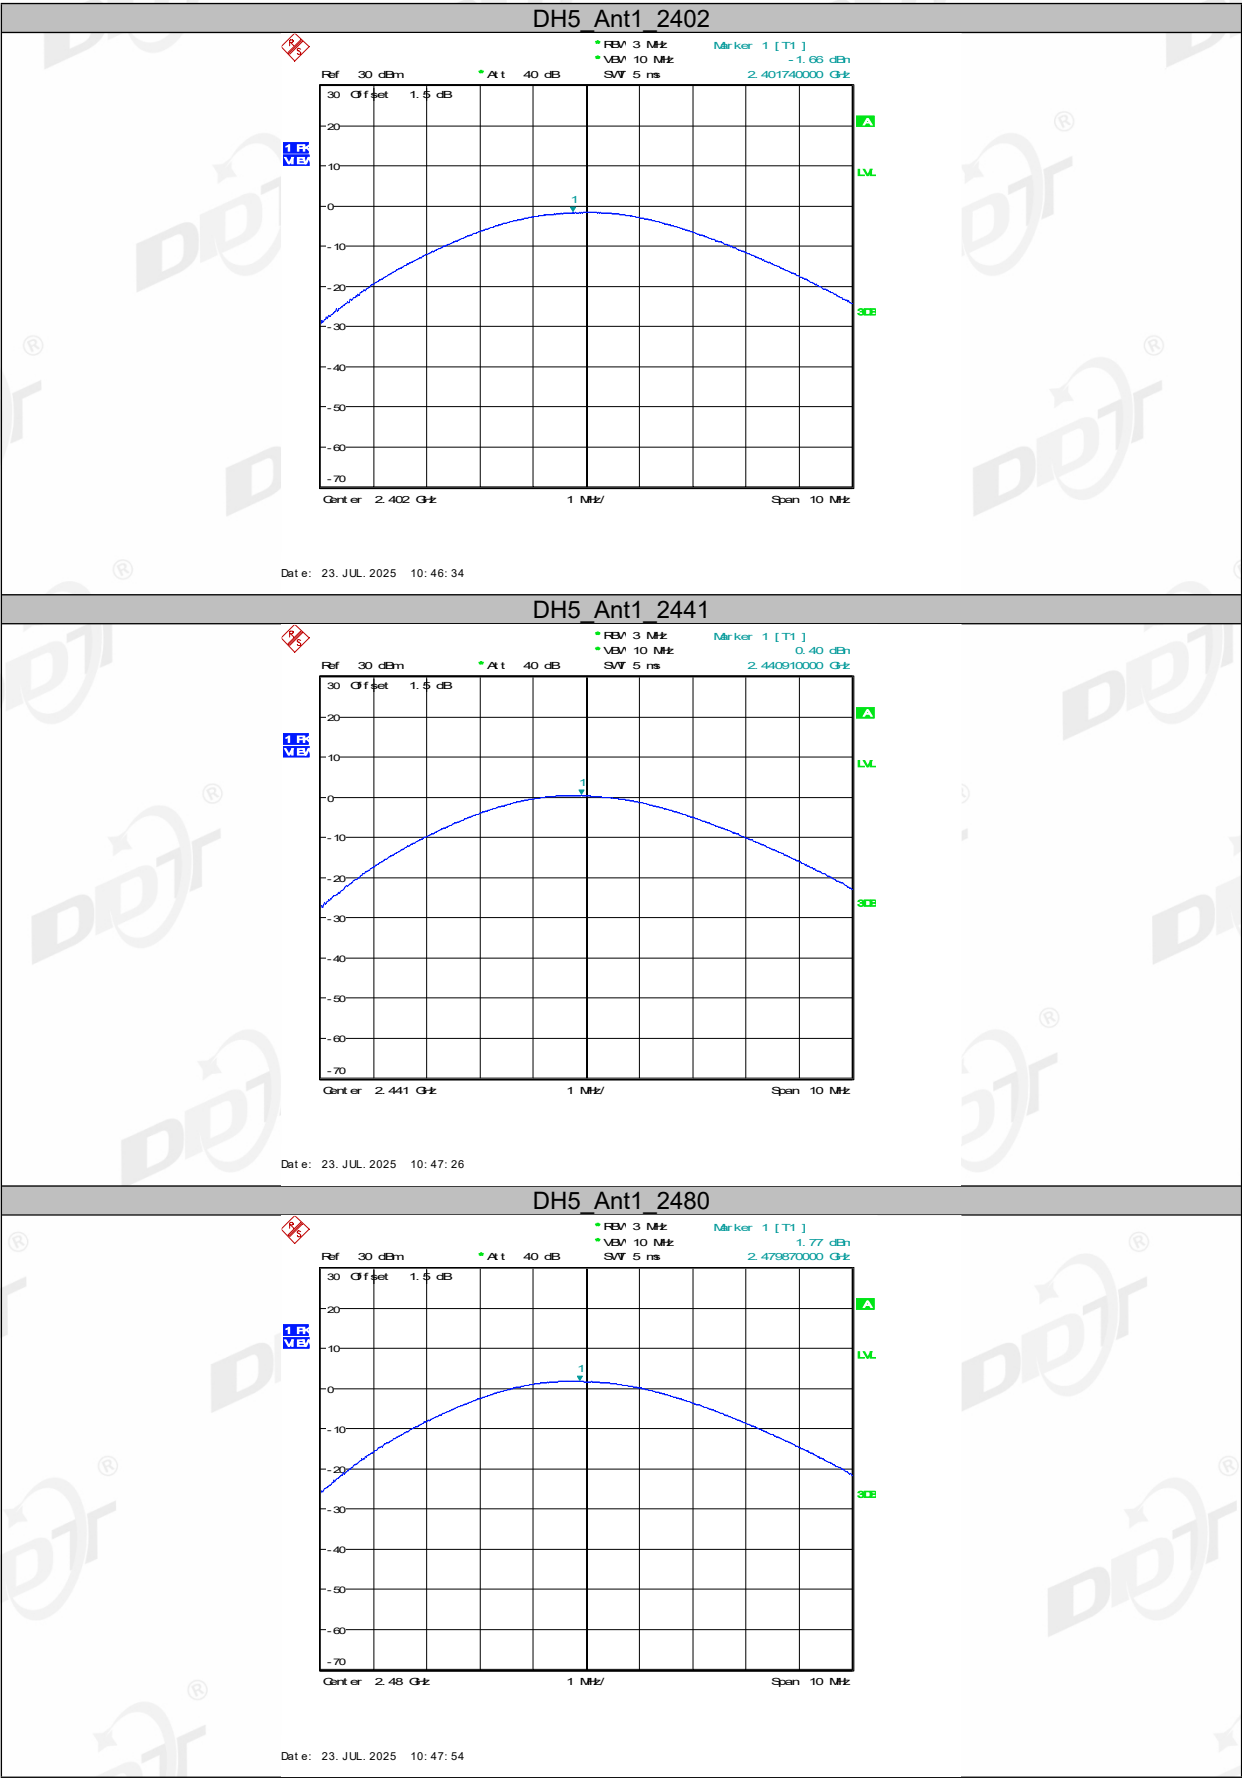




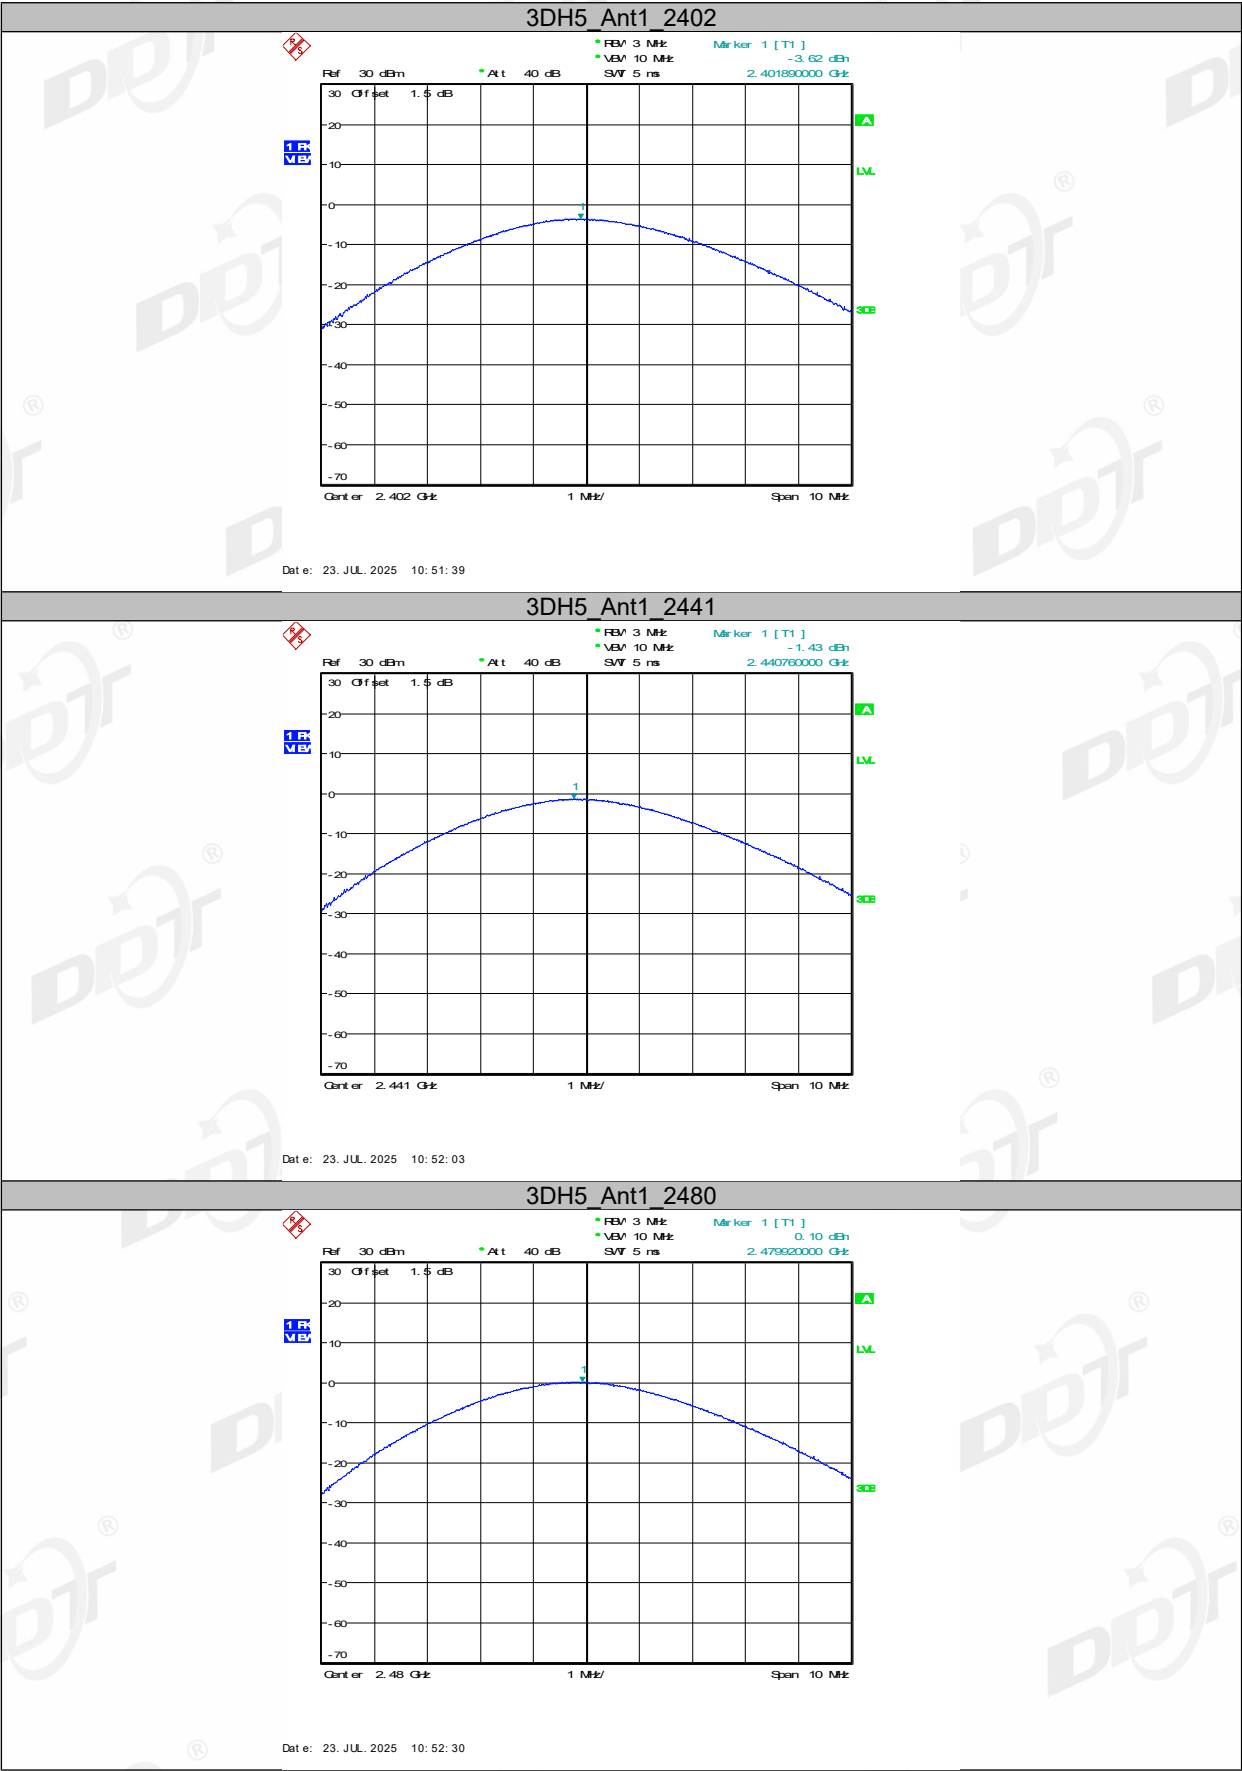

7. Carrier Frequency Separation

7.1. Block diagram of test setup

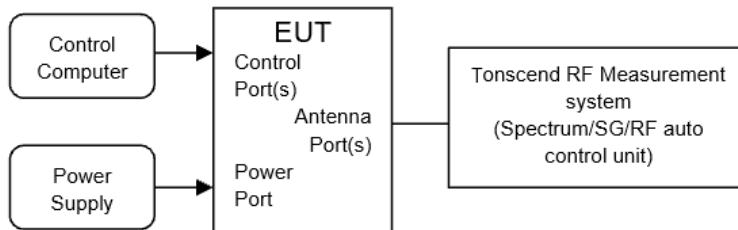

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#		
Ambient Condition:	25.3℃, 45.3%RH	Test Date:	2025.07.22		
Test Power Supply:	DC 12V	Sample Number:	S25032516		


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	0.997	≥0.653	PASS
2DH5	Ant1	Hop	0.997	≥0.860	PASS
3DH5	Ant1	Hop	1.003	≥0.860	PASS

7.5. Test graphs



8. Dwell Time

8.1. Block diagram of test setup

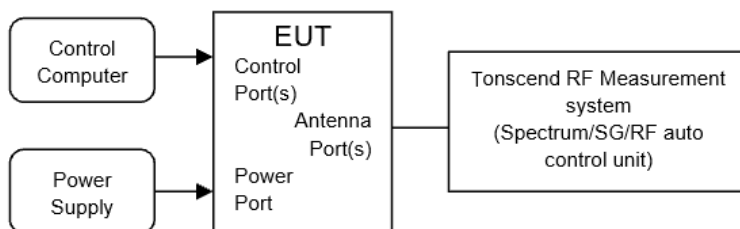

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃, 45.3%RH	Test Date:	2025.07.18
Test Power Supply:	DC 12V	Sample Number:	S25032516


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	Total Hops [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.630	160	0.261	≤0.4	PASS
DH5	Ant1	Hop	2.880	107	0.308	≤0.4	PASS
2DH1	Ant1	Hop	0.390	320	0.125	≤0.4	PASS
2DH3	Ant1	Hop	1.640	160	0.262	≤0.4	PASS
2DH5	Ant1	Hop	2.890	107	0.309	≤0.4	PASS
3DH1	Ant1	Hop	0.380	320	0.122	≤0.4	PASS
3DH3	Ant1	Hop	1.640	160	0.262	≤0.4	PASS
3DH5	Ant1	Hop	2.900	107	0.31	≤0.4	PASS

8.5. Test graphs






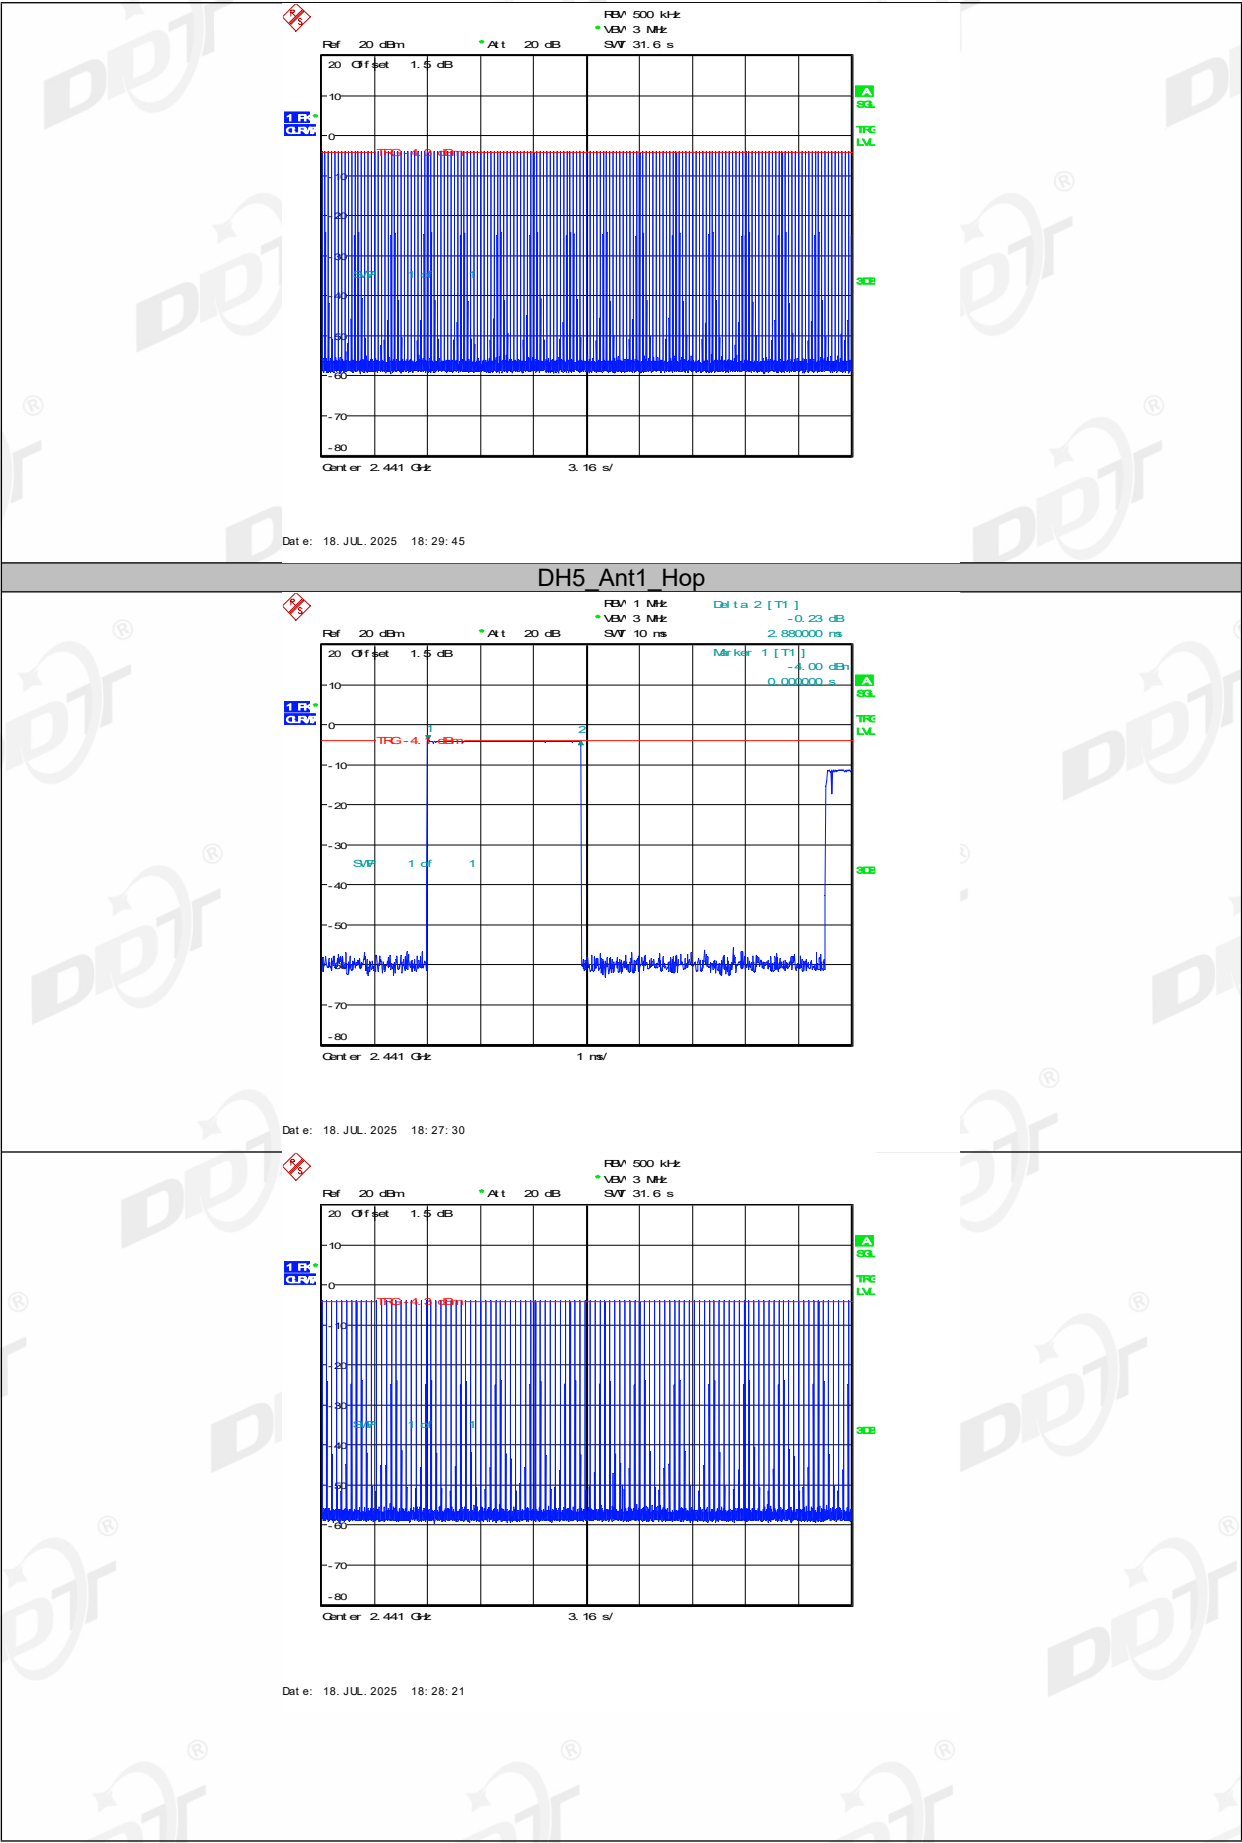



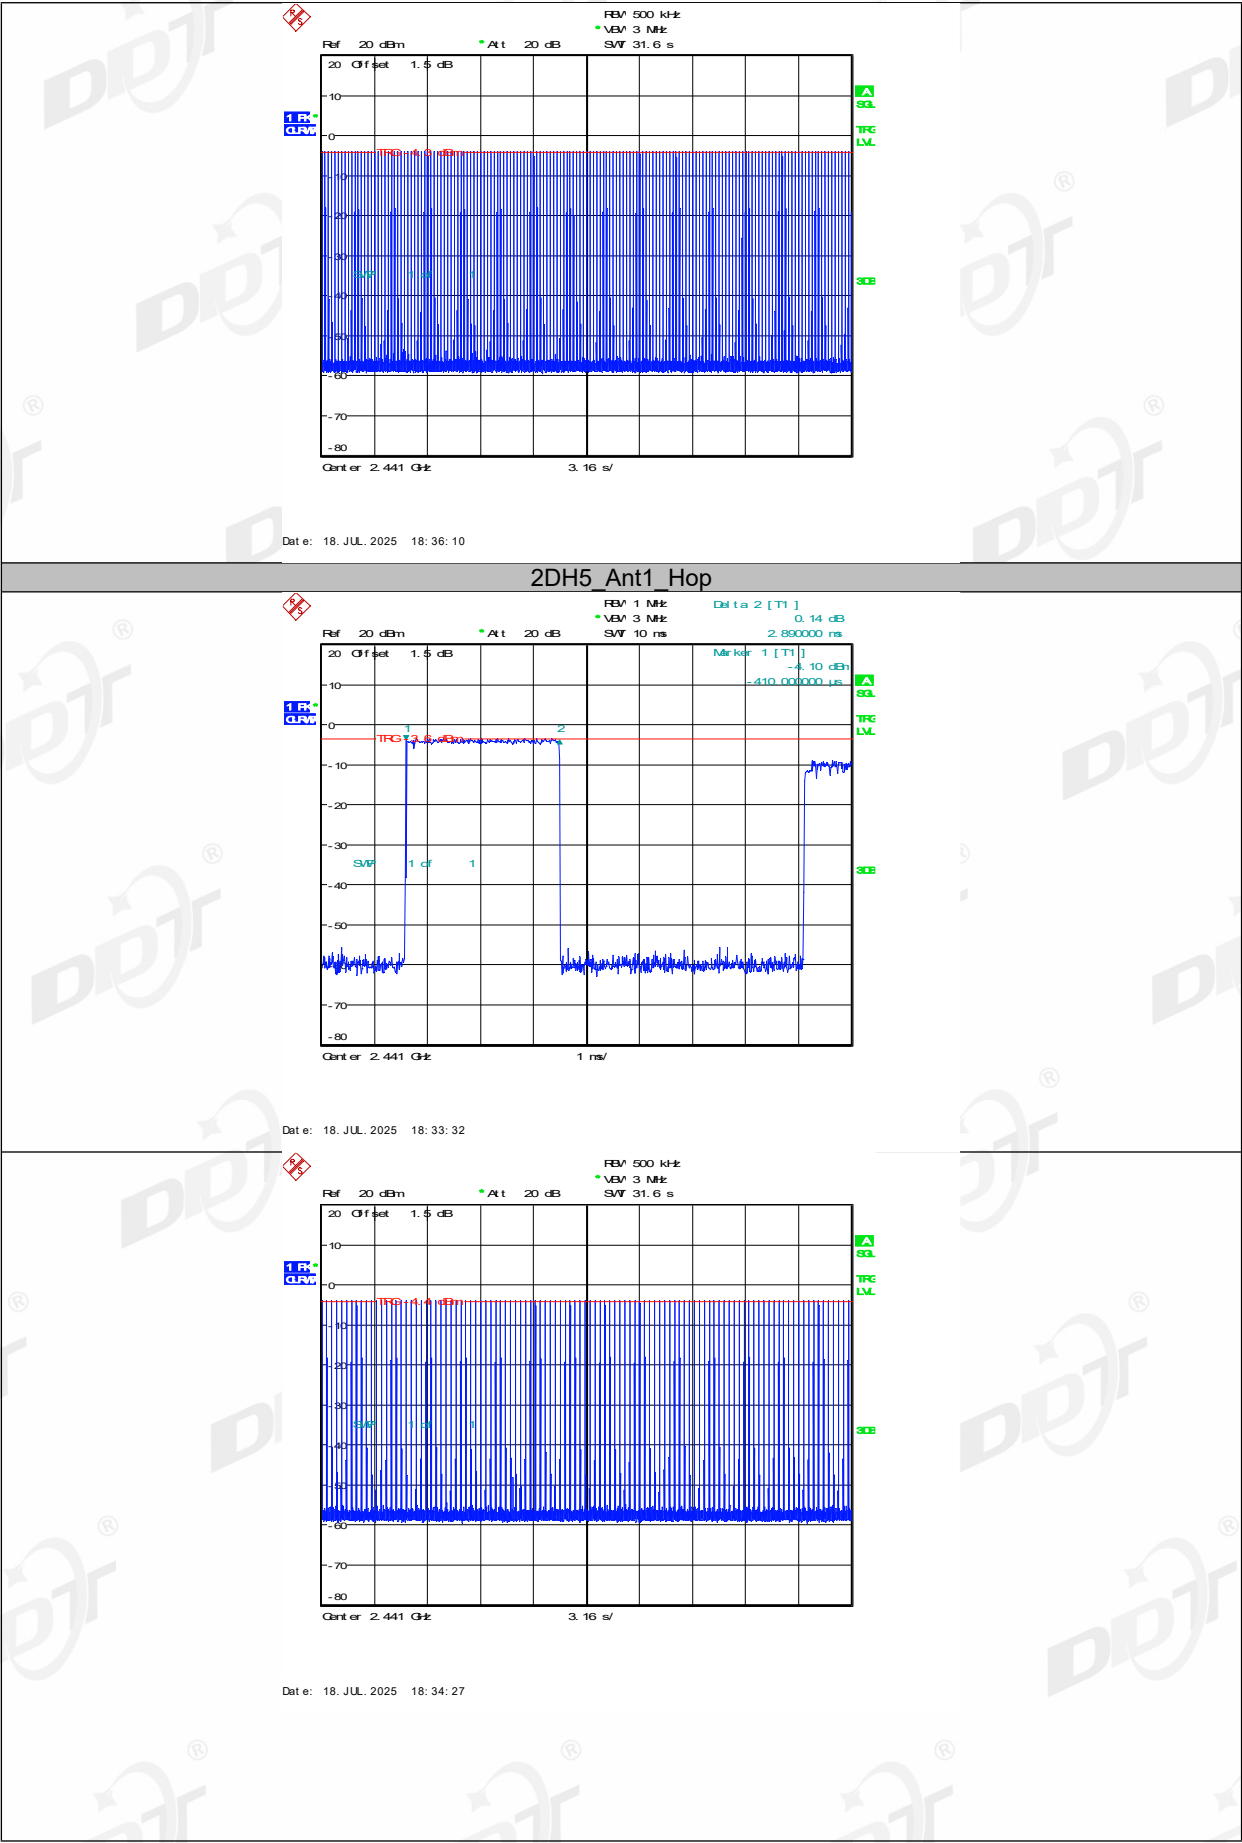




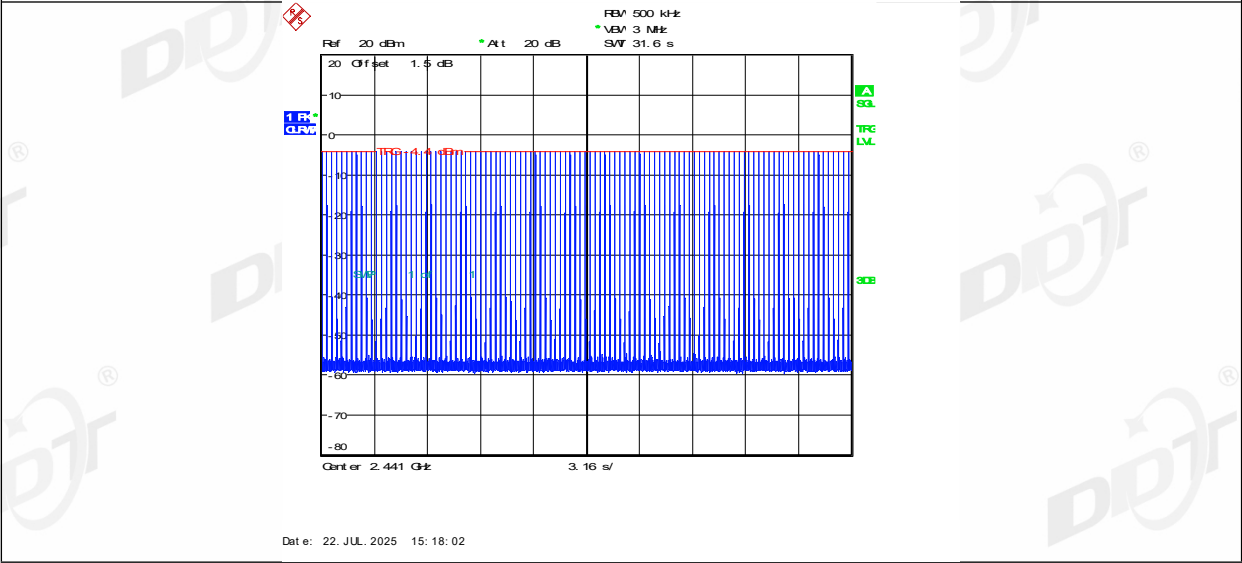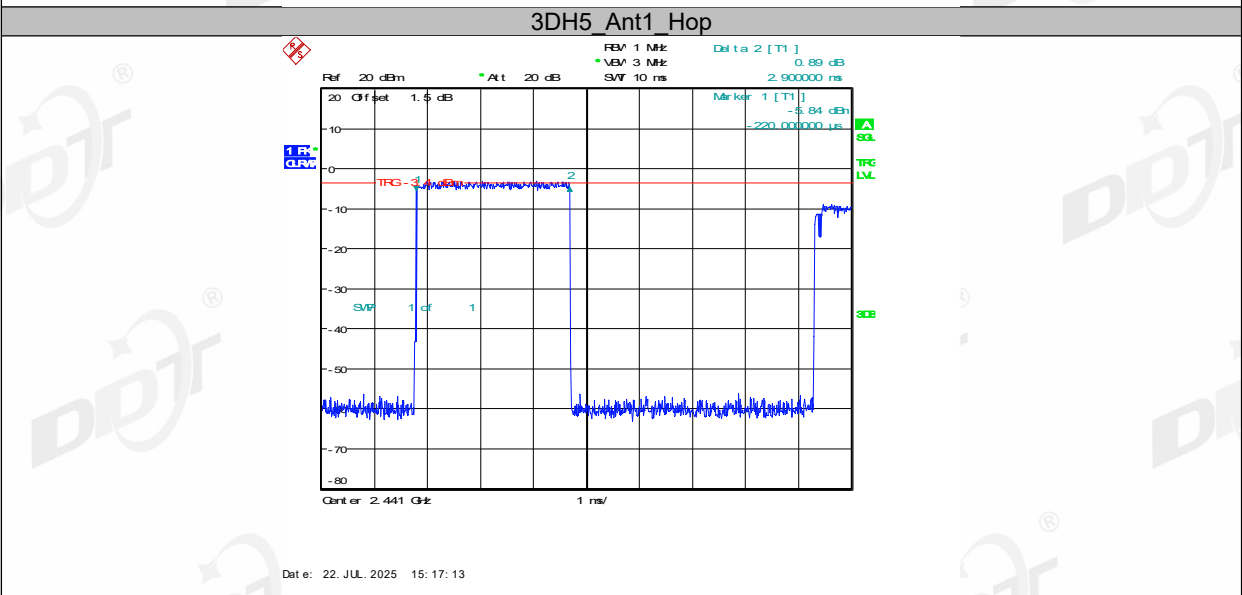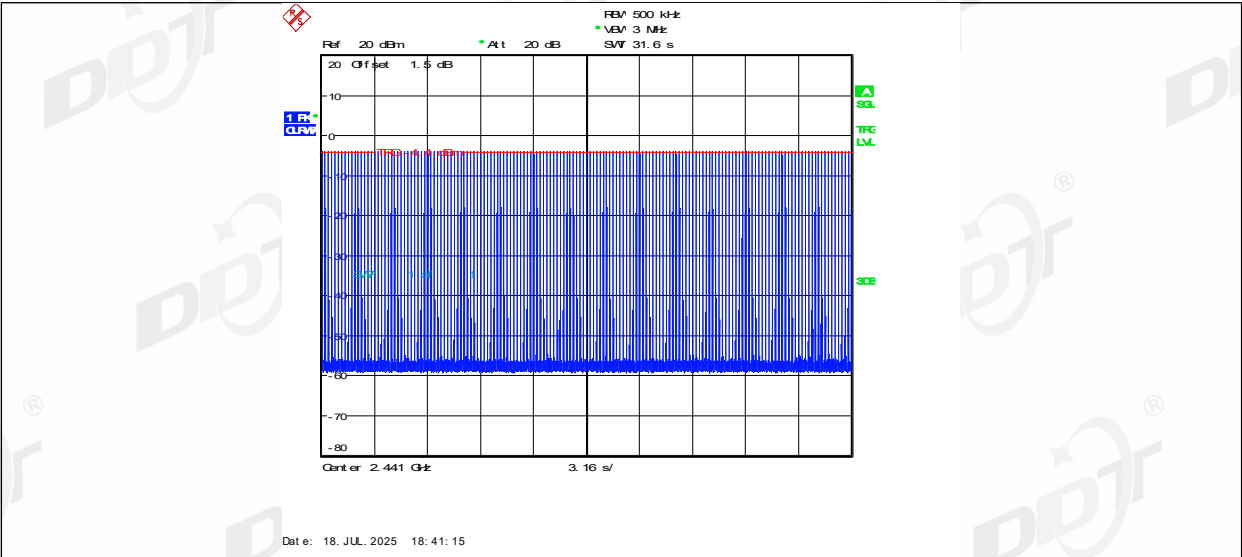

9. Number of Hopping Channel

9.1. Block diagram of test setup

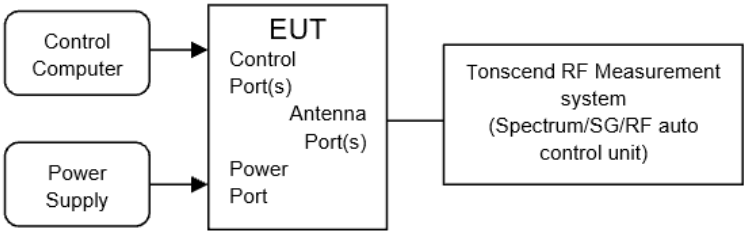

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2020 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW ≥ RBW.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#		
Ambient Condition:	25.3℃, 45.3%RH	Test Date:	2025.07.18		
Test Power Supply:	DC 12V	Sample Number:	S25032516		


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

9.5. Test graphs



10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

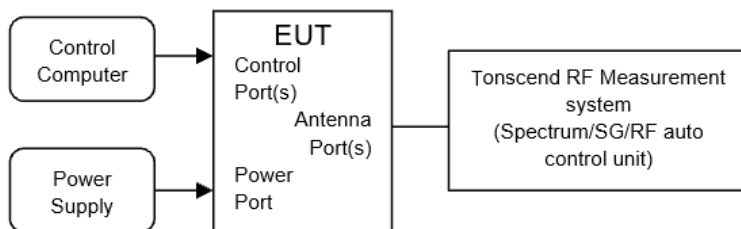

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW: 100 kHz

VBW: 300 kHz

Span: Encompass frequency range to be measured

Detector Mode: Peak

Sweep time: Auto

Trace mode: Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

10.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃, 45.3%RH	Test Date:	2025.07.18 - 2025.07.22
Test Power Supply:	DC 12V	Sample Number:	S25032516

Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
2DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
3DH5	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs





2DH5_Ant1_High_2480

Ref 20 dBm

Offset 1.5 dB

Att 30 dB

RBW 100 kHz

VBW 300 kHz

SWT 15 ns

Marker 4 [T1]

-52.72 dBm

2.497740385 GHz

1 R

VB

Marker 1 [T1]

-2.83 dBm

2.480000000 GHz

Marker 2 [T1]

-55.78 dBm

2.483690999 GHz

Marker 3 [T1]

-54.38 dBm

2.500000000 GHz

DI -22.83 dBm

Start 2.47 GHz


3 MHz

Stop 2.5 GHz

Date: 18. JUL. 2025


17:53:32



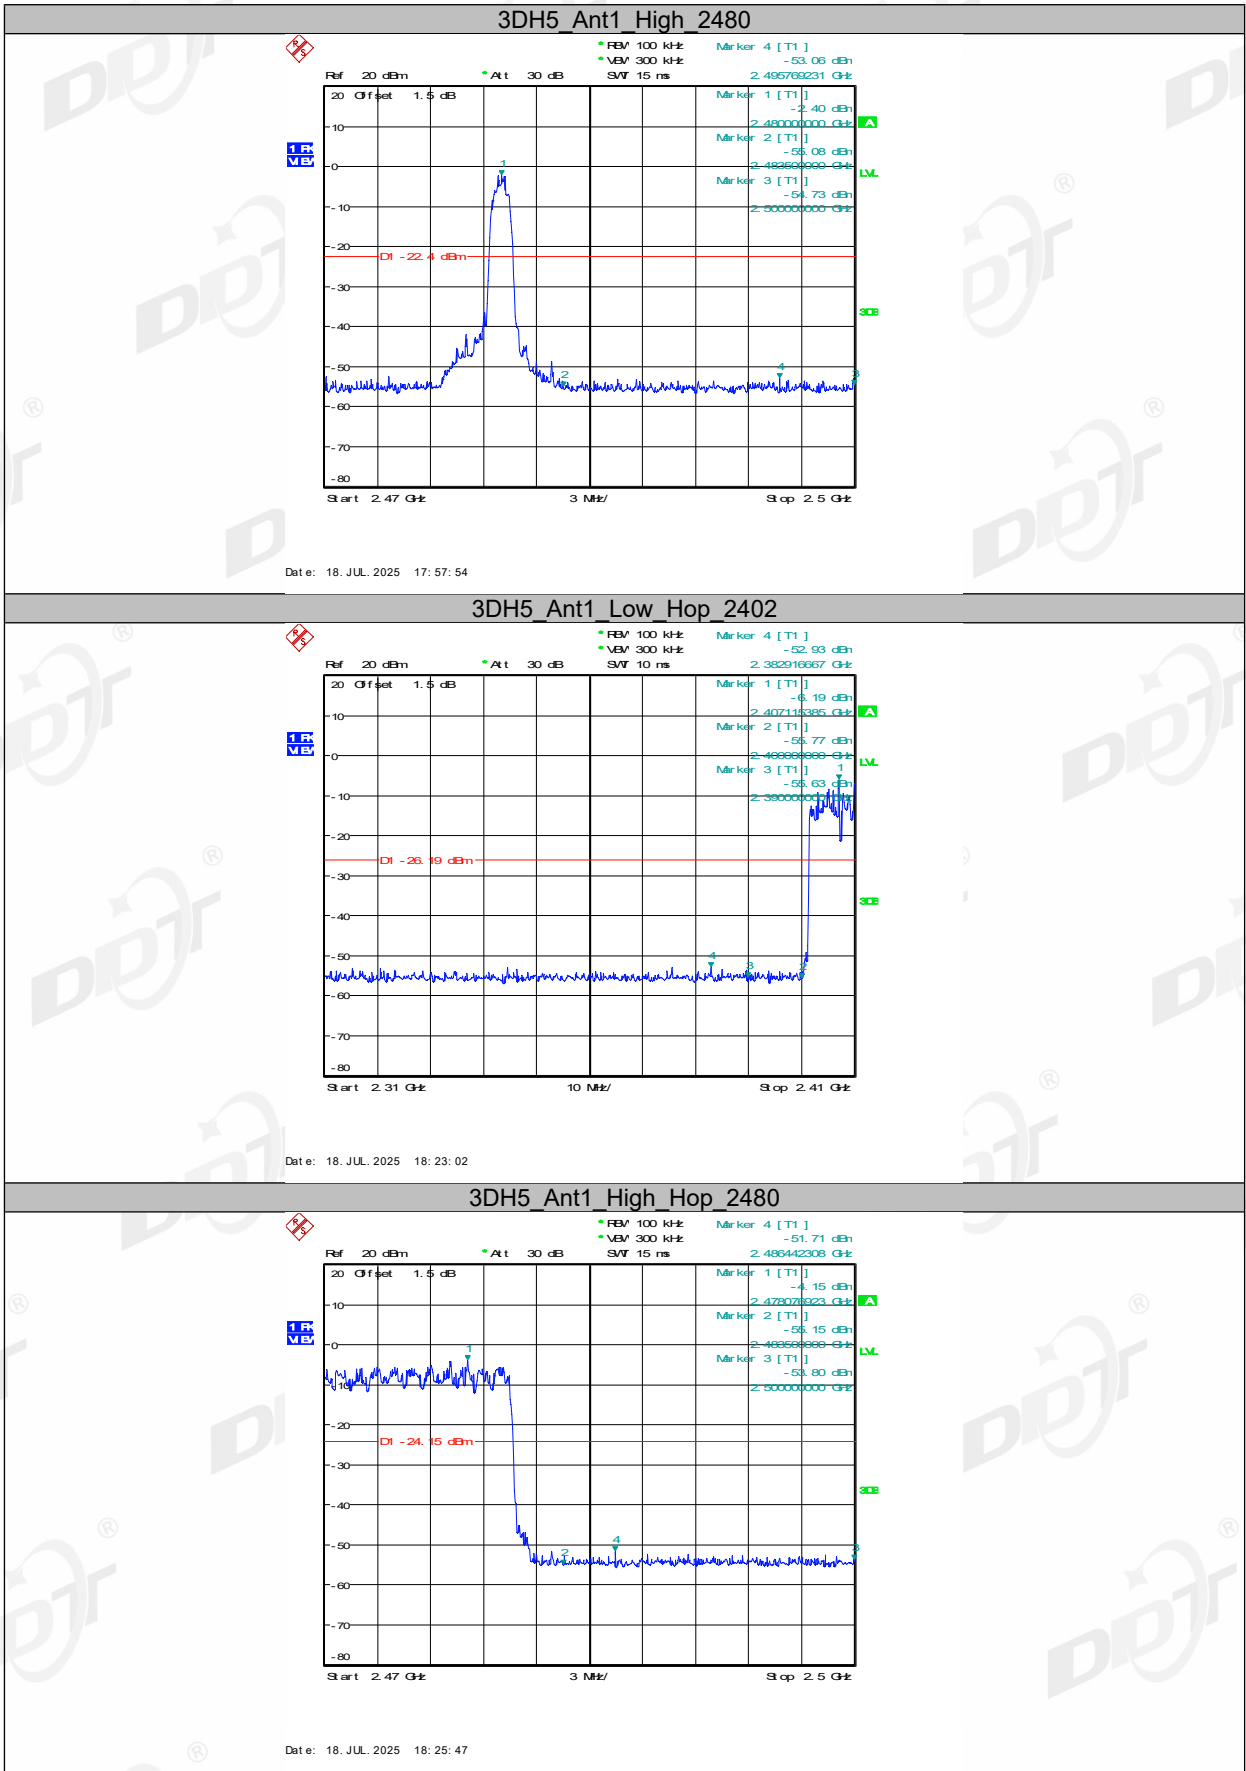

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

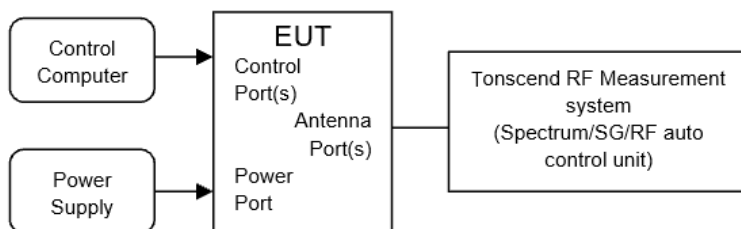

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency:	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span:	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span:	Encompass frequency range to be measured
Number of measurement points:	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃ , 5.3%RH	Test Date:	2025.07.18
Test Power Supply:	DC 12V	Sample Number:	S25032516

Mode	Frequency (MHz)	Verdict
DH5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
2H5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
3H5	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

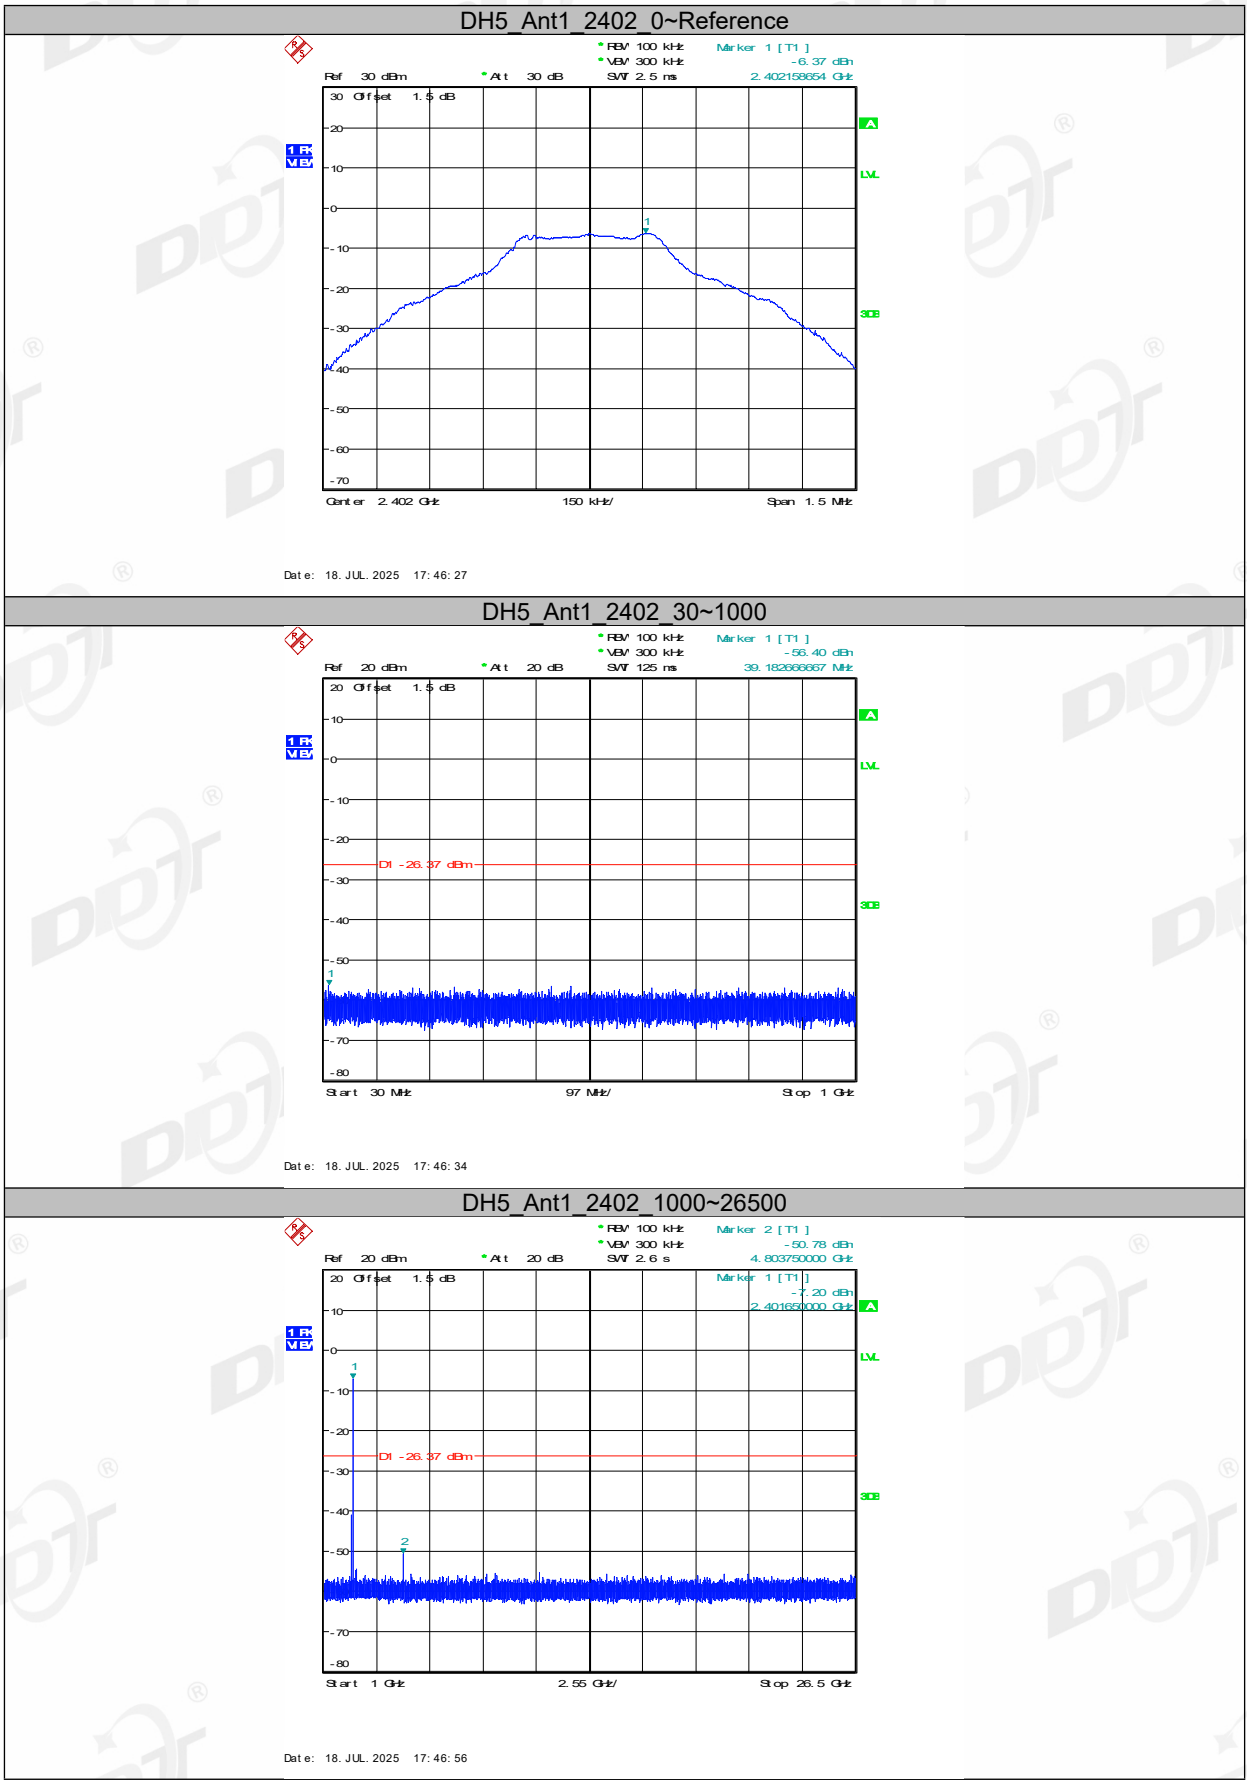

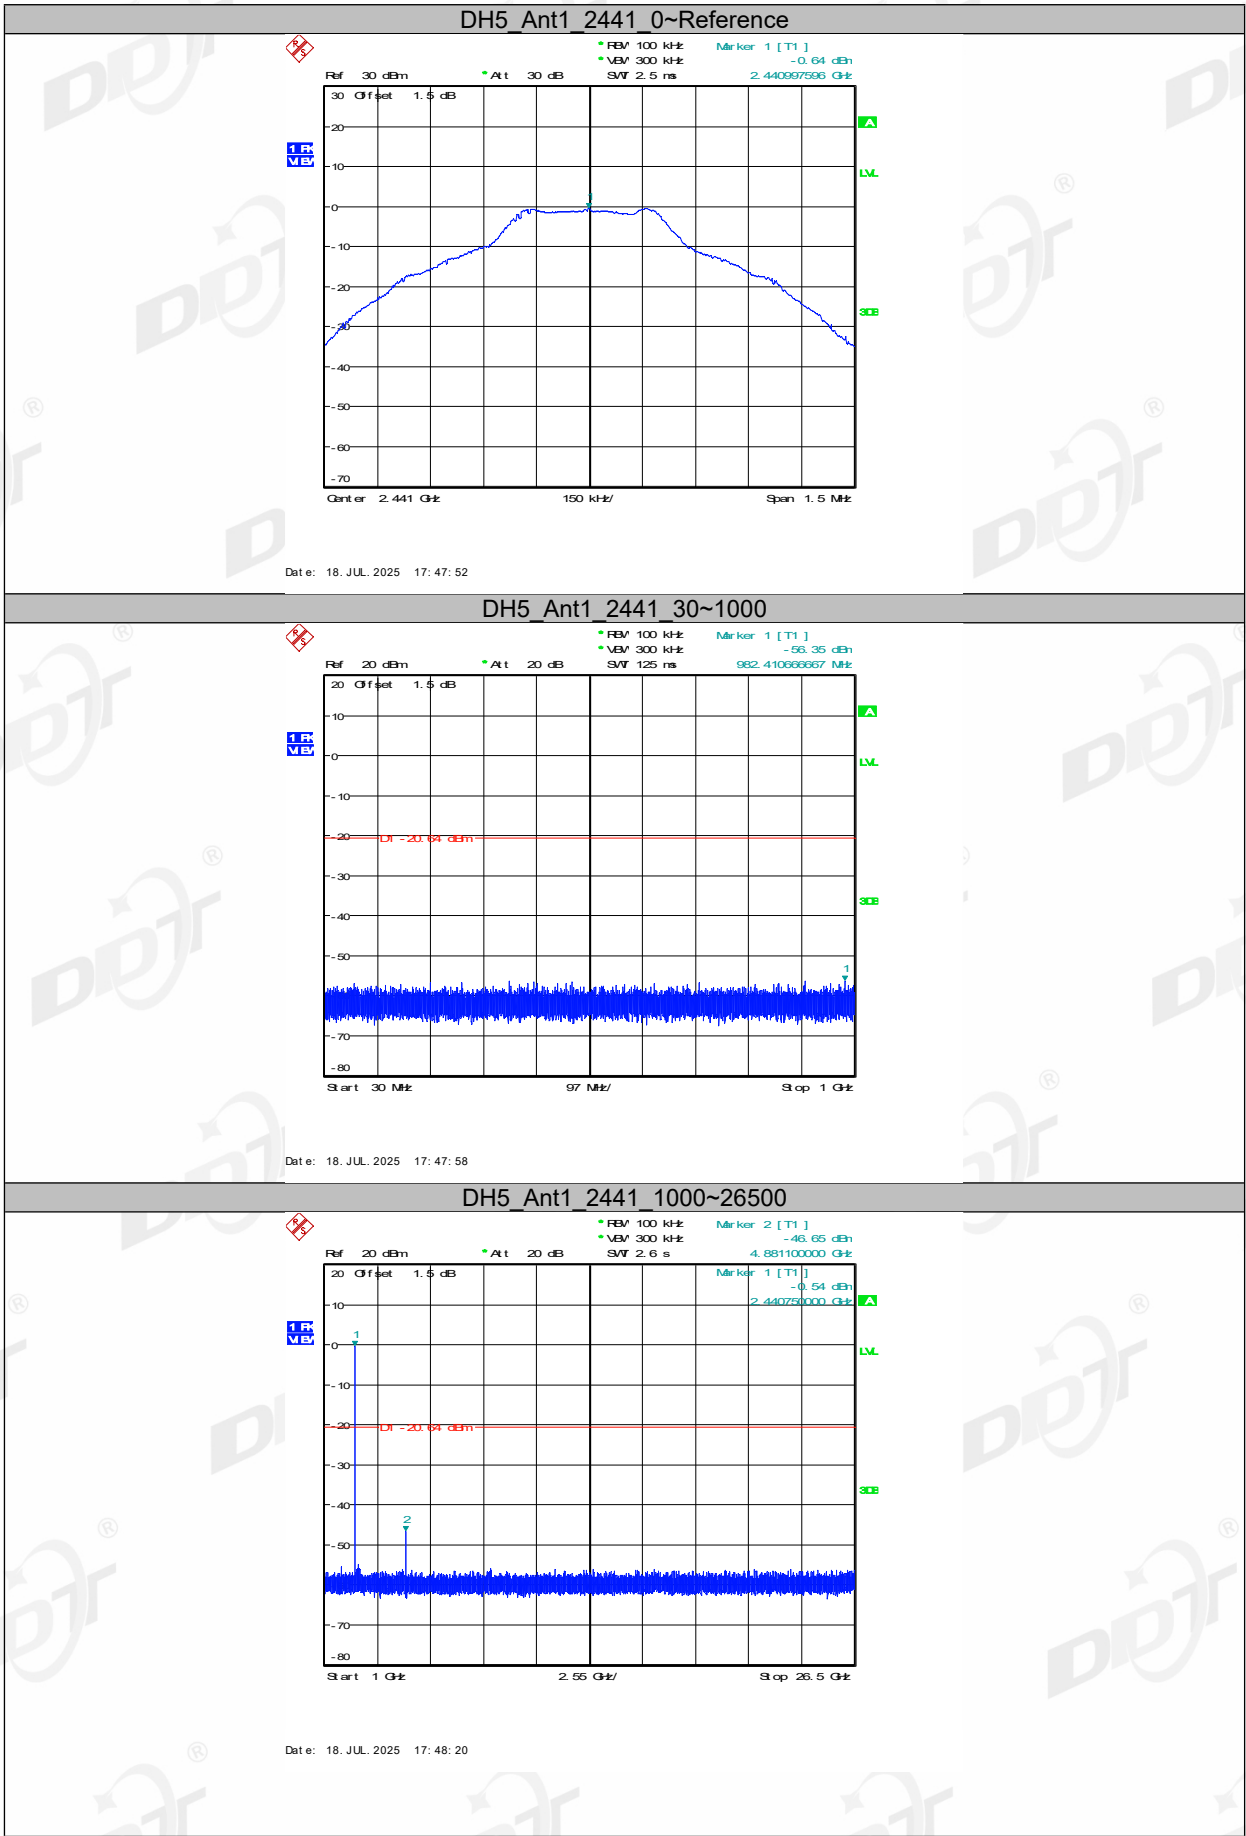

DH5_Ant1_2441_1000~26500

Ref 20 dBm

Offset 1.5 dB

Att 20 dB

RBW 100 kHz

VBW 300 kHz

SWF 2.6 s

Marker 2 [T1]

-46.65 dBm

4.881100000 GHz

Marker 1 [T1]

-0.54 dBm

2.440751000 GHz

Start 1 GHz

2.55 GHz

Stop 26.5 GHz

Date: 18. JUL. 2025 17:48:20



DH5_Ant1_2480_1000~26500

Ref 20 dBm

Offset 1.5 dB

Att 20 dB

RBW 100 kHz

VBW 300 kHz

SWR 2.6 s

Marker 1 [T1]

-49.91 dBm

4.960150000 GHz

Marker 2 [T1]

0.49 dBm

2.479851000 GHz

Date: 18. JUL. 2025 17:49:47



2DH5_Ant1_2402_1000~26500

Ref 20 dBm

Offset 1.5 dB

Att 20 dB

RBW 100 kHz

VBW 300 kHz

SWF 2.6 s

Marker 2 [T1]

-54.84 dBm

21.966250000 GHz

Marker 1 [T1]

-11.80 dBm

2.401651000 GHz



2DH5_Ant1_2441_1000~26500

Ref 20 dBm

Offset 1.5 dB

Alt 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 1 [T1]

-45.80 dBm

1.920560000 GHz

Marker 2 [T1]

-8.13 dBm

2.440750000 GHz



2DH5_Ant1_2480_1000~26500

Ref 20 dBm

Offset 1.5 dB

Att 20 dB

RBW 100 kHz

VBW 300 kHz

SWF 2.6 s

Marker 2 [T1]

-54.32 dBm

4.958300000 GHz

Marker 1 [T1]

-6.01 dBm

2.479850000 GHz


Start 1 GHz

2.55 GHz

Stop 26.5 GHz

Date: 18. JUL. 2025 17:54:09



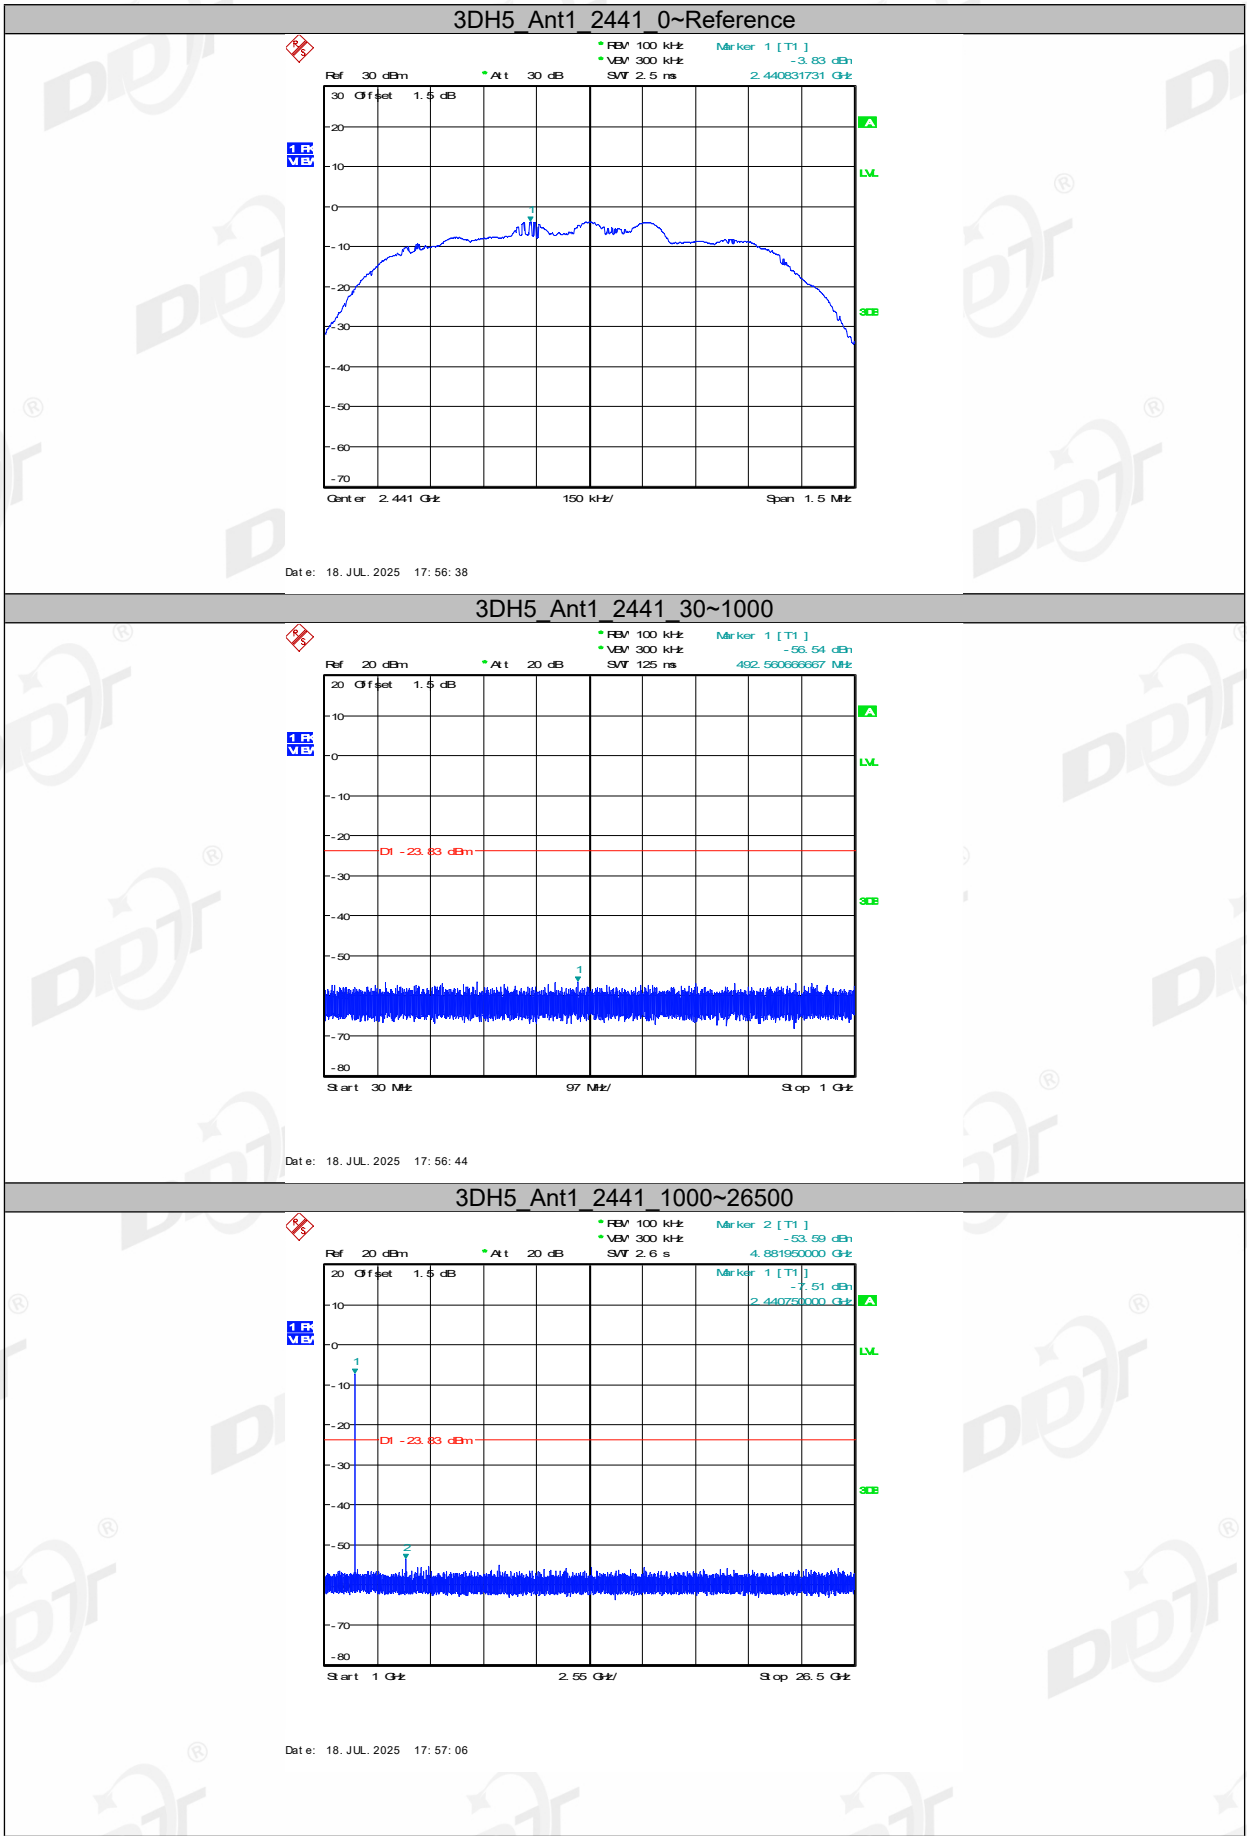



3DH5_Ant1_2480_1000~26500

Ref 20 dBm

Offset 1.5 dB

Att 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 2.6 s

Marker 2 [T1]

-55.65 dBm

8.180800000 GHz


Marker 1 [T1]

-2.28 dBm

2.479851000 GHz

12. Duty cycle

12.1. Block diagram of test setup

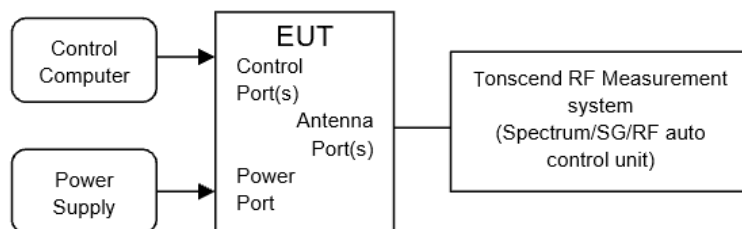

12.2. Limit

Just for Report.

12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset. set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger

- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
$$\text{Duty cycle} = \text{Pulse's on time} / \text{Burst cycle}$$

12.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 2#
Ambient Condition:	25.3℃, 5.3%RH	Test Date:	2025.07.18
Test Power Supply:	DC 12V	Sample Number:	S25032516

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.91	3.76	77.39	1.11
		2441	2.91	3.76	77.39	1.11
		2480	2.91	3.77	77.19	1.12
2DH5	Ant1	2402	2.92	3.77	77.45	1.11
		2441	2.92	3.77	77.45	1.11
		2480	2.92	3.76	77.66	1.10
3DH5	Ant1	2402	2.92	3.76	77.66	1.10
		2441	2.92	3.77	77.45	1.11
		2480	2.92	3.77	77.45	1.11

DH5 Ant1_2402

Ref: 15 dBm, Offset: 1.5 dB, Att: 20 dB, RBW: 10 MHz, VBW: 10 MHz, S/V: 7 ns, Delta 2 [T1]: -10.30 dB, Delta 1 [T1]: -17.46 dB, Marker 1 [T1]: -10.30 dB, 0.00000 s, 3.760000 ns

IFC: -12.5 dBm

Carrier: 2.402 GHz, 700 μs

Date: 18. JUL. 2025 17:45:54

DH5 Ant1_2441

Ref: 15 dBm, Offset: 1.5 dB, Att: 20 dB, RBW: 10 MHz, VBW: 10 MHz, S/V: 7 ns, Delta 2 [T1]: -18.07 dB, Delta 1 [T1]: -17.28 dB, Marker 1 [T1]: -18.07 dB, 0.00000 s, 3.760000 ns

IFC: -6.6 dBm

Carrier: 2.441 GHz, 700 μs

Date: 18. JUL. 2025 17:47:30


DH5 Ant1_2480


Ref: 15 dBm, Offset: 1.5 dB, Att: 20 dB, RBW: 10 MHz, VBW: 10 MHz, S/V: 7 ns, Delta 2 [T1]: -0.50 dB, Delta 1 [T1]: -2.04 dB, Marker 1 [T1]: -0.50 dB, 0.00000 s, 3.770000 ns

IFC: -5 dBm

Carrier: 2.48 GHz, 700 μs

Date: 18. JUL. 2025 17:48:46

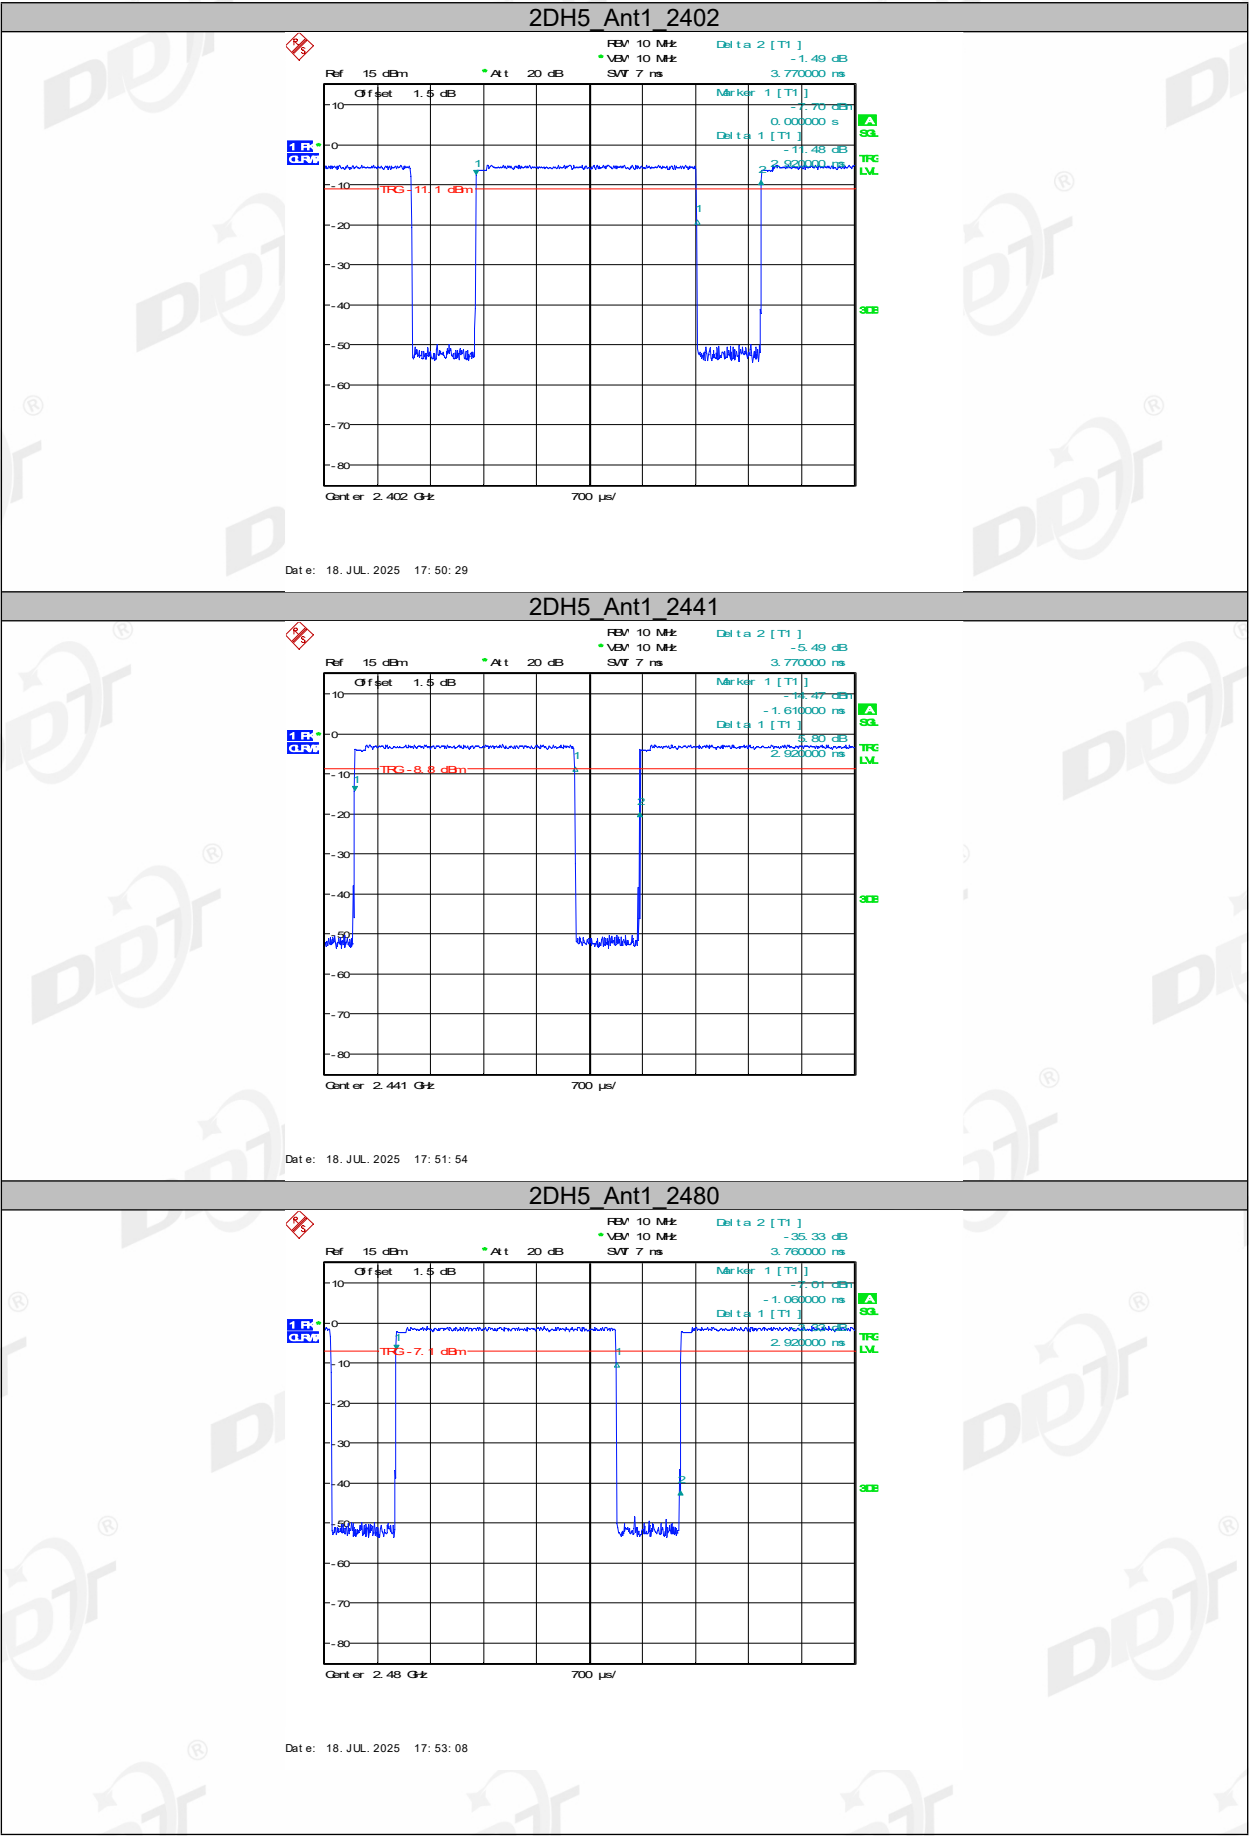

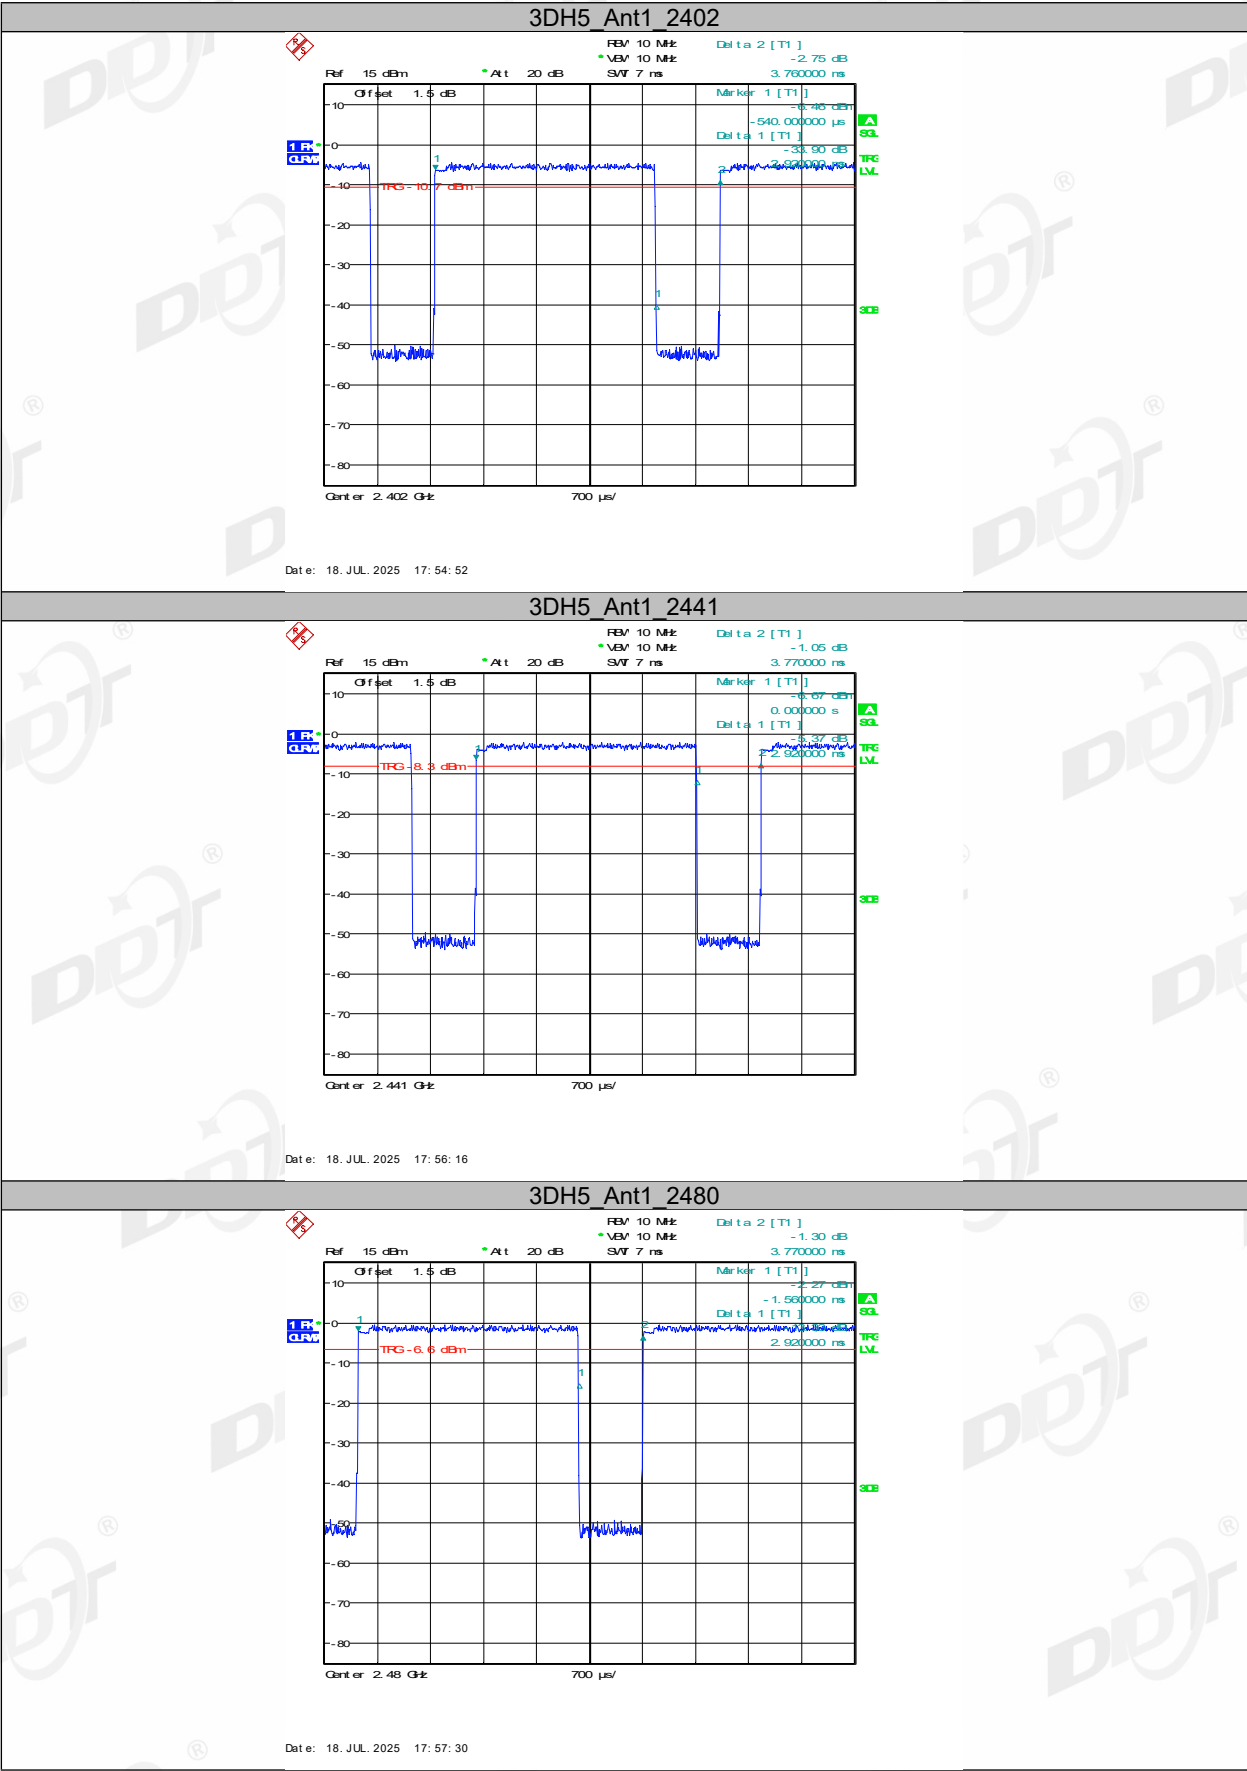

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

13.2. Result



The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


14. Radiated Emission

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
				2025/08/26	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28	1 Year

14.2. Block diagram of test setup

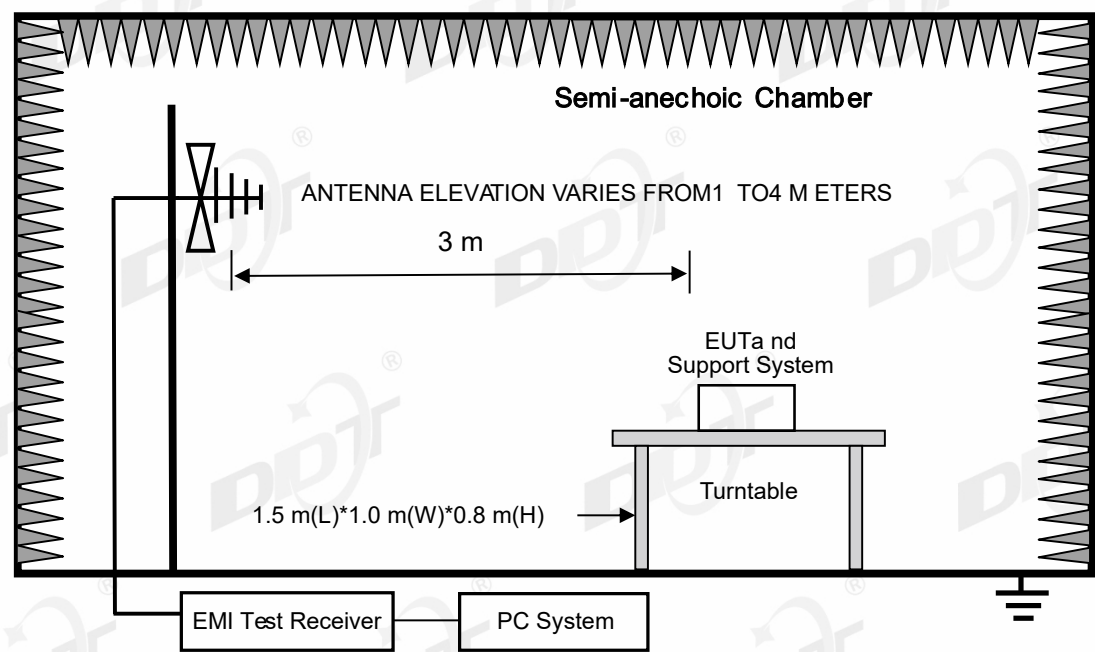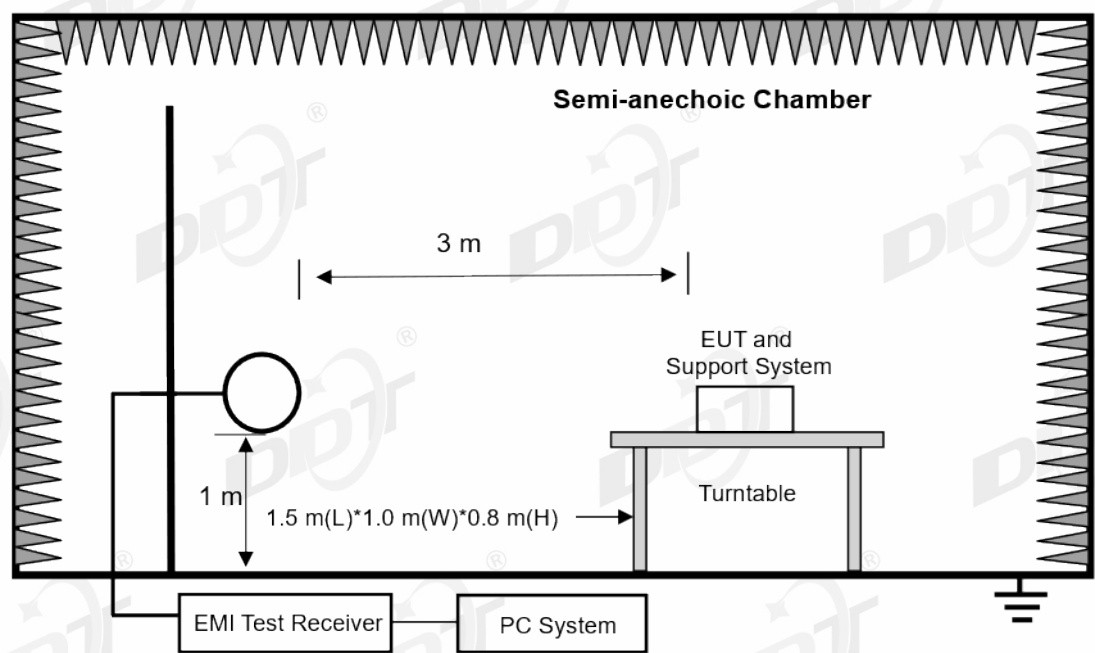

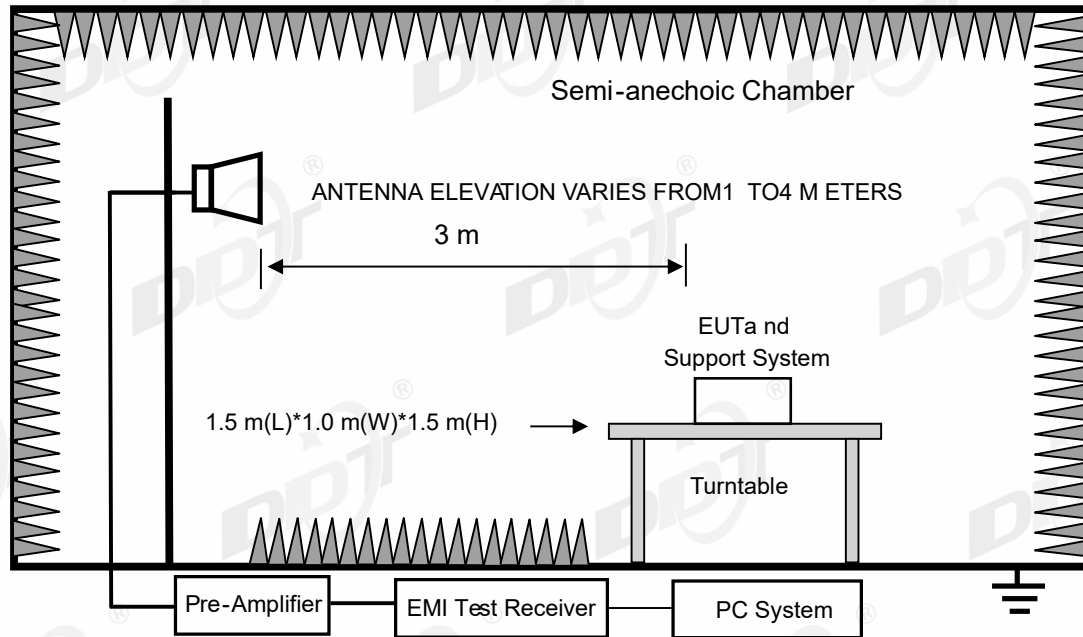

14.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ¹	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT	
MHz	Meters	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54

30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m(Peak) 54.0 dBuV/m(Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description
Laptop	Lenovo	00425-00000-00002-AA135	NA

14.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI

C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-02

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2480 mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC BELOW1G\7

Memo:

Sample Numbler:S25032516 setting power:NA

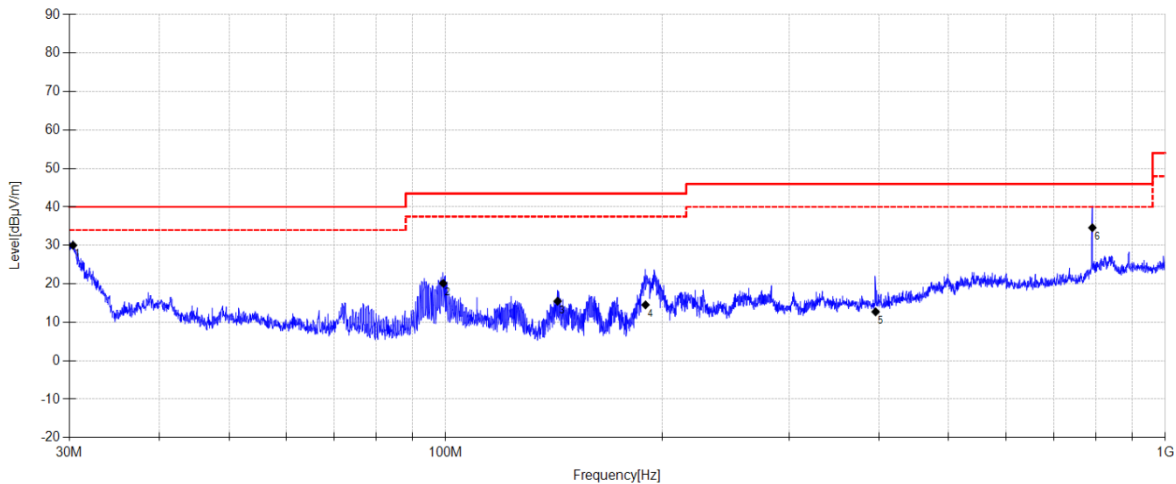

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.360	48.17	10.43	3.72	30.02	40.00	9.98	QP	Horizontal
2	99.226	36.7	11.54	4.18	20.12	43.50	23.38	QP	Horizontal
3	143.080	34.54	8.97	4.31	15.48	43.50	28.02	QP	Horizontal
4	189.536	32.77	9.71	4.44	14.53	43.50	28.97	QP	Horizontal
5	395.760	24.6	15.08	5.54	12.72	46.00	33.28	QP	Horizontal
6	791.765	40	20.30	6.84	34.59	46.00	11.41	QP	Horizontal

Note:


1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-02 **Tested By:** Nan Zhong
EUT: Meter **Model Number:** 6AQ9-42
Test Mode: TX DH5 2480 mode **Power Supply:** DC 12V
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25032516-1E\FCC BELOW1G\8
Memo: Sample Numbler:S25032516 setting power:NA

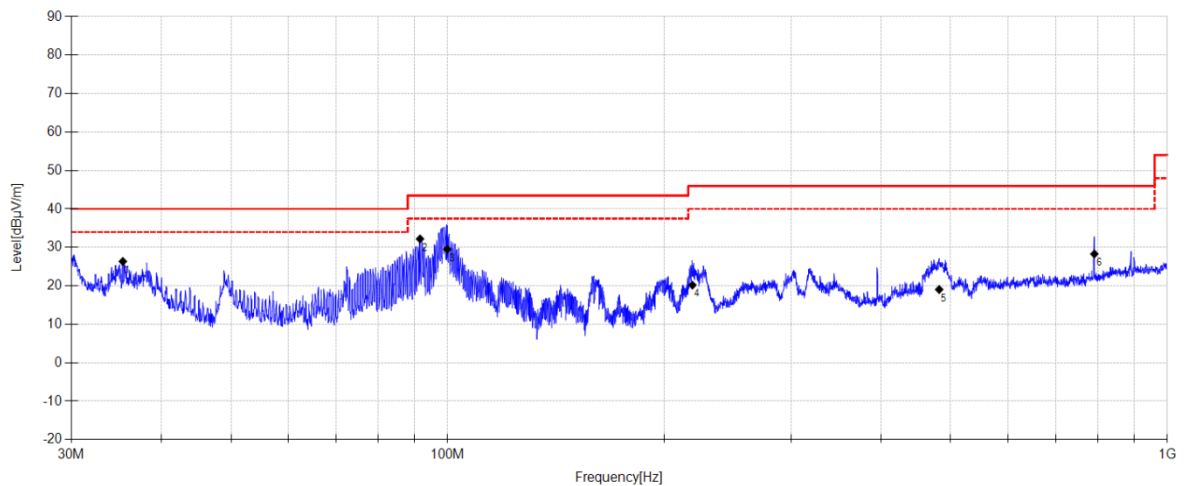**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	35.374	43.36	11.52	3.76	26.34	40.00	13.66	QP	Vertical
2	91.539	50.56	9.82	4.13	32.21	43.50	11.29	QP	Vertical
3	99.854	45.71	11.91	4.19	29.51	43.50	13.99	QP	Vertical
4	218.835	36.77	11.22	4.60	20.19	46.00	25.81	QP	Vertical
5	481.948	29.28	16.49	5.85	19.04	46.00	26.96	QP	Vertical
6	791.765	33.7	20.30	6.84	28.29	46.00	17.71	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-31 **Tested By:** Nan Zhong
EUT: Meter **Model Number:** 6AQ9-42
Test Mode: TX DH5 2480MHz Mode **Power Supply:** DC 12V
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT13
Memo: Sample Numble:S25032516 setting power:NA

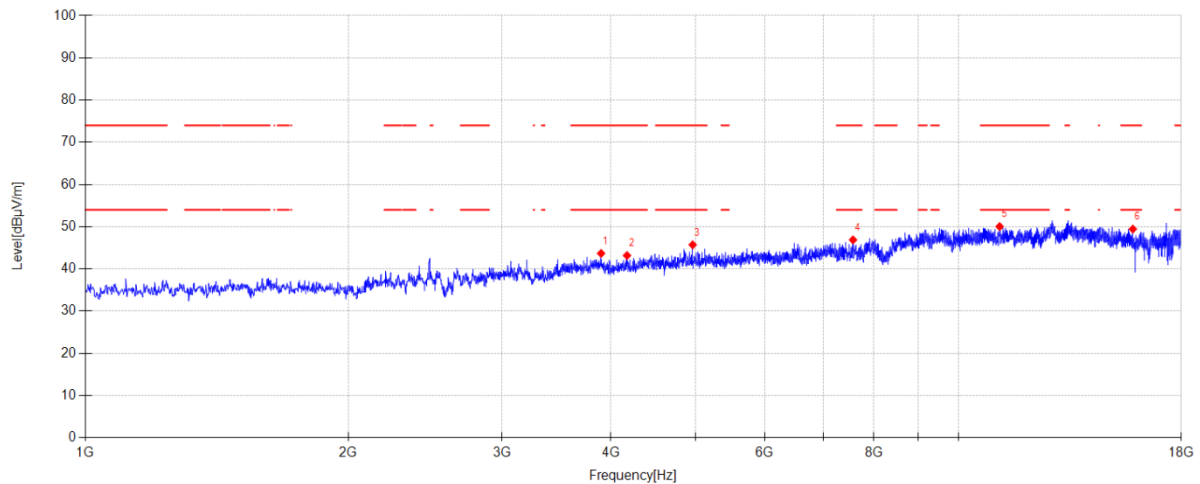

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3896.800	47.08	31.18	5.07	-39.66	43.67	74.00	30.33	PK	Horizontal
2	4172.200	46.50	31.20	5.15	-39.67	43.18	74.00	30.82	PK	Horizontal
3	4961.000	46.57	33.12	5.63	-39.60	45.72	74.00	28.28	PK	Horizontal
4	7572.200	44.19	36.44	6.74	-40.49	46.88	74.00	27.12	PK	Horizontal
5	11147.300	41.72	39.25	8.22	-39.15	50.04	74.00	23.96	PK	Horizontal
6	15837.600	40.58	38.22	10.04	-39.40	49.44	74.00	24.56	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT14

Memo:

Sample Numbler:S25032516 setting power:NA

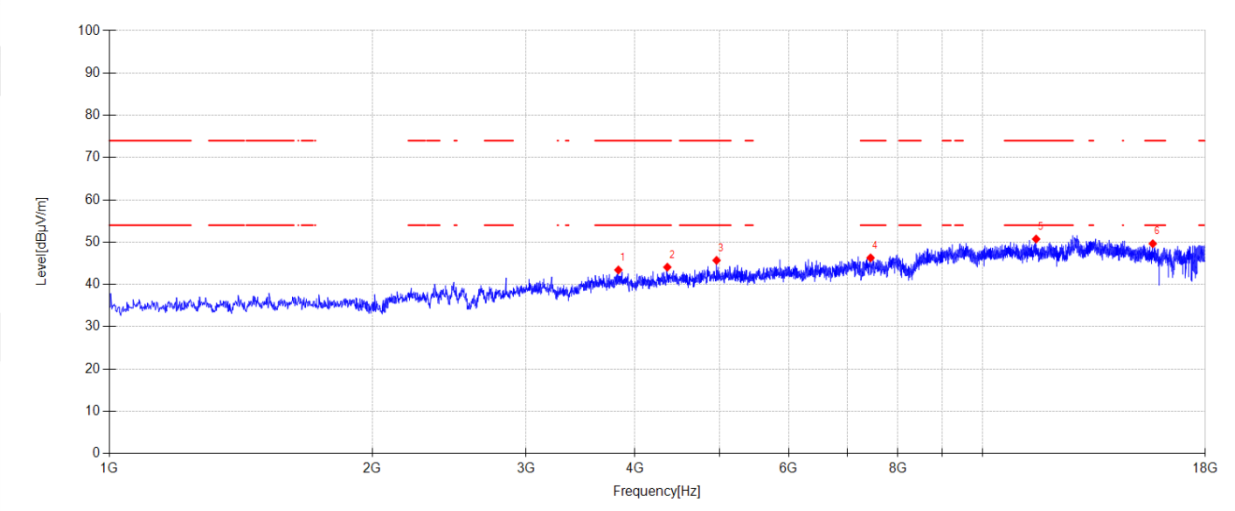

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3828.800	47.16	30.82	5.08	-39.64	43.42	74.00	30.58	PK	Vertical
2	4355.800	46.87	31.61	5.26	-39.65	44.09	74.00	29.91	PK	Vertical
3	4959.300	46.54	33.12	5.63	-39.60	45.69	74.00	28.31	PK	Vertical
4	7444.700	43.60	36.61	6.68	-40.60	46.29	74.00	27.71	PK	Vertical
5	11519.600	42.64	39.16	8.46	-39.52	50.74	74.00	23.26	PK	Vertical
6	15671.000	40.57	38.53	9.93	-39.40	49.63	74.00	24.37	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2441MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT15

Memo:

Sample Numbler:S25032516 setting power:NA

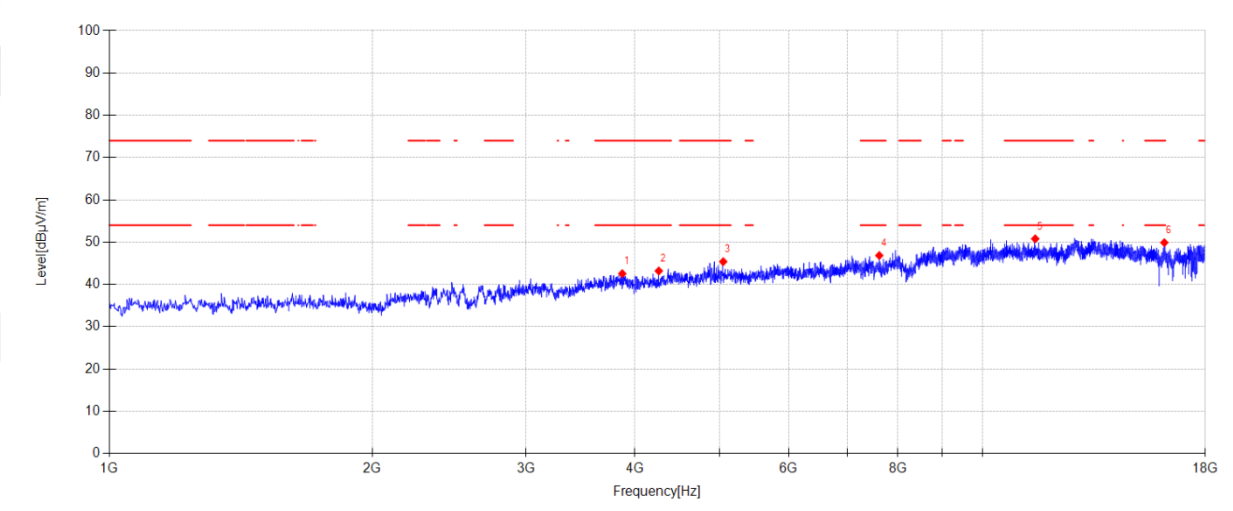

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3867.900	46.12	31.01	5.07	-39.65	42.55	74.00	31.45	PK	Horizontal
2	4258.900	46.20	31.44	5.21	-39.66	43.19	74.00	30.81	PK	Horizontal
3	5047.700	46.01	33.30	5.68	-39.60	45.39	74.00	28.61	PK	Horizontal
4	7618.100	43.97	36.54	6.77	-40.44	46.84	74.00	27.16	PK	Horizontal
5	11492.400	42.63	39.21	8.44	-39.49	50.79	74.00	23.21	PK	Horizontal
6	16155.500	41.38	37.84	10.18	-39.51	49.89	74.00	24.11	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2441MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT16

Memo:

Sample Numbler:S25032516 setting power:NA

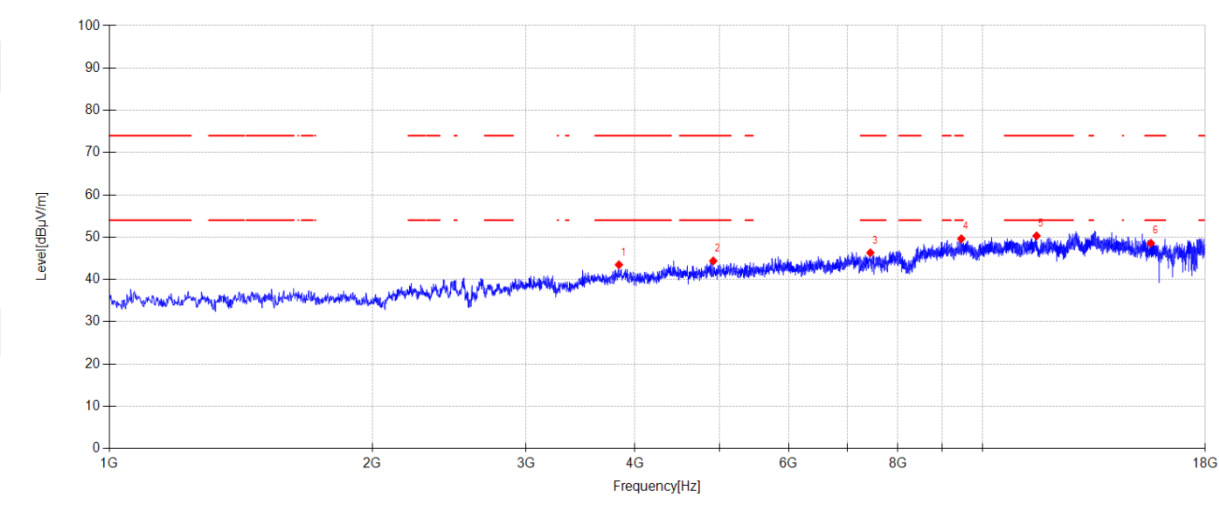


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3833.900	47.19	30.84	5.08	-39.64	43.47	74.00	30.53	PK	Vertical
2	4916.800	45.35	33.03	5.60	-39.61	44.37	74.00	29.63	PK	Vertical
3	7441.300	43.62	36.62	6.67	-40.60	46.31	74.00	27.69	PK	Vertical
4	9457.500	42.64	38.70	7.45	-39.17	49.62	74.00	24.38	PK	Vertical
5	11533.200	42.24	39.13	8.47	-39.53	50.31	74.00	23.69	PK	Vertical
6	15592.800	39.49	38.61	9.88	-39.40	48.58	74.00	25.42	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-31 **Tested By:** Nan Zhong
EUT: Meter **Model Number:** 6AQ9-42
Test Mode: TX DH5 2402MHz Mode **Power Supply:** DC 12V
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT17
Memo: Sample Numbler:S25032516 setting power:NA

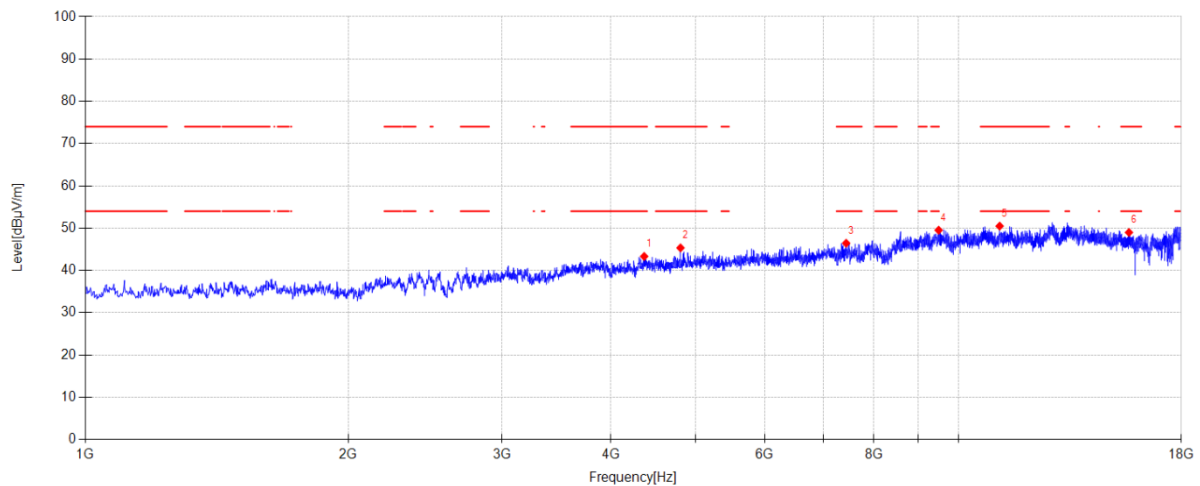


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4366.000	46.07	31.63	5.27	-39.65	43.32	74.00	30.68	PK	Horizontal
2	4804.600	46.80	32.62	5.53	-39.62	45.33	74.00	28.67	PK	Horizontal
3	7436.200	43.75	36.63	6.67	-40.61	46.44	74.00	27.56	PK	Horizontal
4	9491.500	42.55	38.70	7.46	-39.19	49.52	74.00	24.48	PK	Horizontal
5	11147.300	42.17	39.25	8.22	-39.15	50.49	74.00	23.51	PK	Horizontal
6	15677.800	39.94	38.52	9.93	-39.40	48.99	74.00	25.01	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-31 **Tested By:** Nan Zhong
EUT: Meter **Model Number:** 6AQ9-42
Test Mode: TX DH5 2402MHz Mode **Power Supply:** DC 12V
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT18
Memo: Sample Numbler:S25032516 setting power:NA

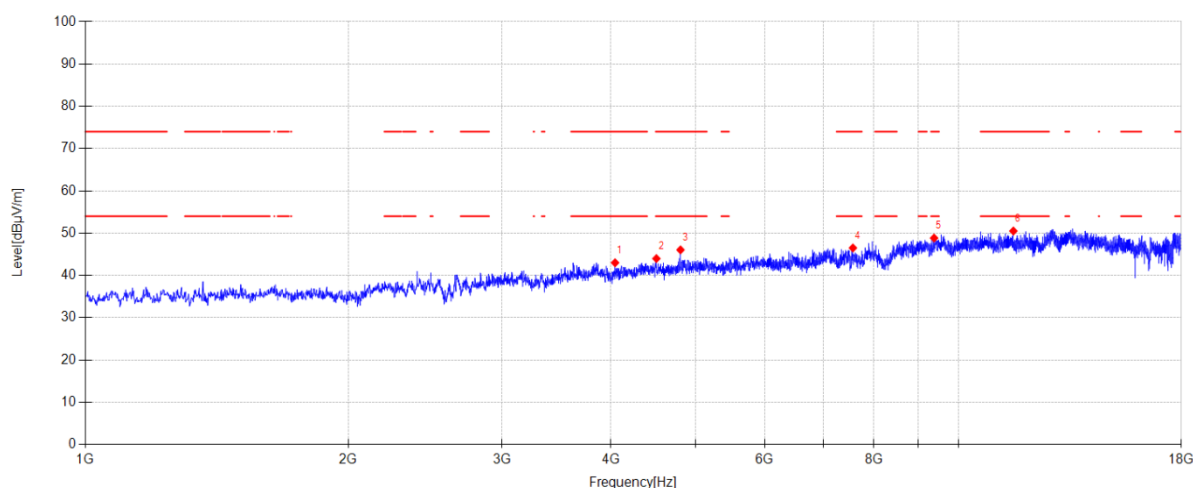

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4043.000	46.61	30.99	5.08	-39.68	43.00	74.00	31.00	PK	Vertical
2	4508.800	46.45	31.82	5.36	-39.64	43.99	74.00	30.01	PK	Vertical
3	4804.600	47.52	32.62	5.53	-39.62	46.05	74.00	27.95	PK	Vertical
4	7570.500	43.81	36.44	6.74	-40.49	46.50	74.00	27.50	PK	Vertical
5	9377.600	41.83	38.70	7.42	-39.10	48.85	74.00	25.15	PK	Vertical
6	11558.700	42.51	39.08	8.48	-39.56	50.51	74.00	23.49	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Band Edge Compliance

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2026/03/28	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
				2025/08/26	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28	1 Year

15.2. Block diagram of test setup

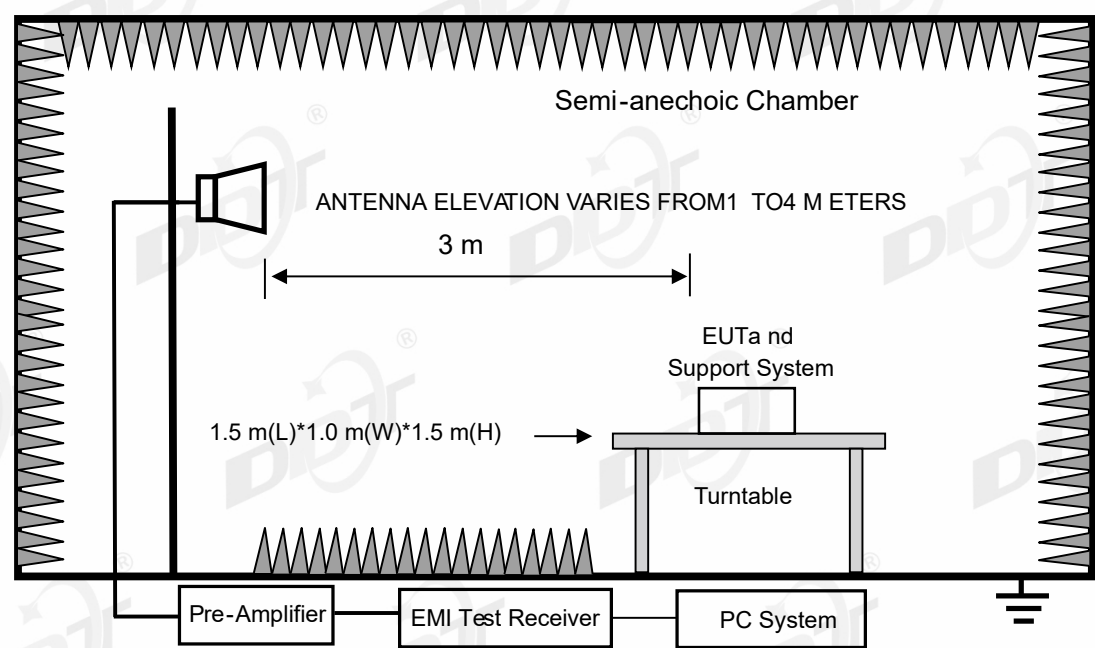

15.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description
Laptop	Lenovo	00425-00000-00002-AA135	NA

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

15.6. Test result

PASS. (See below detailed test result)

15.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT1

Memo:

Sample Numbler:S25072136-002 setting power:NA

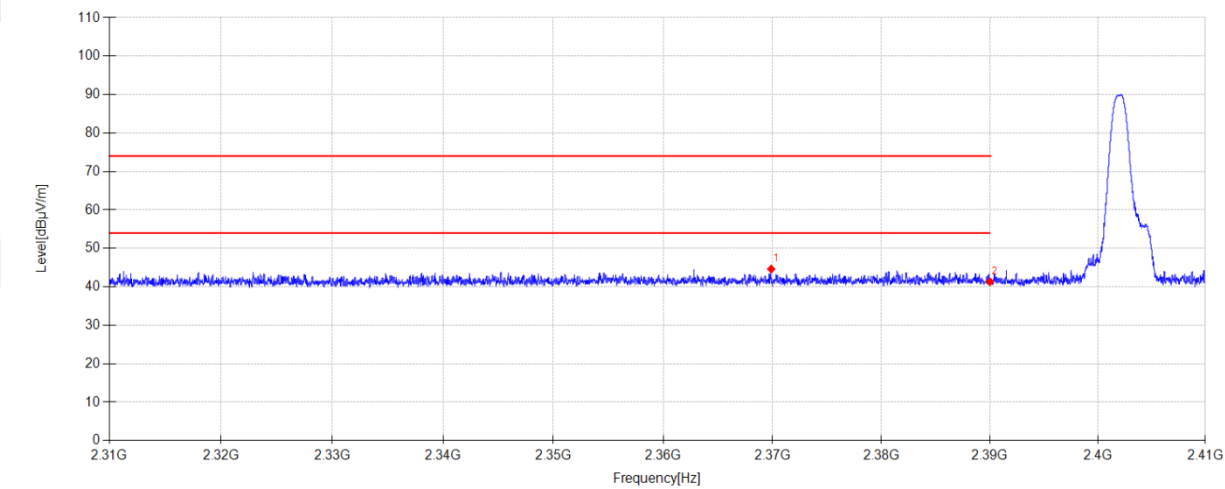

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2369.880	13.88	27.18	3.56	0.00	44.62	74.00	29.38	PK	Horizontal
2	2390.000	10.48	27.26	3.57	0.00	41.31	74.00	32.69	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-07-31 **Tested By:** Nan Zhong
EUT: Meter **Model Number:** 6AQ9-42
Test Mode: TX DH5 2402MHz Mode **Power Supply:** DC 12V
Condition: Temp:22.5°C;Humi:54.1% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT2
Memo: Sample Numbler:S25032516 setting power:NA

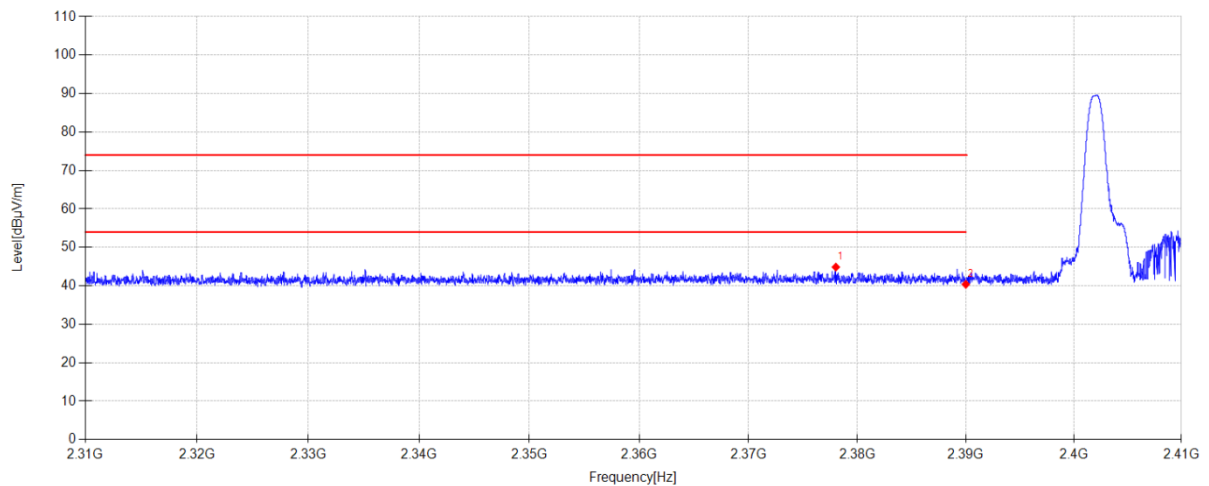**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.020	14.10	27.21	3.56	0.00	44.87	74.00	29.13	PK	Vertical
2	2390.000	9.57	27.26	3.57	0.00	40.40	74.00	33.60	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 2DH5 2402MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT3

Memo:

Sample Numbler:S25032516 setting power:NA

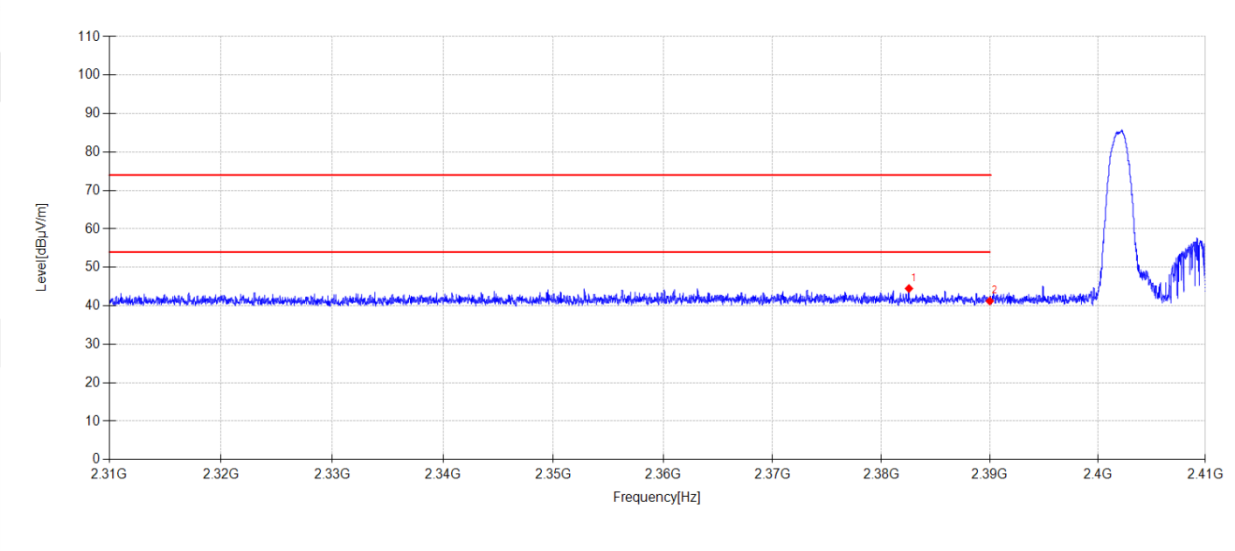

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2382.540	13.71	27.23	3.56	0.00	44.50	74.00	29.50	PK	Horizontal
2	2390.000	10.42	27.26	3.57	0.00	41.25	74.00	32.75	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 2DH5 2402MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT4

Memo:

Sample Numbler:S25032516 setting power:NA

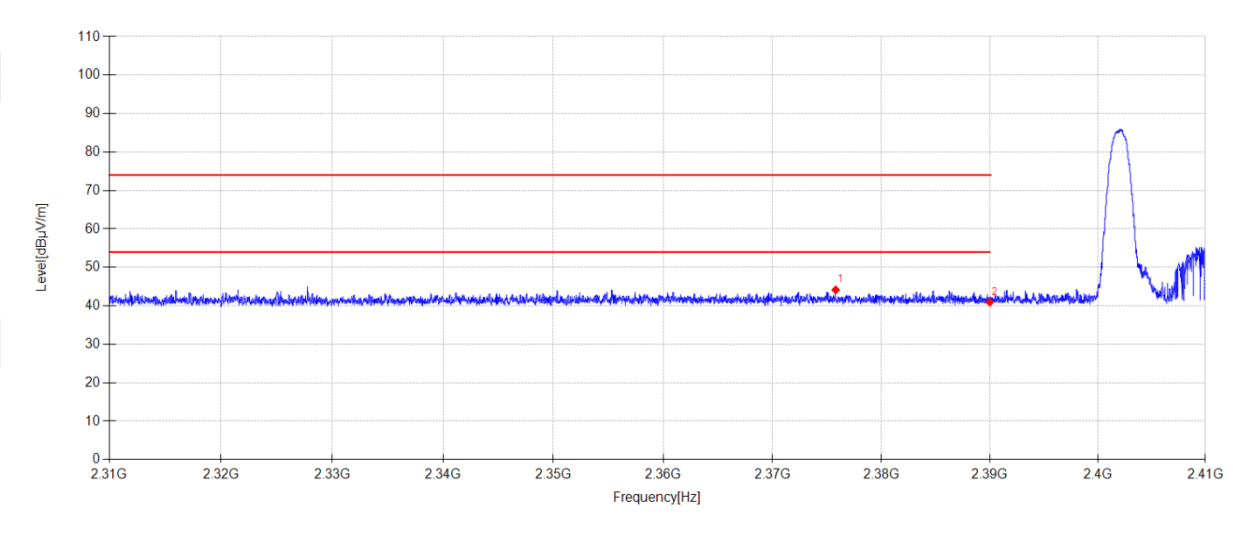

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.800	13.39	27.20	3.56	0.00	44.15	74.00	29.85	PK	Vertical
2	2390.000	10.13	27.26	3.57	0.00	40.96	74.00	33.04	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 3DH5 2402MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT5

Memo:

Sample Numbler:S25032516 setting power:NA

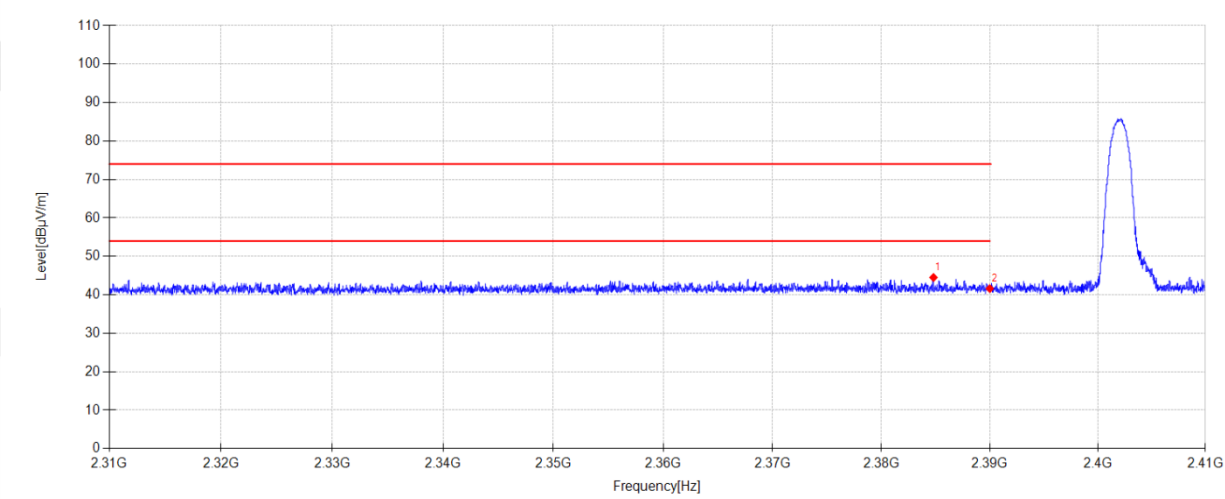

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.800	13.70	27.24	3.57	0.00	44.51	74.00	29.49	PK	Horizontal
2	2390.000	10.80	27.26	3.57	0.00	41.63	74.00	32.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 3DH5 2402MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT6

Memo:

Sample Numbler:S25032516 setting power:NA

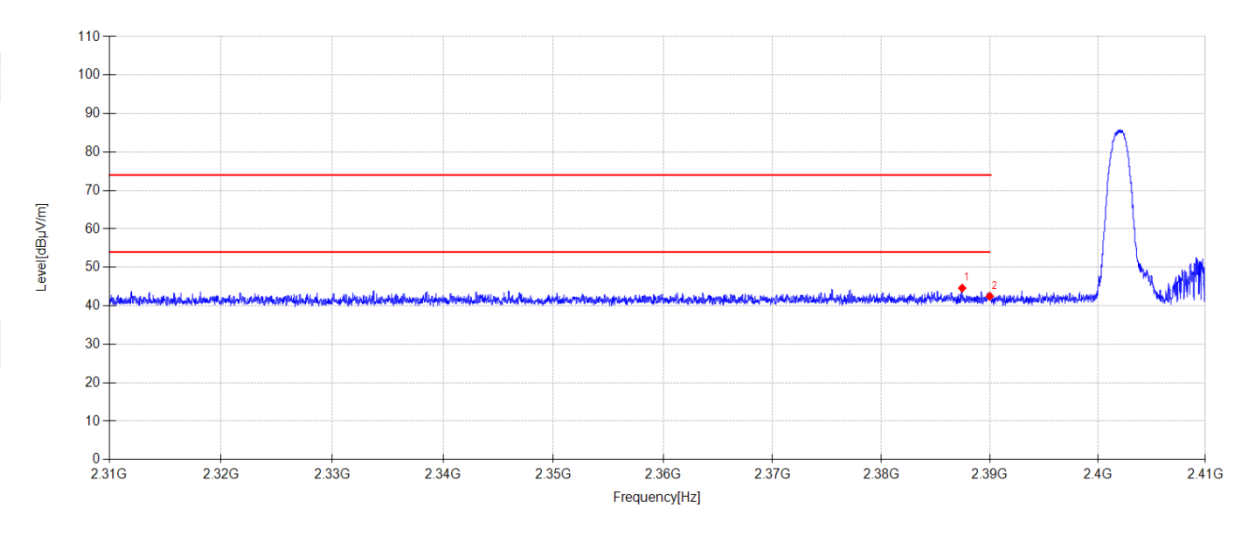

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.450	13.79	27.25	3.57	0.00	44.61	74.00	29.39	PK	Vertical
2	2390.000	11.66	27.26	3.57	0.00	42.49	74.00	31.51	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 3DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT7

Memo:

Sample Numbler:S25032516 setting power:NA

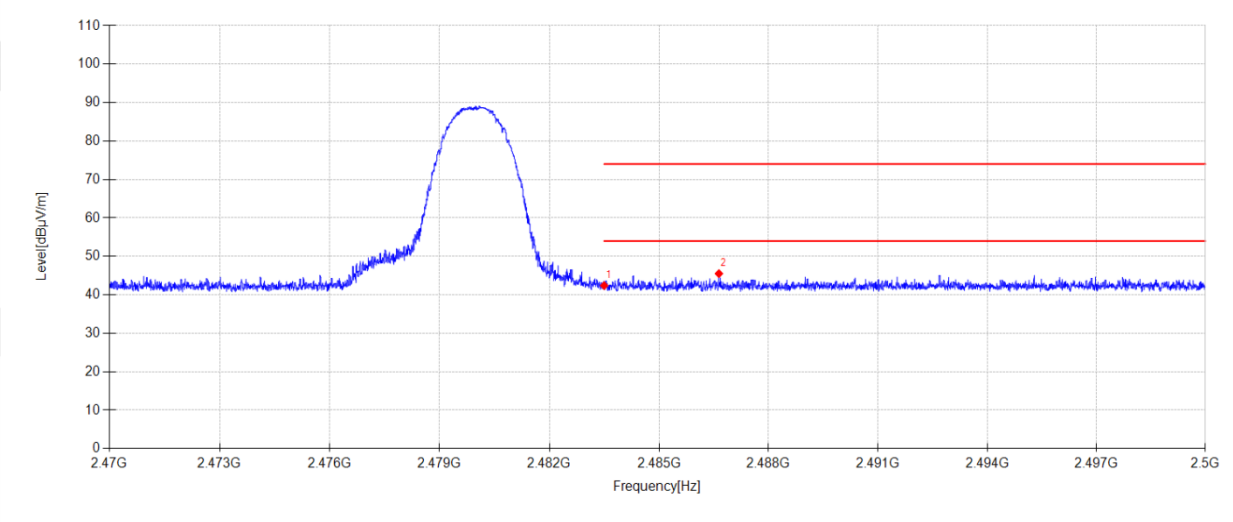

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.25	27.53	3.62	0.00	42.40	74.00	31.60	PK	Horizontal
2	2486.641	14.35	27.55	3.62	0.00	45.52	74.00	28.48	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 3DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT8

Memo:

Sample Numbler:S25032516 setting power:NA

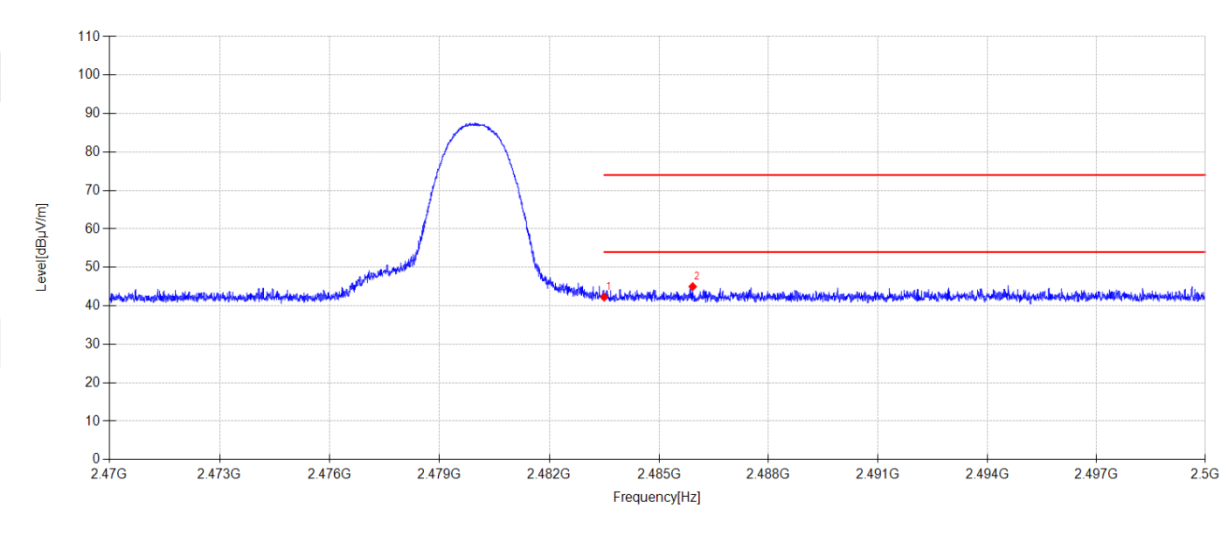

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.10	27.53	3.62	0.00	42.25	74.00	31.75	PK	Vertical
2	2485.924	13.84	27.54	3.62	0.00	45.00	74.00	29.00	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 2DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT9

Memo:

Sample Numbler:S25032516 setting power:NA

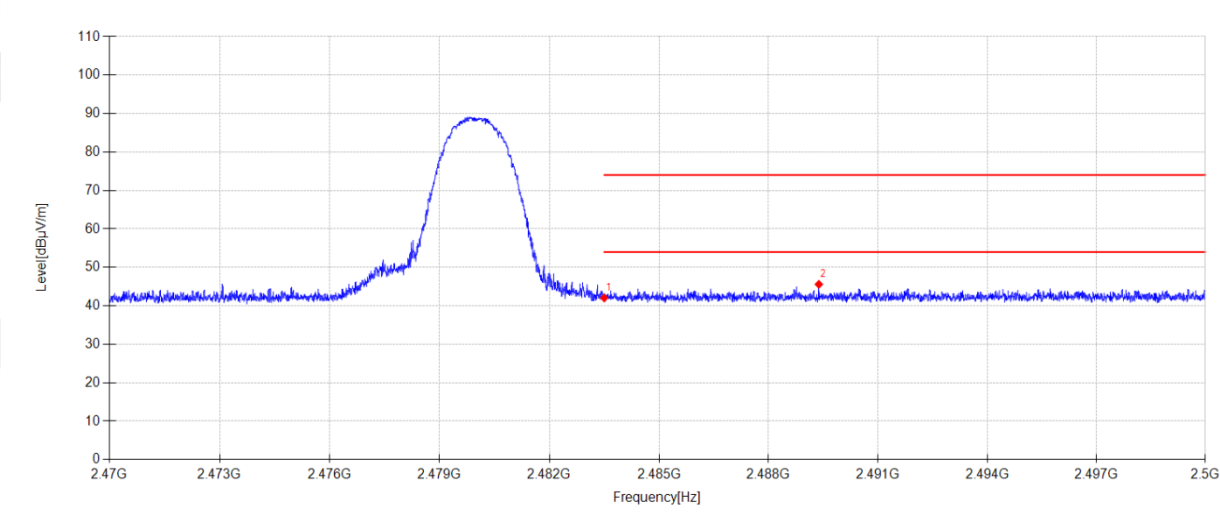

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.90	27.53	3.62	0.00	42.05	74.00	31.95	PK	Horizontal
2	2489.380	14.41	27.56	3.62	0.00	45.59	74.00	28.41	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX 2DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT10

Memo:

Sample Numbler:S25032516 setting power:NA

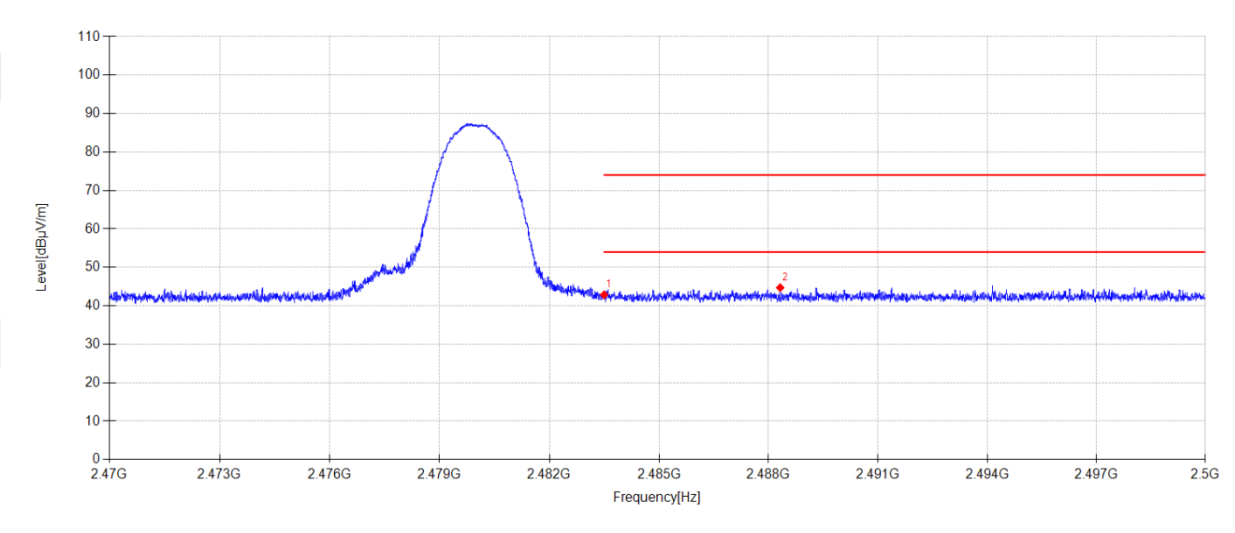

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.73	27.53	3.62	0.00	42.88	74.00	31.12	PK	Vertical
2	2488.321	13.55	27.55	3.62	0.00	44.72	74.00	29.28	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT11

Memo:

Sample Numbler:S25032516 setting power:NA

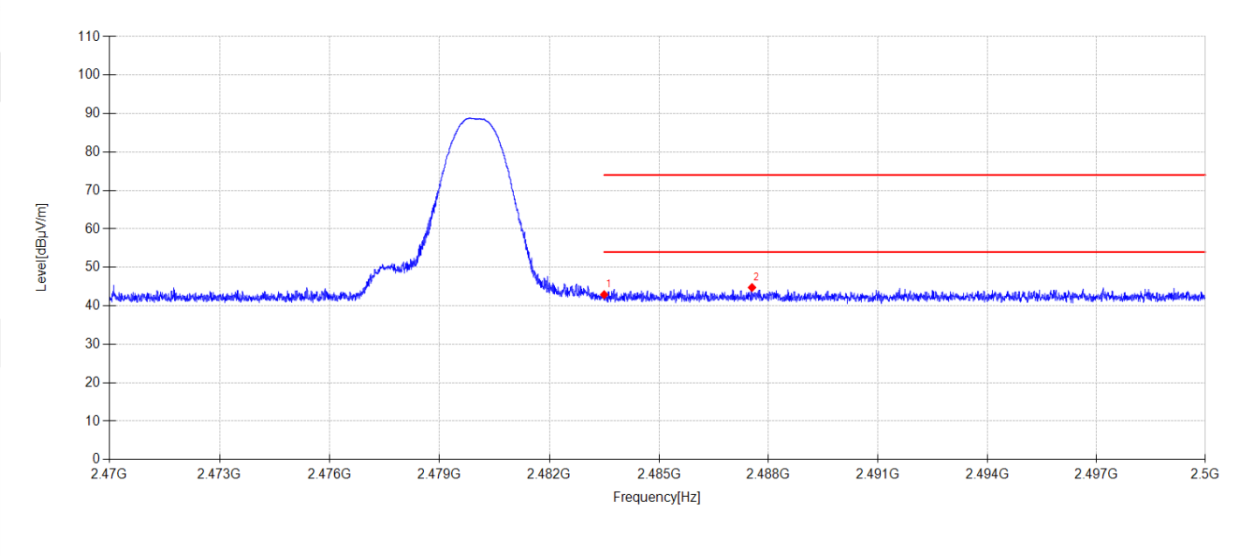

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.75	27.53	3.62	0.00	42.90	74.00	31.10	PK	Horizontal
2	2487.547	13.59	27.55	3.62	0.00	44.76	74.00	29.24	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-07-31

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ9-42

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

DC 12V

Condition:

Temp:22.5°C;Humi:54.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25032516-1E\FCC ABOVE 1G 901_BT12

Memo:

Sample Numbler:S25032516 setting power:NA

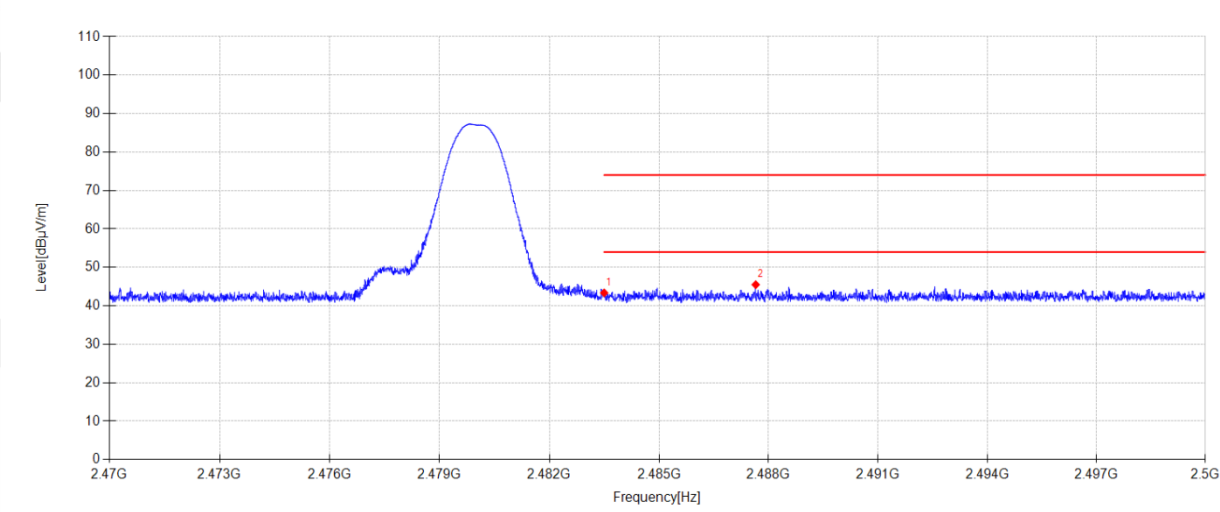

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.22	27.53	3.62	0.00	43.37	74.00	30.63	PK	Vertical
2	2487.649	14.33	27.55	3.62	0.00	45.50	74.00	28.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

16. Power Line Conducted Emissions

16.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
/	/	/	/	/	/

16.2. Block diagram of test setup

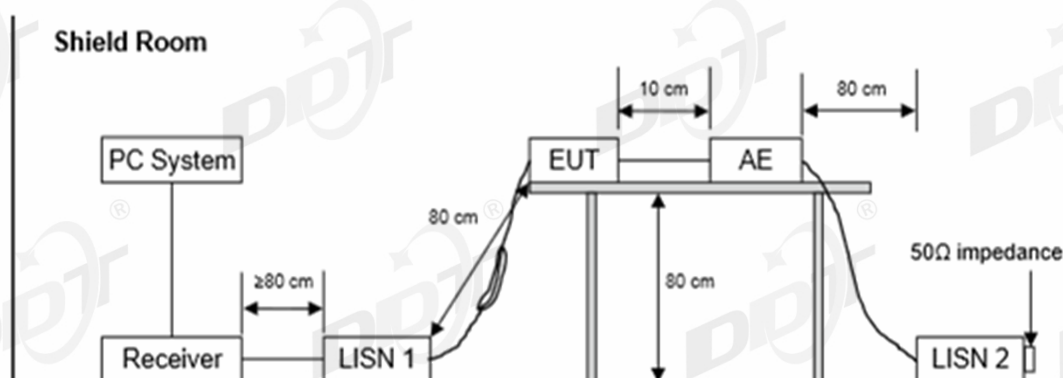

16.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.6. Test result

Not applicable, for the product is DC powered.

18. Photos of the EUT

Please refer to appendix I

-----End Report-----