

承 认 书

SPECIFICATION FOR APPROVAL

客 户: Shenzhen Jiayucang Technology Co., Ltd.
CUSTOMER:

客 户 料 号: 25.21342-1
CUST P/N:

煜 耀 料 号: Y-2521342
YUYAO P/N:

产 品 型 号: 磁片Ø 40*5.3*0.8Ø 17*0.08*24P*2P*11TS-6.6UH-8mm
D E S T:

日 期: 2026.4.21
DATE:

版 本: V1
VERSION:

制 定 PREPARED BY	审 核 CHECKED BY	批 准 APPROVED BY	客 户 承 认 CUSTOMER APPROVE
Shaodong Zheng	Zhendong Yao	Qiancheng Cao	



东莞市煜耀电子科技有限公司

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

TEL: 13717089408

FAX: 0769-82866409

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409

Factory Address: No. 1, Xinxinyang Road, Lin Village, Tangxia Town,
Dongguan City; Building 21, Xintai Sun Industrial Park

版本变更履历

Version Change History

版本 Rev	变更前 Before Change	变更后 After Change	变更日期 Change Date	批准 Approved By
V1	New release		2026.4.21	

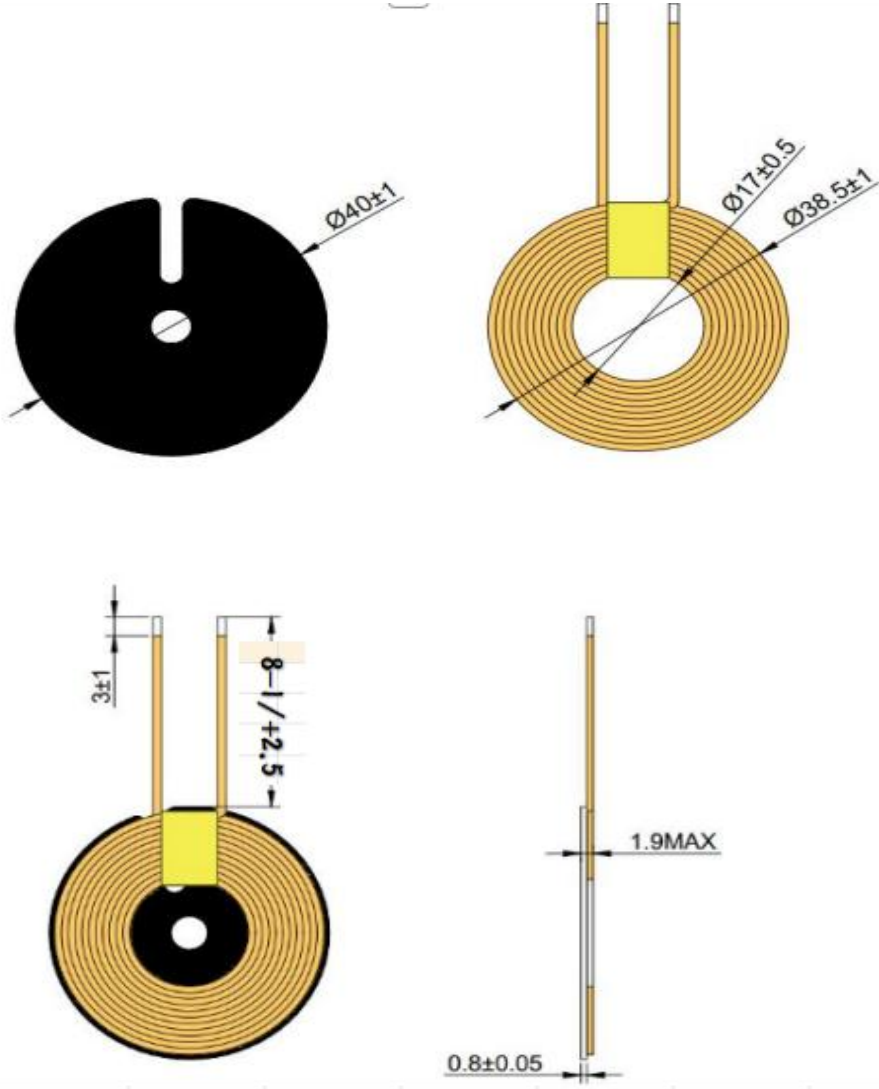
DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409

SPECIFICATION APPROVAL

产品型号: D E S T:	$\varnothing 40 \times 5.3 \times 0.8 \varnothing$ 17*0.08*24P*2P*11TS-6.6UH- 8mm	版 本: VERSION:	V0	客 户: CUSTOMER:	
				客 户 料 号: CUST P/N:	25.21342-1
				煜 耀 料 号: YUYAO P/N:	Y-2521342

一、尺寸 DIMENSION:(mm)

 Technical drawings of the component showing top, side, and cross-sectional views with dimensions: - Top view: $\varnothing 40 \pm 1$ - Side view: $\varnothing 17 \pm 0.5$, $\varnothing 38.5 \pm 1$ - Bottom view: 3 ± 1, $8-1/+2.5$ - Side view: 1.9 MAX - Bottom view: 0.8 ± 0.05		制定/日期 PREPARED BY/DATE 审核/日期 CHECKED BY/DATE	
Shaodong Zheng/2026.4.21		Zhendong Yao/2026.4.21	

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409

SPECIFICATION APPROVAL

产品型号: D E S T:	Ø 40*5.3*0.8Ø 17*0.08*24P*2P*11TS-6.6UH- 8mm		版 本: VERSION:	V0	客 户: CUSTOMER:	
					客 户 料 号: CUST P/N:	25.21342-1
					煜 耀 料 号: YUYAO P/N:	Y-2521342
二、原理图 SCHEMATIC DIAGRAM:						
SF						
三、绕线参数 WINDING SPECIFICATION:						
序号 NO	端子 TERMINAL		线径 WIRE	圈数 TURNS	绕线方向 WINDING DIRECTION	
1	S	F	0.08*24P*2P	11TS	逆时针 Counter-clockwise	
四、电气特性 ELECTRICAL CHARACTERISTICS:						
温度 TEMPERATURE:25℃±10℃,湿度 RELATIVE HUMIDITY:65±20%						
序号 NO	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND	S-F	3.8UH±10% Single coil	100KHZ/1V	LCZ METER1062B	
2	IND	S-F	6.5UH±10%	100KHZ/1V	LCZ METER1062B	
3	DCR	S-F	85mΩ MAX	1KHZ/1V	TH2810	
4	Q值	S-F	32MIN	100KHZ/1V	LCZ METER1062B	
制定/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE		
Shaodong Zheng/2026.4.21				Zhendong Yao/2026.4.21		

DONGGUAN YUYAO ELECTRONIC TECHNOLOGY CO.,LTD

东莞市煜耀电子科技有限公司 TEL: 13717089408 FAX: 0769-82866409