

FCC TEST REPORT

FCC ID:2BTGC-M201

Applicant Name..... : Shenzhen Moni Technology Co., LTD
Address..... : Room 201-301, Factory Building A7,Quanbao Industrial Zone, Shiyan Sub-district,Bao 'an District, Shenzhen City, China
Manufacturer Name..... : Shenzhen Moni Technology Co., LTD
Address..... : Room 201-301, Factory Building A7,Quanbao Industrial Zone, Shiyan Sub-district,Bao 'an District, Shenzhen City, China
Product..... : Multifunctional Wireless Charging for Audio Equipment
Model(s)..... : M201
Additional Model(s)..... : /
Trademark..... : /
Model Difference..... : /
Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.
Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Date of Receipt..... : Apr. 16, 2026
Date of Test(s)..... : Apr. 16, 2026 - Apr. 30, 2026
Date of Issue..... : Jun. 3, 2026
Test Requested..... : Select test(s) as requested by the client.
Test Standard(s)..... : FCC CFR Title 47 Part 15 Subpart C
Test procedure..... : ANSI C63.10-2020 + Cor. 1-2023

In the configuration tested, the EUT complied with the standards specified above.

Prepared by

Leon Li

Leon Li/ Engineer

Reviewed by:

Baret Wu

Baret Wu/ Director

Approved by:

Levi Lee

Levi Lee/ Manager

Note: This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.



TABLE OF CONTENTS

1. TEST SUMMARY	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 TEST MODE	5
2.3 BLOCK DIAGRAM OF EUT CONFIGURATION	6
2.4 TEST CONDITIONS	6
2.5 DESCRIPTION OF SUPPORT UNITS	6
3. TEST FACILITY AND TEST INSTRUMENT USED	7
3.1 TEST FACILITY	7
3.2 INSTRUMENT LIST FOR ALL TEST ITEMS	7
3.3 TESTING SOFTWARE	8
3.4 MEASUREMENT UNCERTAINTY	9
4. CONDUCTED EMISSION TEST	10
4.1 CONDUCTED EMISSION MEASUREMENT	10
4.1.1 POWER LINE CONDUCTED EMISSION Limits	10
4.1.2 TEST PROCEDURE	10
4.1.3 DEVIATION FROM TEST STANDARD	10
4.1.4 TEST SETUP	11
4.1.5 EUT OPERATING CONDITIONS	11
4.1.6 TEST RESULT	12
5. RADIATED EMISSION MEASUREMENT	14
5.1 RADIATED EMISSION LIMITS	14
5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM	15
5.3 TEST PROCEDURE	15
5.4 DEVIATION FROM TEST STANDARD	15
5.5 TEST RESULT	16
6. BANDWIDTH TEST	22
7. ANTENNA REQUIREMENT	26
8. TEST SETUP PHOTO	27
9. EUT CONSTRUCTIONAL DETAILS	27

1. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Multifunctional Wireless Charging for Audio Equipment
Test Model No:	M201
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	Phone: 111-205KHz Earbuds: 111-205KHz Watch: 111-360 kHz
Modulation type:	ASK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Input : 15 V  3 A Wireless charging: Phone output: 15 W Earbuds output: 5 W Watch output: 2.5 W
Sample Number:	260415112YP001
Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	




2.2 TEST MODE

Test Modes:	
Mode 1	AC Mains + Phone charging port + Earbuds charging port + Watch charging port (Battery Status:≤1%)
Mode 2	AC Mains + Phone charging port + Earbuds charging port + Watch charging port (Battery Status:50%)
Mode 3	AC Mains + Phone charging port + Earbuds charging port + Watch charging port (Battery Status:≥98%)
Mode 4	AC Mains + Phone charging port(Battery Status:≤1%)
Mode 5	AC Mains + Phone charging port(Battery Status:50%)
Mode 6	AC Mains + Phone charging port(Battery Status:≥98%)
Mode 7	AC Mains + Watch charging port(Battery Status:≤1%)
Mode 8	AC Mains + Watch charging port(Battery Status:50%)
Mode 9	AC Mains + Watch charging port(Battery Status:≥98%)
Mode 10	AC Mains + Earbuds charging port(Battery Status:≤1%)
Mode 11	AC Mains + Earbuds charging port(Battery Status:50%)
Mode 12	AC Mains + Earbuds charging port(Battery Status:≥98%)
Mode 13	Standby
Note: All modes were tested, only the worst-case was recorded in the report. Mode 1 is the worst mode.	




2.3 BLOCK DIAGRAM OF EUT CONFIGURATION

Conducted Emission

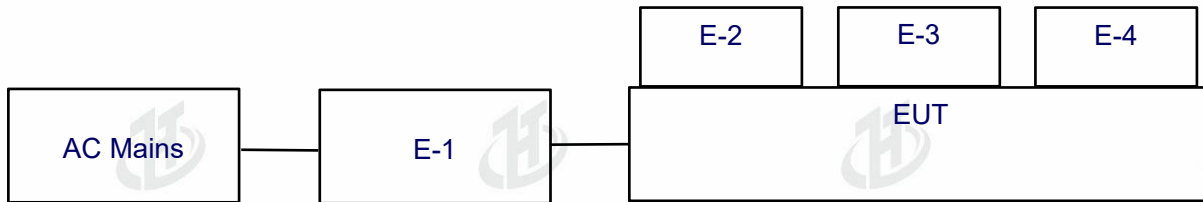

Radiated Emission

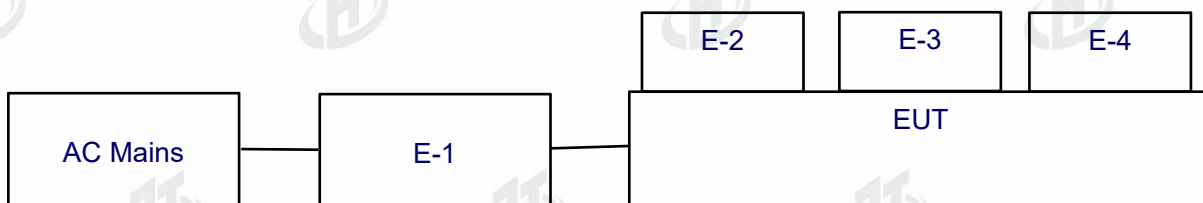

2.4 TEST CONDITIONS

Temperature: 25.6°C

Relative Humidity: 54.3%RH

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC Adapter	iforg	191106C	/	AE
2	Mobile phone	Xiaomi Communications Co., Ltd.	Xiaomi 13	/	AE
3	Earphone	Apple Inc.	A2031	/	AE
4	Apple watch	Apple Inc.	ultra 2	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:	
(1)	The support equipment was authorized by Declaration of Confirmation.
(2)	For detachable type I/O cable should be specified the length in cm in 『Length』 column.
(3)	“YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3. TEST FACILITY AND TEST INSTRUMENT USED

3.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. :Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number: 255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

3.2 INSTRUMENT LIST FOR ALL TEST ITEMS

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop Antenna	TESEQ	HLA6121	58357	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	Power Amplifier Shielding Room	EMToni	2m3m3m	/	Nov. 25, 2021	Nov. 24, 2026
15	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNCM -2000MM	/	May 7, 2025	May 6, 2026

Conducted Test Instrument

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
3	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026

3.3 TESTING SOFTWARE

Project	Software name	Edition
Conducted Emission	EZ-EMC	EMC-CON 3A1.1+
Radiated Emission	EZ-EMC	FA-03A2 RE+
RF Test	MTS 8310	2.0.0.0

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	4.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

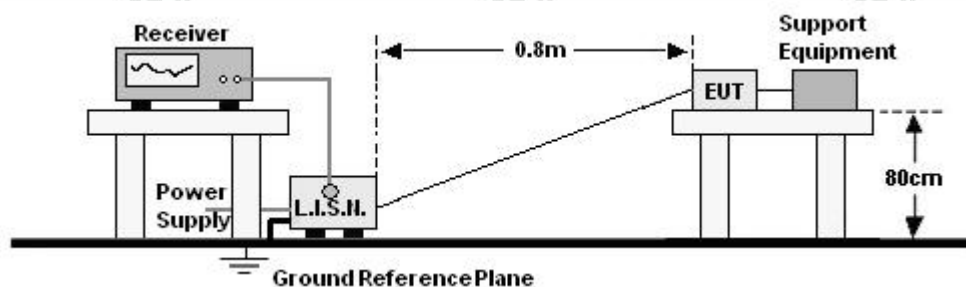


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

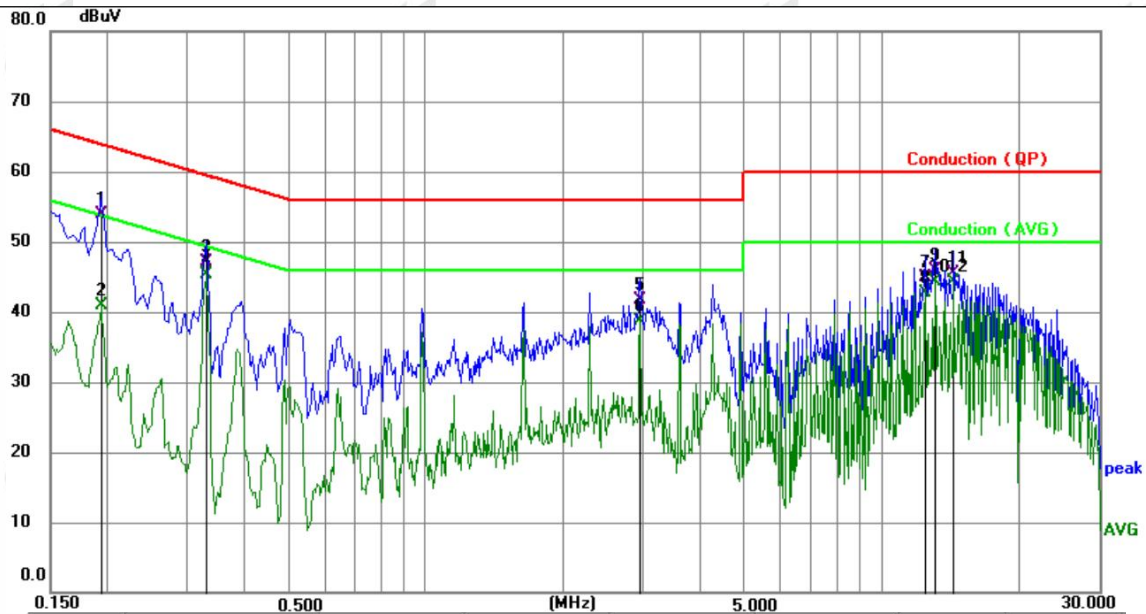


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1932	44.08	9.91	53.99	63.90	-9.91	QP
2	0.1932	30.93	9.91	40.84	53.90	-13.06	AVG
3	0.3300	37.19	9.97	47.16	59.45	-12.29	QP
4 *	0.3300	35.40	9.97	45.37	49.45	-4.08	AVG
5	2.9490	31.63	10.07	41.70	56.00	-14.30	QP
6	2.9490	28.62	10.07	38.69	46.00	-7.31	AVG
7	12.4530	34.90	10.09	44.99	60.00	-15.01	QP
8	12.4530	32.63	10.09	42.72	50.00	-7.28	AVG
9	13.1053	35.78	10.09	45.87	60.00	-14.13	QP
10	13.1053	34.28	10.09	44.37	50.00	-5.63	AVG
11	14.4193	35.49	10.09	45.58	60.00	-14.42	QP
12	14.4193	34.14	10.09	44.23	50.00	-5.77	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	24.6°C	Relative Humidity:	54.7%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

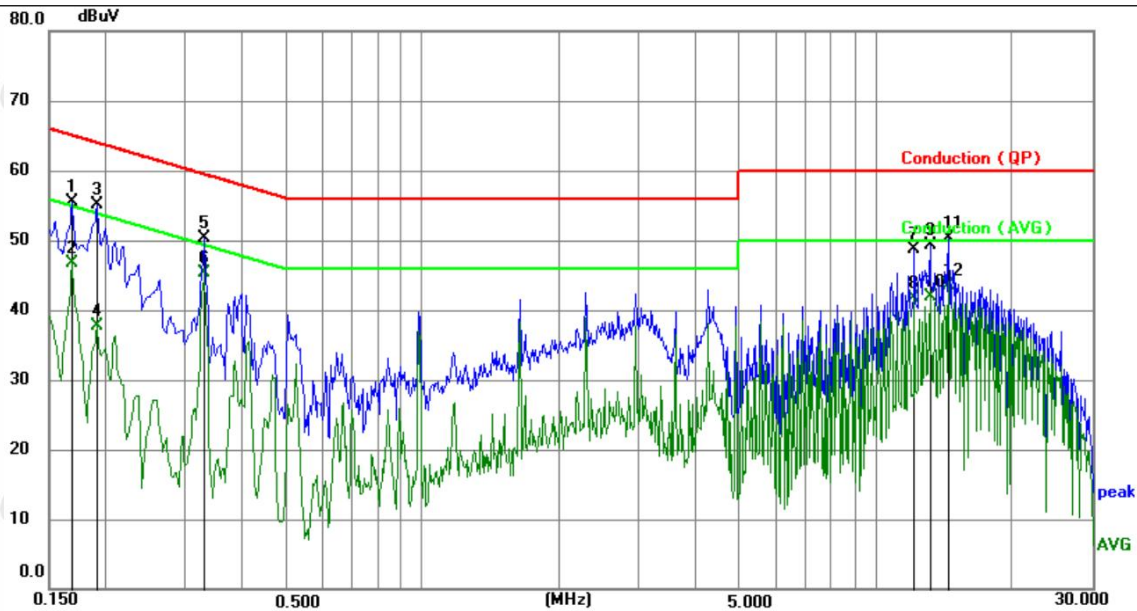

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1680	45.63	9.90	55.53	65.06	-9.53	peak
2	0.1680	36.71	9.90	46.61	55.06	-8.45	AVG
3	0.1905	45.20	9.91	55.11	64.01	-8.90	peak
4	0.1905	27.76	9.91	37.67	54.01	-16.34	AVG
5	0.3300	40.33	9.97	50.30	59.45	-9.15	peak
6 *	0.3300	35.32	9.97	45.29	49.45	-4.16	AVG
7	12.1334	38.60	10.09	48.69	60.00	-11.31	peak
8	12.1334	31.63	10.09	41.72	50.00	-8.28	AVG
9	13.1504	39.29	10.09	49.38	60.00	-10.62	peak
10	13.1504	31.84	10.09	41.93	50.00	-8.07	AVG
11	14.4960	40.13	10.09	50.22	60.00	-9.78	peak
12	14.4960	33.45	10.09	43.54	50.00	-6.46	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 RADIATED EMISSION LIMITS

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM

(A) Radiated Emission Test-Up Frequency Below 30MHz

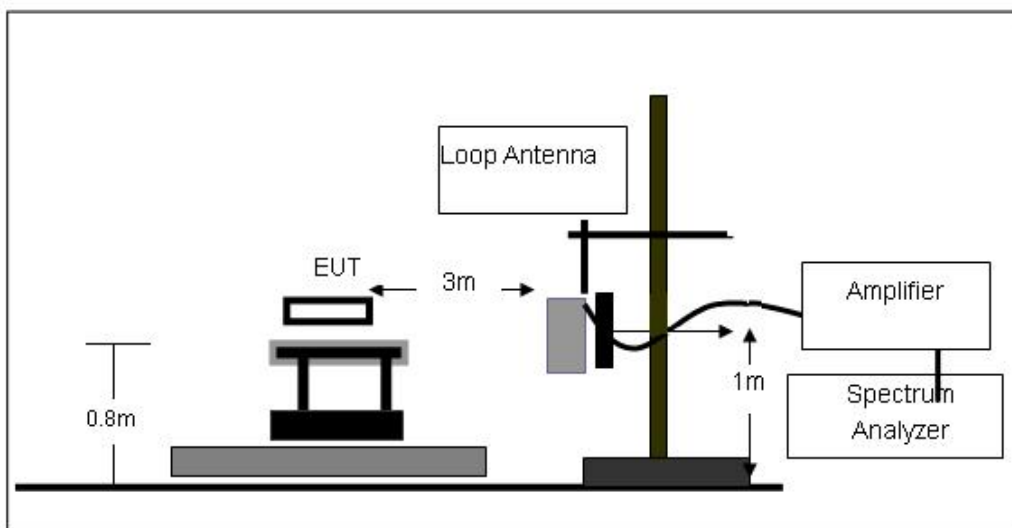

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

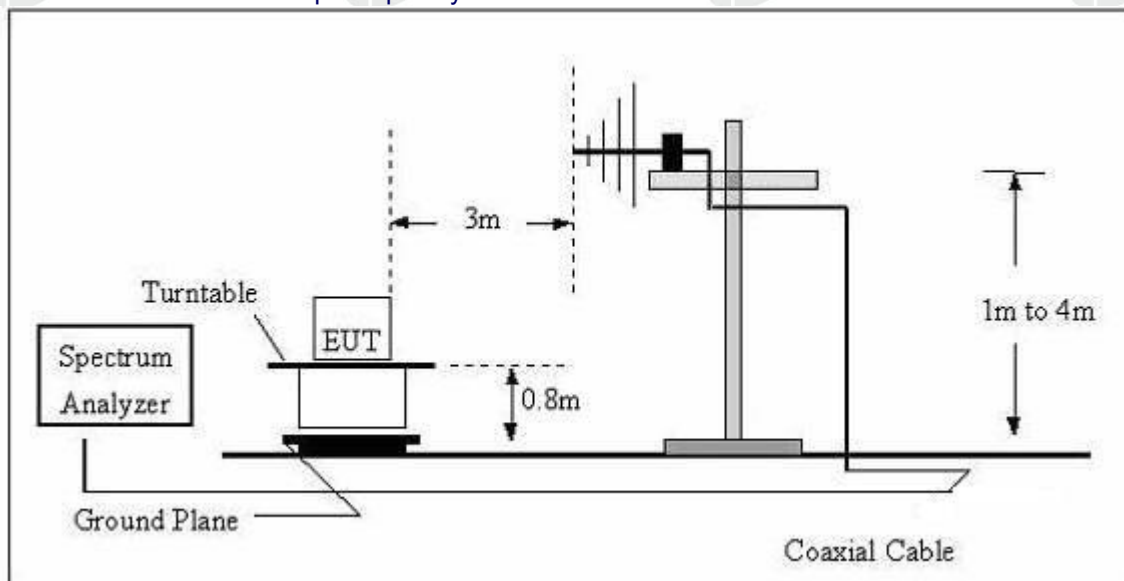

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020 + Cor. 1-2023. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 TEST PROCEDURE

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation



5.5 TEST RESULT


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~150KHz


Temperature:	24.2℃	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coaxial

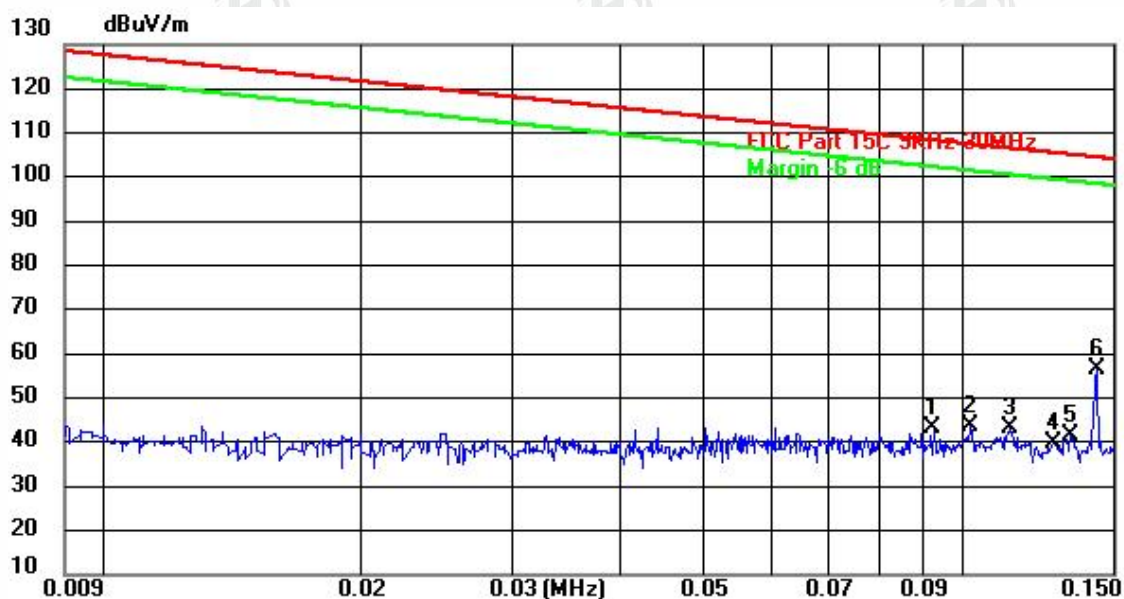

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0926	23.04	20.05	43.09	108.27	-65.18	peak
2	0.1023	23.49	20.06	43.55	107.41	-63.86	peak
3	0.1135	22.96	20.08	43.04	106.50	-63.46	peak
4	0.1280	19.71	20.10	39.81	105.46	-65.65	peak
5	0.1335	21.35	20.11	41.46	105.09	-63.63	peak
6 *	0.1431	36.17	20.12	56.29	104.48	-48.19	peak



Temperature:	24.2°C	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coplanar

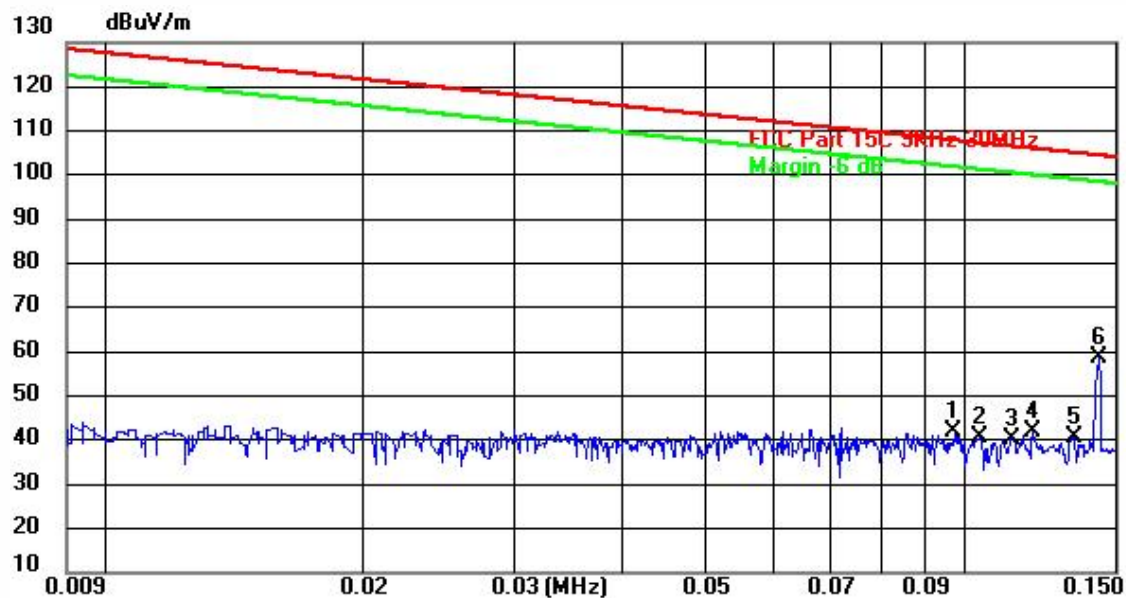


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0974	21.73	20.06	41.79	107.83	-66.04	peak
2	0.1043	20.39	20.07	40.46	107.24	-66.78	peak
3	0.1135	20.30	20.08	40.38	106.50	-66.12	peak
4	0.1200	21.69	20.09	41.78	106.02	-64.24	peak
5	0.1345	20.48	20.11	40.59	105.03	-64.44	peak
6 *	0.1431	38.39	20.12	58.51	104.48	-45.97	peak



150kHz~30MHz


Temperature:	24.2℃	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coaxial

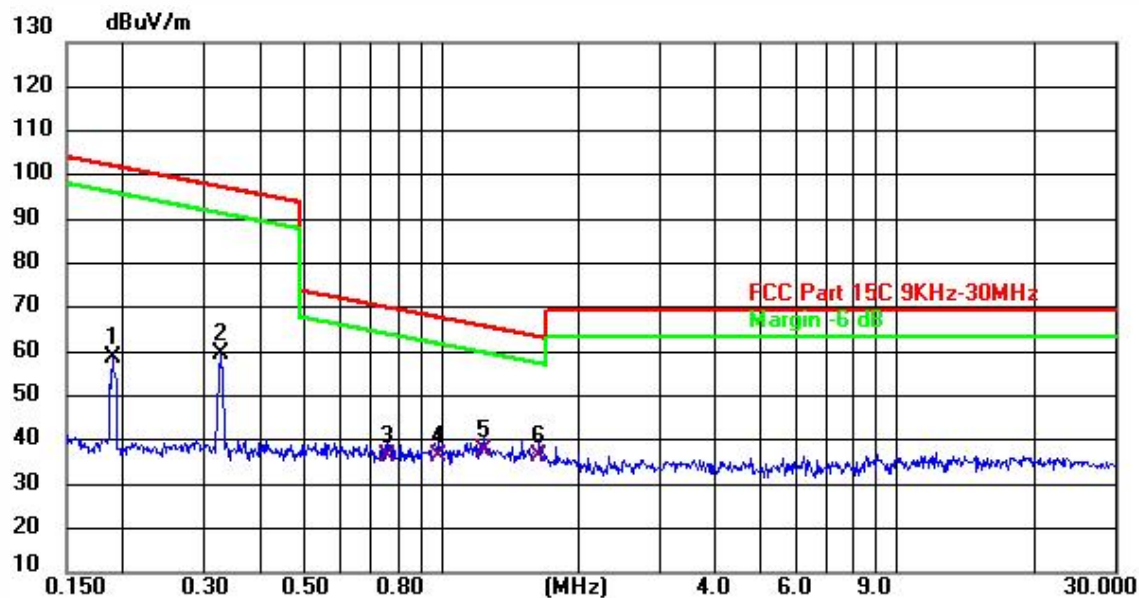

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1886	38.53	20.13	58.66	102.07	-43.41	peak
2	0.3276	39.24	20.14	59.38	97.32	-37.94	peak
3	0.7590	16.58	19.94	36.52	70.00	-33.48	QP
4	0.9840	16.48	19.88	36.36	67.74	-31.38	QP
5	1.2356	17.59	19.89	37.48	65.77	-28.29	QP
6 *	1.6362	16.31	19.92	36.23	63.33	-27.10	QP




Temperature:	24.2°C	Humidity	56.1%
Pressure:	101 kPa	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Polarization:	Coplanar

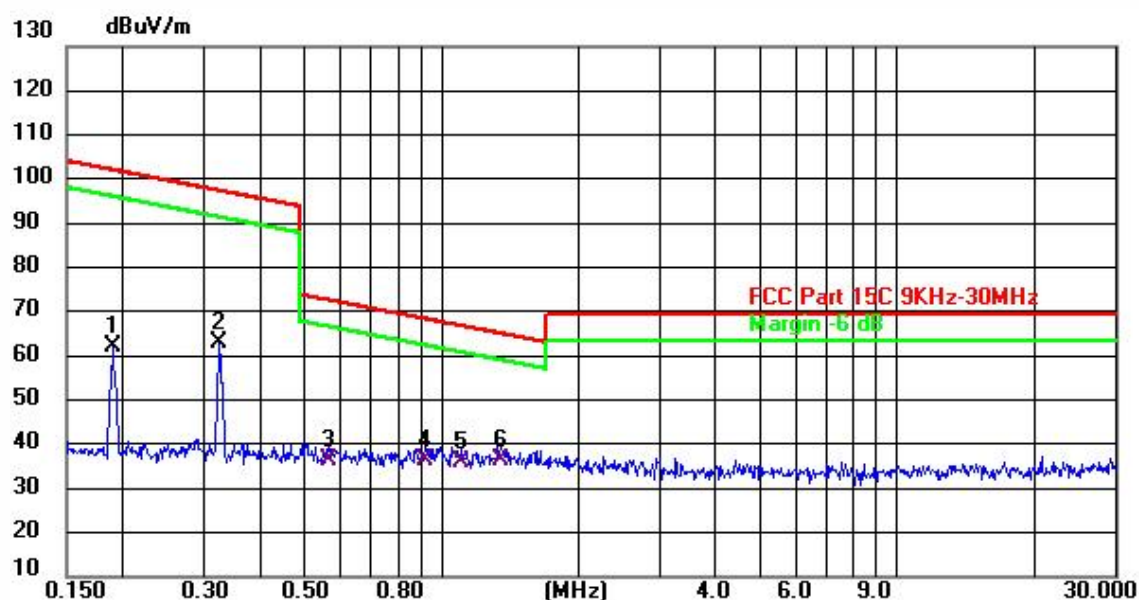

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1886	42.09	20.13	62.22	102.07	-39.85	peak
2	0.3276	42.89	20.14	63.03	97.36	-34.33	peak
3	0.5639	16.22	20.09	36.31	72.58	-36.27	QP
4	0.9183	16.45	19.90	36.35	68.34	-31.99	QP
5	1.0993	15.92	19.88	35.80	66.78	-30.98	QP
6 *	1.3450	16.62	19.91	36.53	65.03	-28.50	QP


30MHz-1GHz

Temperature:	23.6℃	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 1

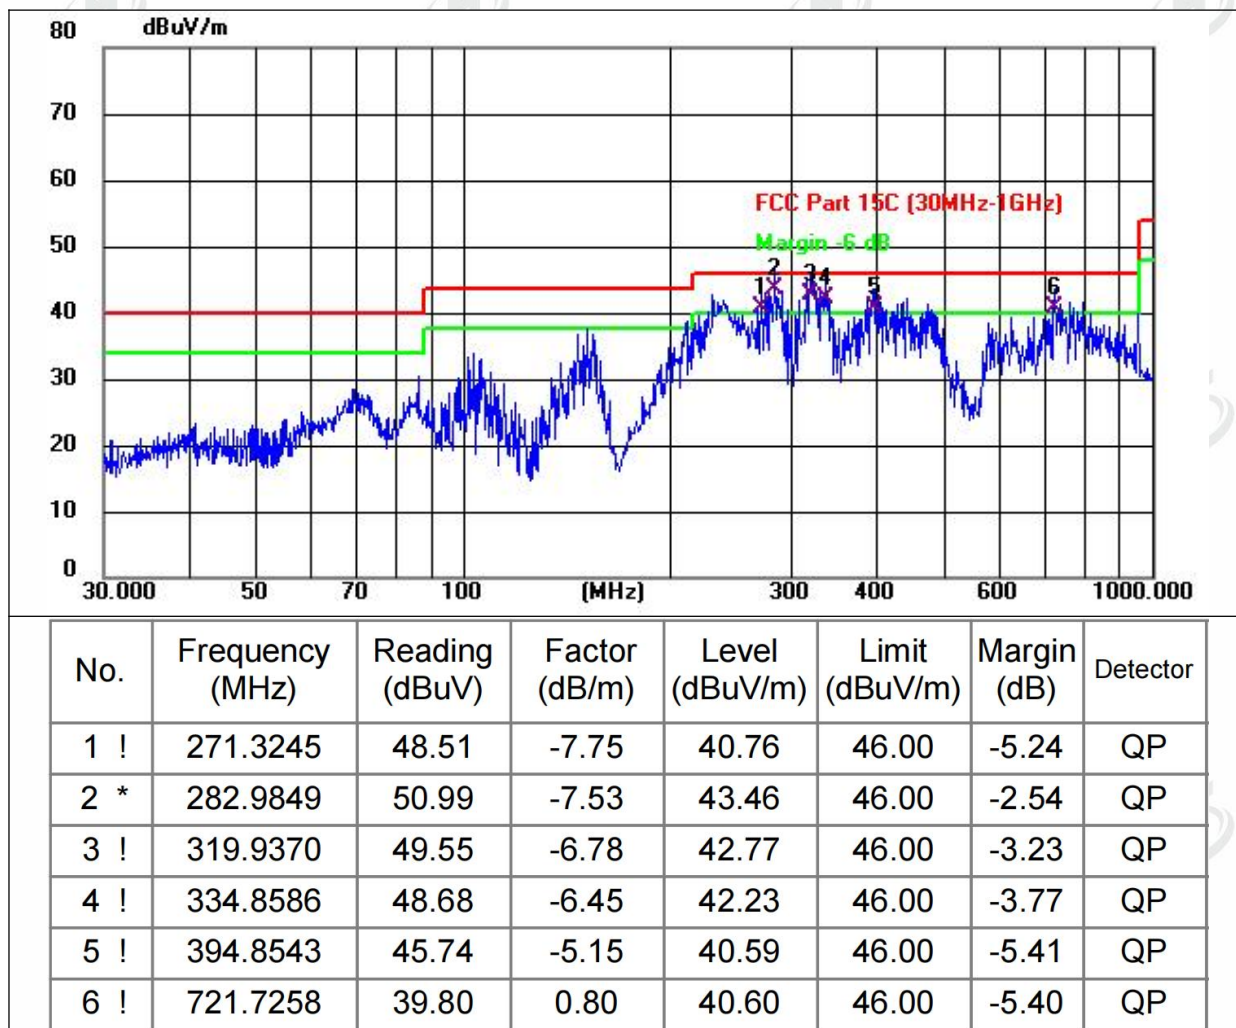



Temperature:	23.6°C	Relative Humidity:	53.5%
Pressure:	101.4kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Modes:	Mode 1

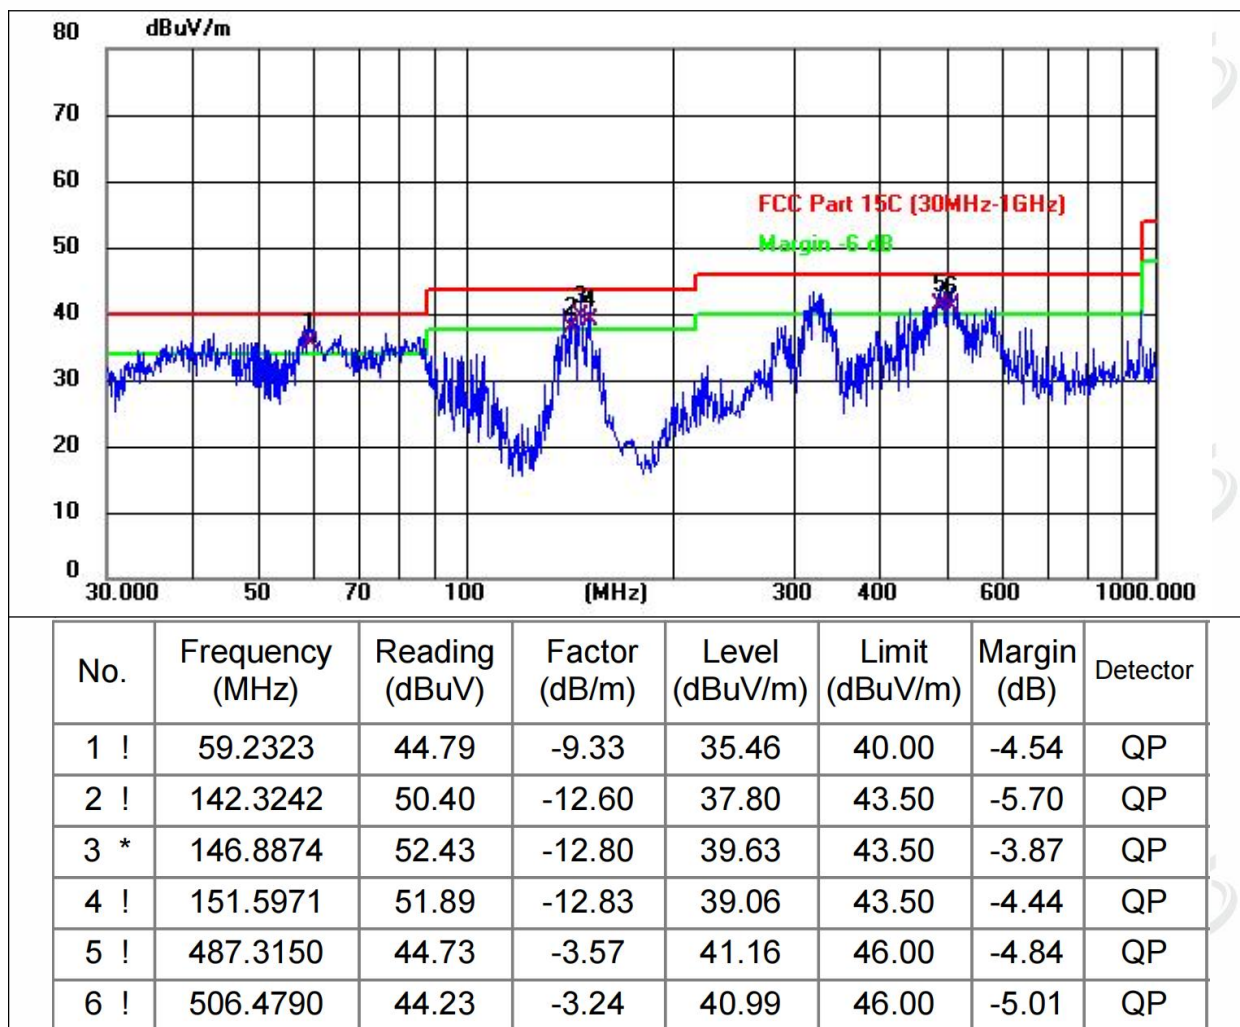

Remarks:


- Factor = Antenna Factor + Cable Loss - Preamplifier Factor
- Level = Reading + Factor
- Margin = Emission Level- Limit.
- The emission levels of other frequencies are very lower than the limit and not show in test report.



6. BANDWIDTH TEST

1. Set RBW = 1%-5%OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

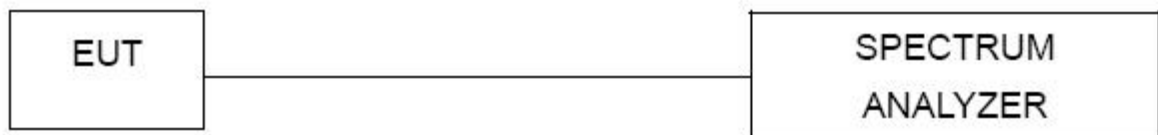





Temperature:	24.2 °C	Relative Humidity:	54.6%
Pressure:	101.4kPa		

Coil	Frequency (kHz)	20dB bandwidth (kHz)	Result
Phone coil	143.1	0.066	Pass
Earbuds coil	188.6	0.074	Pass
Watch coil	327.6	0.177	Pass


Phone coil

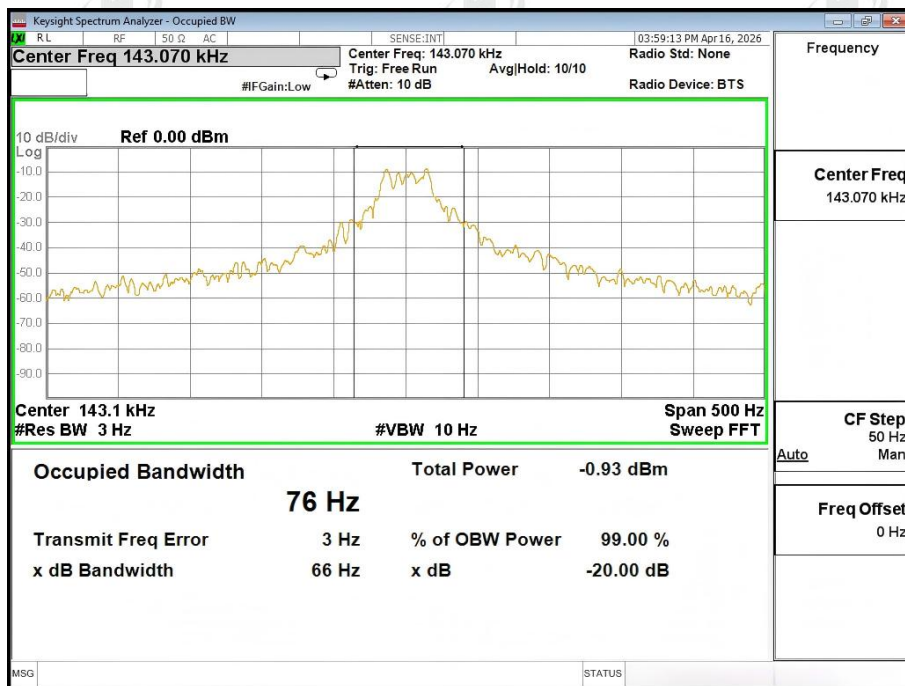

Earbuds

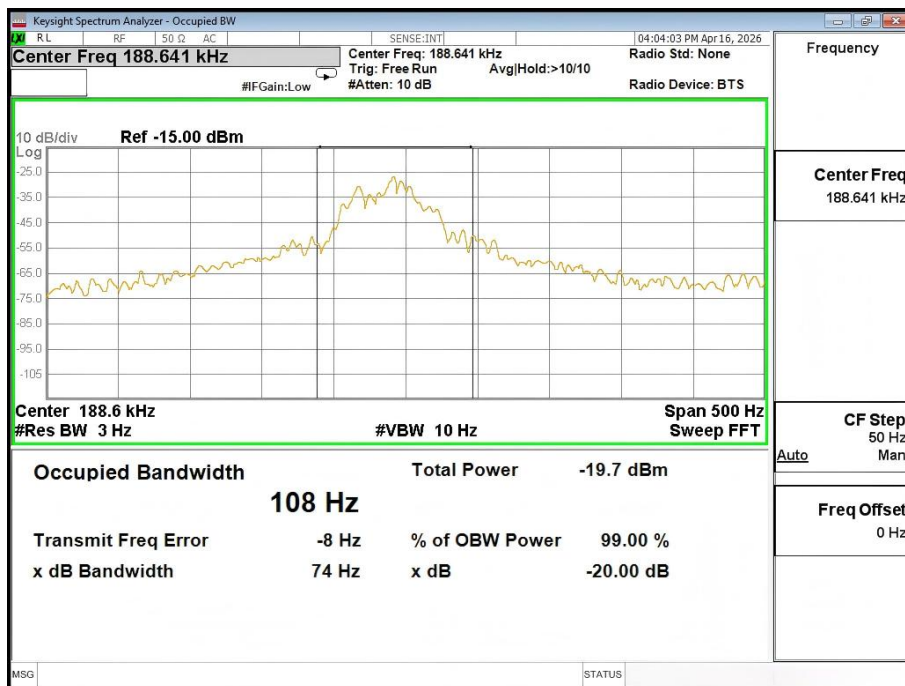

Watch

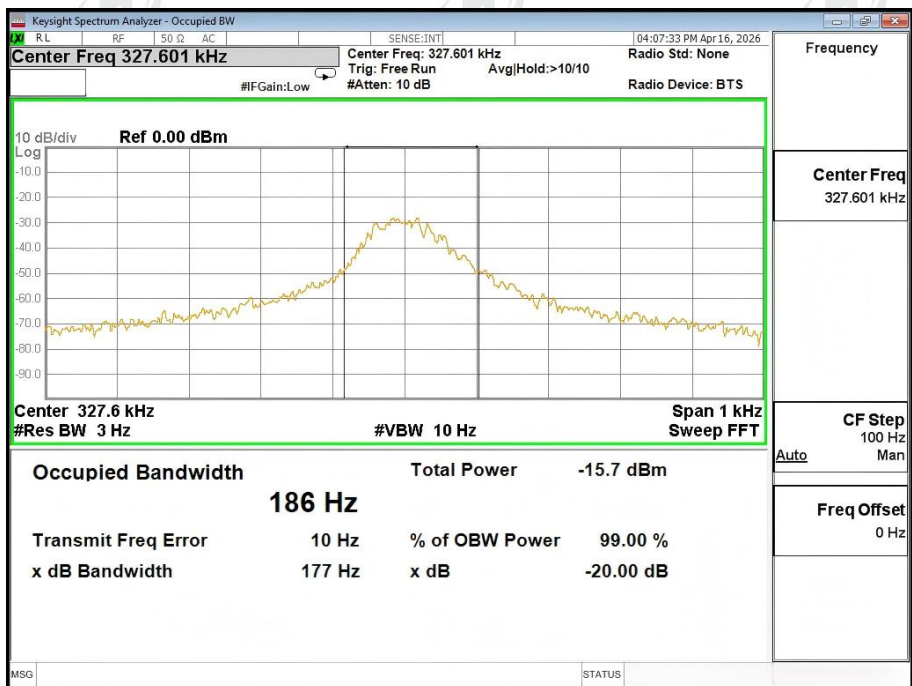

7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Inductive loop coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	

8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******