

Meas.1 Body Plane with Left Edge 5mm on High Channel in GPRS850 3Slots mode with ANT 0

Date: 2026.04.29

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25,10.25,10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch251/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.644 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.26 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.630 W/kg

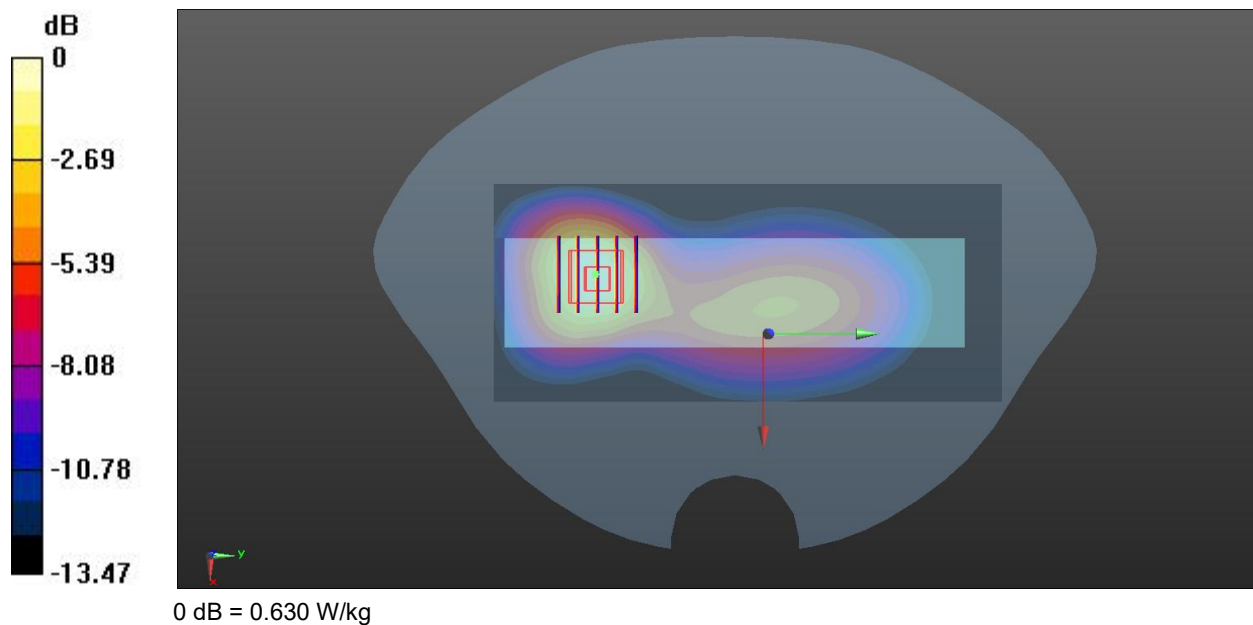

Meas.2 Body Plane with Left Edge 5mm on Middle Channel in GPRS1900 2Slots mode with ANT 0

Date: 2026.04.23

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35,8.35,8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch661/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.524 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.480 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.555 W/kg

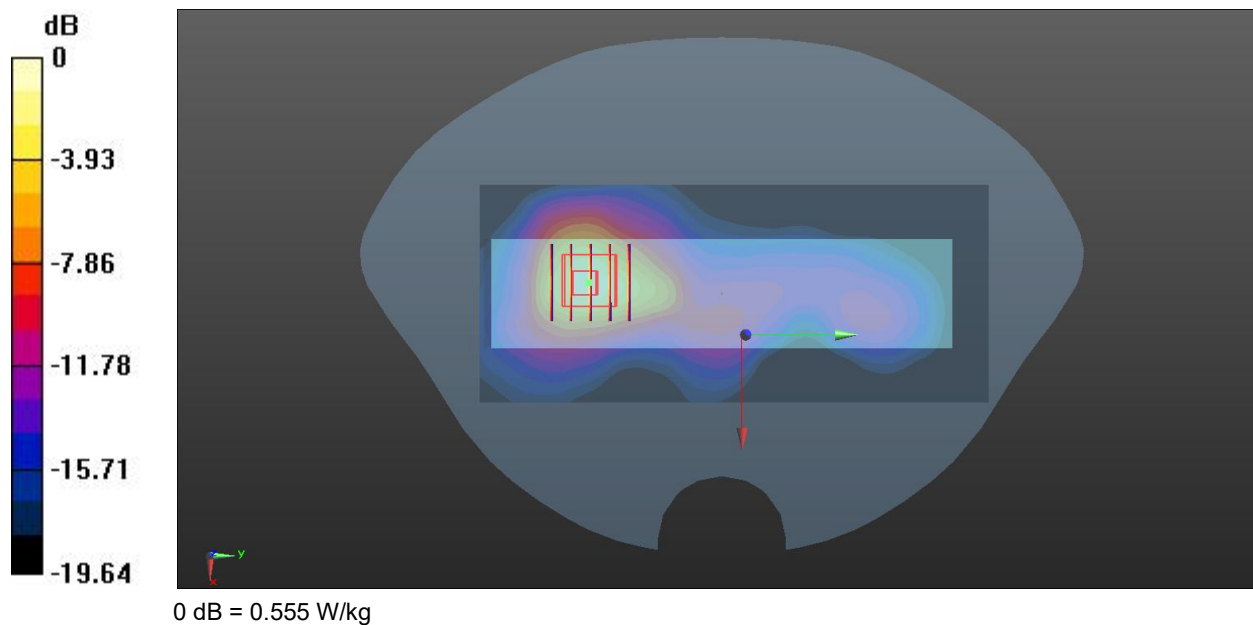

Meas.3 Body Plane with Left Edge 5mm on Low Channel in WCDMA Band2 mode with ANT 0

Date: 2026.04.23

Communication System Band: 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 41.439$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 °C Liquid Temperature: 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35,8.35,8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch9262/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.884 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.530 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.939 W/kg

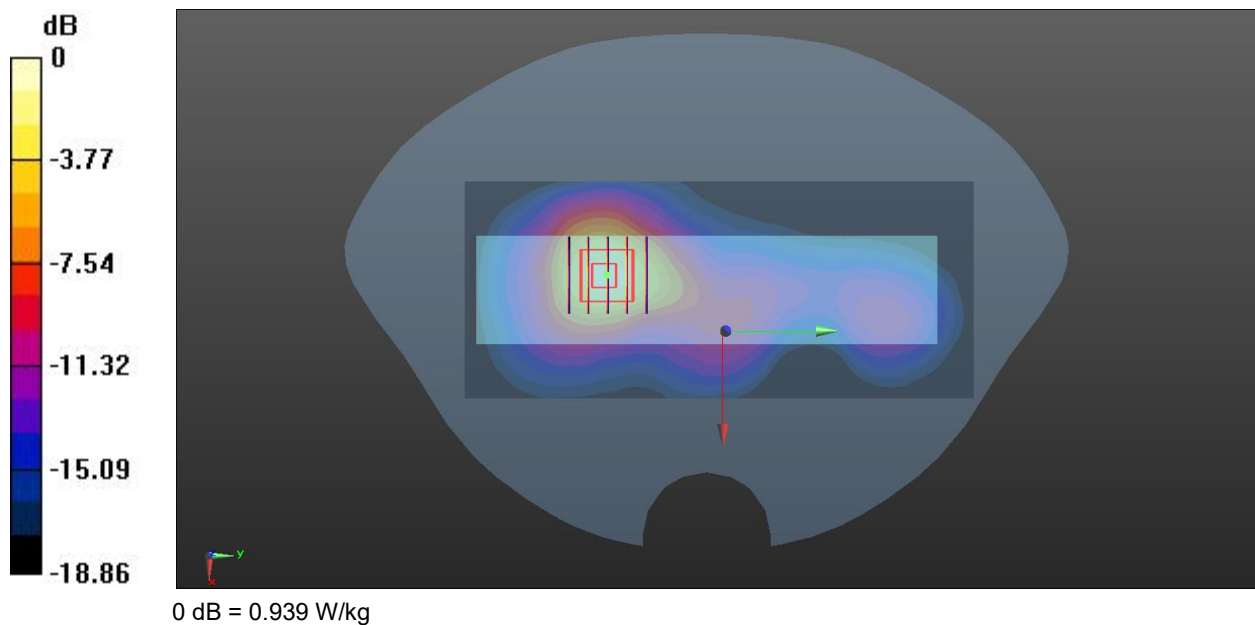

Meas.4 Body Plane with Left Edge 5mm on Middle Channel in WCDMA Band5 mode with ANT 0

Date: 2026.04.29

Communication System Band: 5; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.936$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25,10.25,10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch4183/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.622 W/kg

Ch4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.75 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.605 W/kg

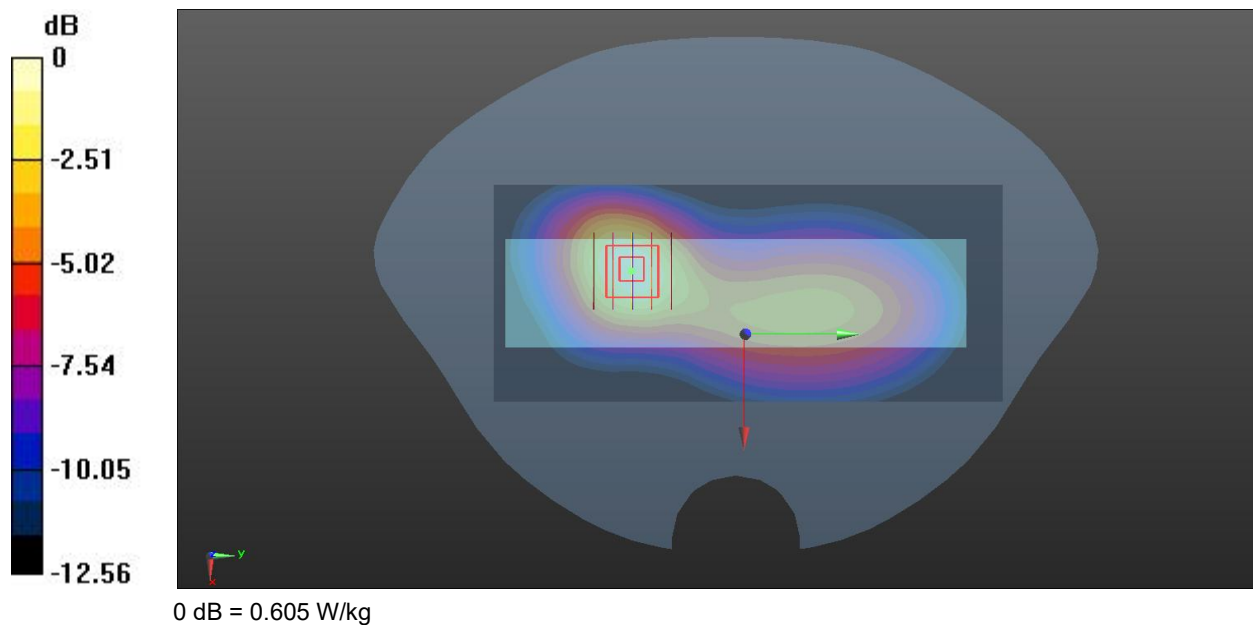

Meas.5 Body Plane with Left Edge 5mm on Middle Channel in LTE Band5 mode with ANT 0

Date: 2026.04.26

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.981$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25,10.25,10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20525/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.473 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.44 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 0.460 W/kg

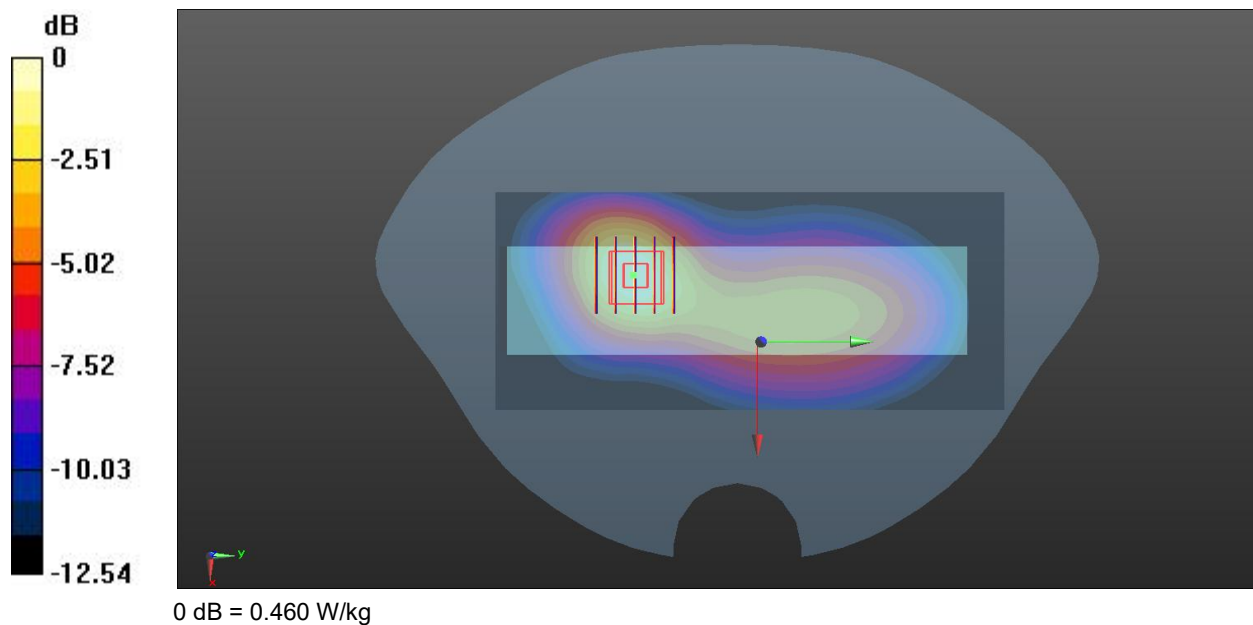

Meas.6 Body Plane with Left Edge 5mm on High Channel in LTE Band7 mode with ANT 0

Date: 2026.04.30

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 39.128$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64,7.64,7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch21350/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.964 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.581 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.786 W/kg

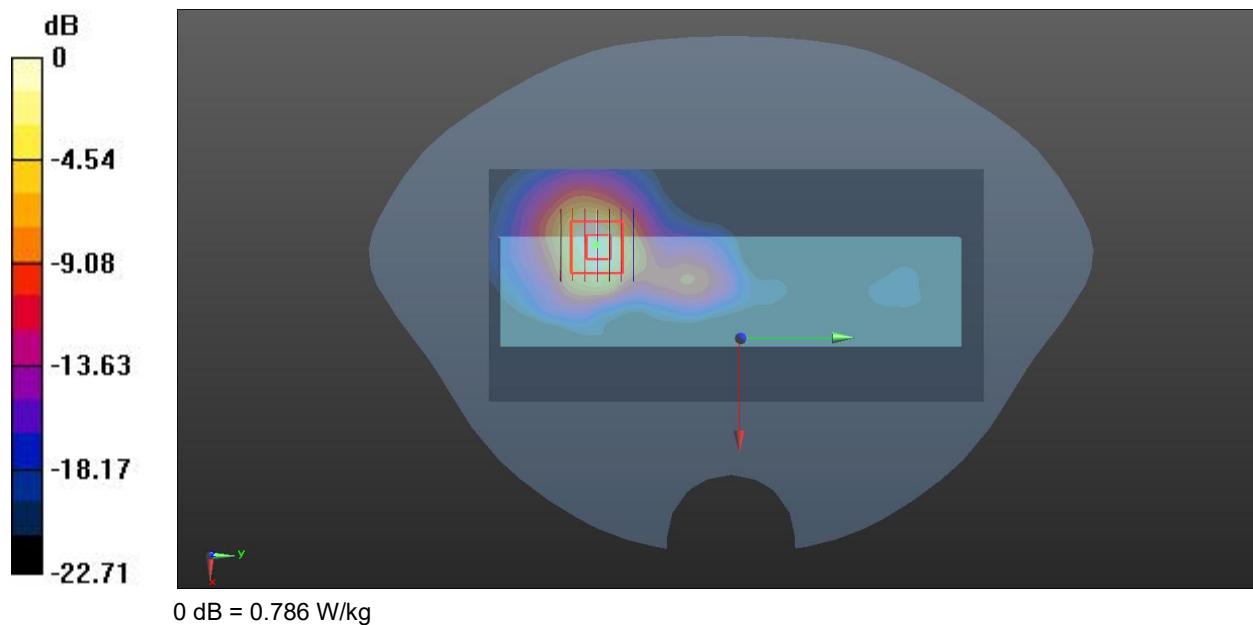

Meas.7 Limbs Plane with Left Edge 0mm on Middle Channel in GPRS850 3Slots mode with ANT 0

Date: 2026.04.29

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.936$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25,10.25,10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch190/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.94 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.53 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 1.68 W/kg; SAR(10 g) = 0.889 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 1.81 W/kg

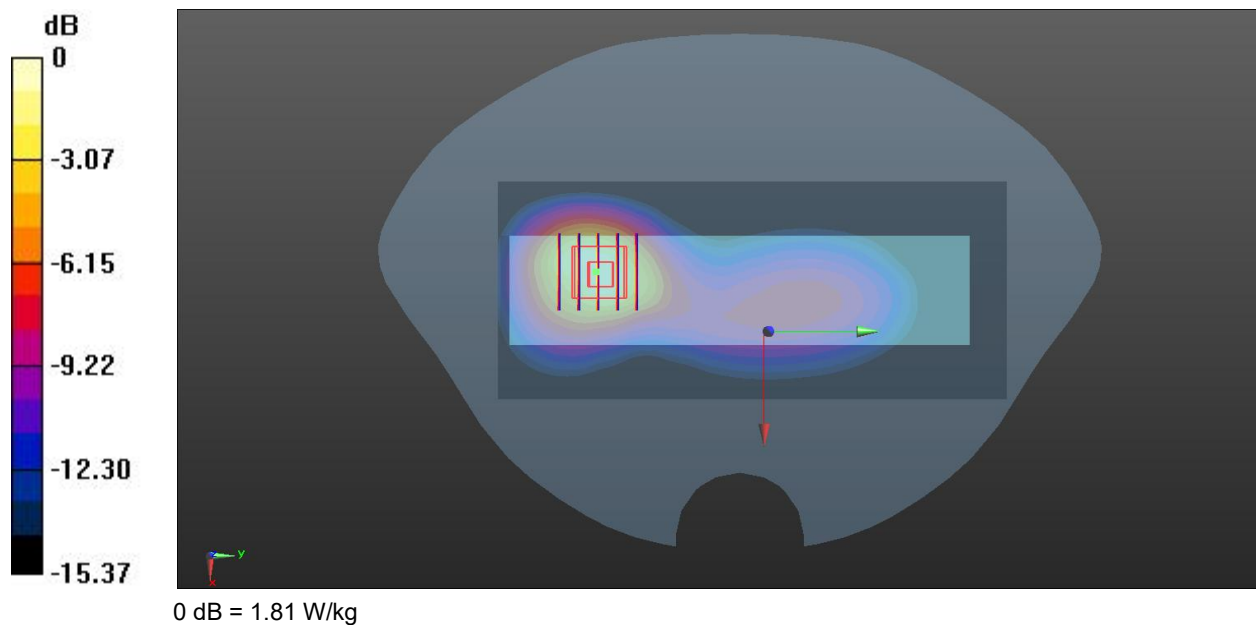

Meas.8 Limbs Plane with Left Edge 0mm on Middle Channel in GPRS1900 2Slots mode with ANT 0

Date: 2026.04.23

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 °C Liquid Temperature: 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35,8.35,8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch661/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.88 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.656 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 5.48 W/kg

SAR(1 g) = 2.59 W/kg; SAR(10 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 3.40 W/kg

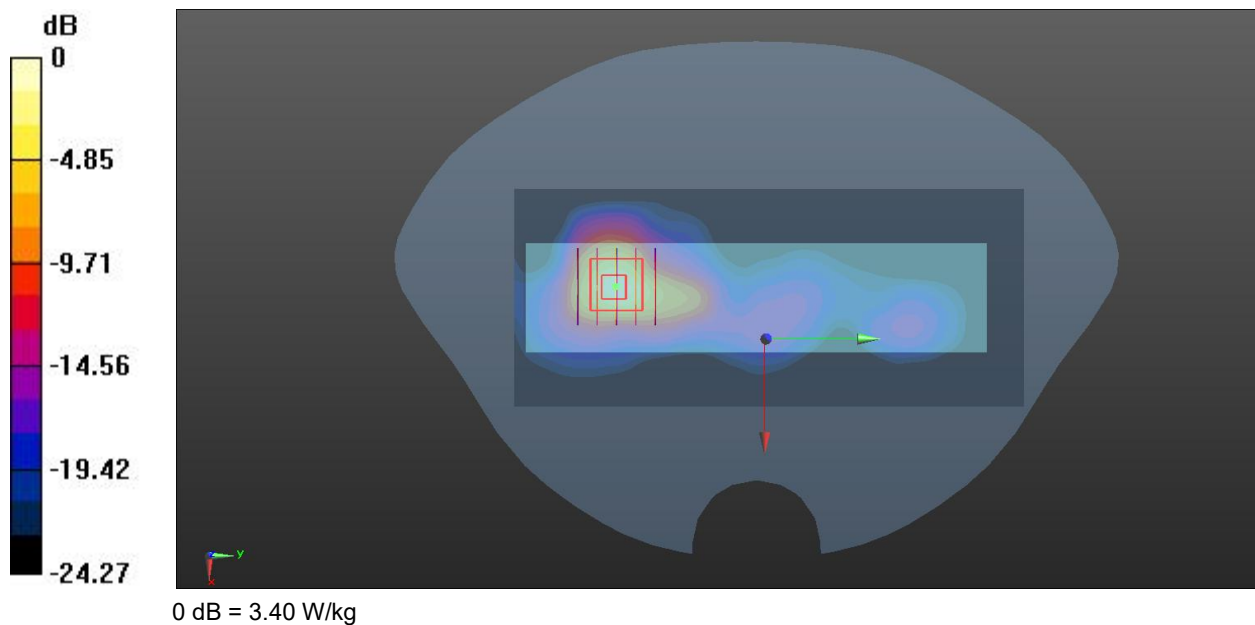

Meas.9 Limbs Plane with Left Edge 0mm on High Channel in WCDMA Band2 mode with ANT 0

Date: 2026.04.23

Communication System Band: 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 °C Liquid Temperature: 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35,8.35,8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch9538/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.49 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.39 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 7.17 W/kg

SAR(1 g) = 3.28 W/kg; SAR(10 g) = 1.38 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 4.04 W/kg

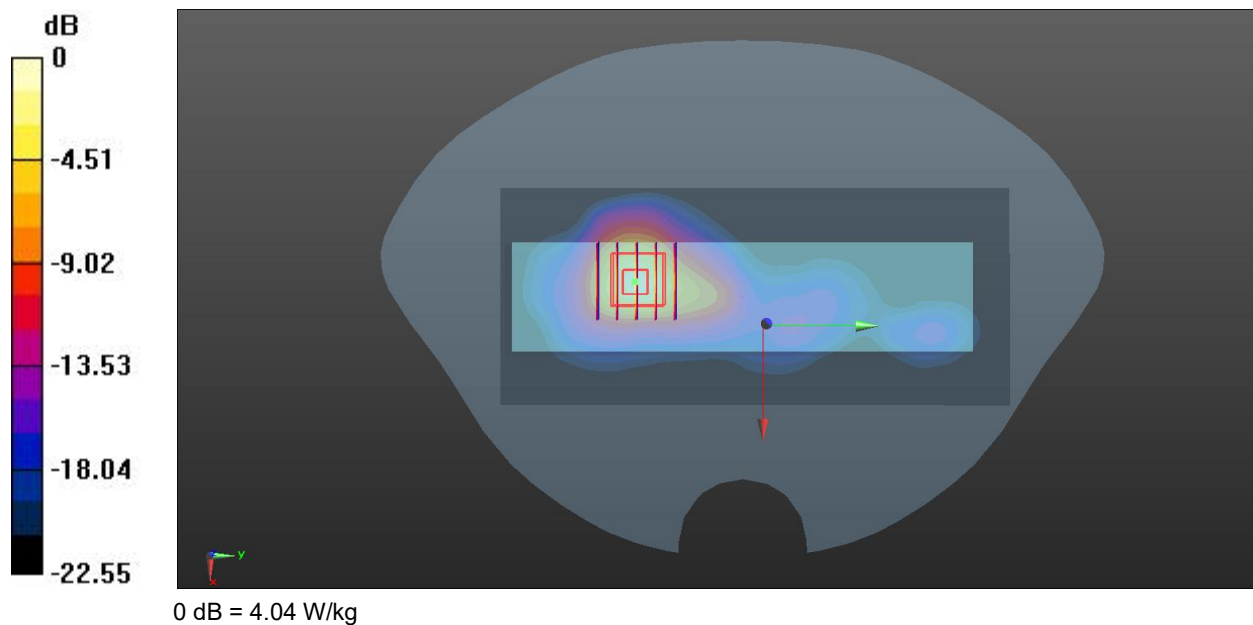

Meas.10 Limbs Plane with Left Edge 0mm on High Channel in WCDMA Band5 mode with ANT 0

Date: 2026.04.29

Communication System Band: 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 40.662$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25,10.25,10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch4233/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.44 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.582 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 1.18 W/kg

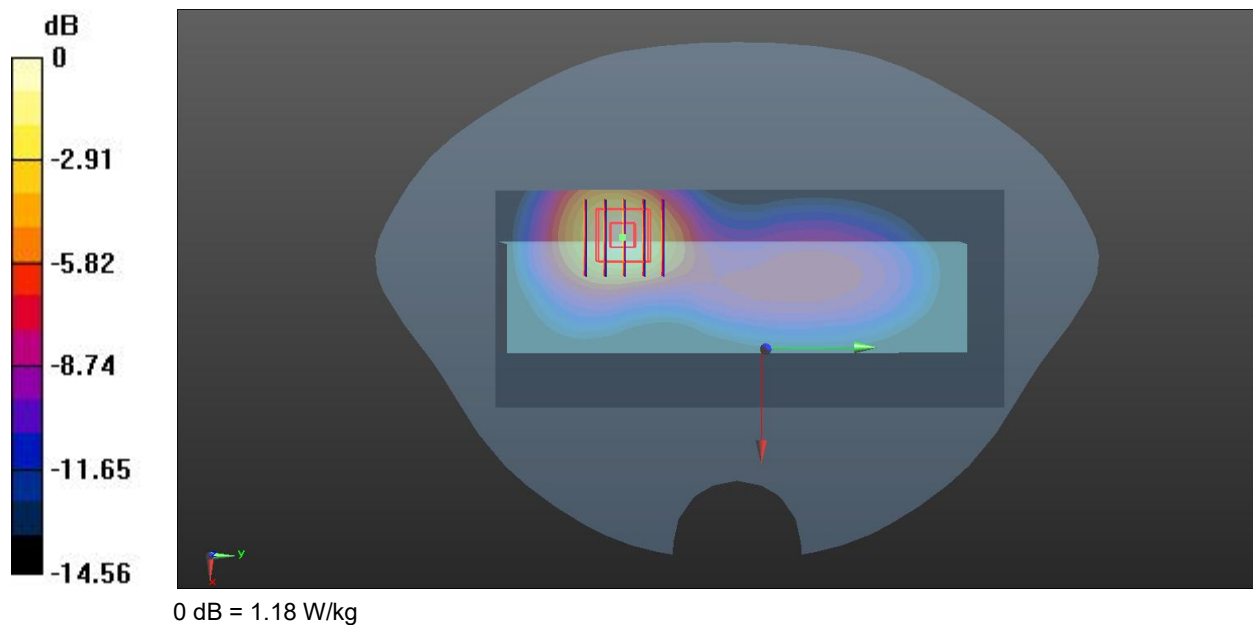

Meas.11 Limbs Plane with Left Edge 0mm on Middle Channel in LTE Band5 mode with ANT 0

Date: 2026.04.26

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.981$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25,10.25,10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20525/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.39 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.621 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 1.16 W/kg

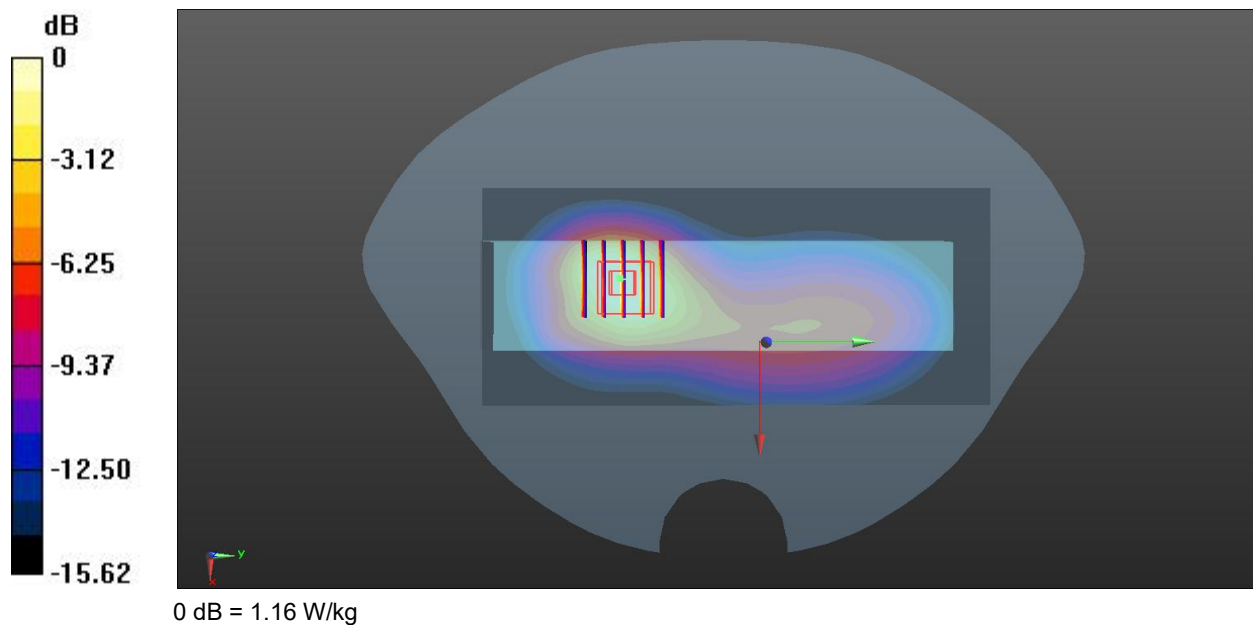

Meas.12 Limbs Plane with Left Edge 0mm on Low Channel in LTE Band7 mode with ANT 0

Date: 2026.04.30

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.104$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64,7.64,7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20850/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.11 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7150 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 4.02 W/kg

SAR(1 g) = 2.06 W/kg; SAR(10 g) = 0.912 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 2.48 W/kg

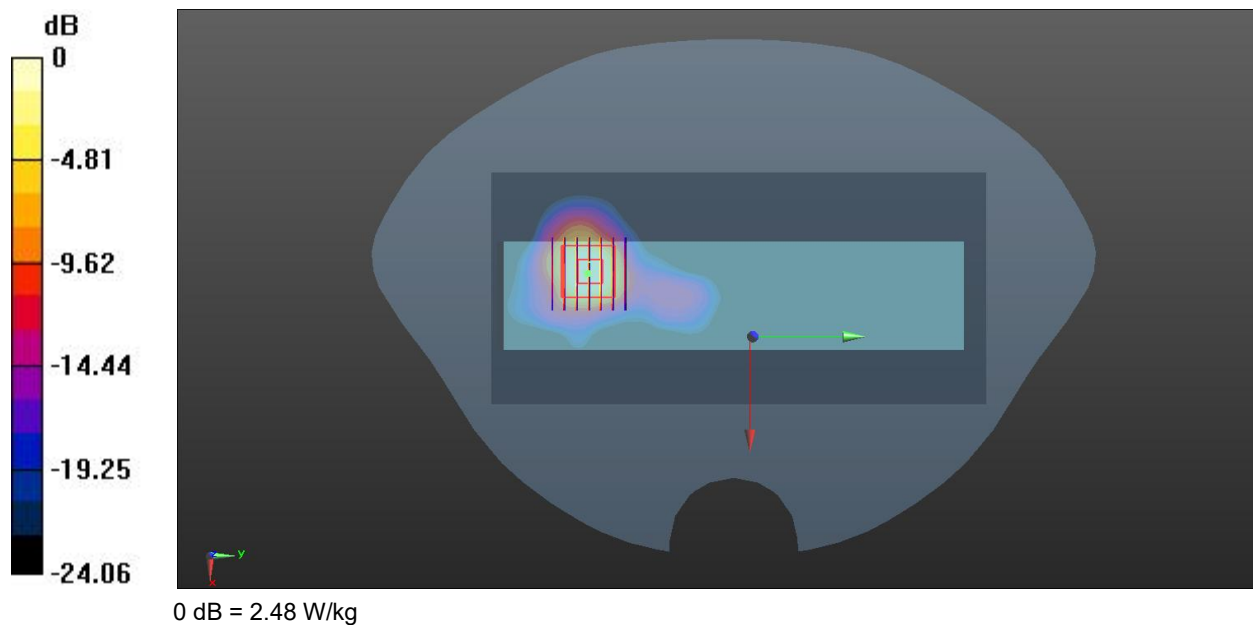

Meas.13 Body Plane with Right Edge 5mm on 39 Channel in Bluetooth mode with ANT 1

Date: 2026.04.27

Communication System Band: 1; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8,7.8,7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch39/Area Scan (81x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0798 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6380 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.0817 W/kg

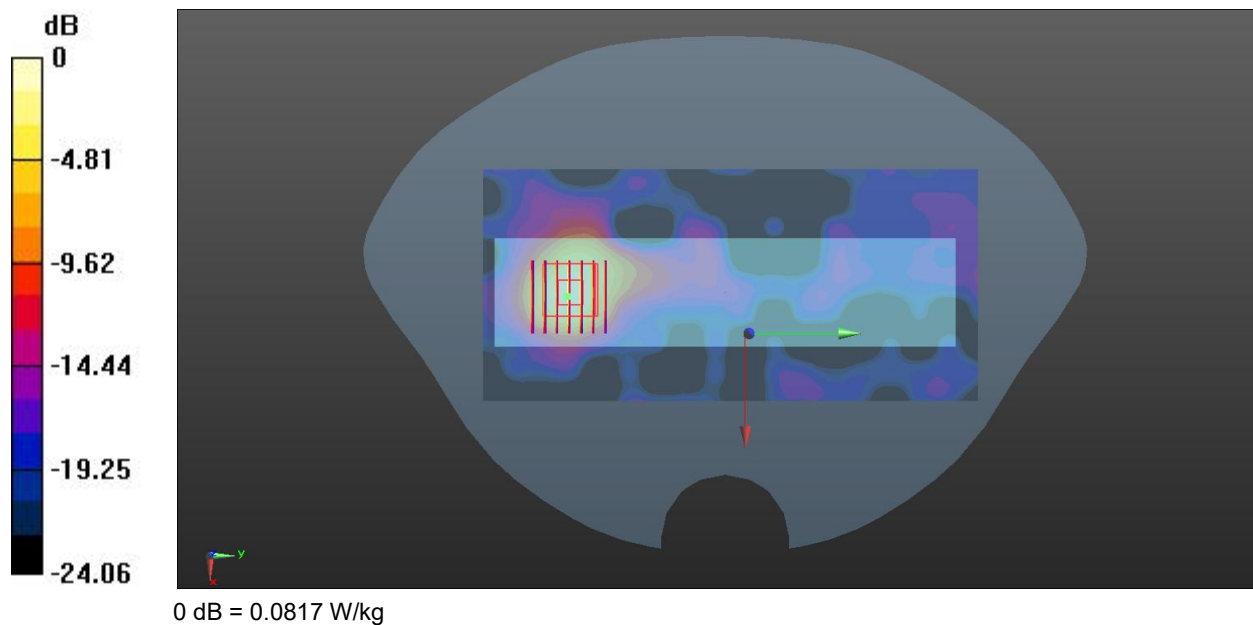

Meas.14 Body Plane with Right Edge 5mm on 6 Channel in IEEE802.11b mode with ANT 1

Date: 2026.04.27

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.008

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 39.639$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8,7.8,7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch6/Area Scan (81x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.623 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.3170 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.601 W/kg

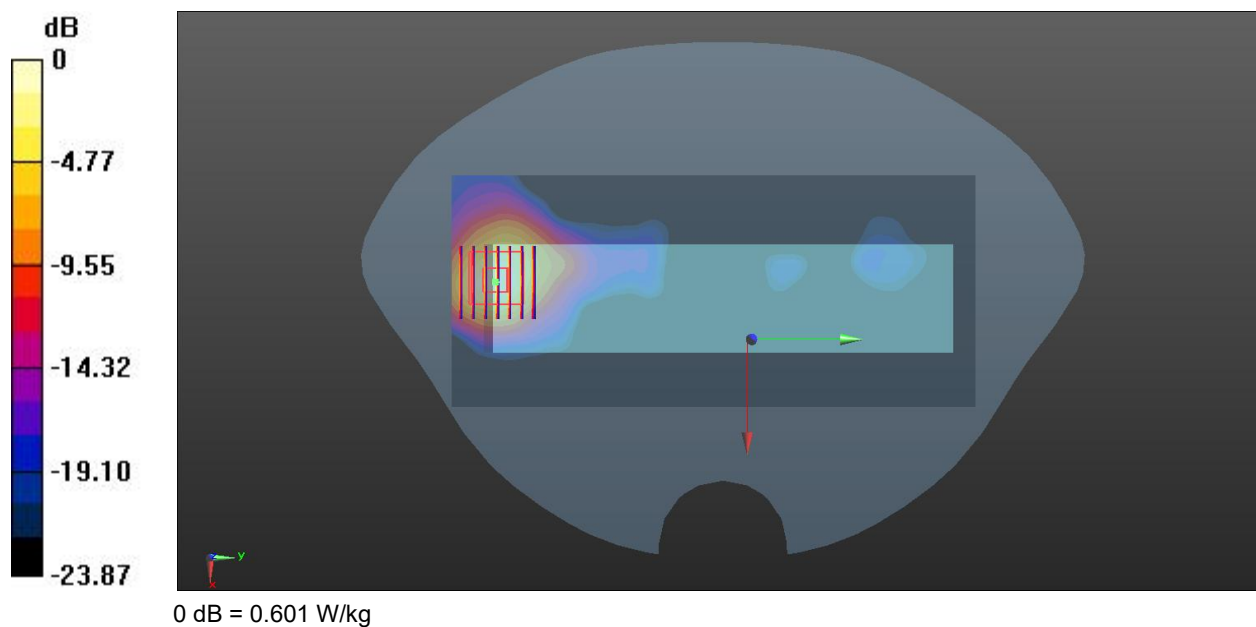

Meas.15 Body Plane with Right Edge 5mm on 60 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.21

Communication System Band: 5.3G; Frequency: 5300 MHz; Duty Cycle: 1:1.038

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.807$ S/m; $\epsilon_r = 36.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 °C Liquid Temperature: 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.42,5.42,5.42); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch60/Area Scan (101x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.053 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.189 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.18 W/kg

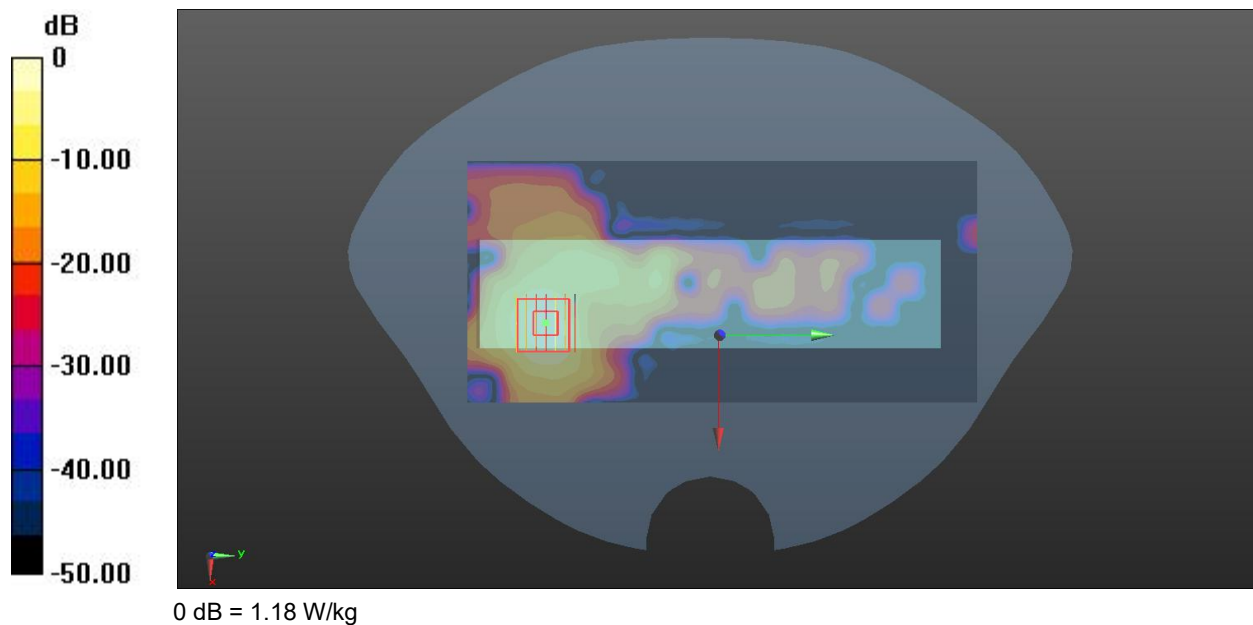

Meas.16 Body Plane with Right Edge 5mm on 116 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.21

Communication System Band: 5.6G; Frequency: 5580 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 4.994$ S/m; $\epsilon_r = 35.917$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(4.93,4.93,4.93); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch116/Area Scan (101x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.8230 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 1.04 W/kg

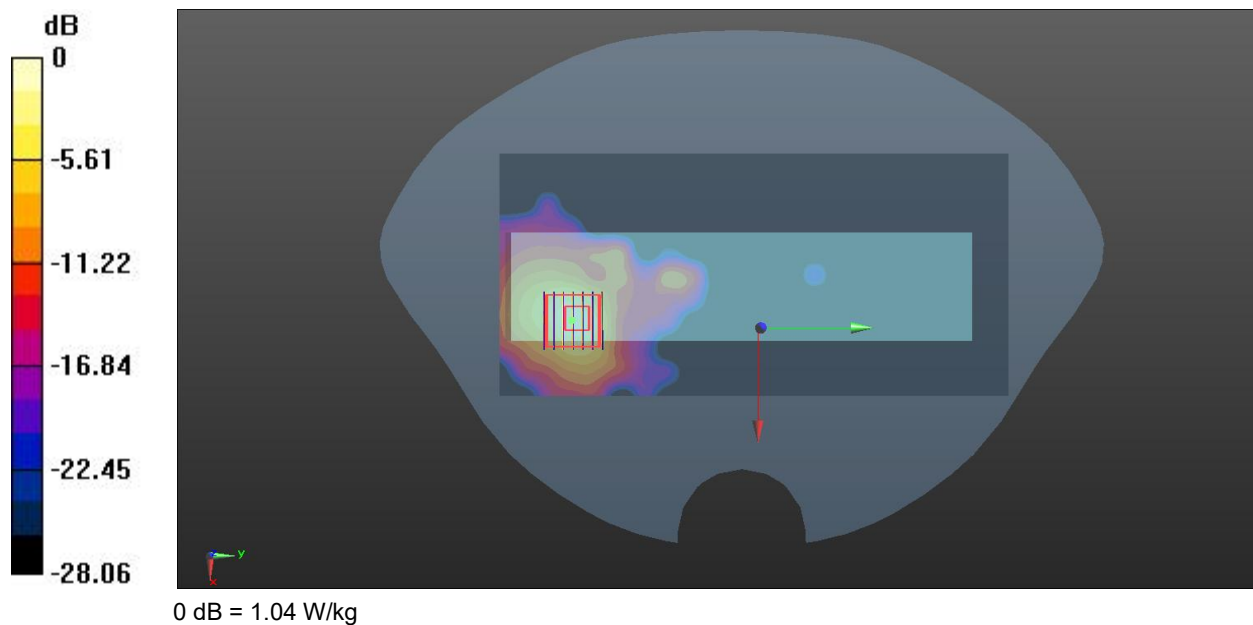

Meas.17 Body Plane with Right Edge 5mm on 157 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.26

Communication System Band: 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 35.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.01,5.01,5.01); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch157/Area Scan (101x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.199 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 1.46 W/kg

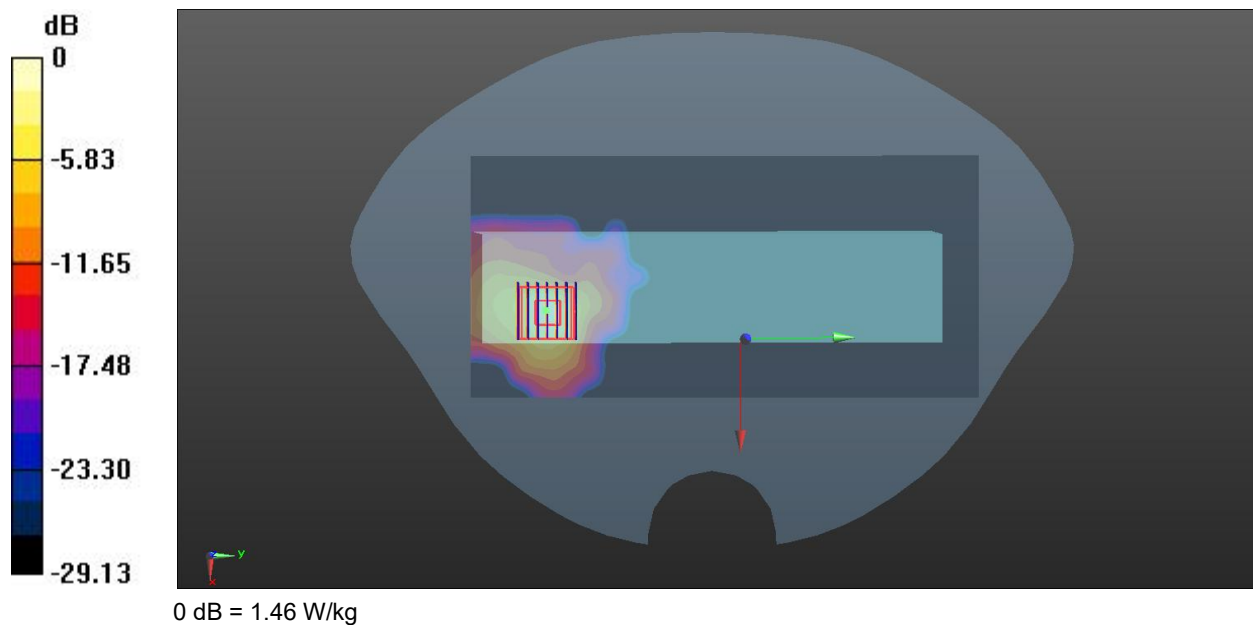

Meas.18 Limbs Plane with Right Edge 0mm on 39 Channel in Bluetooth mode with ANT 1

Date: 2026.04.27

Communication System Band: 1; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8,7.8,7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch39/Area Scan (81x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.346 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.5950 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.664 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.284 W/kg

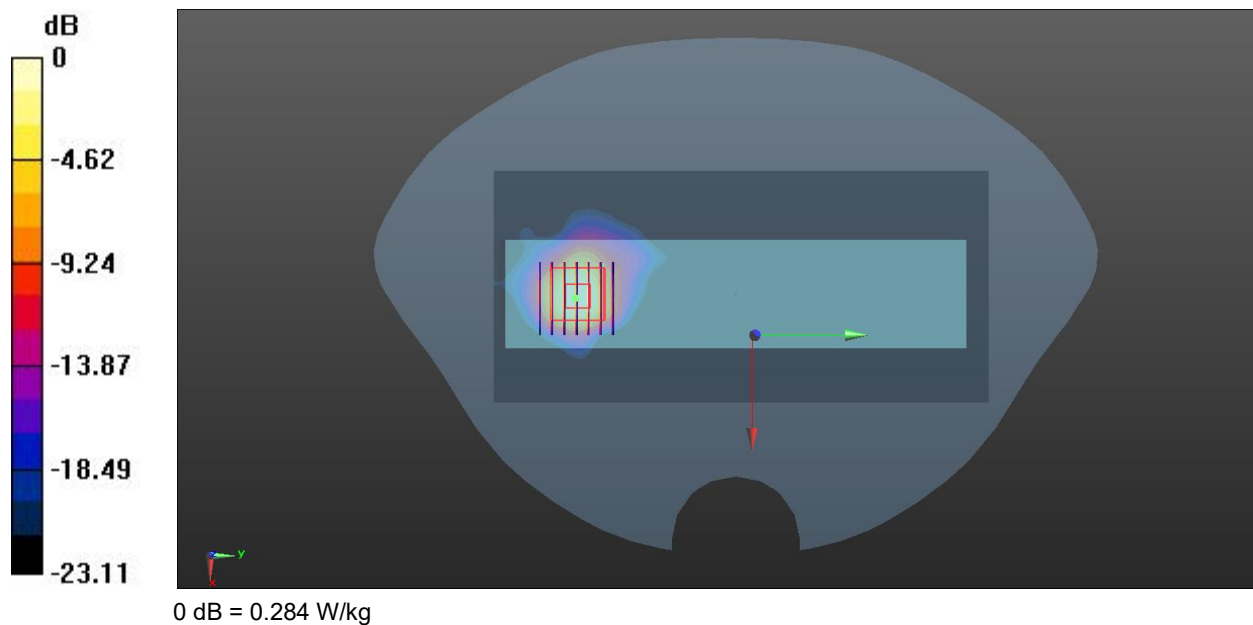

Meas.19 Limbs Plane with Right Edge 0mm on 6 Channel in IEEE802.11b mode with ANT 1

Date: 2026.04.27

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.008

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 39.639$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8,7.8,7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch6/Area Scan (81x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 3.56 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.7760 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 6.89 W/kg

SAR(1 g) = 2.52 W/kg; SAR(10 g) = 0.884 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 3.03 W/kg

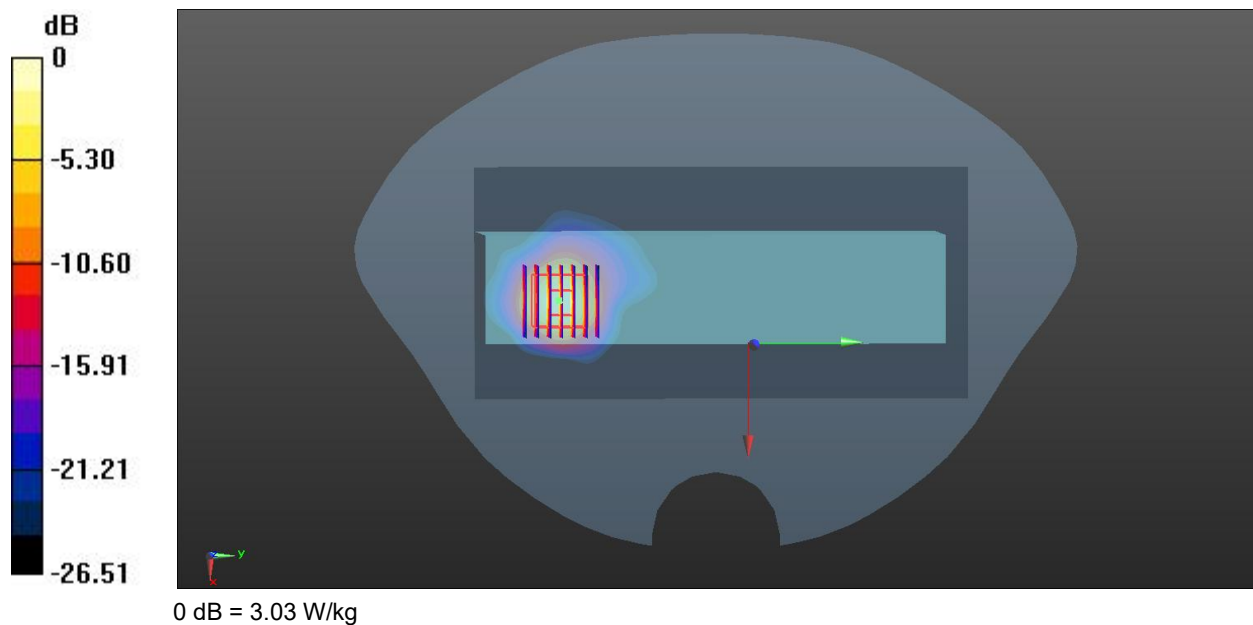

Meas.20 Limbs Plane with Right Edge 0mm on 60 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.21

Communication System Band: 5.3G; Frequency: 5300 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.807$ S/m; $\epsilon_r = 36.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5 °C Liquid Temperature: 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.42,5.42,5.42); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch60/Area Scan (101x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 6.65 W/kg

Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.7970 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 2.91 W/kg; SAR(10 g) = 0.704 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 6.49 W/kg

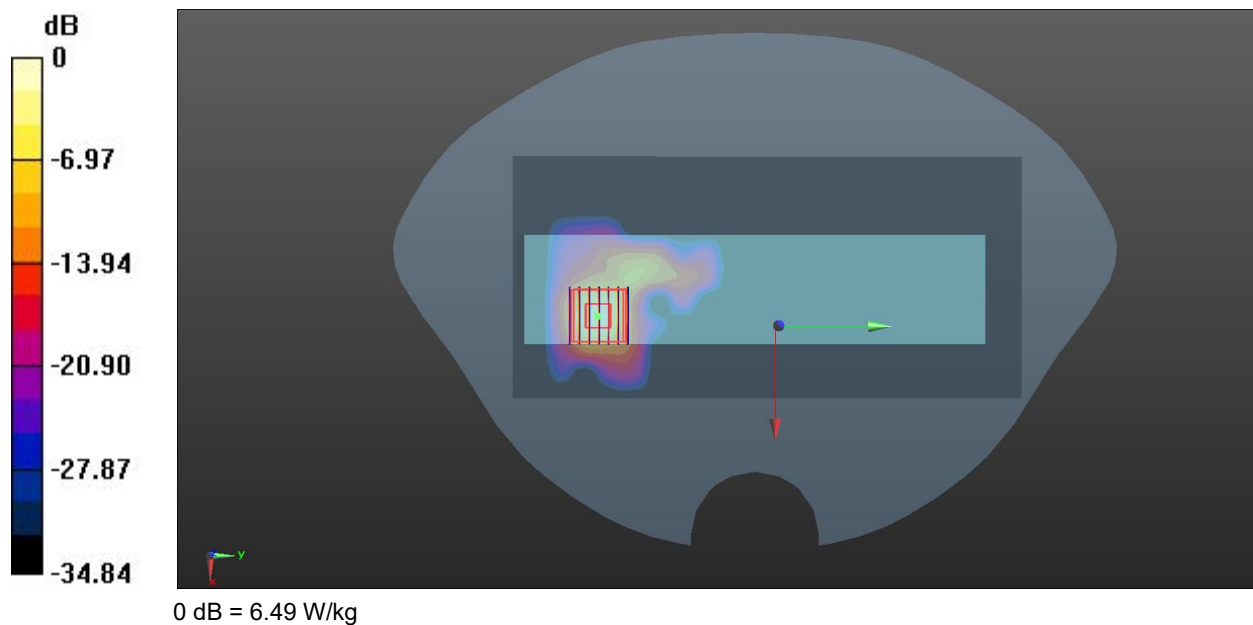

Meas.21 Limbs Plane with Right Edge 0mm on 116 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.21

Communication System Band: 5.6G; Frequency: 5580 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 4.994$ S/m; $\epsilon_r = 35.917$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(4.93,4.93,4.93); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch116/Area Scan (101x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.29 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 4.82 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 2.21 W/kg

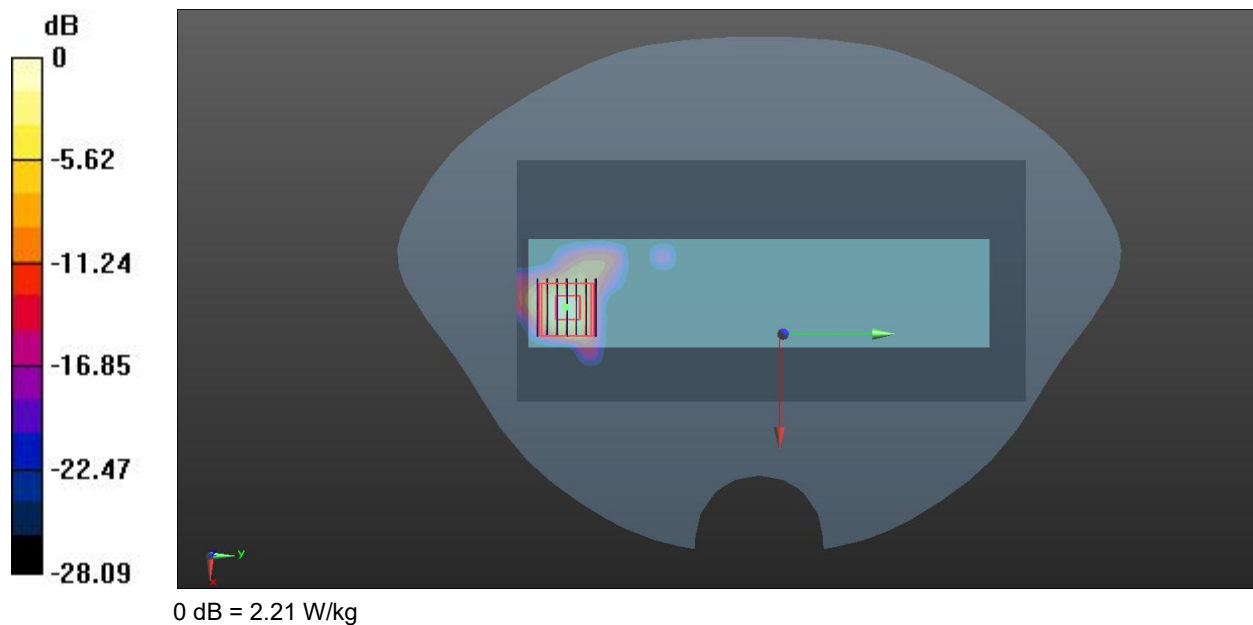

Meas.22 Limbs Plane with Right Edge 0mm on 157 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.26

Communication System Band: 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 35.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.01,5.01,5.01); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch157/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.95 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 14.9 W/kg

SAR(1 g) = 2.6 W/kg; SAR(10 g) = 0.594 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 6.27 W/kg

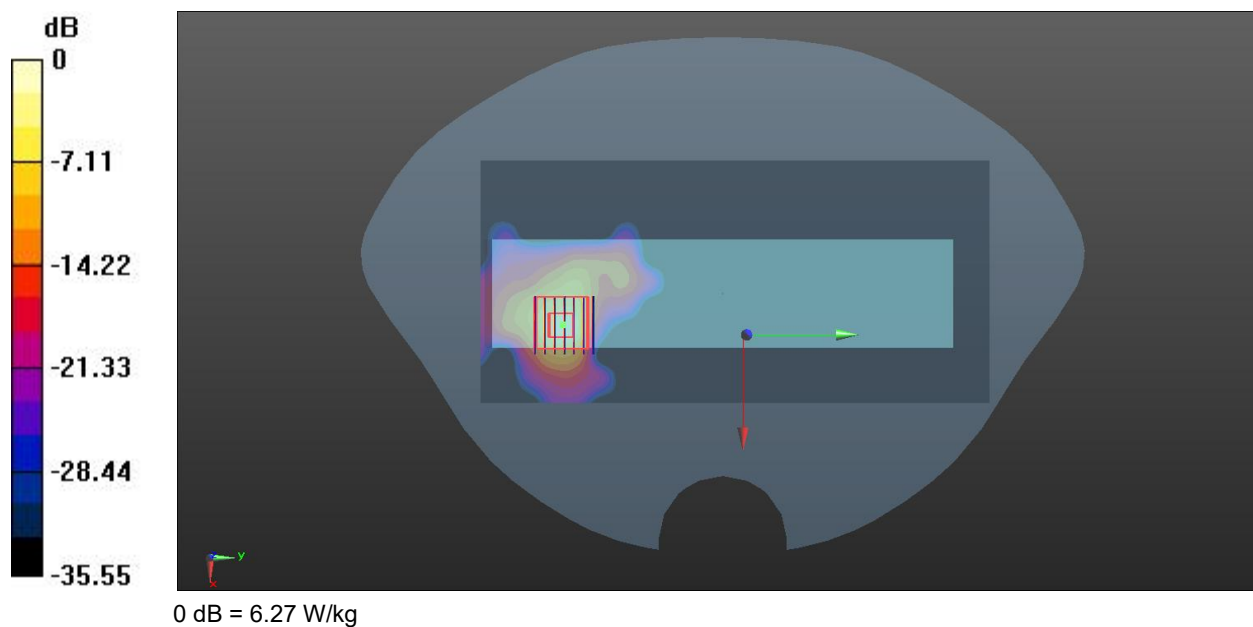

--BLANK BELOW--