

System Check:835Mhz

Date: 2026.03.11

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.243$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.5°C Liquid Temperature:21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW835/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.974 W/kg

CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.15 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.659 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.18 W/kg

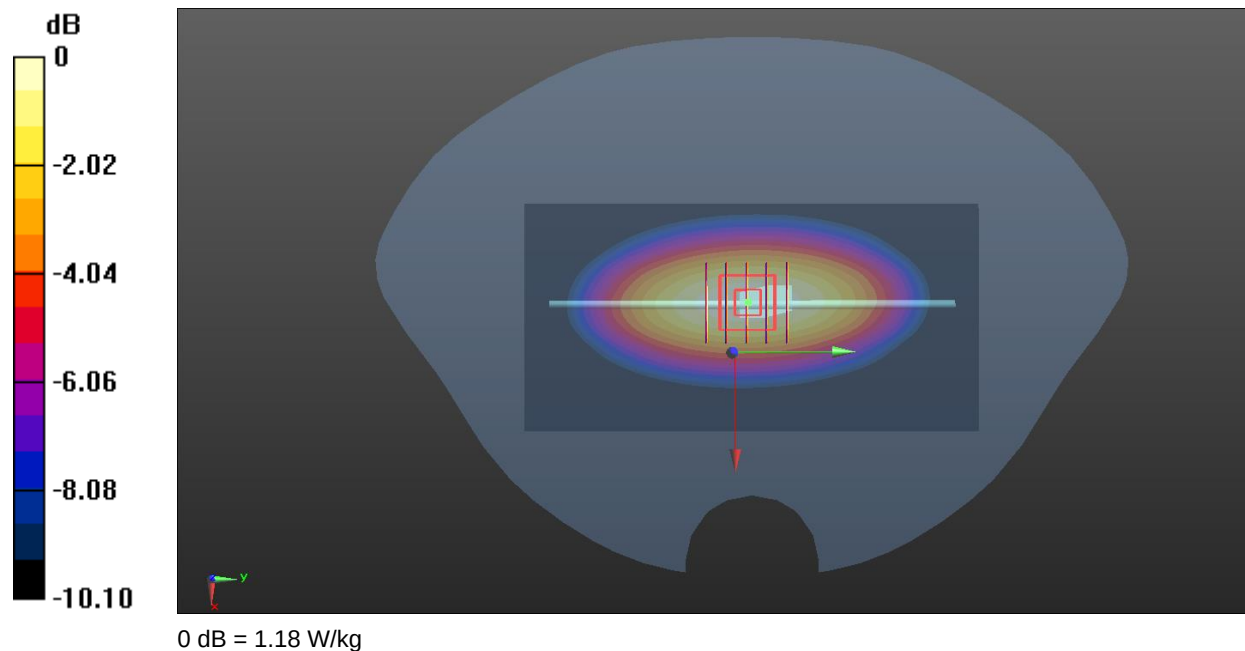

System Check:835Mhz

Date: 2026.03.12

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 42.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3°C Liquid Temperature:21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW835/Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.989 W/kg


CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.20 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.641 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 1.01 W/kg

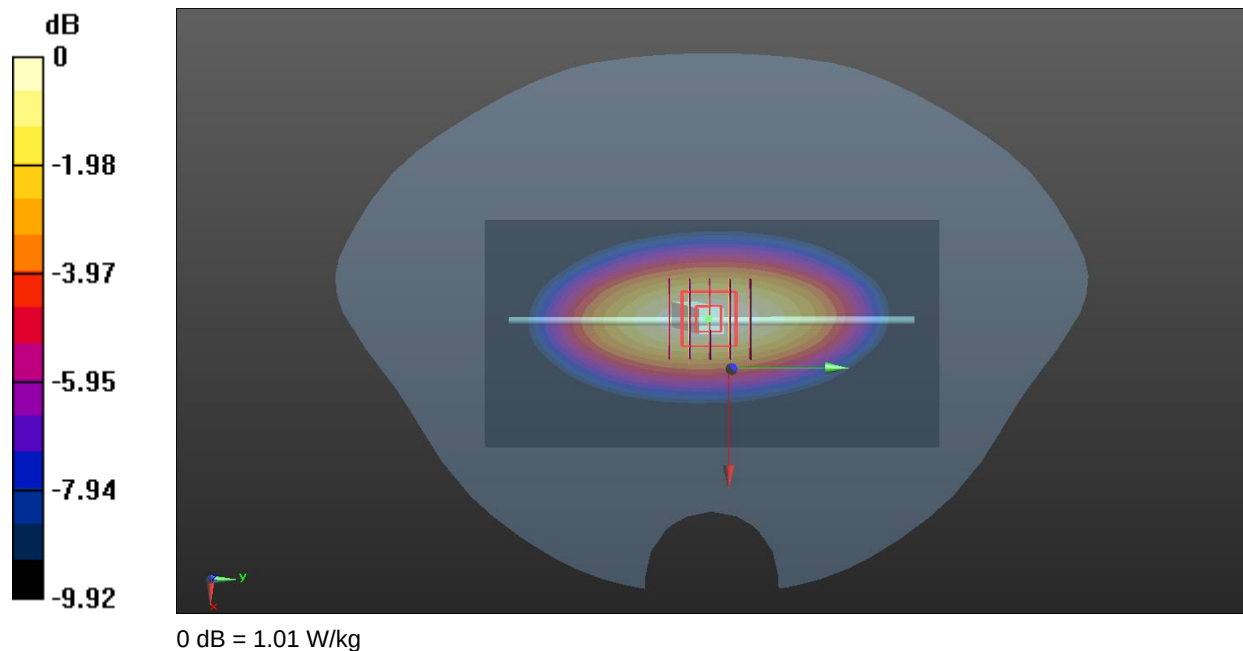

System check:1950MHz

Date: 2026.03.13

Communication System Band: D1950 (1950.0 MHz); Frequency: 1950 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 38.868$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW1950/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 5.41 W/kg

CW1950/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.33 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 8.07 W/kg

SAR(1 g) = 4.12 W/kg; SAR(10 g) = 2.08 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 4.93 W/kg

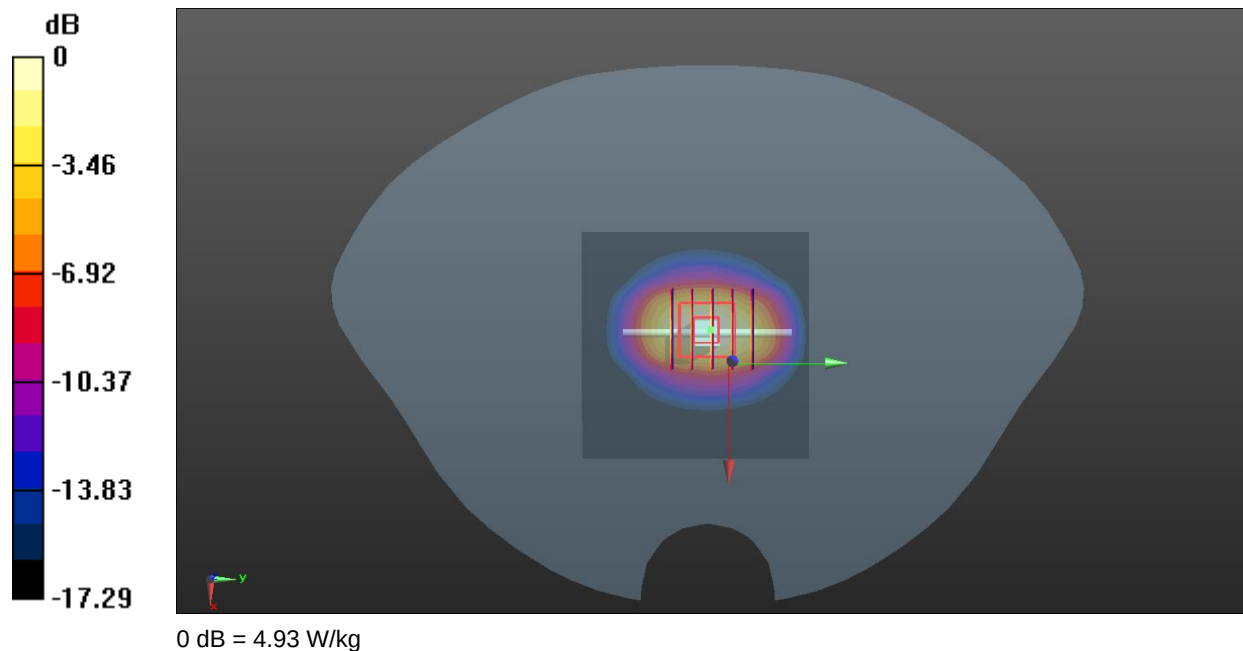

System Check:2450Mhz

Date: 2026.03.14

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.667$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.8°C Liquid Temperature:21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW2450/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 6.21 W/kg

CW2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 57.33 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.11 W/kg; SAR(10 g) = 2.36 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 6.12 W/kg

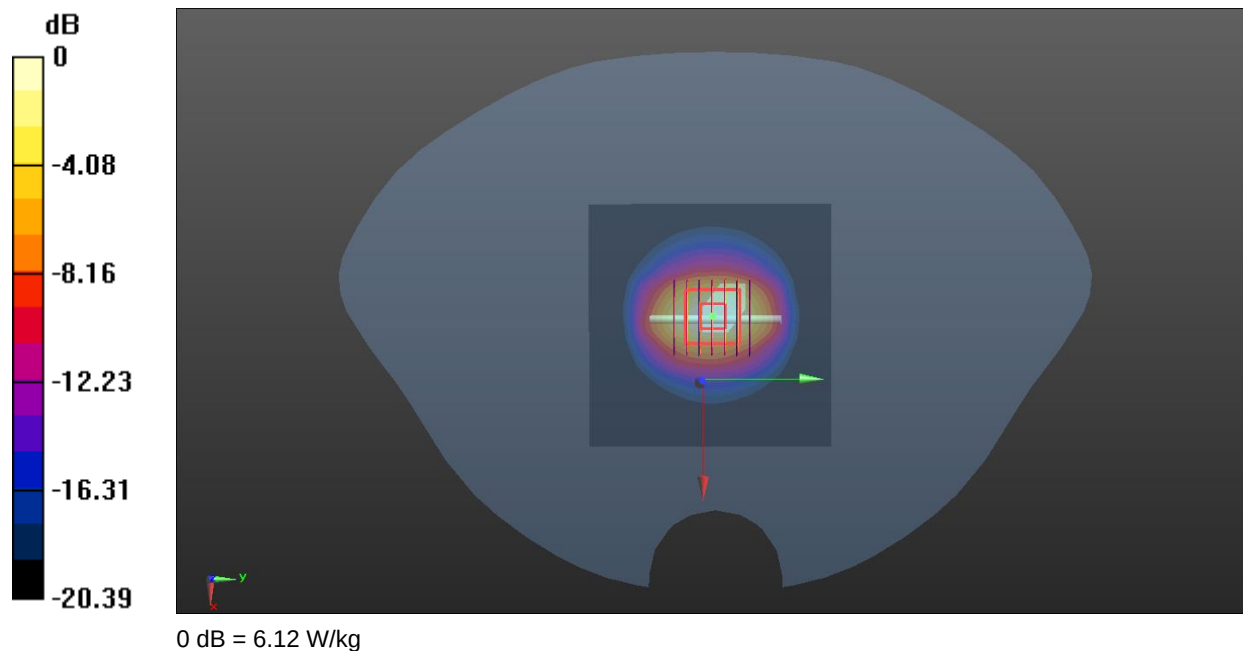

System Check:2600Mhz

Date: 2026.03.15

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.009$ S/m; $\epsilon_r = 38.378$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW2600/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 6.68 W/kg

CW2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 57.62 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.77 W/kg; SAR(10 g) = 2.61 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 6.14 W/kg

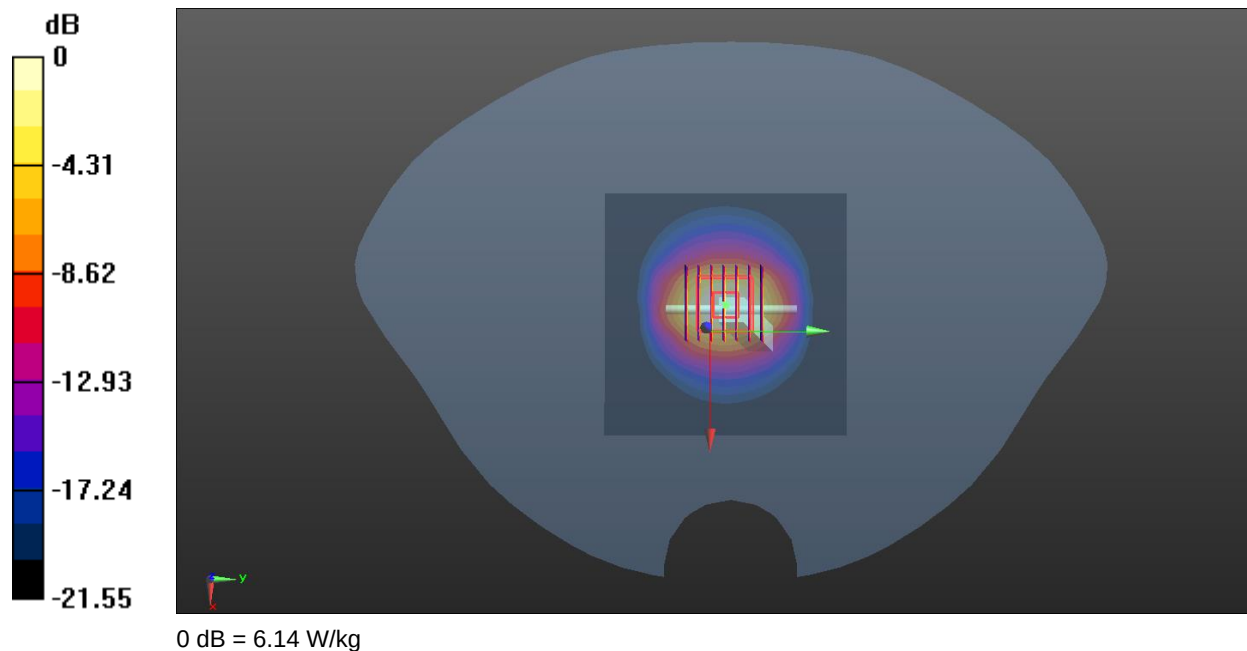

System Check:5250Mhz

Date: 2026.03.16

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.591$ S/m; $\epsilon_r = 37.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.2°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.61, 5.61, 5.61); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW5250/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 13.5 W/kg

CW5250/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 41.48 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.23 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 14.9 W/kg

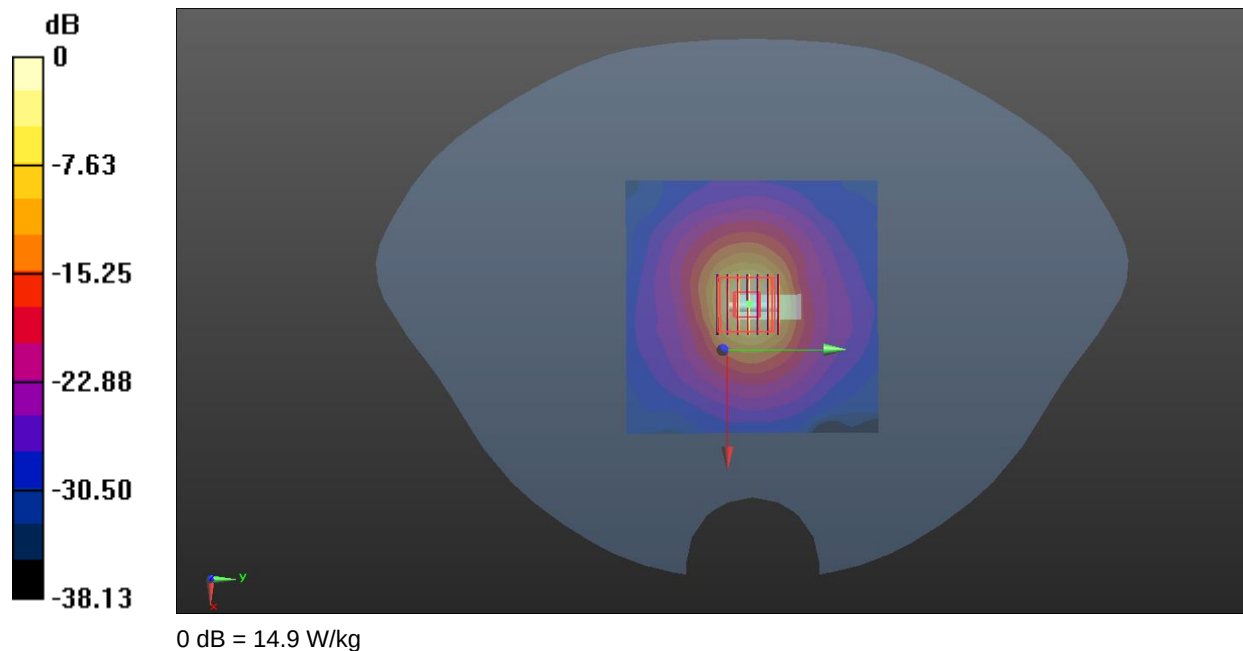

System Check:5600Mhz

Date: 2026.03.16

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.008$ S/m; $\epsilon_r = 35.462$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(4.93, 4.93, 4.93); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW5600/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 15.6 W/kg

CW5600/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 37.64 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 8.34 W/kg; SAR(10 g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 15.0 W/kg

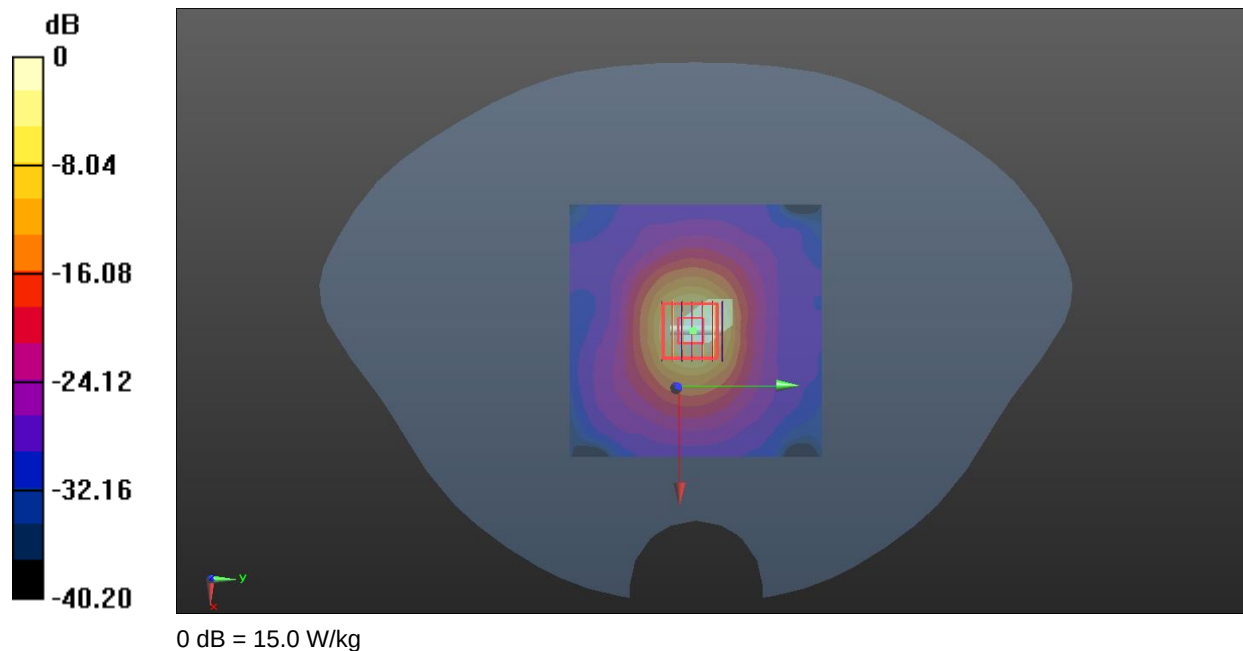

System Check:5750Mhz

Date: 2026.03.17

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.133$ S/m; $\epsilon_r = 36.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.1°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.01, 5.01, 5.01); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

CW5750/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 14.0 W/kg

CW5750/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 36.62 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 28.7 W/kg

SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.17 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 13.3 W/kg

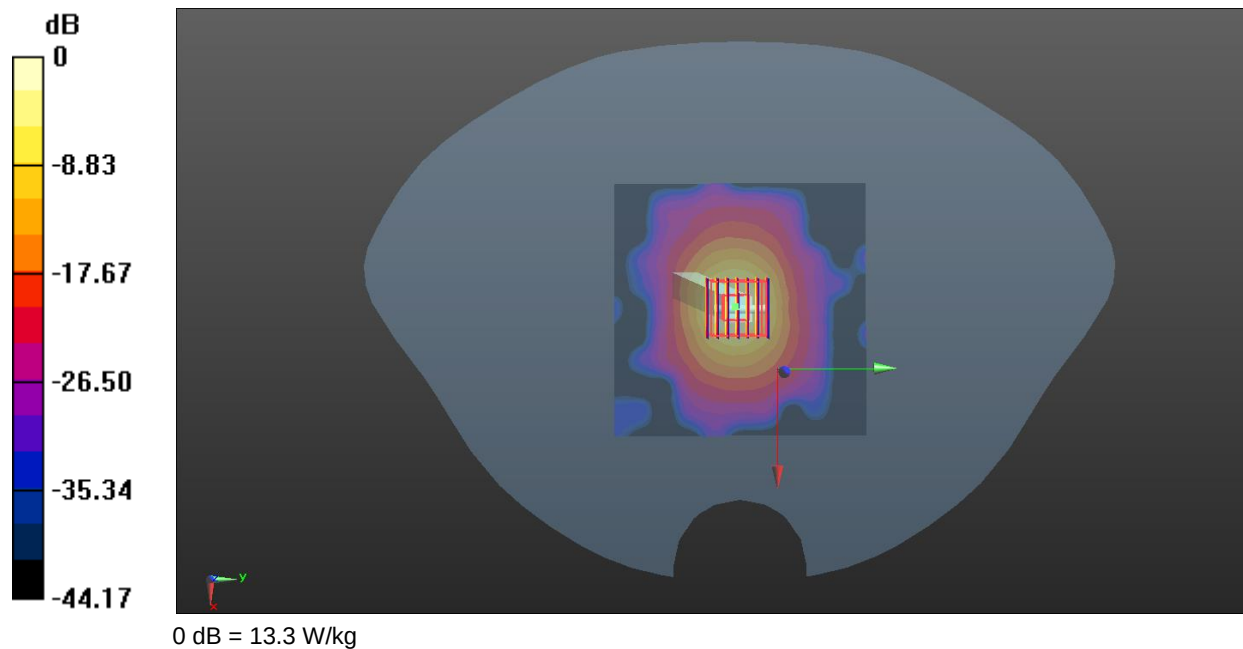

--BLANK BELOW--