

Meas.1 Body Plane with Right Edge 5mm on High Channel in GPRS 4Slots mode with ANT 0

Date: 2026.03.11

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.576$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch251/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.275 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.841 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.276 W/kg

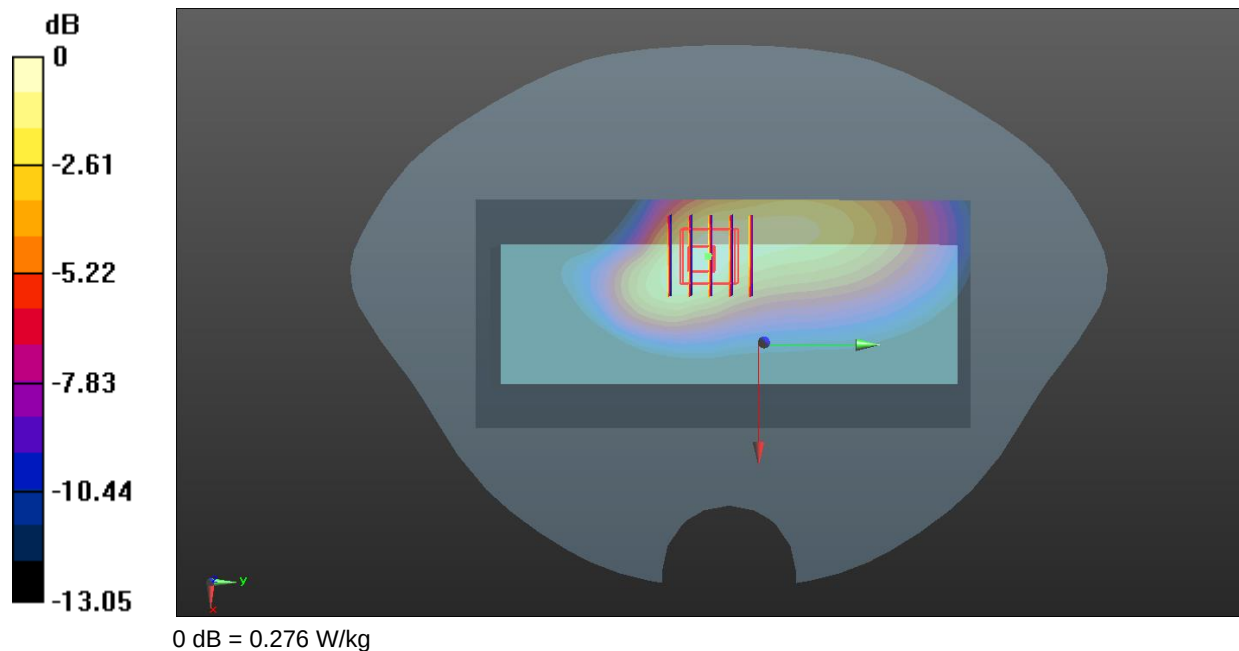

Meas.2 Body Plane with Right Edge 5mm on High Channel in GPRS 2Slots mode with ANT 0

Date: 2026.03.13

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.297 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.370 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.294 W/kg

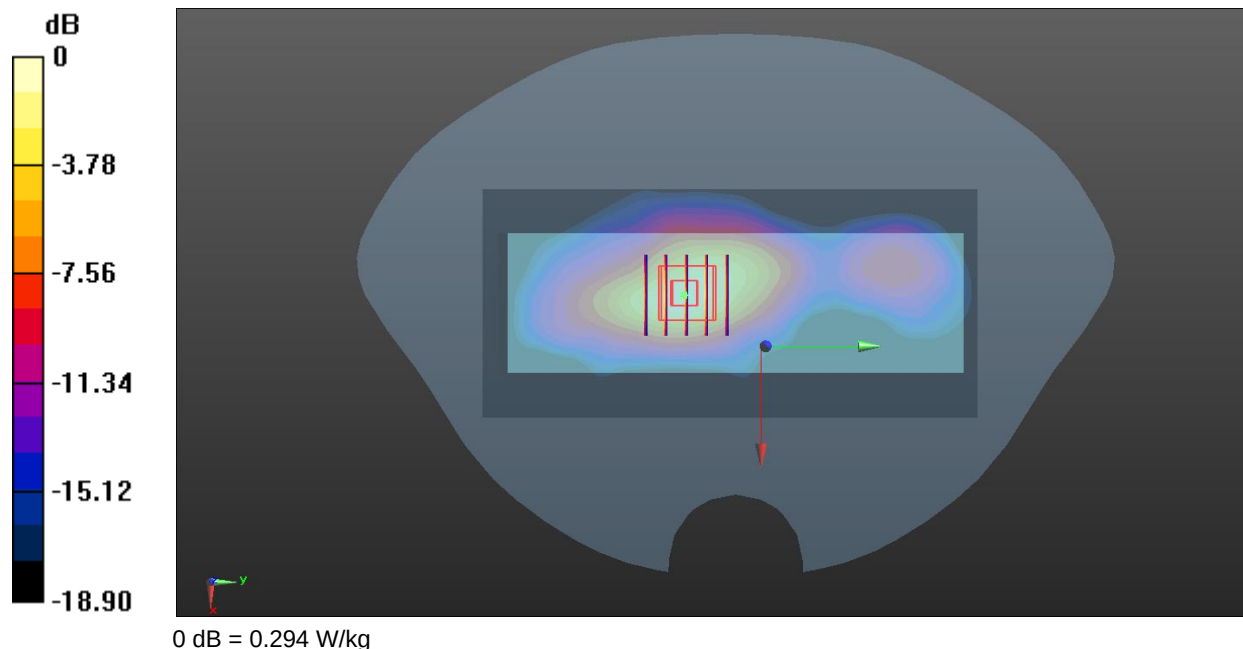

Meas.3 Limbs Plane with Right Edge 0mm on High Channel in GPRS 2Slots mode with ANT 0

Date: 2026.03.11

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.576$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch251/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.490 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.93 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.488 W/kg

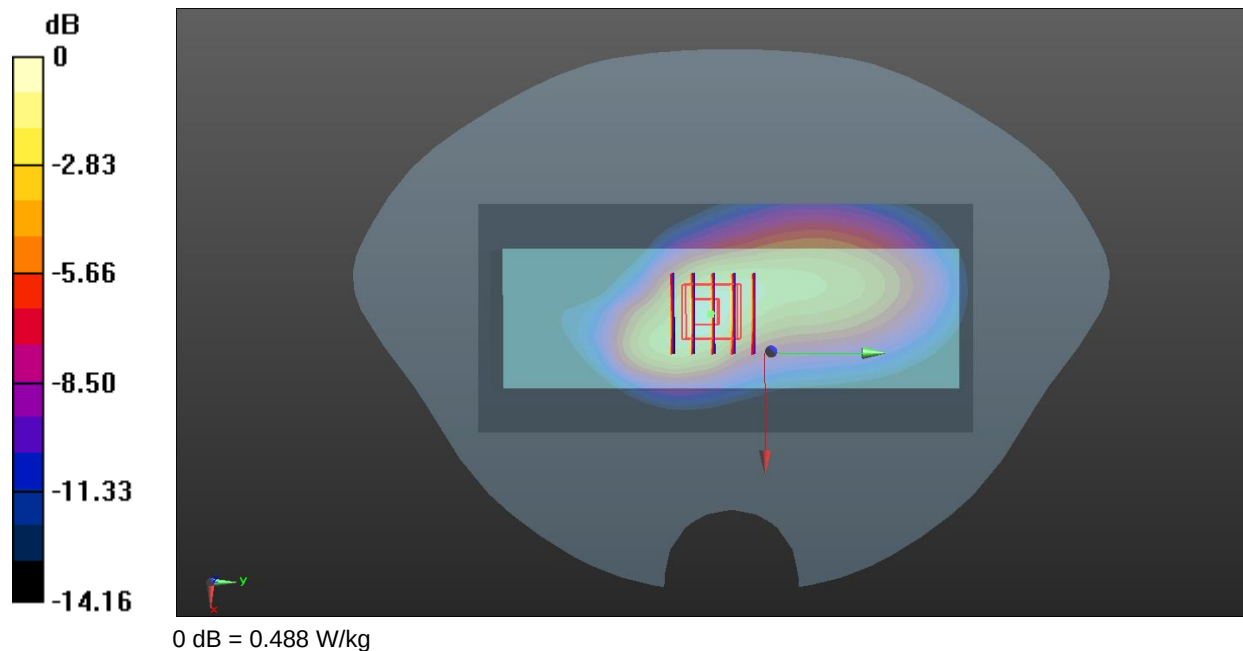

Meas.4 Limbs Plane with Right Edge 0mm on High Channel in GPRS 2Slots mode with ANT 0

Date: 2026.03.13

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch810/Area Scan (61x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.610 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 11.04 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.578 W/kg

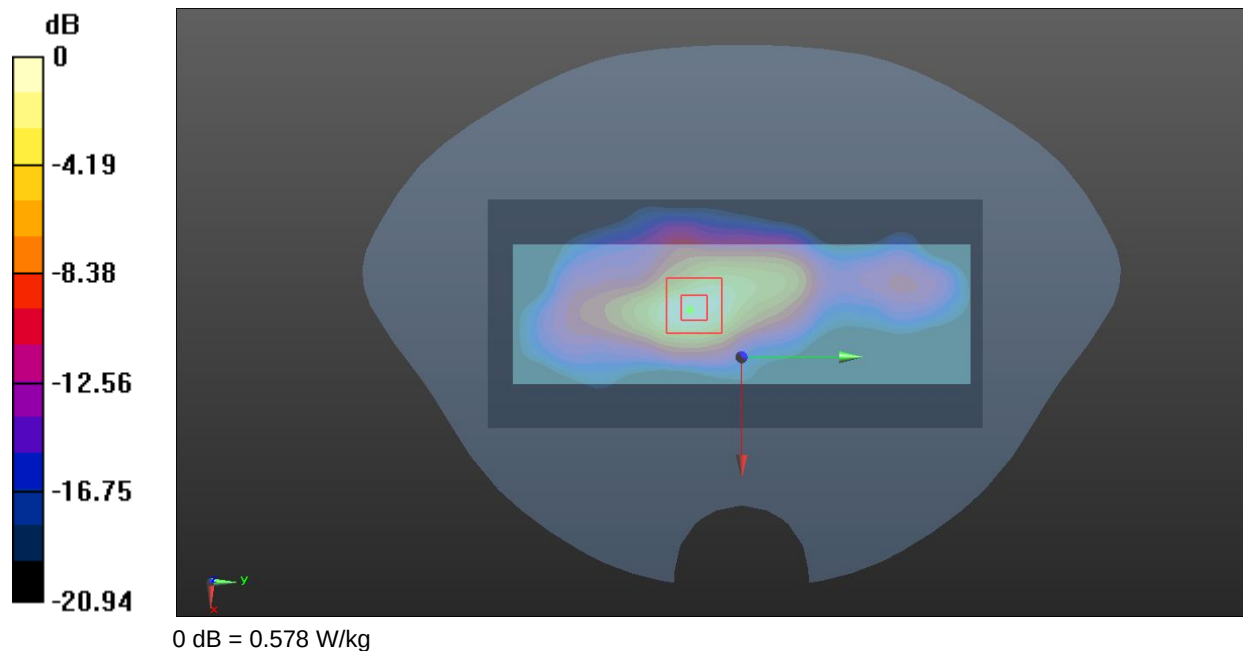

Meas.5 Body Plane with Right Edge 5mm on High Channel in WCDMA Band2 mode with ANT 0

Date: 2026.03.13

Communication System Band: 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9538/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.384 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.82 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.171 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.386 W/kg

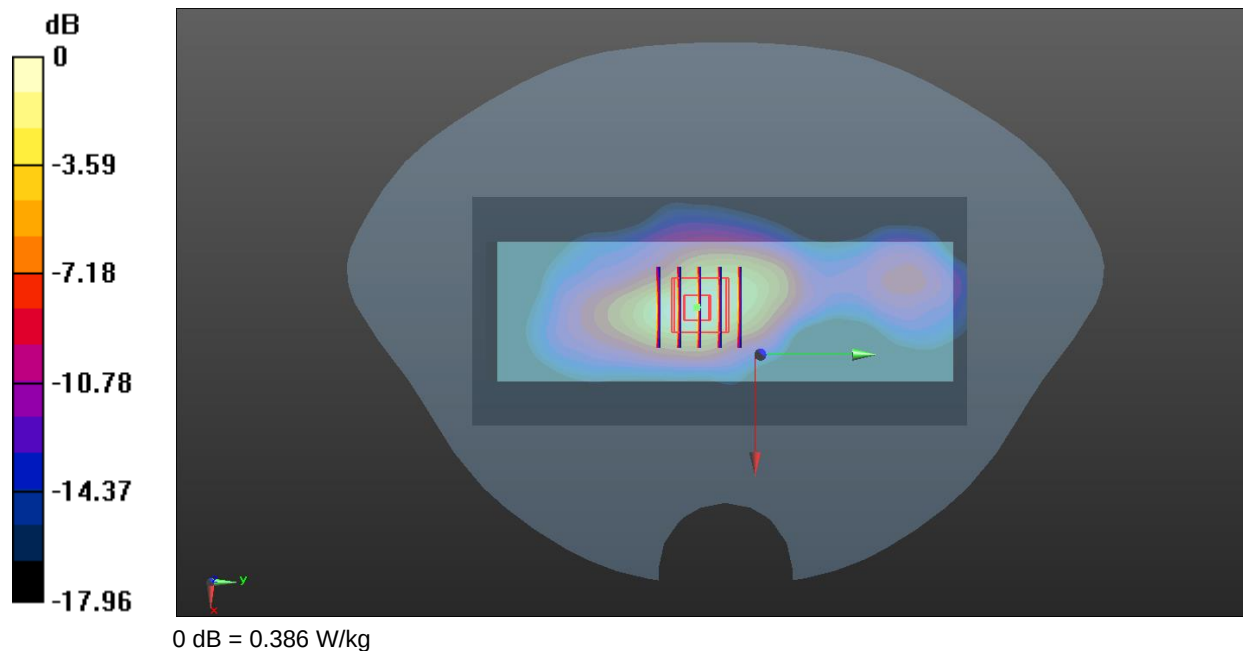

Meas.6 Body Plane with Right Edge 5mm on Middle Channel in WCDMA Band5 mode with ANT 0

Date: 2026.03.11

Communication System Band: 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.233$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4182/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.306 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.04 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 0.303 W/kg

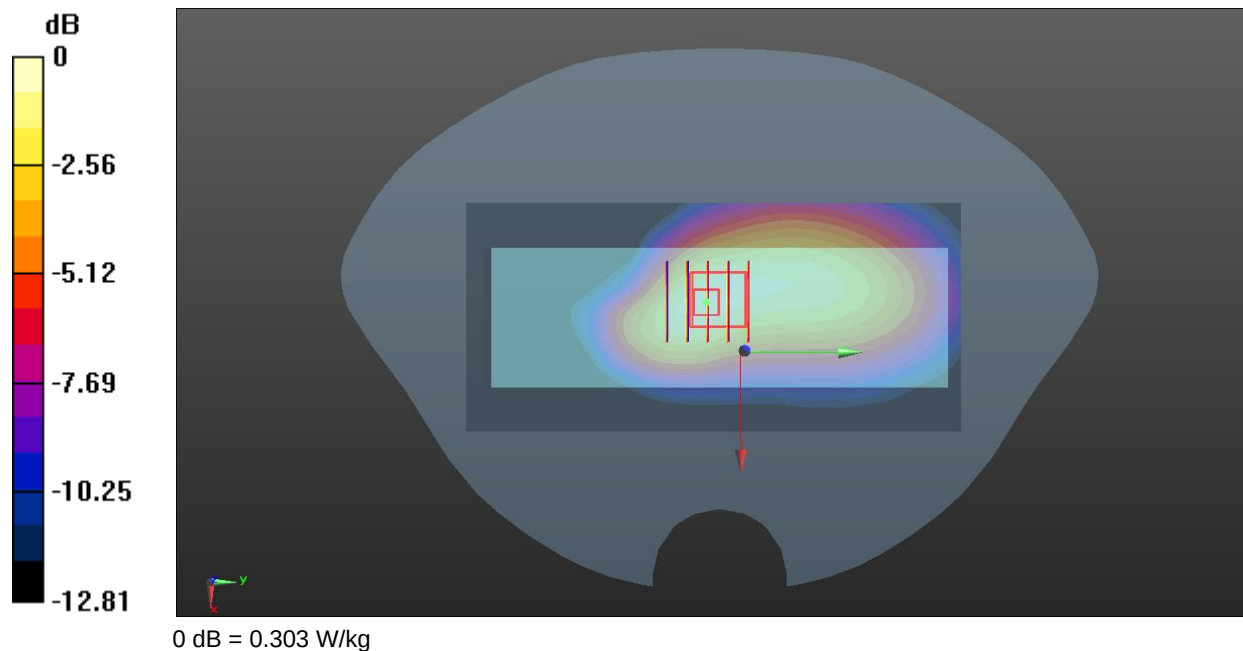

Meas.7 Limbs Plane with Right Edge 0mm on Middle Channel in WCDMA Band2 mode with ANT 0

Date: 2026.03.13

Communication System Band: 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(8.35, 8.35, 8.35); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch9538/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.739 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.34 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 0.733 W/kg

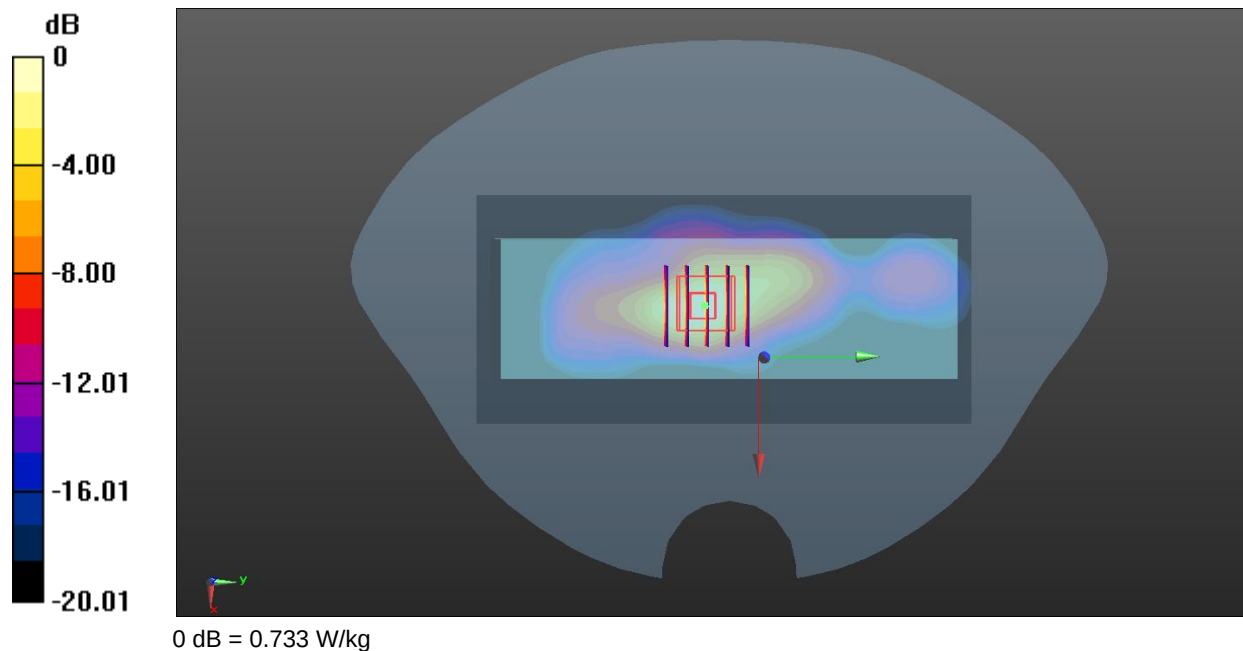

Meas.8 Limbs Plane with Right Edge 0mm on Middle Channel in WCDMA Band5 mode with ANT 0

Date: 2026.03.11

Communication System Band: 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 40.583$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch4233/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.564 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.29 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.567 W/kg

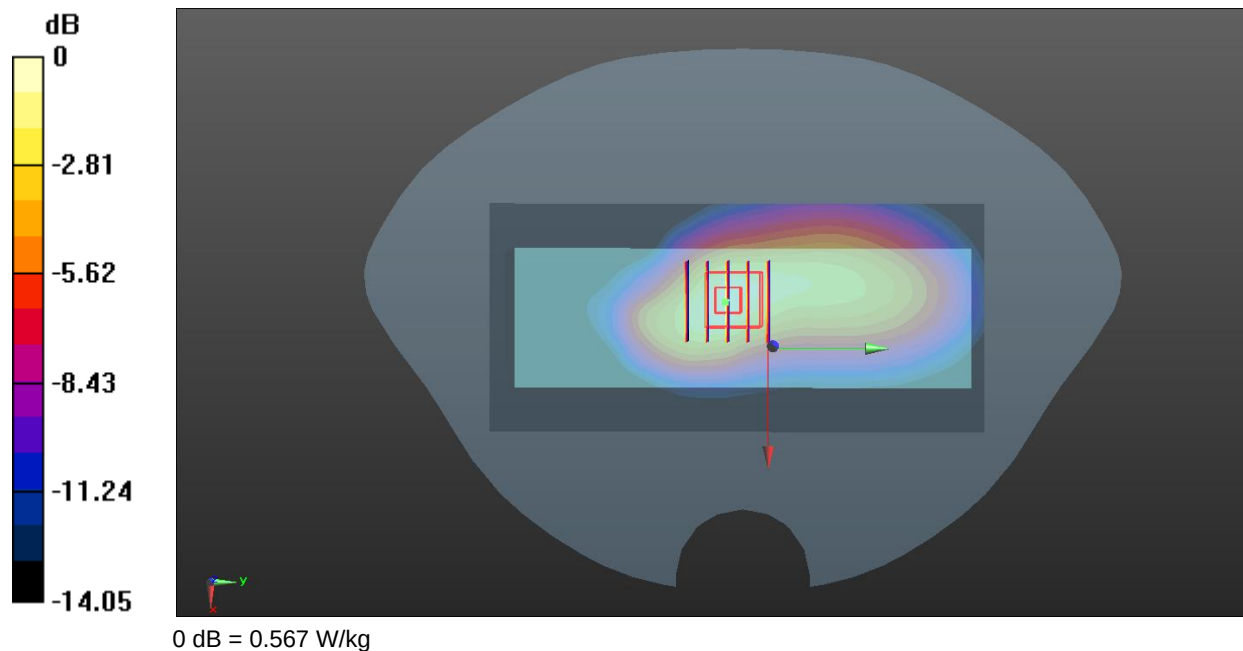

Meas.9 Body Plane with Right Edge 5mm on Middle Channel in LTE Band5 mode with ANT 0

Date: 2026.03.12

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 42.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20525/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.306 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.20 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 68%

Maximum value of SAR (measured) = 0.302 W/kg

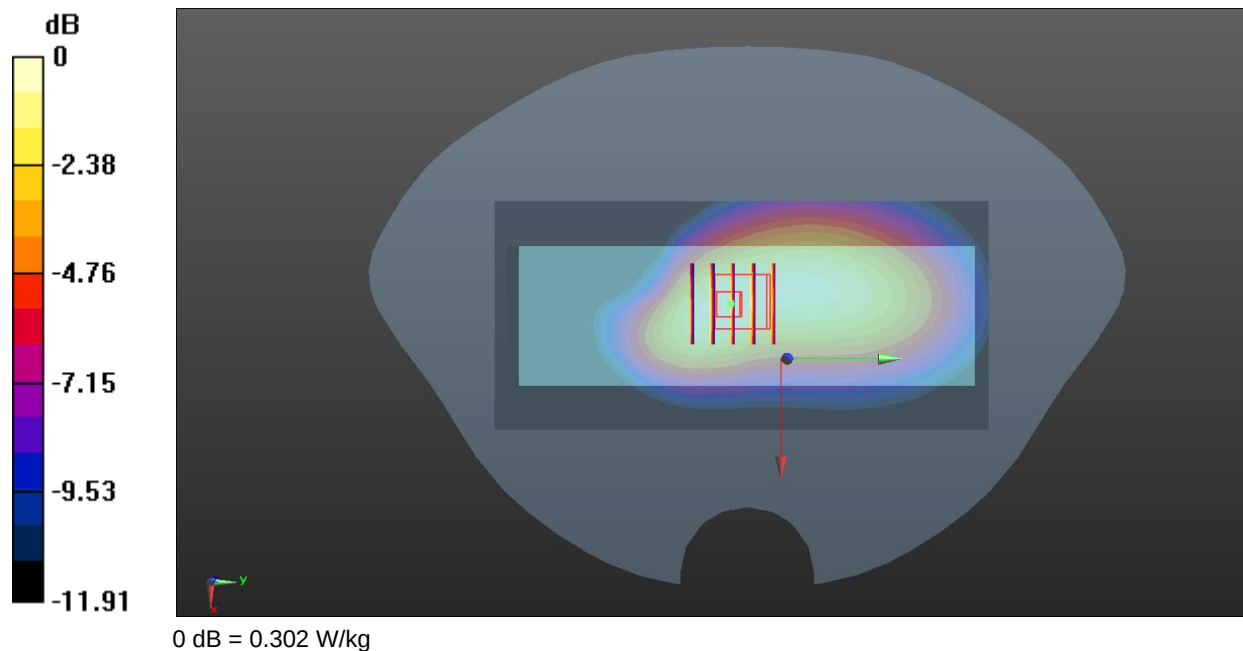

Meas.10 Body Plane with Right Edge 5mm on High Channel in LTE Band7 mode with ANT 0

Date: 2026.03.15

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.918$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch21350/Area Scan (71x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.458 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.10 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 0.425 W/kg

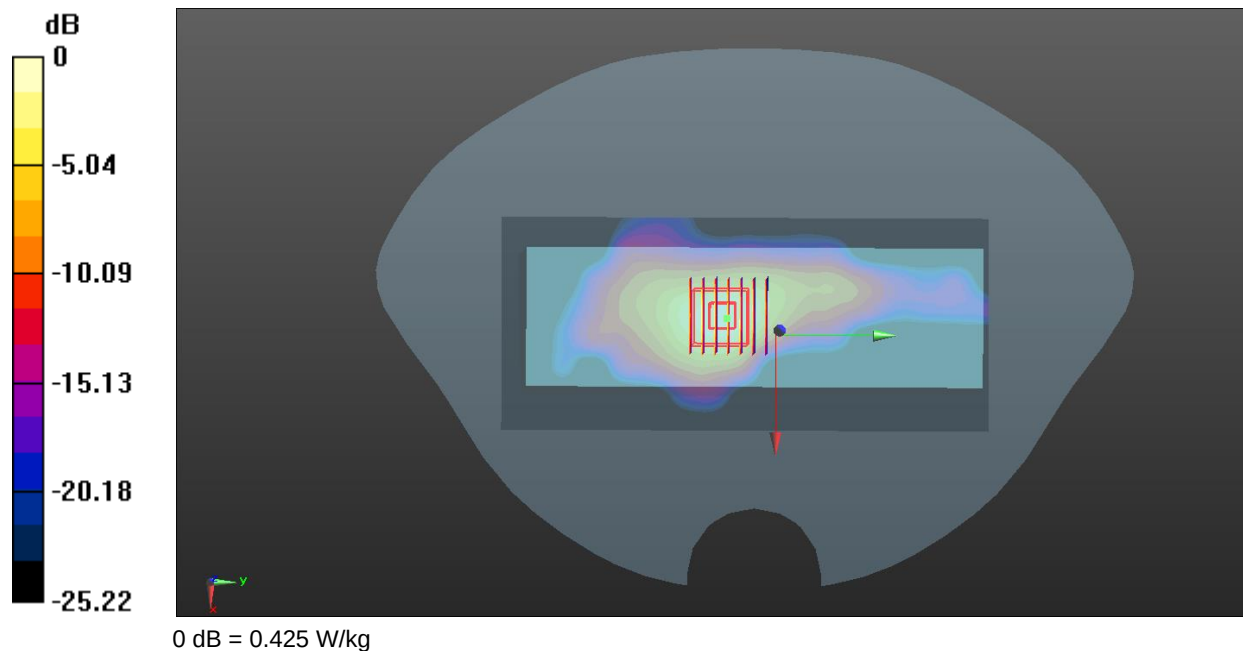

Meas.11 Limbs Plane with Right Edge 0mm on Low Channel in LTE Band5 mode with ANT 0

Date: 2026.03.12

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.69$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(10.25, 10.25, 10.25); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch20450/Area Scan (61x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.605 W/kg

Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 22.23 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 13.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 0.608 W/kg

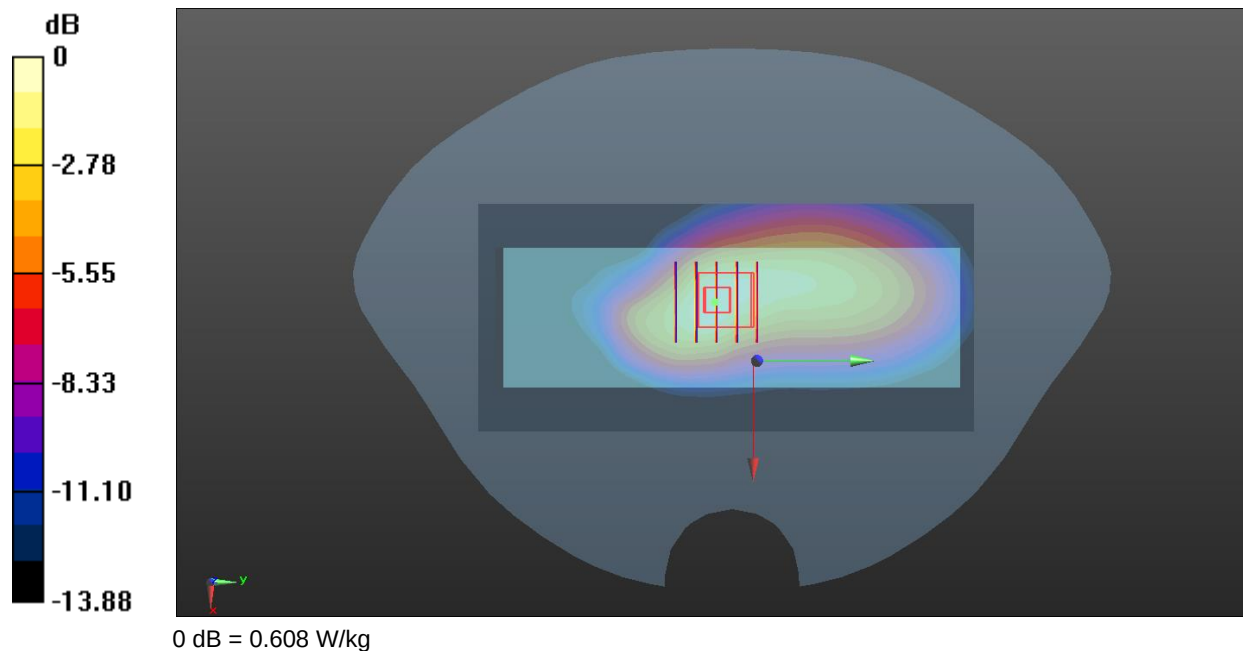

Meas.12 Limbs Plane with Right Edge 0mm on High Channel in LTE Band7 mode with ANT 0

Date: 2026.03.15

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.918$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.64, 7.64, 7.64); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch21350/Area Scan (71x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.90 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.957 W/kg

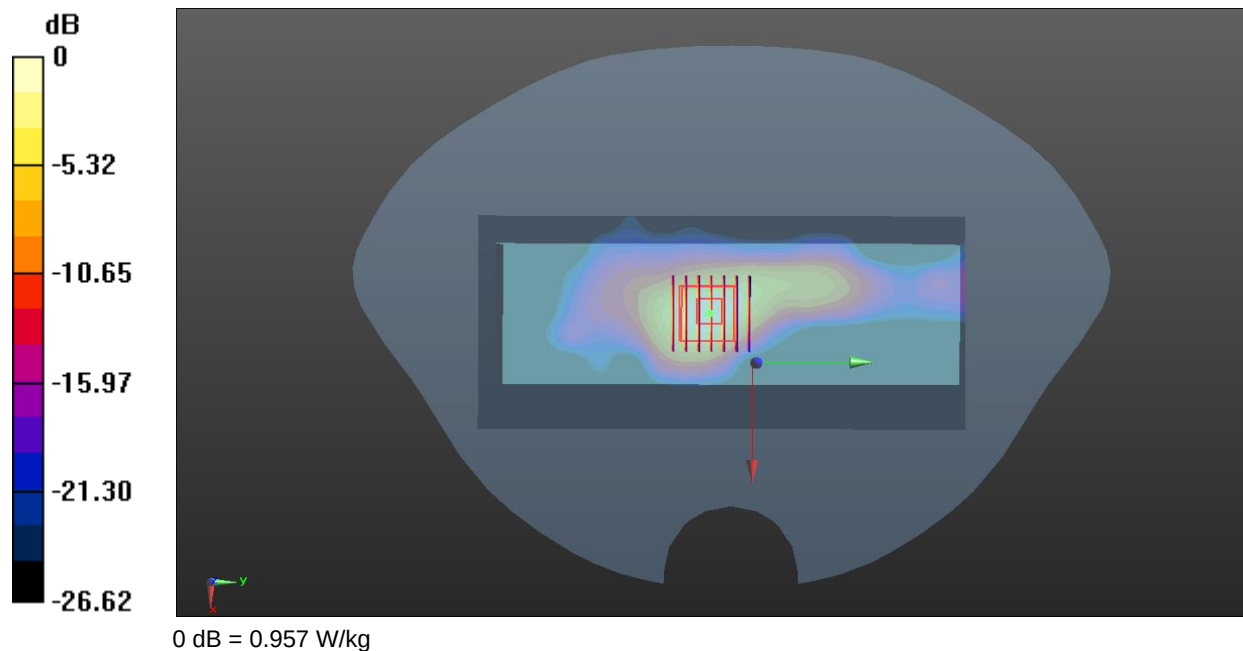

Meas.13 Body Plane with Left Edge 5mm on 78 Channel in Bluetooth mode with ANT 1

Date: 2026.03.14

Communication System Band:Bluetooth; Frequency: 2480 MHz;Duty Cycle: 1:1.298

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 37.938$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.8°C Liquid Temperature:21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch78/Area Scan (71x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0855 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.821 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.036 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.0865 W/kg

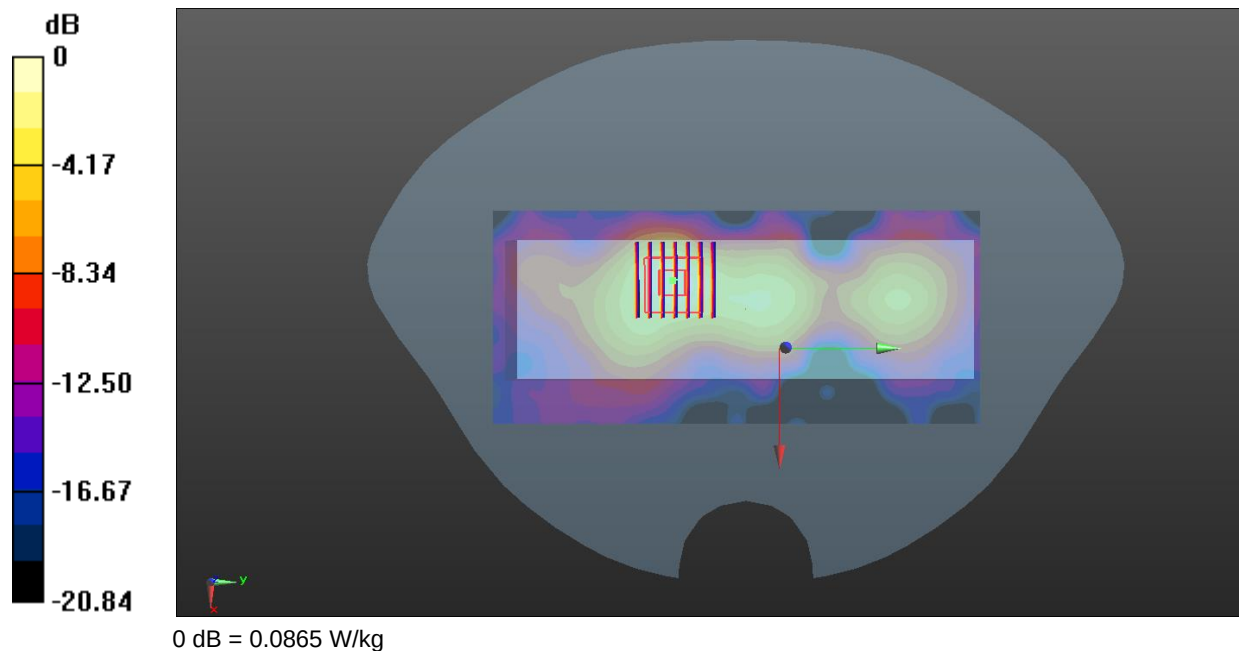

Meas.14 Body Plane with Left Edge 5mm on 6 Channel in IEEE802.11b mode with ANT 1

Date: 2026.03.14

Communication System Band: WIFI2.4; Frequency: 2437 MHz; Duty Cycle: 1:1.007

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 40.141$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch6/Area Scan (71x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.493 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 11.93 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.896 W/kg
SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.215 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.3%
Maximum value of SAR (measured) = 0.497 W/kg

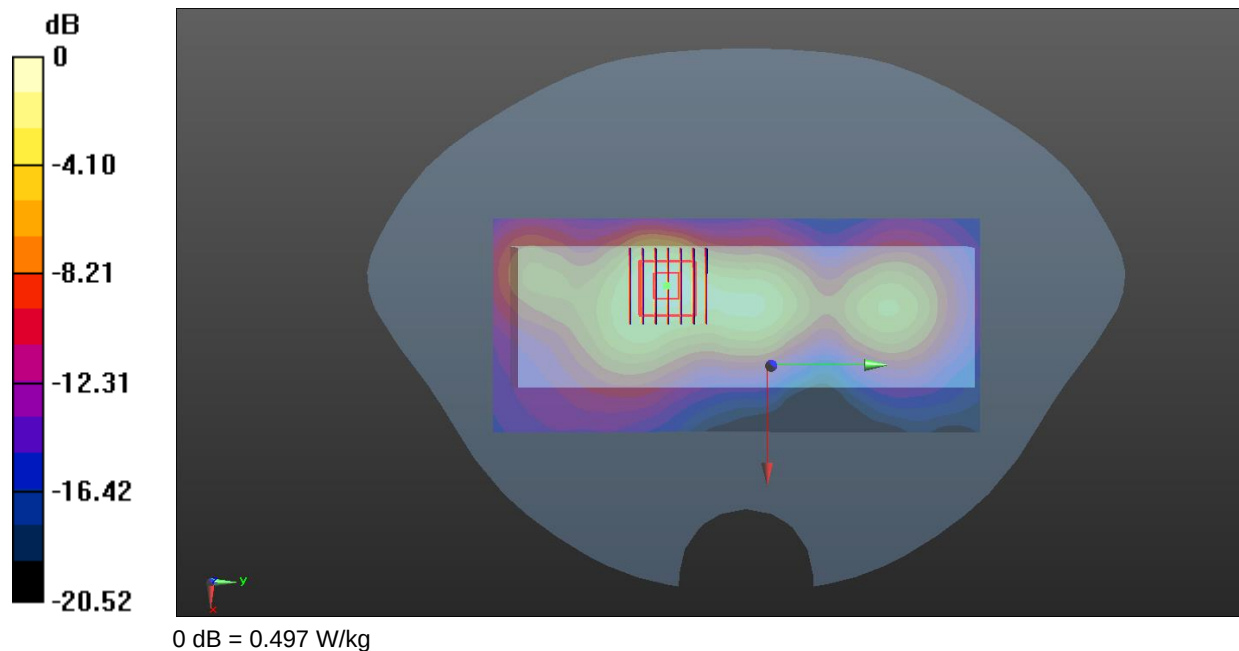

Meas.15 Body Plane with Left Edge 5mm on 52 Channel in IEEE802.11a mode with ANT 1

Date: 2026.03.16

Communication System Band: 5.3G; Frequency: 5260 MHz; Duty Cycle: 1:1.031

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.633$ S/m; $\epsilon_r = 36.697$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.42, 5.42, 5.42); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch52/Area Scan (91x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.05 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 5.802 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 1.02 W/kg

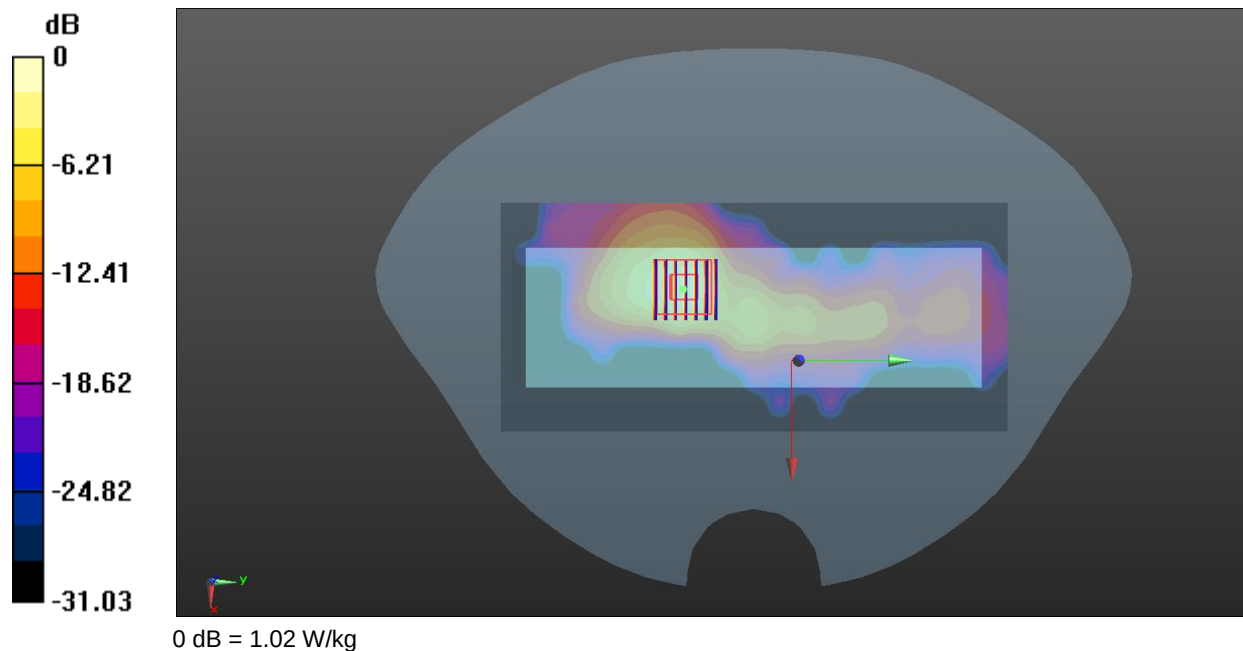

Meas.16 Body Plane with Left Edge 5mm on 100 Channel in IEEE802.11a mode with ANT 1

Date: 2026.03.16

Communication System Band: 5.6G; Frequency: 5500 MHz; Duty Cycle: 1:1.031

Medium parameters used (interpolated): $f = 5500$ MHz; $\sigma = 4.849$ S/m; $\epsilon_r = 36.798$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.03, 5.03, 5.03); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch100/Area Scan (91x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.938 W/kg

Ch100/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.689 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.892 W/kg

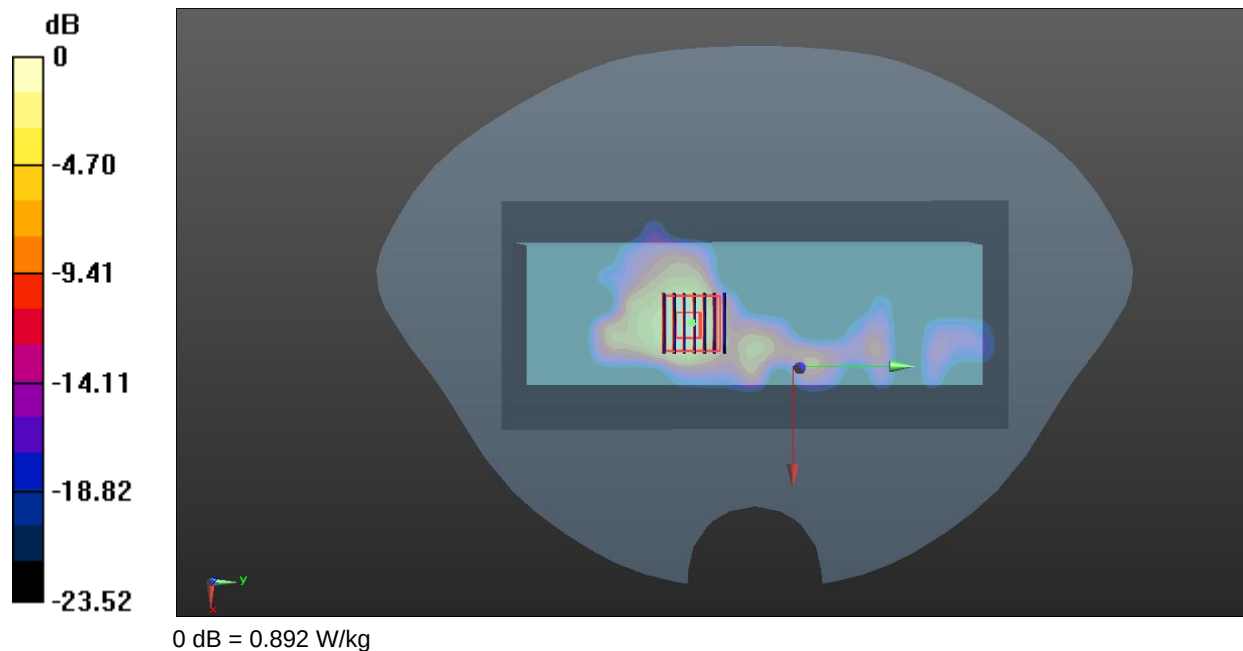

Meas.17 Body Plane with Left Edge 5mm on 165 Channel in IEEE802.11a mode with ANT 1

Date: 2026.03.17

Communication System Band: 5.8G; Frequency: 5825 MHz; Duty Cycle: 1:1.031

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.343$ S/m; $\epsilon_r = 34.565$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.01, 5.01, 5.01); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch165/Area Scan (91x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.955 W/kg

Ch165/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 5.053 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.911 W/kg

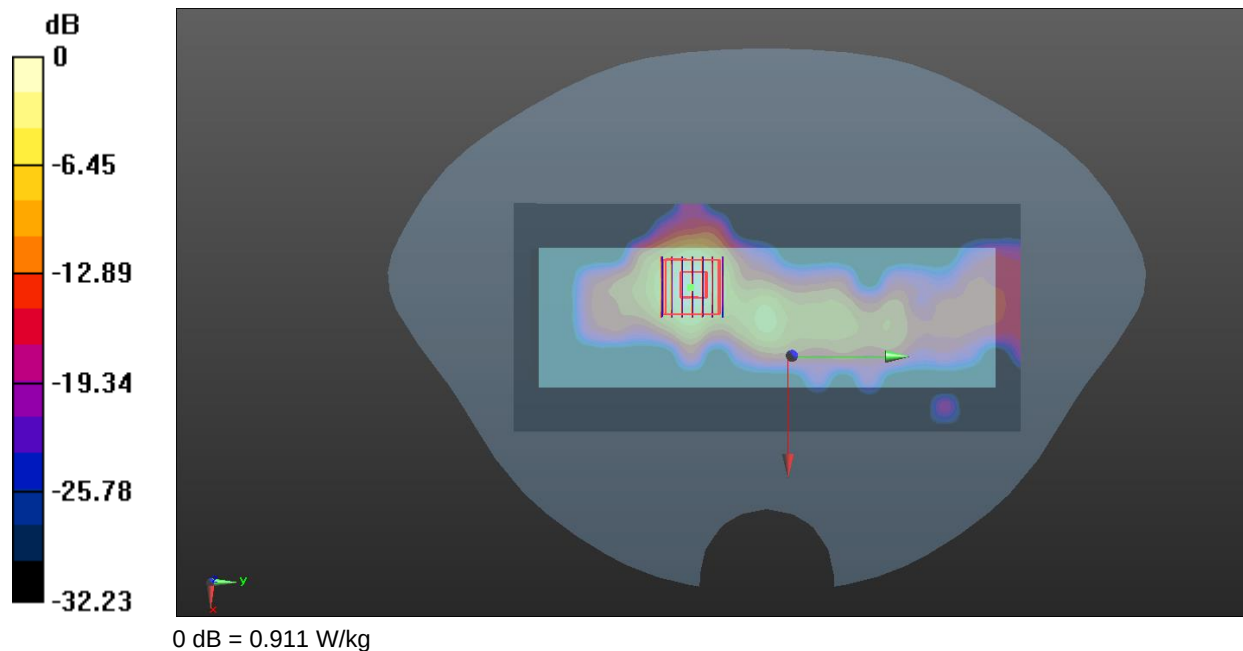

Meas.18 Limbs Plane with Left Edge 0mm on 78 Channel in Bluetooth mode with ANT 1

Date: 2026.03.14

Communication System Band:Bluetooth; Frequency: 2480 MHz;Duty Cycle: 1:1.298

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 37.938$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature:22.8°C Liquid Temperature:21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch78/Area Scan (71x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.281 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.461 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.546 W/kg
SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.102 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.3%
Maximum value of SAR (measured) = 0.277 W/kg

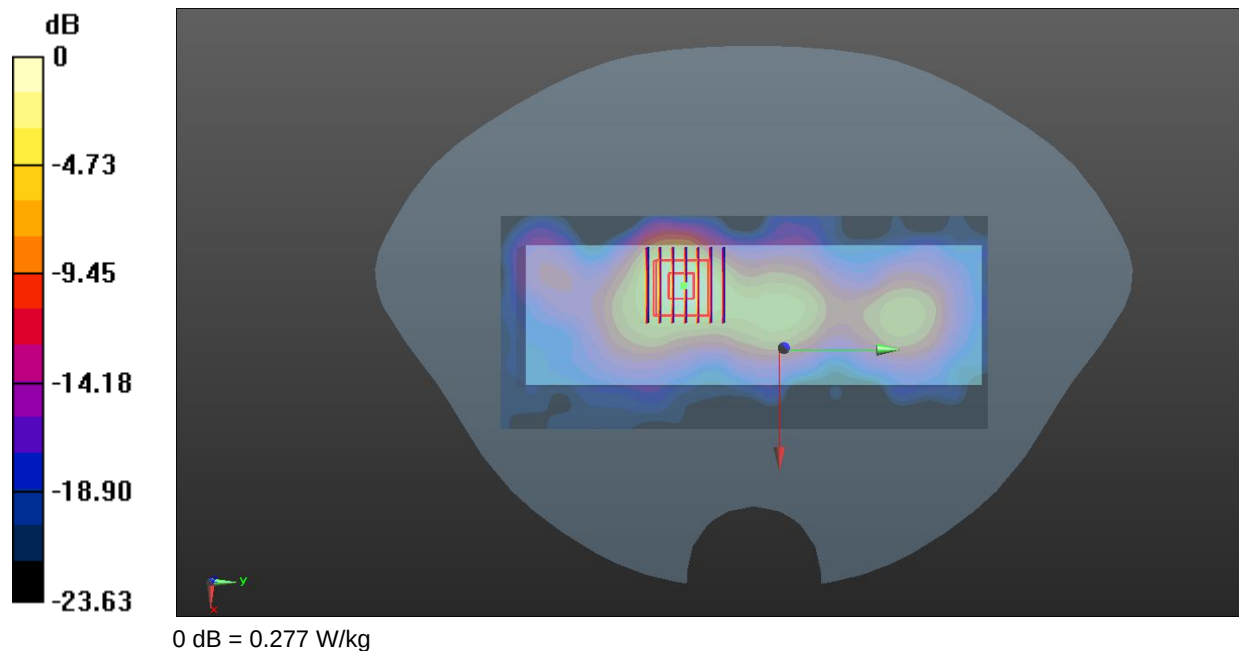

Meas.19 Limbs Plane with Left Edge 0mm on 11 Channel in IEEE802.11b mode with ANT 1

Date: 2026.03.14

Communication System Band: WIFI2.4; Frequency: 2462 MHz; Duty Cycle: 1:1.007

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(7.8, 7.8, 7.8); Calibrated: 2025.06.30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch11/Area Scan (71x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.97 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 16.23 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 1.53 W/kg; SAR(10 g) = 0.649 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 1.75 W/kg

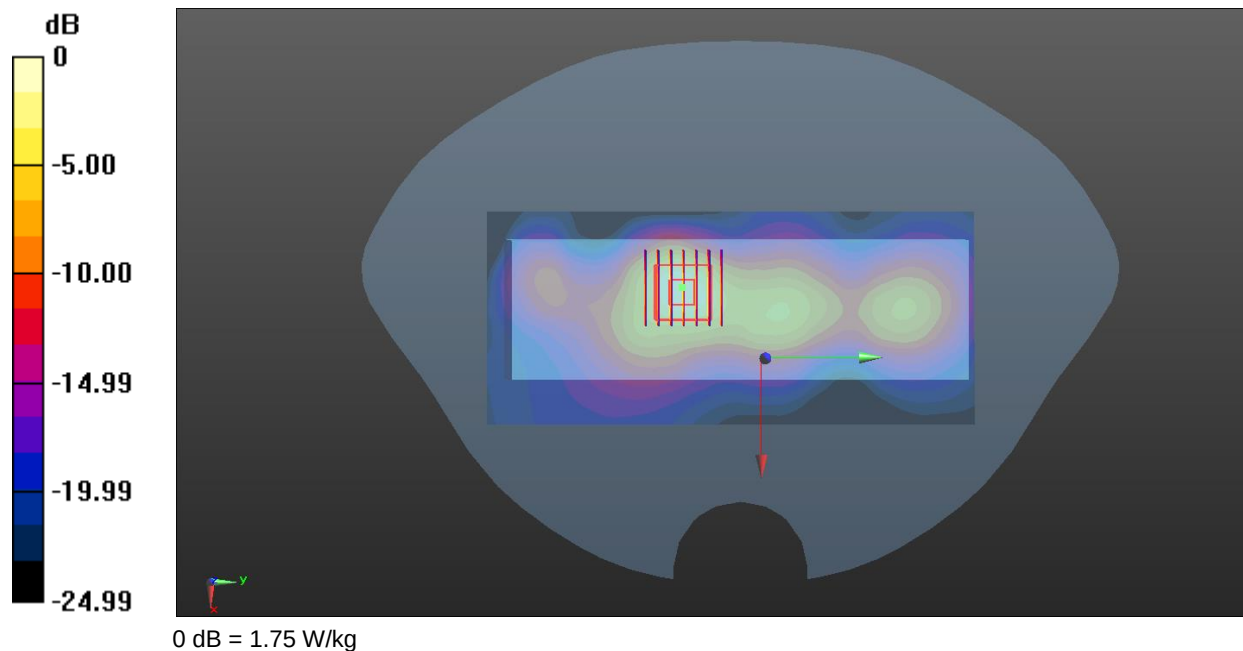

Meas.20 Limbs Plane with Left Edge 0mm on 60 Channel in IEEE802.11a mode with ANT 1

Date: 2026.03.16

Communication System Band: 5.3G; Frequency: 5300 MHz; Duty Cycle: 1:1.031

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 36.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature: 22.2°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.42, 5.42, 5.42); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch60/Area Scan (91x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 3.41 W/kg

Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 8.223 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 6.28 W/kg
SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.444 W/kg
Smallest distance from peaks to all points 3 dB below = 6.8 mm
Ratio of SAR at M2 to SAR at M1 = 56.6%
Maximum value of SAR (measured) = 3.37 W/kg

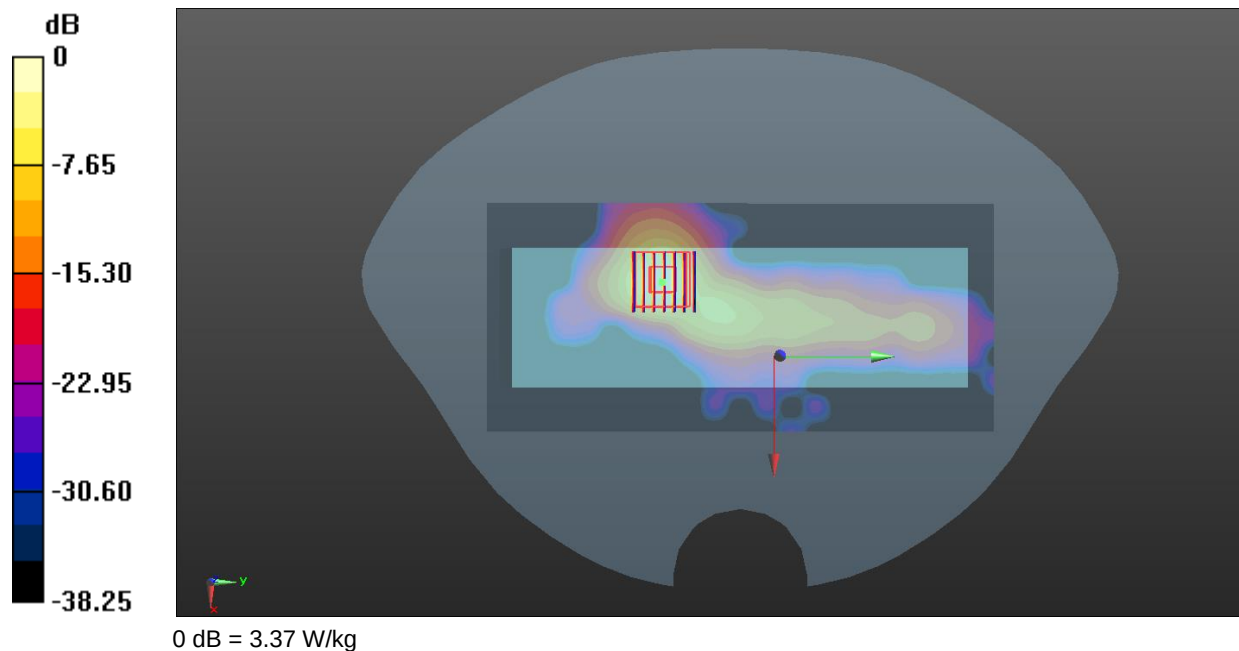

Meas.21 Limbs Plane with Left Edge 0mm on 100 Channel in IEEE802.11a mode with ANT 1

Date: 2026.03.16

Communication System Band: 5.6G; Frequency: 5500 MHz; Duty Cycle: 1:1.031

Medium parameters used (interpolated): $f = 5500$ MHz; $\sigma = 4.849$ S/m; $\epsilon_r = 36.798$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.03, 5.03, 5.03); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch100/Area Scan (91x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 3.26 W/kg

Ch100/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 5.707 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 5.92 W/kg

SAR(1 g) = 1.51 W/kg; SAR(10 g) = 0.418 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 3.11 W/kg

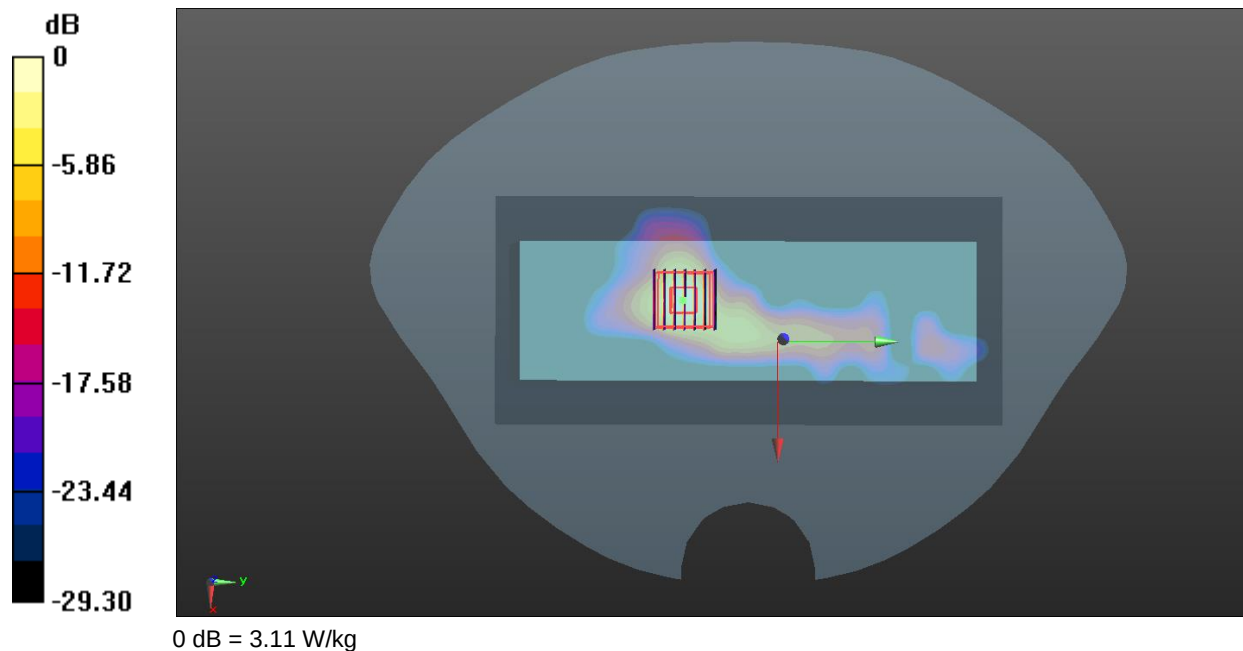

Meas.22 Limbs Plane with Left Edge 0mm on 157 Channel in IEEE802.11a mode with ANT 1

Date: 2026.03.17

Communication System Band: 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1.031

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.191$ S/m; $\epsilon_r = 35.244$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature: 22.1°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7664; ConvF(5.01, 5.01, 5.01); Calibrated: 2025.06.30
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Ch157/Area Scan (91x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 3.02 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 7.844 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 5.70 W/kg
SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.324 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.4 mm
 Ratio of SAR at M2 to SAR at M1 = 51.4%
 Maximum value of SAR (measured) = 2.82 W/kg

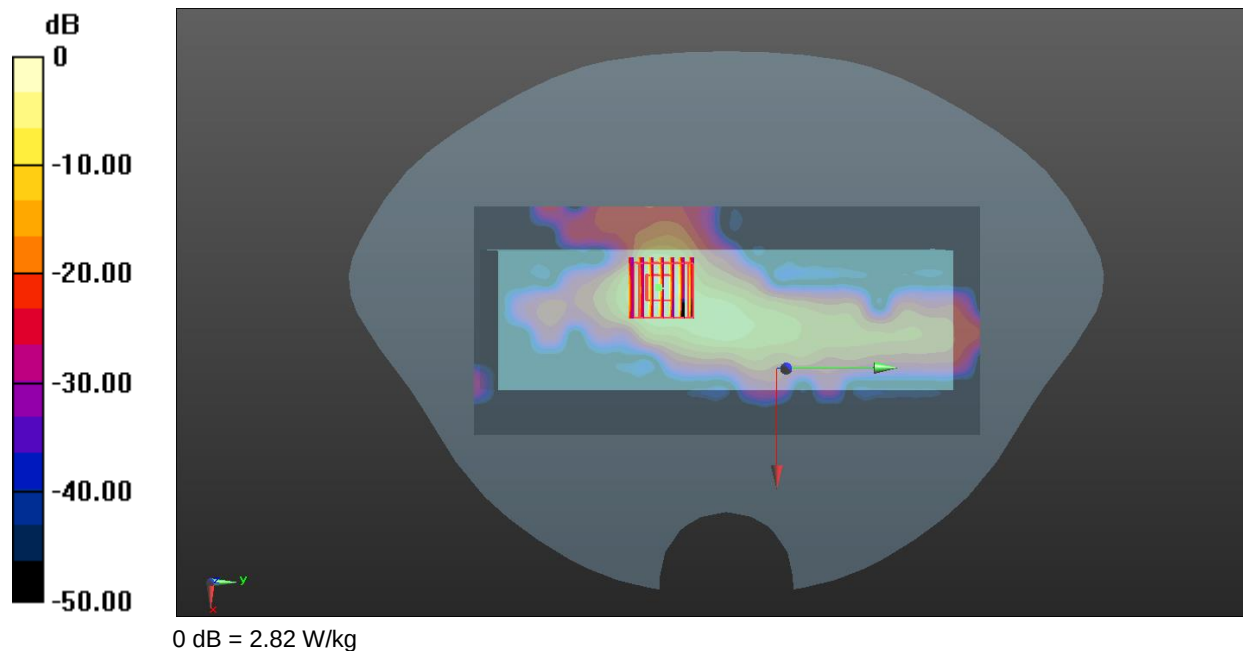

--BLANK BELOW--