

Meas.1 Body Plane with Left Edge 5mm on High Channel in GPRS850 3Slots mode with ANT 0

Date: 2026.04.29

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73,9.73,9.73) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch251/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.577 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 24.79 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.558 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.569 W/kg

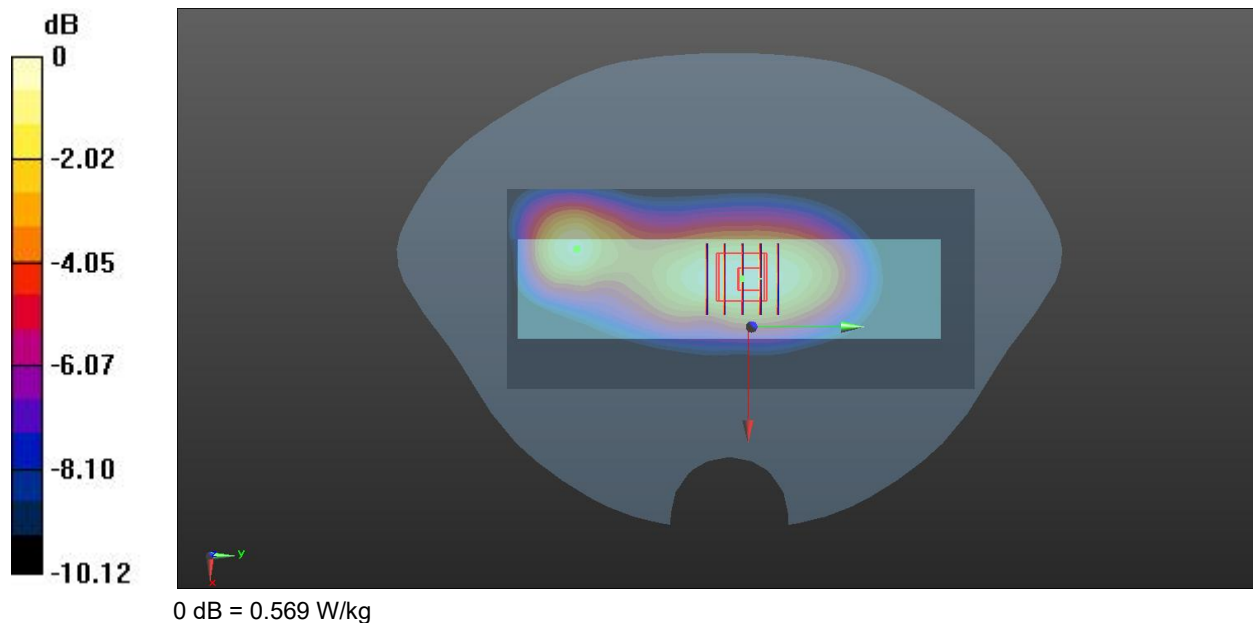

Meas.2 Body Plane with Left Edge 5mm on Middle Channel in GPRS1900 2Slots mode with ANT 0

Date: 2026.05.01

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.396$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.12,8.12,8.12) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch661/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.617 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.354 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.633 W/kg

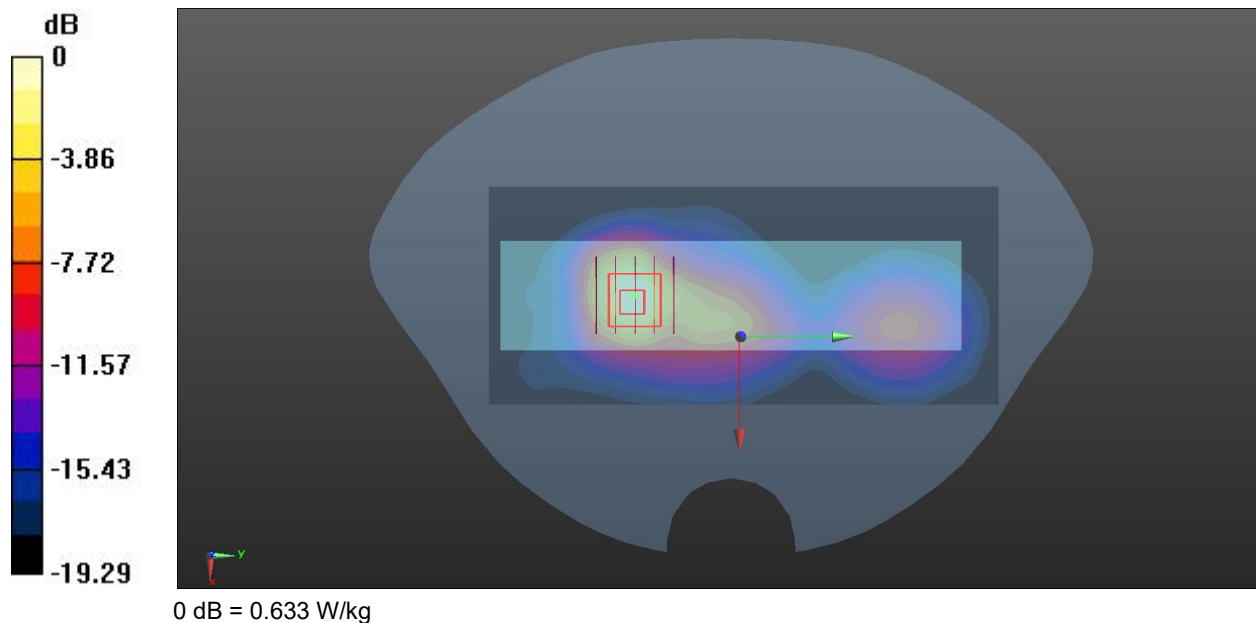

Meas.3 Body Plane with Left Edge 5mm on High Channel in WCDMA Band2 mode with ANT 0

Date: 2026.05.01

Communication System Band: 2; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.932$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.12,8.12,8.12) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch9538/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.24 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.23 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.545 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 1.30 W/kg

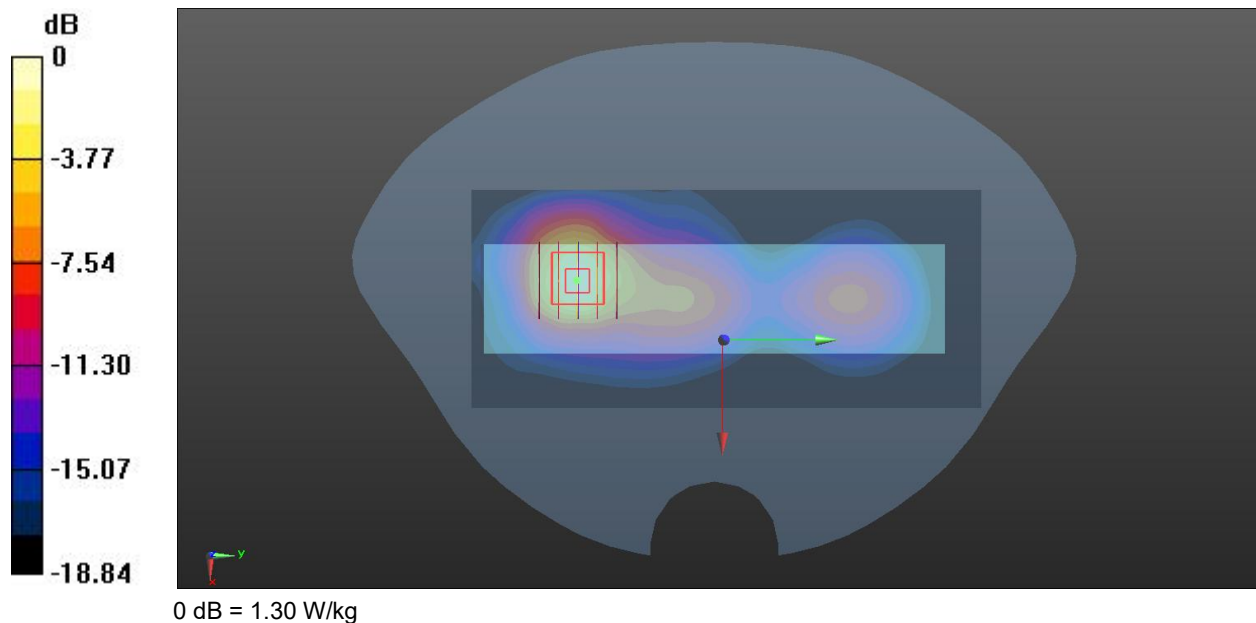

Meas.4 Body Plane with Left Edge 5mm on High Channel in WCDMA Band5 mode with ANT 0

Date: 2026.04.29

Communication System Band: 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.662$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73,9.73,9.73) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch4233/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.364 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.89 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.365 W/kg

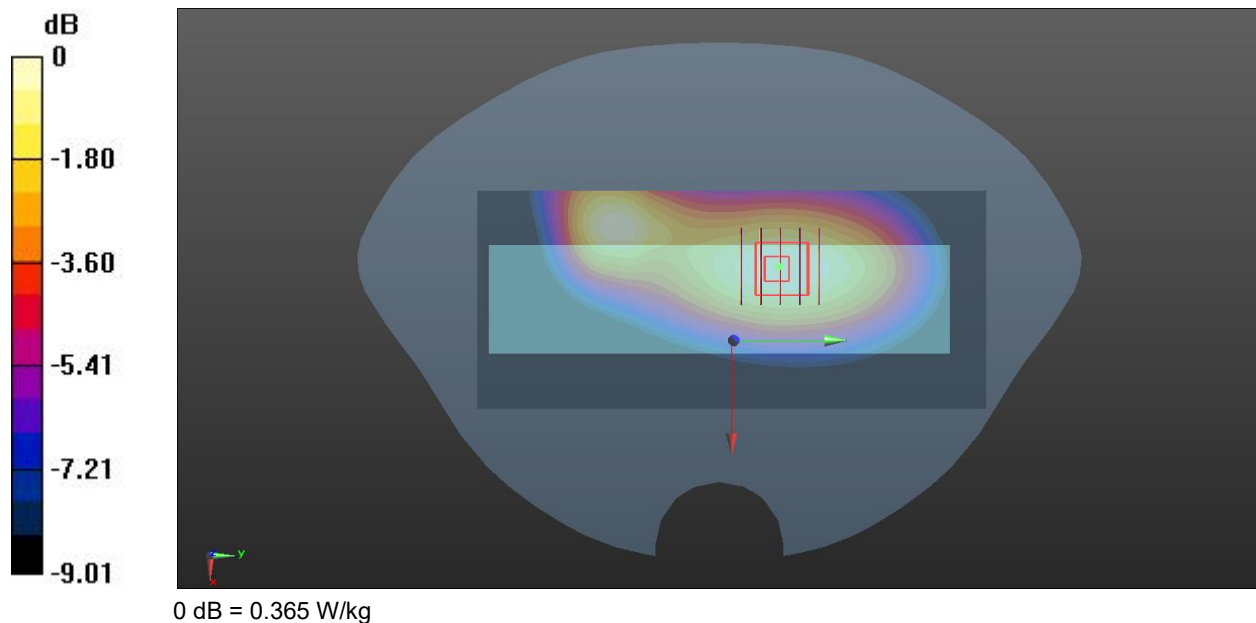

Meas.5 Body Plane with Left Edge 5mm on Middle Channel in LTE Band5 mode with ANT 0

Date: 2026.05.02

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.079$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73,9.73,9.73) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20525/Area Scan (61x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.491 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 22.98 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 0.501 W/kg

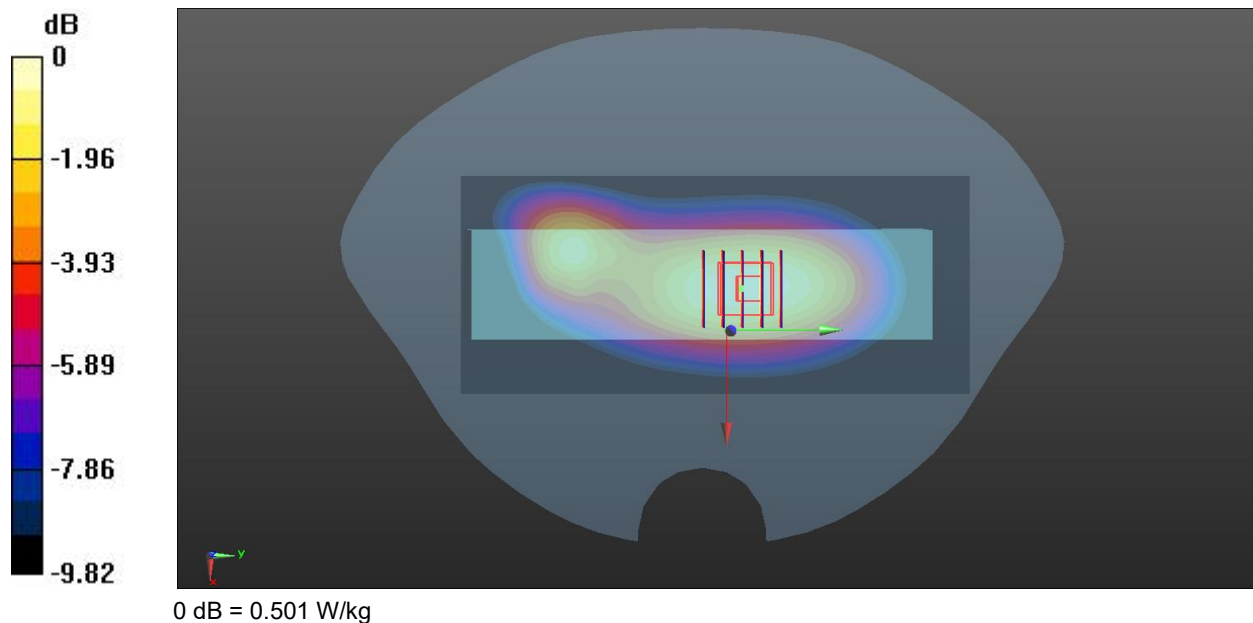

Meas.6 Body Plane with Left Edge 5mm on High Channel in LTE Band7 mode with ANT 0

Date: 2026.04.30

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.915$ S/m; $\epsilon_r = 38.894$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.52,7.52,7.52) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch21350/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.973 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.399 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 1.02 W/kg

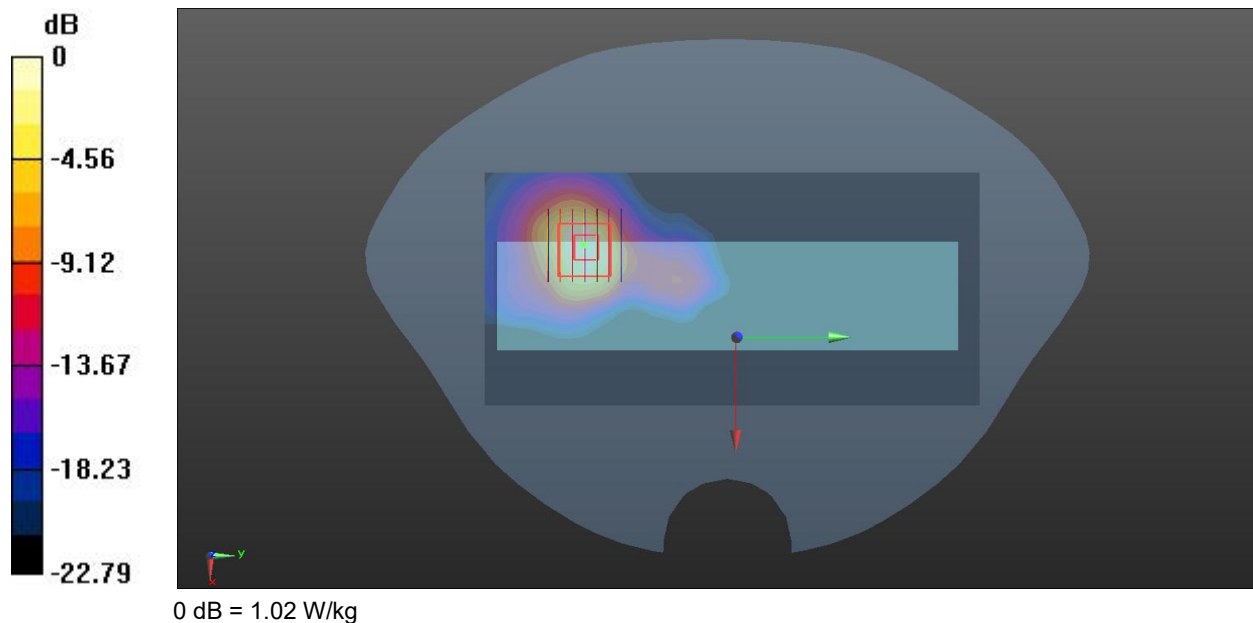

Meas.7 Limbs Plane with Left Edge 0mm on High Channel in GPRS850 3Slots mode with ANT 0

Date: 2026.04.29

Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 40.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73,9.73,9.73) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch251/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.40 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.40 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.690 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 1.44 W/kg

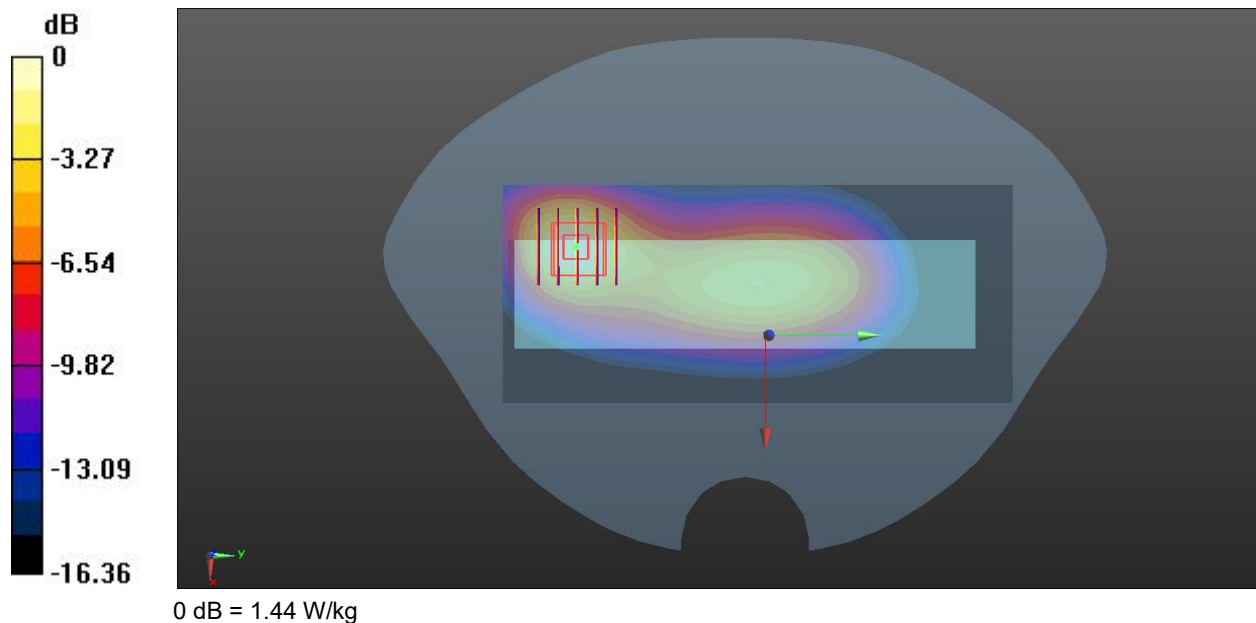

Meas.8 Limbs Plane with Left Edge 0mm on Middle Channel in GPRS1900 2Slots mode with ANT 0

Date: 2026.05.01

Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.396$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.12,8.12,8.12) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch661/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.83 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.451 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.81 W/kg

SAR(1 g) = 2.29 W/kg; SAR(10 g) = 0.927 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 2.81 W/kg

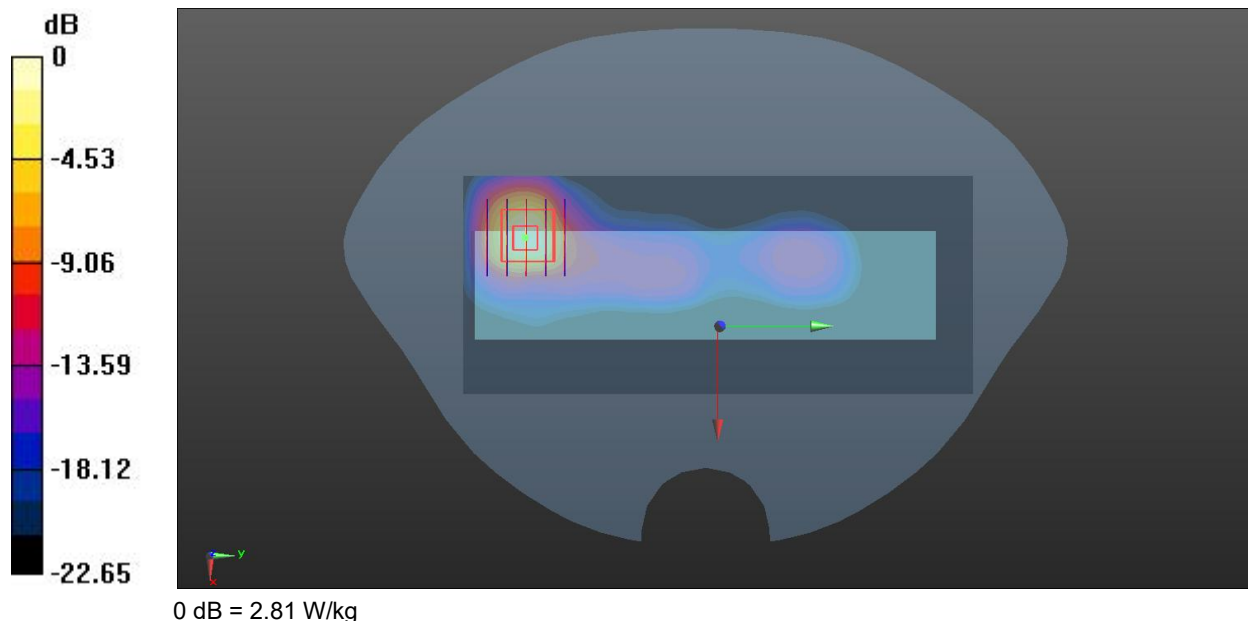

Meas.9 Limbs Plane with Left Edge 0mm on High Channel in WCDMA Band2 mode with ANT 0

Date: 2026.05.01

Communication System Band: 2; Frequency: 1907.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.932$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.3 °CLiquid Temperature:21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.12,8.12,8.12) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch9538/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.44 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.33 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 6.15 W/kg

SAR(1 g) = 3.21 W/kg; SAR(10 g) = 1.34 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 3.87 W/kg

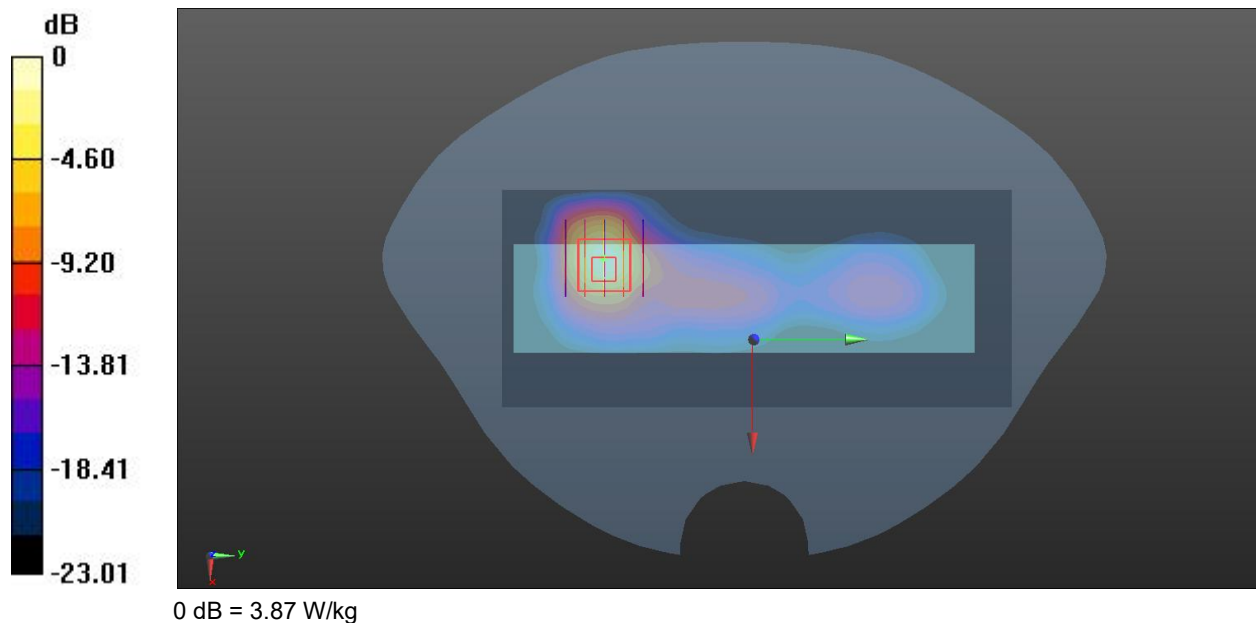

Meas.10 Limbs Plane with Left Edge 0mm on High Channel in WCDMA Band5 mode with ANT 0

Date: 2026.04.29

Communication System Band: 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.662$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73,9.73,9.73) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch4233/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.43 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.72 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.716 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 1.46 W/kg

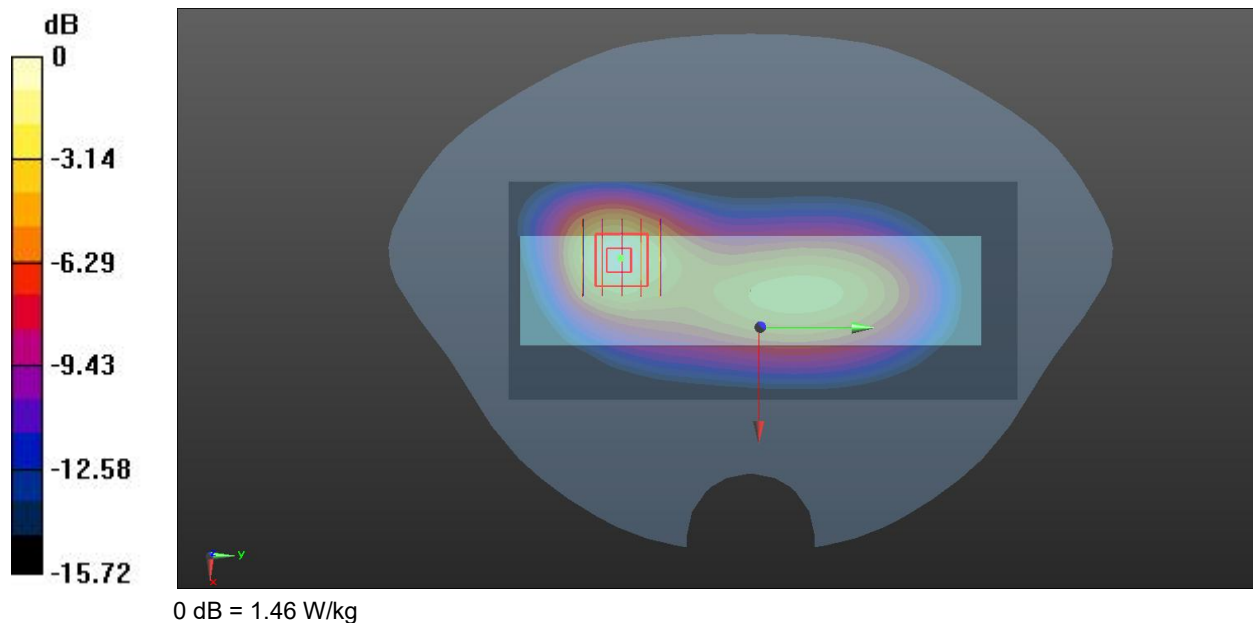

Meas.11 Limbs Plane with Left Edge 0mm on Middle Channel in LTE Band5 mode with ANT 0

Date: 2026.05.02

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 42.079$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73,9.73,9.73) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20525/Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.20 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.583 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 1.05 W/kg

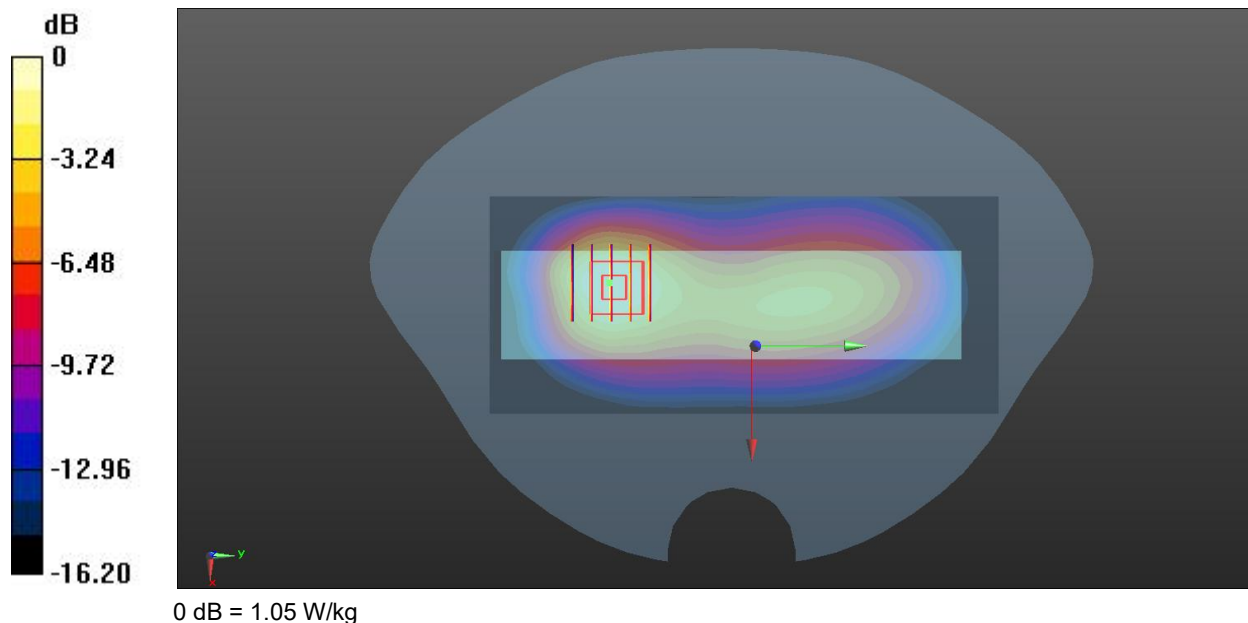

Meas.12 Limbs Plane with Left Edge 0mm on Low Channel in LTE Band7 mode with ANT 0

Date: 2026.04.30

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 40.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.52,7.52,7.52) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch20850/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.03 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 1.83 W/kg; SAR(10 g) = 0.826 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 2.28 W/kg

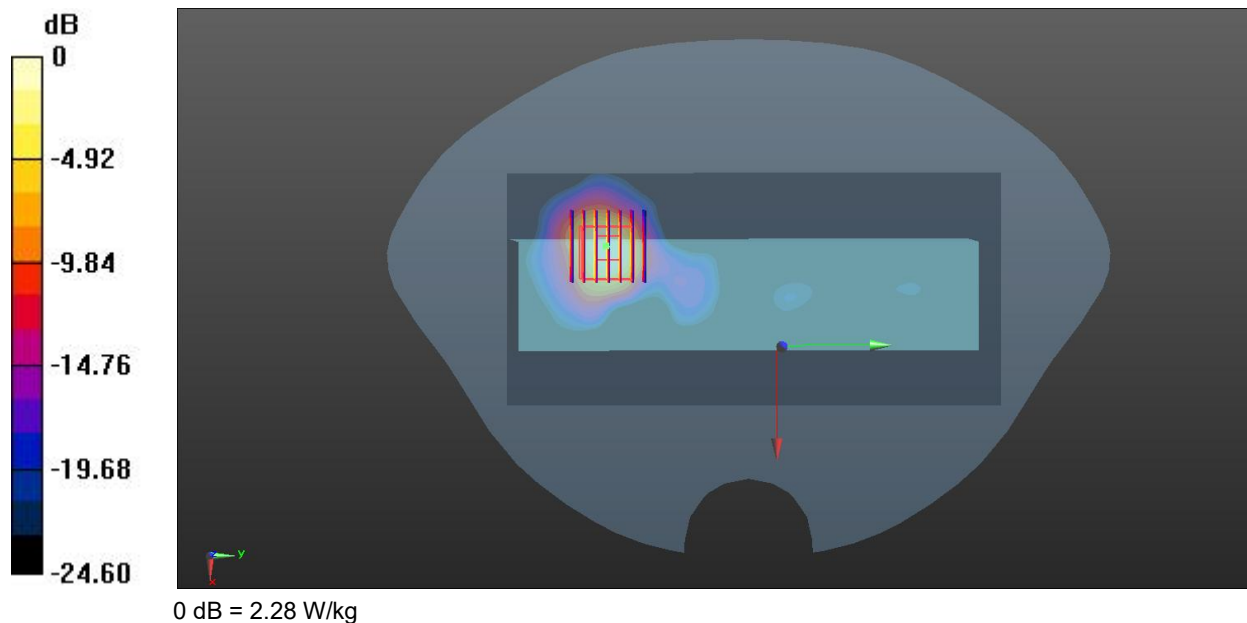

Meas.13 Body Plane with Right Edge 5mm on 39 Channel in Bluetooth mode with ANT 1

Date: 2026.04.27

Communication System Band: 39; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71,7.71,7.71) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch39/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.139 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.0814 W/kg

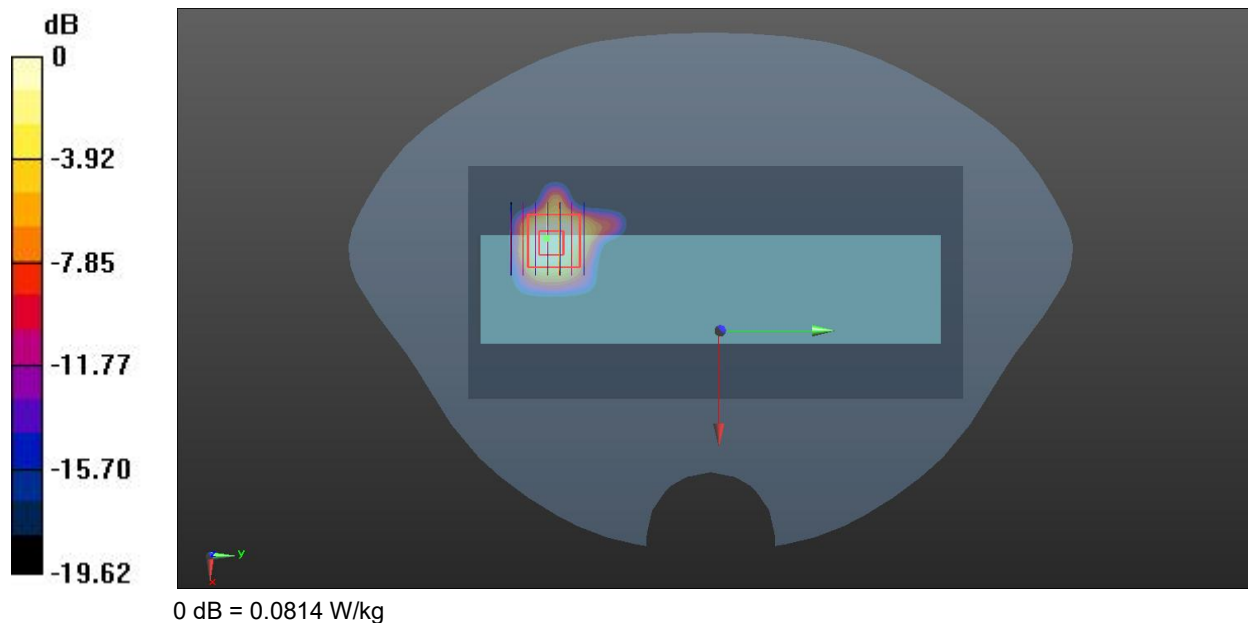

Meas.14 Body Plane with Right Edge 5mm on 6 Channel in IEEE802.11b mode with ANT 1

Date: 2026.04.27

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.008

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 39.765$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71,7.71,7.71) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch6/Area Scan (81x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.611 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.3150 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.589 W/kg

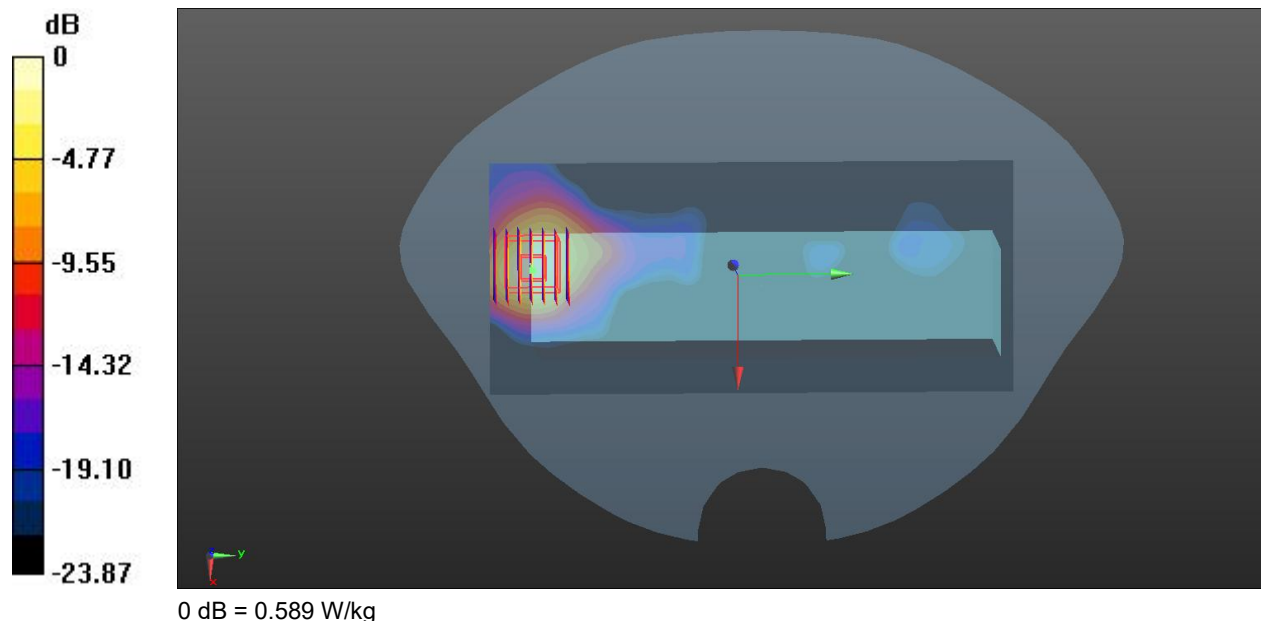

Meas.15 Body Plane with Right Edge 5mm on 64 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.23

Communication System Band: 5.3G; Frequency: 5320 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 4.878$ S/m; $\epsilon_r = 34.943$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5,5.5,5.5) ; Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch64/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.607 W/kg

Ch64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.629 W/kg

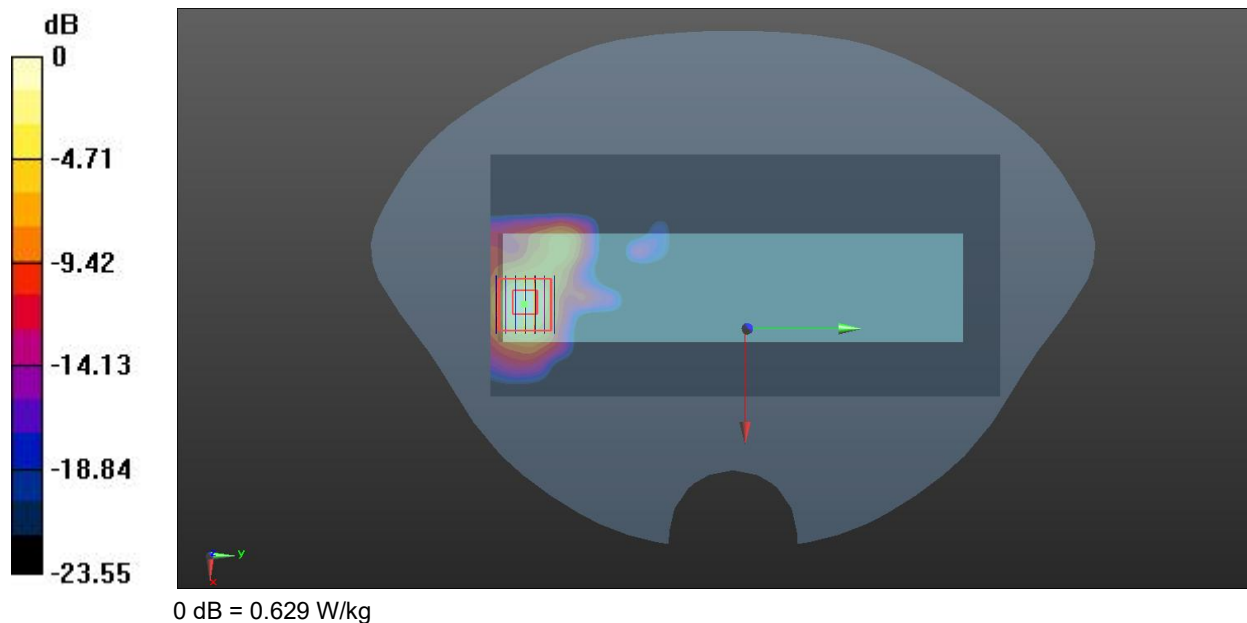

Meas.16 Body Plane with Right Edge 5mm on 140 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.26

Communication System Band: 5.6G; Frequency: 5700 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5700$ MHz; $\sigma = 5.299$ S/m; $\epsilon_r = 34.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.9,4.9,4.9) ; Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch140/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.884 W/kg

Ch140/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.779 W/kg

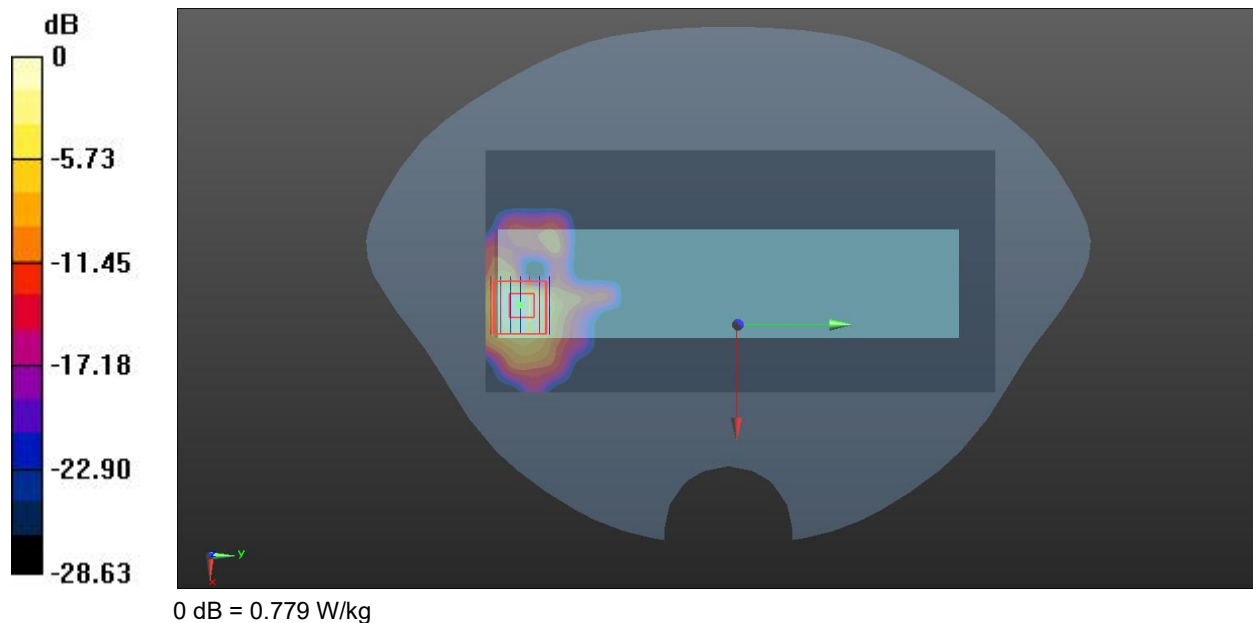

Meas.17 Body Plane with Right Edge 5mm on 157 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.26

Communication System Band: 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.321$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.99,4.99,4.99) ; Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch157/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.07 W/kg

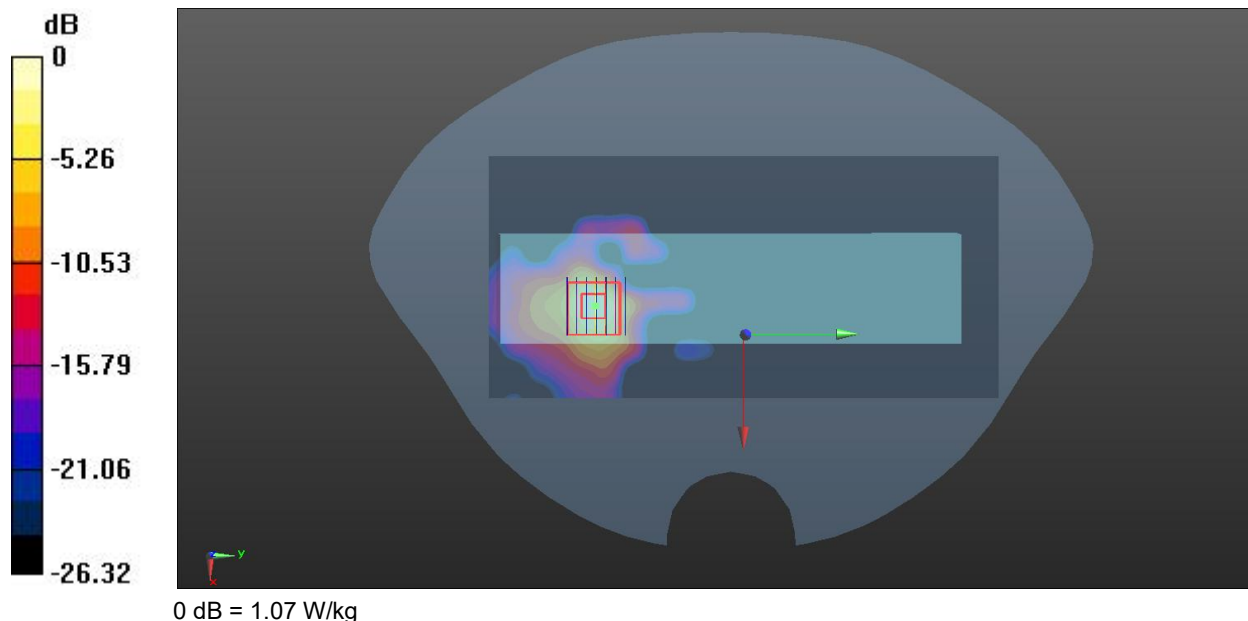

Meas.18 Limbs Plane with Right Edge 0mm on 39 Channel in Bluetooth mode with ANT 1

Date: 2026.04.27

Communication System Band: 39; Frequency: 2441 MHz; Duty Cycle: 1:1.301

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.251$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71,7.71,7.71) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch39/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.667 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.264 W/kg

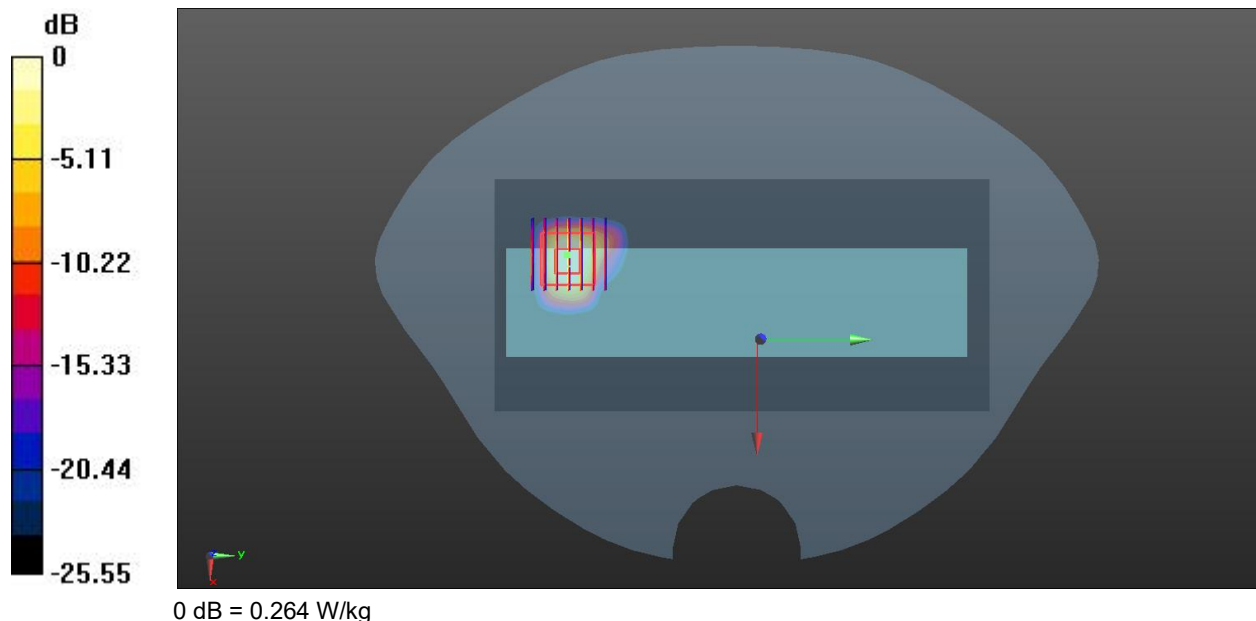

Meas.19 Limbs Plane with Right Edge 0mm on 6 Channel in IEEE802.11b mode with ANT 1

Date: 2026.04.27

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.008

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.772$ S/m; $\epsilon_r = 39.765$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.71,7.71,7.71) ; Calibrated: 2025.11.11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch6/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.15 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.012 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 1.51 W/kg; SAR(10 g) = 0.572 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 1.81 W/kg

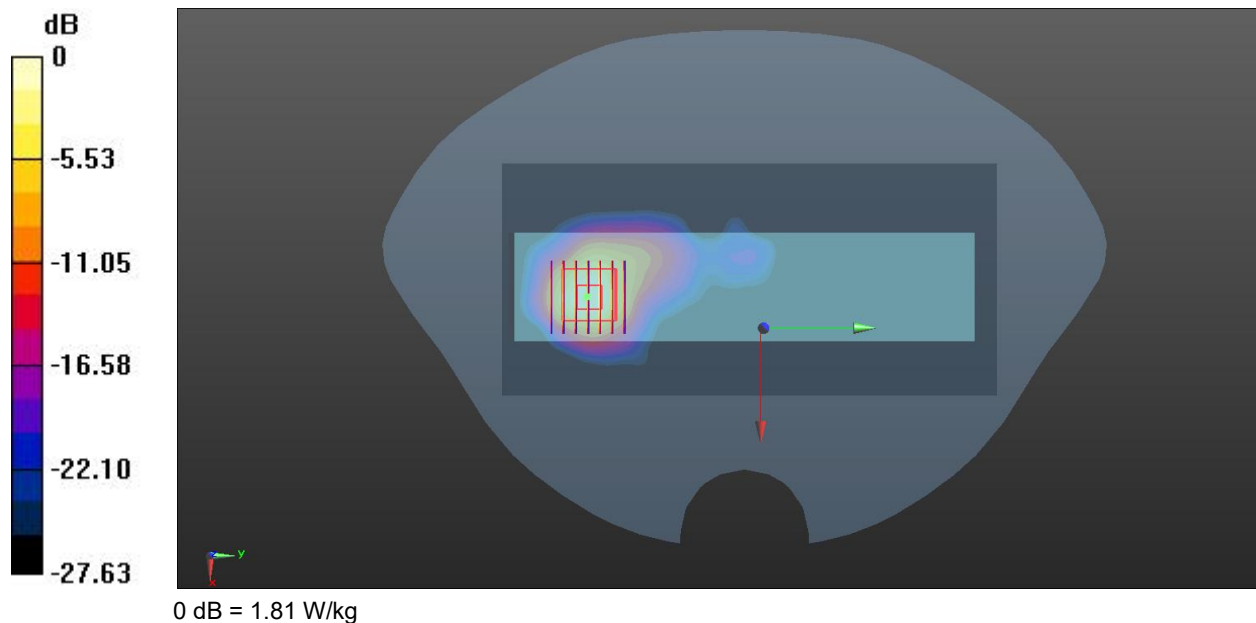

Meas.20 Limbs Plane with Right Edge 0mm on 64 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.23

Communication System Band: 5.3G; Frequency: 5320 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 4.878$ S/m; $\epsilon_r = 34.943$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4 °C Liquid Temperature: 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.5,5.5,5.5) ; Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch64/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.10 W/kg

Ch64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3110 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 8.68 W/kg

SAR(1 g) = 1.77 W/kg; SAR(10 g) = 0.462 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 4.26 W/kg

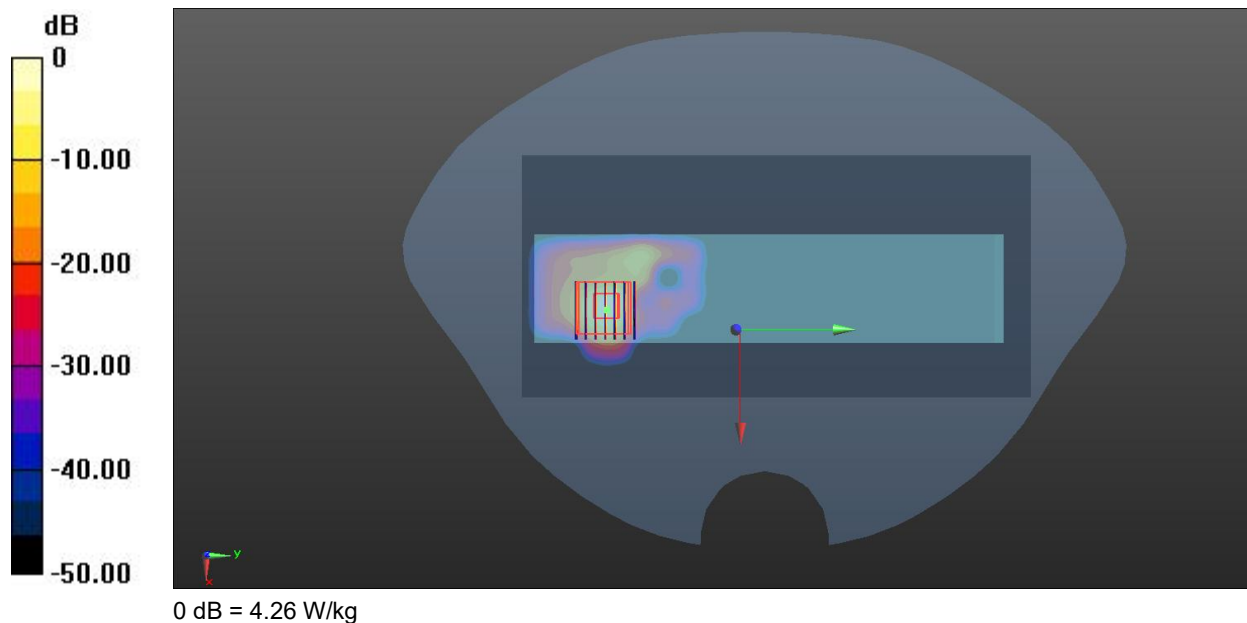

Meas.21 Limbs Plane with Right Edge 0mm on 140 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.26

Communication System Band: 5.6G; Frequency: 5700 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5700$ MHz; $\sigma = 5.299$ S/m; $\epsilon_r = 34.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.9,4.9,4.9) ; Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch140/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.10 W/kg

Ch140/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 9.56 W/kg

SAR(1 g) = 1.7 W/kg; SAR(10 g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 4.01 W/kg

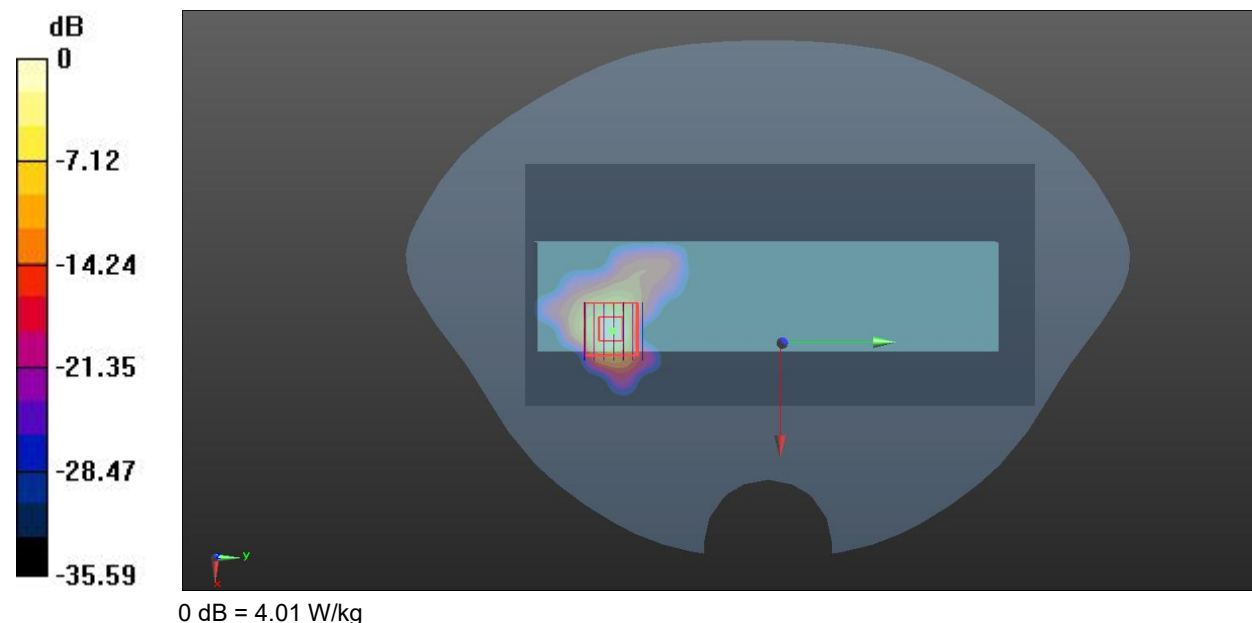

Meas.22 Limbs Plane with Right Edge 0mm on 157 Channel in IEEE802.11a mode with ANT 1

Date: 2026.04.26

Communication System Band: 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1.038

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.321$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.99,4.99,4.99) ; Calibrated: 2025.11.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2026.01.12
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.13 (7331)

Ch157/Area Scan (101x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.46 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.12dB


Peak SAR (extrapolated) = 11.9 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 4.89 W/kg

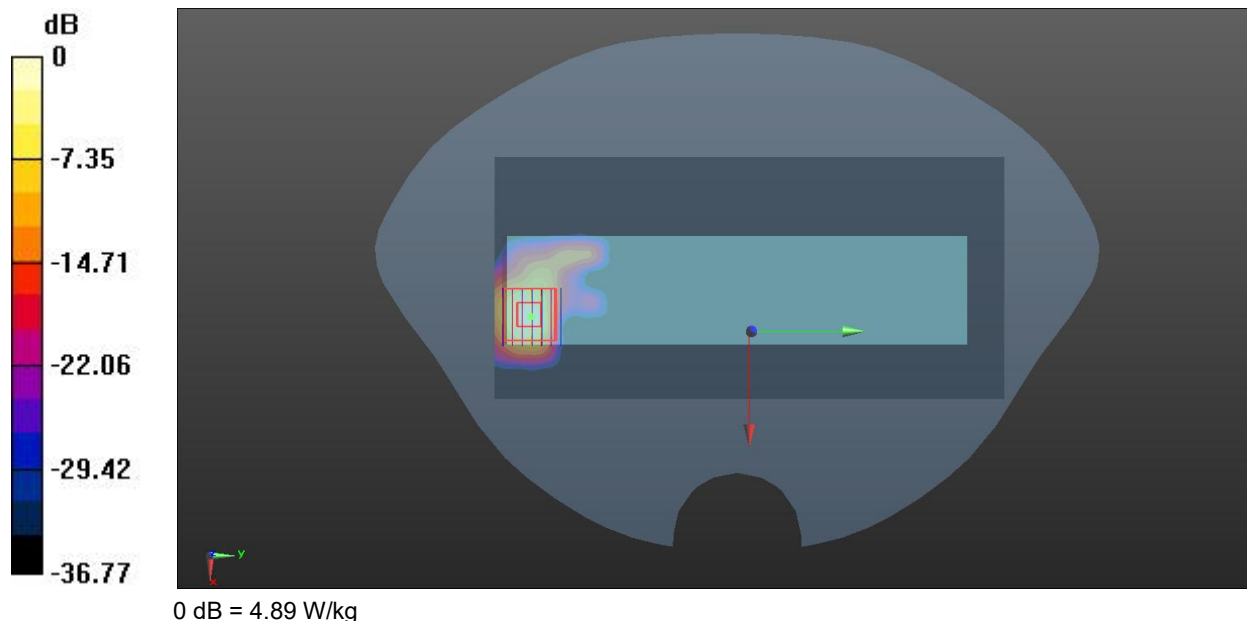

--BLANK BELOW--