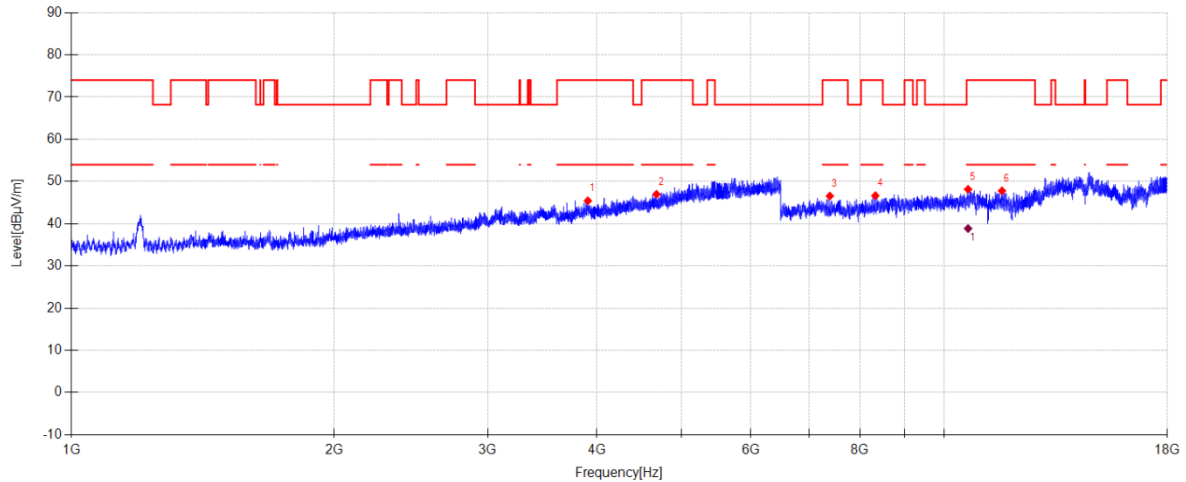


TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\13
Memo: Sample Number:S26061007-004 Power Setting:NA

**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3904.550	39.54	31.61	-25.72	45.43	74.00	28.57	PK	Horizontal
2	4679.500	39.01	32.62	-24.65	46.98	74.00	27.02	PK	Horizontal
3	7391.250	49.34	37.24	-40.02	46.56	74.00	27.44	PK	Horizontal
4	8334.250	47.80	38.00	-39.15	46.65	74.00	27.35	PK	Horizontal
5	10642.300	43.92	39.88	-35.66	48.14	74.00	25.86	PK	Horizontal
6	11638.200	43.37	39.56	-35.14	47.79	74.00	26.21	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10642.300	34.65	39.88	-35.66	38.87	54.00	15.13	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\14
Memo: Sample Number:S26061007-004 Power Setting:NA

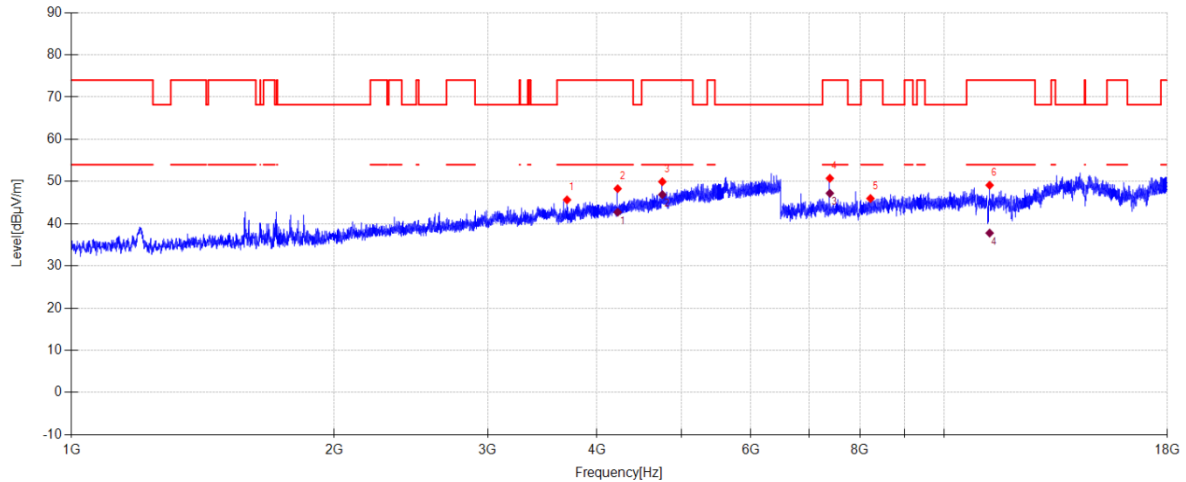**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3696.100	40.88	30.68	-25.90	45.66	74.00	28.34	PK	Vertical
2	4224.100	41.71	31.95	-25.36	48.30	74.00	25.70	PK	Vertical
3	4752.100	41.61	33.01	-24.66	49.96	74.00	24.04	PK	Vertical
4	7392.400	53.54	37.23	-40.02	50.75	74.00	23.25	PK	Vertical
5	8227.300	47.02	37.90	-38.94	45.98	74.00	28.02	PK	Vertical
6	11264.450	44.61	39.96	-35.45	49.12	74.00	24.88	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4224.100	36.13	31.95	-25.36	42.72	54.00	11.28	AV	Vertical
2	4752.100	38.54	33.01	-24.66	46.89	54.00	7.11	AV	Vertical
3	7392.400	50.00	37.23	-40.02	47.21	54.00	6.79	AV	Vertical
4	11264.450	33.28	39.96	-35.45	37.79	54.00	16.21	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5580MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\15
Memo: Sample Number:S26061007-004 Power Setting:NA

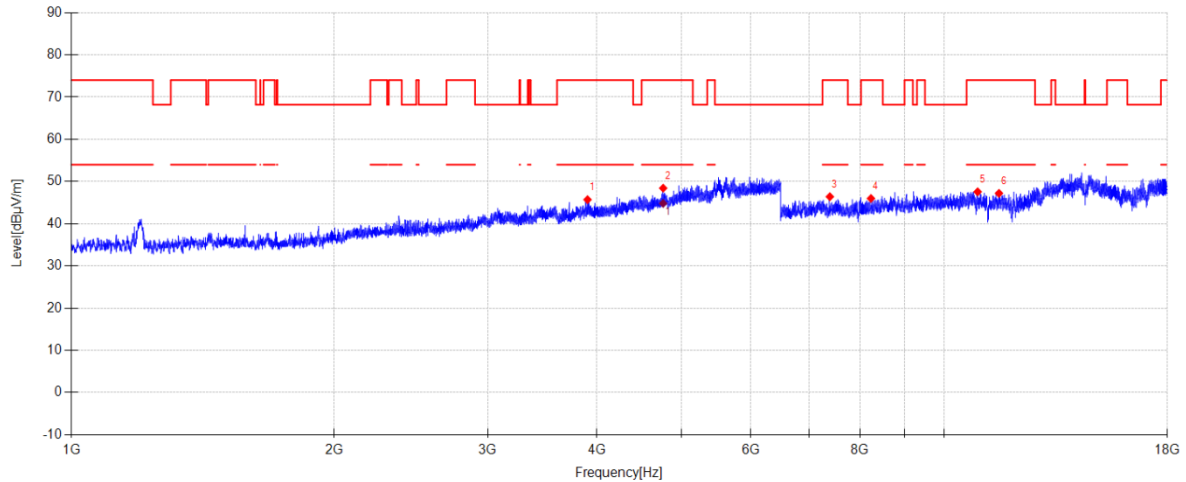**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3901.250	39.84	31.60	-25.73	45.71	74.00	28.29	PK	Horizontal
2	4762.550	40.04	33.05	-24.66	48.43	74.00	25.57	PK	Horizontal
3	7391.250	49.18	37.24	-40.02	46.40	74.00	27.60	PK	Horizontal
4	8237.650	47.06	37.90	-38.97	45.99	74.00	28.01	PK	Horizontal
5	10914.850	43.51	39.87	-35.81	47.57	74.00	26.43	PK	Horizontal
6	11546.200	42.76	39.71	-35.27	47.20	74.00	26.80	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4762.550	36.42	33.05	-24.66	44.81	54.00	9.19	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5580MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\16
Memo: Sample Number:S26061007-004 Power Setting:NA

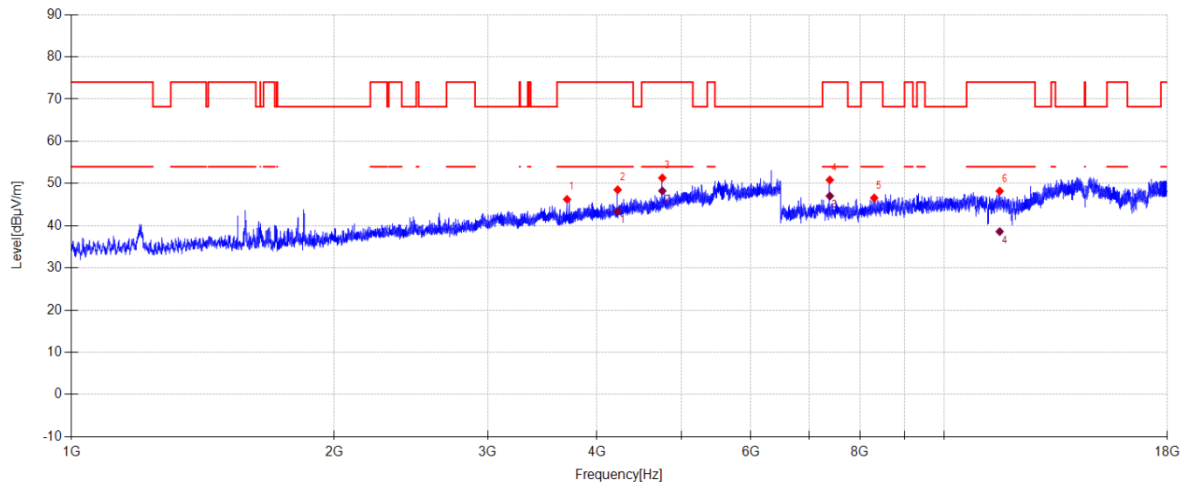

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3696.100	41.47	30.68	-25.90	46.25	74.00	27.75	PK	Vertical
2	4224.100	41.92	31.95	-25.36	48.51	74.00	25.49	PK	Vertical
3	4752.100	42.97	33.01	-24.66	51.32	74.00	22.68	PK	Vertical
4	7391.250	53.62	37.24	-40.02	50.84	74.00	23.16	PK	Vertical
5	8308.950	47.72	38.00	-39.14	46.58	74.00	27.42	PK	Vertical
6	11569.200	43.71	39.66	-35.17	48.20	74.00	25.80	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4224.100	36.77	31.95	-25.36	43.36	54.00	10.64	AV	Vertical
2	4752.100	39.90	33.01	-24.66	48.25	54.00	5.75	AV	Vertical
3	7391.250	49.81	37.24	-40.02	47.03	54.00	6.97	AV	Vertical
4	11569.200	34.12	39.66	-35.17	38.61	54.00	15.39	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\17
Memo: Sample Number:S26061007-004 Power Setting:NA

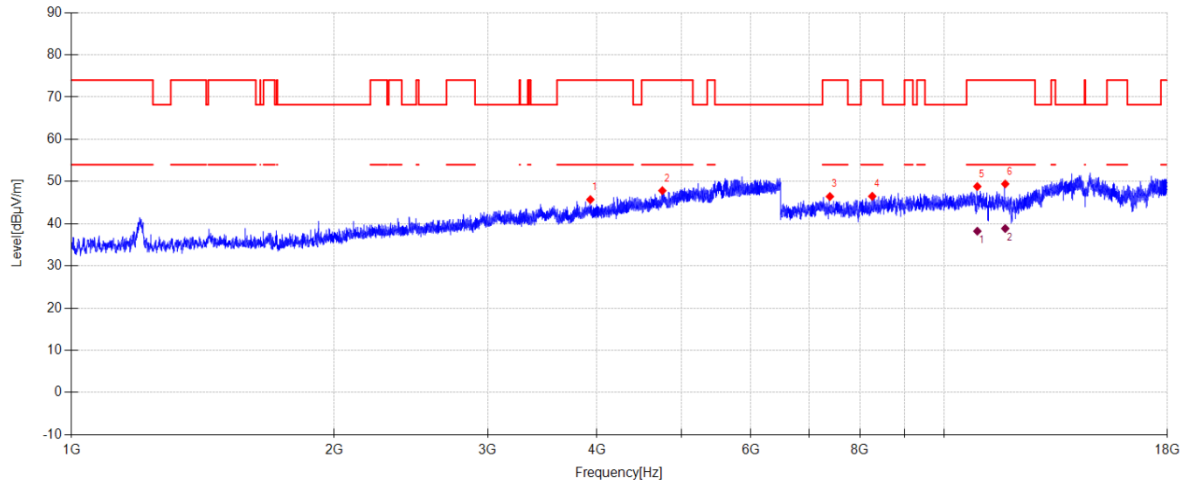**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3930.400	39.75	31.66	-25.69	45.72	74.00	28.28	PK	Horizontal
2	4752.100	39.48	33.01	-24.66	47.83	74.00	26.17	PK	Horizontal
3	7392.400	49.23	37.23	-40.02	46.44	74.00	27.56	PK	Horizontal
4	8266.400	47.61	37.93	-39.04	46.50	74.00	27.50	PK	Horizontal
5	10905.650	44.78	39.89	-35.85	48.82	74.00	25.18	PK	Horizontal
6	11738.250	45.19	39.50	-35.27	49.42	74.00	24.58	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10905.650	34.19	39.89	-35.85	38.23	54.00	15.77	AV	Horizontal
2	11738.250	34.63	39.50	-35.27	38.86	54.00	15.14	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5700MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\18
Memo: Sample Number:S26061007-004 Power Setting:NA

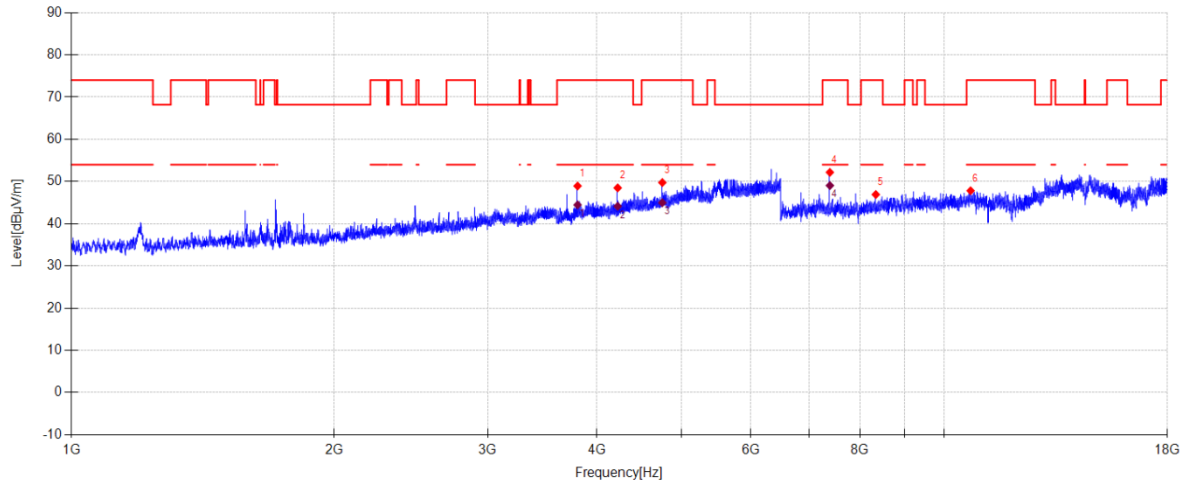**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3800.050	43.59	31.20	-25.85	48.94	74.00	25.06	PK	Vertical
2	4224.100	41.90	31.95	-25.36	48.49	74.00	25.51	PK	Vertical
3	4752.100	41.40	33.01	-24.66	49.75	74.00	24.25	PK	Vertical
4	7392.400	54.96	37.23	-40.02	52.17	74.00	21.83	PK	Vertical
5	8344.600	48.08	38.00	-39.16	46.92	74.00	27.08	PK	Vertical
6	10713.600	43.40	40.00	-35.58	47.82	74.00	26.18	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3800.050	39.11	31.20	-25.85	44.46	54.00	9.54	AV	Vertical
2	4224.100	37.55	31.95	-25.36	44.14	54.00	9.86	AV	Vertical
3	4752.100	36.62	33.01	-24.66	44.97	54.00	9.03	AV	Vertical
4	7392.400	51.83	37.23	-40.02	49.04	54.00	4.96	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\19
Memo: Sample Number:S26061007-004 Power Setting:NA

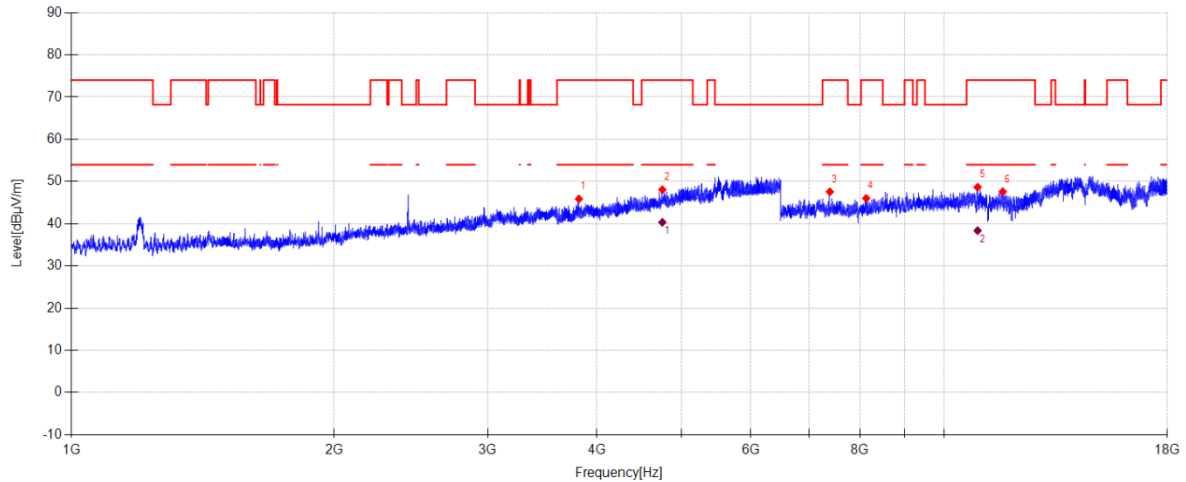**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3813.800	40.42	31.28	-25.83	45.87	74.00	28.13	PK	Horizontal
2	4752.650	39.71	33.01	-24.66	48.06	74.00	25.94	PK	Horizontal
3	7392.400	50.36	37.23	-40.02	47.57	74.00	26.43	PK	Horizontal
4	8135.300	47.36	37.90	-39.23	46.03	74.00	27.97	PK	Horizontal
5	10913.700	44.61	39.87	-35.82	48.66	74.00	25.34	PK	Horizontal
6	11662.350	43.26	39.54	-35.21	47.59	74.00	26.41	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4752.650	31.99	33.01	-24.66	40.34	54.00	13.66	AV	Horizontal
2	10913.700	34.31	39.87	-35.82	38.36	54.00	15.64	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5G\20
Memo: Sample Number:S26061007-004 Power Setting:NA

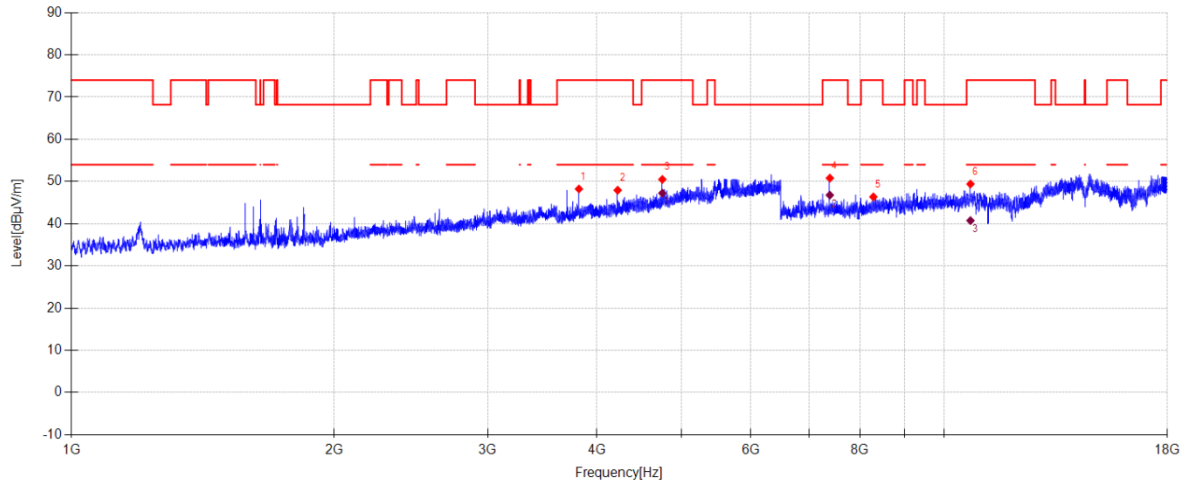

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3813.800	42.78	31.28	-25.83	48.23	74.00	25.77	PK	Vertical
2	4224.100	41.34	31.95	-25.36	47.93	74.00	26.07	PK	Vertical
3	4752.100	42.15	33.01	-24.66	50.50	74.00	23.50	PK	Vertical
4	7391.250	53.58	37.24	-40.02	50.80	74.00	23.20	PK	Vertical
5	8290.550	47.49	37.98	-39.11	46.36	74.00	27.64	PK	Vertical
6	10710.150	44.97	40.00	-35.57	49.40	74.00	24.60	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4752.100	38.88	33.01	-24.66	47.23	54.00	6.77	AV	Vertical
2	7391.250	49.55	37.24	-40.02	46.77	54.00	7.23	AV	Vertical
3	10710.150	36.31	40.00	-35.57	40.74	54.00	13.26	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5.8G\1
Memo: Sample Number:S26061007-004 Power Setting:NA

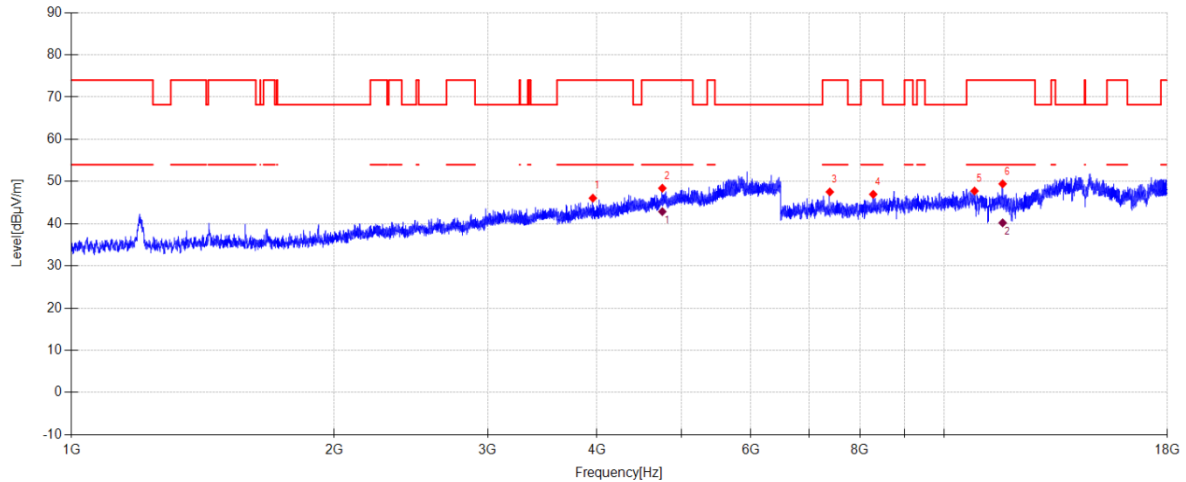**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3956.800	40.14	31.69	-25.77	46.06	74.00	27.94	PK	Horizontal
2	4752.100	40.14	33.01	-24.74	48.41	74.00	25.59	PK	Horizontal
3	7391.250	50.31	37.24	-40.02	47.53	74.00	26.47	PK	Horizontal
4	8287.100	48.10	37.97	-39.10	46.97	74.00	27.03	PK	Horizontal
5	10826.300	43.62	39.97	-35.84	47.75	74.00	26.25	PK	Horizontal
6	11658.900	45.09	39.54	-35.20	49.43	74.00	24.57	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4752.100	34.59	33.01	-24.74	42.86	54.00	11.14	AV	Horizontal
2	11658.900	35.86	39.54	-35.20	40.20	54.00	13.80	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5745MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5.8G\2
Memo: Sample Number:S26061007-004 Power Setting:NA

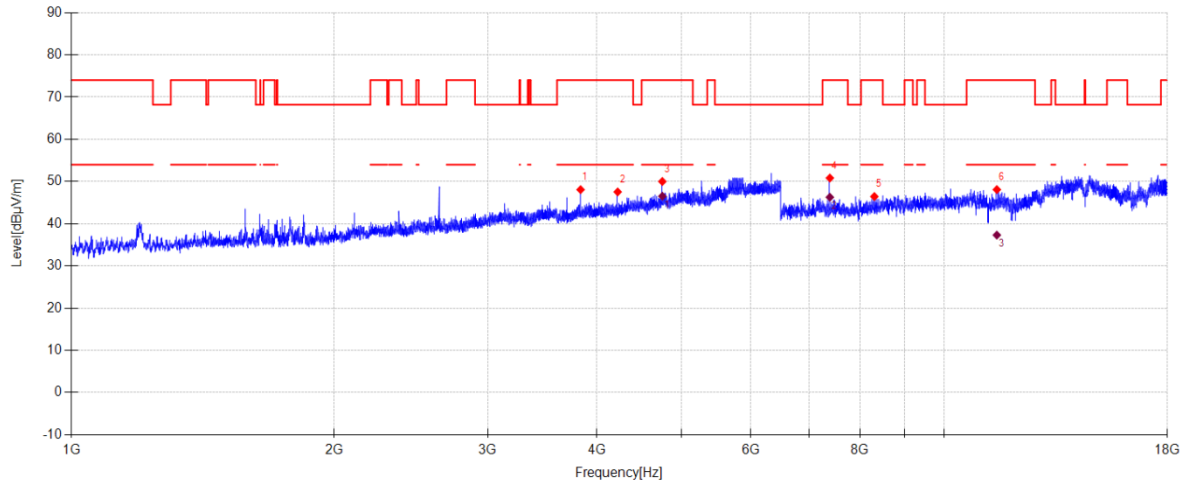

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3830.300	42.63	31.38	-25.94	48.07	74.00	25.93	PK	Vertical
2	4224.100	41.03	31.95	-25.44	47.54	74.00	26.46	PK	Vertical
3	4752.100	41.74	33.01	-24.74	50.01	74.00	23.99	PK	Vertical
4	7391.250	53.61	37.24	-40.02	50.83	74.00	23.17	PK	Vertical
5	8312.400	47.58	38.00	-39.14	46.44	74.00	27.56	PK	Vertical
6	11481.800	43.63	39.84	-35.39	48.08	74.00	25.92	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4752.100	38.26	33.01	-24.74	46.53	54.00	7.47	AV	Vertical
2	7391.250	49.06	37.24	-40.02	46.28	54.00	7.72	AV	Vertical
3	11481.800	32.86	39.84	-35.39	37.31	54.00	16.69	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5.8G\3
Memo: Sample Number:S26061007-004 Power Setting:NA

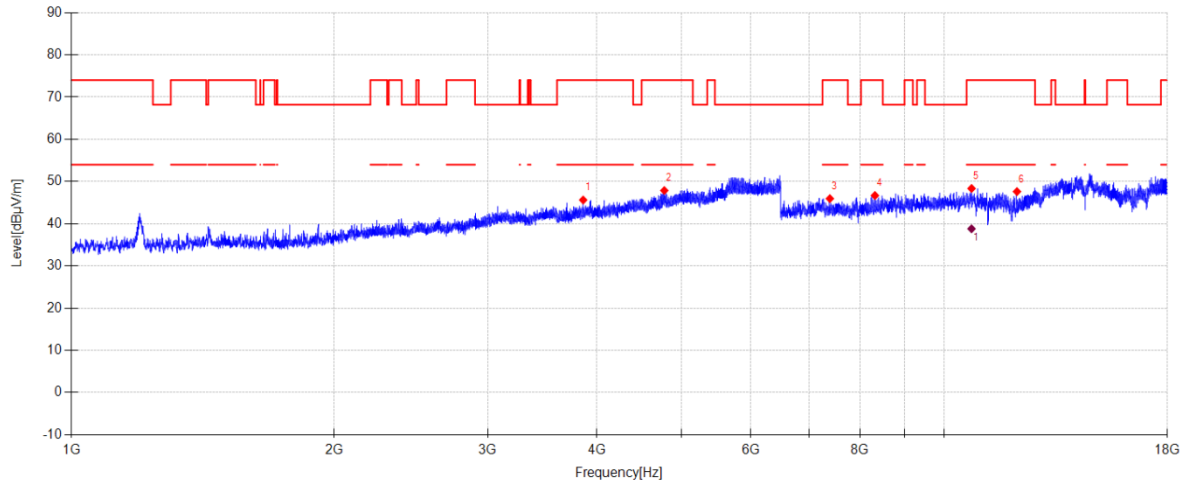**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3856.700	40.01	31.51	-25.90	45.62	74.00	28.38	PK	Horizontal
2	4776.850	39.51	33.11	-24.75	47.87	74.00	26.13	PK	Horizontal
3	7391.250	48.73	37.24	-40.02	45.95	74.00	28.05	PK	Horizontal
4	8325.050	47.83	38.00	-39.15	46.68	74.00	27.32	PK	Horizontal
5	10741.200	44.01	40.00	-35.66	48.35	74.00	25.65	PK	Horizontal
6	12107.400	41.70	39.90	-33.99	47.61	74.00	26.39	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10741.200	34.46	40.00	-35.66	38.80	54.00	15.20	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5785MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5.8G\4
Memo: Sample Number:S26061007-004 Power Setting:NA

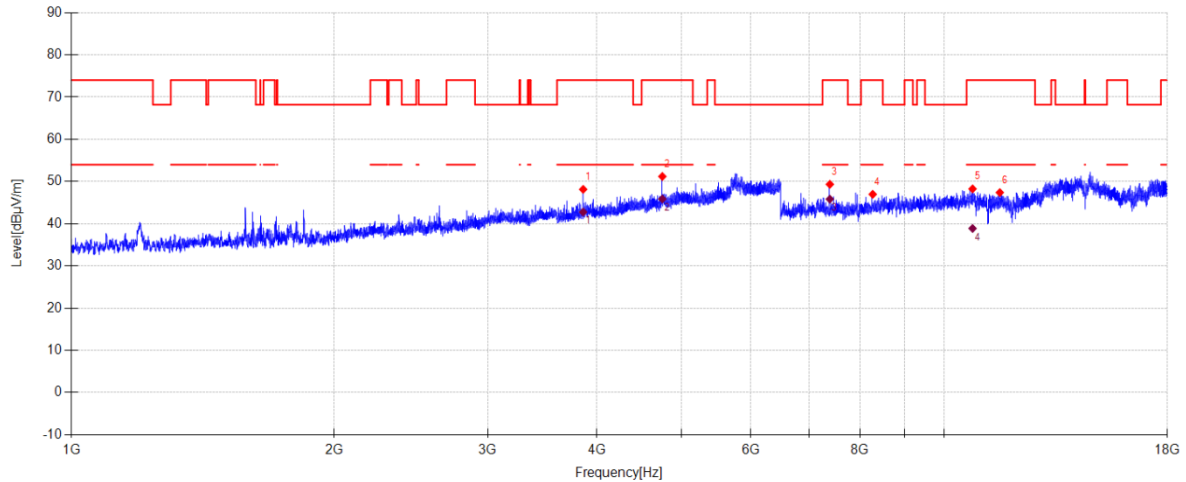**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3856.700	42.53	31.51	-25.90	48.14	74.00	25.86	PK	Vertical
2	4752.100	42.93	33.01	-24.74	51.20	74.00	22.80	PK	Vertical
3	7391.250	52.12	37.24	-40.02	49.34	74.00	24.66	PK	Vertical
4	8275.600	48.09	37.95	-39.07	46.97	74.00	27.03	PK	Vertical
5	10769.950	43.99	40.00	-35.74	48.25	74.00	25.75	PK	Vertical
6	11572.650	42.89	39.65	-35.15	47.39	74.00	26.61	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3856.700	37.14	31.51	-25.90	42.75	54.00	11.25	AV	Vertical
2	4752.100	37.60	33.01	-24.74	45.87	54.00	8.13	AV	Vertical
3	7391.250	48.61	37.24	-40.02	45.83	54.00	8.17	AV	Vertical
4	10769.950	34.62	40.00	-35.74	38.88	54.00	15.12	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5.8G\5
Memo: Sample Number:S26061007-004 Power Setting:NA

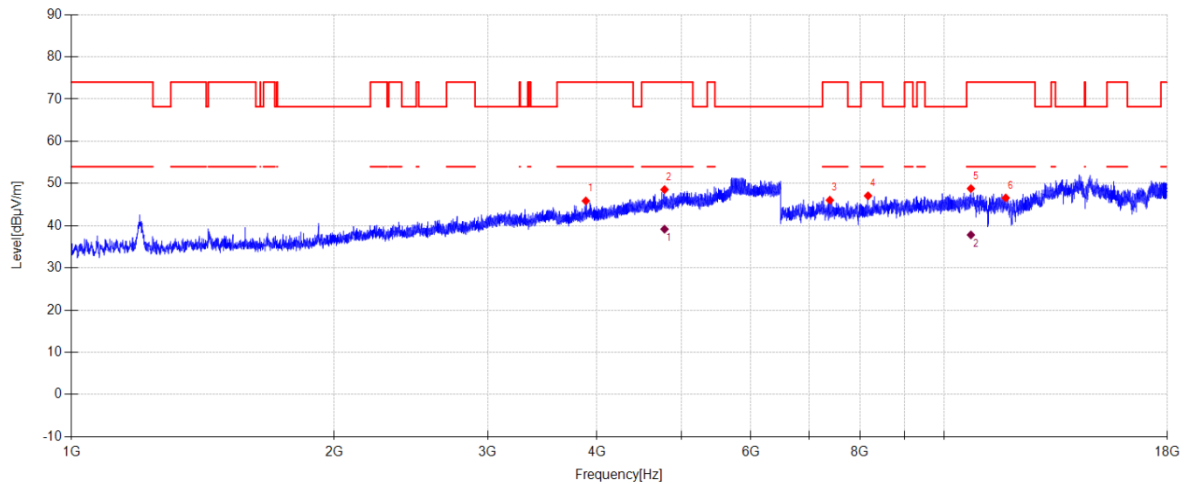**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3883.650	40.18	31.57	-25.87	45.88	74.00	28.12	PK	Horizontal
2	4779.600	40.19	33.12	-24.75	48.56	74.00	25.44	PK	Horizontal
3	7391.250	48.83	37.24	-40.02	46.05	74.00	27.95	PK	Horizontal
4	8174.400	48.20	37.90	-39.01	47.09	74.00	26.91	PK	Horizontal
5	10722.800	44.41	40.00	-35.60	48.81	74.00	25.19	PK	Horizontal
6	11753.200	42.33	39.50	-35.25	46.58	74.00	27.42	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4779.600	30.82	33.12	-24.75	39.19	54.00	14.81	AV	Horizontal
2	10722.800	33.43	40.00	-35.60	37.83	54.00	16.17	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-24 **Tested By:** Cao Jie
Test Mode: TX 11A 5825MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.1°C;Humi:47.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26061007-1E\FCC ABOVE 1G 5.8G\6
Memo: Sample Number:S26061007-004 Power Setting:NA

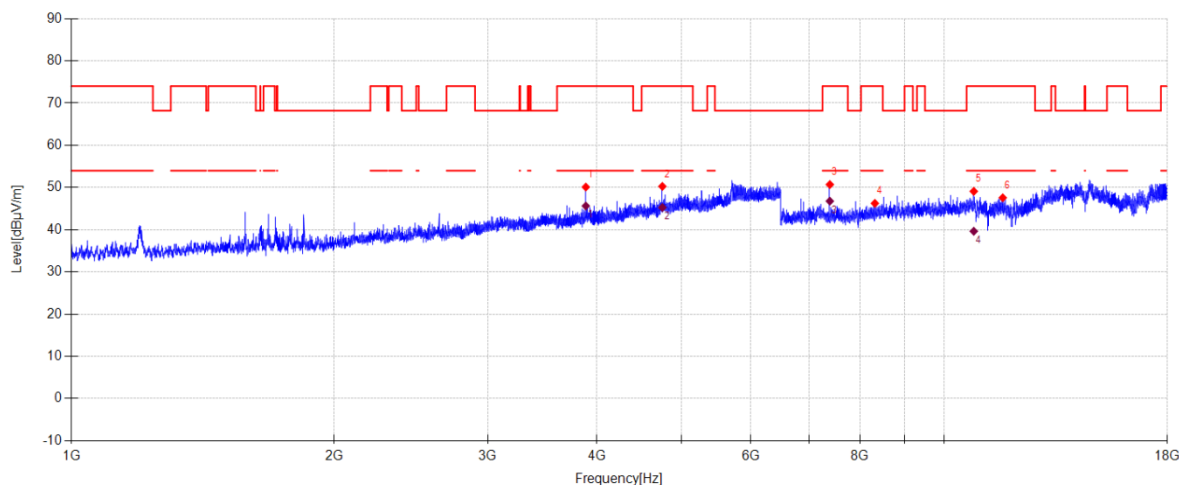

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3883.650	44.41	31.57	-25.87	50.11	74.00	23.89	PK	Vertical
2	4752.650	41.99	33.01	-24.74	50.26	74.00	23.74	PK	Vertical
3	7391.250	53.48	37.24	-40.02	50.70	74.00	23.30	PK	Vertical
4	8323.900	47.40	38.00	-39.15	46.25	74.00	27.75	PK	Vertical
5	10804.450	44.91	40.00	-35.82	49.09	74.00	24.91	PK	Vertical
6	11662.350	43.25	39.54	-35.21	47.58	74.00	26.42	PK	Vertical

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3883.650	39.93	31.57	-25.87	45.63	54.00	8.37	AV	Vertical
2	4752.650	36.99	33.01	-24.74	45.26	54.00	8.74	AV	Vertical
3	7391.250	49.55	37.24	-40.02	46.77	54.00	7.23	AV	Vertical
4	10804.450	35.46	40.00	-35.82	39.64	54.00	14.36	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Band Edge Compliance

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/	/
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC05922	2027/01/06	1 Year
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05	1 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04	1 Year
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10 2026/07/04	1 Year 1 Year
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25 2026/07/06	1 Year 1 Year
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29	1 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27	1 Year
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10	1 Year
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/	/

14.2. Block diagram of test setup

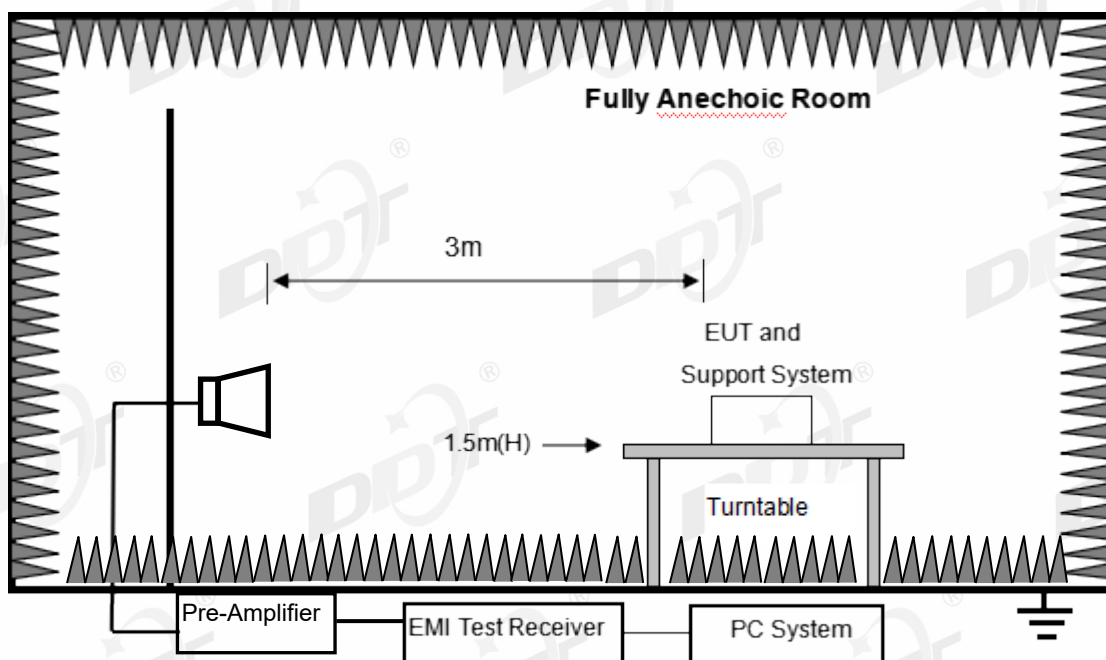

14.3. Limits

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Notebook	Lenovo	i5-5300U	Test comptuer	/

14.5. Test procedure

Same with Emissions in Restricted Frequency Bands except change investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\21

Memo:

Sample Number:S26061007-004 Power Setting:NA

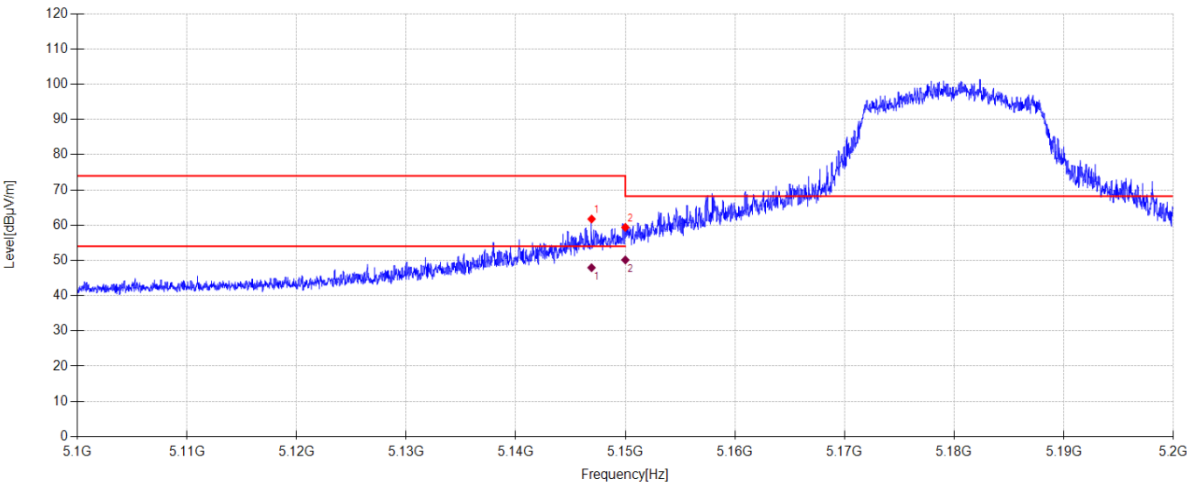

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.920	61.47	32.88	7.16	-39.77	61.74	74.00	12.26	PK	Horizontal
2	5150.000	59.08	32.90	7.16	-39.77	59.37	68.20	8.83	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.917	47.66	32.88	7.16	47.93	54.00	6.07	AV	Horizontal
2	5150.000	49.84	32.90	7.16	50.13	54.00	3.87	AV	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-15 **Tested By:** Cao Jie
Test Mode: TX 11A 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\22
Memo: Sample Number:S26061007-004 Power Setting:NA

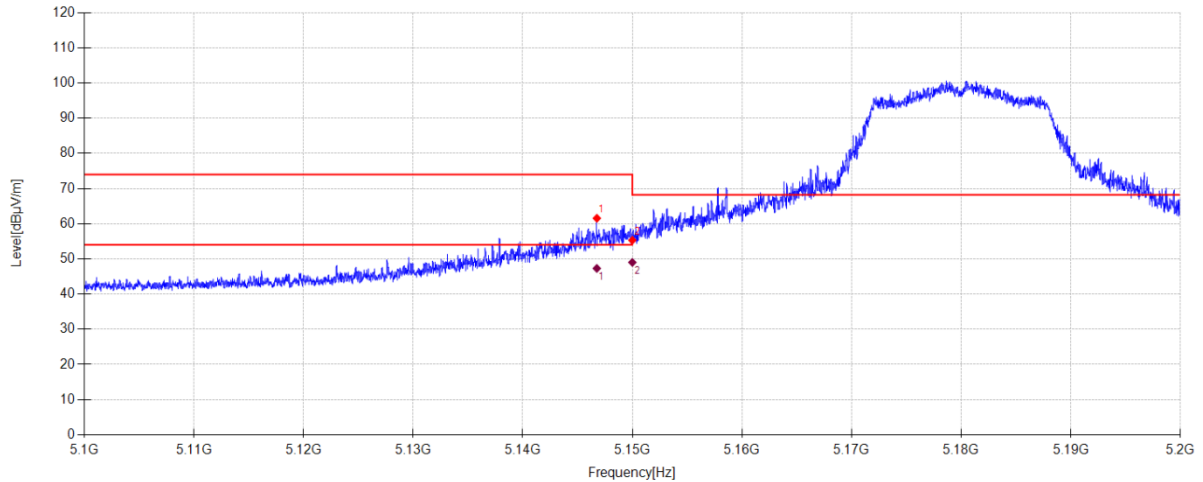

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.760	61.29	32.87	7.16	-39.77	61.55	74.00	12.45	PK	Vertical
2	5150.000	55.02	32.90	7.16	-39.77	55.31	68.20	12.89	PK	Vertical

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.760	47.04	32.87	7.16	47.30	54.00	6.70	AV	Vertical
2	5150.000	48.72	32.90	7.16	49.01	54.00	4.99	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\23

Memo:

Sample Number:S26061007-004 Power Setting:NA

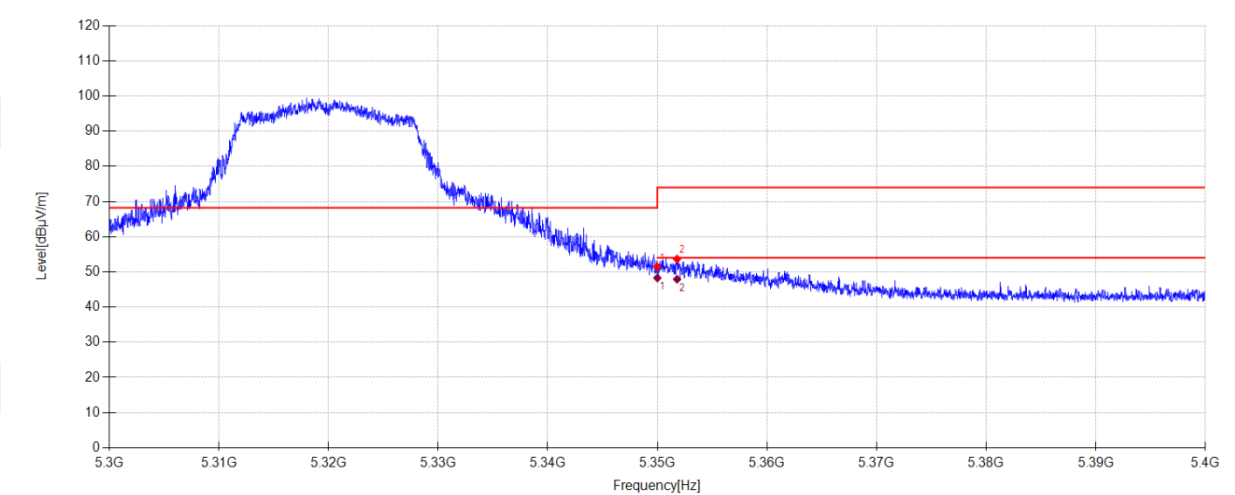

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	51.40	32.50	7.27	-39.73	51.44	68.20	16.76	PK	Horizontal
2	5351.800	53.61	32.51	7.27	-39.73	53.66	74.00	20.34	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	48.24	32.50	7.27	48.28	54.00	5.72	AV	Horizontal	
2	5351.800	47.85	32.51	7.27	47.90	54.00	6.10	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\24

Memo:

Sample Number:S26061007-004 Power Setting:NA

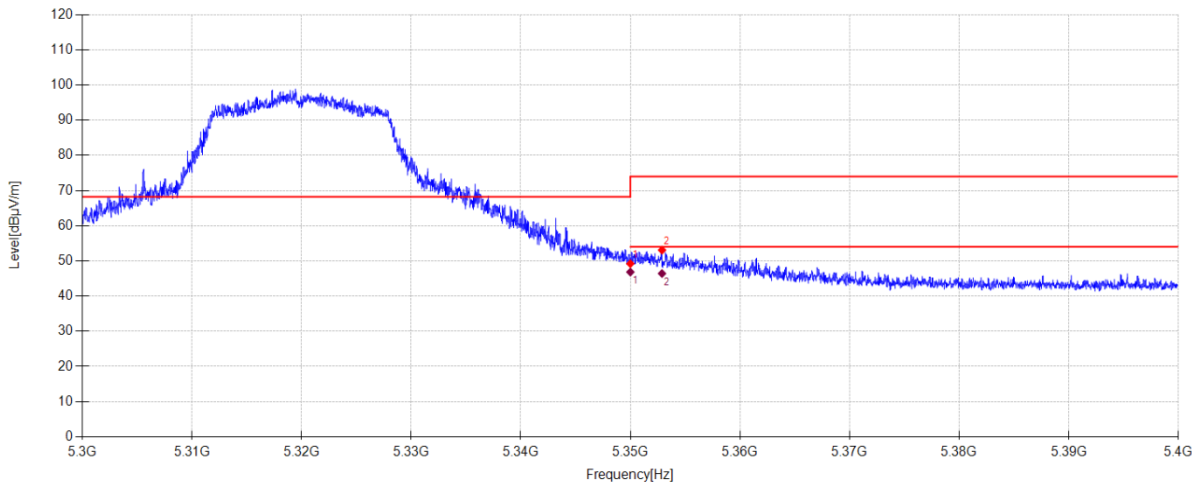

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	49.17	32.50	7.27	-39.73	49.21	68.20	18.99	PK	Vertical
2	5352.890	52.99	32.52	7.28	-39.73	53.06	74.00	20.94	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	46.79	32.50	7.27	46.83	54.00	7.17	AV	Vertical	
2	5352.890	46.34	32.52	7.28	46.41	54.00	7.59	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\25

Memo:

Sample Number:S26061007-004 Power Setting:NA

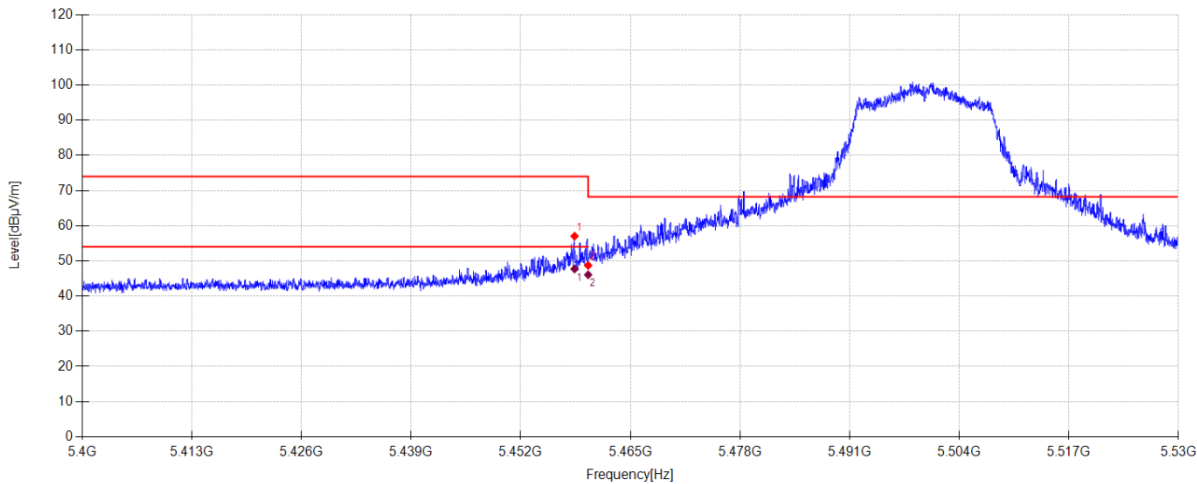

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.383	56.54	32.88	7.33	-39.71	57.04	74.00	16.96	PK	Horizontal
2	5460.000	48.19	32.90	7.33	-39.71	48.71	68.20	19.49	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.383	47.21	32.88	7.33	47.71	54.00	6.29	AV	Horizontal	
2	5460.000	45.53	32.90	7.33	46.05	54.00	7.95	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-15 **Tested By:** Cao Jie
Test Mode: TX 11A 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\26
Memo: Sample Number:S26061007-004 Power Setting:NA

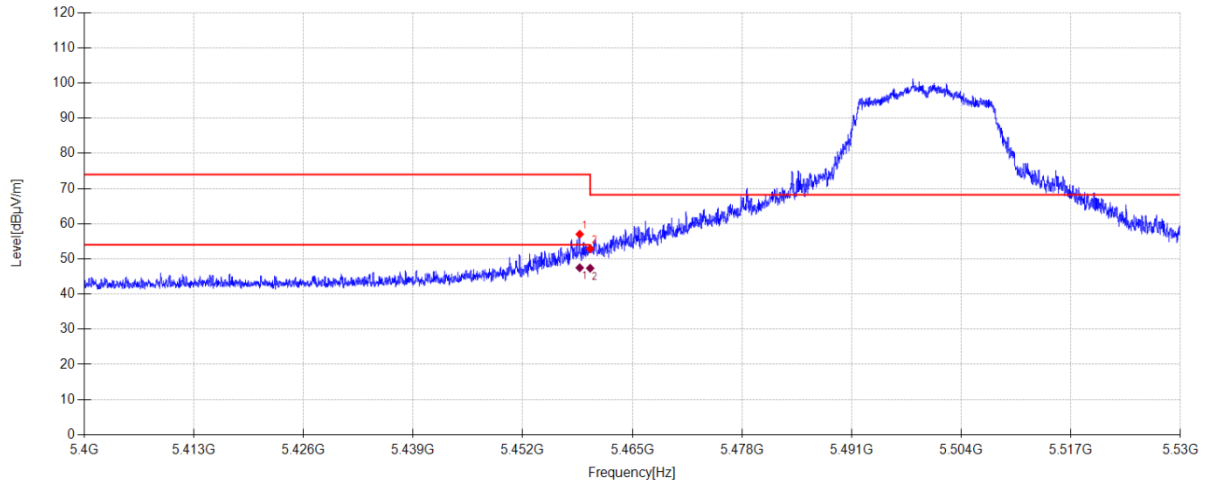

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.760	56.51	32.89	7.33	-39.71	57.02	74.00	16.98	PK	Vertical
2	5460.000	52.37	32.90	7.33	-39.71	52.89	68.20	15.31	PK	Vertical

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.760	46.98	32.89	7.33	47.49	54.00	6.51	AV	Vertical
2	5460.000	46.82	32.90	7.33	47.34	54.00	6.66	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\27

Memo:

Sample Number:S26061007-004 Power Setting:NA

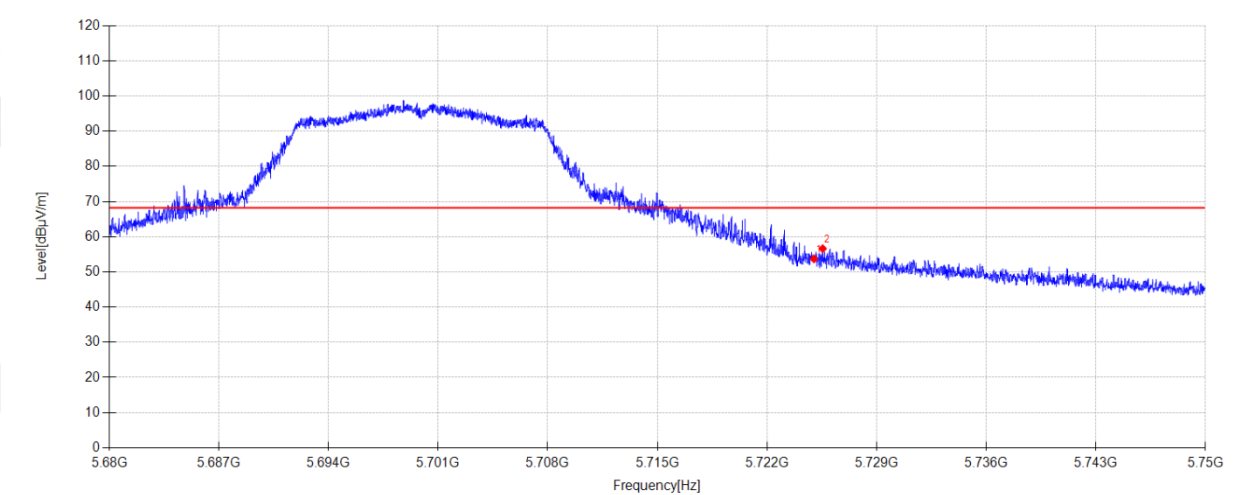

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	52.44	33.45	7.48	-39.65	53.72	68.20	14.48	PK	Horizontal
2	5725.563	55.33	33.46	7.48	-39.65	56.62	68.20	11.58	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\28

Memo:

Sample Number:S26061007-004 Power Setting:NA

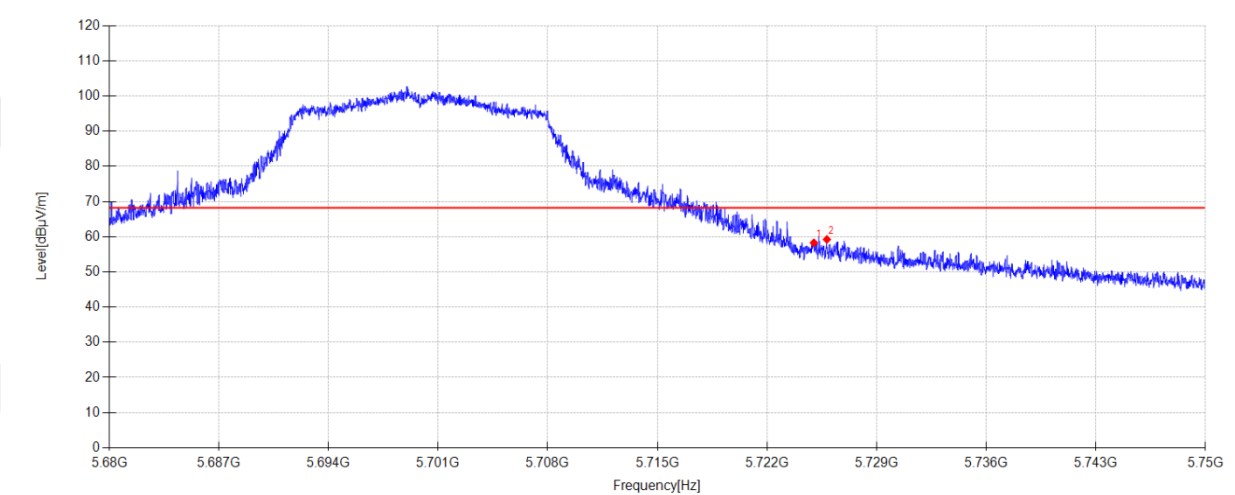

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	56.98	33.45	7.48	-39.65	58.26	68.20	9.94	PK	Vertical
2	5725.829	57.94	33.46	7.48	-39.65	59.23	68.20	8.97	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11N20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\29

Memo:

Sample Number:S26061007-004 Power Setting:NA

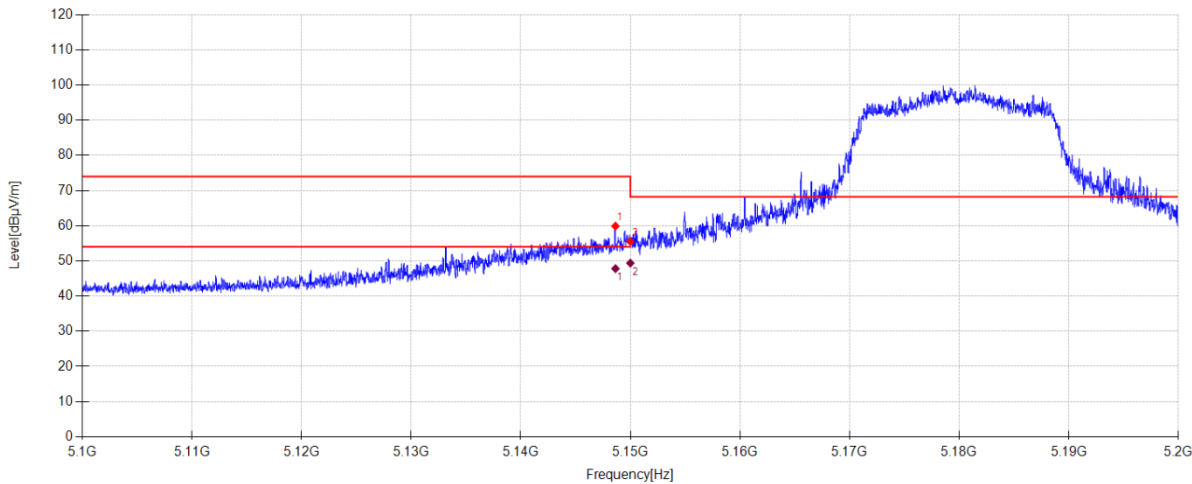

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.640	59.61	32.89	7.16	-39.77	59.89	74.00	14.11	PK	Horizontal
2	5150.000	55.21	32.90	7.16	-39.77	55.50	68.20	12.70	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.638	47.52	32.89	7.16	47.80	54.00	6.20	AV	Horizontal	
2	5150.000	49.08	32.90	7.16	49.37	54.00	4.63	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11N20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\30

Memo:

Sample Number:S26061007-004 Power Setting:NA

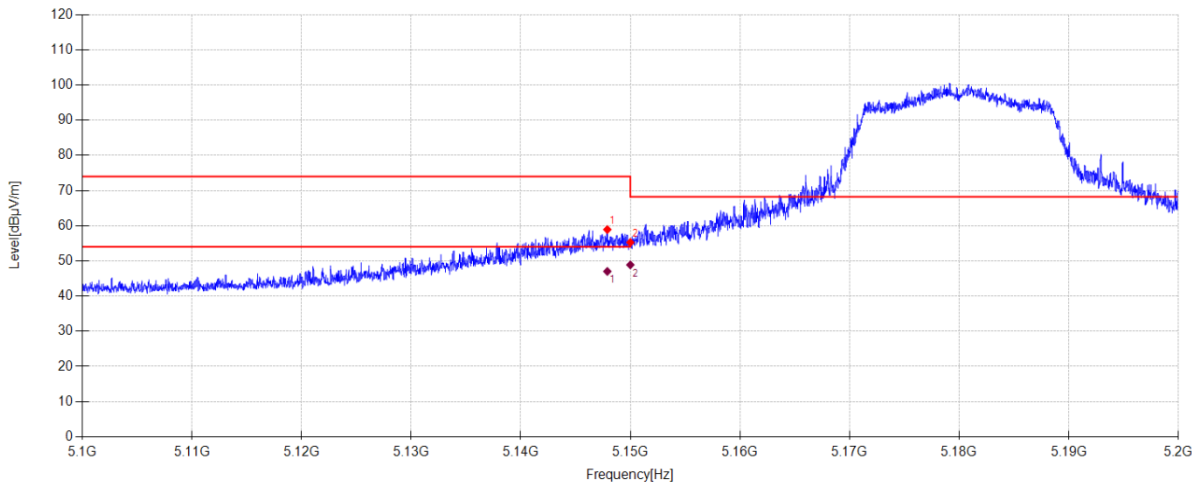

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.900	58.64	32.88	7.16	-39.77	58.91	74.00	15.09	PK	Vertical
2	5150.000	54.97	32.90	7.16	-39.77	55.26	68.20	12.94	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.900	46.74	32.88	7.16	47.01	54.00	6.99	AV	Vertical	
2	5150.000	48.58	32.90	7.16	48.87	54.00	5.13	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\31

Memo:

Sample Number:S26061007-004 Power Setting:NA

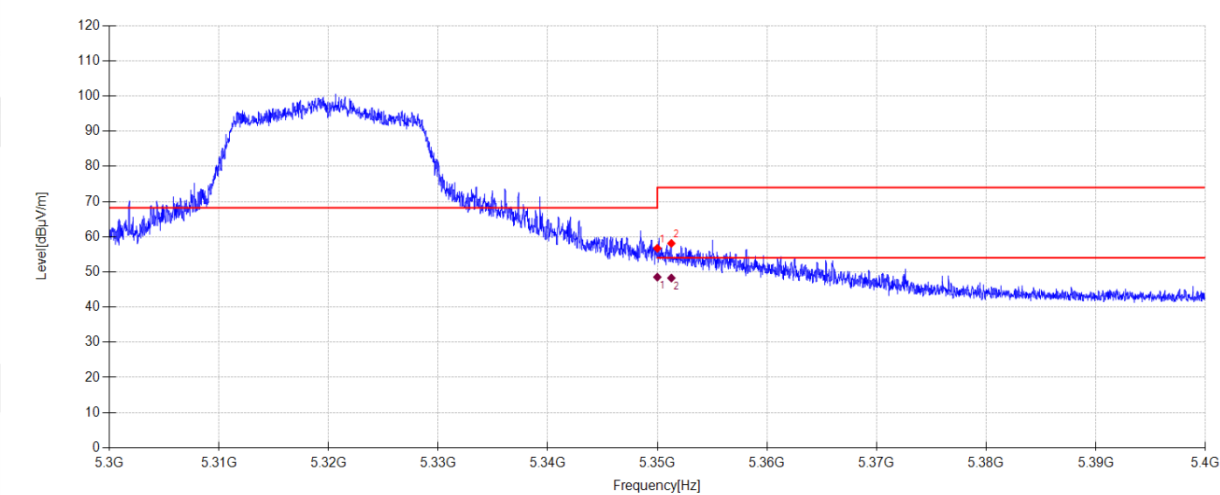

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	56.68	32.50	7.27	-39.73	56.72	68.20	11.48	PK	Horizontal
2	5351.280	58.05	32.51	7.27	-39.73	58.10	74.00	15.90	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.999	48.48	32.50	7.27	48.52	54.00	5.48	AV	Horizontal	
2	5351.280	48.21	32.51	7.27	48.26	54.00	5.74	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\32

Memo:

Sample Number:S26061007-004 Power Setting:NA

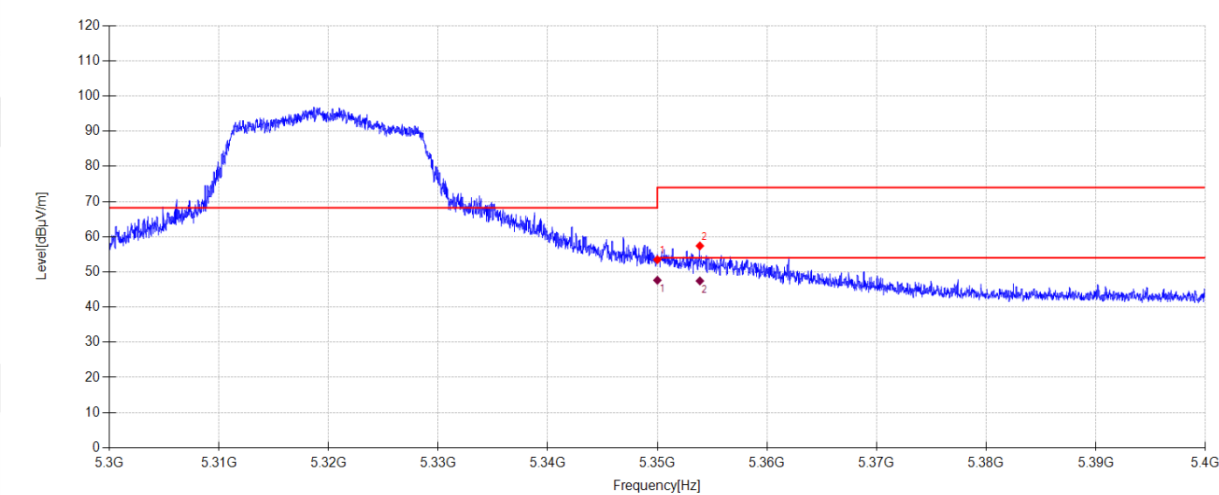

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	53.42	32.50	7.27	-39.73	53.46	68.20	14.74	PK	Vertical
2	5353.880	57.31	32.53	7.28	-39.73	57.39	74.00	16.61	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	47.58	32.50	7.27	47.62	54.00	6.38	AV	Vertical	
2	5353.880	47.36	32.53	7.28	47.44	54.00	6.56	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\33

Memo:

Sample Number:S26061007-004 Power Setting:NA

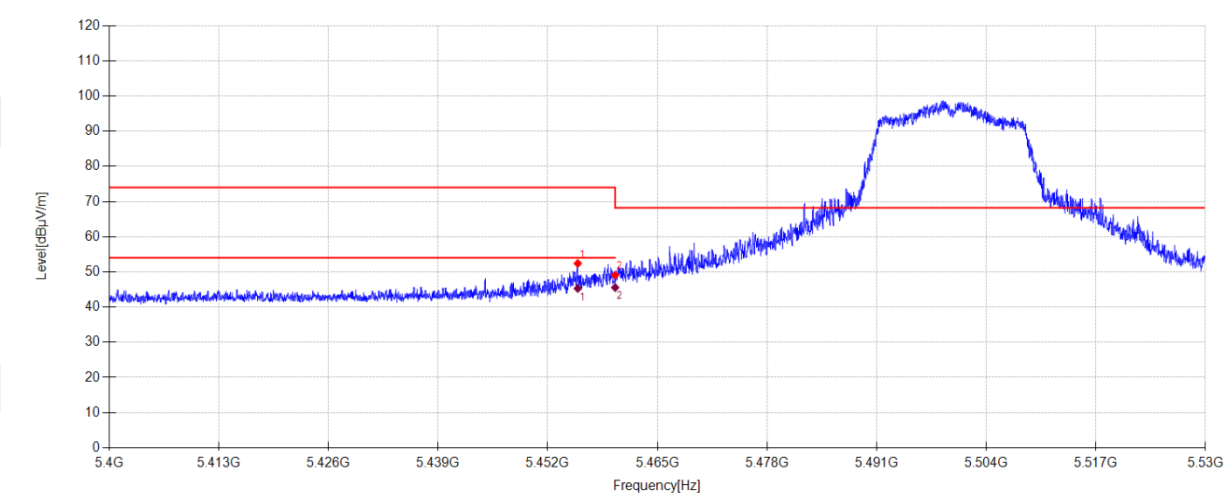

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.562	51.92	32.86	7.33	-39.71	52.40	74.00	21.60	PK	Horizontal
2	5460.000	48.54	32.90	7.33	-39.71	49.06	68.20	19.14	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.562	44.81	32.86	7.33	45.29	54.00	8.71	AV	Horizontal	
2	5460.000	45.04	32.90	7.33	45.56	54.00	8.44	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\34

Memo:

Sample Number:S26061007-004 Power Setting:NA

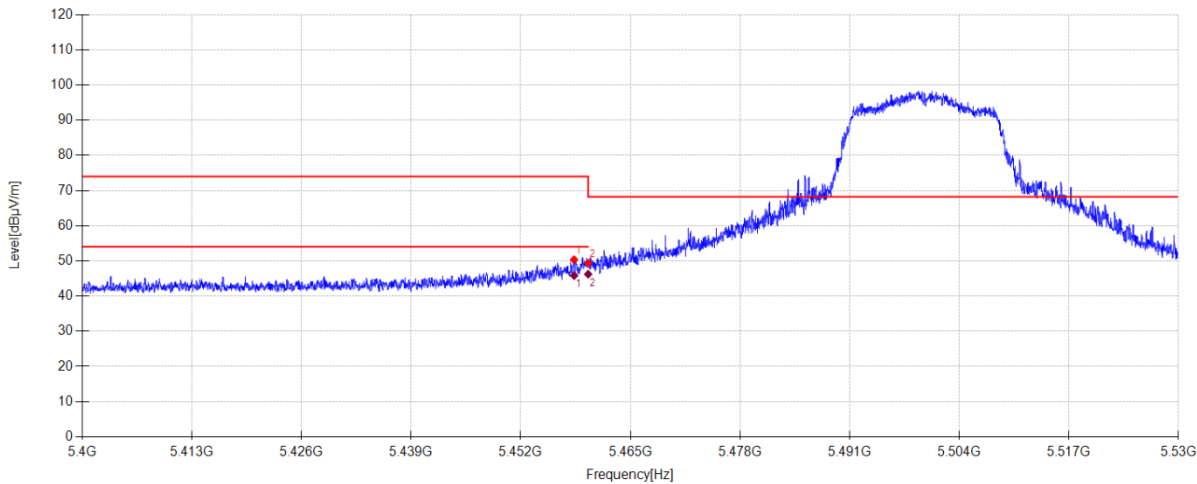

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.331	49.85	32.88	7.33	-39.71	50.35	74.00	23.65	PK	Vertical
2	5460.000	48.83	32.90	7.33	-39.71	49.35	68.20	18.85	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.331	45.31	32.88	7.33	45.81	54.00	8.19	AV	Vertical	
2	5460.000	45.71	32.90	7.33	46.23	54.00	7.77	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\35

Memo:

Sample Number:S26061007-004 Power Setting:NA

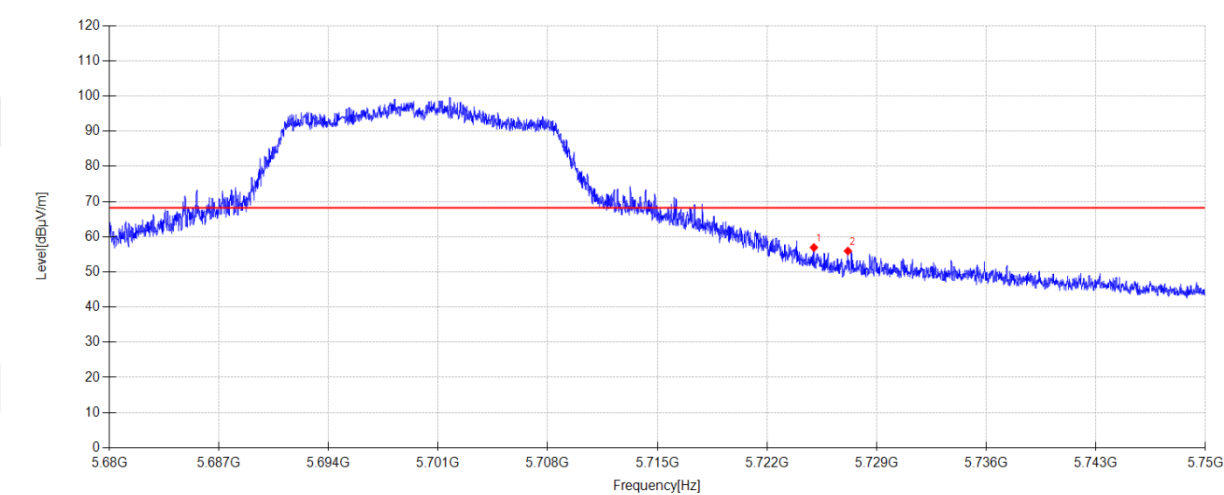

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	55.66	33.45	7.48	-39.65	56.94	68.20	11.26	PK	Horizontal
2	5727.173	54.62	33.48	7.48	-39.65	55.93	68.20	12.27	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\36

Memo:

Sample Number:S26061007-004 Power Setting:NA

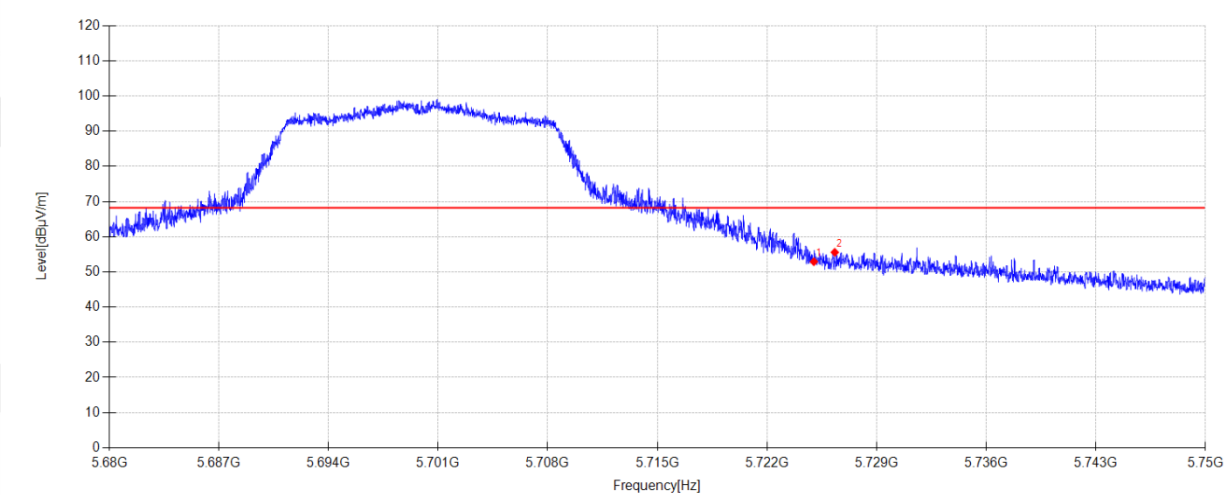


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	51.63	33.45	7.48	-39.65	52.91	68.20	15.29	PK	Vertical
2	5726.333	54.26	33.47	7.48	-39.65	55.56	68.20	12.64	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11N40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\37
Memo: Sample Number:S26061007-004 Power Setting:15

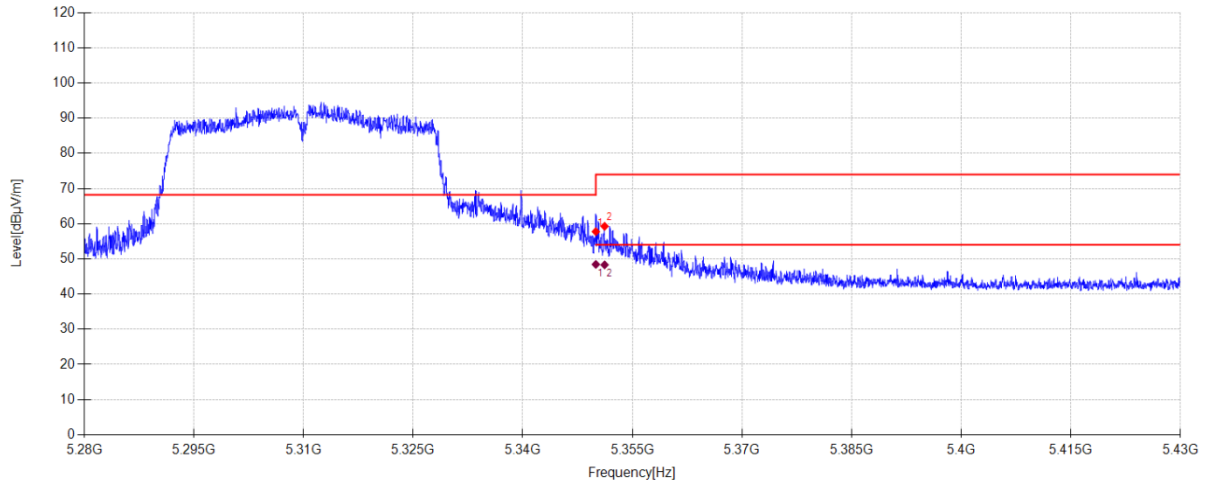

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	57.71	32.50	7.27	-39.73	57.75	68.20	10.45	PK	Horizontal
2	5351.205	59.22	32.51	7.27	-39.73	59.27	74.00	14.73	PK	Horizontal

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.999	48.40	32.50	7.27	48.44	54.00	5.56	AV	Horizontal
2	5351.205	48.26	32.51	7.27	48.31	54.00	5.69	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\38

Memo:

Sample Number:S26061007-004 Power Setting:15

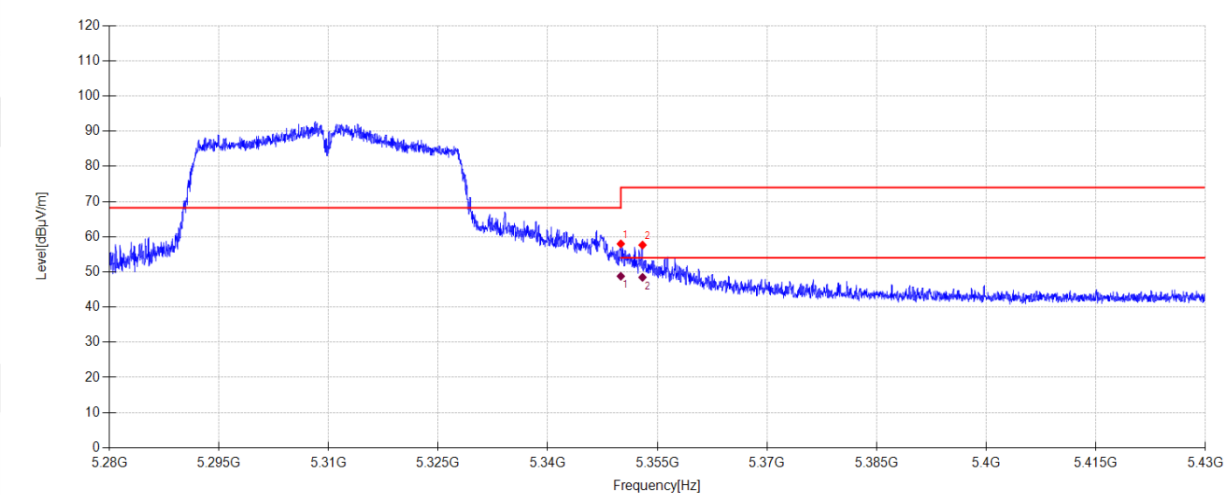

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	57.94	32.50	7.27	-39.73	57.98	68.20	10.22	PK	Vertical
2	5352.975	57.56	32.52	7.28	-39.73	57.63	74.00	16.37	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	48.72	32.50	7.27	48.76	54.00	5.24	AV	Vertical	
2	5352.975	48.38	32.52	7.28	48.45	54.00	5.55	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\39

Memo:

Sample Number:S26061007-004 Power Setting:15

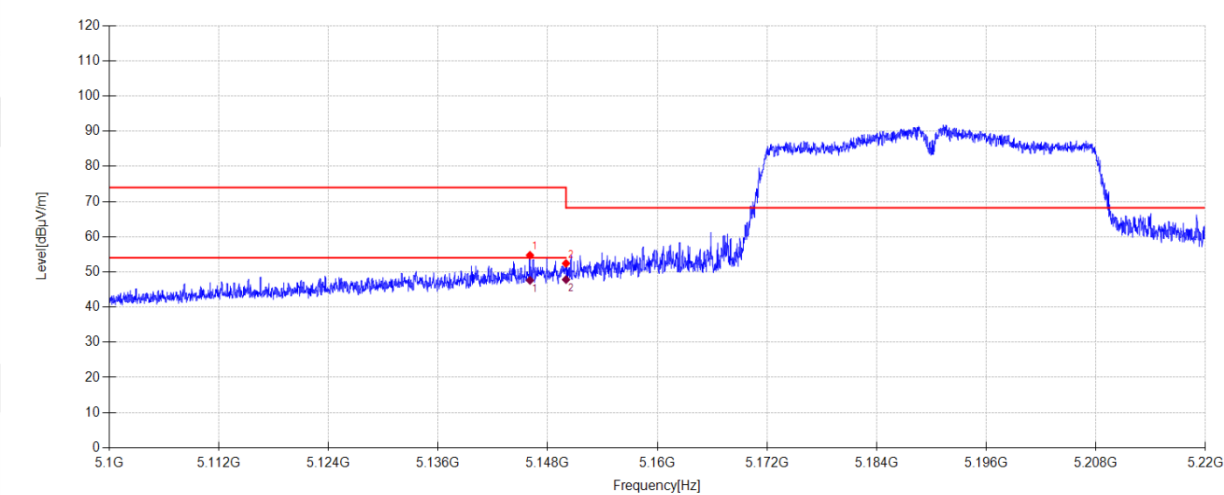

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.056	54.47	32.87	7.16	-39.77	54.73	74.00	19.27	PK	Horizontal
2	5150.000	52.12	32.90	7.16	-39.77	52.41	68.20	15.79	PK	Horizontal


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5146.056	47.34	32.87	7.16	47.60	54.00	6.40	AV	Horizontal	
2	5150.000	47.52	32.90	7.16	47.81	54.00	6.19	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11N40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\40
Memo: Sample Number:S26061007-004 Power Setting:15

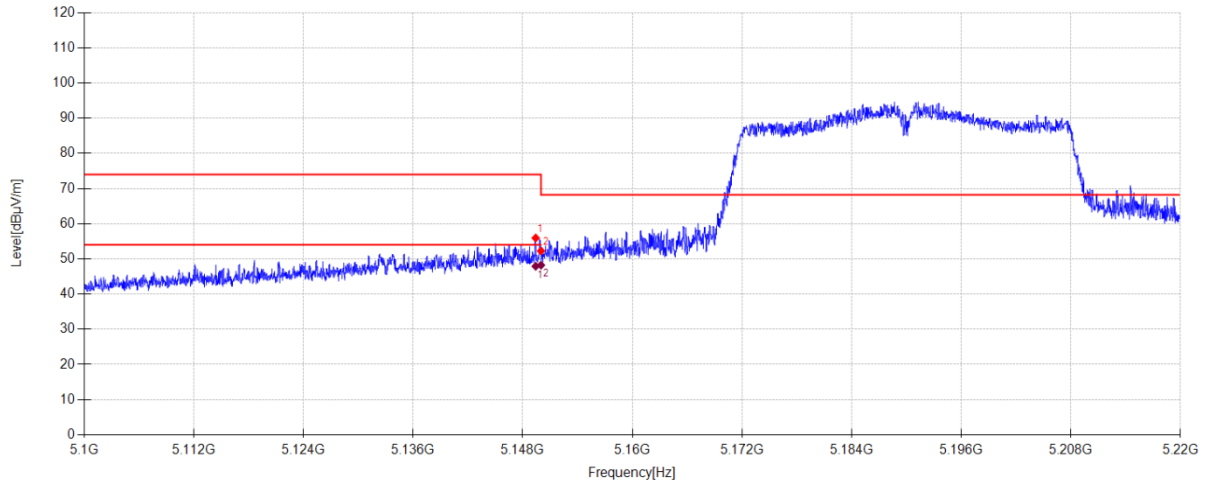

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.416	55.66	32.90	7.16	-39.77	55.95	74.00	18.05	PK	Vertical
2	5150.000	51.97	32.90	7.16	-39.77	52.26	68.20	15.94	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.416	47.62	32.90	7.16	47.91	54.00	6.09	AV	Vertical
2	5150.000	47.93	32.90	7.16	48.22	54.00	5.78	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\41
Memo: Sample Number:S26061007-004 Power Setting:15

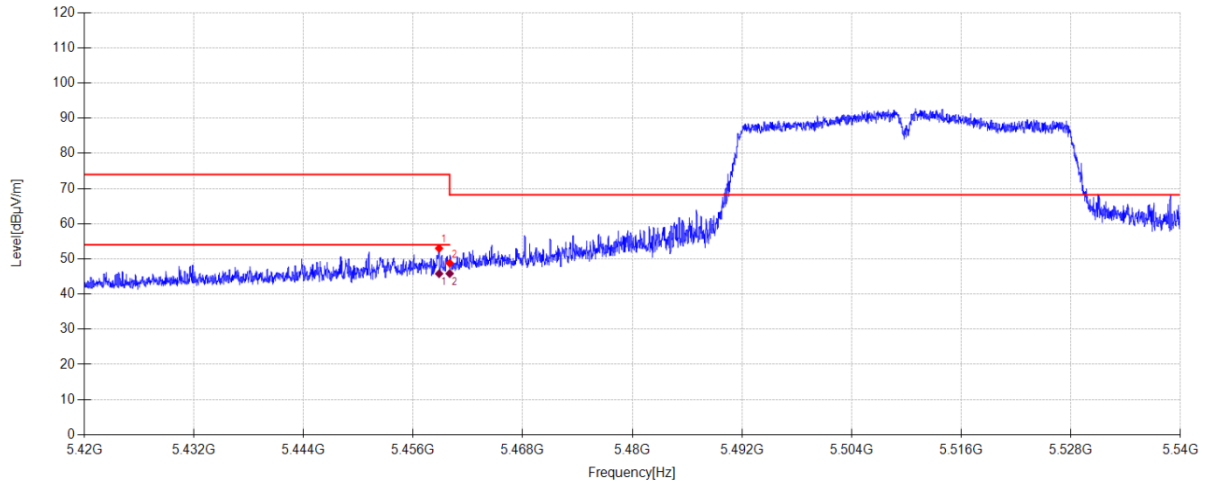**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.844	52.48	32.89	7.33	-39.71	52.99	74.00	21.01	PK	Horizontal
2	5460.000	48.27	32.90	7.33	-39.71	48.79	68.20	19.41	PK	Horizontal

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.844	45.28	32.89	7.33	45.79	54.00	8.21	AV	Horizontal
2	5460.000	45.31	32.90	7.33	45.83	54.00	8.17	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\42

Memo:

Sample Number:S26061007-004 Power Setting:15

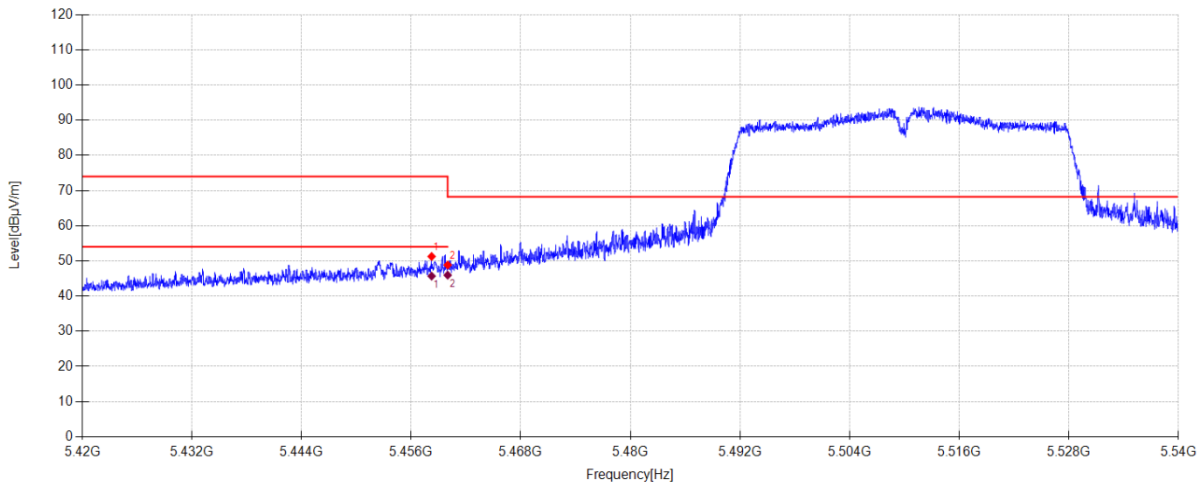

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.244	50.76	32.88	7.33	-39.71	51.26	74.00	22.74	PK	Vertical
2	5460.000	48.32	32.90	7.33	-39.71	48.84	68.20	19.36	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.244	45.18	32.88	7.33	45.68	54.00	8.32	AV	Vertical	
2	5460.000	45.43	32.90	7.33	45.95	54.00	8.05	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\43

Memo:

Sample Number:S26061007-004 Power Setting:15

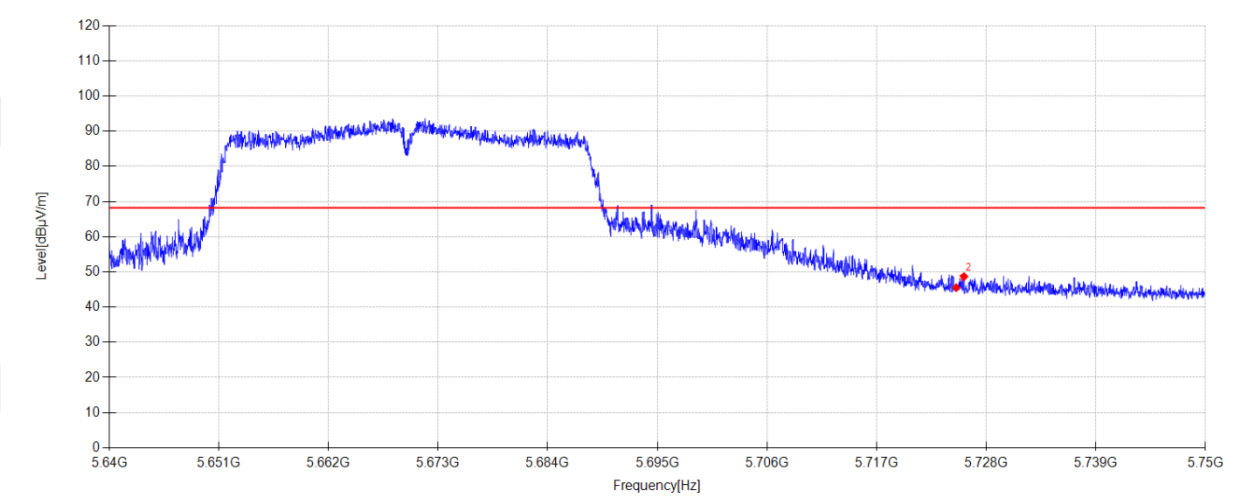

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.24	33.45	7.48	-39.65	45.52	68.20	22.68	PK	Horizontal
2	5725.789	47.39	33.46	7.48	-39.65	48.68	68.20	19.52	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\44

Memo:

Sample Number:S26061007-004 Power Setting:15

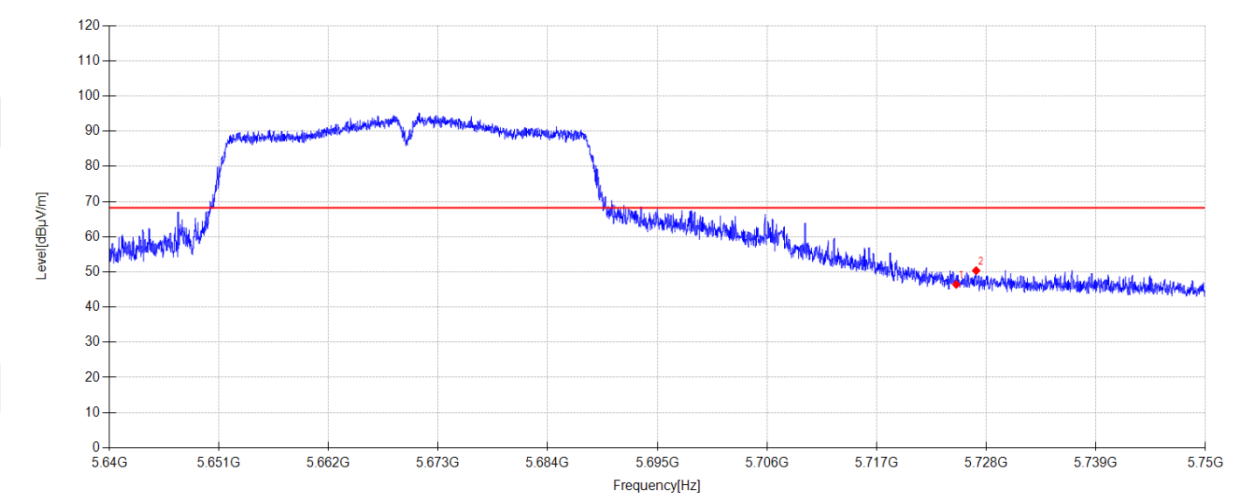

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.15	33.45	7.48	-39.65	46.43	68.20	21.77	PK	Vertical
2	5726.999	49.05	33.48	7.48	-39.65	50.36	68.20	17.84	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\45

Memo:

Sample Number:S26061007-004 Power Setting:NA

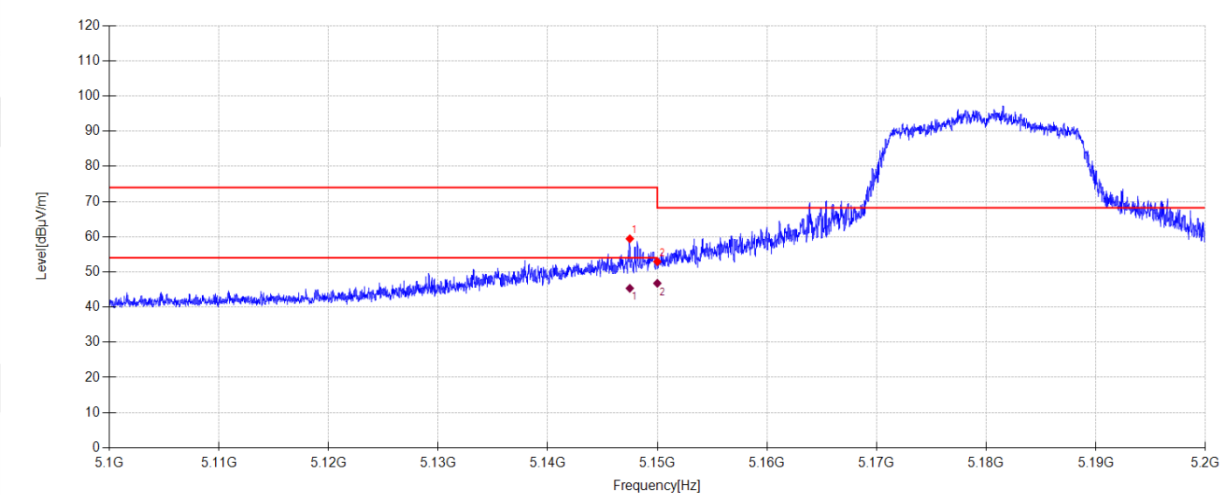

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.490	59.15	32.88	7.16	-39.77	59.42	74.00	14.58	PK	Horizontal
2	5150.000	52.63	32.90	7.16	-39.77	52.92	68.20	15.28	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.488	45.07	32.88	7.16	45.34	54.00	8.66	AV	Horizontal	
2	5149.999	46.47	32.90	7.16	46.76	54.00	7.24	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\46

Memo:

Sample Number:S26061007-004 Power Setting:NA

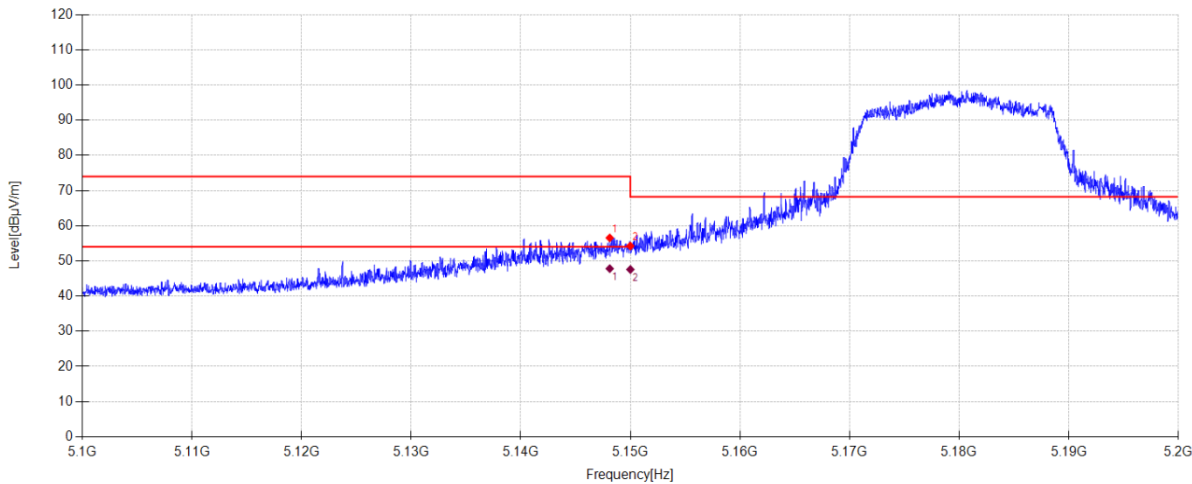

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.120	56.27	32.88	7.16	-39.77	56.54	74.00	17.46	PK	Vertical
2	5150.000	53.94	32.90	7.16	-39.77	54.23	68.20	13.97	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.120	47.53	32.88	7.16	47.80	54.00	6.20	AV	Vertical	
2	5150.000	47.27	32.90	7.16	47.56	54.00	6.44	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\47

Memo:

Sample Number:S26061007-004 Power Setting:NA

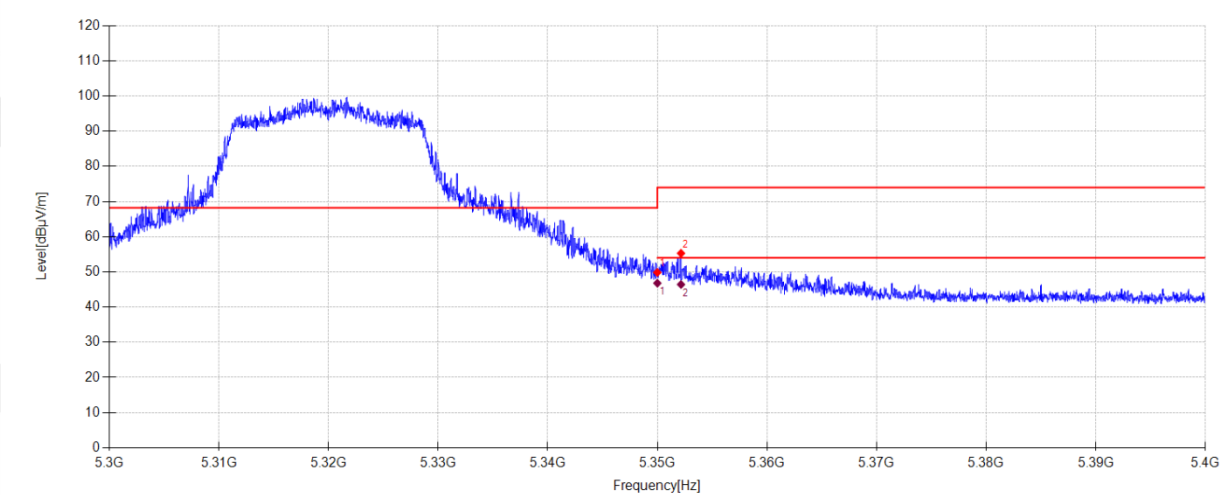

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	49.81	32.50	7.27	-39.73	49.85	68.20	18.35	PK	Horizontal
2	5352.160	55.23	32.52	7.27	-39.73	55.29	74.00	18.71	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	46.75	32.50	7.27	46.79	54.00	7.21	AV	Horizontal	
2	5352.160	46.37	32.52	7.27	46.43	54.00	7.57	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\48

Memo:

Sample Number:S26061007-004 Power Setting:NA

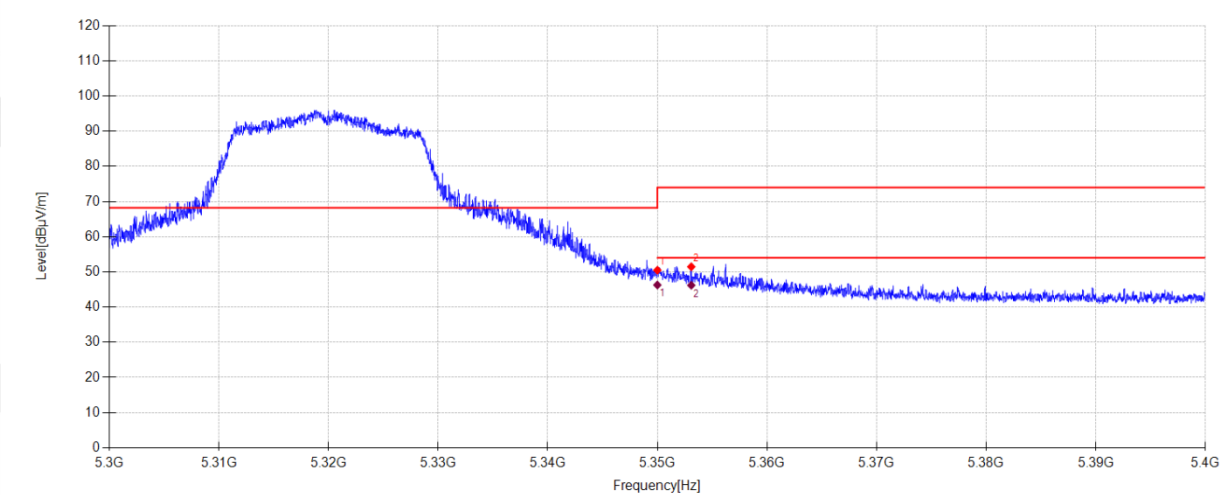

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	50.44	32.50	7.27	-39.73	50.48	68.20	17.72	PK	Vertical
2	5353.100	51.39	32.52	7.28	-39.73	51.46	74.00	22.54	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	46.24	32.50	7.27	46.28	54.00	7.72	AV	Vertical	
2	5353.100	46.13	32.52	7.28	46.20	54.00	7.80	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\49

Memo:

Sample Number:S26061007-004 Power Setting:NA

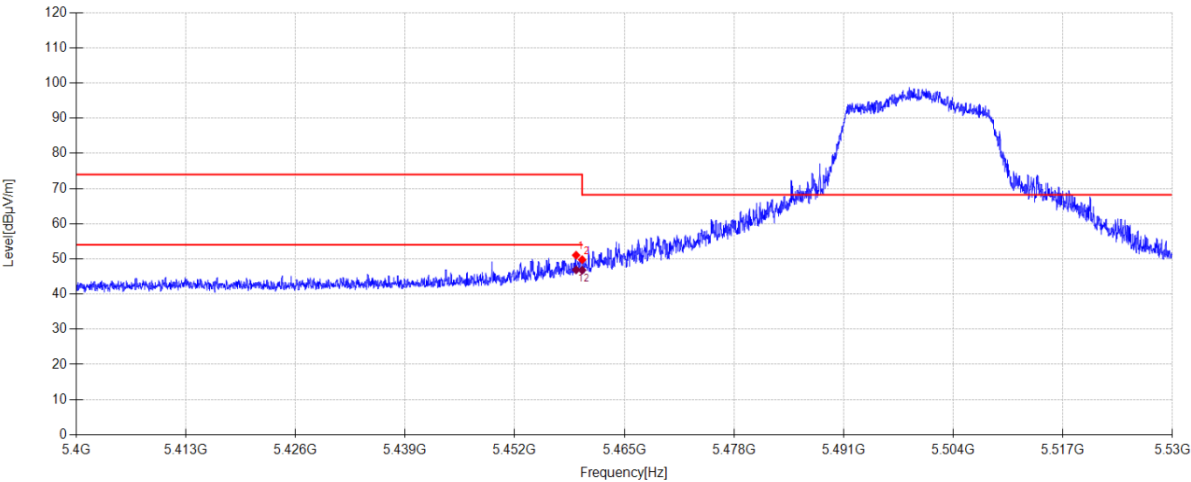

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.280	50.54	32.89	7.33	-39.71	51.05	74.00	22.95	PK	Horizontal
2	5460.000	49.25	32.90	7.33	-39.71	49.77	68.20	18.43	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5459.280	46.37	32.89	7.33	46.88	54.00	7.12	AV	Horizontal	
2	5460.000	46.28	32.90	7.33	46.80	54.00	7.20	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\50

Memo:

Sample Number:S26061007-004 Power Setting:NA

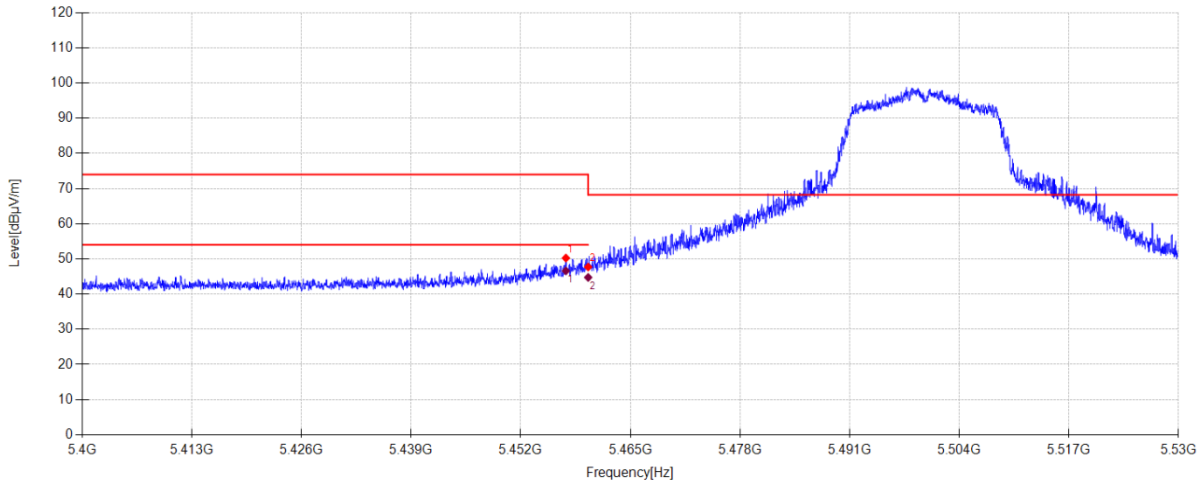

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.356	49.76	32.87	7.33	-39.71	50.25	74.00	23.75	PK	Vertical
2	5460.000	47.18	32.90	7.33	-39.71	47.70	68.20	20.50	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.356	46.09	32.87	7.33	46.58	54.00	7.42	AV	Vertical	
2	5460.000	44.22	32.90	7.33	44.74	54.00	9.26	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\51

Memo:

Sample Number:S26061007-004 Power Setting:NA

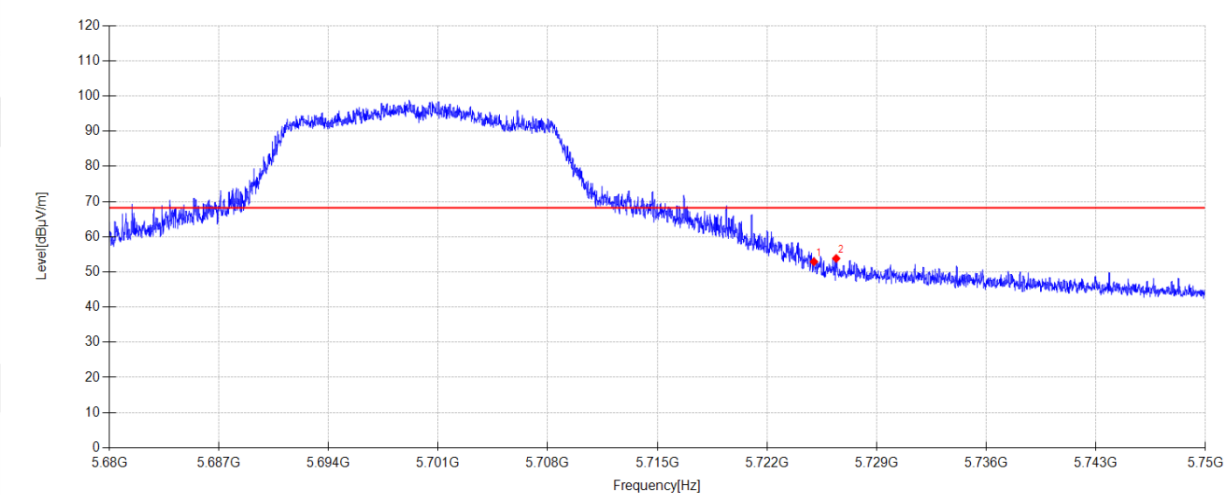

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	51.62	33.45	7.48	-39.65	52.90	68.20	15.30	PK	Horizontal
2	5726.424	52.52	33.47	7.48	-39.65	53.82	68.20	14.38	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\52

Memo:

Sample Number:S26061007-004 Power Setting:NA

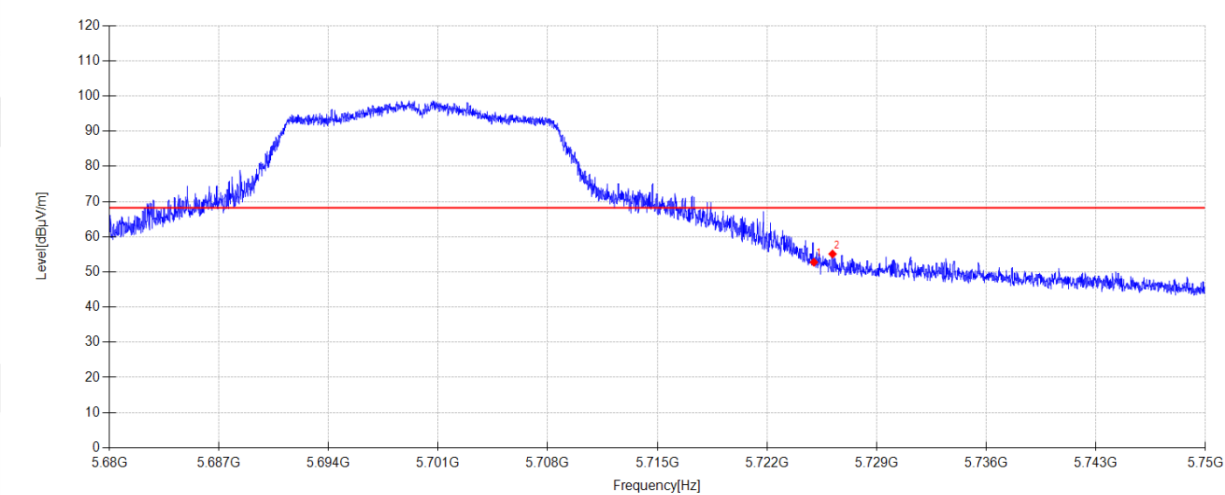

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	51.47	33.45	7.48	-39.65	52.75	68.20	15.45	PK	Vertical
2	5726.193	53.79	33.47	7.48	-39.65	55.09	68.20	13.11	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-07-16Tested By:Cao Jie

Test Mode:TX 11AC40 5310MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:21.0°C;Humi:52.9%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\53

Memo:Sample Number:S26061007-004 Power Setting:15

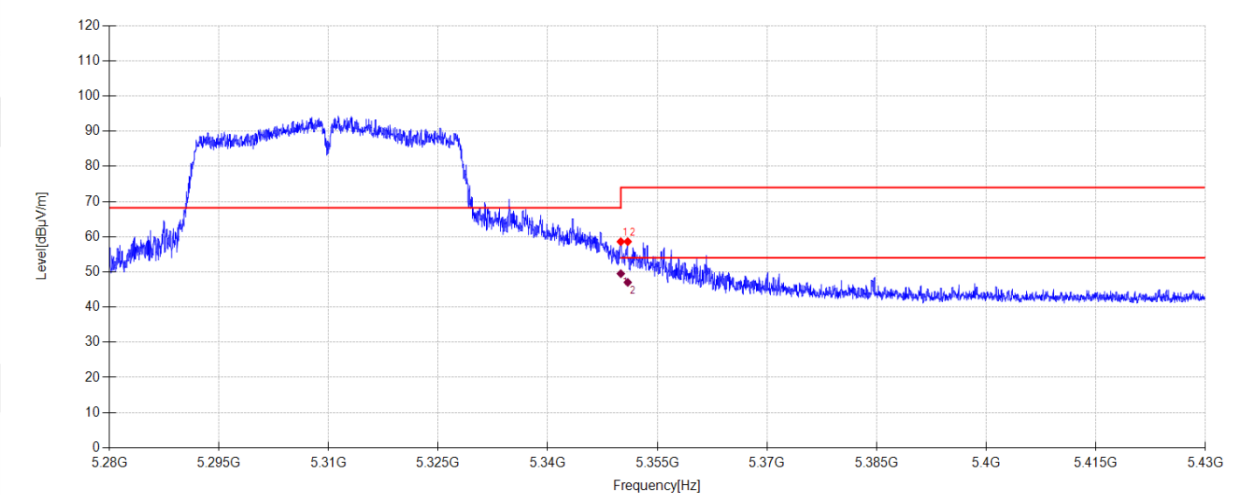

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	58.55	32.50	7.27	-39.73	58.59	68.20	9.61	PK	Horizontal
2	5350.950	58.56	32.51	7.27	-39.73	58.61	74.00	15.39	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	49.45	32.50	7.27	49.49	54.00	4.51	AV	Horizontal	
2	5350.952	46.97	32.51	7.27	47.02	54.00	6.98	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\54

Memo:

Sample Number:S26061007-004 Power Setting:15

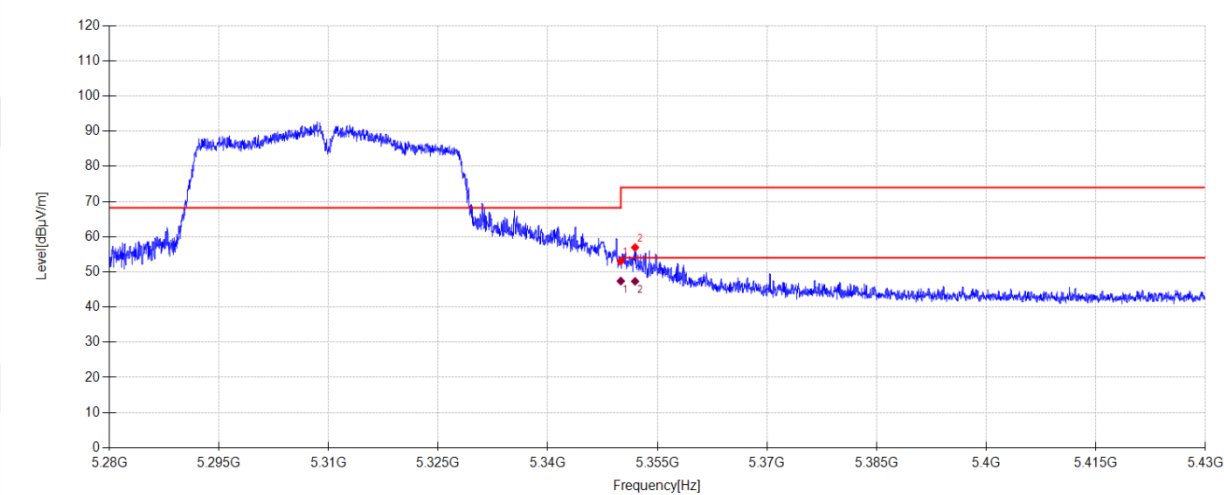

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	53.00	32.50	7.27	-39.73	53.04	68.20	15.16	PK	Vertical
2	5351.955	56.88	32.52	7.27	-39.73	56.94	74.00	17.06	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	47.35	32.50	7.27	47.39	54.00	6.61	AV	Vertical	
2	5351.955	47.26	32.52	7.27	47.32	54.00	6.68	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.