

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\55

Memo:

Sample Number:S26061007-004 Power Setting:15

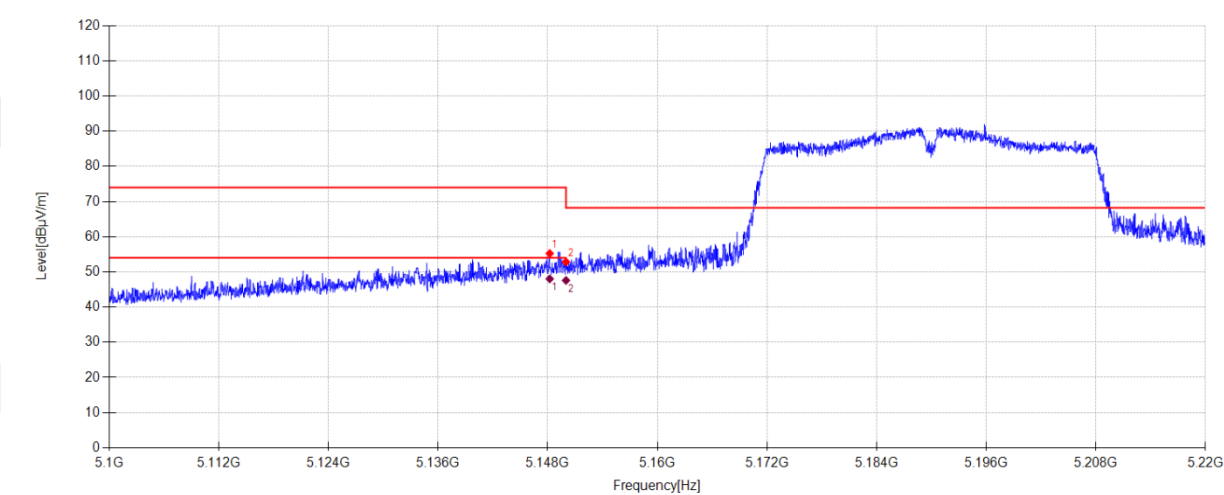

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.216	54.96	32.89	7.16	-39.77	55.24	74.00	18.76	PK	Horizontal
2	5150.000	52.54	32.90	7.16	-39.77	52.83	68.20	15.37	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.216	47.73	32.89	7.16	48.01	54.00	5.99	AV	Horizontal	
2	5150.000	47.29	32.90	7.16	47.58	54.00	6.42	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\56

Memo:

Sample Number:S26061007-004 Power Setting:15

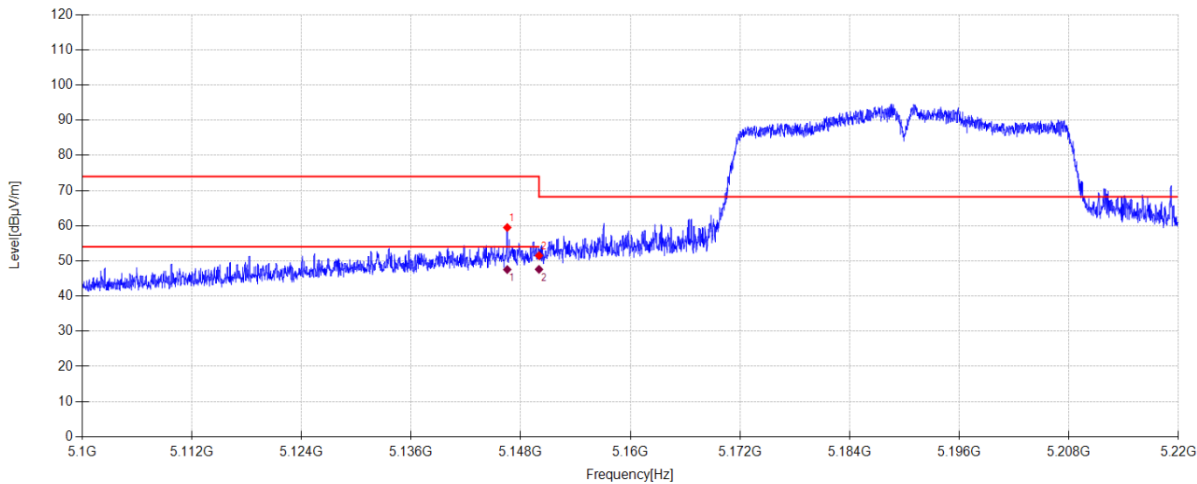

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.524	59.23	32.87	7.16	-39.77	59.49	74.00	14.51	PK	Vertical
2	5150.000	51.21	32.90	7.16	-39.77	51.50	68.20	16.70	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5146.524	47.28	32.87	7.16	47.54	54.00	6.46	AV	Vertical	
2	5150.000	47.31	32.90	7.16	47.60	54.00	6.40	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\57

Memo:

Sample Number:S26061007-004 Power Setting:15

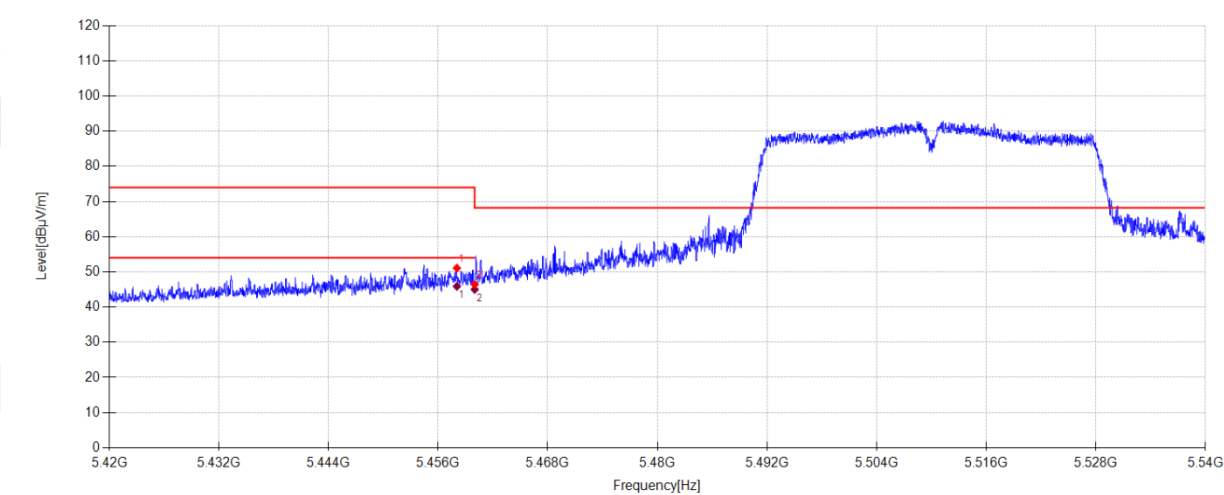

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.052	50.58	32.88	7.33	-39.71	51.08	74.00	22.92	PK	Horizontal
2	5460.000	45.91	32.90	7.33	-39.71	46.43	68.20	21.77	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.052	45.39	32.88	7.33	45.89	54.00	8.11	AV	Horizontal	
2	5460.000	44.48	32.90	7.33	45.00	54.00	9.00	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\58

Memo:

Sample Number:S26061007-004 Power Setting:15

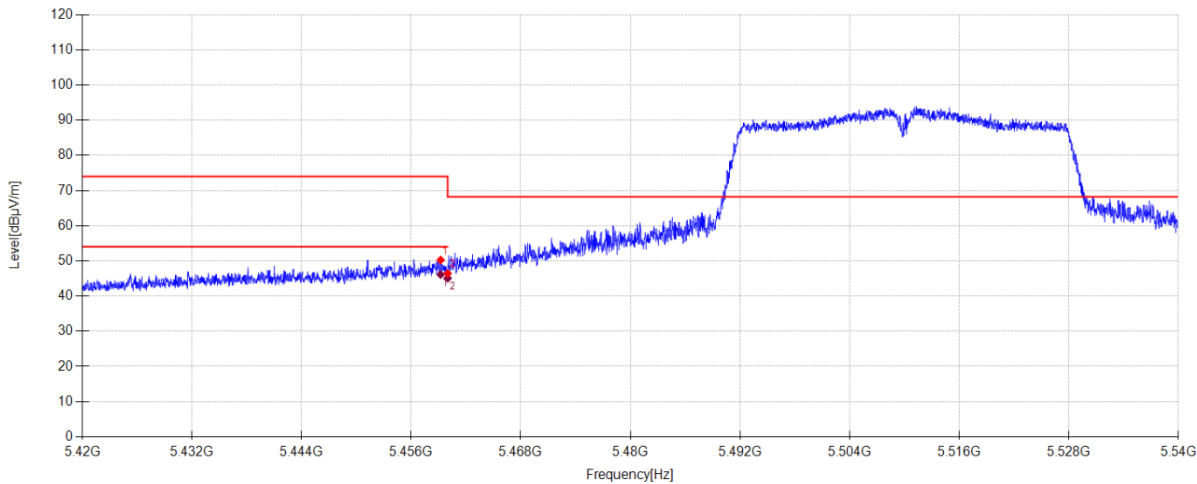

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.228	49.73	32.89	7.33	-39.71	50.24	74.00	23.76	PK	Vertical
2	5460.000	45.91	32.90	7.33	-39.71	46.43	68.20	21.77	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5459.228	45.61	32.89	7.33	46.12	54.00	7.88	AV	Vertical	
2	5460.000	44.55	32.90	7.33	45.07	54.00	8.93	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\59

Memo:

Sample Number:S26061007-004 Power Setting:15

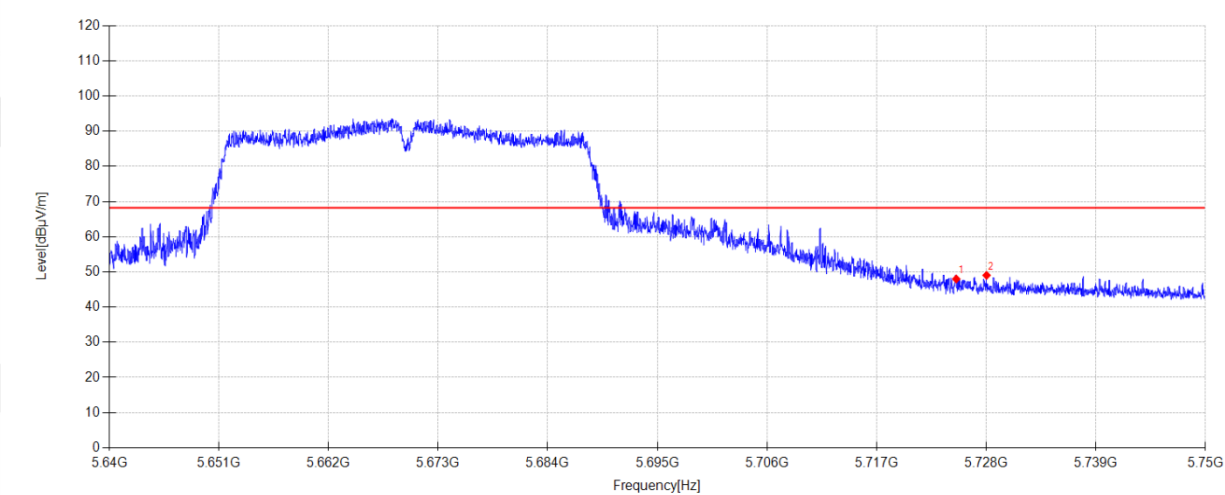

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	46.70	33.45	7.48	-39.65	47.98	68.20	20.22	PK	Horizontal
2	5728.044	47.71	33.49	7.48	-39.65	49.03	68.20	19.17	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\60

Memo:

Sample Number:S26061007-004 Power Setting:15

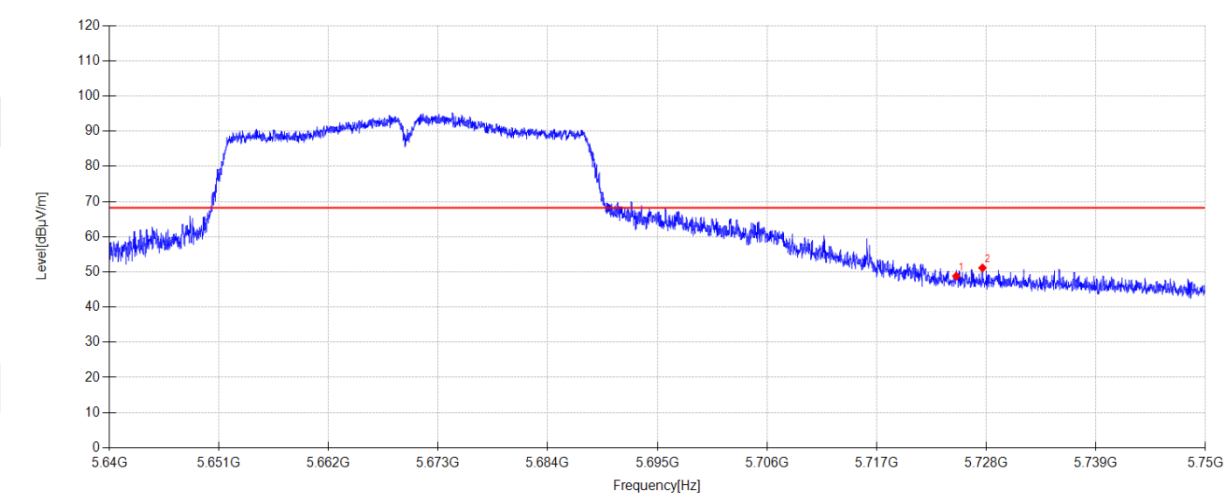

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	47.52	33.45	7.48	-39.65	48.80	68.20	19.40	PK	Vertical
2	5727.637	49.82	33.49	7.48	-39.65	51.14	68.20	17.06	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\61

Memo:

Sample Number:S26061007-004 Power Setting:14

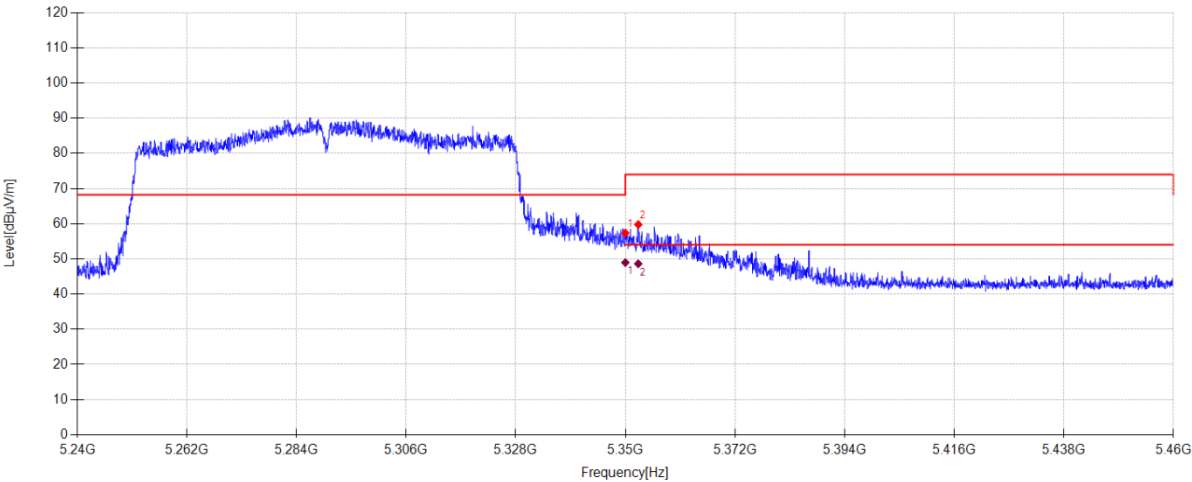

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	57.33	32.50	7.27	-39.73	57.37	68.20	10.83	PK	Horizontal
2	5352.596	59.71	32.52	7.27	-39.73	59.77	74.00	14.23	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.999	48.92	32.50	7.27	48.96	54.00	5.04	AV	Horizontal	
2	5352.596	48.56	32.52	7.27	48.62	54.00	5.38	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\62

Memo:

Sample Number:S26061007-004 Power Setting:14

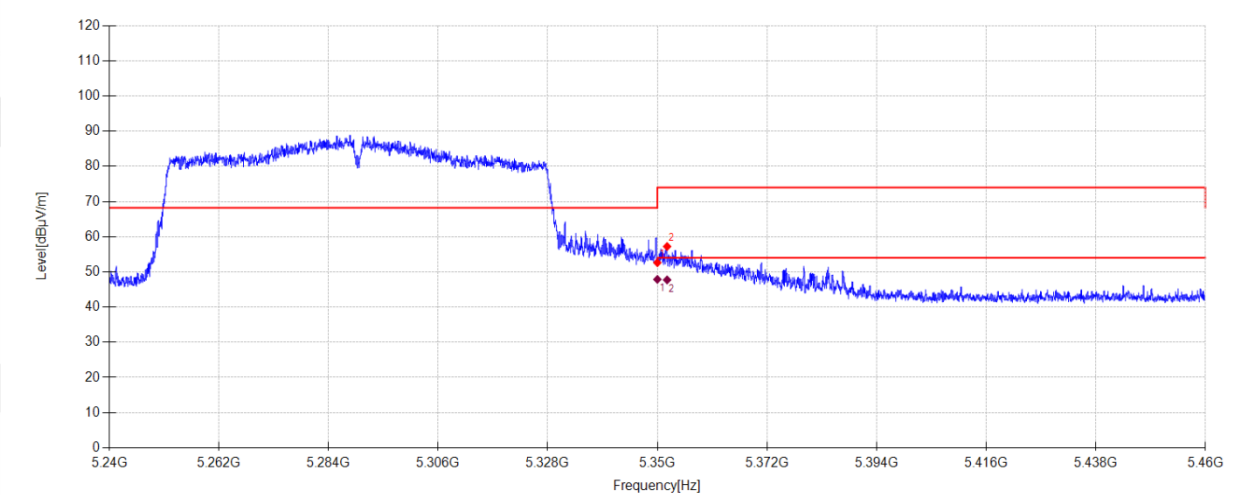

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	52.58	32.50	7.27	-39.73	52.62	68.20	15.58	PK	Vertical
2	5351.958	57.17	32.52	7.27	-39.73	57.23	74.00	16.77	PK	Vertical


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	47.83	32.50	7.27	47.87	54.00	6.13	AV	Vertical	
2	5351.958	47.67	32.52	7.27	47.73	54.00	6.27	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\63
Memo: Sample Number:S26061007-004 Power Setting:14

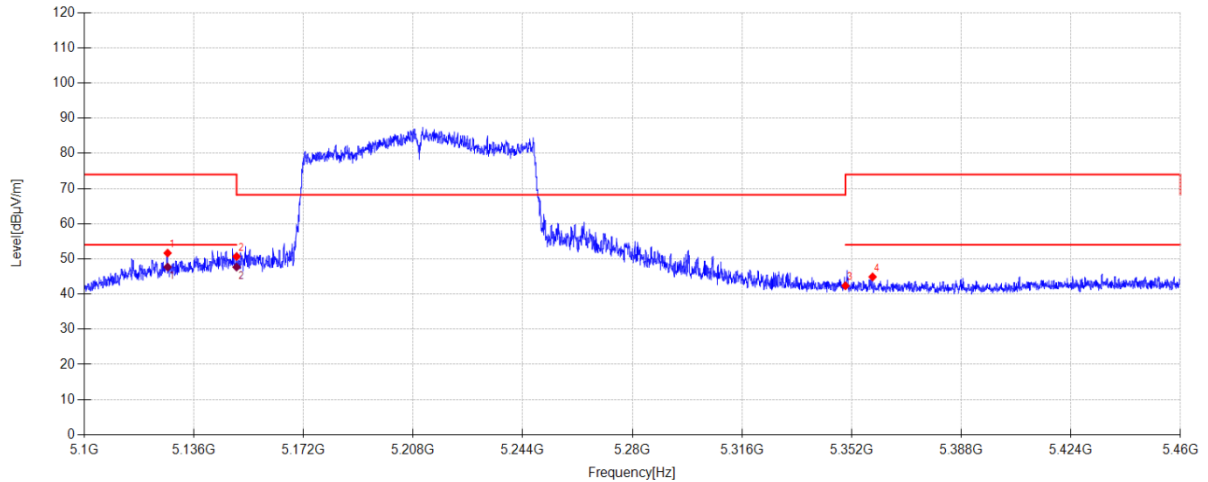

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5127.360	51.55	32.72	7.15	-39.77	51.65	74.00	22.35	PK	Horizontal
2	5150.000	50.39	32.90	7.16	-39.77	50.68	68.20	17.52	PK	Horizontal
3	5350.000	42.31	32.50	7.27	-39.73	42.35	68.20	25.85	PK	Horizontal
4	5358.912	44.77	32.57	7.28	-39.73	44.89	74.00	29.11	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5127.360	47.60	32.72	7.15	47.70	54.00	6.30	AV	Horizontal
2	5150.000	47.38	32.90	7.16	47.67	54.00	6.33	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\64
Memo: Sample Number:S26061007-004 Power Setting:14

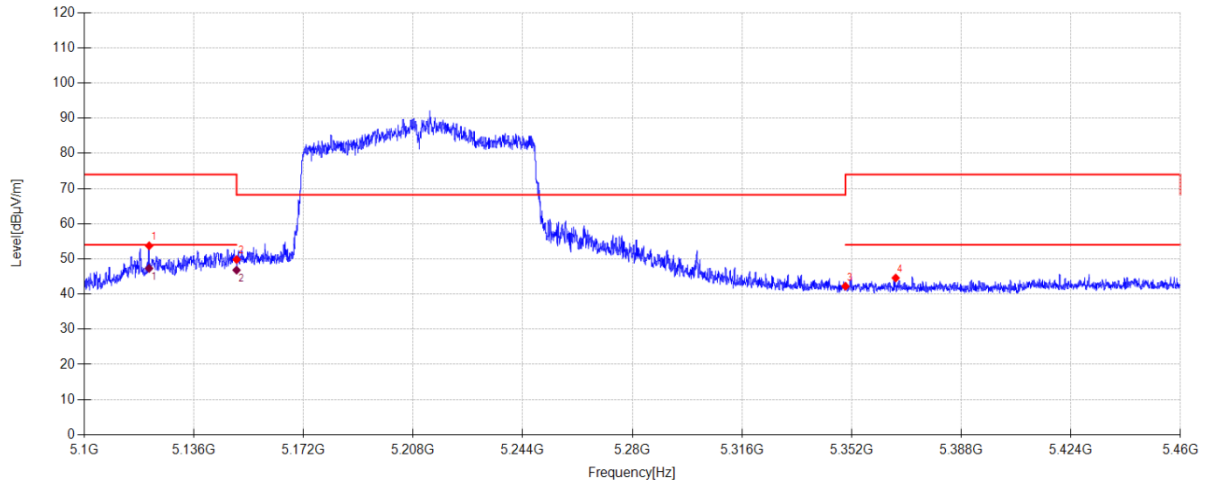**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5121.276	53.68	32.67	7.15	-39.78	53.72	74.00	20.28	PK	Vertical
2	5150.000	49.53	32.90	7.16	-39.77	49.82	68.20	18.38	PK	Vertical
3	5350.000	42.19	32.50	7.27	-39.73	42.23	68.20	25.97	PK	Vertical
4	5366.508	44.41	32.63	7.28	-39.73	44.59	74.00	29.41	PK	Vertical

Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5121.276	47.26	32.67	7.15	47.30	54.00	6.70	AV	Vertical
2	5150.000	46.52	32.90	7.16	46.81	54.00	7.19	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\65

Memo:

Sample Number:S26061007-004 Power Setting:14

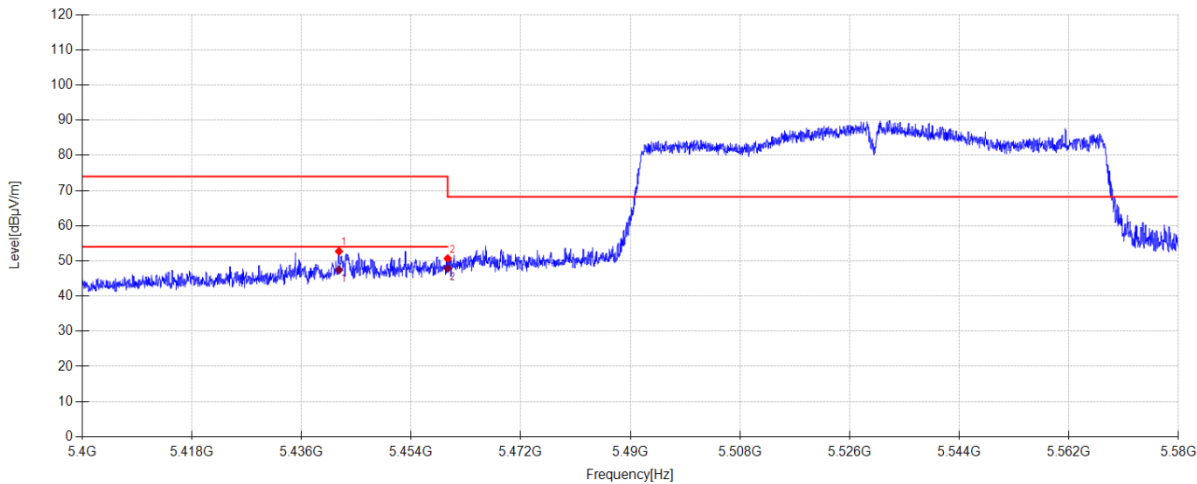

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5442.156	52.29	32.82	7.32	-39.71	52.72	74.00	21.28	PK	Horizontal
2	5460.000	50.16	32.90	7.33	-39.71	50.68	68.20	17.52	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5442.156	46.98	32.82	7.32	47.41	54.00	6.59	AV	Horizontal	
2	5460.000	47.34	32.90	7.33	47.86	54.00	6.14	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\66

Memo:

Sample Number:S26061007-004 Power Setting:14

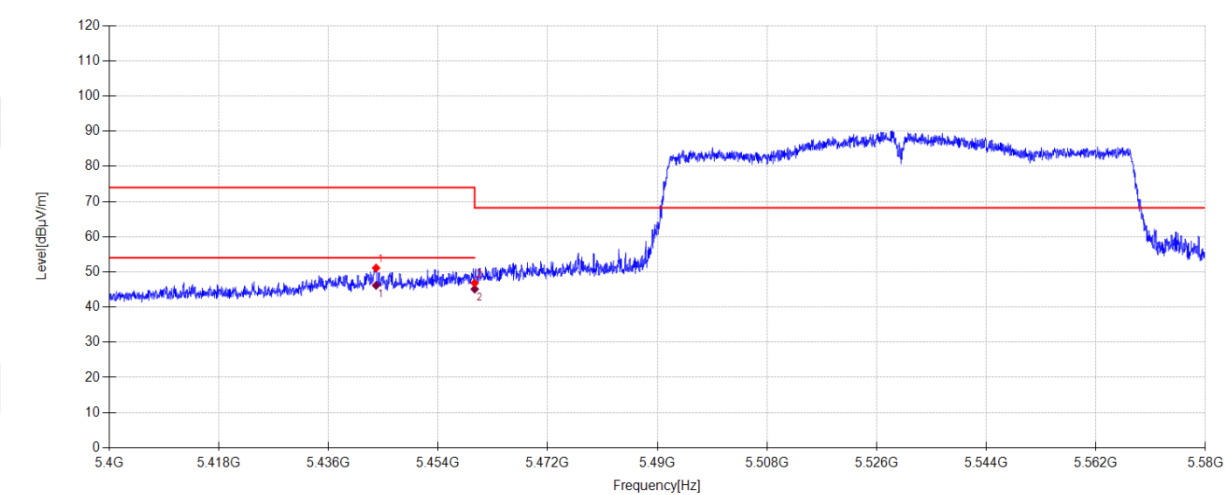

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5443.812	50.70	32.81	7.32	-39.71	51.12	74.00	22.88	PK	Vertical
2	5460.000	46.30	32.90	7.33	-39.71	46.82	68.20	21.38	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5443.812	45.73	32.81	7.32	46.15	54.00	7.85	AV	Vertical	
2	5460.000	44.58	32.90	7.33	45.10	54.00	8.90	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\67

Memo:

Sample Number:S26061007-004 Power Setting:14

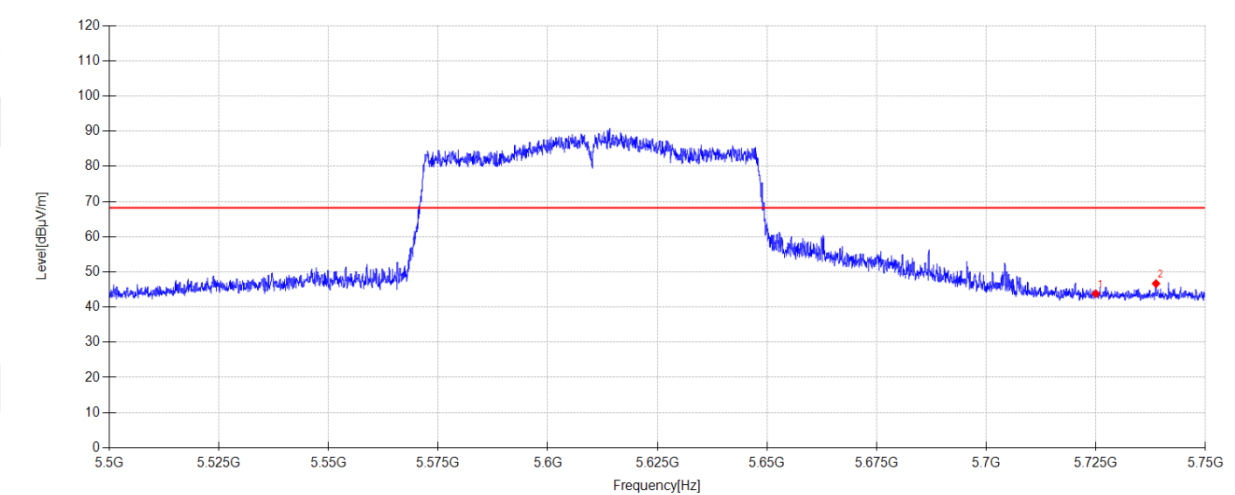

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.54	33.45	7.48	-39.66	43.81	68.20	24.39	PK	Horizontal
2	5738.750	45.21	33.64	7.48	-39.65	46.68	68.20	21.52	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G\68

Memo:

Sample Number:S26061007-004 Power Setting:14

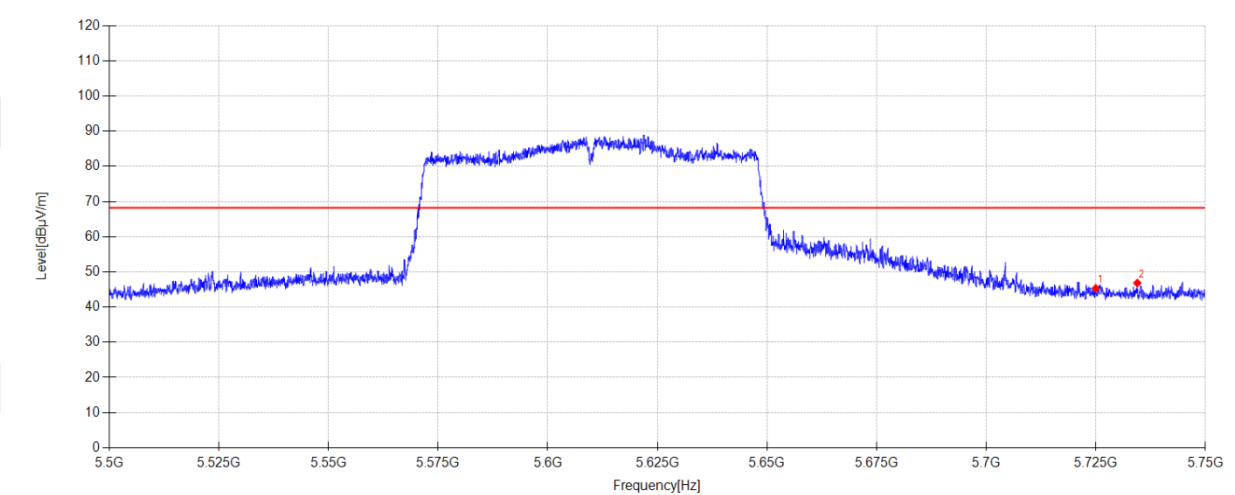

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.06	33.45	7.48	-39.66	45.33	68.20	22.87	PK	Vertical
2	5734.475	45.42	33.58	7.48	-39.65	46.83	68.20	21.37	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\1

Memo:

Sample Number:S26061007-004 Power Setting:NA

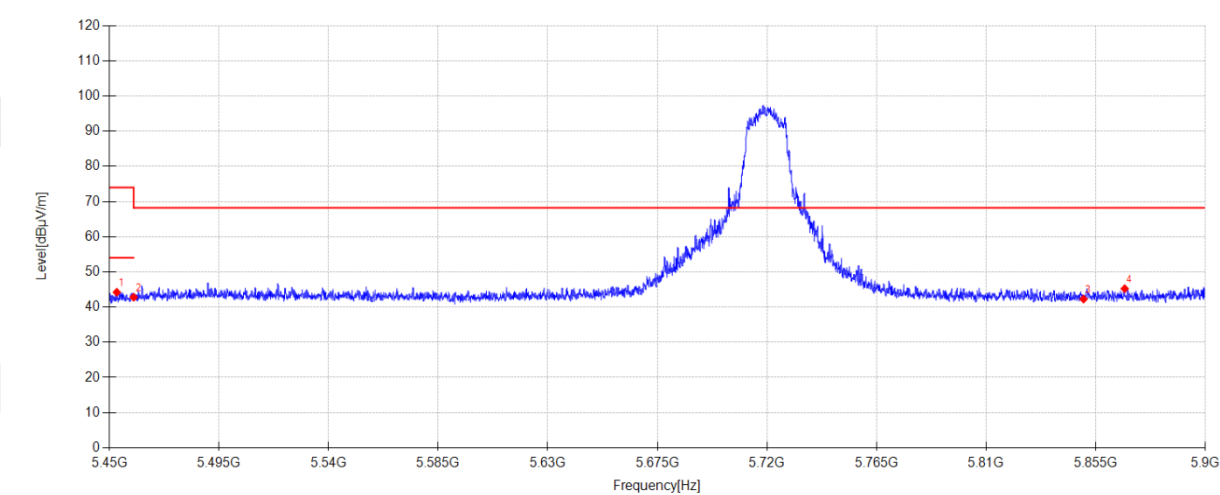

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.060	43.76	32.83	7.33	-39.71	44.21	74.00	29.79	PK	Horizontal
2	5460.000	42.28	32.90	7.33	-39.71	42.80	68.20	25.40	PK	Horizontal
3	5850.000	40.45	33.90	7.55	-39.63	42.27	68.20	25.93	PK	Horizontal
4	5866.880	43.28	34.04	7.55	-39.63	45.24	68.20	22.96	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-15

Tested By:

Cao Jie

Test Mode:

TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\2

Memo:

Sample Number:S26061007-004 Power Setting:NA

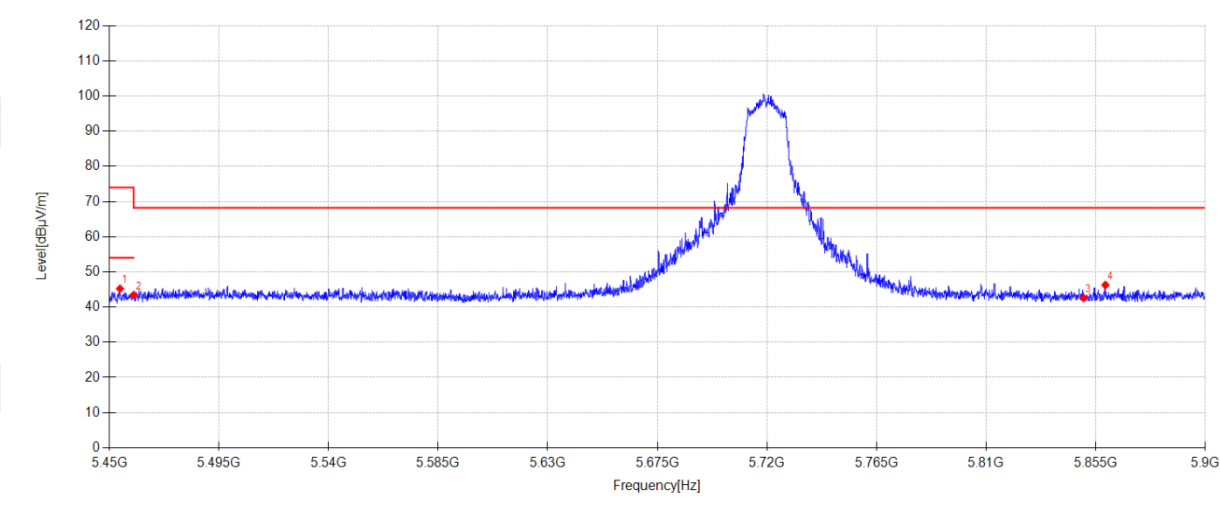

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.365	44.76	32.84	7.33	-39.71	45.22	74.00	28.78	PK	Vertical
2	5460.000	42.93	32.90	7.33	-39.71	43.45	68.20	24.75	PK	Vertical
3	5850.000	40.78	33.90	7.55	-39.63	42.60	68.20	25.60	PK	Vertical
4	5858.960	44.39	33.97	7.55	-39.63	46.28	68.20	21.92	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\3

Memo:

Sample Number:S26061007-004 Power Setting:NA

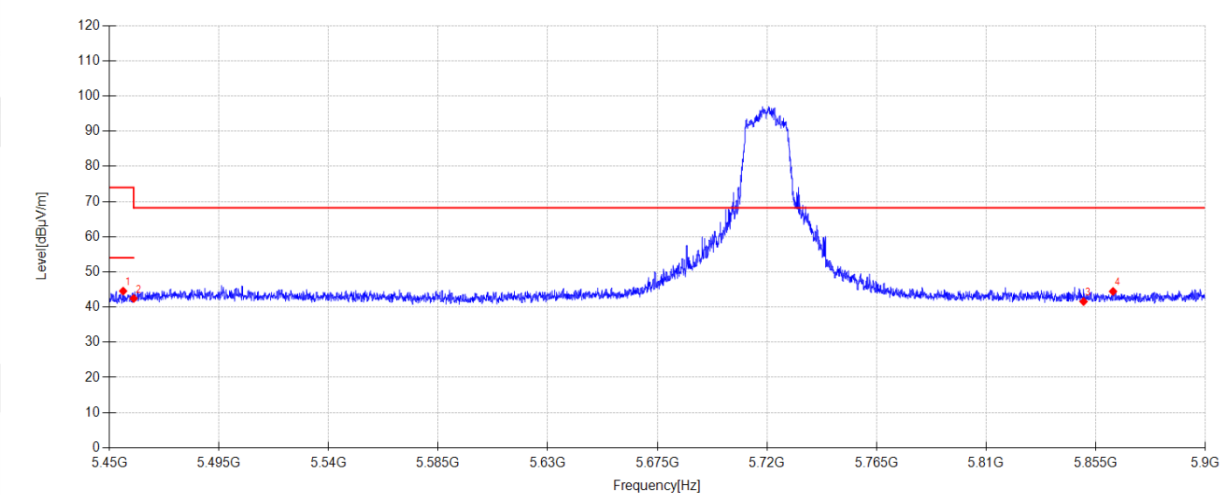

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.670	44.08	32.86	7.33	-39.71	44.56	74.00	29.44	PK	Horizontal
2	5460.000	41.92	32.90	7.33	-39.71	42.44	68.20	25.76	PK	Horizontal
3	5850.000	39.75	33.90	7.55	-39.63	41.57	68.20	26.63	PK	Horizontal
4	5862.110	42.54	34.00	7.55	-39.63	44.46	68.20	23.74	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\4

Memo:

Sample Number:S26061007-004 Power Setting:NA

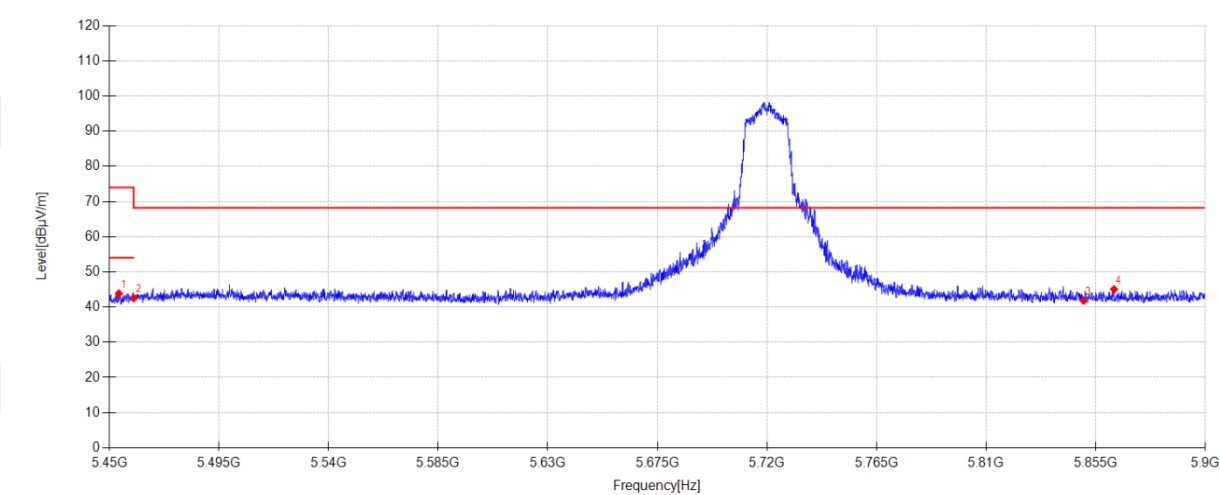

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.915	43.36	32.84	7.33	-39.71	43.82	74.00	30.18	PK	Vertical
2	5460.000	42.04	32.90	7.33	-39.71	42.56	68.20	25.64	PK	Vertical
3	5850.000	40.07	33.90	7.55	-39.63	41.89	68.20	26.31	PK	Vertical
4	5862.515	43.14	34.00	7.55	-39.63	45.06	68.20	23.14	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\5

Memo:

Sample Number:S26061007-004 Power Setting:15

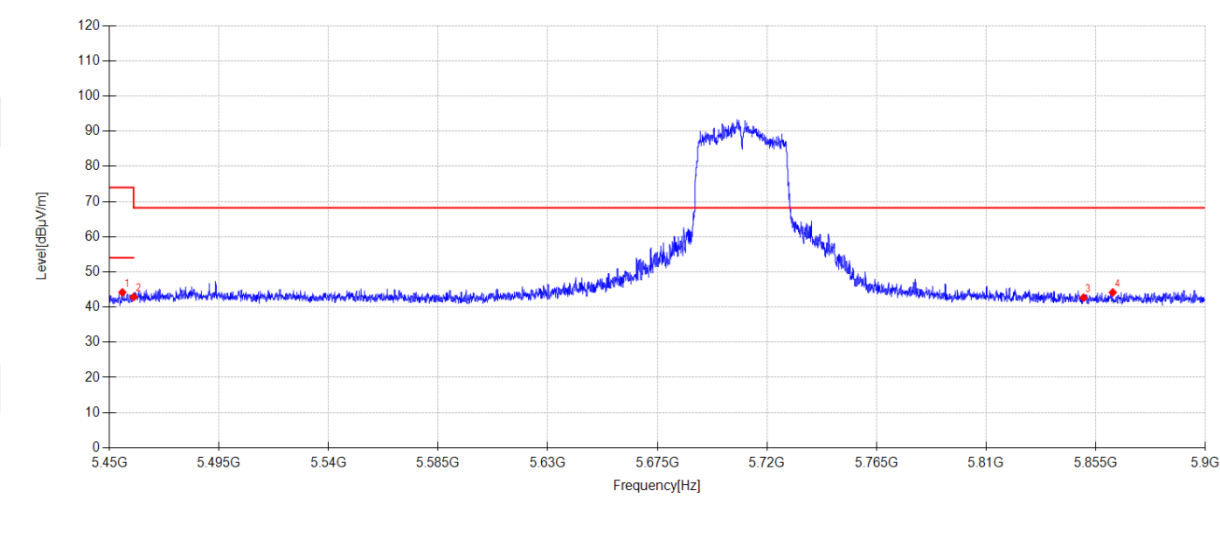

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.355	43.70	32.85	7.33	-39.71	44.17	74.00	29.83	PK	Horizontal
2	5460.000	42.35	32.90	7.33	-39.71	42.87	68.20	25.33	PK	Horizontal
3	5850.000	40.84	33.90	7.55	-39.63	42.66	68.20	25.54	PK	Horizontal
4	5861.975	42.23	34.00	7.55	-39.63	44.15	68.20	24.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\6

Memo:

Sample Number:S26061007-004 Power Setting:15

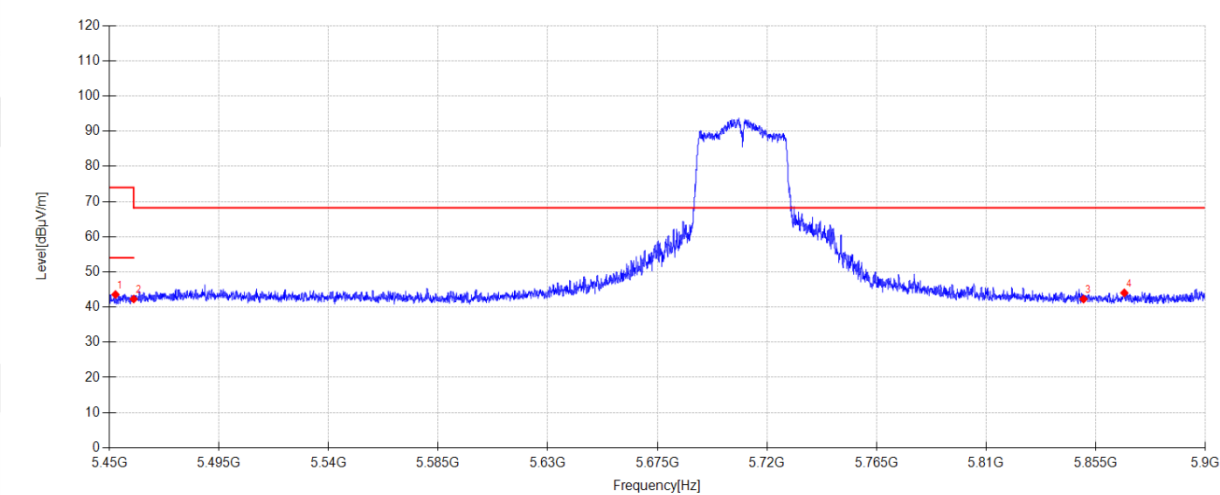

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.520	43.12	32.83	7.33	-39.71	43.57	74.00	30.43	PK	Vertical
2	5460.000	41.78	32.90	7.33	-39.71	42.30	68.20	25.90	PK	Vertical
3	5850.000	40.46	33.90	7.55	-39.63	42.28	68.20	25.92	PK	Vertical
4	5866.745	42.09	34.03	7.55	-39.63	44.04	68.20	24.16	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\7

Memo:

Sample Number:S26061007-004 Power Setting:NA

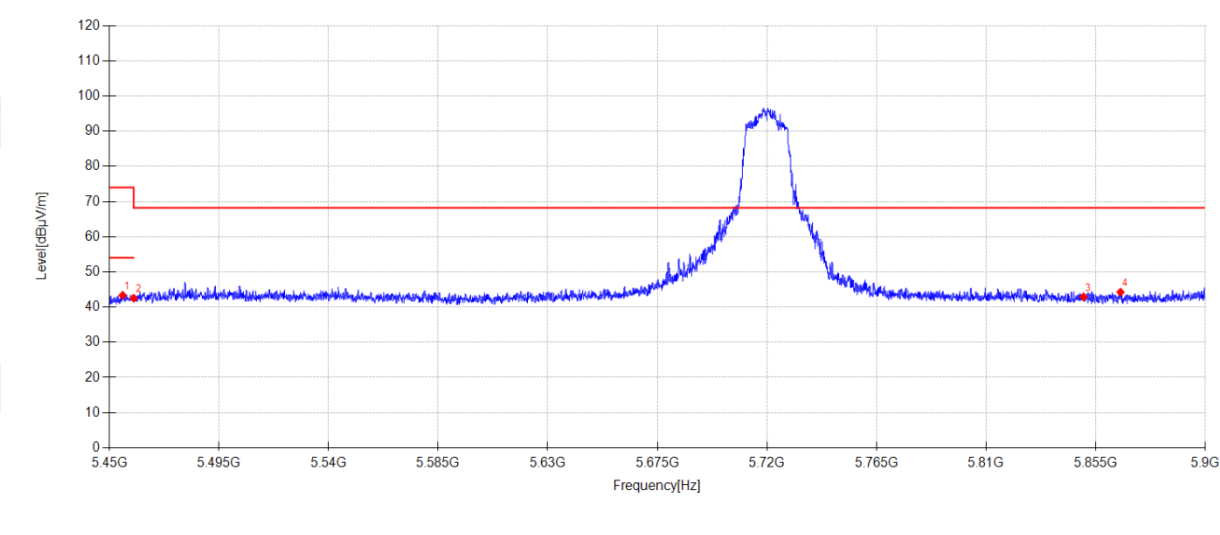

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.445	42.89	32.85	7.33	-39.71	43.36	74.00	30.64	PK	Horizontal
2	5460.000	42.00	32.90	7.33	-39.71	42.52	68.20	25.68	PK	Horizontal
3	5850.000	41.10	33.90	7.55	-39.63	42.92	68.20	25.28	PK	Horizontal
4	5865.170	42.30	34.02	7.55	-39.63	44.24	68.20	23.96	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\8

Memo:

Sample Number:S26061007-004 Power Setting:NA

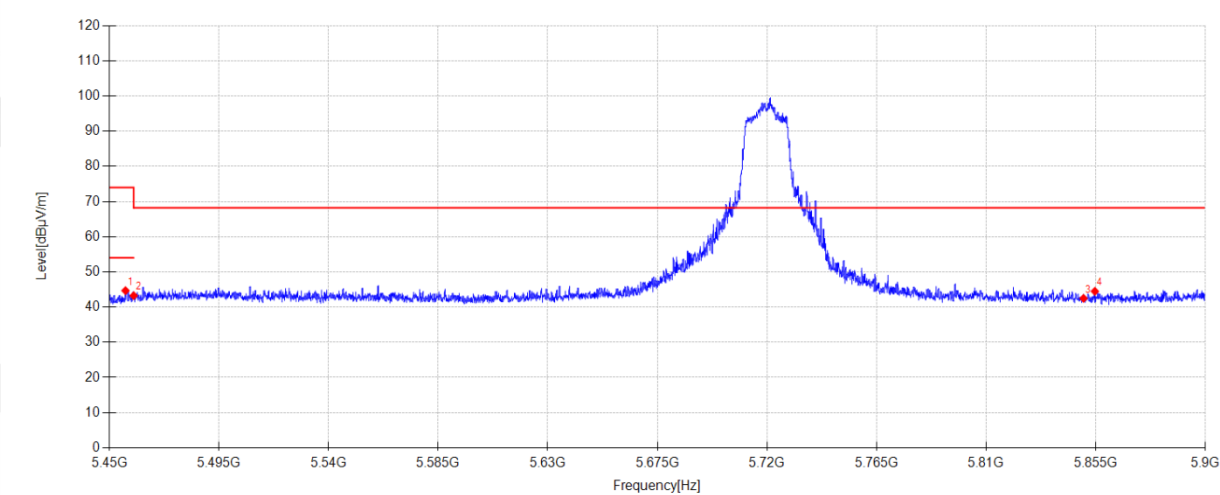

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.615	44.18	32.87	7.33	-39.71	44.67	74.00	29.33	PK	Vertical
2	5460.000	42.73	32.90	7.33	-39.71	43.25	68.20	24.95	PK	Vertical
3	5850.000	40.66	33.90	7.55	-39.63	42.48	68.20	25.72	PK	Vertical
4	5854.640	42.63	33.94	7.55	-39.63	44.49	68.20	23.71	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\9

Memo:

Sample Number:S26061007-004 Power Setting:15

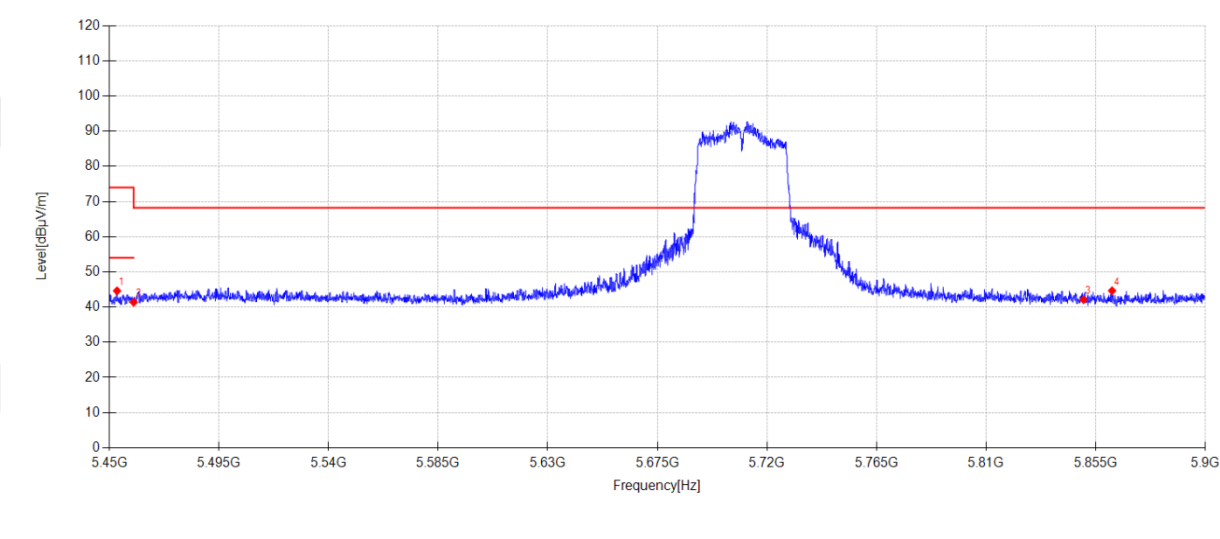

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.150	44.17	32.83	7.33	-39.71	44.62	74.00	29.38	PK	Horizontal
2	5460.000	40.85	32.90	7.33	-39.71	41.37	68.20	26.83	PK	Horizontal
3	5850.000	40.28	33.90	7.55	-39.63	42.10	68.20	26.10	PK	Horizontal
4	5861.705	42.73	33.99	7.55	-39.63	44.64	68.20	23.56	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11AC40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\10
Memo: Sample Number:S26061007-004 Power Setting:15

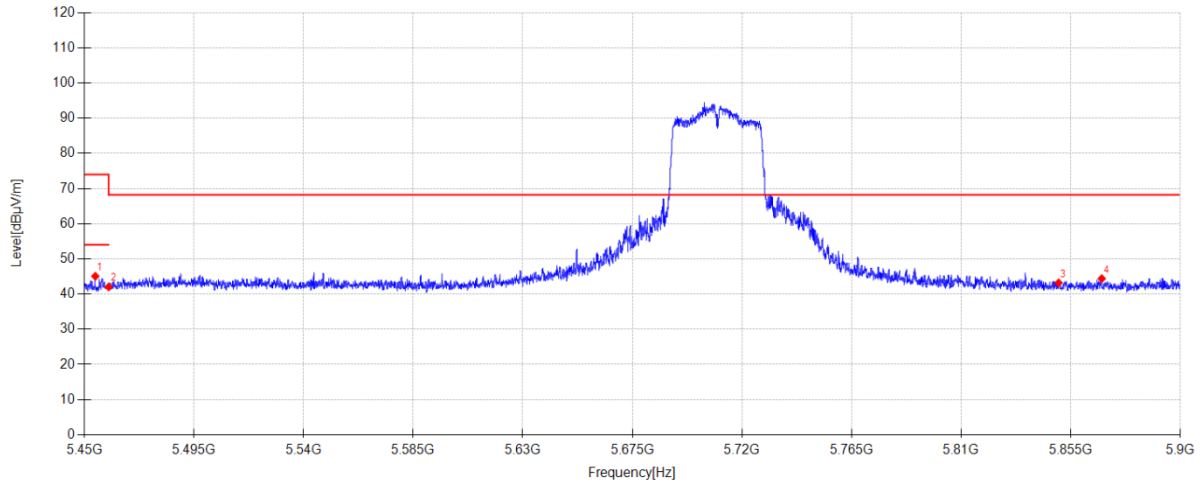**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.500	44.60	32.85	7.33	-39.71	45.07	74.00	28.93	PK	Vertical
2	5460.000	41.51	32.90	7.33	-39.71	42.03	68.20	26.17	PK	Vertical
3	5850.000	41.37	33.90	7.55	-39.63	43.19	68.20	25.01	PK	Vertical
4	5867.735	42.43	34.04	7.55	-39.63	44.39	68.20	23.81	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\11

Memo:

Sample Number:S26061007-004 Power Setting:14

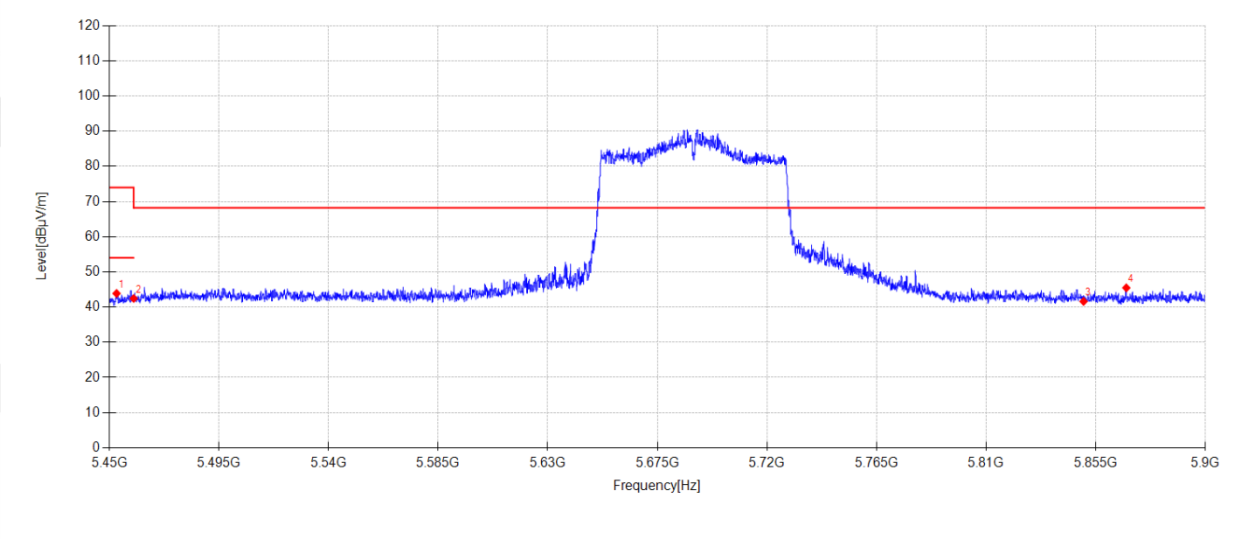

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.970	43.42	32.83	7.33	-39.71	43.87	74.00	30.13	PK	Horizontal
2	5460.000	41.93	32.90	7.33	-39.71	42.45	68.20	25.75	PK	Horizontal
3	5850.000	39.79	33.90	7.55	-39.63	41.61	68.20	26.59	PK	Horizontal
4	5867.555	43.51	34.04	7.55	-39.63	45.47	68.20	22.73	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5G KUAYUE\12

Memo:

Sample Number:S26061007-004 Power Setting:14

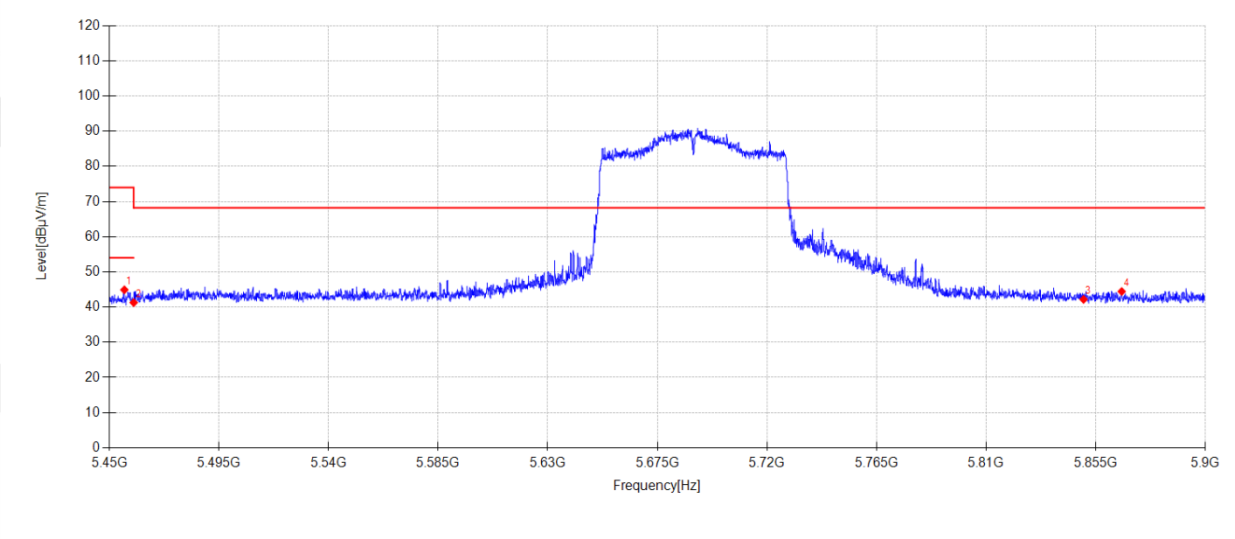

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.165	44.43	32.86	7.33	-39.71	44.91	74.00	29.09	PK	Vertical
2	5460.000	40.75	32.90	7.33	-39.71	41.27	68.20	26.93	PK	Vertical
3	5850.000	40.36	33.90	7.55	-39.63	42.18	68.20	26.02	PK	Vertical
4	5865.665	42.48	34.03	7.55	-39.63	44.43	68.20	23.77	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC80 5775MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5.8G\1

Memo:

Sample Number:S26061007-004 Power Setting:NA

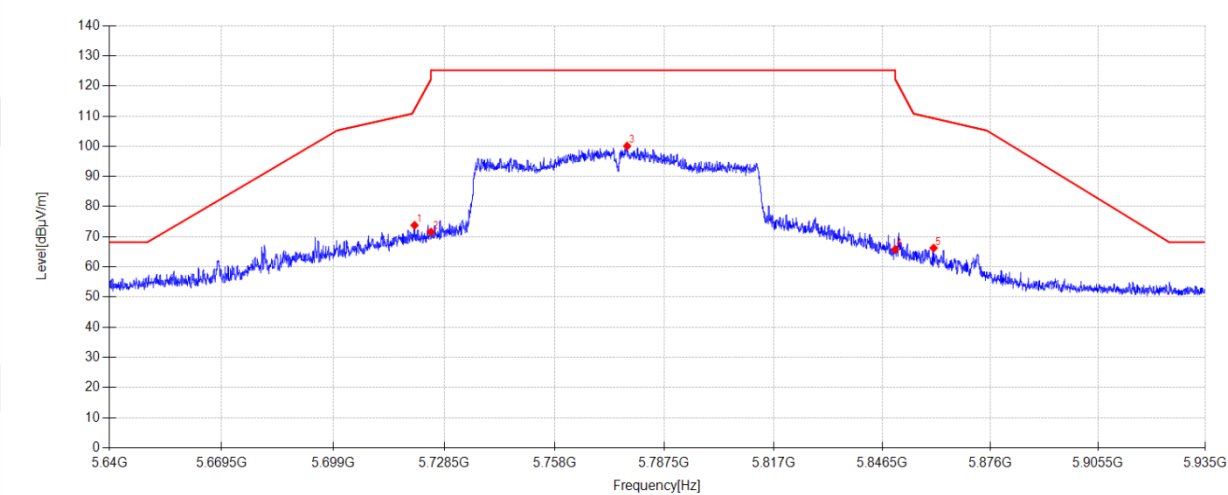

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.653	64.81	33.39	5.26	-29.66	73.80	112.29	38.49	PK	Horizontal
2	5725.000	62.50	33.45	5.26	-29.65	71.56	122.20	50.64	PK	Horizontal
3	5777.500	90.58	33.85	5.28	-29.64	100.07	125.20	25.13	PK	Horizontal
4	5850.000	56.21	33.90	5.31	-29.63	65.79	122.20	56.41	PK	Horizontal
5	5860.454	56.59	33.98	5.31	-29.63	66.25	109.27	43.02	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-16 **Tested By:** Cao Jie
Test Mode: TX 11AC80 5775MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:21.0°C;Humi:52.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5.8G\2
Memo: Sample Number:S26061007-004 Power Setting:NA

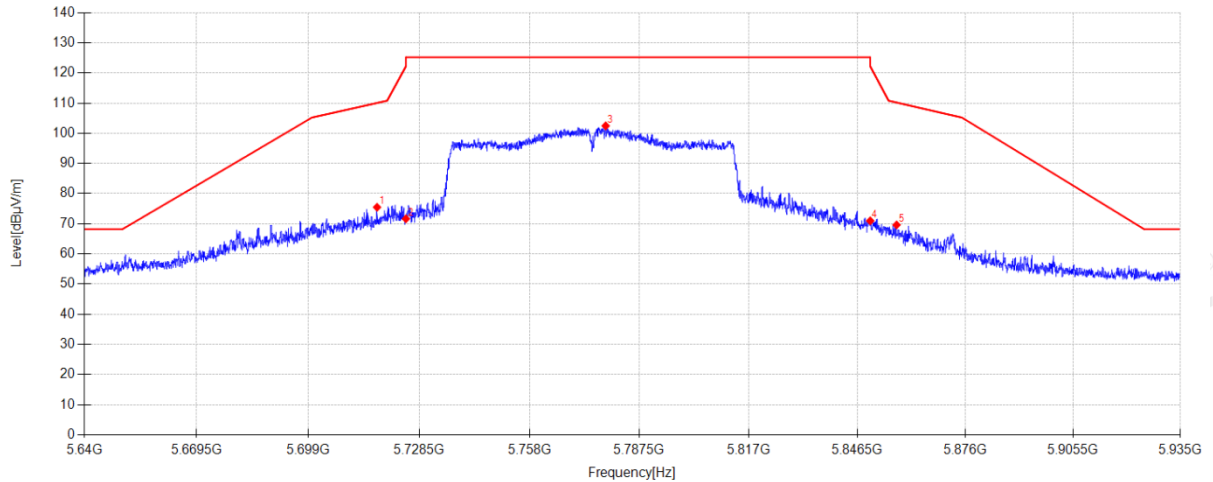**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5717.320	66.52	33.34	5.26	-29.66	75.46	110.05	34.59	PK	Vertical
2	5725.000	62.58	33.45	5.26	-29.65	71.64	122.20	50.56	PK	Vertical
3	5778.444	92.96	33.86	5.28	-29.64	102.46	125.20	22.74	PK	Vertical
4	5850.000	61.38	33.90	5.31	-29.63	70.96	122.20	51.24	PK	Vertical
5	5857.179	59.96	33.96	5.31	-29.63	69.60	110.19	40.59	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-16

Tested By:

Cao Jie

Test Mode:

TX 11AC40 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:21.0°C;Humi:52.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26061007-1E\FCC ABOVE 1G 5.8G\3

Memo:

Sample Number:S26061007-004 Power Setting:NA

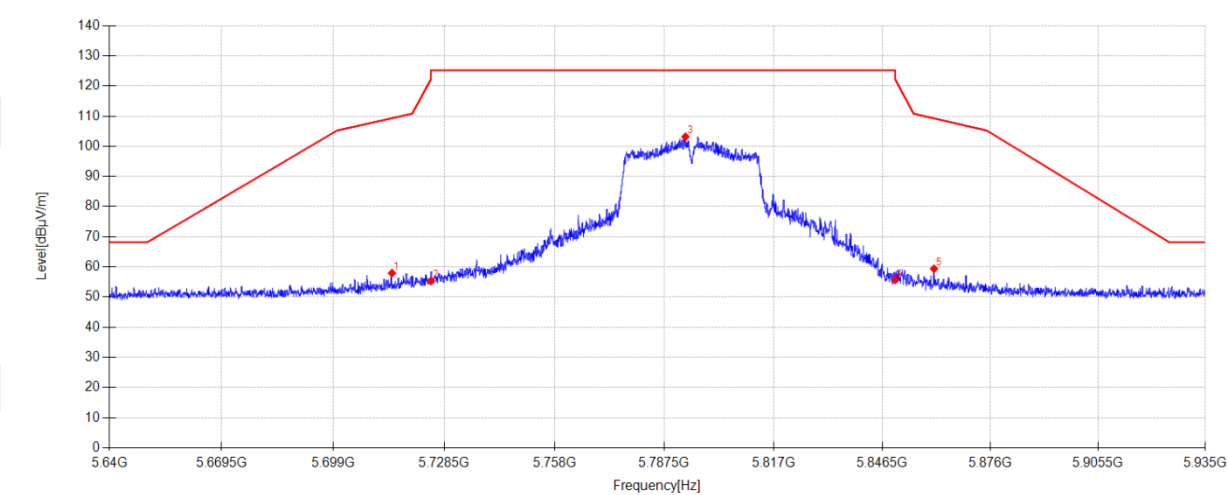

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.635	49.02	33.30	5.26	-29.66	57.92	109.30	51.38	PK	Horizontal
2	5725.000	46.24	33.45	5.26	-29.65	55.30	122.20	66.90	PK	Horizontal
3	5793.194	93.59	33.89	5.29	-29.64	103.13	125.20	22.07	PK	Horizontal
4	5850.000	46.10	33.90	5.31	-29.63	55.68	122.20	66.52	PK	Horizontal
5	5860.572	49.69	33.98	5.31	-29.63	59.35	109.24	49.89	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.