

Report on the FCC and IC Testing of the EagleBurgmann Germany GmbH & Co. KG

Model: EB-SSS-BM

In accordance with FCC 47 CFR Part 15 C
and ISED RSS-247 and ISED RSS-GEN

Prepared for: EagleBurgmann Germany GmbH & Co. KG
Äußere Sauerlacher Str. 6-10
82515 Wolfratshausen
Germany

FCC ID: ---
IC: 33904-EBSSSBM



Product Service

Add value.
Inspire trust.

COMMERCIAL-IN-CONFIDENCE

Date: 2025-10-14

Document Number: TR-713370655-01 | Revision 1

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Alexander Deese	2025-10-14	 SIGN-ID 1080531
Authorised Signatory	Alex Fink	2025-10-14	 SIGN-ID 1080858

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15 C and ISED RSS-247 and RSS-GEN.

The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Alexander Deese	2025-10-14	 SIGN-ID 1080531

Laboratory Accreditation

DAkKS Reg. No. D-PL-11321-11-03

DAkKS Reg. No. D-PL-11321-11-04

Laboratory recognition

Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration

3050A-2

Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 C:2023 and ISED RSS247 Issue 3, 2023 and ISED RSS-Gen Issue 5, 2018 + A1:2019 + A2:2021



DISCLAIMER AND COPYRIGHT

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see Testing, Certification, Validation and Verification Regulations, chapter A-3.3.
© 2025 TÜV SÜD Product Service.

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuvsud.com/imprint

Supervisory Board:
Holger Lindner (Chairman)
Board of Management:
Wolfgang Hübl (CEO)
Karl Meier
Patrick van Welij

Phone: +49 (0) 9421 56 82-0
Fax: +49 (0) 9421 56 82-199
www.tuvsud.com

TÜV SÜD Product Service GmbH
Äußere Frühlingsstraße 45
94315 Straubing
Germany



Content

1	Report Summary	2
1.1	Modification Report	2
1.2	Introduction	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Test Configuration	4
1.6	Modes of Operation	4
1.7	Deviations from Standard	4
1.8	EUT Modifications Record	5
1.9	Test Location	5
2	Test Details	6
2.1	Emission Bandwidth	6
2.2	Output Power	12
2.3	Power Spectral Density	16
2.4	Frequency Band Edge	20
2.5	Spurious emissions	23
2.6	Temperature Stability	42
3	Measurement Uncertainty	46
	TR-713370655-00 rev0 (FCC) Annex A: Test setup photos	4 pages
	TR-713370655-00 rev0 (FCC) Annex B: External photos	5 pages
	TR-713370655-00 rev0 (FCC) Annex C: Internal photos	2 pages



1 Report Summary

1.1 Modification Report

Alternations and additions to this report will be issued to the holders of each copy in the form of a complete document. The current version replaces all previous versions.

Revision	Description of changes	Date of Issue
0	First Issue	2025-05-26
1	IC added.	2025-10-14

Table 1: Report of Modifications

1.2 Introduction

Applicant	EagleBurgmann Germany GmbH & Co. KG
Manufacturer	EagleBurgmann Germany GmbH & Co. KG
Model Number(s)	EB-SSS-BM
Serial Number(s)	d992660105e18000
Hardware Version(s)	0202
Software Version(s)	---
Number of Samples Tested	1
Test Specification(s) /	FCC 47 CFR Part 15 C : 2023
Issue / Date	ISED RSS-247, Issue 3 : 2023
	ISED RSS-Gen Issue 5, 2018 + A1:2019 + A2:2021
Test Plan/Issue/Date	---
Order Number	4300107225
Date	2025-03-07
Date of Receipt of EUT	2025-04-30
Start of Test	2025-04-30
Finish of Test	2025-05-16
Name of Engineer(s)	Alexander Deese
Related Document(s)	ANSI C63.4: 2014
	ANSI C63.10: 2020
	FCC 47 CFR Part 2 J : 2023
	KDB 558074 D01 V05R02
	ISED RSS-102, Issue 6, 2023



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 C, ISSED RSS-247 and ISSED RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result
---	15.203, 15.247(b)	Antenna requirement	N/T
2.1	15.247(a)(2)	Emission Bandwidth	Pass
2.2	15.247(b)(3)	Output Power	Pass
2.3	15.247(e)	Power Spectral Density	Pass
2.4	15.247(d)	Frequency Band Edge	Pass
2.5	15.247(d), 15.205, 15.209	Spurious Emissions	Pass
---	15.207	Conducted Emissions on Mains Terminals	N/A

Table 2: Results according to FCC 47 CFR Part 15 C

Section	Specification Clause	Test Description	Result
2.1	5.2 a	Emission Bandwidth	Pass
2.2	5.4 d	Output Power	Pass
2.3	5.2 b	Power Spectral Density	Pass
2.4	5.5	Frequency Band Edge	Pass
2.5	5.5	Spurious Emissions	Pass

Table 3: Results according to ISSED RSS-247

Section	Specification Clause	Test Description	Result
2.1	6.7	Emission Bandwidth	Pass
2.5	8.9, 8.10	Spurious Emissions	Pass
2.6	8.11	Frequency Stability	Pass
---	8.8	Conducted Emissions on Mains Terminals	N/A

Table 4: Results according to RSS-Gen

N/T = not tested
N/A = not applicable



1.4 Product Information

1.4.1 Technical Description

EB Smart Seal Sensor with Thread.

<i>Frequency Band:</i>	2400.0 MHz – 2483.5 MHz
<i>Supply Voltage:</i>	2.0 V – 3.3 V, Battery supplied
<i>Supply Frequency:</i>	DC
<i>Highest clock frequency (radio part):</i>	2480 MHz
<i>Highest clock frequency (non-radio part):</i>	---
<i>Antenna Gain:</i>	3.0 dBi (Molex 146153)

1.5 Test Configuration

The EUT was 3V / DC battery supplied. The radio module was transmitting continuously. Radio frequency and power were configured via serial commands provided by the customer.

1.6 Modes of Operation

Mode 1:

Ch 11; 2405 MHz; BW 2 MHz; Power setting “Set_power 6”; Continuously modulated carrier

Mode 2:

Ch 18; 2440 MHz; BW 2 MHz; Power setting “Set_power 6”; Continuously modulated carrier

Mode 3:

Ch 26; 2480 MHz; BW 2 MHz; Power setting “Set_power 6”; Continuously modulated carrier

1.7 Deviations from Standard



1.8 EUT Modifications Record

The table below details modifications made to the EUT during the test program.
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5

1.9 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

Test Name	Name of Engineer(s)
Configuration according to 1.5 and 1.6	
Emission Bandwidth	Alexander Deese
Output Power	Alexander Deese
Power Spectral Density	Alexander Deese
Frequency Band Edge	Alexander Deese
Spurious Emissions	Alexander Deese
Temperature Stability	Alexander Deese

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Emission Bandwidth

2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(a)(2)
ISED RSS-247, Clause 5.2 a
ISED RSS-Gen, Clause 6.7

2.1.2 Equipment under Test and Modification State

EB-SSS-BM; S/N d992660105e18000; Modification state 0

2.1.3 Date of Test

2025-04-30

2.1.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	39 %

2.1.5 Specification Limits

For systems using digital modulation techniques, operating in the 902 MHz – 928 MHz, 2400 MHz – 2483.5 MHz and/or 5725 MHz – 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz

ISED RSS-GEN:

The occupied (99 %) bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSS.

2.1.6 Test Method


The test was performed according to ANSI C63.10, clauses 6.9.3 and 11.8.1



2.1.7 Test Results

Frequency Channel	6 dB Bandwidth (MHz)	Limit (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
11	1.578	0.500	2404.191	2405.769
18	1.518	0.500	2439.211	2440.729
26	1.529	0.500	2479.210	2480.739


Table 6: 6 dB bandwidth

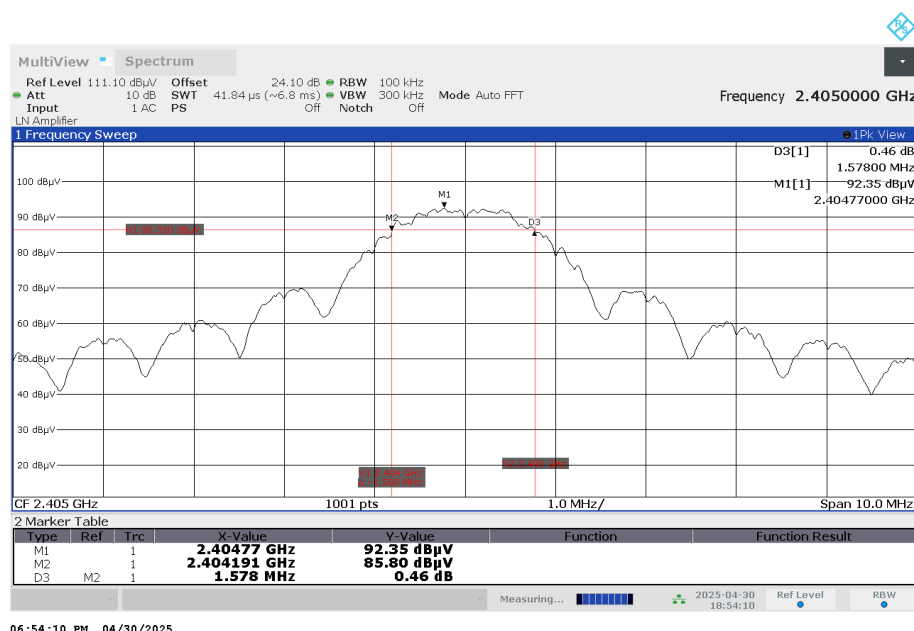


6 dB Bandwidth, Ch 11



Product Service

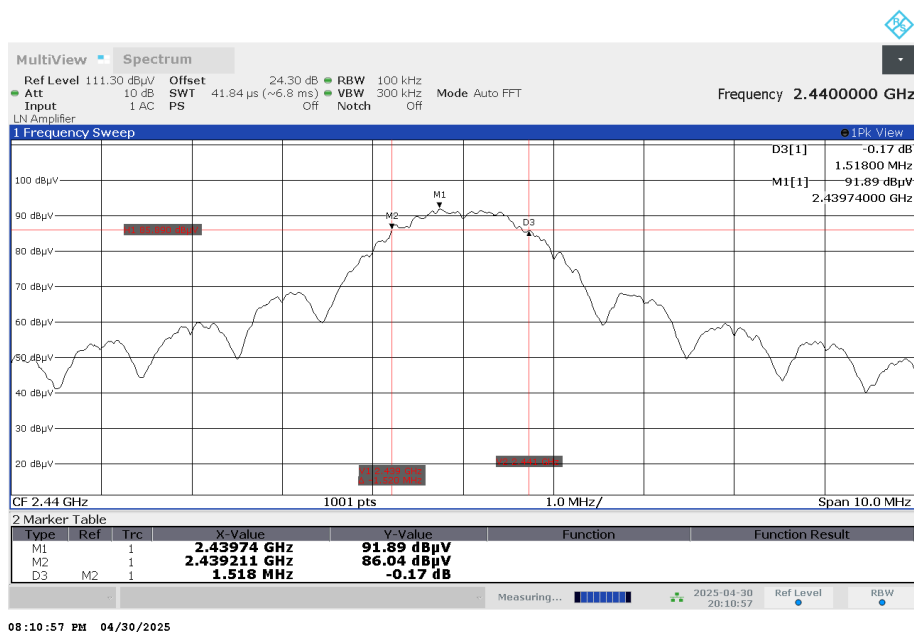

6 dB Bandwidth, Ch 18

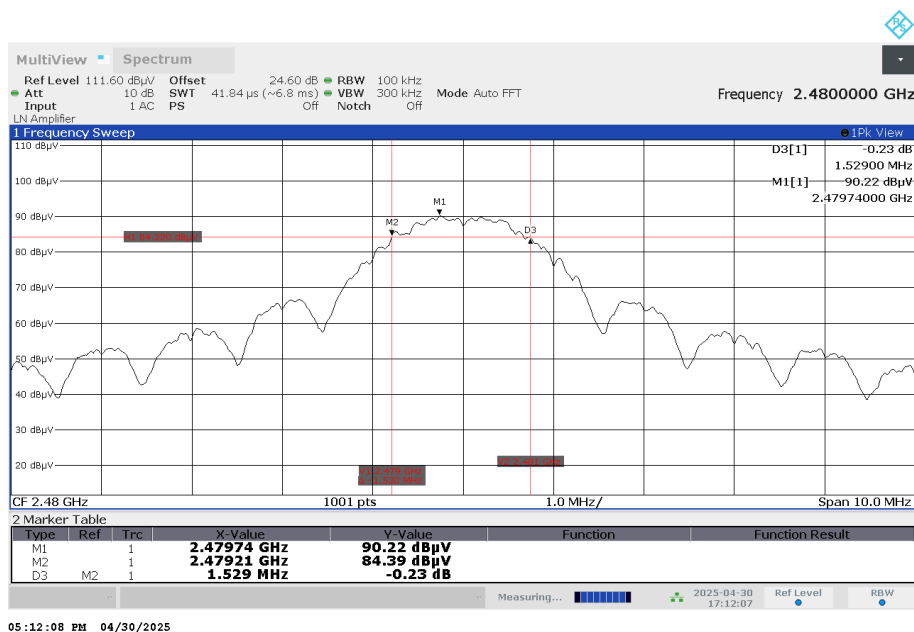


6 dB Bandwidth, Ch 26



Frequency Channel	99% Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
11	2.427205004	2403.7657	2406.1929
18	2.392109241	2438.7834	2441.1755
26	2.371654334	2478.7907	2481.1624


Table 7: 99% bandwidth

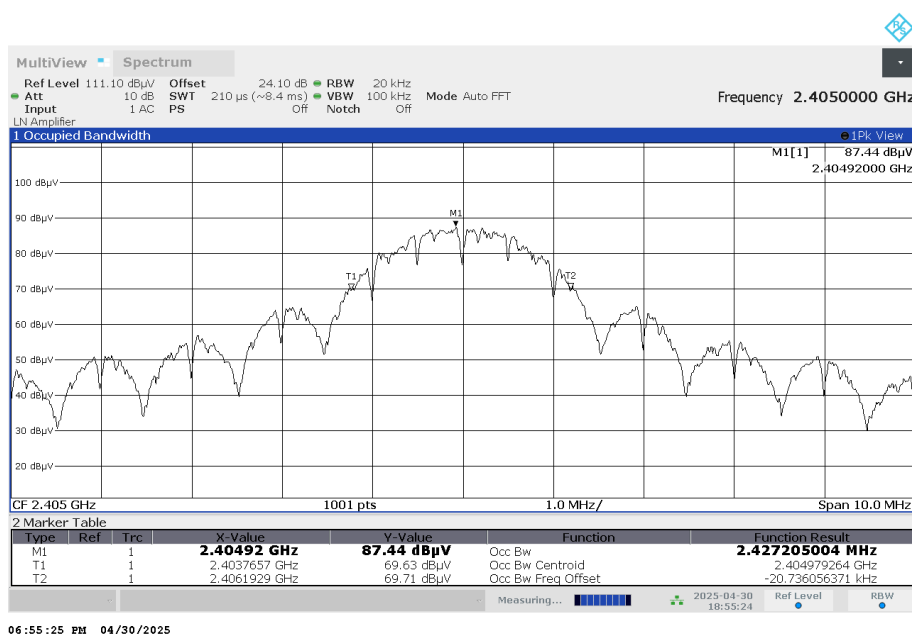


99% Bandwidth, Ch 11



Product Service

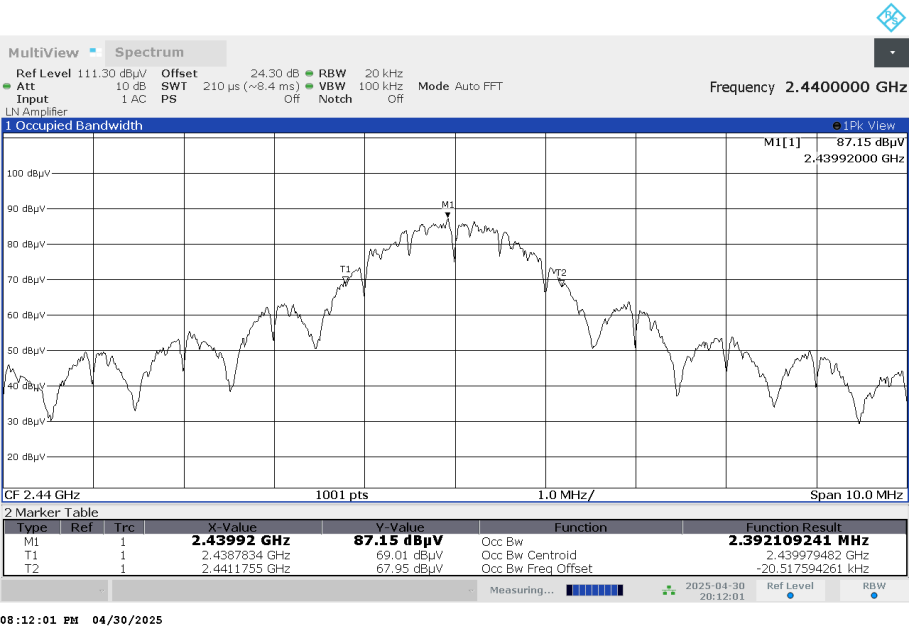

99% Bandwidth, Ch 18

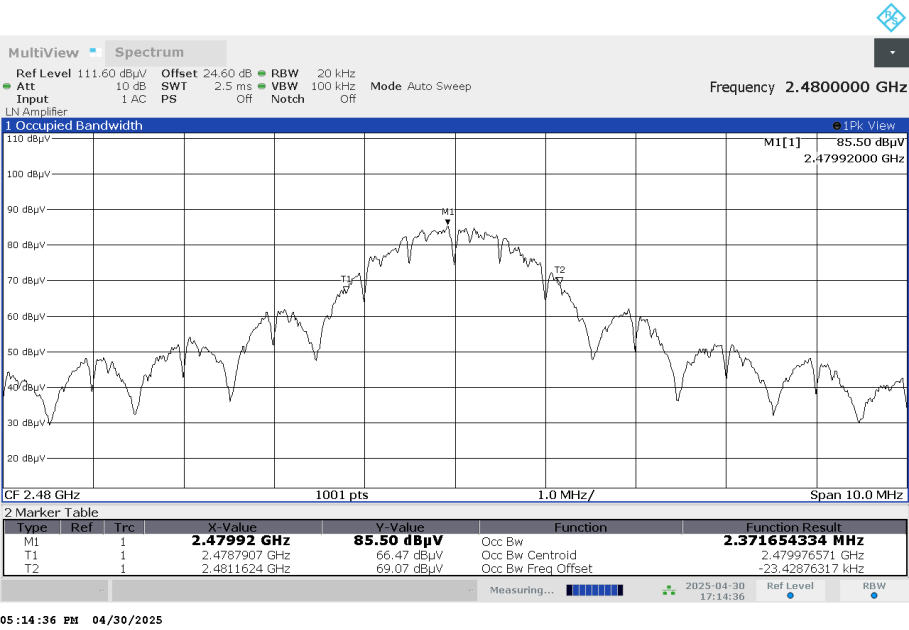

99% Bandwidth, Ch 26



2.1.8 Test Location and Test Equipment

The test was carried out in semi anechoic chamber no. 11:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
EMI test receiver	Rohde & Schwarz	ESW44	39897	12	2026-03-31
Double ridged horn antenna	Rohde & Schwarz	HF907	40089	24	2026-11-30
Semi anechoic room	Frankonia	Cabin no. 11	42961	24	2026-09-30
RF matrix cabin 11	TÜV SÜD	RF Matrix with fil- ter	47622	---	---

Table 8



2.2 Output Power

2.2.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(b)(3)
ISED RSS-247, Clause 5.4 d

2.2.2 Equipment under Test and Modification State

EB-SSS-BM; S/N d992660105e18000; Modification state 0

2.2.3 Date of Test

2025-04-30

2.2.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	39 %

2.2.5 Specification Limits

The maximum conducted output power shall not exceed 1 W (30 dBm).
The e.i.r.p. shall not exceed 4 W (36 dBm).

2.2.6 Test Method

The test was performed according to ANSI C63.10, section 11.9

Measurements were performed radiated at a distance of 3 m. Results were captured in dBμV/m and converted to dBm.




2.2.7 Test Results

Frequency Channel	Detector	Output Power (dBm)	Limit (dBm)
11	Peak	-1.749	30.0
18	Peak	-2.789	30.0
26	Peak	-4.429	30.0

Table 9: Conducted Output Power

Frequency Channel	Detector	EIRP (dBm)	Limit (dBm)
11	Peak	1.251	36.0
18	Peak	0.2112	36.0
26	Peak	-1.429	36.0


Table 10: EIRP

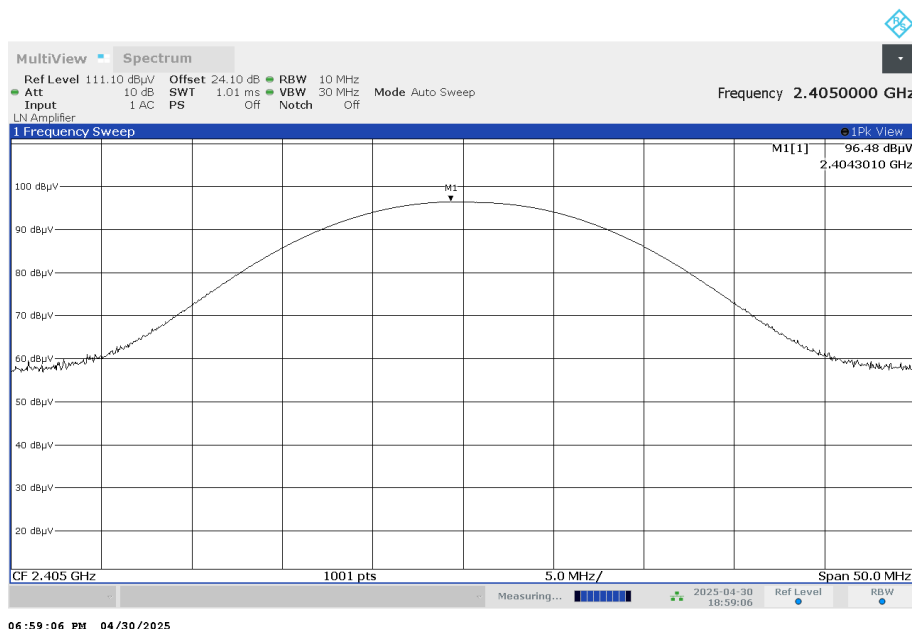


EIRP, Ch 11



Product Service

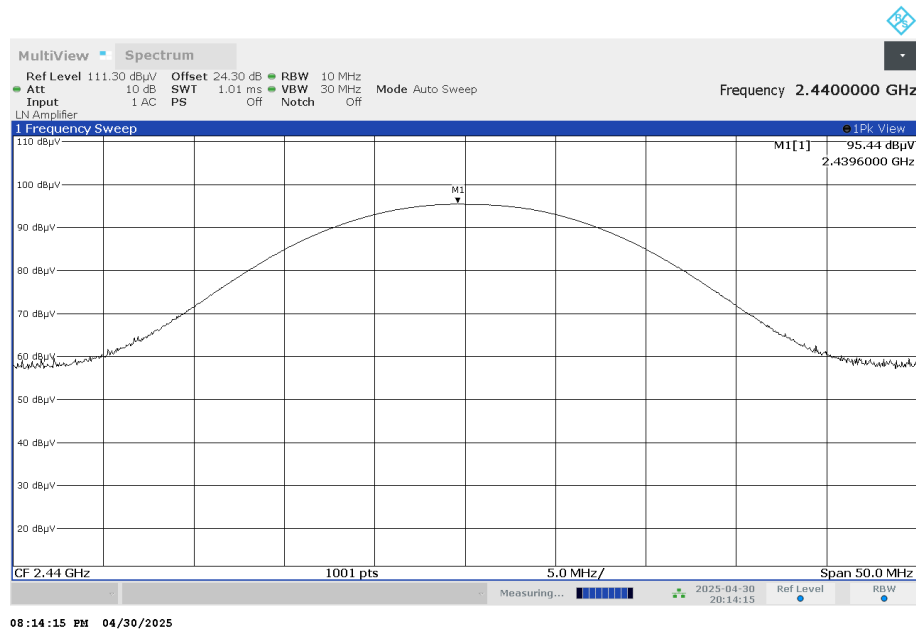

EIRP, Ch 18

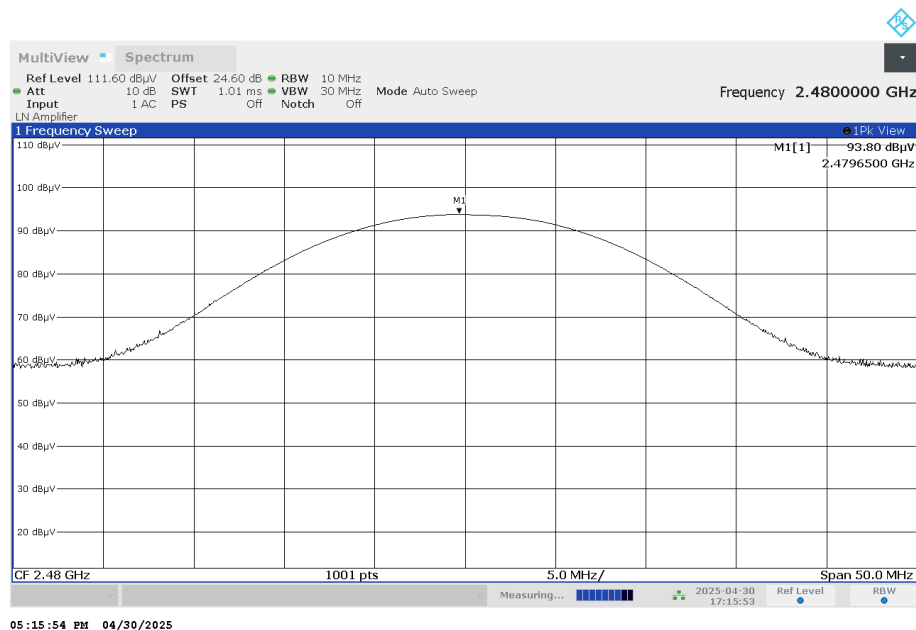

EIRP, Ch 26



2.2.8 Test Location and Test Equipment

The test was carried out in semi anechoic chamber no. 11:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
EMI test receiver	Rohde & Schwarz	ESW44	39897	12	2026-03-31
Double ridged horn antenna	Rohde & Schwarz	HF907	40089	24	2026-11-30
Semi anechoic room	Frankonia	Cabin no. 11	42961	24	2026-09-30
RF matrix cabin 11	TÜV SÜD	RF Matrix with fil- ter	47622	---	---

Table 11



2.3 Power Spectral Density

2.3.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(e)
ISED RSS-247, Clause 5.2 b

2.3.2 Equipment under Test and Modification State

EB-SSS-BM; S/N d992660105e18000; Modification state 0

2.3.3 Date of Test

2025-04-30

2.3.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	39 %

2.3.5 Specification Limits

FCC 47 CFR, section 15.257(e)
ISED RSS-247, Clause 5.2.(b)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The same method (detector) of determining the conducted output power shall be used to determine the power spectral density.

2.3.6 Test Method

The test was performed according to ANSI C63.10, section 11.10


Measurements were performed radiated at a distance of 3 m. Results were captured in dBμV/m and converted to dBm.



2.3.7 Test Results

Frequency Channel	Detector	Spectral Power Density (dBm)	Limit (dBm)
11	RMS	-10.19	8.0
18	RMS	-10.12	8.0
26	RMS	-12.17	8.0


Table 12: Power Spectral Density

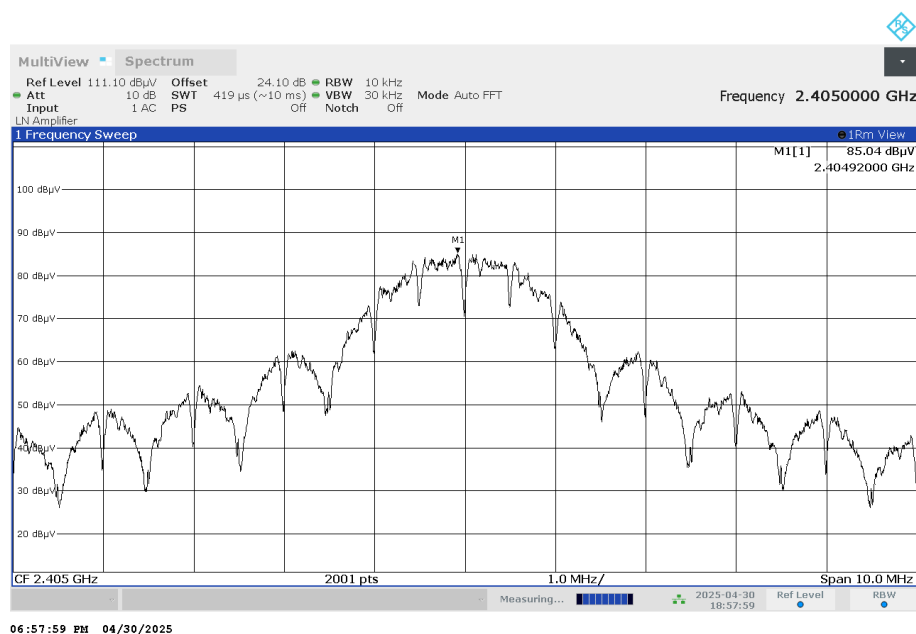


Power Spectral Density, Ch 11



Product Service

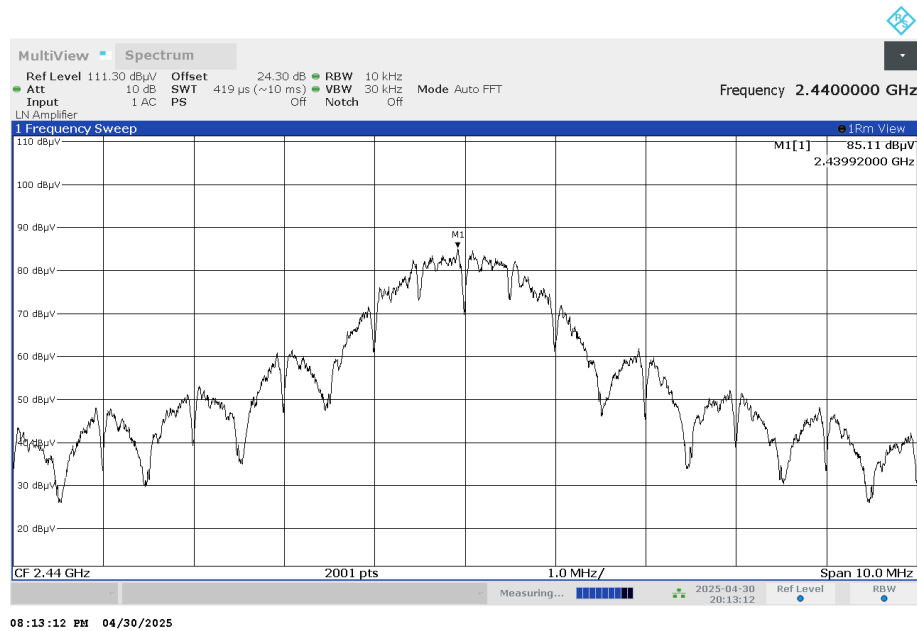

Power Spectral Density, Ch 18

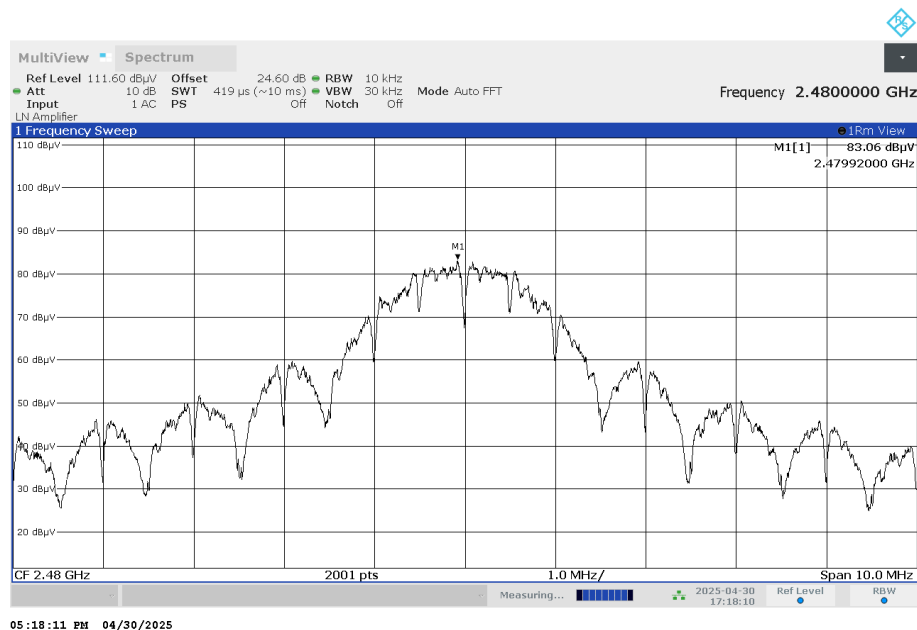

Power Spectral Density, Ch 26



2.3.8 Test Location and Test Equipment

The test was carried out in semi anechoic chamber no. 11:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
EMI test receiver	Rohde & Schwarz	ESW44	39897	12	2026-03-31
Double ridged horn antenna	Rohde & Schwarz	HF907	40089	24	2026-11-30
Semi anechoic room	Frankonia	Cabin no. 11	42961	24	2026-09-30
RF matrix cabin 11	TÜV SÜD	RF Matrix with fil- ter	47622	---	---

Table 13



2.4 Frequency Band Edge

2.4.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(d)
ISED RSS-247, Clause 5.5

2.4.2 Equipment under Test and Modification State

EB-SSS-BM; S/N d992660105e18000; Modification state 0

2.4.3 Date of Test

2025-05-16

2.4.4 Environmental Conditions

Ambient Temperature	24 °C
Relative Humidity	32 %

2.4.5 Specification Limits

In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either conducted or radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits is not required.

In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


2.4.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11




Product Service

2.4.7 Test Results

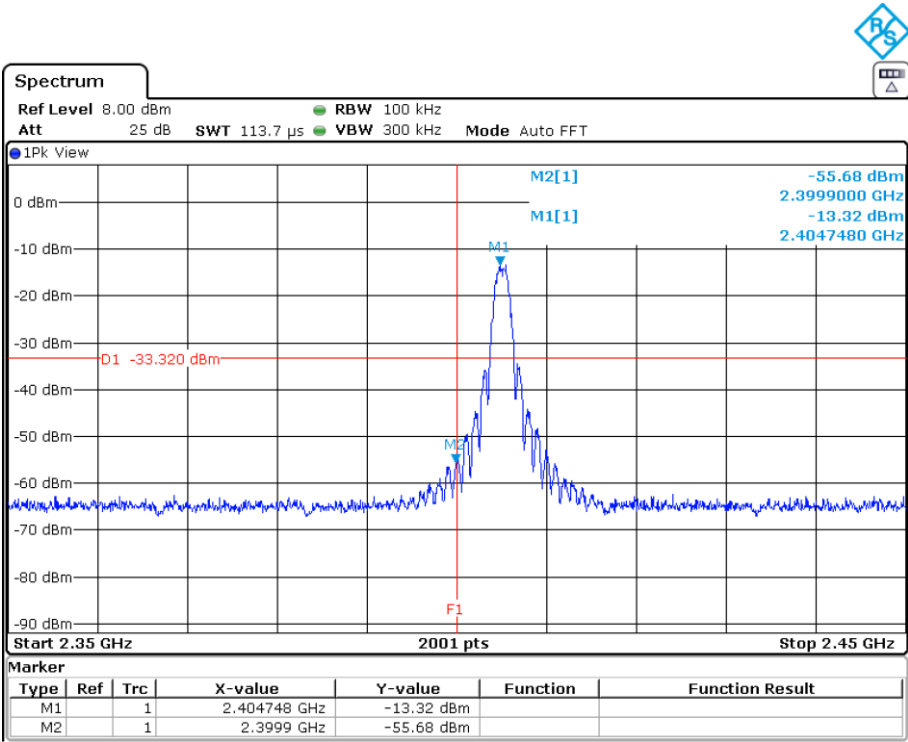

Date: 16.MAY.2025 19:05:17

Band Edge Low

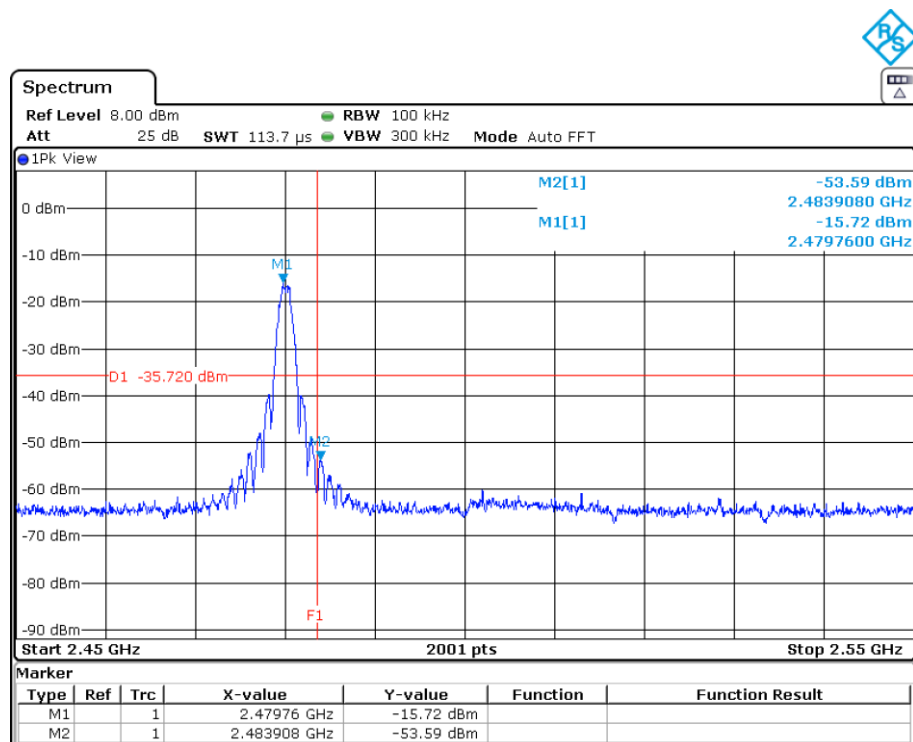

Date: 16.MAY.2025 19:08:16

Band Edge High

2.4.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Climatic test chamber	ESPEC	PL-4 J	38958	18	2026-09-06
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31

Table 14



2.5 Spurious emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.205, 15.209, 15.247(d)
ISED RSS-247, Clause 5.5
ISED RSS-Gen, Clauses 8.9 and 8.10

2.5.2 Equipment under Test and Modification State

EB-SSS-BM; S/N d992660105e18000; Modification state 0

2.5.3 Date of Test

2025-04-30 to 2025-05-07

2.5.4 Environmental Conditions

Ambient Temperature	21 °C
Relative Humidity	42 %

2.5.5 Specification Limits

In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either conducted or radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits is not required.

In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.



General radiated emission limits:					
Frequency Range (MHz)	Test distance (m)	Field strength		Field strength	
		($\mu\text{A}/\text{m}$)	($\text{dB}\mu\text{A}/\text{m}$)	($\mu\text{V}/\text{m}$)	($\text{dB}\mu\text{V}/\text{m}$)
0.009 – 0.49	300	$6.37 / f$	$20*\lg(6.37 / f)$	$2400 / f$	$20*\lg(2400 / f)$
0.49 – 1.705	30	$63.7 / f$	$20*\lg(63.7 / f)$	$24000 / f$	$20*\lg(24000 / f)$
1.705 – 30	30	0.08	$20*\lg(0.08 / f)$	30	$20*\lg(30 / f)$
30 – 88	3	---	--	100	40
88 – 216	3	--	--	150	43.5
126 – 960	3	--	--	200	46
above 960	3	--	--	500	54
Note 1: f in kHz					

Table 15 General radiated emission limits

At frequencies at or above 30 MHz, measurements may be performed at distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

2.5.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

2.5.6.1 Frequency range 9 kHz – 30 MHz

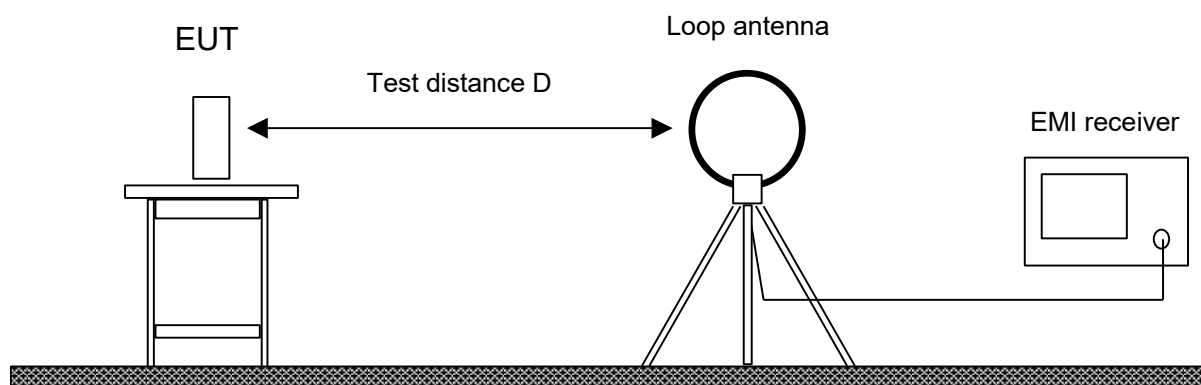


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

2.5.6.2 Frequency range 30 MHz – 1 GHz

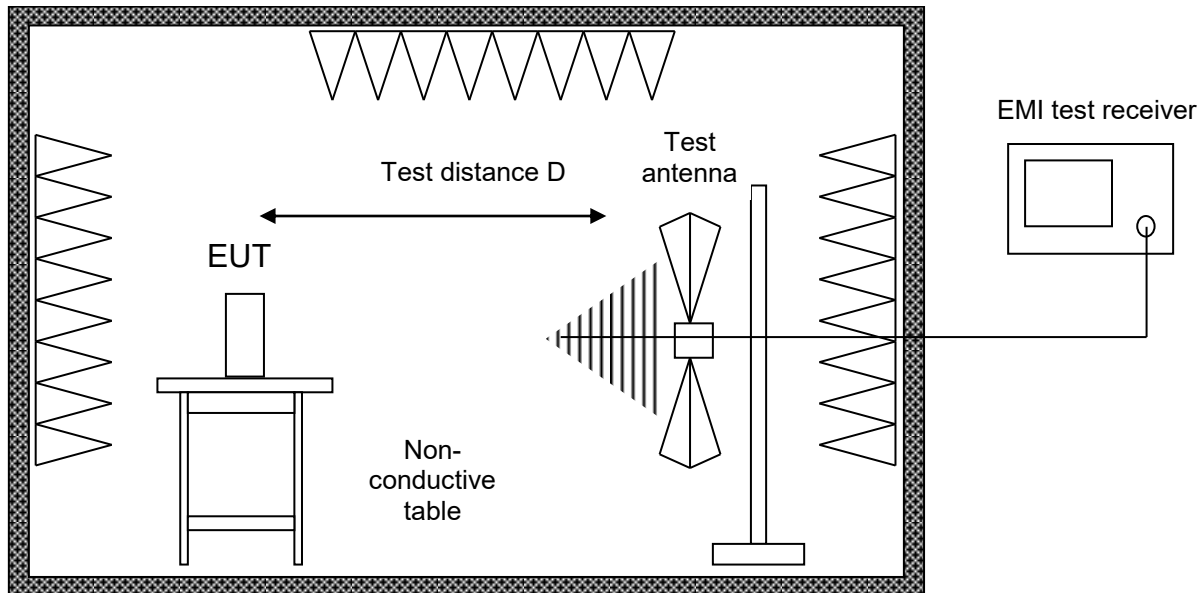

Alternate test site (semi anechoic room)


The EUT was placed on a non-conductive table, 0.8 m above the ground plane

Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz.

With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.

2.5.6.3 Frequency range above 1 GHz

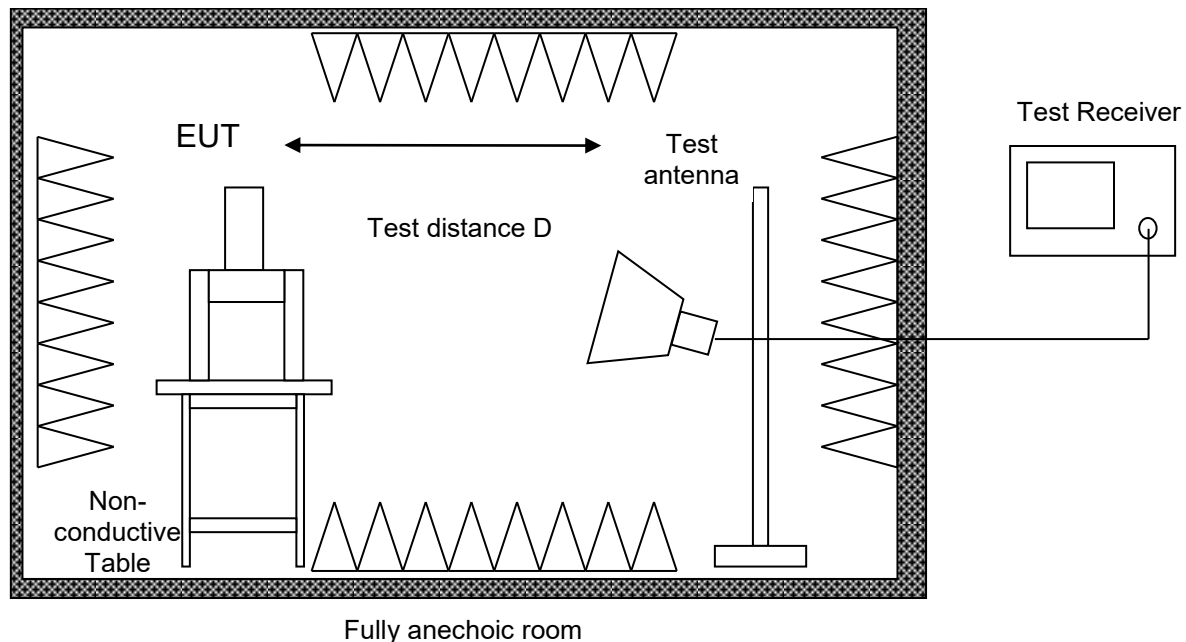

The EUT was placed on a non-conductive table, 1.5 m above the ground plane. Radiated emission tests above 1 GHz are performed in a fully anechoic room with the S_{VSWR} requirements of ANSI C63.4. Measurements are performed both in the horizontal and vertical planes of polarisation using a test receiver with the detector function set to peak and average and the resolution bandwidth set to 1 MHz. Testing above 1 GHz is performed with horn antennas with the EUT in boresight of the antenna.

For prescan tests the test receiver is set to peak- and average-detector with a bandwidth of 1 MHz. With the measurement bandwidth of the test receiver set to 1 MHz and peak- and CISPR average-detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



2.5.7 Test Results

<i>Frequency range</i>	<i>Limit applied</i>	<i>Test distance</i>
9 kHz – 30 MHz	15.209; RSS-Gen	3 m
30 MHz – 1 GHz	15.209; RSS-Gen	3 m
1 GHz – 18 GHz	15.209; RSS-Gen	1 m
18 GHz – 25 GHz	15.209; RSS-Gen	3 m

Table 16

Sample calculation:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} \\ + \text{Antenna Transducer (dB(1/m))})$$


Additional correction of limit in the frequency range 9 – 490 kHz (300 m to 3 m): +80.0 dB

Additional correction of limit in the frequency range 490 kHz – 30 MHz (30 m to 3 m): +40.0 dB

Additional correction of limit in the frequency ranges above 1 GHz (3 m to 1 m): +9.54 dB




Spurious Emissions Ch 11:

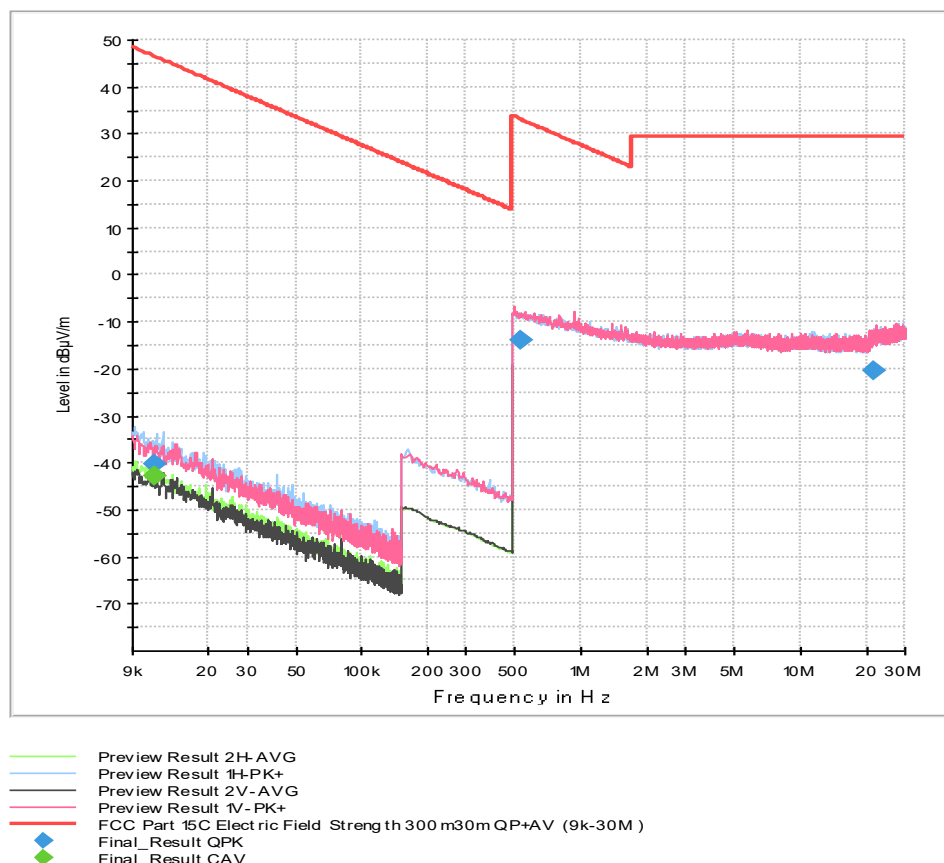

Final Results:

Frequency MHz	QuasiPeak dBμV/m	CAverage dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
0.011400	---	-42.77	46.47	89.24	1000.0	0.200	100.0	H	-105.0	-59.8
0.011400	-40.37	---	46.47	86.84	1000.0	0.200	100.0	H	-105.0	-59.8
0.526000	-14.10	---	33.19	47.28	1000.0	9.000	100.0	V	66.0	-20.6
21.435250	-20.48	---	29.54	50.03	1000.0	9.000	100.0	H	-102.0	-19.4

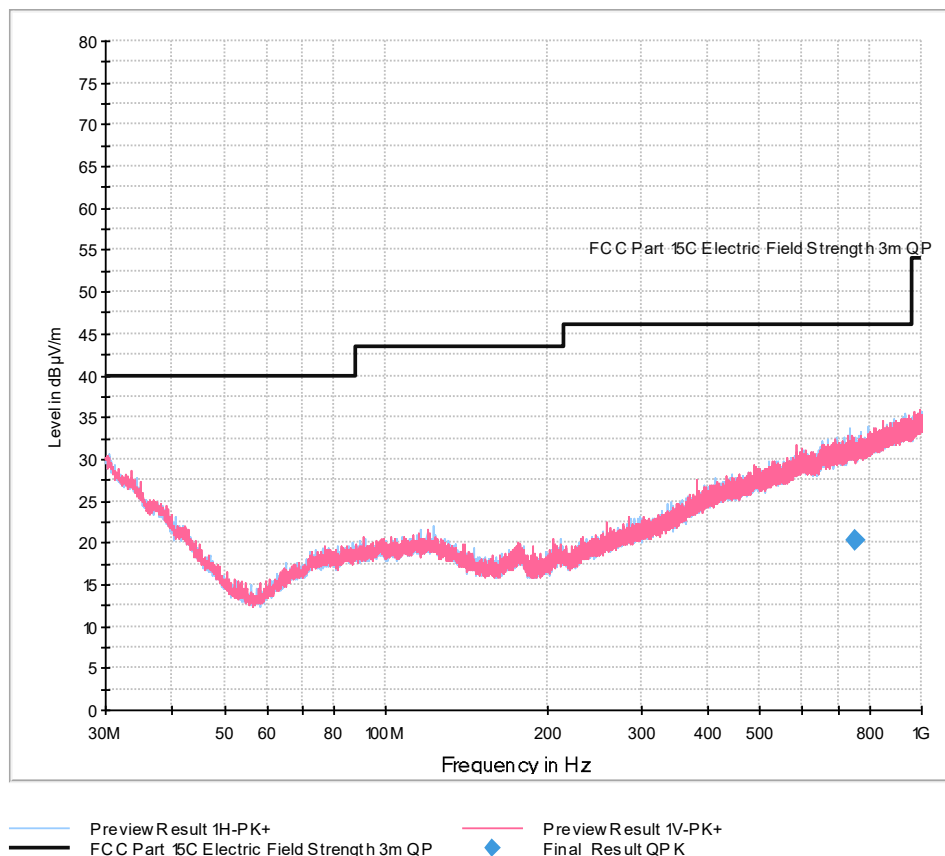


Final Results:

Frequency MHz	QuasiPeak dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
754.380000	20.34	46.02	25.68	1000.0	120.000	342.0	H	74.0	28.4




Product Service

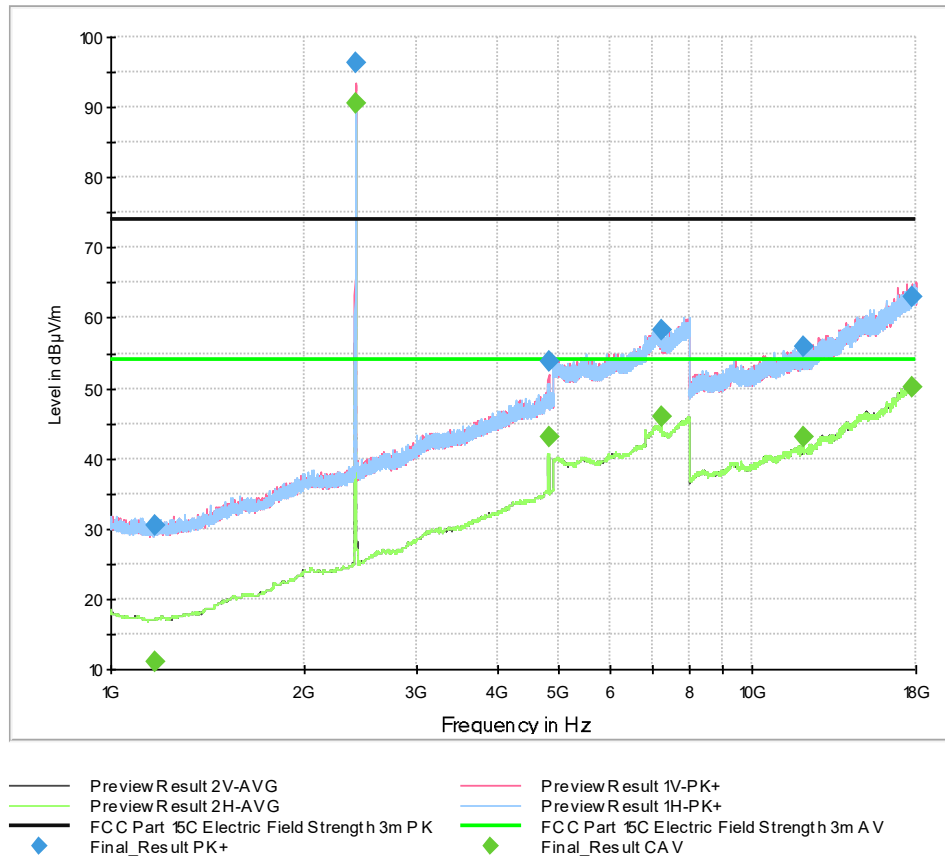

Final Results:

Frequency MHz	Max- Peak dBµV/m	CAver- age dBµV/m	Limit dBµV/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
1172.500000	30.42	---	73.98	43.56	1000.0	1000.000	210.0	V	85.0	18.1
1172.500000	---	11.18	53.98	42.80	1000.0	1000.000	210.0	V	85.0	18.1
2404.500000	96.33	---	*	*	1000.0	1000.000	150.0	V	20.0	24.1
2404.500000	---	90.65	*	*	1000.0	1000.000	150.0	V	20.0	24.1
4811.000000	---	43.08	53.98	10.90	1000.0	1000.000	203.0	V	-9.0	31.9
4811.000000	53.72	---	73.98	20.26	1000.0	1000.000	203.0	V	-9.0	31.9
7213.750000	58.38	---	73.98	15.60	1000.0	1000.000	194.0	H	-34.0	35.3
7213.750000	---	45.96	53.98	8.02	1000.0	1000.000	194.0	H	-34.0	35.3
12027.250000	---	43.03	53.98	10.95	1000.0	1000.000	206.0	V	-89.0	39.7
12027.250000	55.82	---	73.98	18.16	1000.0	1000.000	206.0	V	-89.0	39.7
17766.000000	63.12	---	73.98	10.86	1000.0	1000.000	113.0	V	105.0	48.5
17766.000000	---	50.10	53.98	3.88	1000.0	1000.000	113.0	V	105.0	48.5

*: Intentional radiation not evaluated.

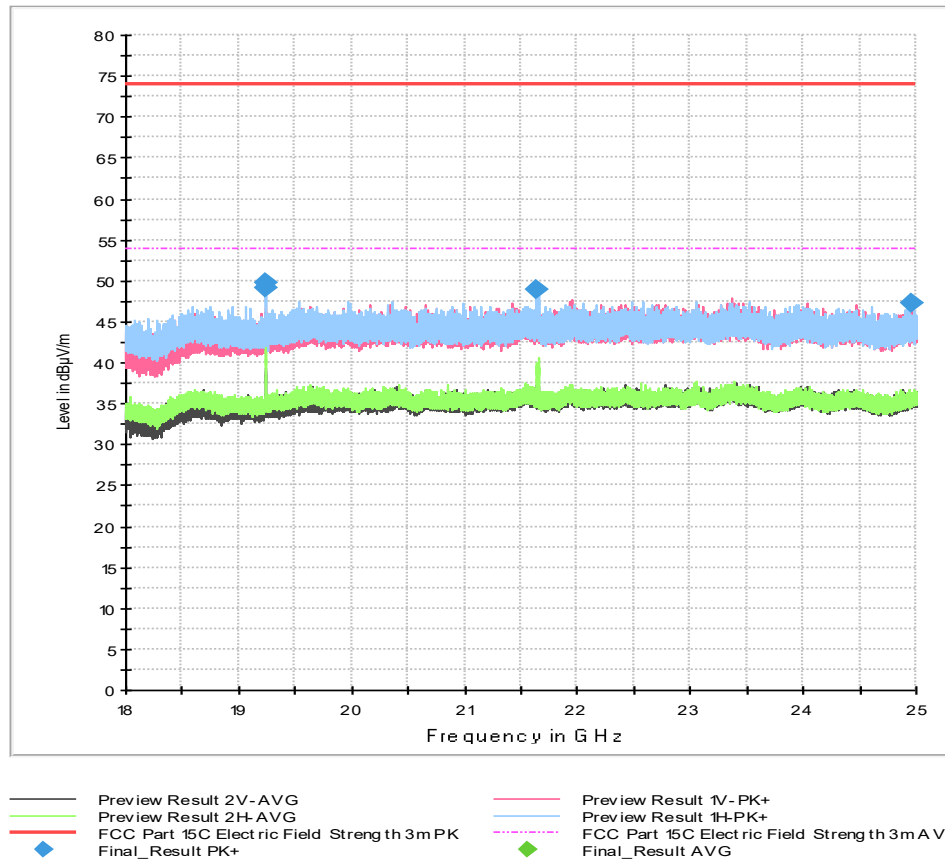


Final Results:

Frequency MHz	Max- Peak dBµV/m	Aver- age dBµV/m	Limit dBµV/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
19236.200000	---	42.66	53.98	11.32	1000.0	1000.000	200.0	H	-90.0	12.0
19236.200000	49.81	---	73.98	24.17	1000.0	1000.000	200.0	H	-90.0	12.0
19243.666667	---	42.04	53.98	11.94	1000.0	1000.000	200.0	H	-90.0	12.0
19243.822222	49.09	---	73.98	24.89	1000.0	1000.000	200.0	H	- 150.0	12.0
21640.933333	48.85	---	73.98	25.13	1000.0	1000.000	200.0	H	-90.0	12.7
21649.333333	---	40.62	53.98	13.36	1000.0	1000.000	200.0	H	-90.0	12.7
24955.666667	47.25	---	73.98	26.73	1000.0	1000.000	100.0	V	30.0	14.5
24976.355556	---	36.76	53.98	17.22	1000.0	1000.000	200.0	H	90.0	14.5



Spurious Emissions Ch 18:

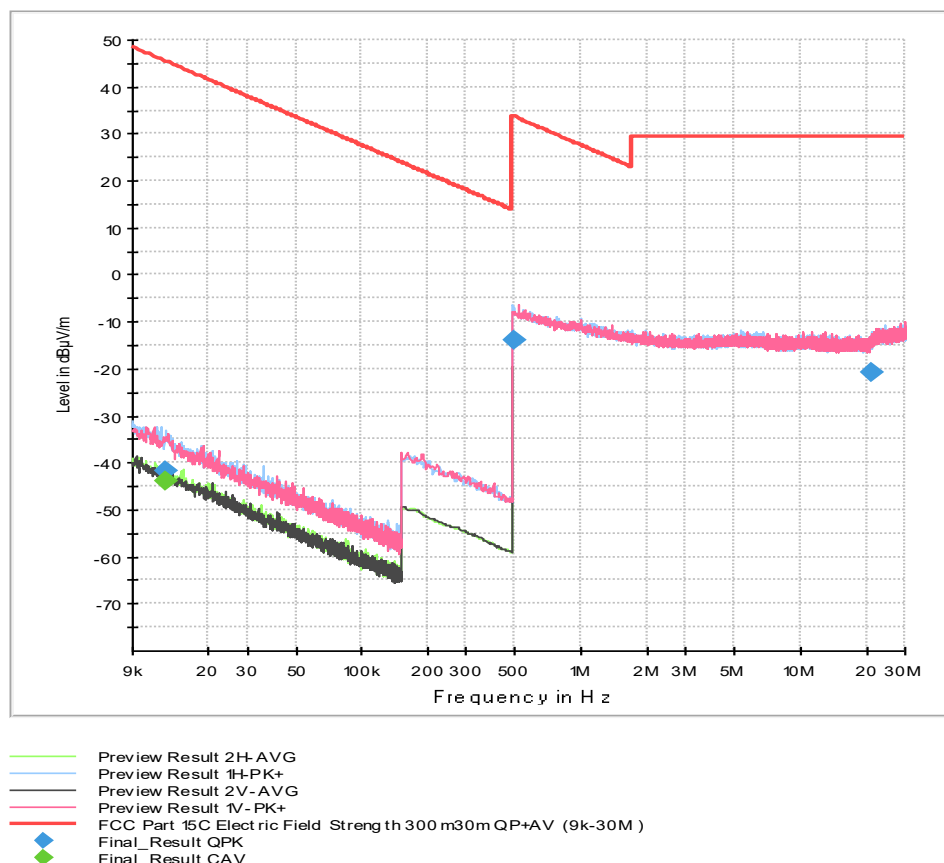


Final Results:

Frequency MHz	QuasiPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
0.012800	---	-43.84	45.46	89.30	1000.0	0.200	100.0	H	-58.0	-59.8
0.012800	-41.83	---	45.46	87.29	1000.0	0.200	100.0	H	-58.0	-59.8
0.496750	-13.79	---	33.68	47.47	1000.0	9.000	100.0	H	51.0	-20.6
21.356500	-20.66	---	29.54	50.20	1000.0	9.000	100.0	H	156.0	-19.5



Product Service

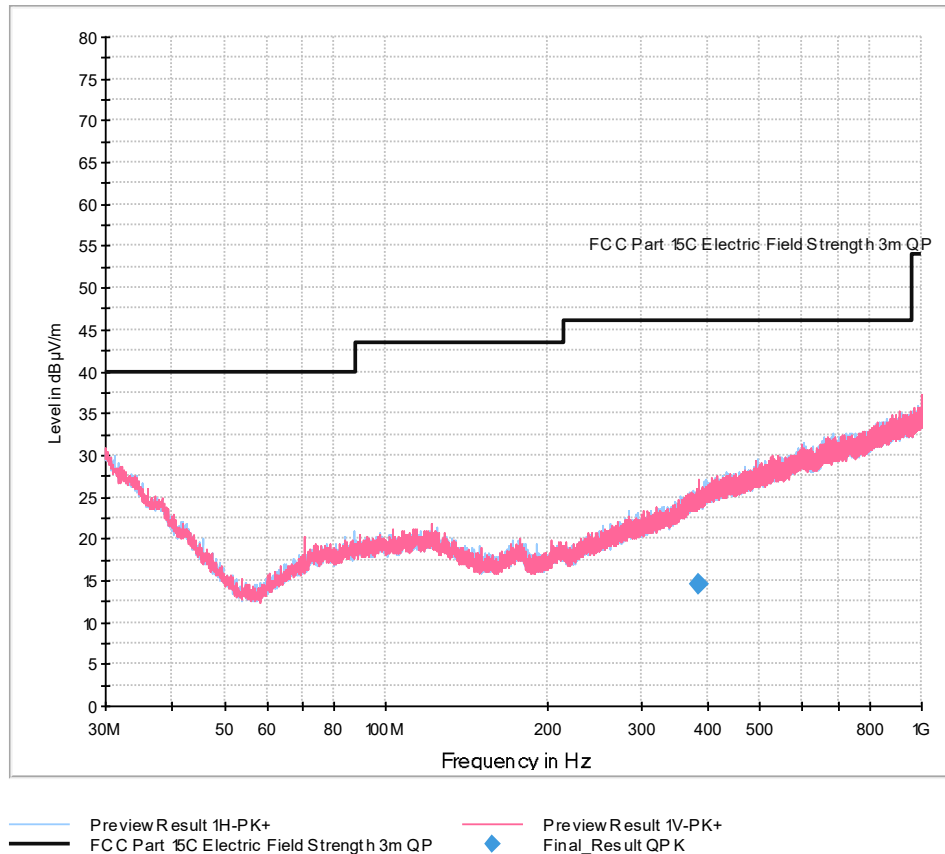


Final Results:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
382.920000	14.45	46.02	31.57	1000.0	120.000	376.0	V	-154.0	21.7



Product Service

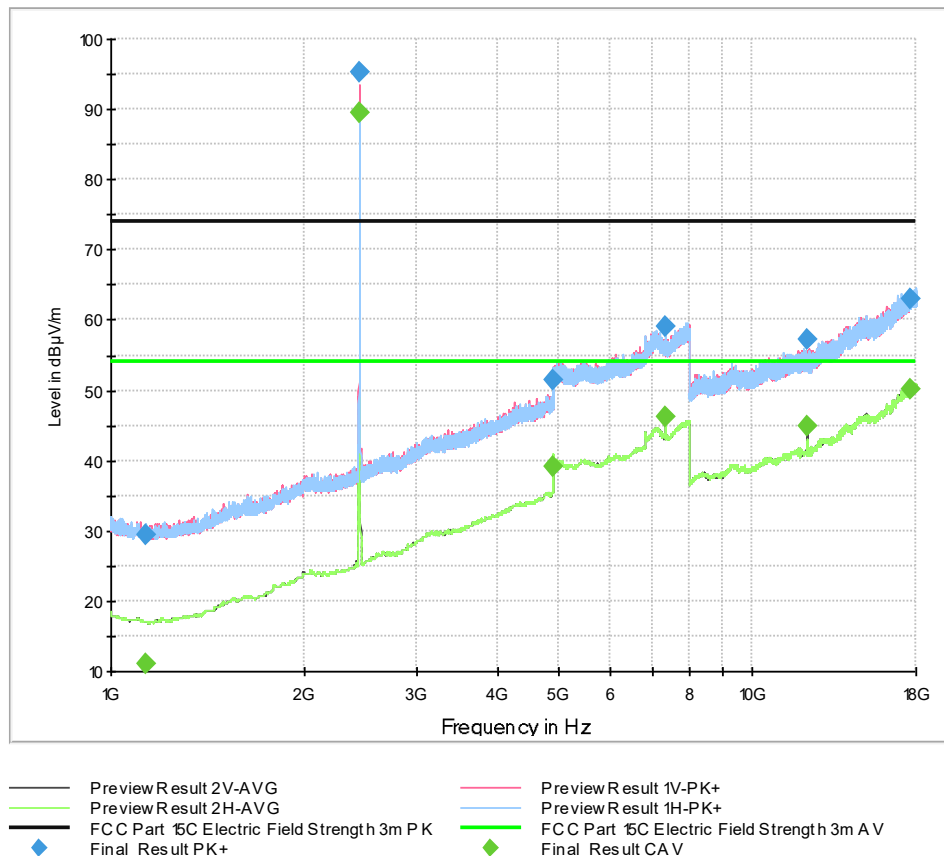


Final Results:

Frequency MHz	Max-Peak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB
1135.750000	29.53	---	73.98	44.45	1000.0	1000.000	250.0	H	-31.0	18.1
1135.750000	---	11.08	53.98	42.90	1000.0	1000.000	250.0	H	-31.0	18.1
2440.500000	---	89.38	*	*	1000.0	1000.000	146.0	V	15.0	24.3
2440.500000	95.18	---	*	*	1000.0	1000.000	146.0	V	15.0	24.3
4879.250000	---	39.16	53.98	14.82	1000.0	1000.000	195.0	H	-24.0	32.2
4879.250000	51.43	---	73.98	22.55	1000.0	1000.000	195.0	H	-24.0	32.2
7318.750000	---	46.09	53.98	7.89	1000.0	1000.000	210.0	H	-33.0	35.2
7318.750000	59.14	---	73.98	14.84	1000.0	1000.000	210.0	H	-33.0	35.2
12202.250000	---	44.85	53.98	9.13	1000.0	1000.000	210.0	V	-31.0	39.8
12202.250000	57.11	---	73.98	16.87	1000.0	1000.000	210.0	V	-31.0	39.8
17610.000000	62.90	---	73.98	11.08	1000.0	1000.000	215.0	H	-94.0	48.4
17610.000000	---	50.16	53.98	3.82	1000.0	1000.000	215.0	H	-94.0	48.4

*: Intentional radiation not evaluated.



Product Service

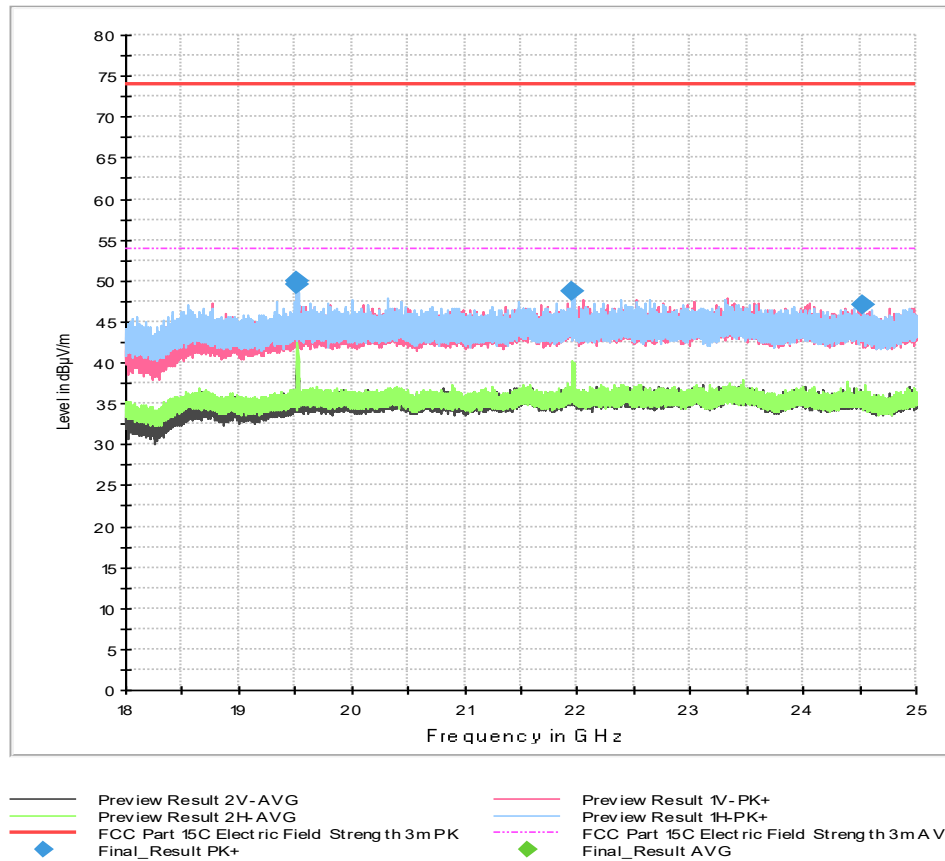


Final Results:

Frequency MHz	Max-Peak dBμV/m	Average dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
19516.044444	---	41.67	53.98	12.31	1000.0	1000.000	200.0	H	-90.0	12.2
19516.511111	49.98	---	73.98	24.00	1000.0	1000.000	200.0	H	-90.0	12.2
19523.822222	49.56	---	73.98	24.42	1000.0	1000.000	200.0	H	-90.0	12.2
19523.822222	---	42.52	53.98	11.46	1000.0	1000.000	200.0	H	-90.0	12.2
21955.311111	48.73	---	73.98	25.25	1000.0	1000.000	200.0	H	-90.0	13.1
21955.933333	---	40.26	53.98	13.72	1000.0	1000.000	200.0	H	-90.0	13.1
24534.266667	47.10	---	73.98	26.88	1000.0	1000.000	300.0	V	90.0	14.4
24548.888889	---	37.30	73.98	36.68	1000.0	1000.000	100.0	H	-30.0	14.4



Spurious Emissions Ch 26:

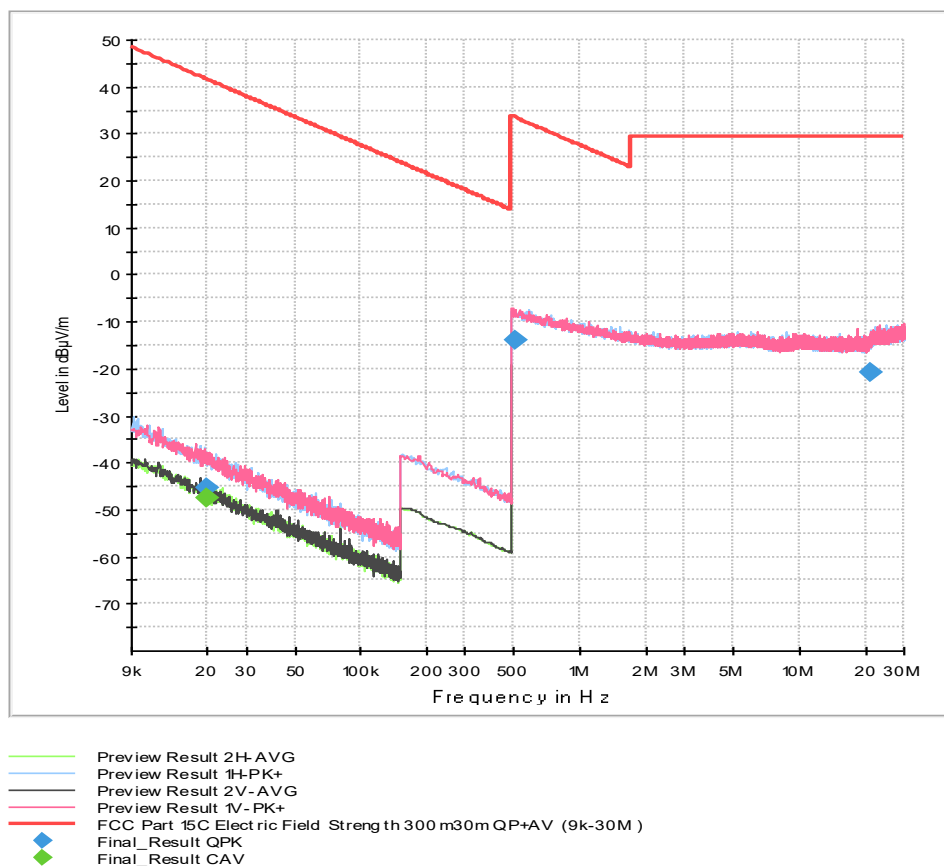


Final Results:

Frequency MHz	QuasiPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
0.020000	---	-47.57	41.58	89.15	1000.0	0.200	100.0	H	100.0	-60.1
0.020000	-45.45	---	41.58	87.03	1000.0	0.200	100.0	H	100.0	-60.1
0.503500	-13.92	---	33.56	47.49	1000.0	9.000	100.0	H	52.0	-20.6
21.262000	-20.68	---	29.54	50.22	1000.0	9.000	100.0	V	-24.0	-19.6




Product Service

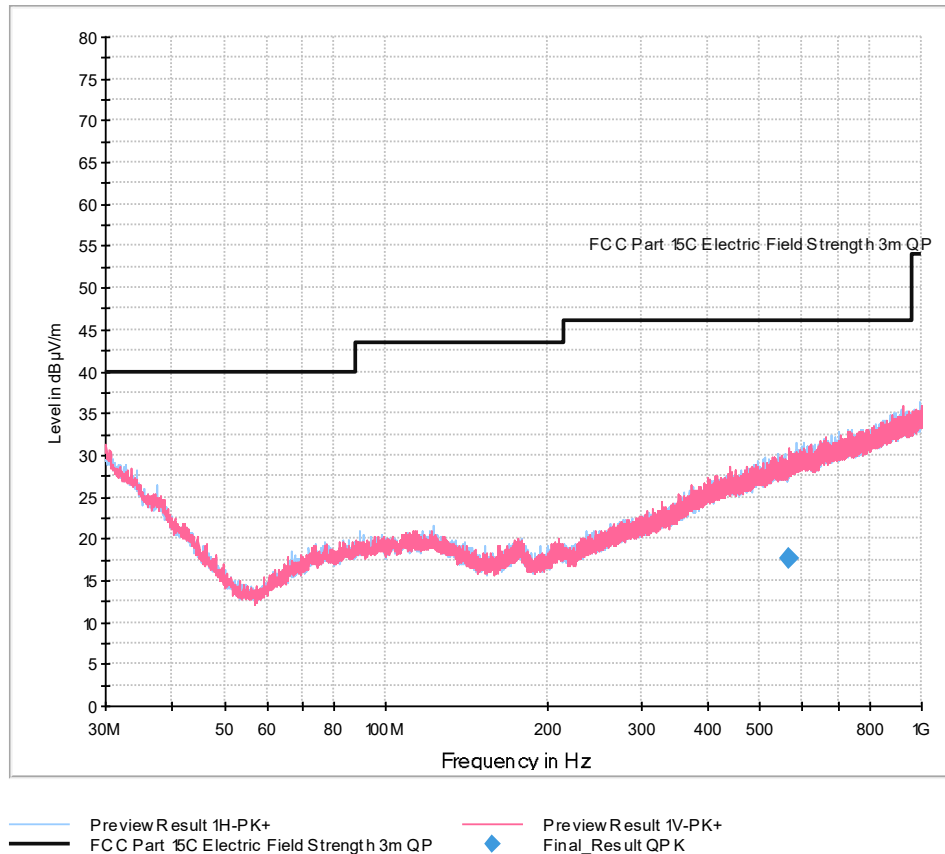

Final Results:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
566.610000	17.55	46.02	28.47	1000.0	120.000	377.0	V	180.0	25.7

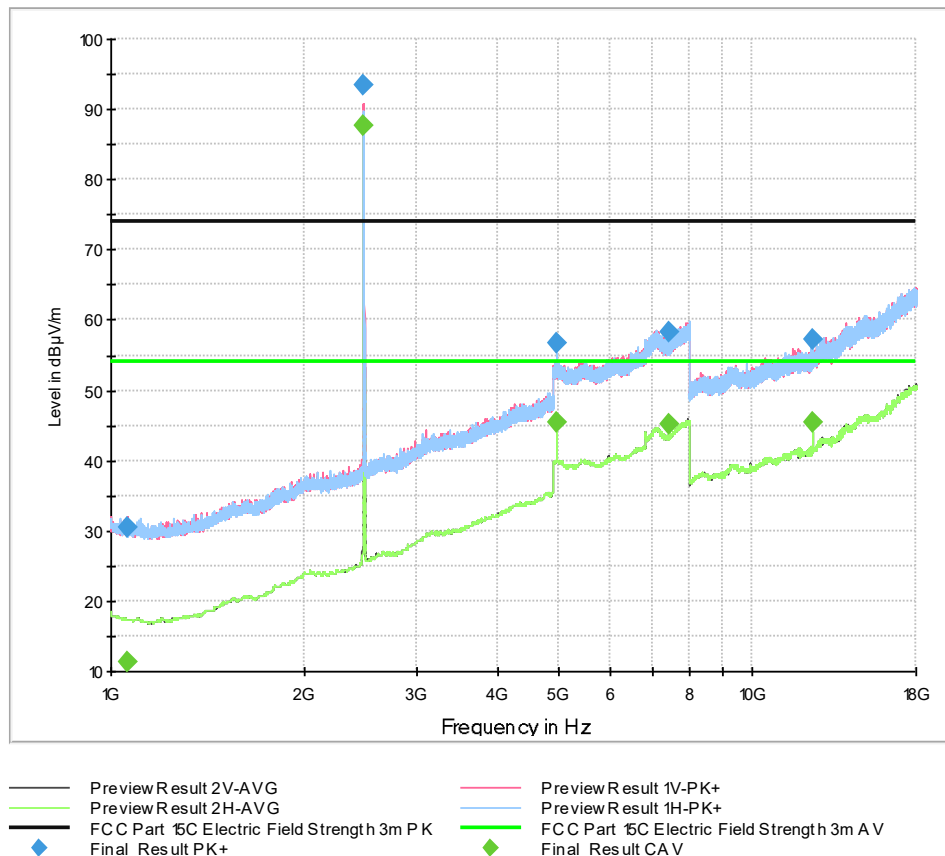


Final Results:

Frequency MHz	Max- Peak dBµV/m	CAver- age dBµV/m	Limit dBµV/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
1063.000000	---	11.33	53.98	42.65	1000.0	1000.000	150.0	V	-9.0	18.2
1063.000000	30.57	---	73.98	43.41	1000.0	1000.000	150.0	V	-9.0	18.2
2479.500000	---	87.79	*	*	1000.0	1000.000	145.0	V	20.0	24.6
2479.500000	93.47	---	*	*	1000.0	1000.000	145.0	V	20.0	24.6
4961.000000	56.78	---	73.98	17.20	1000.0	1000.000	197.0	H	-29.0	32.5
4961.000000	---	45.43	53.98	8.55	1000.0	1000.000	197.0	H	-29.0	32.5
7438.750000	58.38	---	73.98	15.60	1000.0	1000.000	215.0	H	-38.0	35.4
7438.750000	---	45.08	53.98	8.90	1000.0	1000.000	215.0	H	-38.0	35.4
12397.750000	---	45.47	53.98	8.51	1000.0	1000.000	215.0	H	26.0	40.1
12397.750000	57.30	---	73.98	16.68	1000.0	1000.000	215.0	H	26.0	40.1

*: Intentional radiation not evaluated.



Product Service

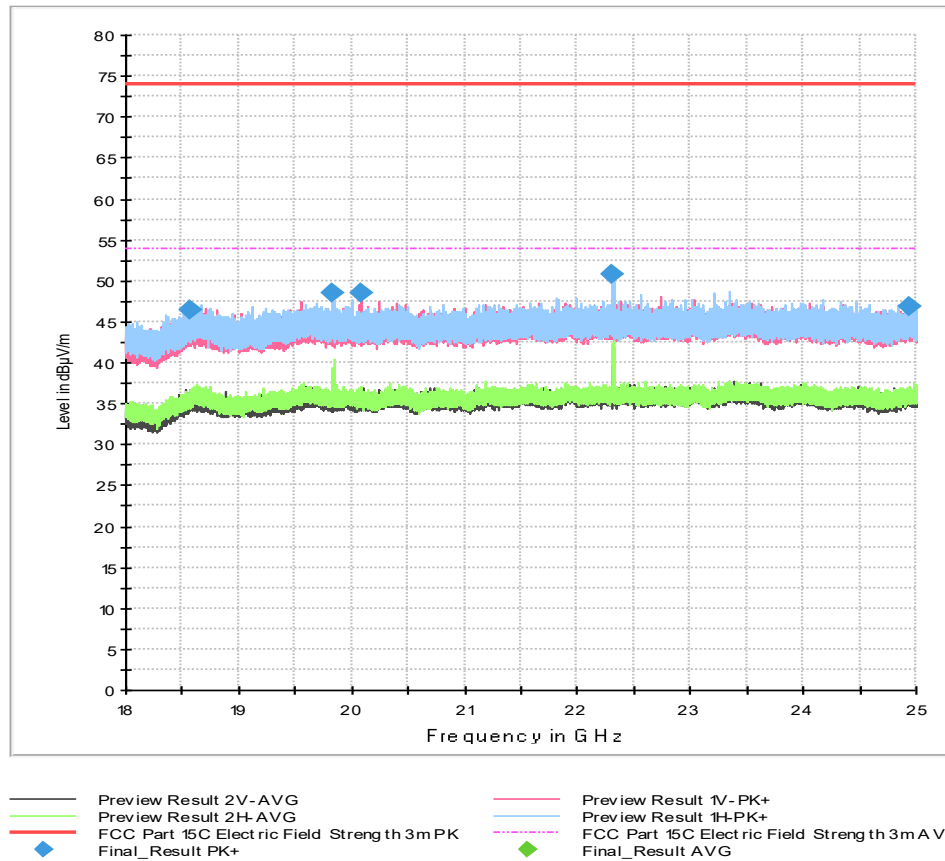

Final Results:

Frequency MHz	Max-Peak dBμV/m	Average dBμV/m	Limit dBμV/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
18565.911111	---	36.63	73.98	37.34	1000.0	1000.000	100.0	V	150.0	11.7
18568.088889	46.51	---	73.98	27.47	1000.0	1000.000	200.0	V	30.0	11.7
19836.022222	48.52	---	73.98	25.46	1000.0	1000.000	200.0	H	-90.0	12.2
19843.644444	---	40.45	53.98	13.53	1000.0	1000.000	200.0	H	-90.0	12.2
20076.511111	48.41	---	73.98	25.57	1000.0	1000.000	300.0	V	150.0	12.6
22315.422222	50.84	---	73.98	23.14	1000.0	1000.000	200.0	H	-90.0	13.2
22316.044444	---	42.76	53.98	11.22	1000.0	1000.000	200.0	H	-90.0	13.2
24897.022222	---	36.68	73.98	37.30	1000.0	1000.000	200.0	H	150.0	14.5
24933.733333	46.92	---	73.98	27.06	1000.0	1000.000	300.0	V	90.0	14.5



2.5.8 Test Location and Test Equipment

The test was carried out in semi anechoic chamber no. 11 and no. 3:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
EMI test receiver	Rohde & Schwarz	ESW44	39897	12	2026-03-31
EMI test receiver	Rohde & Schwarz	ESR7	61814	12	2025-06-30
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2026-04-30
Loop antenna	Schwarzbeck	FMZB 1519 C	72526	36	2028-01-31
ULTRALOG Antenna	Rohde & Schwarz	HL562E	61486	36	2026-04-30
Double ridged horn antenna	Rohde & Schwarz	HF907	40089	24	2026-11-30
Horn Antenna with preamplifier	Rohde & Schwarz	A-INFOMW LB- 180400H-KF + TS-LNA 1840	43661	24	2027-01-31
Semi anechoic room	Frankonia	Cabin no. 11	42961	24	2026-09-30
EMC measurement software	Rohde & Schwarz	EMC32 Emission K11 – V11.50	42986	---	---
RF matrix cabin 11	TÜV SÜD	RF Matrix with fil- ter	47622	---	---
Semi anechoic room	Frankonia	Cabin no. 3	56331	35	2025-06-07

Table 17



2.6 Temperature Stability

2.6.1 Specification Reference

ISED RSS-Gen, Clause 6.11, 8.11

2.6.2 Equipment under Test and Modification State

EB-SSS-BM; S/N d992660105e18000; Modification state 0

2.6.3 Date of Test

2025-05-16

2.6.4 Environmental Conditions

Ambient Temperature	24 °C
Relative Humidity	32 %


2.6.5 Specification Limits

If the stability of the license-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80 % of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 85 MHz – 72 MHz, 76 MHz – 88 MHz, 174 MHz – 216 MHz, and 470 MHz – 602 MHz, unless otherwise indicated.



2.6.6 Test Method

The test was performed according to ANSI C63.10, section 6.8.

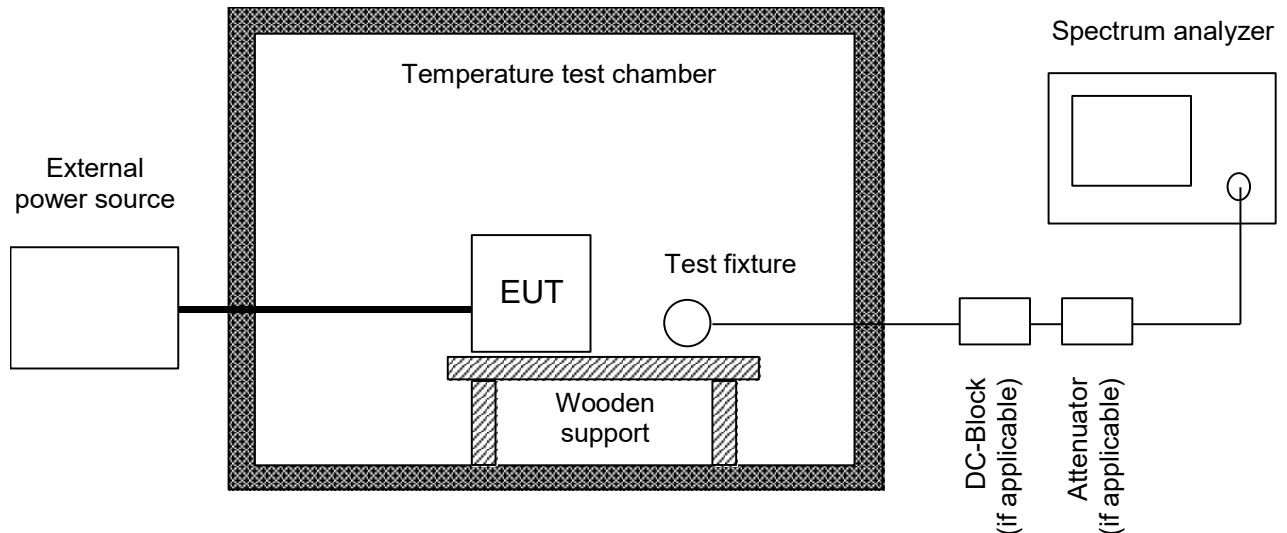

The frequency tolerance of the carrier signal is measured over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20°C . Temperature and voltage range may vary if the manufacturer states another temperature or voltage range.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as a DC block and appropriate (50 Ω) attenuators. In case where the EUT does not provide an antenna connector or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- The maximum battery voltage as delivered by a new battery or 115 % of the battery nominal voltage;
- The battery nominal voltage
- 85 % of the battery nominal voltage
- The battery operating end point voltage which shall be specified by the equipment manufacturer.

The EUT is operating providing an unmodulated carrier for frequency error tests. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point of the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1 % of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance is larger than the uncertainty of the measured frequency tolerance.



2.6.7 Test Results

<i>Temperature</i>	<i>Channel</i>	<i>Supply Voltage</i>	<i>Band Edge Left (MHz)</i>	<i>Band Edge Right (MHz)</i>	<i>Center Frequency (MHz)</i>	<i>Frequency drift (%)</i>
20 °C	11	3.0 V	2403.7657	2406.929	2405.3474	0.1444
20 °C	18	3.0 V	2438.7834	2441.1755	2439.9795	-0.0084
20 °C	26	3.0 V	2478.7907	2481.1624	2479.9766	-0.0095
20 °C	11	2.0 V	2403.7712	2406.2388	2405.0050	0.0021
20 °C	18	2.0 V	2438.7912	2441.1788	2439.9850	-0.0061
20 °C	26	2.0 V	2478.8012	2481.1489	2479.9751	-0.0101
20 °C	11	3.3 V	2403.7712	2406.2388	2405.0050	0.0021
20 °C	18	3.3 V	2438.7912	2441.1788	2439.9850	-0.0061
20 °C	26	3.3 V	2478.7912	2481.1489	2479.9701	-0.0121
- 30 °C	11	3.0 V	2403.7612	2406.2288	2404.9950	-0.0021
- 30 °C	18	3.0 V	2438.7912	2441.1988	2439.9950	-0.0020
- 30 °C	26	3.0 V	2478.8012	2481.1489	2479.9751	-0.0101
70 °C	11	3.0 V	2403.7712	2406.1988	2404.9850	-0.0062
70 °C	18	3.0 V	2438.7812	2441.1588	2439.9700	-0.0123
70 °C	26	3.0 V	2478.7912	2481.1688	2479.9800	-0.0081

Table 18



2.6.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra- tion Pe- riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2026-09-06
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31

Table 19



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Conducted Voltage Emission		
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB
Discontinuous Conducted Emission		
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB
Conducted Current Emission		
9 kHz to 200 MHz	2	± 3.5 dB
Magnetic Fieldstrength		
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB
Radiated Emission		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 5.0 dB
1 GHz to 6 GHz	2	± 4.6 dB
Test distance 10 m		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 4.9 dB
The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$		

Table 20 Measurement uncertainty based on CISPR 16-4-2



<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	2	± 5 %
Conducted Power		
9 kHz ≤ f < 30 MHz	2	± 1.0 dB
30 MHz ≤ f < 1 GHz	2	± 1.5 dB
1 GHz ≤ f ≤ 40 GHz	2	± 2.5 dB
1 MS/s power sensor (TS8997)	2	± 1.5 dB
Occupied Bandwidth	2	± 5 %
Power Spectral Density	2	± 3.0 dB
Radiated Power		
25 MHz – 6 GHz	1.96	±4.4 dB
1 GHz – 18 GHz	1.96	±4.7 dB
18 GHz – 40 GHz	1.96	±4.9 dB
40 GHz – 325 GHz	1.96	±6.1 dB
Conducted Spurious Emissions	2	± 3.0 dB
Radiated Spurious Emissions	2	± 6.0 dB
Voltage		
DC	2	± 1.0 %
AC	2	± 2.0 %
Time (automatic)	2	± 5 %
Frequency	2	± 10 ⁻⁷
The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of kp = 2, providing a level of confidence of p = 95.45%		

Table 21 Measurement uncertainty based on ETSI TR 100 028

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 (U_{CISPR}) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.



Test Name	Expanded Uncertainty
Occupied Bandwidth	±5 %
Conducted Power	
9 kHz ≤ f < 30 MHz	±1.0 dB
30 MHz ≤ f < 1 GHz	±1.5 dB
1 GHz ≤ f ≤ 40 GHz	±2.5 dB
1 MS/s power sensor (2.4 / 5 GHz band)	±1.5 dB
Power Spectral Density	±3.0 dB
Radiated Power	
25 MHz – 26.5 GHz	±6.0 dB
26.5 GHz – 66 GHz	±8.0 dB
40 GHz – 325 GHz	±10.0 dB
Conducted Spurious Emissions	±3.0 dB
Radiated Field Strength 9 kHz – 40 GHz	±6.0 dB
Voltage	
DC	± 1.0 %
AC	± 2.0 %
Time (automatic)	± 5 %
Frequency	± 10 ⁻⁷

Table 22 Decision Rule: Maximum allowed measurement uncertainty

END OF TEST REPORT