



FCC ID TEST REPORT

FCC ID: 2BTJP-C707PA

Prepared for : Jamo Holding Limited
Address : UNIT 2 UG/F BLOCK E, WAH LOK INDUSTRIAL CENTRE,
31-35 SHAN MEI STREET SHA TIN
Trade Name : 
E.U.T : Active Speaker
Model Number : C707PA

Prepared by : Keyway Testing Technology(Guangdong) Co., Ltd.
Address : Room 2102, Building 6, Dongyi Intelligent Equipment New
Energy Vehicle Park, No.30 of Tangxia District, Dongshen
Road, Tangxia Town, Dongguan, 523710, People's
Republic of China

Tel: 86-769-87182258

Fax: 86-769-87181058

Report No. : 2025122910265935-00
Date of Test: : Dec. 05, 2025 ~ Jan. 16, 2026
Date of Report : Jan. 16, 2026


Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



Applicant:	Jamo Holding Limited	
Address:	UNIT 2 UG/F BLOCK E, WAH LOK INDUSTRIAL CENTRE, 31-35 SHAN MEI STREET SHA TIN	
Manufacturer:	Jamo Holding Limited	
Address:	UNIT 2 UG/F BLOCK E, WAH LOK INDUSTRIAL CENTRE, 31-35 SHAN MEI STREET SHA TIN	
E.U.T:	Active Speaker	
Model Number:	C707PA	
Trade Name:		
Date of Receipt:	Dec. 05, 2025	
Date of Test:	Dec. 05, 2025 ~ Jan. 16, 2026	
Test Specification :	FCC CFR47 Part 15 Section 15.247 ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024	
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.	
Issue Date: Jan. 16, 2026		
Tested by:	Reviewed by:	Authorized by:
		
Hugh Zhang/Engineer	Andy Gao / Supervisor	Cherry Chen / Manager
Abbreviations: OK/P=passed fail/F=failed N/A=not applicable E.U.T=equipment under tested		
This device described above has been tested by Keyway, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of Keyway, this document may be altered or revised by Keyway, personal only, and shall be noted in the revision of the document.		

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



Revision Record				
Version	Chapter	Date	Modifier	Remark
00		Jan. 16, 2026		Original



TABLE OF CONTENTS

	Page
1 TEST SUMMARY	6
2 GENERAL PRODUCT INFORMATION	7
2.1 DESCRIPTION OF DEVICE (EUT)	7
2.2 CHANNEL LIST	8
2.3 TEST SETUP CONFIGURATION	9
2.4 TEST MODE	9
3 TEST SITES	10
3.1 TEST FACILITIES	10
3.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS	11
3.3 MEASUREMENT UNCERTAINTY	13
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 CONDUCTED EMISSION	14
4.1 E.U.T. OPERATION	14
4.2 EUT SETUP	14
4.3 MEASUREMENT PROCEDURE	14
4.4 CONDUCTED EMISSION LIMIT	15
4.5 MEASUREMENT DESCRIPTION	15
4.6 CONDUCTED EMISSION TEST RESULT	15
5 RADIATED SPURIOUS EMISSIONS	18
5.1 EUT OPERATION	18
5.2 TEST SETUP	19
5.3 SPECTRUM ANALYZER SETUP	20
5.4 TEST PROCEDURE	20
5.5 SUMMARY OF TEST RESULTS	21
6 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	28
6.1 TEST SETUP	28
6.2 TEST PROCEDURE	28
6.3 TEST RESULT	28
7 6DB&99% BANDWIDTH MEASUREMENT	29

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



7.1 TEST SETUP	29
7.2 TEST PROCEDURE	29
7.3 TEST RESULT	29
8 MAXIMUM PEAK OUTPUT POWER	30
8.1 TEST SETUP	30
8.2 TEST PROCEDURE	30
8.3 TEST RESULT	30
9 POWER SPECTRAL DENSITY	31
9.1 TEST SETUP	31
9.2 TEST PROCEDURE	31
9.3 TEST RESULT	31
10 ON TIME AND DUTY CYCLE	32
10.1 STANDARD APPLICABLE	32
10.2 MEASURING INSTRUMENTS AND SETTING	32
10.3 TEST SETUP	32
10.4 TEST PROCEDURES	32
10.5 EUT OPERATION DURING TEST	32
10.6 TEST RESULT	32
11 ANTENNA APPLICATION	33
11.1 ANTENNA REQUIREMENT	33
11.2 RESULT	33
12 TEST SETUP AND EUT PHOTOS	34



1 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB&99% Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203 15.247 (c)	PASS

Remark:

“N/A” denotes test is not applicable in this Test Report.



2 GENERAL PRODUCT INFORMATION

2.1 Description of Device (EUT)

Product Name	:	Active Speaker
Model Name	:	C707PA
Sample ID	:	33000258641
Sample(s) Status:	:	Engineer sample
Additional model	:	N/A
Model difference	:	N/A
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	40 channels
Antenna Type	:	PCB Antenna
Antenna Gain	:	0 dBi
Type of Modulation	:	GFSK
Power supply	:	100-240V~ 50/60Hz
Hardware Version	:	V 1.0
Software Version	:	V 3.0
Remark: The information in this section is provided by the applicant or manufacturer, Kayway is not liable to the accuracy, suitability, reliability or/and integrity of the information.		



2.2 Channel List

The EUT has been tested under its typical operating condition.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Frequency and Channel list :

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		




Test Frequency and Channel :


Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	19	2440	39	2480

2.3 Test Setup Configuration


Conducted Emission



Radiated Emission



Conducted Spurious

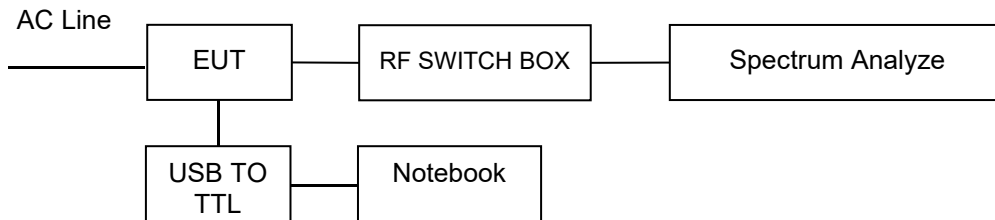

2.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	BlueTest3
Power level setup	10.0dBm



3 TEST SITES

3.1 Test Facilities

Site Description

EMC Lab. : Certificated by Nemko
Registration No.: ELA 814
Date of registration: September 25, 2024

Certificated by CMA China
Registration No.: 202319016955
Date of registration: July 23, 2024

Certificated by A2LA
Certificate Number: 7404.01
Valid To: March 31, 2027

Accredited by Innovation, Science and Economic Development Canada, May 08, 2025
The Conformity Assessment Body Identifier is CN0186
Company Number: 33959

Name of Firm : Keyway Testing Technology (Guangdong) Co., Ltd.

Site Location : Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China



3.2 List of Test and Measurement Instruments

Equipment	Manufacturer	Model No.	Serial No.	Date of Cal.	Valid until
For conducted emission at the mains terminals and signal port test 944 Shielded Room					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-089	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr 14, 25	Apr 13, 26
ArtificialMains Network	Rohde&Schwarz	ENV216	101314	Mar 05, 25	Mar 04, 26
RF Cable	FUJIKURA	3D-2W	KWET-030	Apr 14, 25	Apr 13, 26
Socket	Gongniu	KWET-003A1	KWET-003A1	Feb 21, 25	Feb 20, 26
For radiated emission test (30MHz-1GHz)966 Chamber 2					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-087	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101178	Apr 14, 25	Apr 13, 26
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00829	May 10, 25	May 09, 26
3m Semi-anechoic Chamber	YIHENDIANZI	966	YH-KW-966-02	Mar 07, 26	Mar 06, 29
RF Cable	EMC Instruments	EMCCFD400-NM-NM-2000	240307	Apr 14, 25	Apr 13, 26
RF Cable	EMC Instruments	EMCCFD400-NM-NM-9000	240309	Apr 14, 25	Apr 13, 26
For radiated emission test (Above 1GHz)966 Chamber 2					
Test Software	FARAD	EZ-EMC Ver.FARAD-3A1+	KWET-087	/	/
EMI Test Receiver	Rohde&Schwarz	ESCI	101178	Apr 14, 25	Apr 13, 26
Spectrum Analyzer	Agilent	N9020A	MY56070279	Apr 14, 25	Apr 13, 26
Spectrum analyzer	R&S	FSV 40	101059	Nov 06, 25	Nov 05, 26
Horn Antenna	DAZE	ZN30701	11003	Jul 27, 25	Jul 26, 26
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1368	May 16, 25	May 15, 26
Signal Amplifier	WCS Technology	DLNA-18000-40000	KWET-138	Apr 19, 25	Apr 18, 26
3m anechoic Chamber	YIHENDIANZI	966	YH-KW-966-02	Mar 07, 25	Mar 06, 29
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-1000	240301	Apr 14, 25	Apr 13, 26
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-2000	240302	Apr 14, 25	Apr 13, 26
RF Cable(1G-18GHz)	EMC Instruments	EMC105-SM-SM-9000	240303	Apr 14, 25	Apr 13, 26
RF Cable(18G-40GHz)	WCS Technology	CA360P-29M29M-1M	W2415130001	Apr 14, 25	Apr 13, 26
RF Cable(18G-40GHz)	WCS Technology	CA360P-29M29M-9M	W2415110001	Apr 14, 25	Apr 13, 26
For conducted emission test (RF)					
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Apr 14, 25	Apr 13, 26
RF SWITCH BOX	CSKJ	SMU-1003	KWET-047	Apr 14, 25	Apr 13, 26

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



Attenuator	R&S	ESH3-Z2	102696	Apr 14, 25	Apr 13, 26
Power Meter	Agilent	E4418B	MY41294414	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1m-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1m-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1.5FT-SMSM+	1623	May 15, 25	May 14, 26
RF sma cable	Keysight	ULC-1.5FT-SMSM+	1623	May 15, 25	May 14, 26
Coupler	Keysight	ZHDC-10-63-S+	SF331801603	May 15, 25	May 14, 26
Test Software	CSKJ	CS-305X	KWET-149	/	/



3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Duty Cycle	$\pm 2\%$
Spurious emissions, conducted	$\pm 0.21\text{dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Radiated Emission(25GHz~40GHz)	$\pm 3.38\text{dB}$

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Active Speaker	Jamo	C707PA	N/A	EUT
E-2	Notebook	lenovo	B40-80	MP07F6JD	Auxiliary
E-3	USB TO TTL	MH	USB to TTL	N/A	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

4 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10:2020
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


4.1 E.U.T. Operation

Operating Environment :

Temperature	: 23.5
Humidity	: 54
Atmospheric Pressure	: 1015

4.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2020.

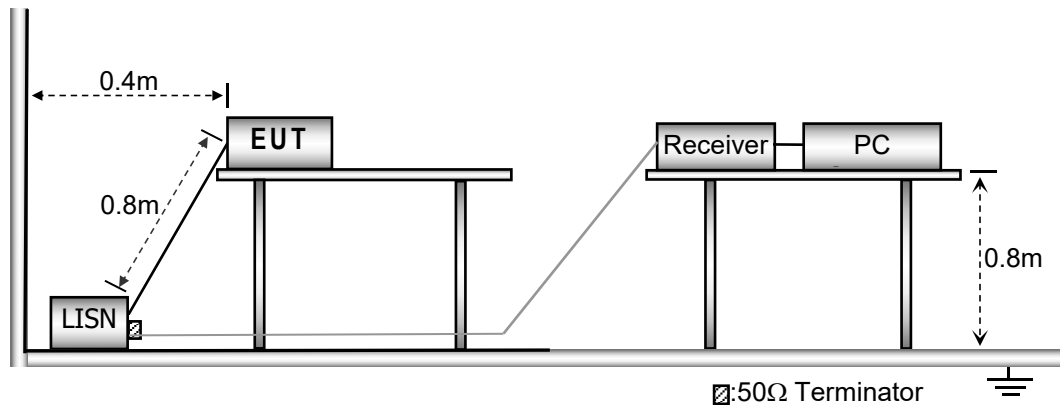

4.3 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.



4.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.5 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

4.6 Conducted Emission Test Result

The report only presents the worst-case data.



M/N : C707PA
Operation Mode : TX GFSK Low Channel
Test Voltage : AC 120V/60Hz
Test Specification : Line

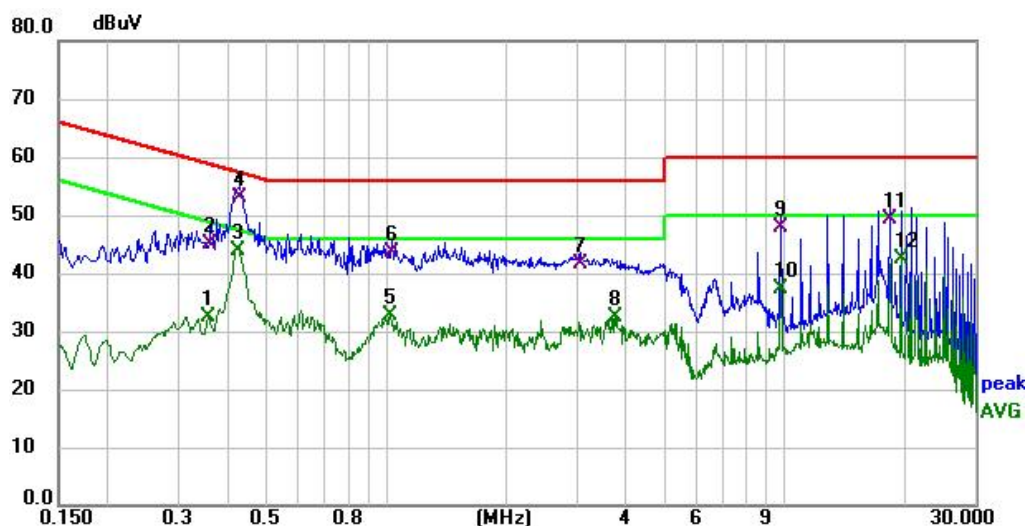

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.357	22.43	10.10	32.53	48.80	-16.27	AVG
2	0.361	34.99	10.10	45.09	58.71	-13.62	QP
3 *	0.423	33.66	10.08	43.74	47.39	-3.65	AVG
4	0.426	42.89	10.09	52.98	57.33	-4.35	QP
5	1.018	22.47	10.15	32.62	46.00	-13.38	AVG
6	1.027	33.43	10.13	43.56	56.00	-12.44	QP
7	3.061	31.41	10.28	41.69	56.00	-14.31	QP
8	3.745	22.09	10.46	32.55	46.00	-13.45	AVG
9	9.780	37.80	9.98	47.78	60.00	-12.22	QP
10	9.780	27.36	9.98	37.34	50.00	-12.66	AVG
11	18.340	38.84	10.56	49.40	60.00	-10.60	QP
12	19.560	31.85	10.63	42.48	50.00	-7.52	AVG

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+AMP Factor-Preamplifier Factor

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China


Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



M/N : C707PA
Operation Mode : TX GFSK Low Channel
Test Voltage : AC 120V/60Hz
Test Specification : Neutral

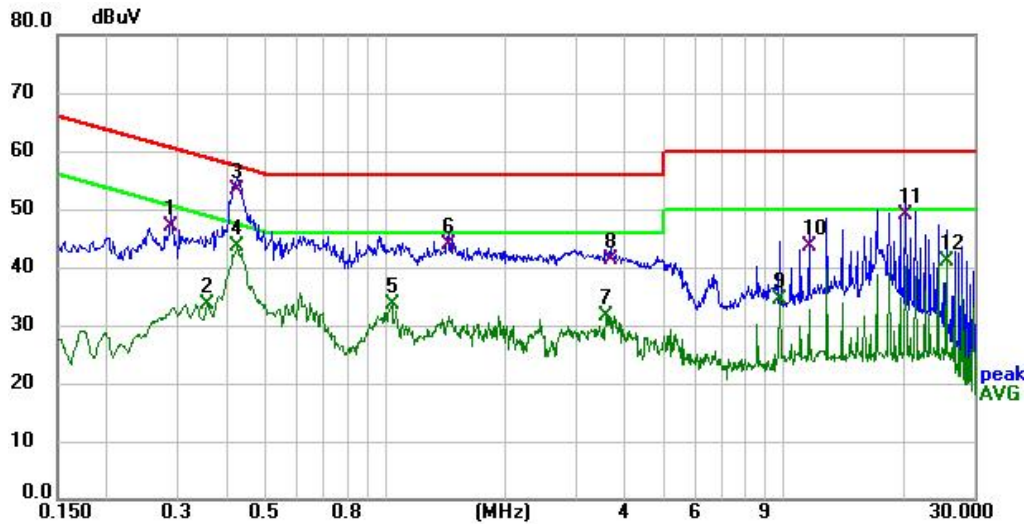

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.288	37.02	10.07	47.09	60.58	-13.49	QP
2	0.357	23.57	10.10	33.67	48.80	-15.13	AVG
3	0.423	43.20	10.08	53.28	57.39	-4.11	QP
4 *	0.423	33.43	10.08	43.51	47.39	-3.88	AVG
5	1.036	23.32	10.12	33.44	46.00	-12.56	AVG
6	1.432	33.92	10.01	43.93	56.00	-12.07	QP
7	3.574	21.28	10.41	31.69	46.00	-14.31	AVG
8	3.664	30.81	10.44	41.25	56.00	-14.75	QP
9	9.780	24.34	9.98	34.32	50.00	-15.68	AVG
10	11.620	33.33	10.11	43.44	60.00	-16.56	QP
11	20.180	38.29	10.66	48.95	60.00	-11.05	QP
12	25.680	30.07	10.87	40.94	50.00	-9.06	AVG

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+AMP Factor-Preamplifier Factor

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



5 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method : ANSI C63.10:2020

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

5.1 EUT Operation

Operating Environment :

Temperature: : 23


Humidity: : 54

Atmospheric Pressure: : 1015


5.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

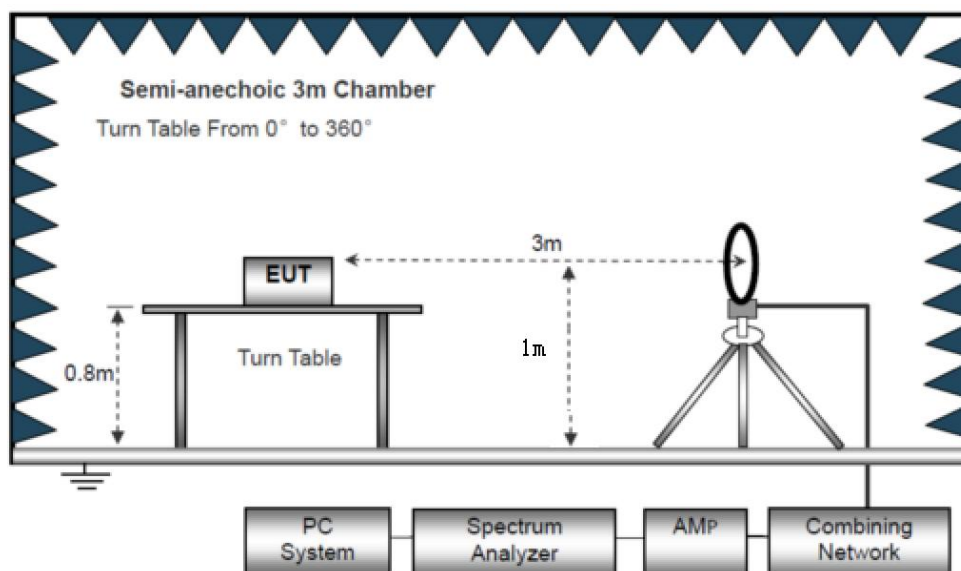

The test setup for emission measurement from 30 MHz to 1 GHz.

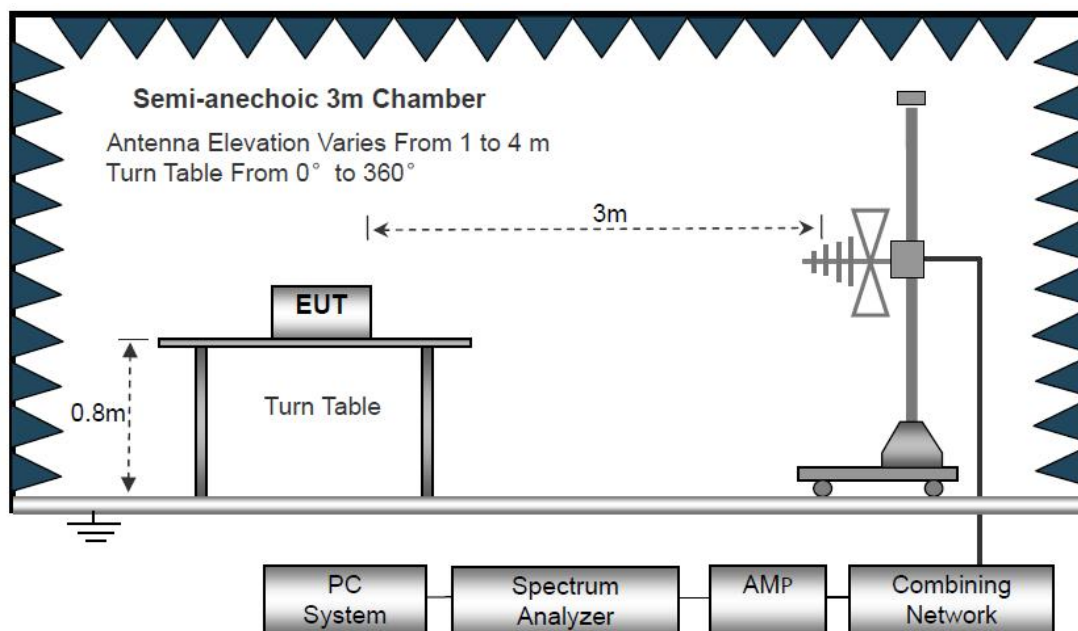

The test setup for emission measurement above 1 GHz

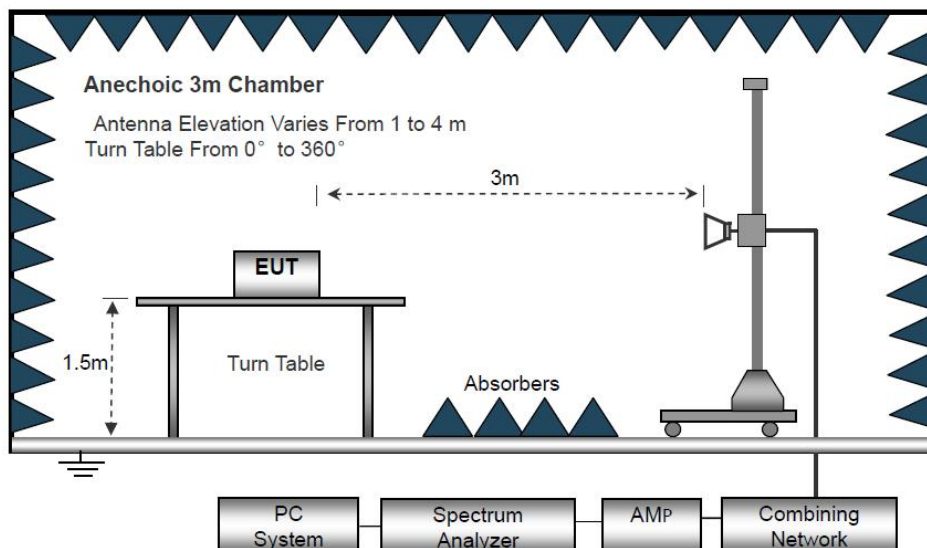

5.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

5.4 Test Procedure

- Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.



3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

5.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX GFSK Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



M/N : C707PA
Operation Mode : TX GFSK Low Channel
Test Voltage : AC 120V/60Hz
Test Specification : Vertical

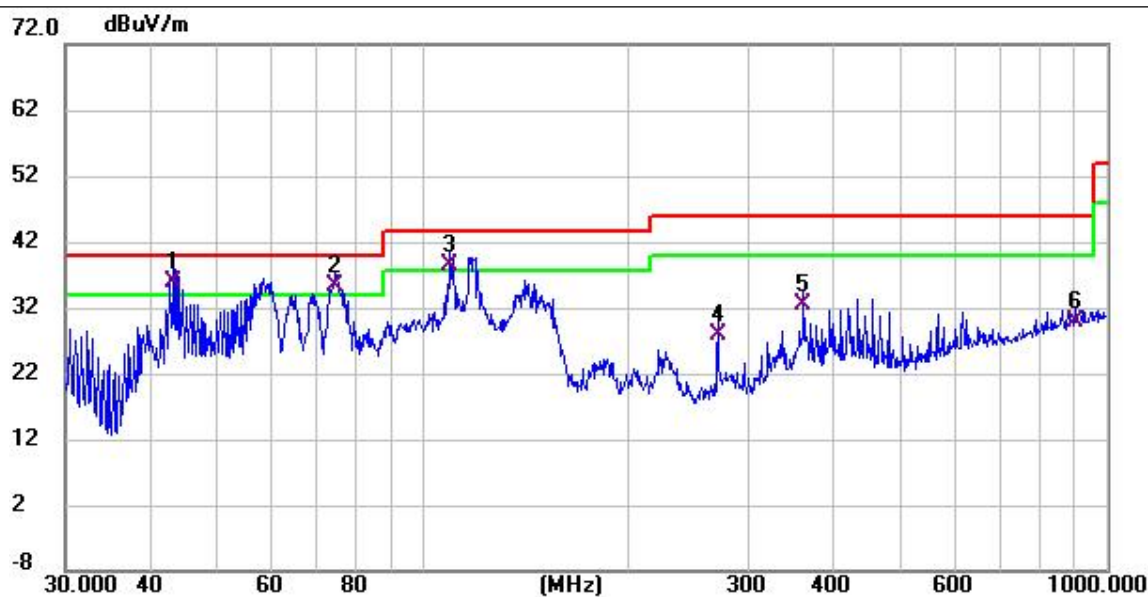

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	43.202	22.63	13.35	35.98	40.00	-4.02	QP
2 !	74.395	25.52	9.76	35.28	40.00	-4.72	QP
3 !	109.796	25.95	12.57	38.52	43.50	-4.98	QP
4	270.375	13.97	13.83	27.80	46.00	-18.20	QP
5	360.448	16.33	16.12	32.45	46.00	-13.55	QP
6	903.309	4.47	25.28	29.75	46.00	-16.25	QP

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+ANT Factor-Preamp Factor

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China


Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com



M/N : C707PA
Operation Mode : TX GFSK Low Channel
Test Voltage : AC 120V/60Hz
Test Specification : Horizontal

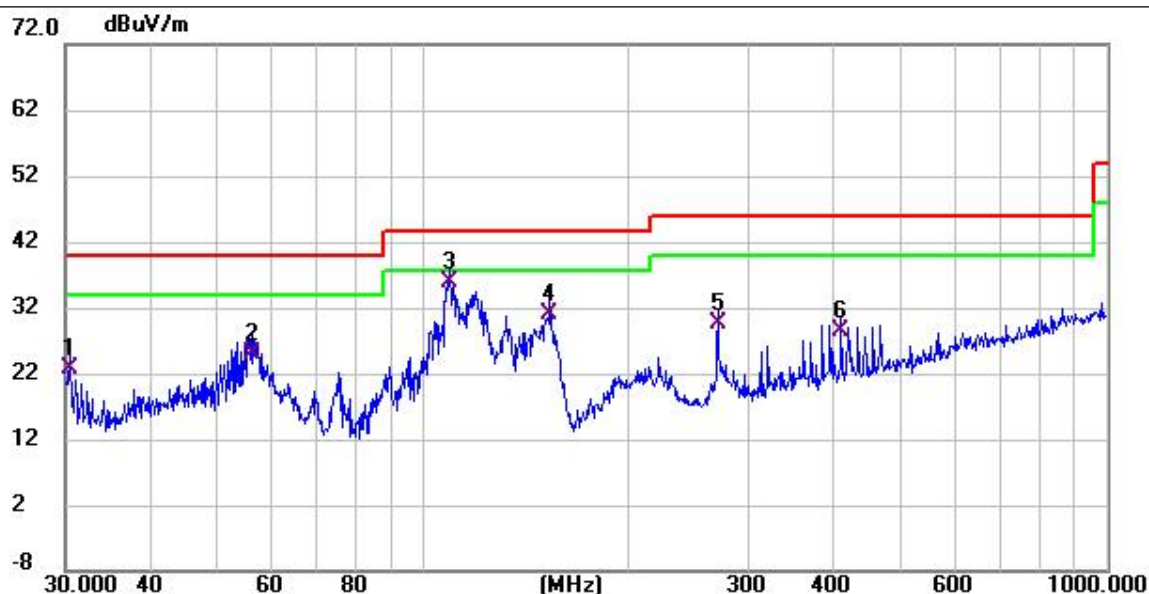

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.424	11.81	10.94	22.75	40.00	-17.25	QP
2	56.197	12.14	12.74	24.88	40.00	-15.12	QP
3 *	109.796	24.14	11.59	35.73	43.50	-7.77	QP
4	153.200	22.45	8.49	30.94	43.50	-12.56	QP
5	270.375	15.71	13.83	29.54	46.00	-16.46	QP
6	408.946	11.11	17.31	28.42	46.00	-17.58	QP

Remark:

Emission Level=Reading+Factor

Factor=Cable Loss+ANT Factor-Preamp Factor

Addresses: Room 2102, Building 6, Dongyi Intelligent Equipment New Energy Vehicle Park, No.30 of Tangxia District, Dongshen Road, Tangxia Town, Dongguan, 523710, People's Republic of China

Telephone: +86 (769) 87182258

Mail: kwtest@keywaytest.com

Mail: kwtest@keywaytest.com

**Test Frequency: From 1GHz to 25GHz**

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2402MHz									
V	4804.00	52.00	30.55	5.77	24.66	51.88	74	-22.87	PK
V	4804.00	45.54	30.55	5.77	24.66	45.42	54	-8.48	AV
V	7206.00	54.27	30.33	6.32	24.55	54.81	74	-20.21	PK
V	7206.00	44.69	30.33	6.32	24.55	45.23	54	-10.03	AV
V	9608.00	51.50	30.85	7.45	24.69	52.79	74	-20.26	PK
V	9608.00	41.51	30.85	7.45	24.69	42.80	54	-10.69	AV
V	12010.00	48.30	31.02	8.99	25.57	51.84	74	-21.64	PK
V	12010.00	40.26	31.02	8.99	25.57	43.80	54	-10.19	AV
H	4804.00	55.79	30.55	5.77	24.66	55.67	74	-19.65	PK
H	4804.00	45.52	30.55	5.77	24.66	45.40	54	-9.04	AV
H	7206.00	53.87	30.33	6.32	24.55	54.41	74	-19.94	PK
H	7206.00	42.32	30.33	6.32	24.55	42.86	54	-10.22	AV
H	9608.00	52.07	30.85	7.45	24.69	53.36	74	-20.54	PK
H	9608.00	41.32	30.85	7.45	24.69	42.61	54	-11.18	AV
H	12010.00	48.84	31.02	8.99	25.57	52.38	74	-20.90	PK
H	12010.00	40.30	31.02	8.99	25.57	43.84	54	-10.74	AV



Polar	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
(H/V)	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	55.99	30.55	5.77	24.66	55.87	74	-18.13	PK
V	4880.00	46.31	30.55	5.77	24.66	46.19	54	-7.81	AV
V	7320.00	53.33	30.33	6.32	24.55	53.87	74	-20.13	PK
V	7320.00	42.70	30.33	6.32	24.55	43.24	54	-10.76	AV
V	9760.00	50.72	30.85	7.45	24.69	52.01	74	-21.99	PK
V	9760.00	42.58	30.85	7.45	24.69	43.87	54	-10.13	AV
V	12200.00	50.50	31.02	8.99	25.57	54.04	74	-19.96	PK
V	12200.00	41.41	31.02	8.99	25.57	44.95	54	-9.05	AV
H	4880.00	54.69	30.55	5.77	24.66	54.57	74	-19.43	PK
H	4880.00	45.03	30.55	5.77	24.66	44.91	54	-9.09	AV
H	7320.00	54.11	30.33	6.32	24.55	54.65	74	-19.35	PK
H	7320.00	45.55	30.33	6.32	24.55	46.09	54	-7.91	AV
H	9760.00	51.46	30.85	7.45	24.69	52.75	74	-21.25	PK
H	9760.00	43.91	30.85	7.45	24.69	45.20	54	-8.80	AV
H	12200.00	50.32	31.02	8.99	25.57	53.86	74	-20.14	PK
H	12200.00	40.64	31.02	8.99	25.57	44.18	54	-9.82	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
High Channel:2480MHz									
V	4960.00	55.80	30.55	5.77	24.66	55.68	74	-18.32	PK
V	4960.00	44.81	30.55	5.77	24.66	44.69	54	-9.31	AV
V	7440.00	52.54	30.33	6.32	24.55	53.08	74	-20.92	PK
V	7440.00	43.28	30.33	6.32	24.55	43.82	54	-10.18	AV
V	9920.00	50.10	30.85	7.45	24.69	51.39	74	-22.61	PK
V	9920.00	39.19	30.85	7.45	24.69	40.48	54	-13.52	AV
V	12400.00	48.93	31.02	8.99	25.57	52.47	74	-21.53	PK
V	12400.00	39.47	31.02	8.99	25.57	43.01	54	-10.99	AV
H	4960.00	55.26	30.55	5.77	24.66	55.14	74	-18.86	PK
H	4960.00	45.63	30.55	5.77	24.66	45.51	54	-8.49	AV
H	7440.00	53.13	30.33	6.32	24.55	53.67	74	-20.33	PK
H	7440.00	43.71	30.33	6.32	24.55	44.25	54	-9.75	AV
H	9920.00	51.48	30.85	7.45	24.69	52.77	74	-21.23	PK
H	9920.00	42.22	30.85	7.45	24.69	43.51	54	-10.49	AV
H	12400.00	48.73	31.02	8.99	25.57	52.27	74	-21.73	PK
H	12400.00	39.69	31.02	8.99	25.57	43.23	54	-10.77	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Radiated Band Emission Measurement:


	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dB)	Detect or Type	Result
GFSK	Low Channel 2402MHz										
	H	2390	56.84	30.22	4.85	23.98	55.45	74	-18.55	PK	PASS
	H	2390	47.35	30.22	4.85	23.98	45.96	54	-8.04	AV	PASS
	H	2400	54.94	30.22	4.85	23.98	53.55	74	-20.45	PK	PASS
	H	2400	46.80	30.22	4.85	23.98	45.41	54	-8.59	AV	PASS
	V	2390	56.04	30.22	4.85	23.98	54.65	74	-19.35	PK	PASS
	V	2390	44.76	30.22	4.85	23.98	43.37	54	-10.63	AV	PASS
	V	2400	54.82	30.22	4.85	23.98	53.43	74	-20.57	PK	PASS
	V	2400	46.80	30.22	4.85	23.98	45.41	54	-8.59	AV	PASS
	High Channel 2480MHz										
	H	2483.5	55.84	35.11	3.56	27.75	52.04	74	-21.96	PK	PASS
	H	2483.5	46.69	35.11	3.56	27.75	42.89	54	-11.11	AV	PASS
	H	2500	56.76	35.1	3.57	27.8	53.03	74	-20.97	PK	PASS
	H	2500	45.66	35.1	3.57	27.8	41.93	54	-12.07	AV	PASS
	V	2483.5	56.74	35.11	3.56	27.75	52.94	74	-21.06	PK	PASS
	V	2483.5	55.63	35.11	3.56	27.75	51.83	54	-2.17	AV	PASS
	V	2500	56.19	35.1	3.57	27.8	52.46	74	-21.54	PK	PASS
	V	2500	45.89	35.1	3.57	27.8	42.16	54	-11.84	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											



6 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2020
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.1 Test Setup



6.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

6.3 Test Result

Please see the attachment for BLE data.




7 6dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2020

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.1 Test Setup



7.2 Test Procedure

For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW $\geq$ 3RBW

7.3 Test Result

Please see the attachment for BLE data.



8 Maximum Peak Output Power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247 (b)(3)
Test Method	:	ANSI C63.10:2020
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

8.1 Test Setup



8.2 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

Measure the conducted output power and record the results in the test report.

8.3 Test Result


Please see the attachment for BLE data.



9 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247 (e)
Test Method	: ANSI C63.10:2020
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.1 Test Setup



9.2 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 9.1kHz, Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 Test Result

Please see the attachment for BLE data.



10 On Time and Duty Cycle


10.1 Standard Applicable

None: for reporting purpose only.

10.2 Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of the spectrum analyzer.

10.3 Test Setup



10.4 Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=8MHz, Sweep time=10001pts;
3. Detector = RMS;
4. Trace mode = Single hold.

10.5 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

10.6 Test result

Please see the attachment for BLE data.



11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

11.2 Result

The EUT'S antenna, permanent attached antenna, is PCB Antenna. The antenna's gain is 0 dBi, and meets the requirement.



12 Test Setup and EUT Photos

Reference to the attachment for details.

*****THE END REPORT*****