

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2601-0002

2. Customer

• Name (FCC) : PHA Co., Ltd

• Address (FCC) : 156, Gwanggyo-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16506, South Korea

3. Use of Report : FCC Original Certification

4. Product Name / Model Name : OCDS / OCDS MASTER

FCC ID : 2BTKXMOBEDOCDS

5. FCC Regulation(s): Part 95(M)

Test Method Used : ANSI C63.26-2015, KDB 653005 D01v01r01

6. Date of Test : 2025.11.10 ~ 2025.12.04

7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

Affirmation	Tested by	Technical Manager
	Name : JaeHun Yun 	Name : JaeJin Lee  (Signature)

2026 . 01 . 09 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2601-0002	Jan. 09, 2026	Initial issue	JaeHun Yun	JaeJin Lee

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION	5
2.2. TESTING ENVIRONMENT	5
2.3. MEASURING INSTRUMENT CALIBRATION	5
2.4. MEASUREMENT UNCERTAINTY	5
2.5. TEST FACILITY	6
3. SUMMARY OF TEST RESULTS	7
4. TEST RESULTS	8
4.1. OCCUPIED BANDWIDTH	8
4.2. EIRP	10
4.3. UNDESIRABLE EMISSIONS	12
4.4. FREQUENCY STABILITY	17
5. LIST OF TEST EQUIPMENT	19

1. GENERAL INFORMATION

FCC Equipment Class	Part 95 Vehicular Radar Systems(VRD)
Product Name	OCDS
Model Name	OCDS MASTER
Add Model Name	OCDS SLAVE
EUT Serial Number	No Specified
Power Supply	DC 12 V
Antenna Specification	Patch Antenna Gain: 10.87 dBi

Frequency Range(GHz)	Emission Designator	Modulation	EIRP(Peak detector)	
			Max power (dBm)	Max power (W)
77 ~ 81	3G97F3N	FMCW	8.48	0.007

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment under Test (EUT) supports 77 ~ 81 GHz vehicular radar.

Test Mode

Test Mode	Description	Tested Frequency (GHz)
Frequency Sweep	FMCW	79.00

EUT Operation test setup

-Test Software: MobED_OCDS_Plot

-Power setting: Default

2.2. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+20 °C ~ +24 °C
▪ Relative Humidity	40 % ~ 45 %

2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.26-2015. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated emission (1 GHz Below)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.0 dB (The confidence level is about 95 %, $k = 2$)

2.5. TEST FACILITY

Dt&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948.

- FCC & ISED MRA Designation No. : KR0034
- FCC Test Firm Registration No. : 704742
- ISED#: 5740A

www.dtcn.net

Telephone	:	+ 82-31-321-2664
-----------	---	------------------

FAX	:	+ 82-31-321-1664
-----	---	------------------


3. SUMMARY OF TEST RESULTS

FCC part section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1049	Occupied Bandwidth	N/A	Radiated	C
95.3367(a)	Maximum power(EIRP)	< 50 dBm (Averaging detector)		C Note 2
95.3367(b)	Maximum peak power(EIRP)	< 55 dBm (Peak detector)		C Note 2
2.1053 95.3379(a)	Undesirable Emissions	Below 40GHz < Part 95.3379 (a)(1) 40 ~ 200GHz < 600 pW/cm ² Above 200GHz < 1000 pW/cm ²		C Note 2
2.1055 95.3379(b)	Frequency Stability	Within the frequency bands		C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: These test items were performed in three orthogonal EUT positions, and the worst-case data were reported.				

4. TEST RESULTS

4.1. OCCUPIED BANDWIDTH

Test Configuration

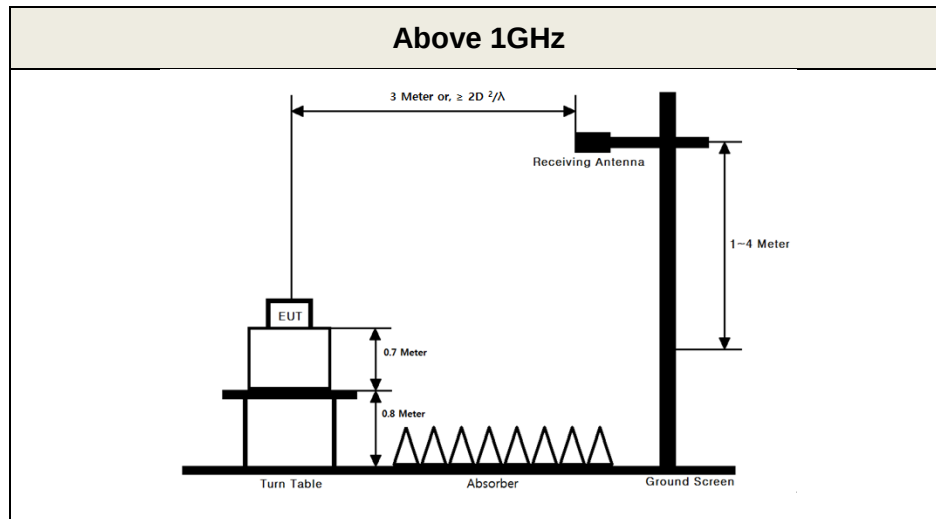

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 1.5-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI C63.26-2015 – Section 5.4.4

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 \sim 5 \%$ of the expected OBW & $VBW \geq 3 \times RBW$
Note: For VBW, it was set to the maximum value configurable on the instrument.
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize

Limit

Within the designated 76~81GHz frequency band

Test Results

Tested Frequency (GHz)	Occupied Bandwidth(MHz)
79.00	3965.24

Emission Designator

Emission Designator = **3G97F3N**

OBW = 3 965.24 MHz


F = Frequency modulation

3 = A single channel containing analogue information

N = No information transmitted

Occupied Bandwidth


Tested Frequency: 79.00 GHz

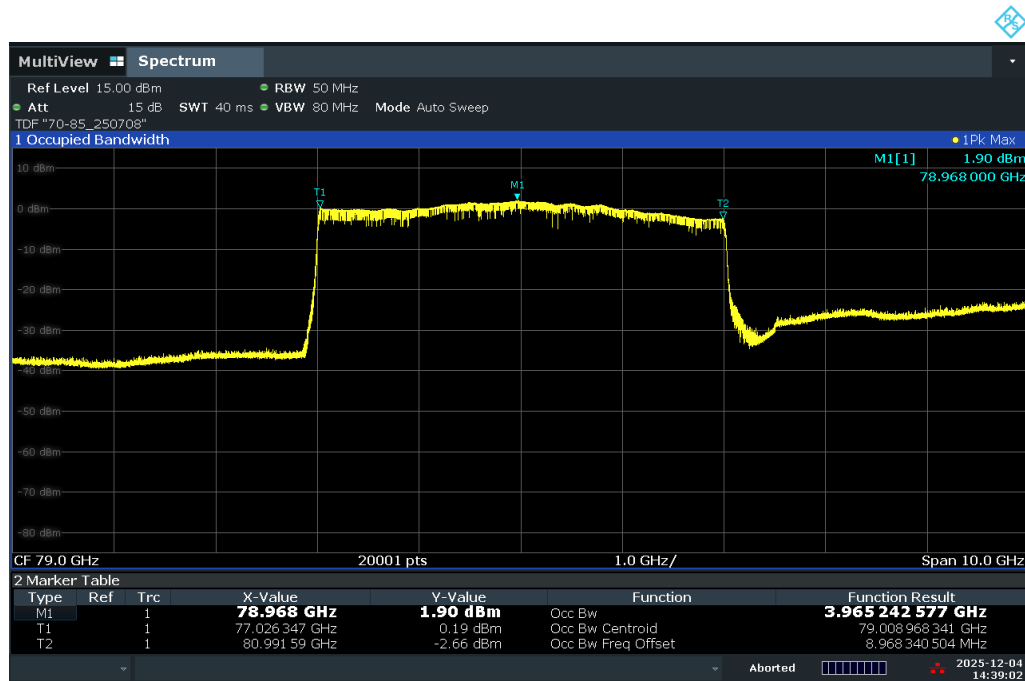

02:39:03 PM 12/04/2025

4.2. EIRP

Test Configuration

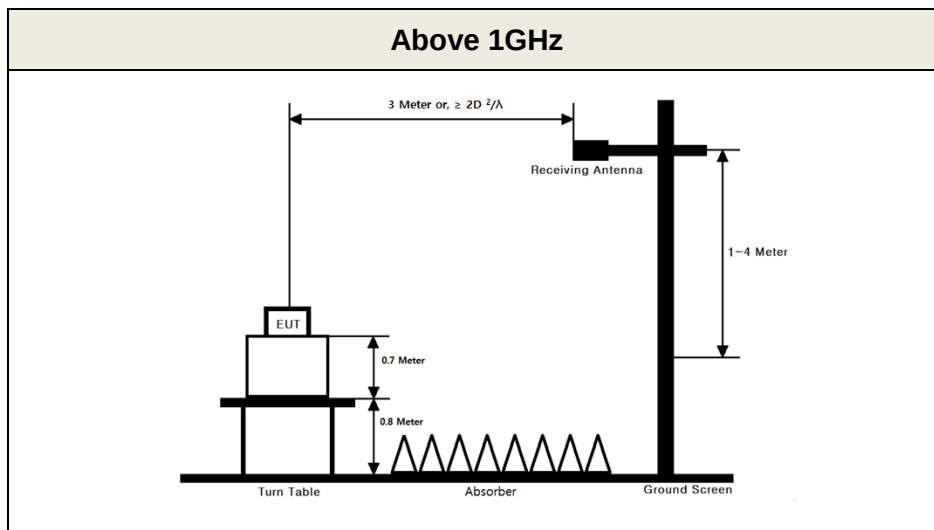

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 1.5-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Far field distance (R_m)

$$R_m = 2D^2 / \lambda,$$

where, D=the largest dimension of the antenna / λ =the wavelength of the emissions

Frequency Range(GHz)	D(cm)	λ (cm)	R_m (m)	Measurement Distance(m)
77 ~ 81	4.82	0.37	1.25	1.70

Test Procedure

- ANSI C63.26-2015 – Section 5.
- KDB 653005 D01v01r02 – Section 4

-Maximum power(EIRP) – Averaging detector

The maximum fundamental emission power (EIRP) shall be measured using a power averaging (rms) detector with a 1 MHz resolution bandwidth (RBW) and integrated over the full 99% occupied bandwidth (OBW) to obtain the data necessary to demonstrate compliance to the 50 dBm limit.

-Maximum peak power(EIRP) – Peak detector

The maximum peak fundamental emission power (EIRP) measurement shall be performed by sweeping over the transmitted occupied bandwidth using a positive peak power detector with peak hold activated, and a 1 MHz RBW. Power integration is not to be used in performing this measurement. The resultant peak power spectral density (maximum in any 1 MHz) data shall be used to demonstrate compliance to the 55 dBm/MHz limit.

1) Peak power measurements of swept frequency radar implementations (e.g., high sweep rate FMCW) may require a desensitization correction factor to be applied to the measurement results. See relevant Application Note(s) from the measurement instrumentation vendor for details.

Limit

- Part 95.3367

The fundamental radiated emission limits within the 76-81 GHz band are expressed in terms of Equivalent Isotropically radiated Power (EIRP) and are as follows:

- The maximum power (EIRP) within the 76-81 GHz band shall not exceed 50 dBm based on measurements employing a power averaging detector with a 1 MHz Resolution Bandwidth (RBW).
- The maximum peak power (EIRP) within the 76-81 GHz band shall not exceed 55 dBm based on measurements employing a peak detector with a 1 MHz RBW.

Test Results

Note.

1. The EIRP was measured in each axis EUT positions and the worst case data was reported.

2. Sample Calculation.

$$E(\text{dBuV/m}) = \text{Measured level (dBm)} + 107 + \text{DCF(dB)}$$

The spectrum analyzer measurement values include corrections for antenna factor, cable loss, attenuator loss and amplifier gain applied directly in the analyzer.

where, E=field strength / TF = Total Factor / DCF = Desensitization Correction Factor

$$\text{TF(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)} + \text{Attenuator Loss(dB)} - \text{Amplifier Gain(dB)}$$

$$\text{EIRP(dBm)} = E(\text{dBuV/m}) + 20\log(D) - 104.8; \text{ where, D is measurement distance (in the far field region) in m.}$$

3. For peak power measurement, a desensitization correction factor was applied to the measurement result.

4. DCF Calculation

$$\text{CF}_{\text{chirp}} = 5 * \log \left(1 + K * \left(\frac{\text{Span}}{t * \text{RBW}^2} \right)^2 \right)$$

K = Gaussian shaped filter(0.1947)

SPAN(FMCW sweep bandwidth) = 4000 MHz

RBW = 30 MHz

t (FMCW sweep time) = 42 us


CF_{chirp} = 0.00 dB

Maximum power(EIRP) – Averaging detector & Maximum peak power(EIRP) – Peak detector

Measurement distance(D)	Frequency (GHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Measured Level(dBm)	DCF (dB)	E (dBuV/m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1.7 m	78945.50	H	Z	PK	1.67	0.00	108.67	8.48	55.00	46.52
1.7 m	79000.00	H	Z	AV	-14.34	NA	92.66	-7.53	50.00	57.53

Maximum peak power(EIRP)

Tested Frequency: 79.00 GHz

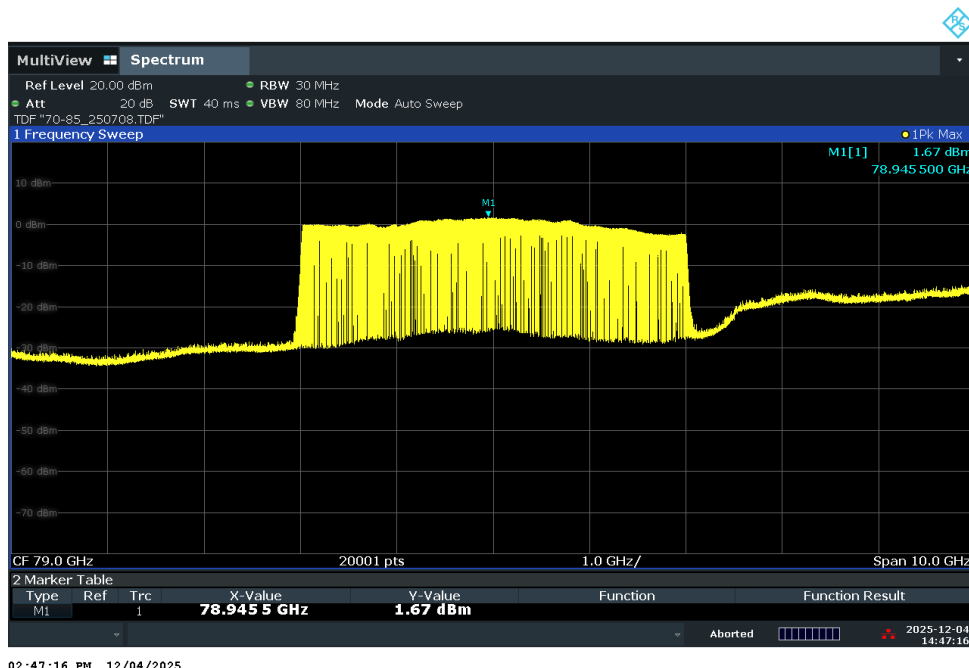


02:47:16 PM 12/04/2025

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.

4.3. UNDESIRABLE EMISSIONS

Test Configuration

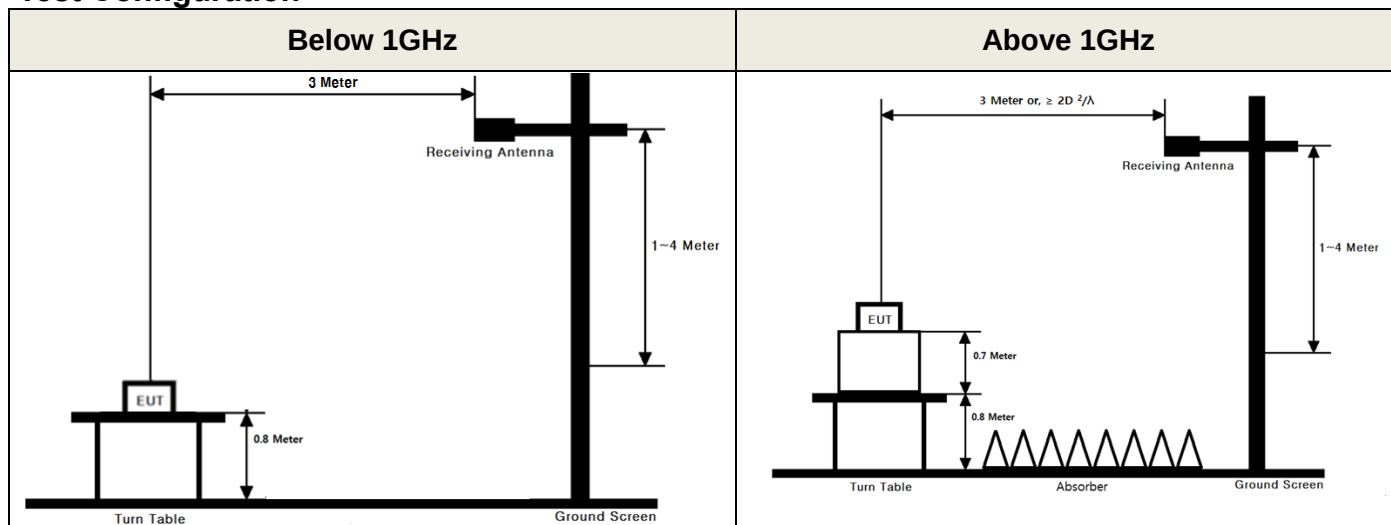

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 1.5-meters above a turntable which is flush with the ground plane and 3 meters(for below 1GHz: 0.8-m) from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Far field distance (R_m)

$$R_m = 2D^2 / \lambda,$$

where, D=the largest dimension of the measurement antenna / λ =the wavelength of the emissions

Frequency Range(GHz)	D(cm)	λ (cm)	R_m (m)	Measurement Distance(m)
40 ~ 60	6.24	0.50	1.56	1.70
60 ~ 85	4.82	0.35	1.32	1.70
85 ~ 90	4.82	0.33	1.39	1.40
90 ~ 140	2.74	0.21	0.70	0.70
140 ~ 220	1.89	0.14	0.52	0.70
220 ~ 250	1.45	0.12	0.35	0.50

Test Procedure

- ANSI C63.26-2015 – Section 5.5

Test setting

Below 1GHz

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

1~40 GHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement

RBW = 1 MHz, VBW $\geq$ Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz.

Detector = Peak, Sweep Time = Auto, Trace Mode = Max Hold until the trace stabilizes

Above 40GHz

Average Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = RMS, Sweep time = Auto, Trace mode = Max hold or Averaging

Limit

Part 95.3379

(a) The power density of any emissions outside the 76-81 GHz band shall consist solely of spurious emissions and shall not exceed the following:

(1) Radiated emissions below 40 GHz shall not exceed the field strength as shown in the following emissions table.

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2 400/F (kHz)	300
0.490 – 1.705	24 000/F (kHz)	30
1.705 – 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

- (i) In the emissions table in paragraph (a)(1) of this section, the tighter limit applies at the band edges.
 - (ii) The limits in the table in paragraph (a)(1) of this section are based on the frequency of the unwanted emissions and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
 - (iii) The emissions limits shown in the table in paragraph (a)(1) of this section are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9.0-90.0 kHz, 110.0-490.0 kHz, and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector with a 1 MHz RBW.
- (2) The power density of radiated emissions outside the 76-81 GHz band above 40.0 GHz shall not exceed the following, based on measurements employing an average detector with a 1 MHz RBW:
- (i) For radiated emissions outside the 76-81 GHz band between 40 GHz and 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 600 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.
 - (ii) For radiated emissions above 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 1000 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.
- (3) For field disturbance sensors and radar systems operating in the 76-81 GHz band, the spectrum shall be investigated up to 231.0 GHz.

Test Results


Frequency Range: 9 kHz ~ 1 GHz

Frequency (MHz)	ANT Pol	Detector Mode	Measured Level(dBuV)	TF (dB/m)	Distance Factor(dB)	E (dBuV/m)	Limit (dBuV/m)	Margin (dB)
48.75	V	PK	31.60	-6.43	NA	25.17	40.00	14.83
116.33	V	PK	32.20	-8.95	NA	23.25	43.50	20.25
350.37	V	PK	39.08	-2.38	NA	36.70	46.00	9.30
978.29	H	PK	24.50	7.72	NA	32.22	54.00	21.78

Note.

- No other spurious and harmonic emissions were found above listed frequencies.
- Information of Distance Factor
For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.
In this case, the distance correction factor is applied to the result.
- Calculation of distance correction factor
At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$
At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$
When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.
- Sample Calculation.
Margin = Limit – Result
 $E(\text{dBuV/m}) = \text{Measured level (dBuV)} + \text{TF(dB/m)}$
where, E=field strength / TF = Antenna Factor(dB/m) + Cable Loss(dB) – Amp Gain(dB)

Worst data plot (Measured Level), Y axis

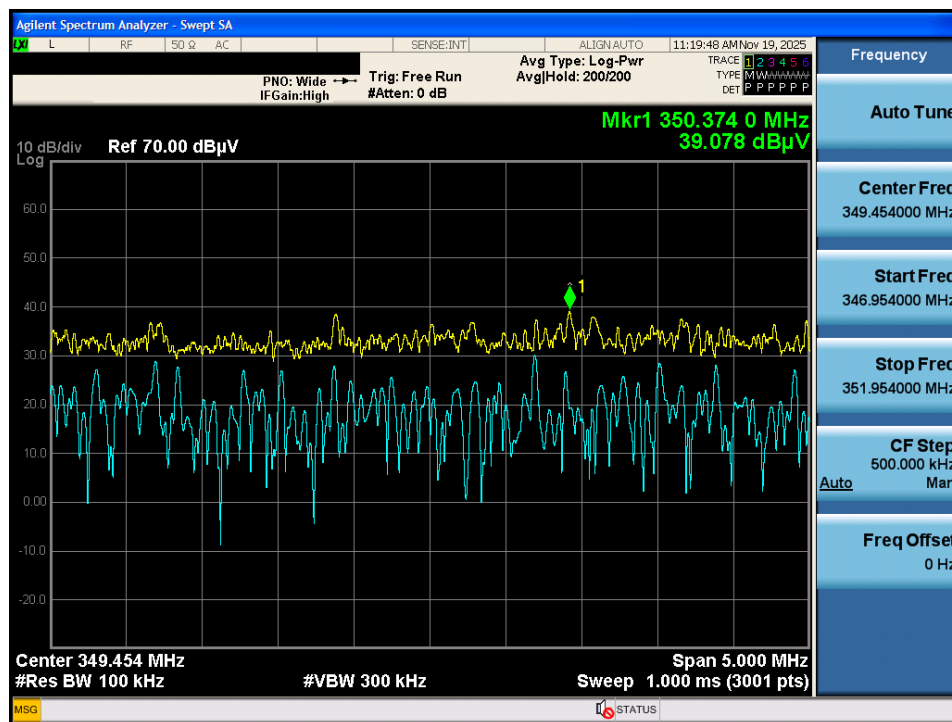

Frequency Range: 1 ~ 40 GHz

Frequency (MHz)	ANT Pol	Detector Mode	Measured Level(dBuV)	TF (dB/m)	Distance Factor(dB)	E (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 400.70	H	PK	42.16	7.44	NA	49.60	74.00	24.40
2 400.02	H	AV	34.57	7.40	NA	41.97	54.00	12.03
28 800.10	H	PK	47.09	10.83	-4.93	52.99	74.00	21.01
28 800.12	H	AV	43.99	10.83	-4.93	49.89	54.00	4.11

Note.

1. No other spurious and harmonic emissions were found above listed frequencies.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced. In this case, the distance factor is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance})$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.


3. Sample Calculation.

Margin = Limit – Result

$E(\text{dBuV/m}) = \text{Measured level (dBuV)} + \text{TF}(\text{dB/m})$

where, E=field strength / TF = Antenna Factor(dB/m) + Cable Loss(dB) – Amp Gain(dB)

4. * Noise floor.

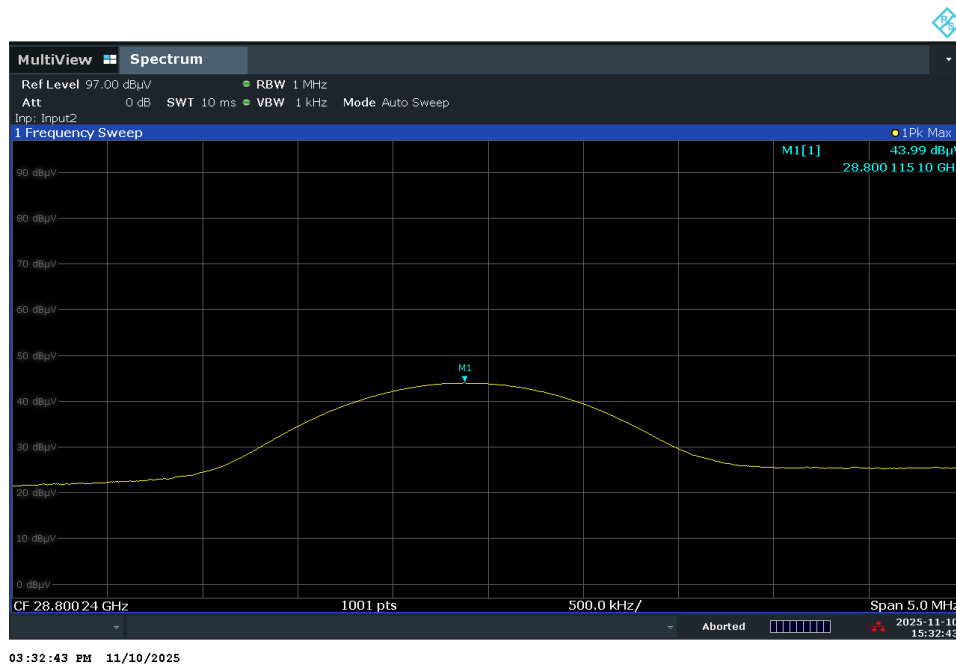Worst data plot (Measured Level), Y axis & Hor

Frequency Range: 40 ~ 243 GHz

Measurement distance(D)	Frequency (MHz)	ANT Pol	EUT Axis	Measured Level (dBm)	TF (dB/m)	E (dBuV/m)	EIRP (dBm)	Power Density (pW/cm ²)	Limit (pW/cm ²)
1.7	81 000.21	H	Z	-34.09	-1.39	71.52	-28.67	1.20	600.00
0.7	*155434.99	H	Z	-64.53	51.54	94.01	-13.89	36.10	600.00
0.7	*191645.89	H	Z	-63.94	52.32	95.38	-12.52	49.49	600.00
0.5	*226232.94	H	Z	-68.85	54.72	92.87	-17.95	14.18	1000.00

Note.

- The radiated emissions were investigated up to 243GHz and no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.

$$E(\text{dBuV/m}) = \text{Measured level (dBm)} + 107 + \text{TF}(\text{dB/m})$$

where, E=field strength / TF = Antenna Factor(dB/m) + Cable Loss(dB) – Amp Gain(dB)

EIRP(dBm) = E(dBuV/m) + 20log(D) - 104.8; where, D is measurement distance (in the far field region) in m.

$$PD = \text{EIRP}_{\text{Linear}} / 4\pi d^2$$

Where, PD = the power density at the distance specified by the limit, in W/m²

$$\text{EIRP}_{\text{Linear}} = \text{EIRP, in watts}$$


D = is the distance at which the power density limit is specified, in m

If the mixer is used, mixer loss was applied to the measured level by SA correction factor.

- * Noise floor


Worst data plot(excluding the noise floor)

Z axis & Hor

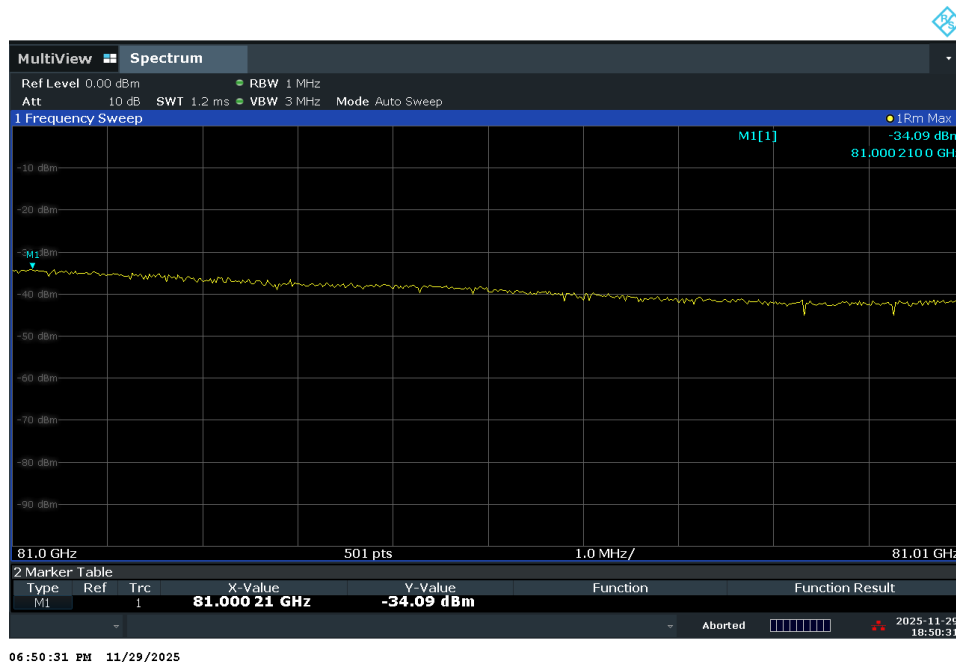

4.4. FREQUENCY STABILITY

Test configuration

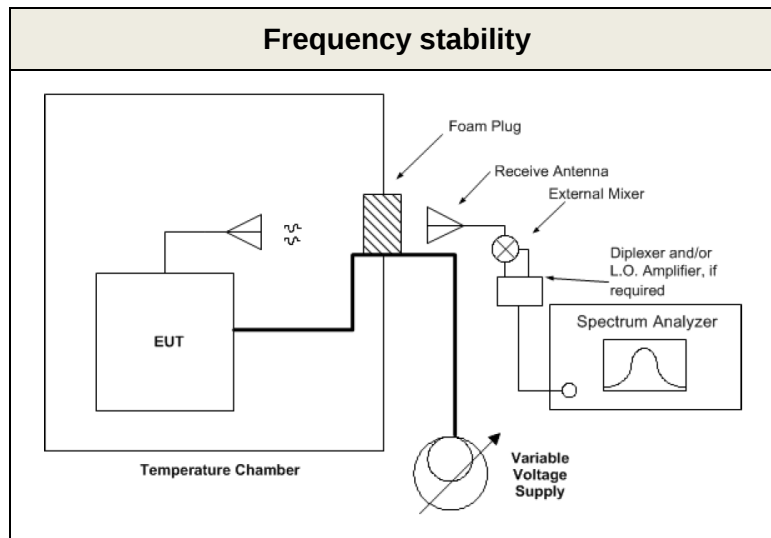

Test Procedure

- ANSI C63.26-2015 – Section 5.6

The frequency stability of the transmitter is measured by:

1. At 10 °C intervals of temperatures between -30 °C and +50 °C at the manufacturer's rated supply voltage, and
2. At +20 °C temperature and $\pm 15\%$ supply voltage variations. If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limit

Part 95.3379(b)

Fundamental emissions must be contained within the frequency bands specified in Part 95(M) during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test Results

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	Measured low frequency(F _L) (MHz)	Measured high frequency(F _H) (MHz)
100 %	12.0	+20	77026.35	80991.59
100 %		-30	77018.18	80971.13
100 %		-20	77020.54	80972.85
100 %		-10	77021.19	80975.41
100 %		0	77023.47	80979.53
100 %		+10	77025.82	80988.50
100 %		+20	77026.35	80991.59
100 %		+30	77027.52	80974.53
100 %		+40	77029.98	80979.14
100 %		+50	77031.81	80973.07
115 %	13.80	+20	77034.00	80976.00
85 %	10.20	+20	77032.00	80989.00

Note 1: Fundamental emissions were contained within the frequency bands.

5. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Rohde Schwarz	FSW85	25/05/29	26/05/29	101778
Spectrum Analyzer	Agilent Technologies	N9020A	25/05/26	26/05/26	US47360812
Spectrum Analyzer	Agilent Technologies	N9020A	25/05/26	26/05/26	MY46471622
DC Power Supply	SM techno	SDP30-5D	25/05/29	26/05/29	305DMG288
DC Power Supply	SM techno	SDP30-5D	25/05/29	26/05/29	305DNF079
Multimeter	FLUKE	17B	25/11/21	26/11/21	26030065WS
Thermohygrometer	XIAOMI	MHO-C201	25/11/24	26/11/24	00089675
Thermohygrometer	BODYCOM	BJ5478	25/11/24	26/11/24	120612-2
Thermohygrometer	BODYCOM	BJ5478	25/05/29	26/05/29	N/A
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	25/06/11	26/06/11	SJ-TH-S50-130930
Signal Generator	Rohde Schwarz	SMBV100A	25/11/20	26/11/20	255571
Signal Generator	ANRITSU	MG3695C	25/11/18	26/11/18	173501
Loop Antenna	ETS-Lindgren	6502	25/11/06	26/11/06	00060496
Hybrid Antenna	Schwarzbeck	VULB9163	25/05/27	27/05/27	9163-572
PreAmplifier	H.P	8447D	25/11/17	26/11/17	2944A07774
PreAmplifier	Agilent Technologies	8449B	25/11/17	26/11/17	3008A00161
PreAmplifier	tsj	MLA-1840-J02-45	25/05/29	26/05/29	16966-10728
PreAmplifier	Norden Millimeter Inc.	NA4060G50N8P12	25/12/12	26/12/12	1003
PreAmplifier	Norden Millimeter Inc.	NN6090G40N5P-2	25/12/12	26/12/12	1001
Horn Antenna	ETS	3117	25/05/27	26/05/27	00143278
Horn Antenna	A.H.Systems	SAS-574	25/06/11	26/06/11	155
Horn Antenna	MI Wave	RX ANT-5 261U+410U	25/06/12	26/06/12	108
Horn Antenna	MI Wave	RX ANT-7 261E	25/06/12	26/06/12	112
Horn Antenna	MI Wave	RX ANT-8 261F	25/06/12	26/06/12	114
Horn Antenna	MI Wave	RX ANT-9 261G	25/06/12	26/06/12	116
Horn Antenna	SAGE Millimeter	SAR-2507-03-S2	25/06/12	26/06/12	14614-01
Harmonic mixer	Rohde Schwarz	FS-Z90	25/06/12	26/06/12	101714
Harmonic mixer	Rohde Schwarz	FS-Z140	25/06/12	26/06/12	101009
Harmonic mixer	Rohde Schwarz	FS-Z220	25/06/12	26/06/12	101012
Harmonic Mixers	Rohde Schwarz	FS-Z325	25/06/12	26/06/12	100925
Cable	HUBER+SUHNER	SUCOFLEX100	25/01/02	26/01/02	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	25/01/02	26/01/02	M-2
Cable	Junkosha	MWX241/B	25/01/02	26/01/02	M-3
Cable	JUNFLON	J12J101757-00	25/01/02	26/01/02	M-7
Cable	HUBER+SUHNER	SUCOFLEX106	25/01/02	26/01/02	M-9
Cable	Dt&C	Cable	25/01/02	26/01/02	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	25/01/02	26/01/02	G-3
Cable	Dt&C	Cable	25/01/02	26/01/02	G-4
Cable	OMT	YSS21S	25/01/02	26/01/02	G-5
Cable	Junkosha	MWX241	25/01/02	26/01/02	mmW-1
Cable	Junkosha	MWX241	25/01/02	26/01/02	mmW-4
Cable	Junkosha	MWX261	25/01/02	26/01/02	mmW-7
Cable	Junkosha	MWX261	25/01/02	26/01/02	mmW-15
Cable	HUBER+SUHNER	SUCOFLEX 104	25/01/02	26/01/02	mmW-8
Cable	HUBER+SUHNER	SUCOFLEX 104	25/01/02	26/01/02	mmW-9
Cable	SAGE MILLIMETER Inc	SCW-1M1M024-F1	24/01/03	25/01/03	mmW-10
Test Software	tsj	EMI Measurement	NA	NA	Version 2.00.0185
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0190

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.