

RF TEST REPORT

FCC ID: 2BTLL-GIT01

Test Report No.....: RF251107008-03-004

Product(s) Name.....: Mini PC

Model(s).....: IT15 Max, IT***** (* Representing numbers 0-9, letters A-Z, a-z, "-" or spaces)

Trade Mark.....: GEEKOM

Applicant.....: Shenzhen Geekom Electronic Technology Co., Ltd

Address.....: B705 No. 1044, Cha Guang Road, Shu Guang Community, Xi Li Street,
Nan Shan District, Shen Zhen, China

Receipt Date.....: 2025.11.13

Test Date.....: 2025.11.16 ~ 2025.12.04

Issued Date.....: 2025.12.08

Standards.....: 47 CFR FCC Part 15, Subpart C(Section 15.247)

ANSI C63.10:2020

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	11
2.4 SUPPORT UNITS	11
3 . AC POWER LINE CONDUCTED EMISSIONS	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 DEVIATION FROM TEST STANDARD	12
3.4 TEST SETUP	13
3.5 EUT OPERATING CONDITIONS	13
3.6 TEST RESULTS	13
4 . RADIATED EMISSIONS	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	16
4.5 EUT OPERATING CONDITIONS	17
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	17
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	17
4.8 TEST RESULTS - ABOVE 1000 MHZ	17
5 . NUMBER OF HOPPING FREQUENCY	18
5.1 LIMIT	18
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM STANDARD	18
5.4 TEST SETUP	18
5.5 EUT OPERATION CONDITIONS	18
5.6 TEST RESULTS	18
6 . AVERAGE TIME OF OCCUPANCY	19
6.1 LIMIT	19

6.2 TEST PROCEDURE	19
6.3 DEVIATION FROM STANDARD	19
6.4 TEST SETUP	19
6.5 EUT OPERATION CONDITIONS	19
6.6 TEST RESULTS	19
7 . HOPPING CHANNEL SEPARATION	20
7.1 LIMIT	20
7.2 TEST PROCEDURE	20
7.3 DEVIATION FROM STANDARD	20
7.4 TEST SETUP	20
7.5 EUT OPERATION CONDITIONS	20
7.6 TEST RESULTS	20
8 . BANDWIDTH	21
8.1 LIMIT	21
8.2 TEST PROCEDURE	21
8.3 DEVIATION FROM STANDARD	21
8.4 TEST SETUP	21
8.5 EUT OPERATION CONDITIONS	21
8.6 TEST RESULTS	21
9 . MAXIMUM OUTPUT POWER	22
9.1 LIMIT	22
9.2 TEST PROCEDURE	22
9.3 DEVIATION FROM STANDARD	22
9.4 TEST SETUP	22
9.5 EUT OPERATION CONDITIONS	22
9.6 TEST RESULTS	22
10 . CONDUCTED SPURIOUS EMISSION	23
10.1 LIMIT	23
10.2 TEST PROCEDURE	23
10.3 DEVIATION FROM STANDARD	23
10.4 TEST SETUP	23
10.5 EUT OPERATION CONDITIONS	23
10.6 TEST RESULTS	23
11 . MEASUREMENT INSTRUMENTS LIST	24
12 . ANTENNA REQUIREMENT	25
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	26

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	31
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	32
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	37
APPENDIX E - NUMBER OF HOPPING FREQUENCY	43
APPENDIX F - AVERAGE TIME OF OCCUPANCY	46
APPENDIX G - HOPPING CHANNEL SEPARATION	57
APPENDIX H - BANDWIDTH	60
APPENDIX I - MAXIMUM OUTPUT POWER	71
APPENDIX J - CONDUCTED SPURIOUS EMISSION	77
APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE	98

HISTORY OF THIS TEST REPORT

Original Report Issue Date: 2025.12.08

- ☒ No additional attachment
- ☐ Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX E	PASS	-----
15.247 (a)(1)(iii)	Average Time of Occupancy	APPENDIX F	PASS	-----
15.247(a)(1)	Hopping Channel Separation	APPENDIX G	PASS	-----
15.247(a)(1)	Bandwidth	APPENDIX H	PASS	-----
15.247(a)(1)	Maximum Output Power	APPENDIX I	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX J	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
A2LA Certificate Number:	6823.01
Telephone:	0755-26024411

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
RF power conducted	$\pm 0.243\text{dB}$
Power Spectral Density	$\pm 0.743\text{dB}$
Conducted Spurious Emission	$\pm 1.328\text{dB}$
Time	$\pm 0.19\%$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	23.8°C	52%	AC 120V/60Hz	Keith Huang
Radiated Emissions-9 kHz to 30 MHz	23.9°C	50%	AC 120V/60Hz	Lemon He
Radiated Emissions-30 MHz to 1000 MHz	23.9°C	50%	AC 120V/60Hz	Lemon He
Radiated Emissions-Above 1000 MHz	23.9°C	50%	AC 120V/60Hz	Lemon He
Bandwidth	23.5°C	47%	DC 19V	Freedom Zhuo
Maximum Output Power	23.5°C	47%	DC 19V	Freedom Zhuo
Conducted Spurious Emission	23.5°C	47%	DC 19V	Freedom Zhuo
Number of Hopping Frequency	23.5°C	47%	DC 19V	Freedom Zhuo
Average Time of Occupancy	23.5°C	47%	DC 19V	Freedom Zhuo
Hopping Channel Separation	23.5°C	47%	DC 19V	Freedom Zhuo

Note: Adapter supply voltage AC 120V/60Hz.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Sample No.	POC251107008-S001
Product name	Mini PC
Model name	IT15 Max, IT***** (*Representing numbers 0-9, letters A-Z, a-z, "-" or spaces)
Test model	IT15 Max
Model difference	Only the model name and colors are different
Trade Mark	GEEKOM
Power supply	DC 19V from adapter
Adapter1 information	Model name: hyleton-120W-1906320 Input: 100-240V~, 50-60Hz, 2A Max Output: 19.0V===6.32A, 120.0W
Adapter2 information	Model name: BSY120S1906323 D Input: 100-240V~, 50/60Hz, 2.5A Output: 19.0V===6.32A, 120.0W
Operate temperature	0°C-35°C
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 3Mbps
Max. Output Power	3Mbps: 2.74dBm (0.0019W)
Antenna gain	2.99dBi
Antenna type	Integrated Antenna

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 2	TX Mode_2Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78
Mode 4	TX Mode_3Mbps Channel 39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 4	TX Mode_3Mbps Channel 39

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 4	TX Mode_3Mbps Channel 39

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 2	TX Mode_3Mbps Channel 00/39/78

Maximum Output Power	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 2	TX Mode_2Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78

Other Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/39/78
Mode 2	TX Mode_2Mbps Channel 00/39/78
Mode 3	TX Mode_3Mbps Channel 00/39/78

Note:

- (1) The measurements for Output Power were tested with DH1/3/5 during 1Mbps, 2Mbps and 3Mbps, the worst case were 1Mbps (DH5), 2Mbps (DH5) and 3Mbps (DH5), only worst case were documented for other test items except Average Time of Occupancy.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

- (3) This product has the mode of BT AFH, which was considered during testing. 800/20/X (X = 2 of DH1, X = 4 of DH3 or X = 6 of DH5) with 20, 10 or 6.67 hops per second in a channel, and then multiply 0.4*20 (20 # of hopping). But this mode is not the worst case mode as duration of the packet is same, and this report only shows the worst case mode.
- (4) For AC power line conducted emissions and radiated spurious emissions below 1 GHz test, the 3Mbps Channel 39 are found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	DRTU		
Frequency (MHz)	2402	2441	2480
1Mbps	0	0	0
2Mbps	0	0	0
3Mbps	0	0	0

2.4 SUPPORT UNITS

No.	Equipment	Model	Manufacturer	Series No
1	Flat Panel Monitor	S2721QS	DELL	/
2	USB Disk1	/	Kingston	/
3	USB Disk2	/	Kingston	/
4	Earphone	/	/	/
5	Mouse	DOK-680U	LENOVO	701E8328
6	Keyboard	SK-8827	LENOVO	21R1ADL
7	Printer	MJPMYTJHT01	Xiaomi	/
8	Mobile HDD	1T	Huipu	/
9	Mobile HDD	1T	Huipu	/
10	Flat Panel Monitor	S2722QS	DELL	/

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

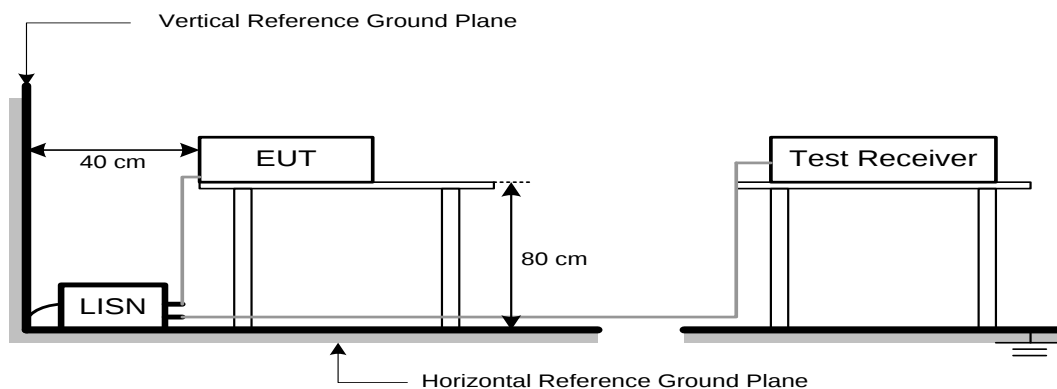

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP


9 kHz to 30 MHz

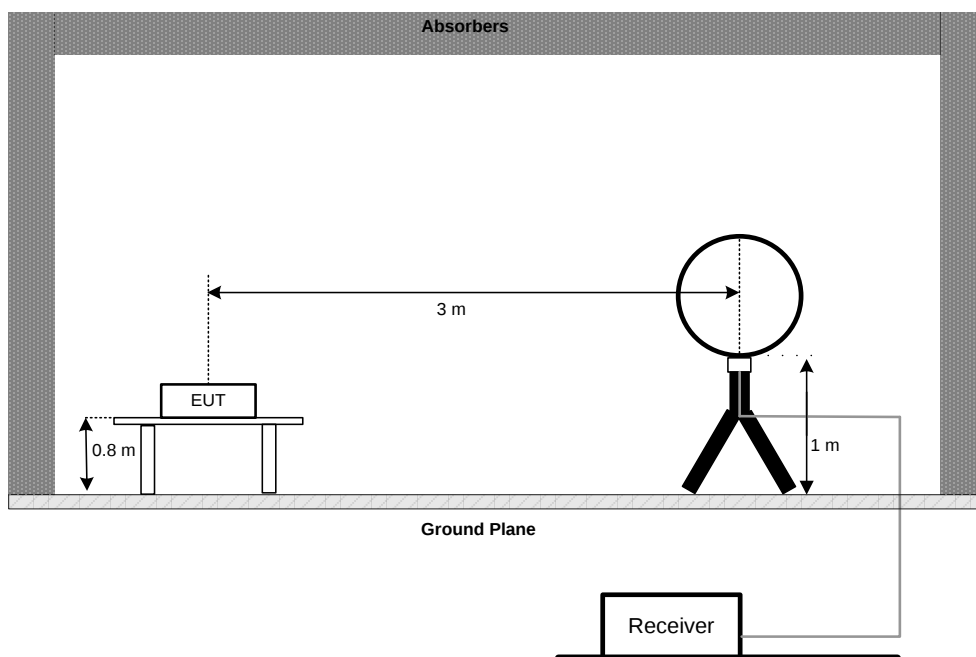

30 MHz to 1 GHz

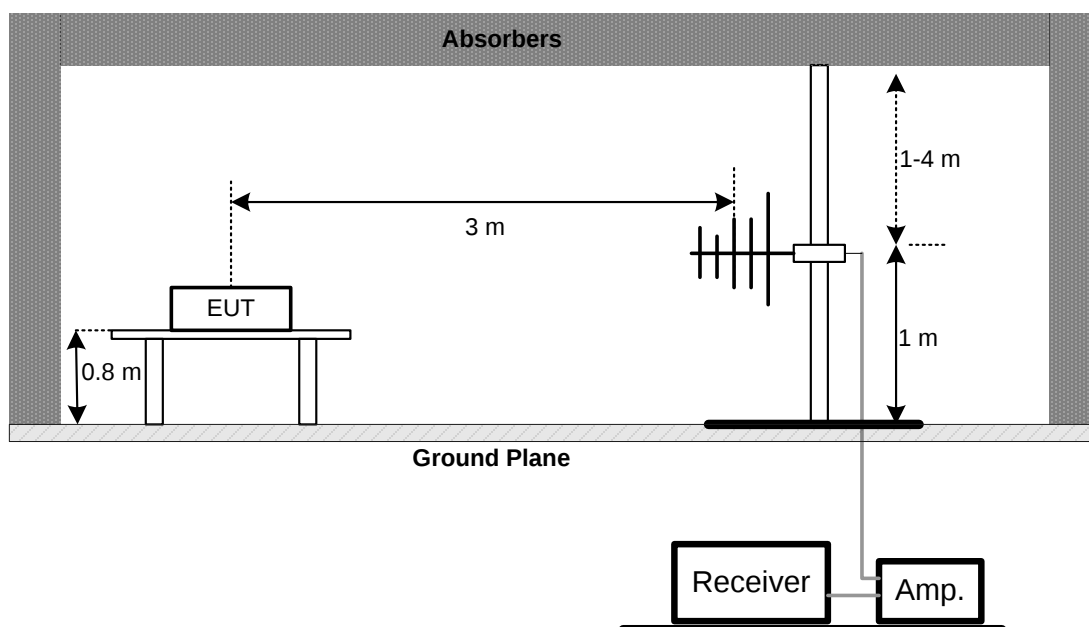

Above 1 GHz

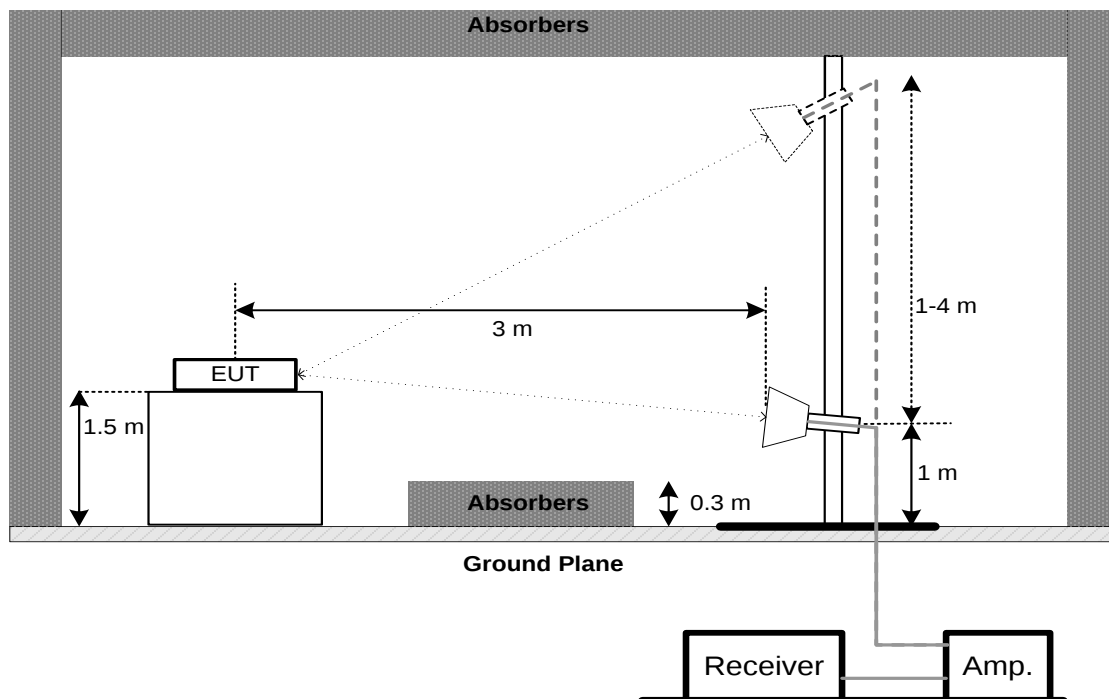

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING FREQUENCY

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)(iii)	Number of Hopping Frequency	15

5.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	> Operating Frequency Range
RBW	300 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

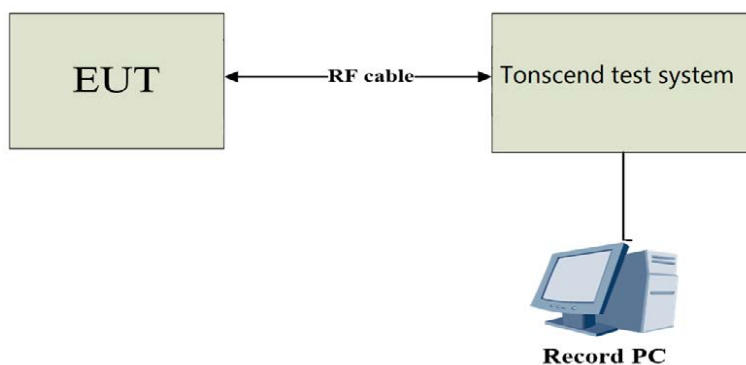

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

6.2 TEST PROCEDURE


- Set the EUT for DH1, DH3 and DH5 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- The EUT was directly connected to the tonskend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	0 MHz
RBW	1 MHz
VBW	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	As necessary to capture the entire dwell time per hopping channel

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

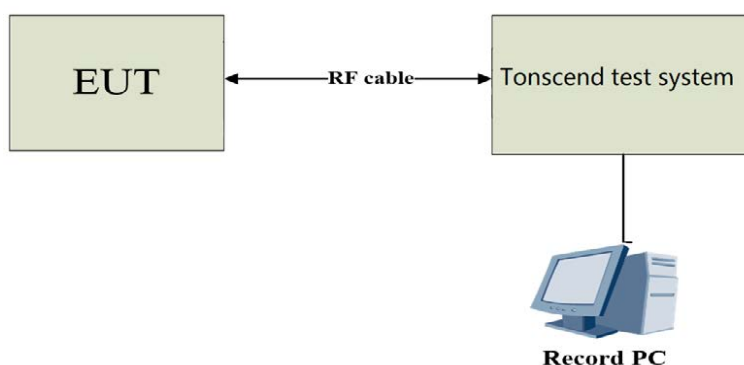

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. HOPPING CHANNEL SEPARATION

7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 TEST PROCEDURE


- The EUT was directly connected to the tonscond test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	Wide enough to capture the peaks of two adjacent channels
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

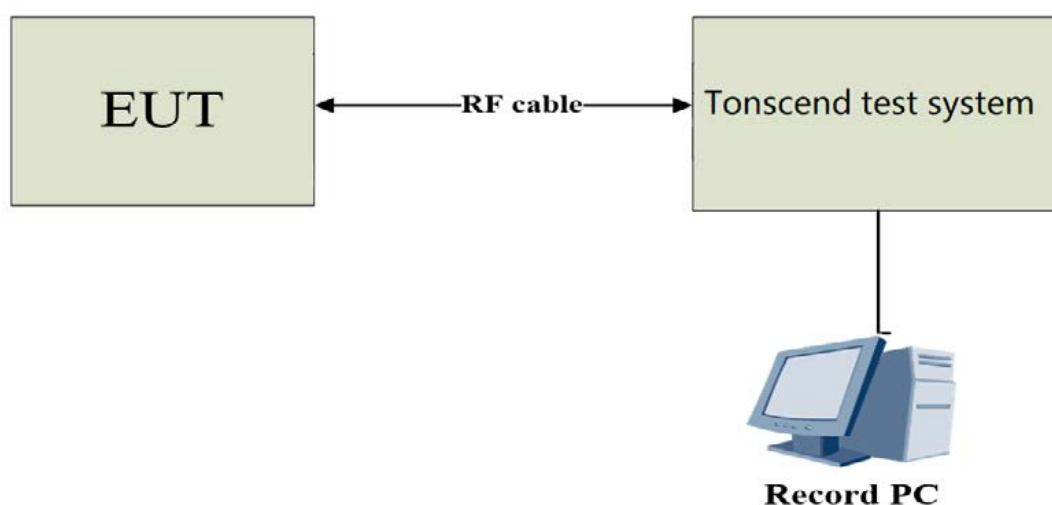

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. BANDWIDTH

8.1 LIMIT

Section	Test Item
FCC 15.247(a)(1)	Bandwidth

8.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

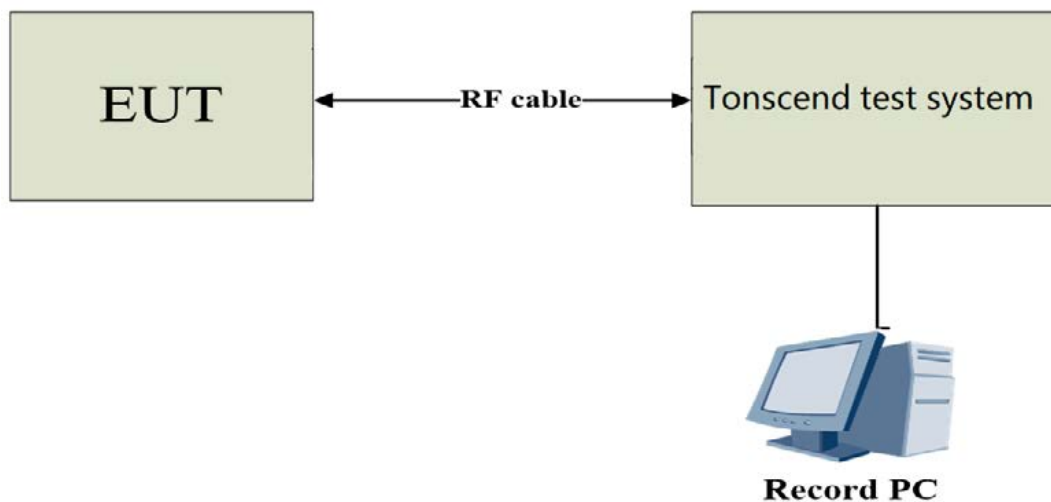

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MAXIMUM OUTPUT POWER

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)	Maximum Output Power	0.1250 Watt or 20.97 dBm

Note: Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 TEST PROCEDURE


- The EUT was directly connected to the tonskend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
RBW	3 MHz
VBW	8 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

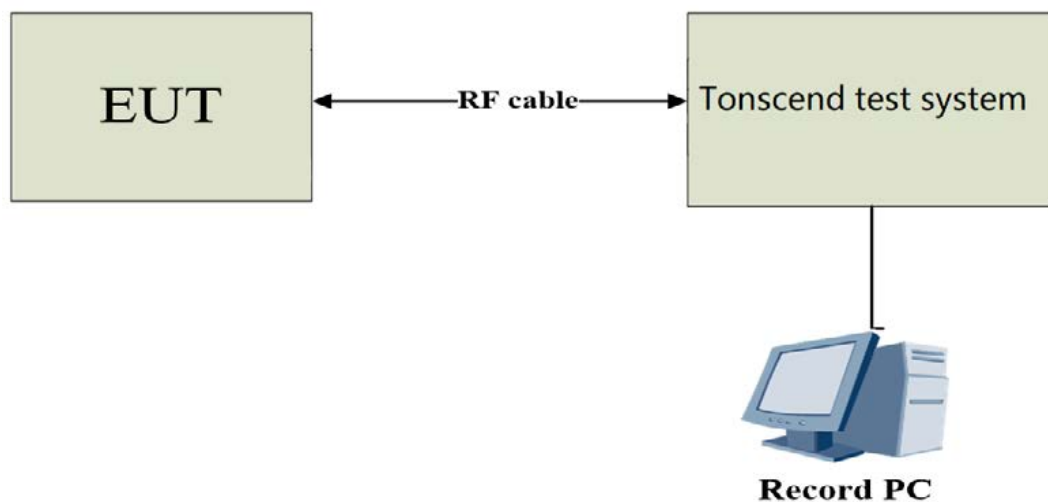

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX I.

10. CONDUCTED SPURIOUS EMISSION

10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

10.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

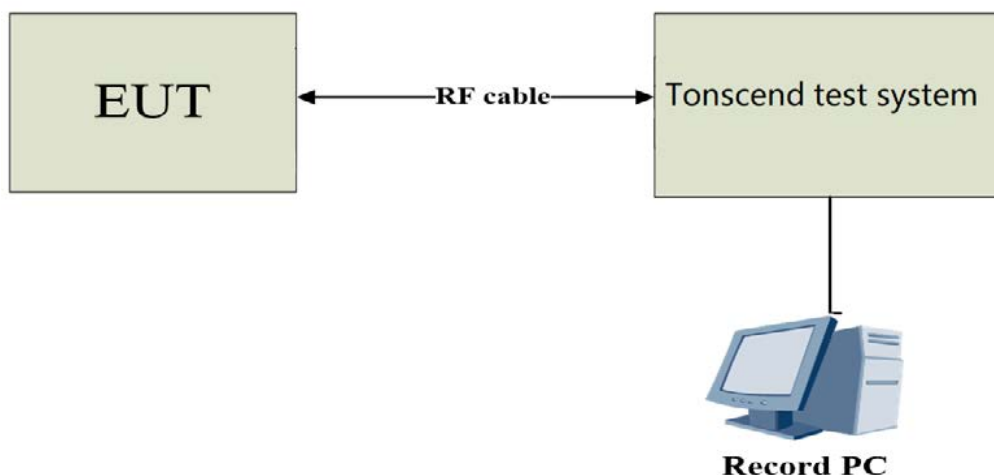

10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

Please refer to the APPENDIX J.

11. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions							
No.	Equipment	Manufacturer	Type No.	Serial No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal. Due date (yyyy/mm/dd)
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2025/3/1	2026/2/28
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2026/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2025/3/1	2026/2/28
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2025/3/1	2026/2/28
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2026/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2025/4/15	2026/4/14
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB151 9B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2025/3/1	2026/2/28
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emission							
1	MXA Signal Analyzer	Keysight	N9021B	MY60080 169	JLE050	2025/3/1	2026/2/28
2	RF Control Unit	dsusoft	JS0806-2	21G80604 49	JLE053	2025/3/1	2026/2/28
3	power supply unit	dsusoft	JS0806-4 ADC	N/A	JLE055	2025/3/1	2026/2/28
4	VXG Signal Generator	Keysight	N5182B	MY59100 855	JLE068	2025/4/15	2026/4/14
5	EXG Analog Signal Generator	Keysight	N5173B	MY59101 282	JLE052	2025/3/1	2026/2/28
6	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.000 2K50-116 064-Dt	JLE054	2025/3/1	2026/2/28
7	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2025/3/1	2026/2/28
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2025/2/21	2026/2/20
3	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2025/3/1	2026/2/28
4	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2025/3/1	2026/2/28
5	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2025/4/15	2026/4/14
6	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				

12. ANTENNA REQUIREMENT

Test standard: FCC part 15.203

According to the manufacturer declared, the EUT has one Integrated antenna, the antenna gain is 2.99dBi and the antenna connector is designed with permanent attachment.


Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

For adapter1

Test Mode	TX Mode_3Mbps Channel 39	Phase	Line
-----------	--------------------------	-------	------

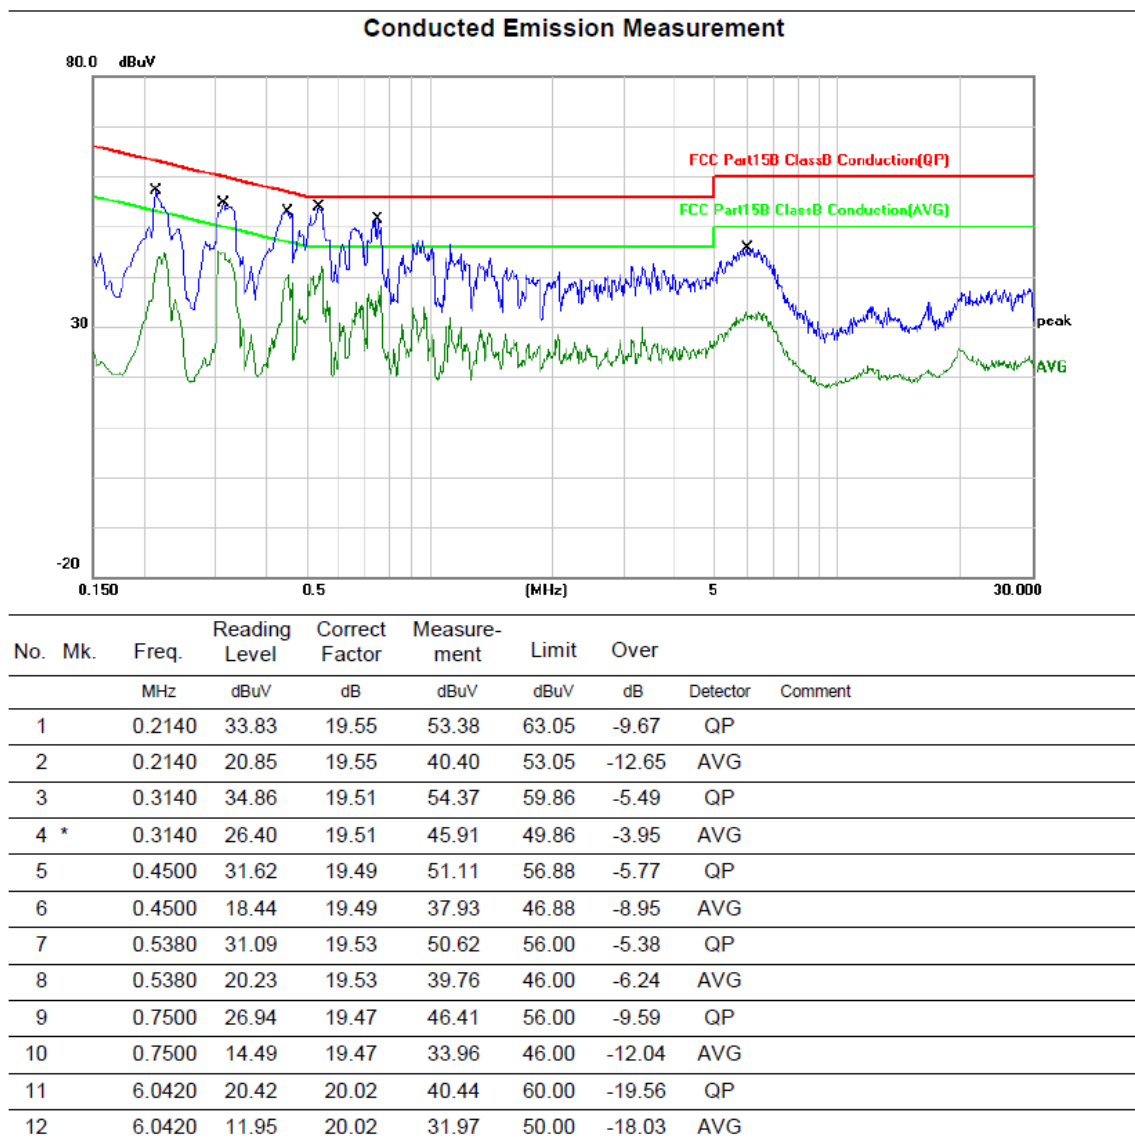


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_3Mbps Channel 39	Phase	Neutral
-----------	--------------------------	-------	---------

Conducted Emission Measurement

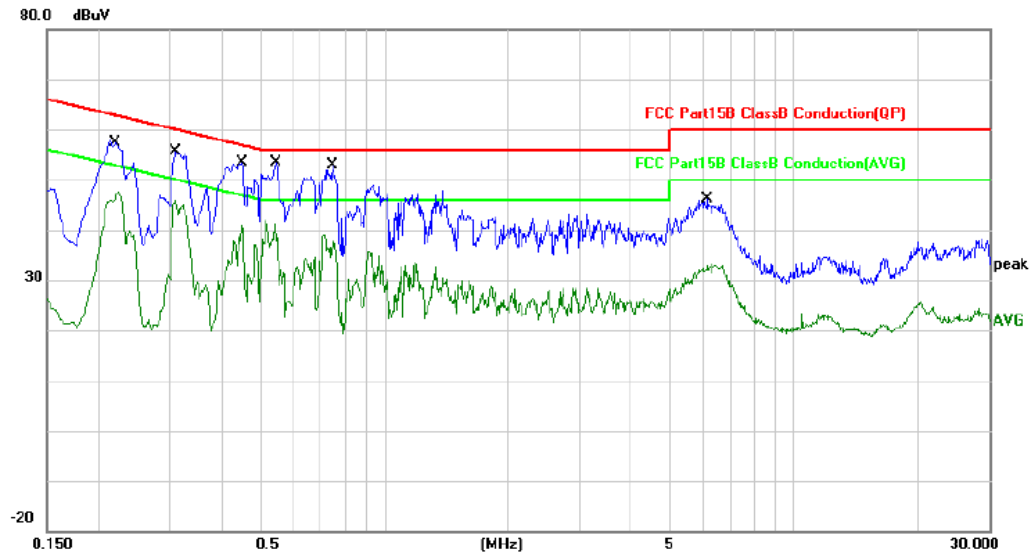

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2220	34.76	19.55	54.31	62.74	-8.43	QP	
2		0.2220	26.54	19.55	46.09	52.74	-6.65	AVG	
3		0.3100	34.17	19.52	53.69	59.97	-6.28	QP	
4 *		0.3100	26.82	19.52	46.34	49.97	-3.63	AVG	
5		0.4500	31.98	19.49	51.47	56.88	-5.41	QP	
6		0.4500	17.91	19.49	37.40	46.88	-9.48	AVG	
7		0.5460	31.56	19.53	51.09	56.00	-4.91	QP	
8		0.5460	19.78	19.53	39.31	46.00	-6.69	AVG	
9		0.7500	28.05	19.47	47.52	56.00	-8.48	QP	
10		0.7500	15.38	19.47	34.85	46.00	-11.15	AVG	
11		6.1820	18.81	20.03	38.84	60.00	-21.16	QP	
12		6.1820	10.33	20.03	30.36	50.00	-19.64	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For adapter2

Test Mode	TX Mode_3Mbps Channel 39	Phase	Line
-----------	--------------------------	-------	------

Conducted Emission Measurement

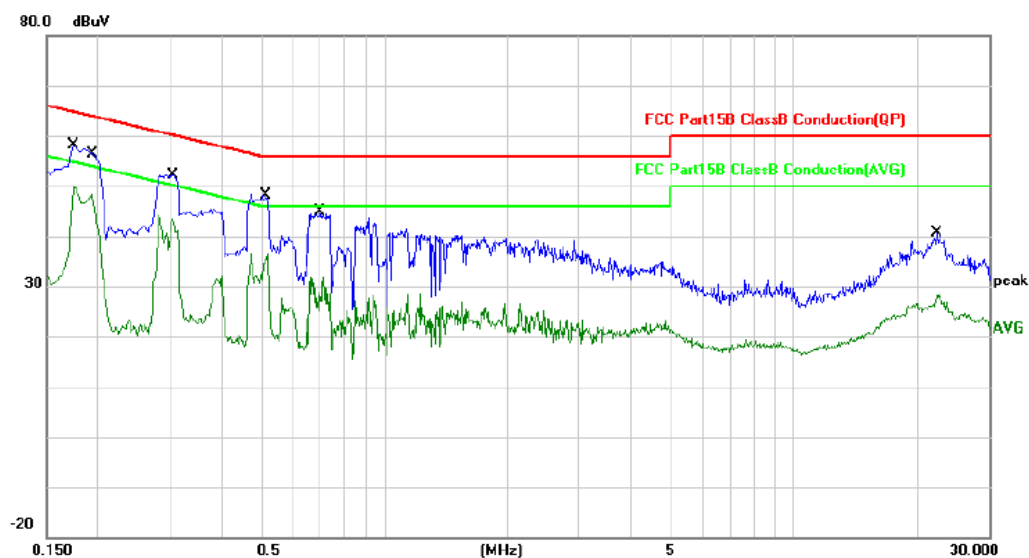


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1740	33.30	19.49	52.79	64.77	-11.98	QP	
2		0.1740	20.79	19.49	40.28	54.77	-14.49	AVG	
3		0.1965	36.10	19.52	55.62	63.76	-8.14	QP	
4 *		0.1965	28.96	19.52	48.48	53.76	-5.28	AVG	
5		0.3060	31.12	19.51	50.63	60.08	-9.45	QP	
6		0.3060	21.21	19.51	40.72	50.08	-9.36	AVG	
7		0.5180	25.97	19.50	45.47	56.00	-10.53	QP	
8		0.5180	12.83	19.50	32.33	46.00	-13.67	AVG	
9		0.6980	22.94	19.50	42.44	56.00	-13.56	QP	
10		0.6980	7.59	19.50	27.09	46.00	-18.91	AVG	
11		22.3740	10.15	20.94	31.09	60.00	-28.91	QP	
12		22.3740	4.14	20.94	25.08	50.00	-24.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_3Mbps Channel 39	Phase	Neutral
-----------	--------------------------	-------	---------

Conducted Emission Measurement

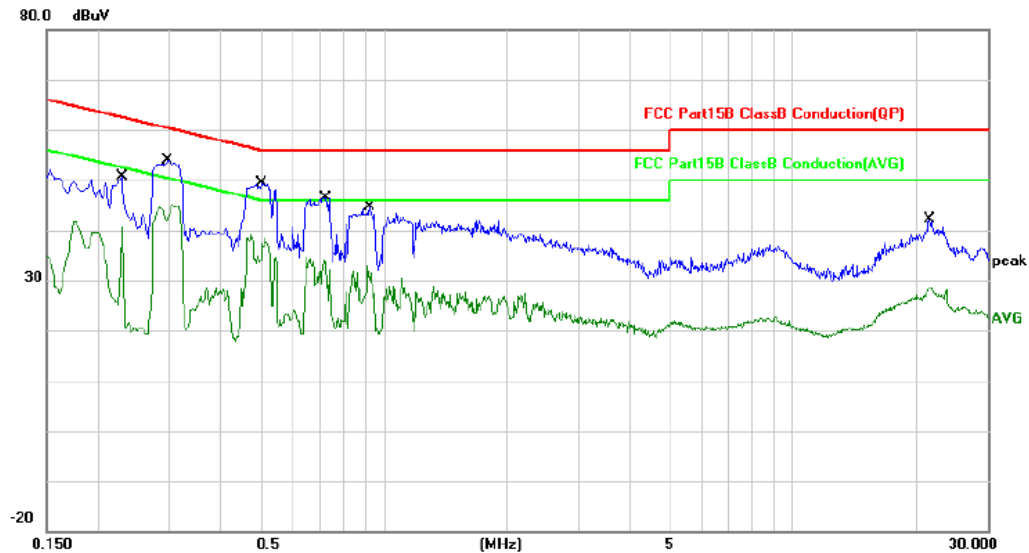

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2300	22.24	19.56	41.80	62.45	-20.65	QP	
2		0.2300	0.58	19.56	20.14	52.45	-32.31	AVG	
3	*	0.2980	32.15	19.54	51.69	60.30	-8.61	QP	
4		0.2980	21.32	19.54	40.86	50.30	-9.44	AVG	
5		0.5060	27.23	19.56	46.79	56.00	-9.21	QP	
6		0.5060	13.70	19.56	33.26	46.00	-12.74	AVG	
7		0.7260	23.70	19.46	43.16	56.00	-12.84	QP	
8		0.7260	9.98	19.46	29.44	46.00	-16.56	AVG	
9		0.9260	21.49	19.49	40.98	56.00	-15.02	QP	
10		0.9260	6.91	19.49	26.40	46.00	-19.60	AVG	
11		21.6780	12.22	20.92	33.14	60.00	-26.86	QP	
12		21.6780	5.96	20.92	26.88	50.00	-23.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

For adapter1

Test Mode	TX Mode_3Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

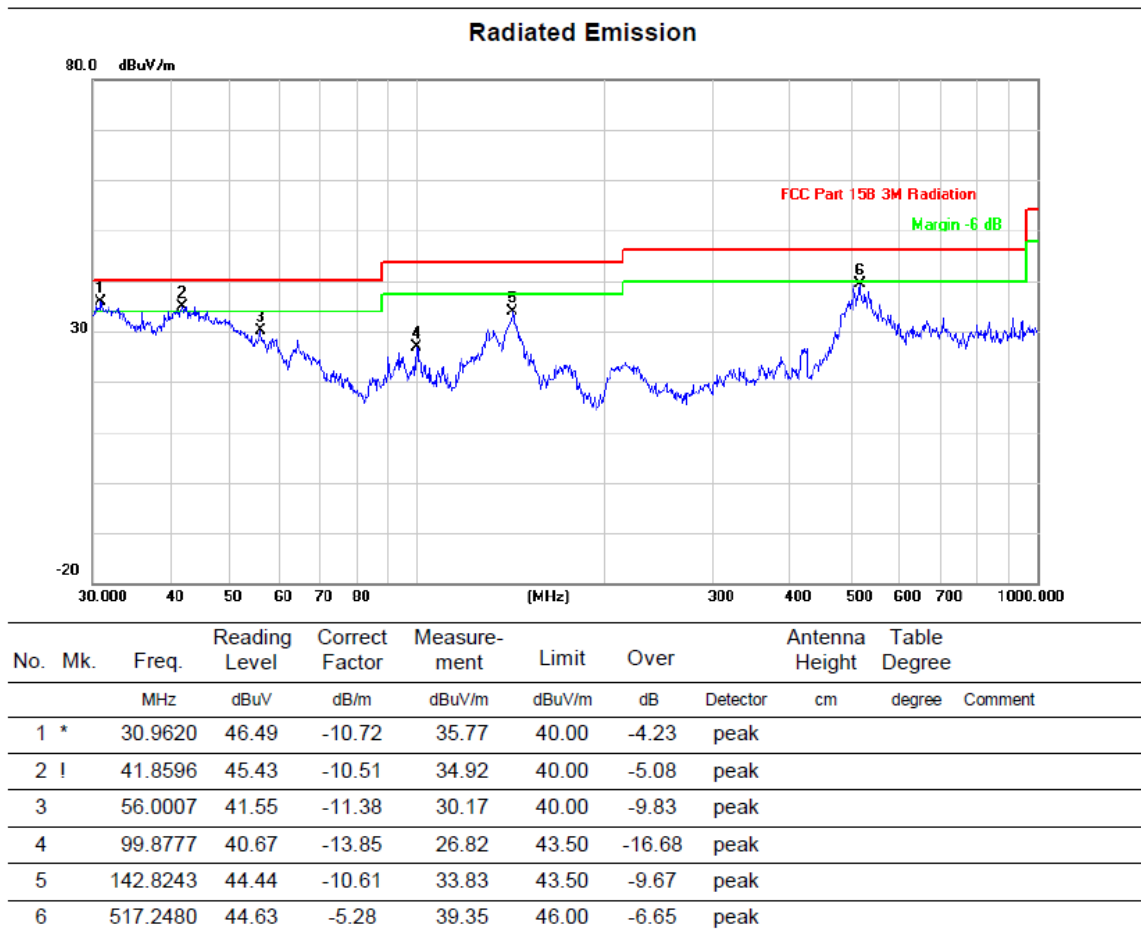


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_3Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

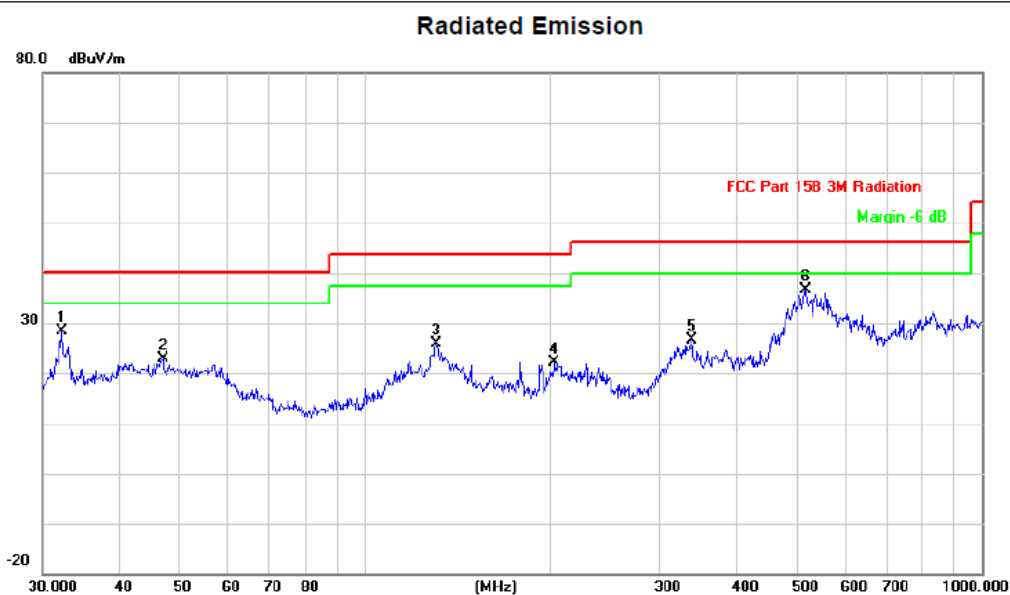

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.1795	39.72	-11.39	28.33	40.00	-11.67	peak		
2		46.9948	33.91	-11.06	22.85	40.00	-17.15	peak		
3		130.3790	36.45	-10.56	25.89	43.50	-17.61	peak		
4		202.8104	34.94	-12.79	22.15	43.50	-21.35	peak		
5		338.4001	36.31	-9.59	26.72	46.00	-19.28	peak		
6	*	519.0650	42.16	-5.53	36.63	46.00	-9.37	peak		


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

For adapter2

Test Mode	TX Mode_3Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

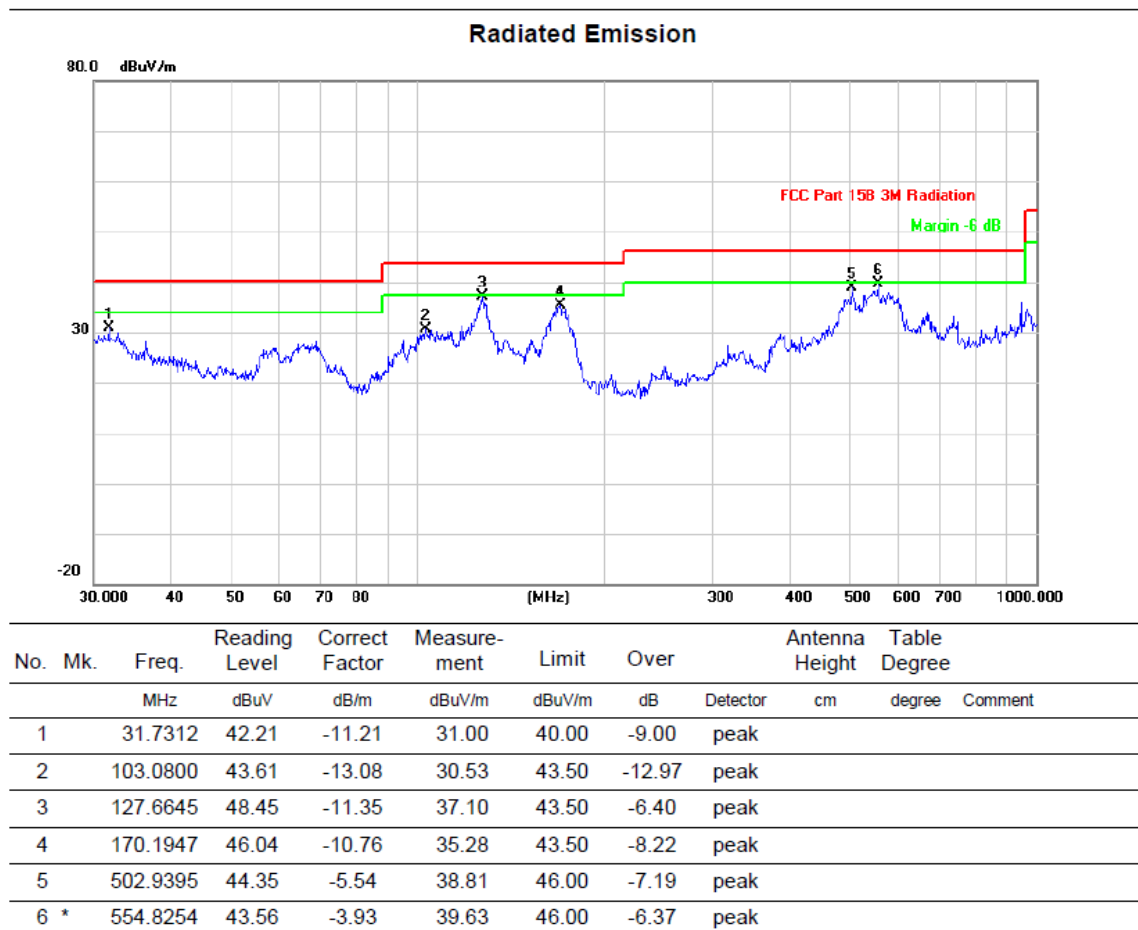


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_3Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------


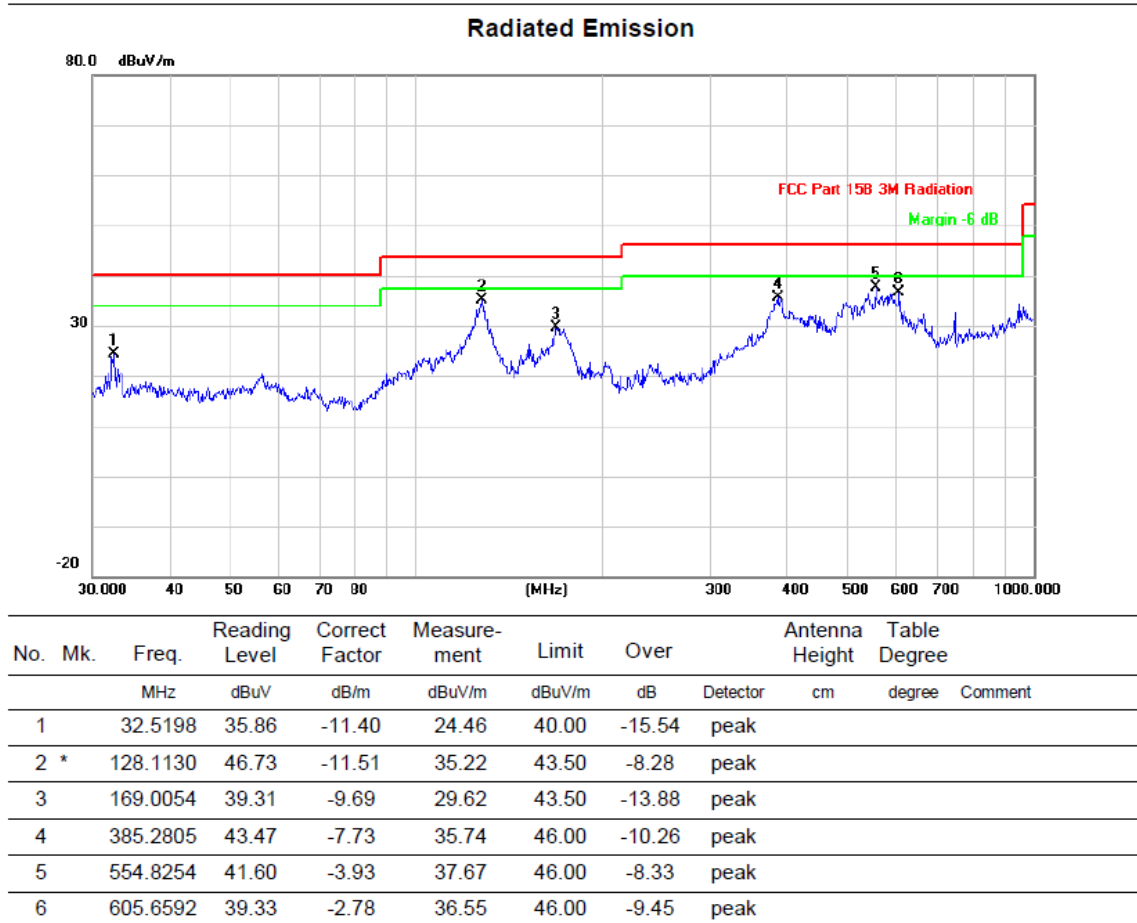


REMARKS:



- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ


Test Mode	TX Mode_3Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

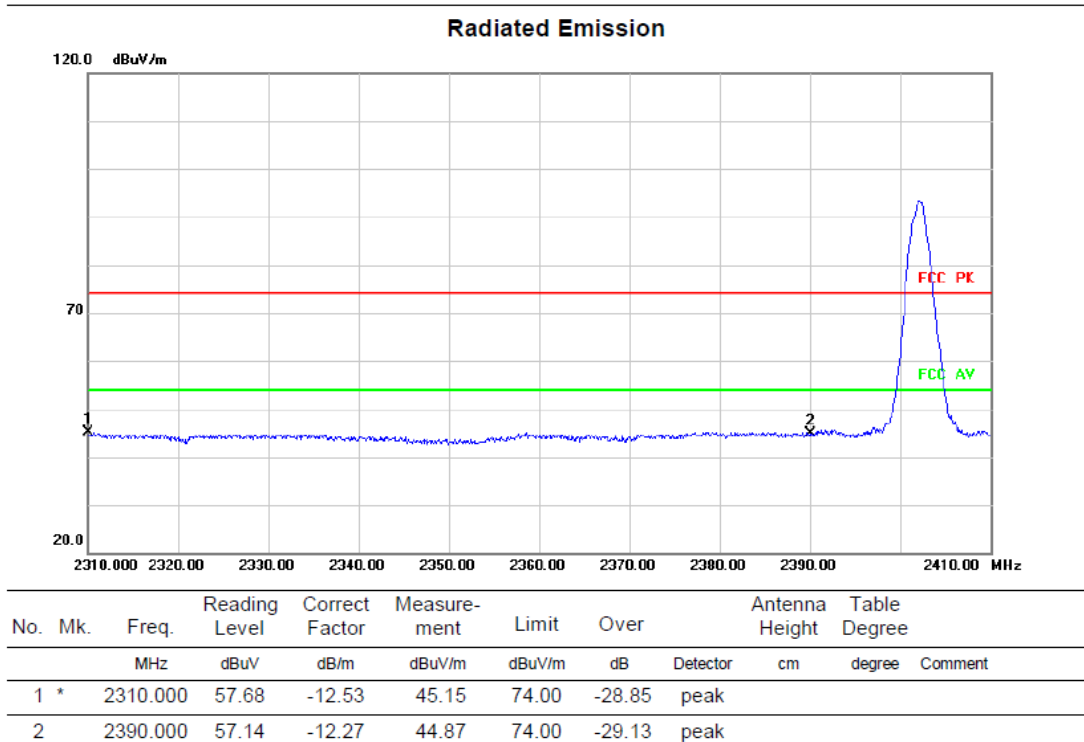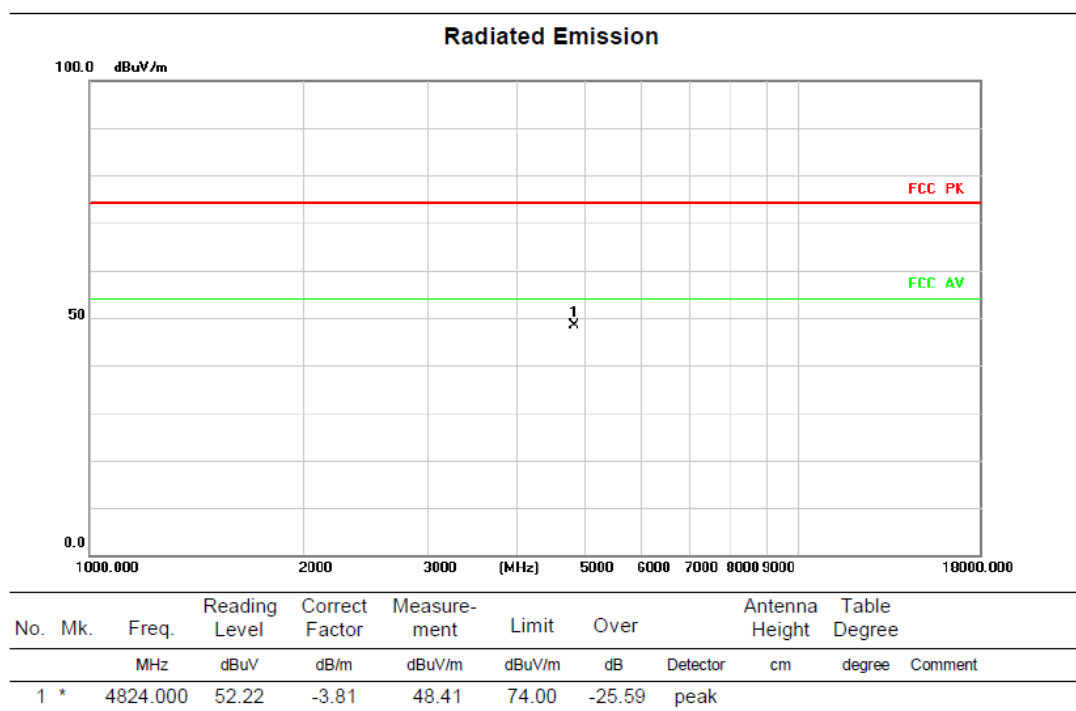


Test Mode	TX Mode_3Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

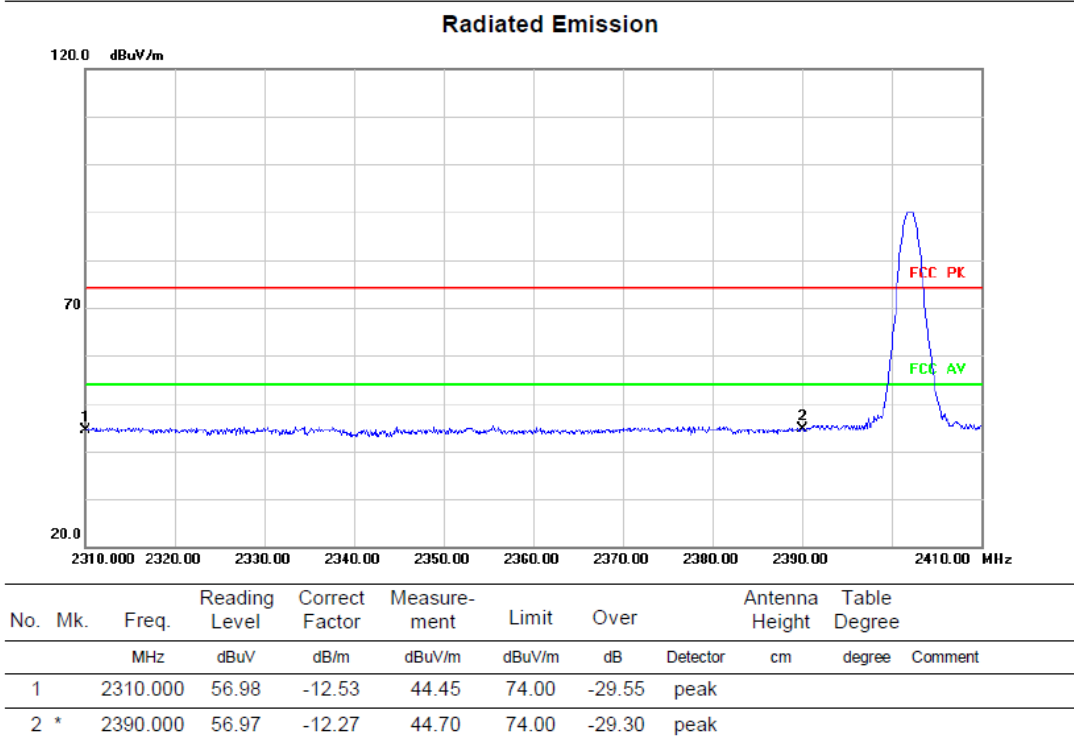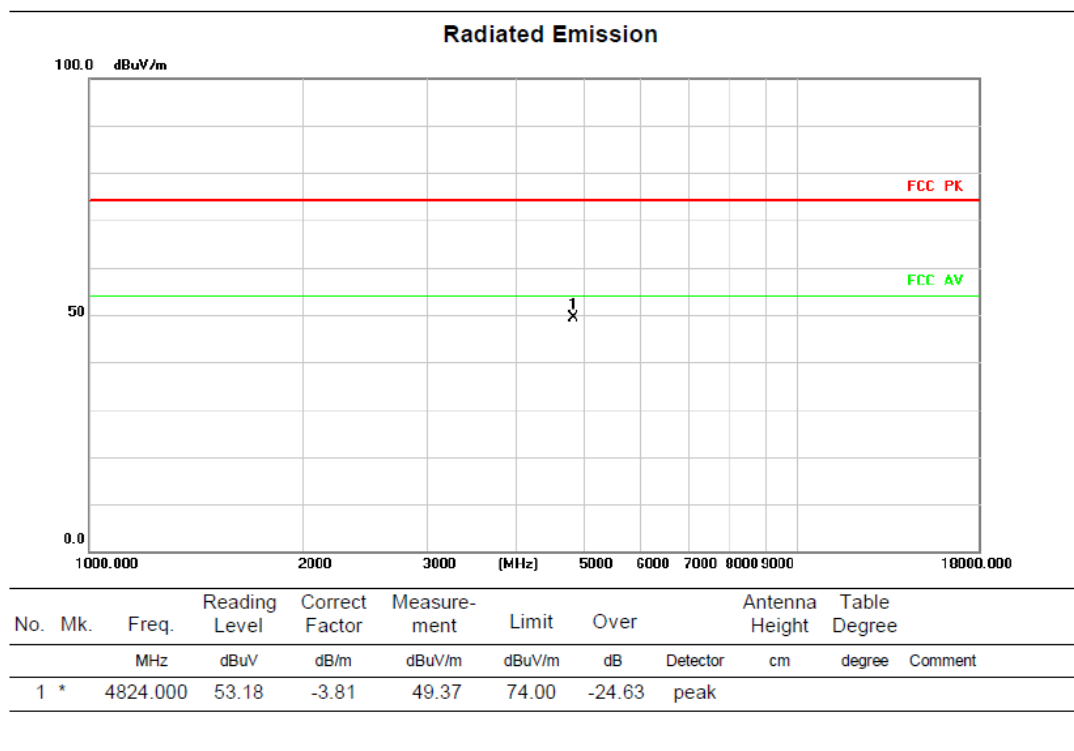

Test Mode	TX Mode_3Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

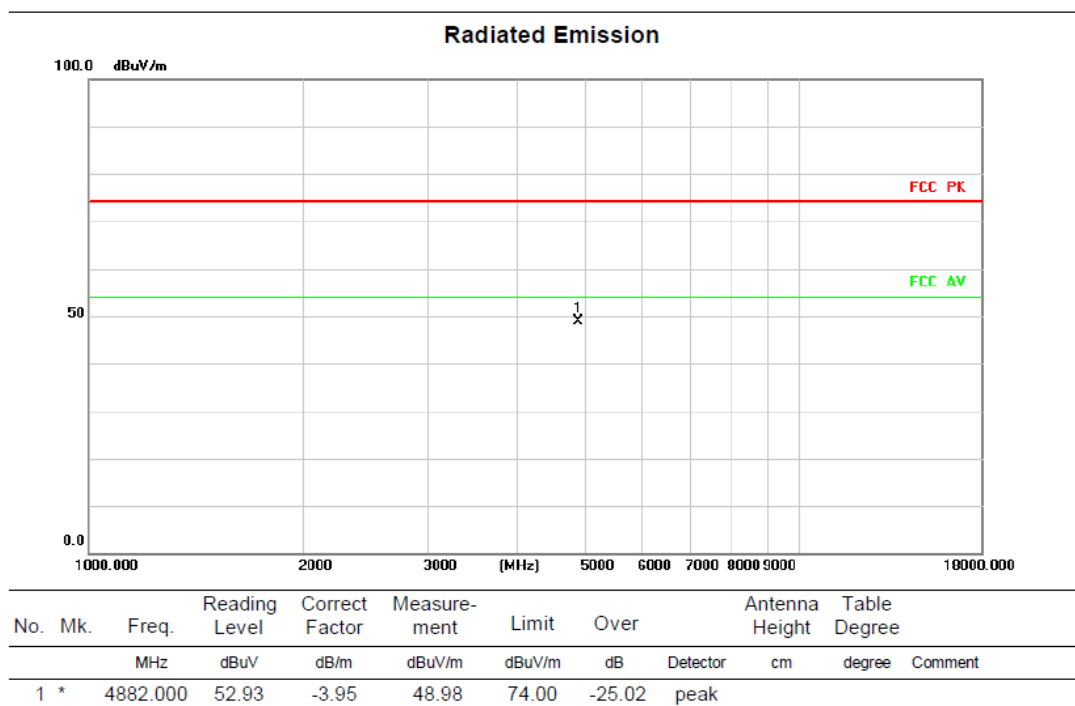


Test Mode	TX Mode_3Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

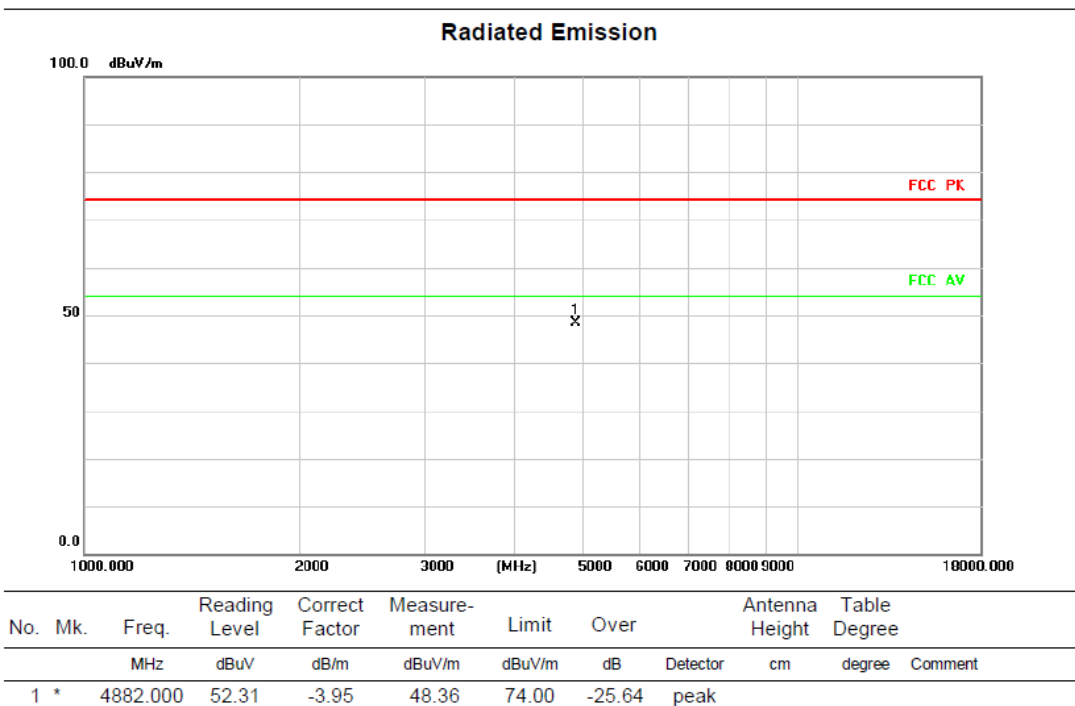


Test Mode	TX Mode_3Mbps Channel78	Polarization	Vertical
-----------	-------------------------	--------------	----------

Radiated Emission

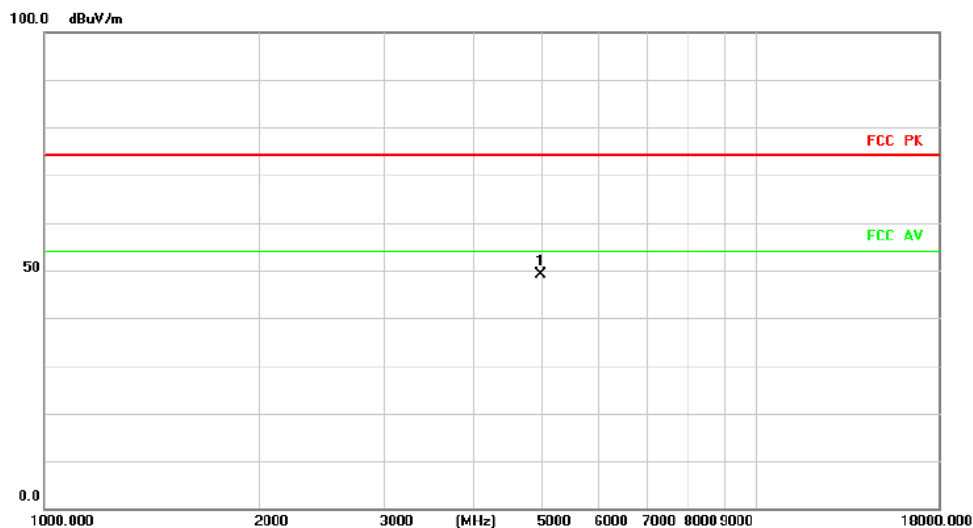

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4960.000	53.14	-4.02	49.12	74.00	-24.88	peak		


Radiated Emission

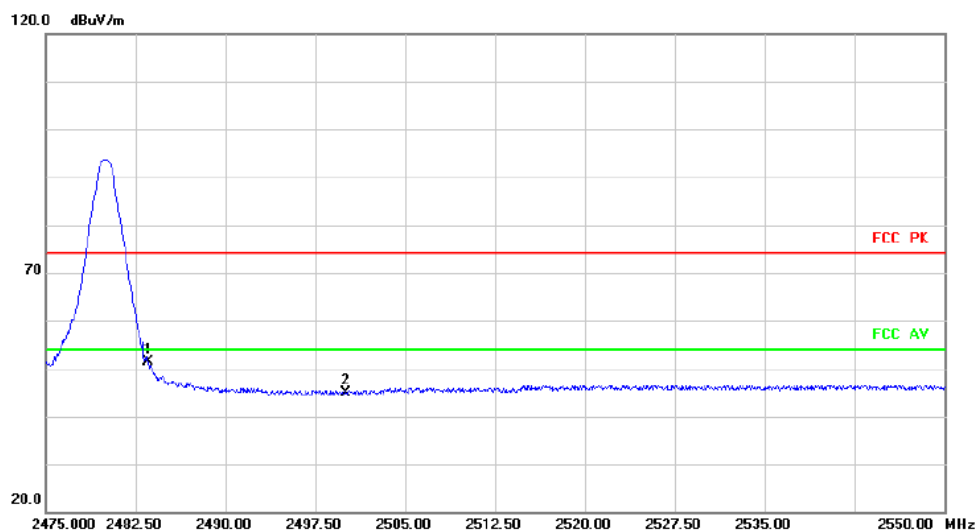

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	62.84	-11.38	51.46	74.00	-22.54	peak		
2		2500.000	56.05	-11.17	44.88	74.00	-29.12	peak		


Test Mode	TX Mode_3Mbps Channel 78	Polarization	Horizontal
-----------	--------------------------	--------------	------------

Radiated Emission

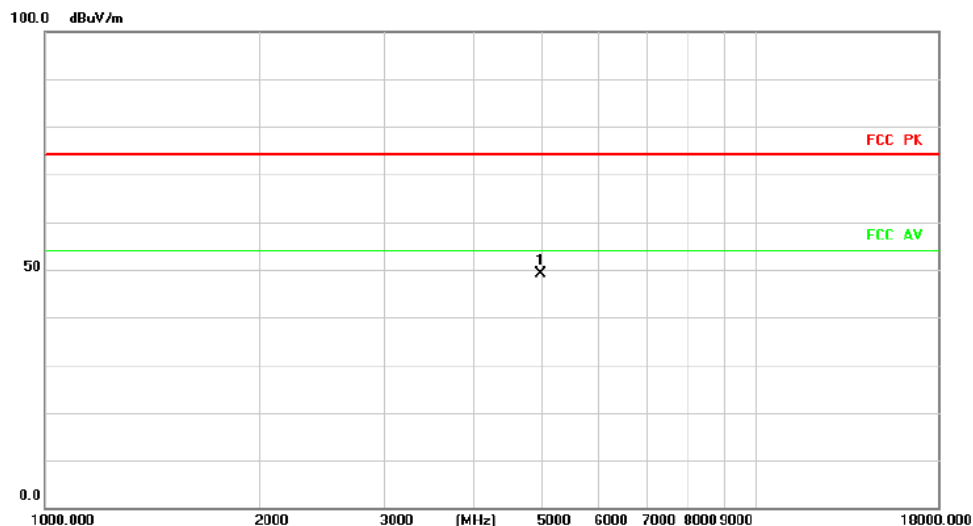

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4960.000	53.24	-4.02	49.22	74.00	-24.78	peak	

Radiated Emission

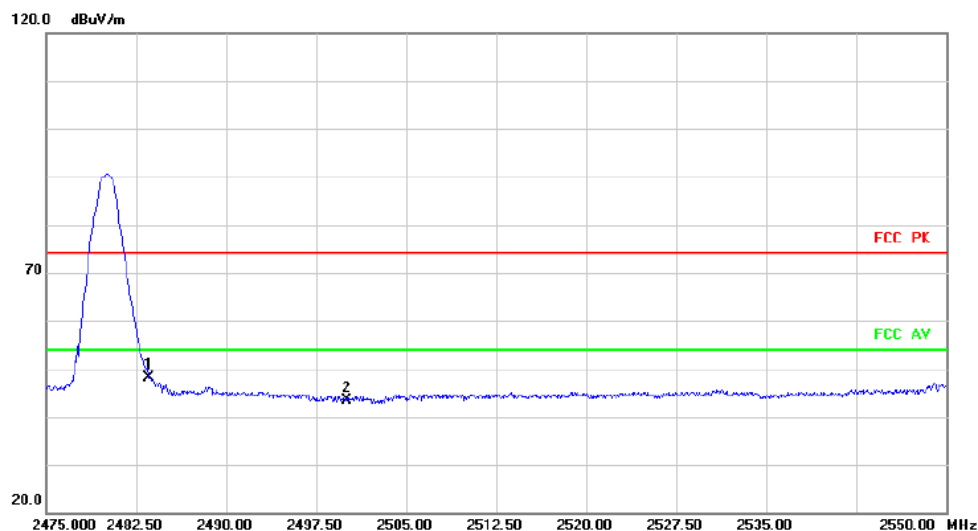

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	2483.500	59.42	-11.38	48.04	74.00	-25.96	peak	
2		2500.000	54.62	-11.17	43.45	74.00	-30.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - NUMBER OF HOPPING FREQUENCY

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs






APPENDIX F - AVERAGE TIME OF OCCUPANCY


Test Mode	Antenna	Frequency[MHz]	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.371	318	0.118	≤0.4	PASS
DH3	Ant1	Hop	1.629	161	0.262	≤0.4	PASS
DH5	Ant1	Hop	2.877	108	0.311	≤0.4	PASS
2DH1	Ant1	Hop	0.379	319	0.121	≤0.4	PASS
2DH3	Ant1	Hop	1.630	152	0.248	≤0.4	PASS
2DH5	Ant1	Hop	2.875	107	0.308	≤0.4	PASS
3DH1	Ant1	Hop	0.379	320	0.121	≤0.4	PASS
3DH3	Ant1	Hop	1.629	162	0.264	≤0.4	PASS
3DH5	Ant1	Hop	2.880	111	0.320	≤0.4	PASS

Test Graphs



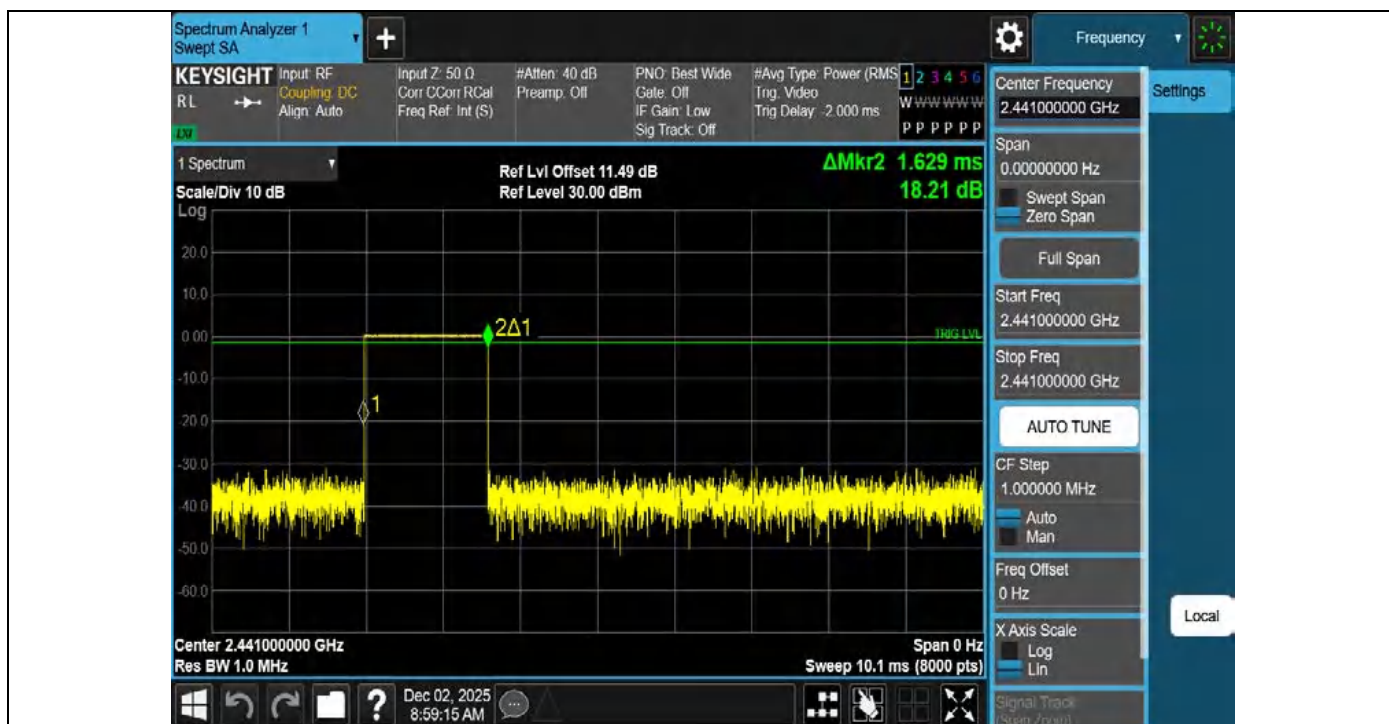


DH3-Ant1-Hop-PASS

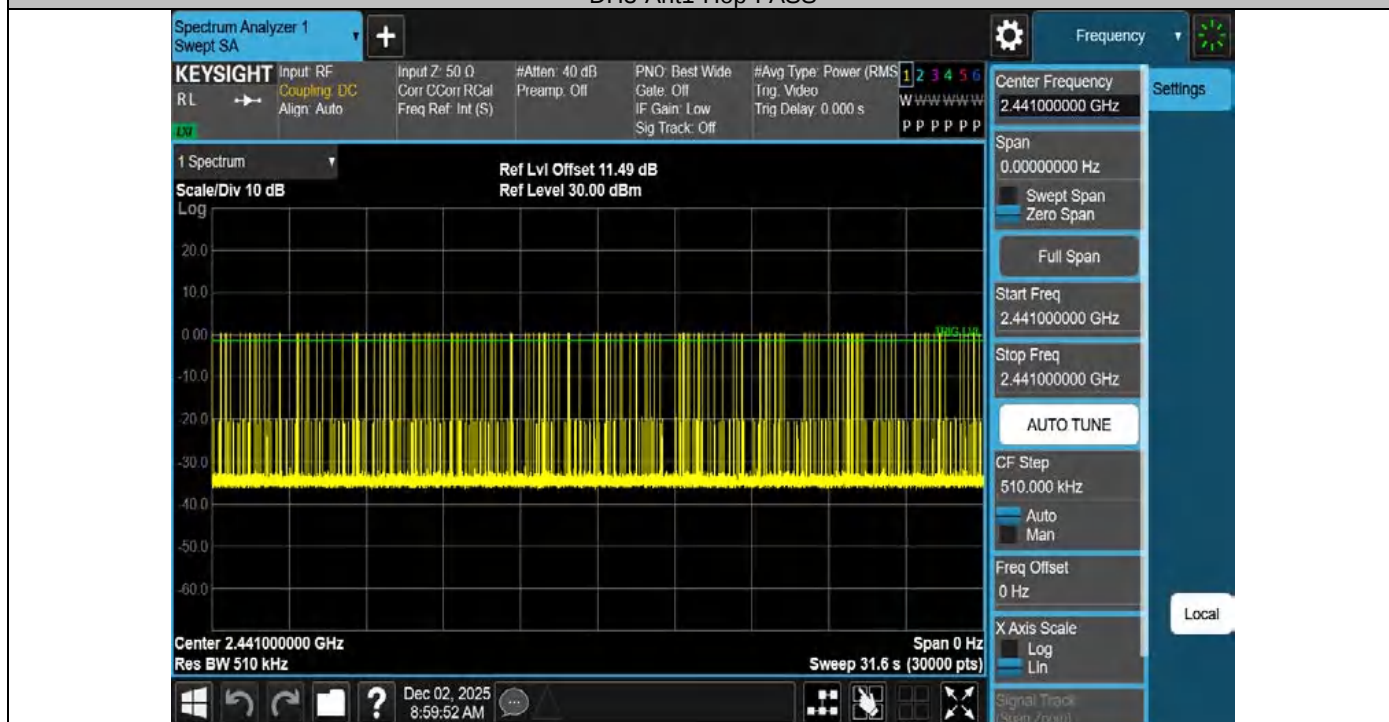




2DH1-Ant1-Hop-PASS

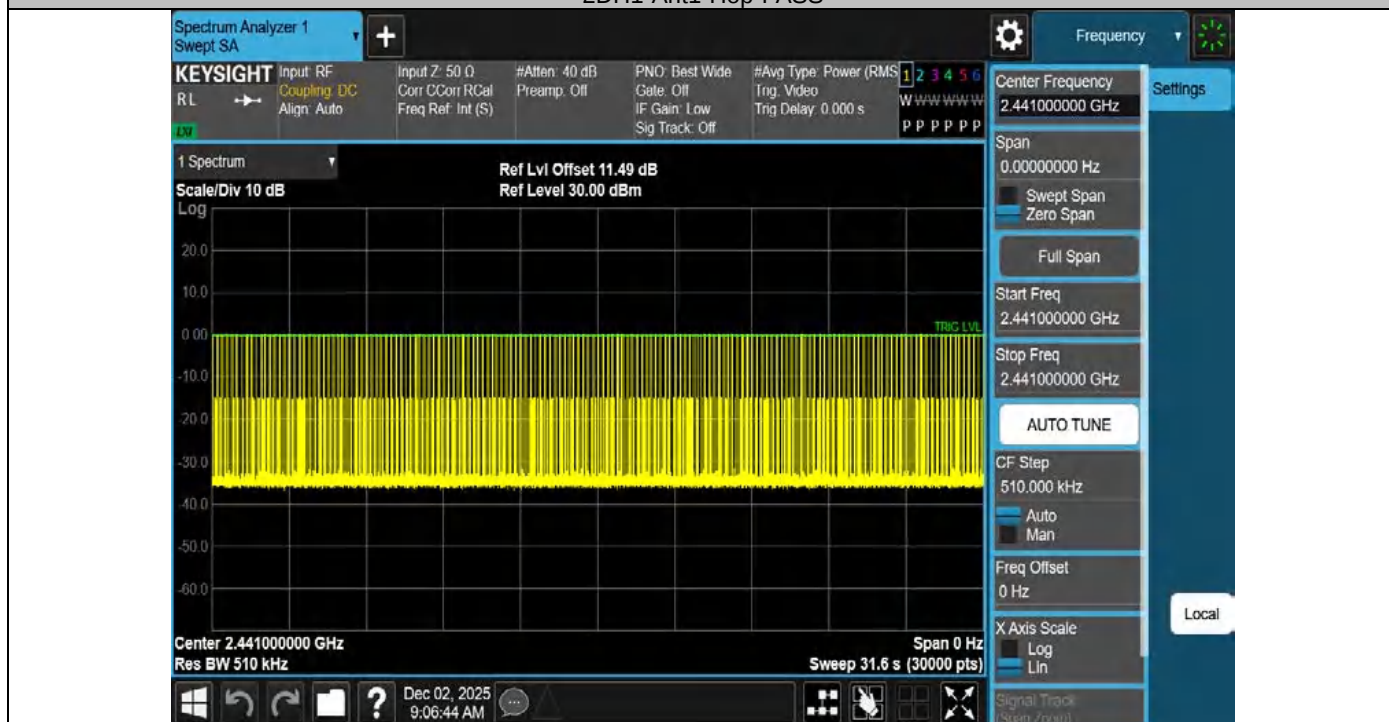



2DH3-Ant1-Hop-PASS



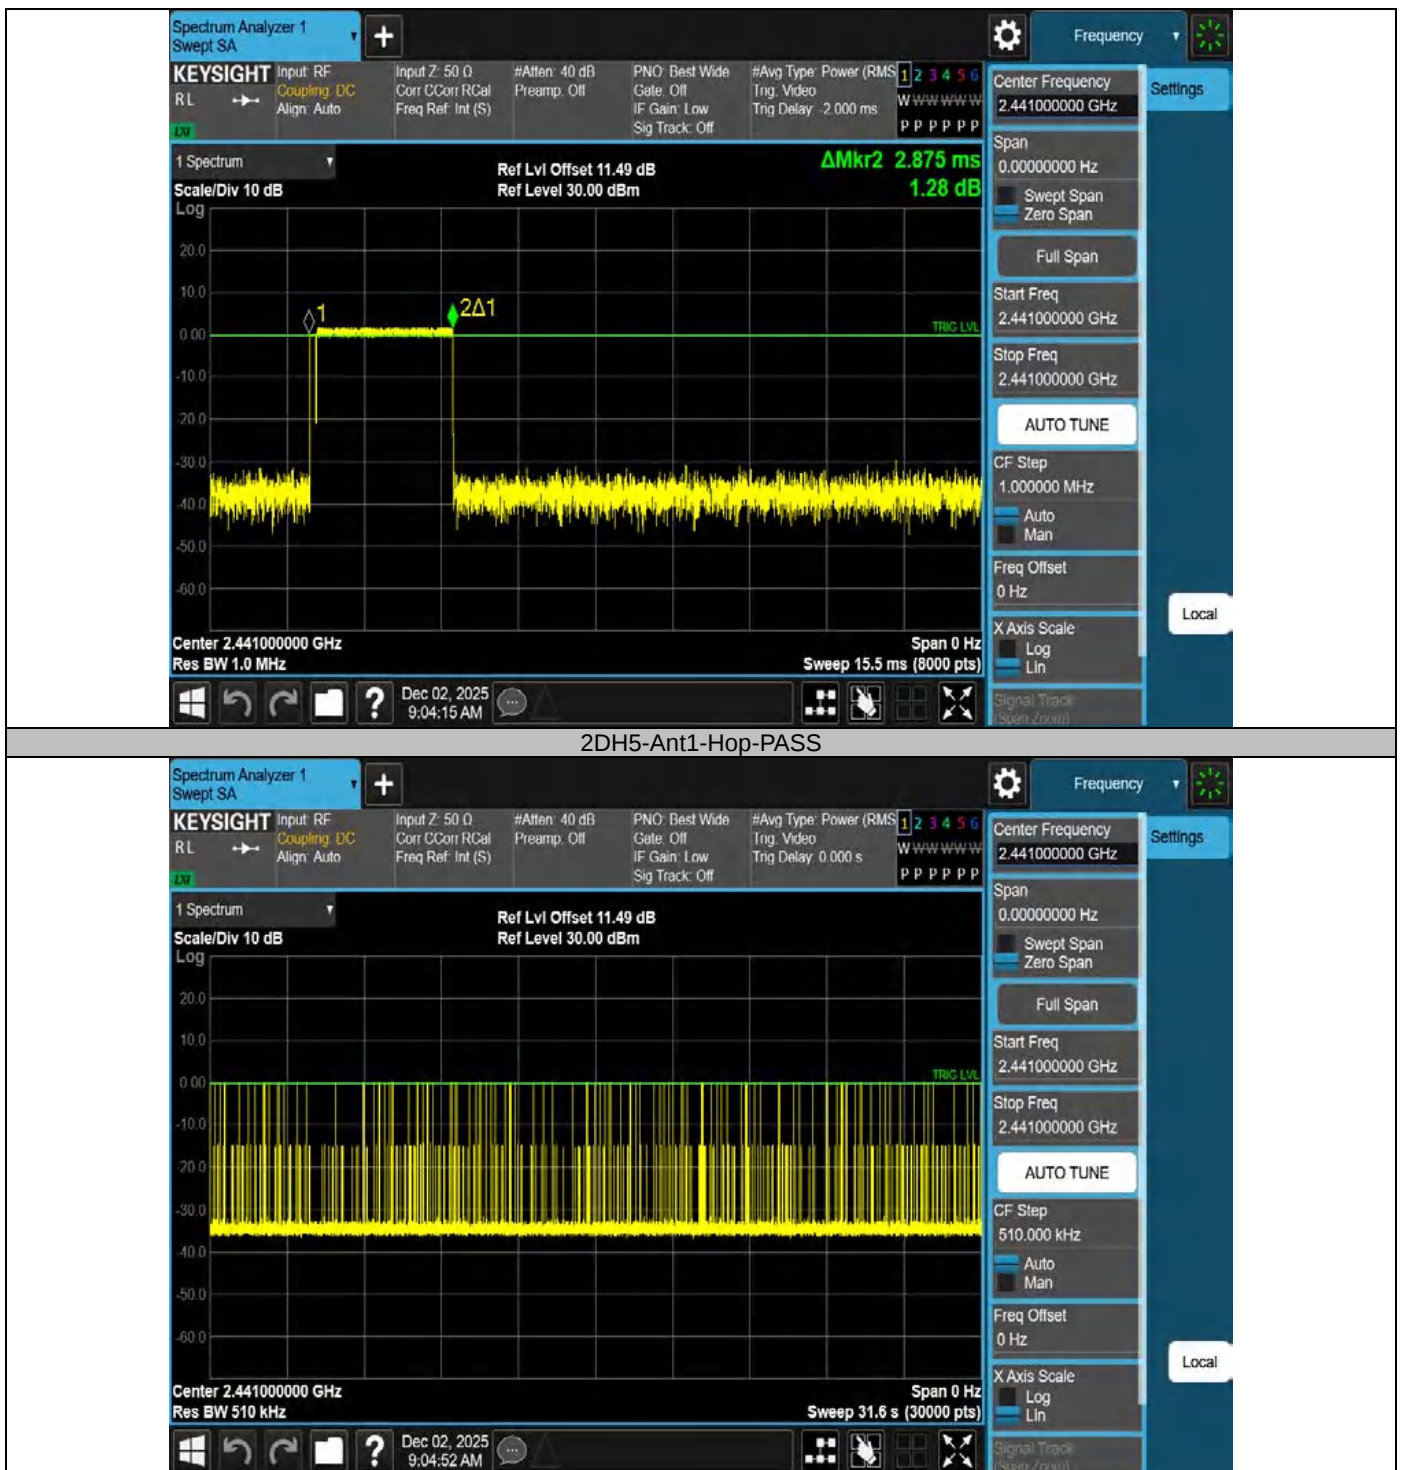




3DH1-Ant1-Hop-PASS





3DH3-Ant1-Hop-PASS



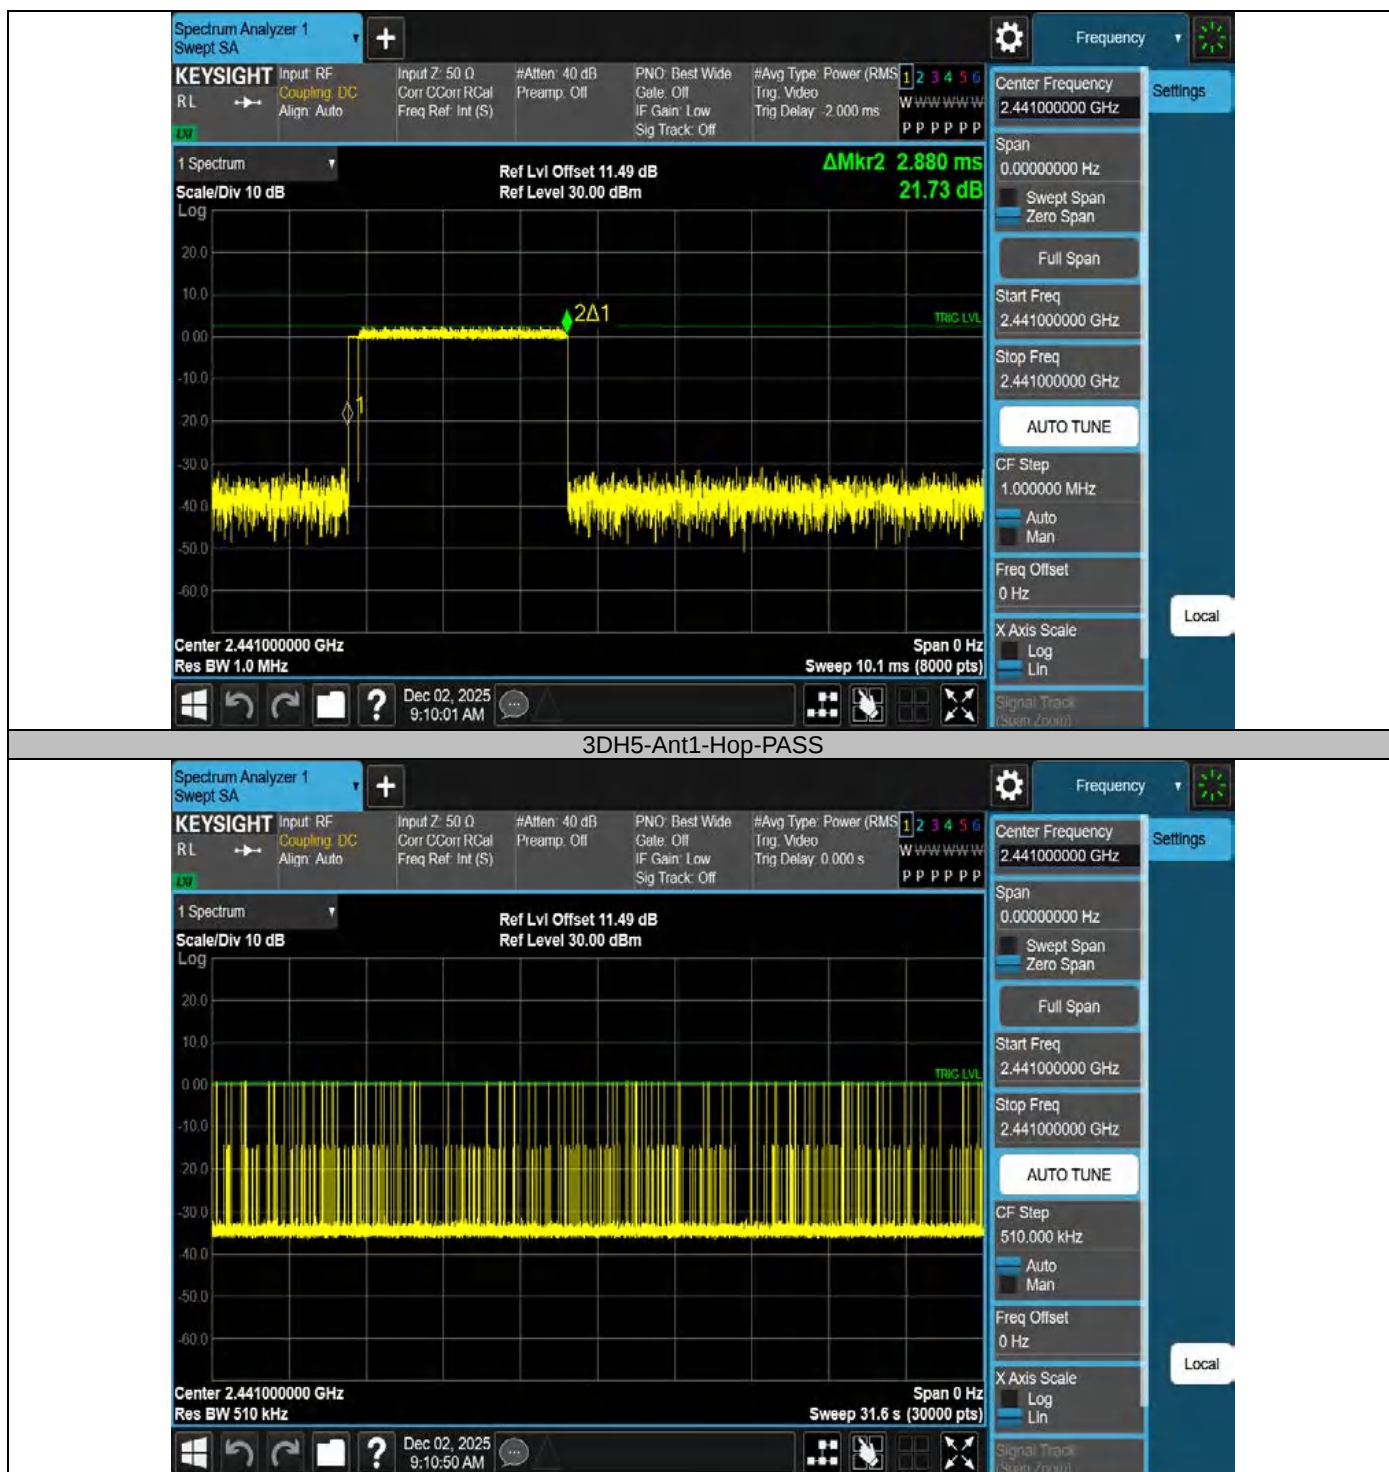

APPENDIX G - HOPPING CHANNEL SEPARATION

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.674	≥0.634	PASS
2DH5	Ant1	Hop	1.018	≥0.926	PASS
3DH5	Ant1	Hop	1	≥0.904	PASS

Test Graphs





APPENDIX H - BANDWIDTH

20dB Emission Bandwidth

Test Mode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.945	2401.532	2402.477	---	---
DH5	Ant1	2441	0.951	2440.532	2441.483	---	---
DH5	Ant1	2480	0.930	2479.541	2480.471	---	---
2DH5	Ant1	2402	1.383	2401.307	2402.690	---	---
2DH5	Ant1	2441	1.389	2440.301	2441.690	---	---
2DH5	Ant1	2480	1.380	2479.310	2480.690	---	---
3DH5	Ant1	2402	1.356	2401.316	2402.672	---	---
3DH5	Ant1	2441	1.353	2440.316	2441.669	---	---
3DH5	Ant1	2480	1.350	2479.319	2480.669	---	---

Test Graphs





DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480

Occupied Channel Bandwidth

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.84060	2401.5767	2402.4173	---	---
DH5	Ant1	2441	0.85612	2440.5687	2441.4248	---	---
DH5	Ant1	2480	0.85461	2479.5696	2480.4243	---	---
2DH5	Ant1	2402	1.2456	2401.3797	2402.6253	---	---
2DH5	Ant1	2441	1.2522	2440.3762	2441.6284	---	---
2DH5	Ant1	2480	1.2456	2479.3790	2480.6246	---	---
3DH5	Ant1	2402	1.2352	2401.3754	2402.6106	---	---
3DH5	Ant1	2441	1.2454	2440.3723	2441.6177	---	---
3DH5	Ant1	2480	1.2339	2479.3808	2480.6147	---	---

Test Graphs





DH5-Ant1-2441



DH5-Ant1-2480




2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480

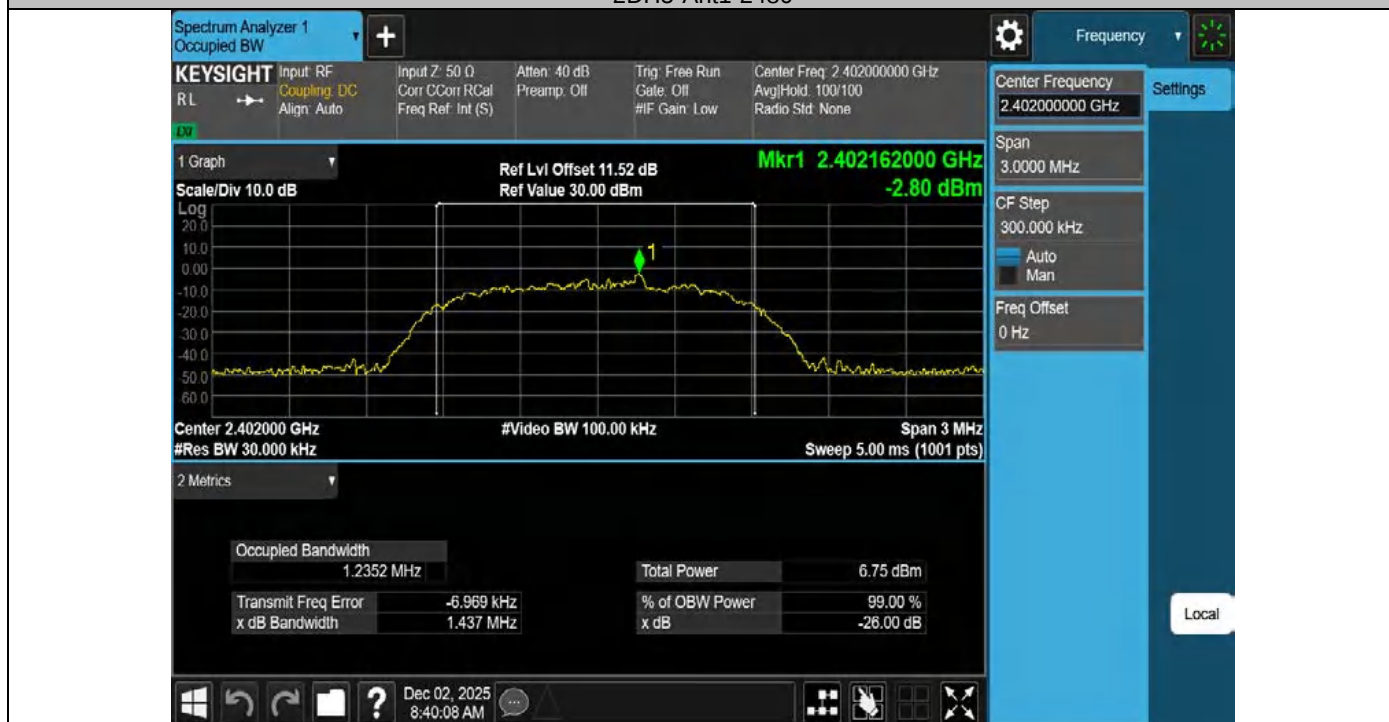

3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480

APPENDIX I - MAXIMUM OUTPUT POWER

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	0.68	≤ 20.97	PASS
		2441	0.43	≤ 20.97	PASS
		2480	0.66	≤ 20.97	PASS
2DH5	Ant1	2402	1.95	≤ 20.97	PASS
		2441	1.61	≤ 20.97	PASS
		2480	1.89	≤ 20.97	PASS
3DH5	Ant1	2402	2.71	≤ 20.97	PASS
		2441	2.60	≤ 20.97	PASS
		2480	2.74	≤ 20.97	PASS

Test Graphs





DH5-Ant1-2441-PASS



DH5-Ant1-2480-PASS



2DH5-Ant1-2402-PASS



2DH5-Ant1-2441-PASS



2DH5-Ant1-2480-PASS



3DH5-Ant1-2402-PASS



3DH5-Ant1-2441-PASS




3DH5-Ant1-2480-PASS

APPENDIX J - CONDUCTED SPURIOUS EMISSION

Test Graphs



DH5-Ant1-2402-0~Reference-PASS

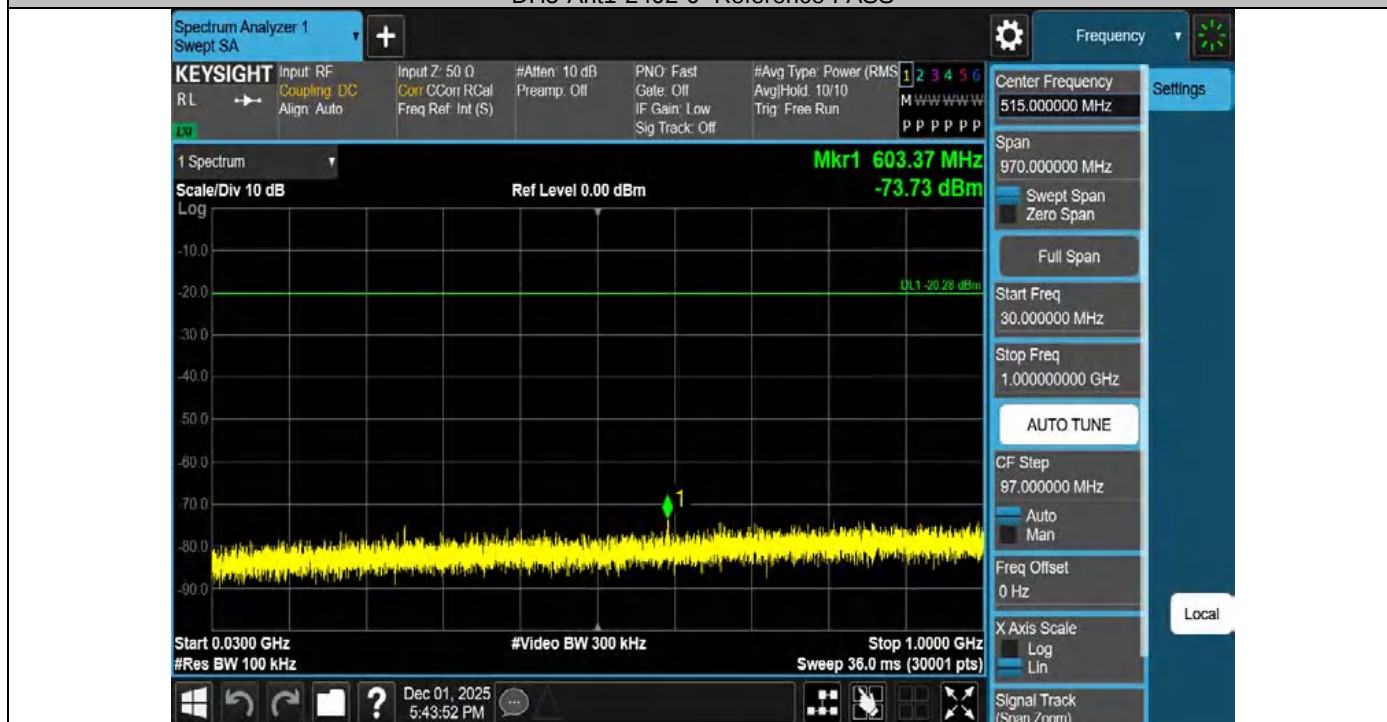


DH5-Ant1-2402-30~1000-PASS



DH5-Ant1-2402-1000-26500-PASS



DH5-Ant1-2441-0-Reference-PASS

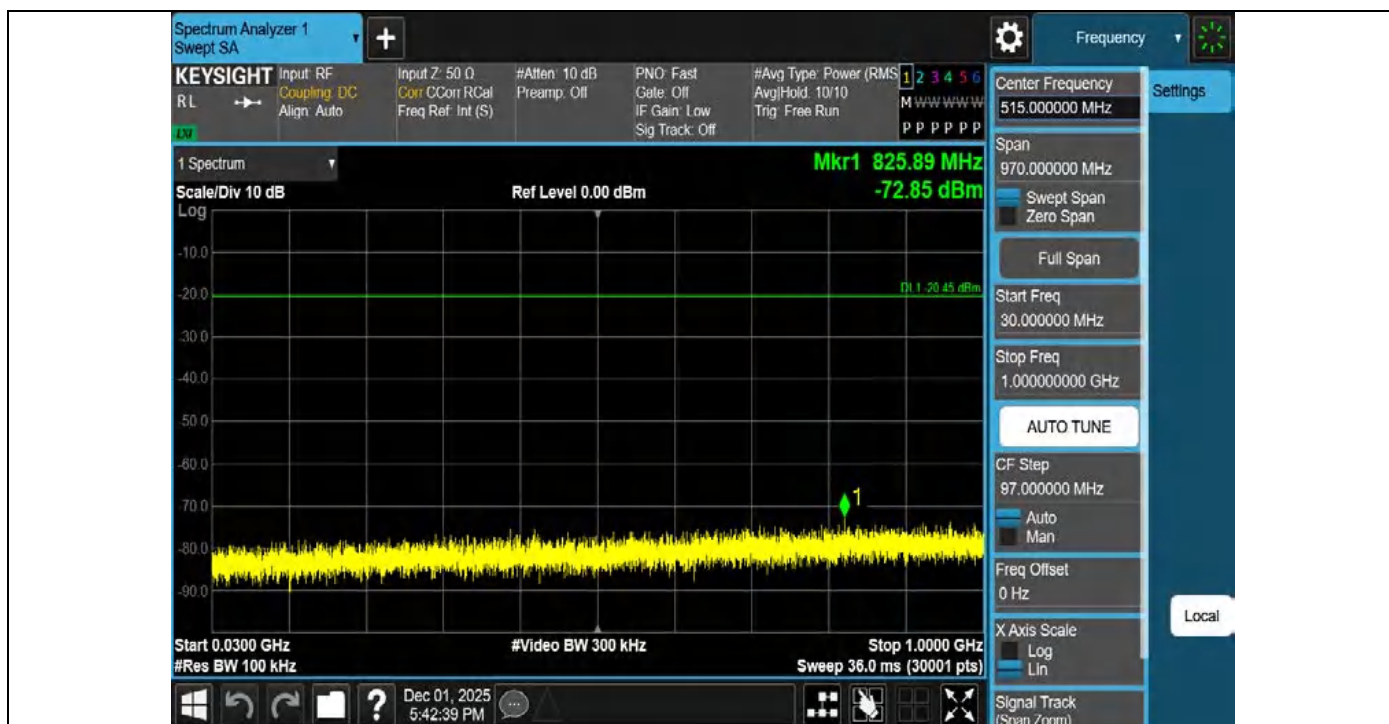

DH5-Ant1-2441-30~1000-PASS



DH5-Ant1-2441-1000~26500-PASS



DH5-Ant1-2480-0~Reference-PASS




DH5-Ant1-2480-30~1000-PASS



DH5-Ant1-2480-1000-26500-PASS



2DH5-Ant1-2402-0-Reference-PASS

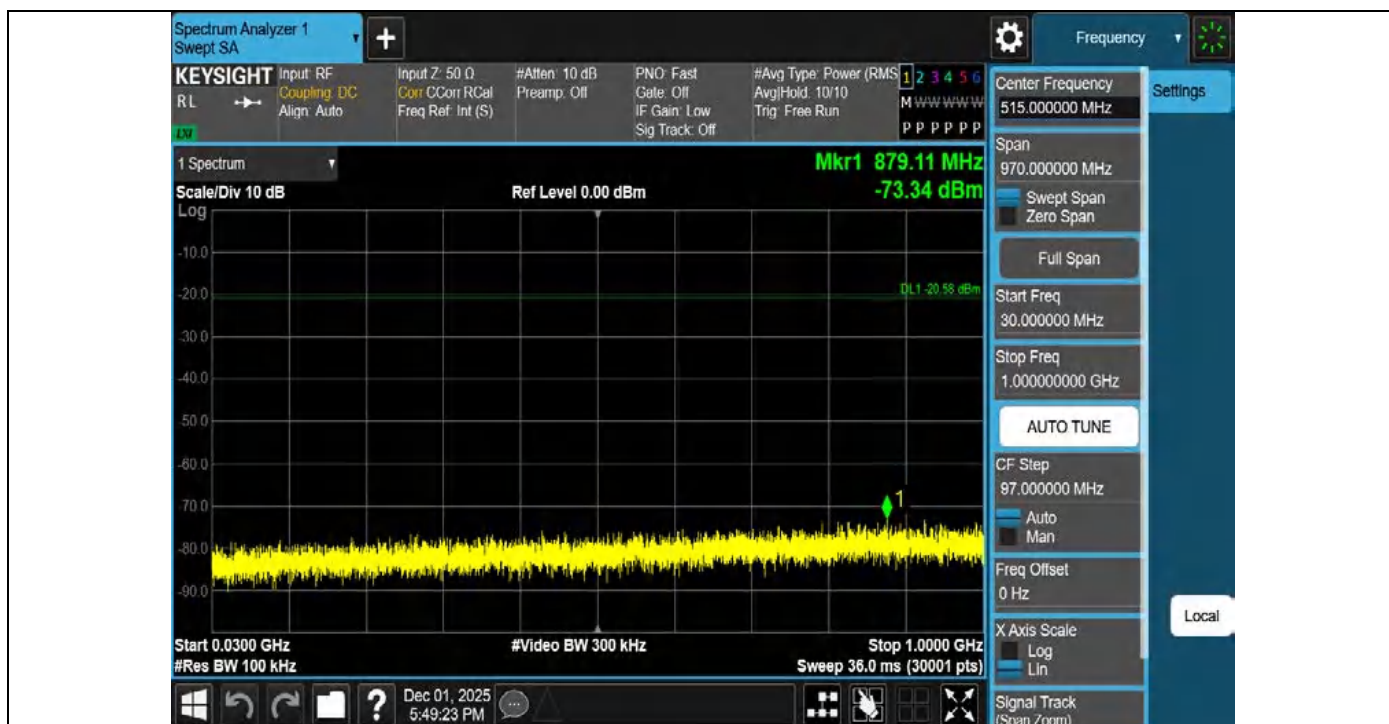

2DH5-Ant1-2402-30~1000-PASS



2DH5-Ant1-2402-1000~26500-PASS



2DH5-Ant1-2441-0~Reference-PASS




2DH5-Ant1-2441-30~1000-PASS



2DH5-Ant1-2441-1000~26500-PASS



2DH5-Ant1-2480-0~Reference-PASS

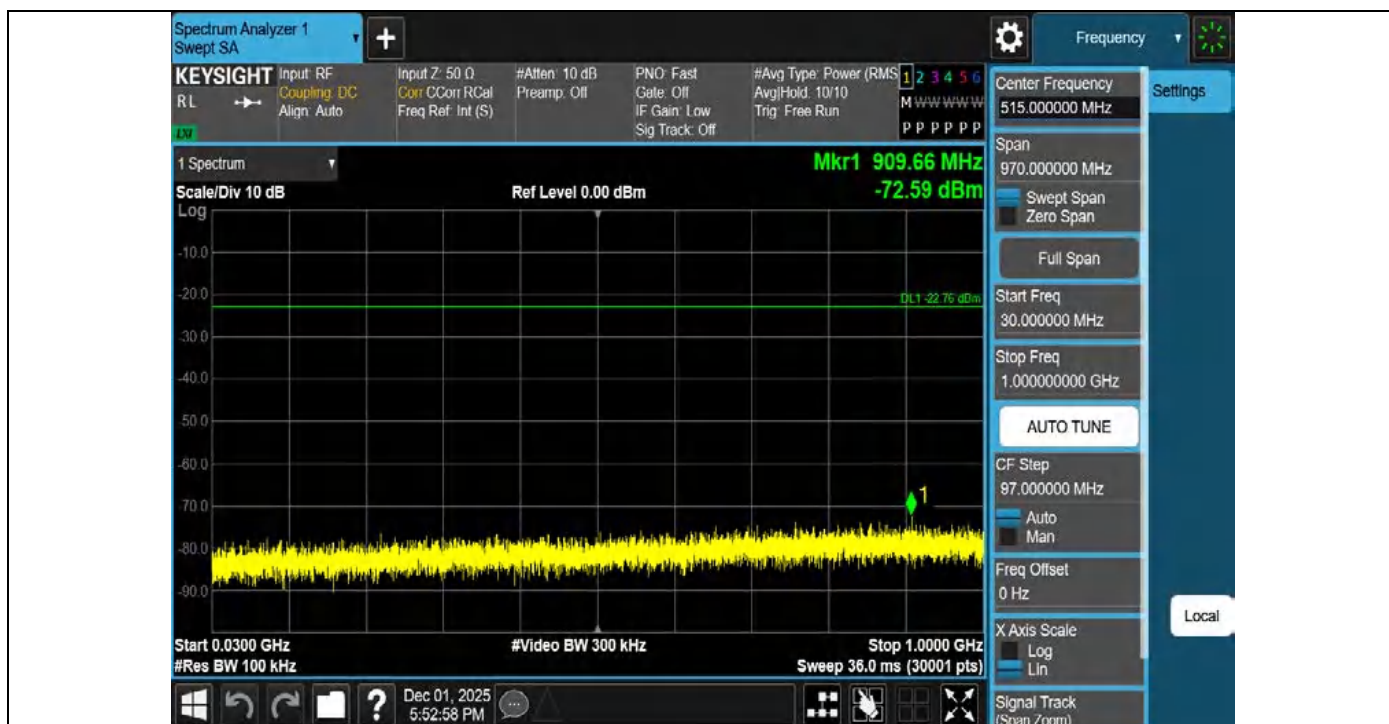

2DH5-Ant1-2480-30~1000-PASS



2DH5-Ant1-2480-1000~26500-PASS



3DH5-Ant1-2402-0~Reference-PASS



3DH5-Ant1-2402-30~1000-PASS



3DH5-Ant1-2402-1000~26500-PASS



3DH5-Ant1-2441-0~Reference-PASS



3DH5-Ant1-2441-30~1000-PASS




3DH5-Ant1-2441-1000~26500-PASS




3DH5-Ant1-2480-0~Reference-PASS



3DH5-Ant1-2480-30~1000-PASS

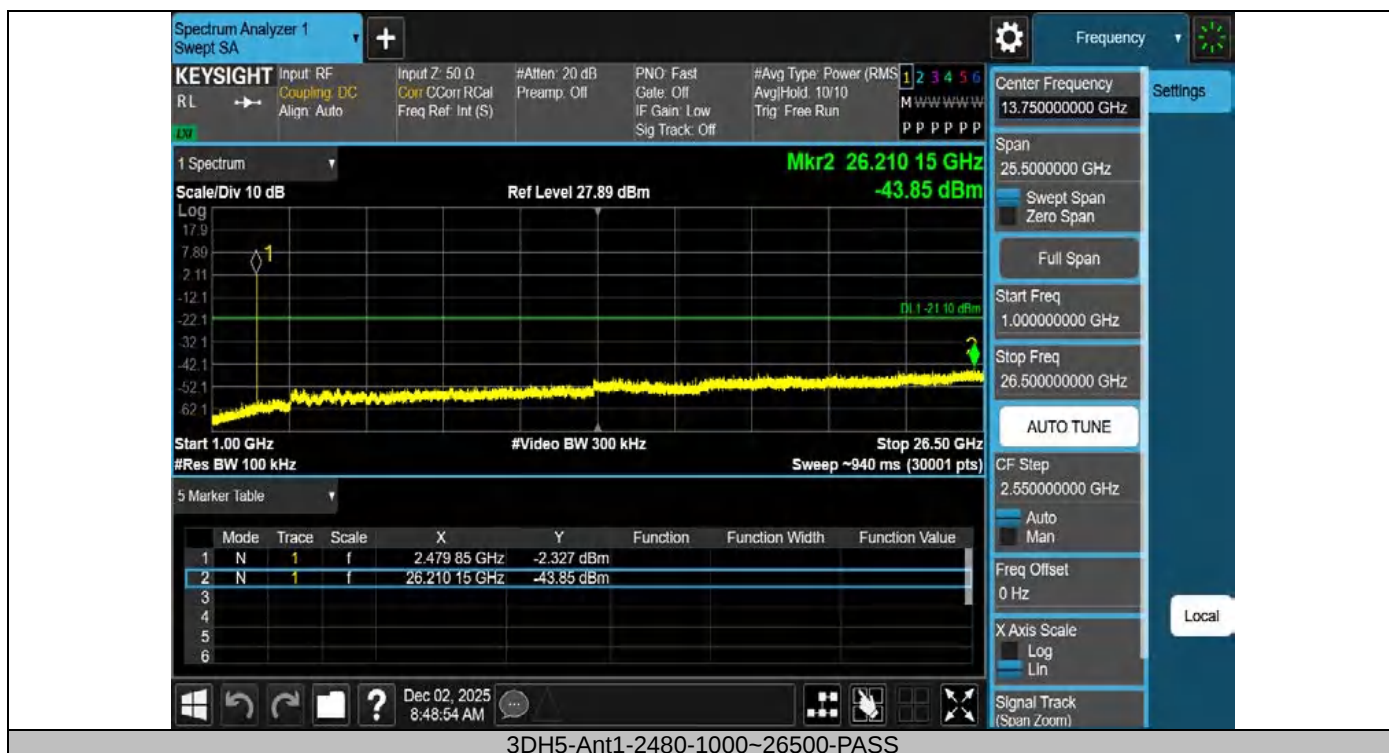

Band edge

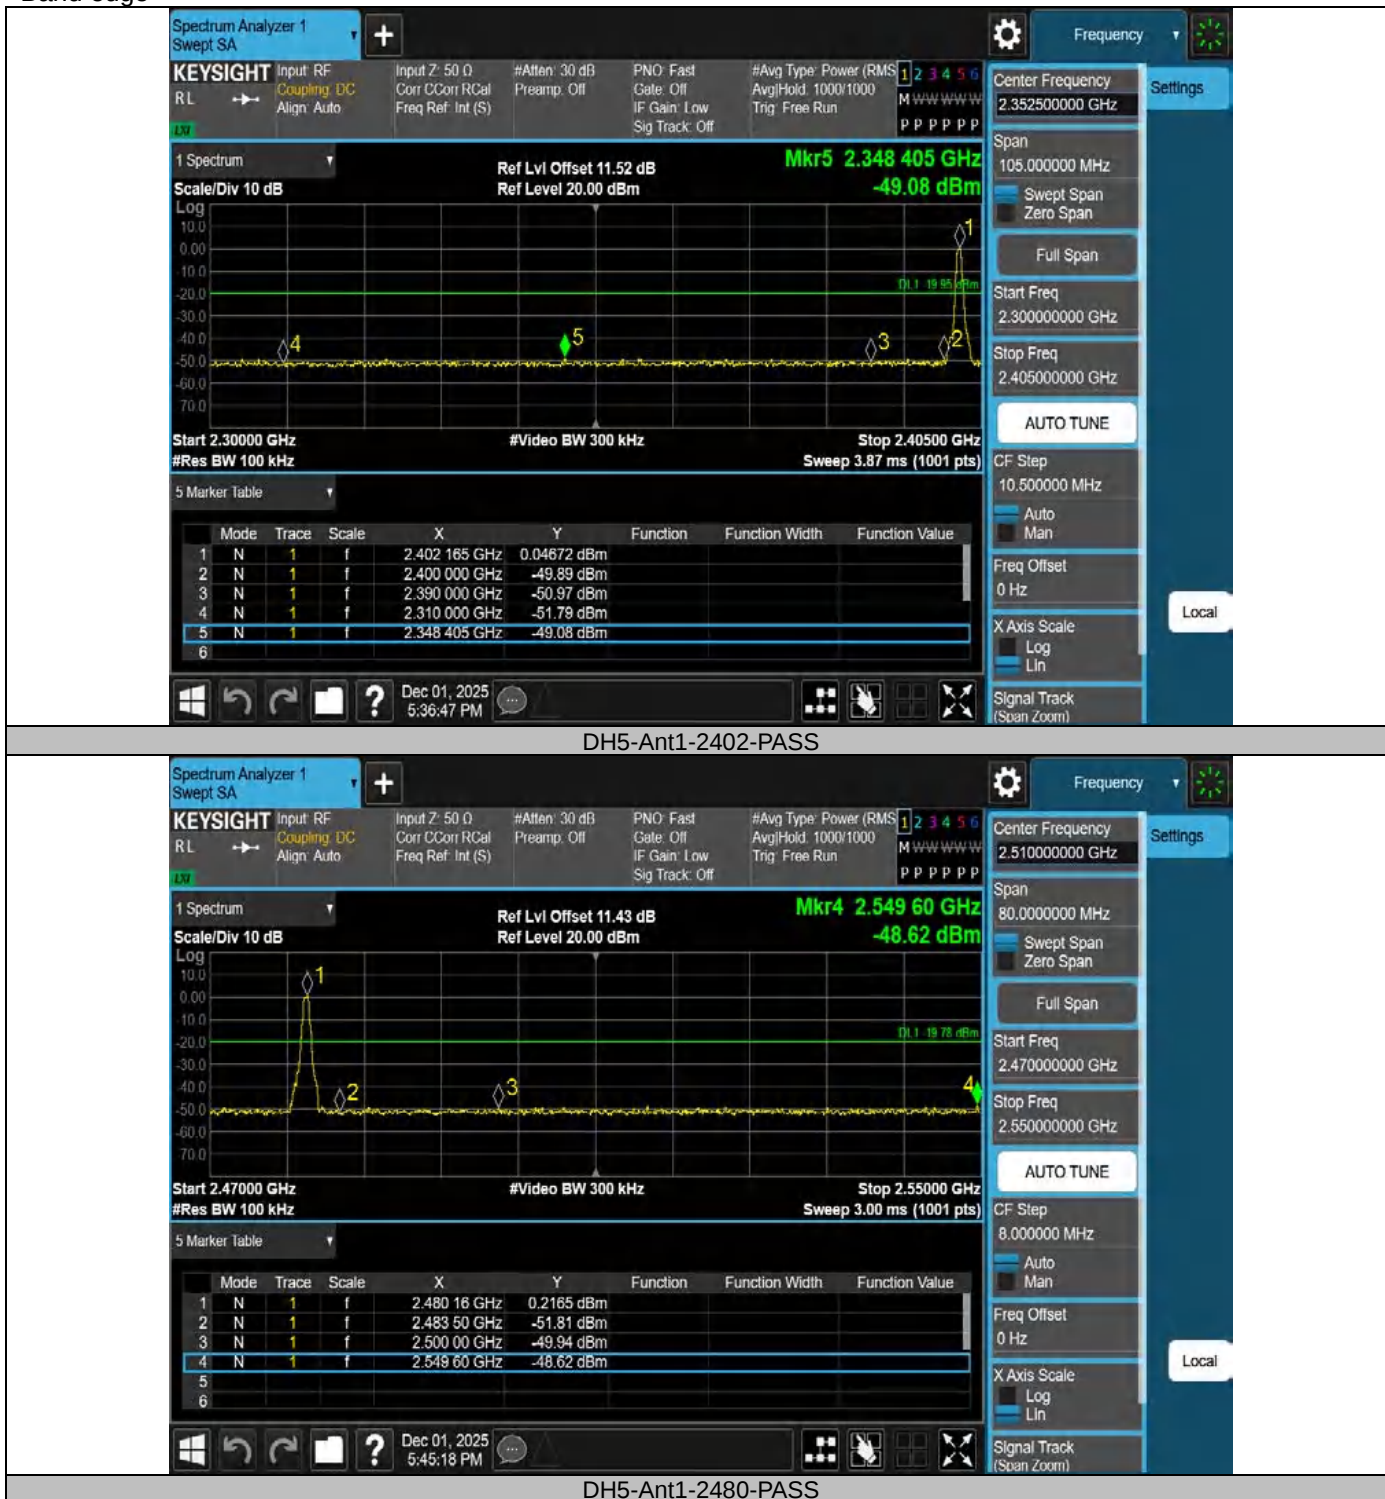



DH5-Ant1-Hop_2402-PASS



DH5-Ant1-Hop_2480-PASS



2DH5-Ant1-2402-PASS



2DH5-Ant1-2480-PASS



2DH5-Ant1-Hop 2402-PASS



2DH5-Ant1-Hop 2480-PASS



3DH5-Ant1-2402-PASS



3DH5-Ant1-2480-PASS



3DH5-Ant1-Hop 2402-PASS



3DH5-Ant1-Hop 2480-PASS

APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE

1. Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

2. Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 - 2480MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3. Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4. Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04

5. Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

- LAP/UAP of the master of the connection.
- Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always

differ from the first one.

6. Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Statement

1. The report is invalid without the official seal or special seal of Shenzhen Haiyun Standard Technical Co., Ltd. (hereinafter referred to as the unit).
2. The report is invalid without the signature of the approver.
3. The report is invalid if altered arbitrarily.
4. The report shall not be partially copied without the written approval of the unit.
5. The reported test results are only valid for the tested samples.
6. If there is any objection to the test report, it shall be submitted to the test unit within 15 days from the date of receiving the report, and the overdue shall not be accepted.

Shenzhen Haiyun Standard Technical Co., Ltd.

Address: Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China

Tel: 0755-26024411

Email: service@hy-lab.cn

End of Test Report