



深圳市诚连电子有限公司

Shen zhen chenglian electronic co., L T D

Room 201A, No. 16, Shijiaotou Industrial Zone,
Guancheng Community, Guanhu Subdistrict,
Longhua District, Shenzhen

承认书

SPECIFICATION FOR APPROVAL

客 户 名 称

CUSTOMER NAME:GuangDong SINOY Smart Technology CO., LTD

产 品 名 称

PRODUCT NAME: 2.4G+5G-FPC ANT

客 户 料 号

CUSTOMER : HY260Pro

诚 连 料 号

Cheng Lian CL111V1 REV:A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:	程良日	
APPROVED BY:	张国勤	
DATE:	2023-9-4	



深圳市诚连电子有限公司

Shenzhen chenglian electronic co., LTD

1.Specifications:

Main technical parameters of the product

主要技术指标		Main technical specifications	
频率范围 (MHZ)	2400-2500 / 5000-5850	Frequency Range (MHZ)	2400-2500 / 5000-5850
中心频率 特性阻抗(Ω)	50 $\pm$ 10	center frequency Impedance(Ω)	50 $\pm$ 10
增益(dBi)	5.40	Peak Gain(dBi)	5.40
输出电压 驻波比	<2.0	VSWR	<2.0
最大功率	10W	Admitted Power	10W
极化方式	垂直极化	Polarization	Linear,Vertical
方向性	全向性	Radiation	Omni-directional
连接方式	Cable	Connector Type	Cable
物理性能		Physical Properties	
天线本体材料	PCB+背胶	Antenna Base	PCB+背胶
天线走线材料	Copper	Antenna cover	Copper
工作温度	-20 $^{\circ}$ C~+60 $^{\circ}$ C	Operating Temp	-20 $^{\circ}$ C~+60 $^{\circ}$ C
保存温度	-20 $^{\circ}$ C~+70 $^{\circ}$ C	Storage Temp	-20 $^{\circ}$ C~+70 $^{\circ}$ C



深圳市诚连电子有限公司

Shen zhen chenglian electronic co., L T D

2. Test equipment and data

回波损耗及 VSWR 使用了下图的安捷伦 E5071B 网络分析仪进行测试。



E5071B Network Analyzer



深圳市诚连电子有限公司

Shen zhen chenglian electronic co., L T D


Power/Sensitivity/Efficiency

Antenna power/sensitivity/efficiency were tested using the SG24 microwave darkroom.



SG24 Microwave darkroom

Standing Wave

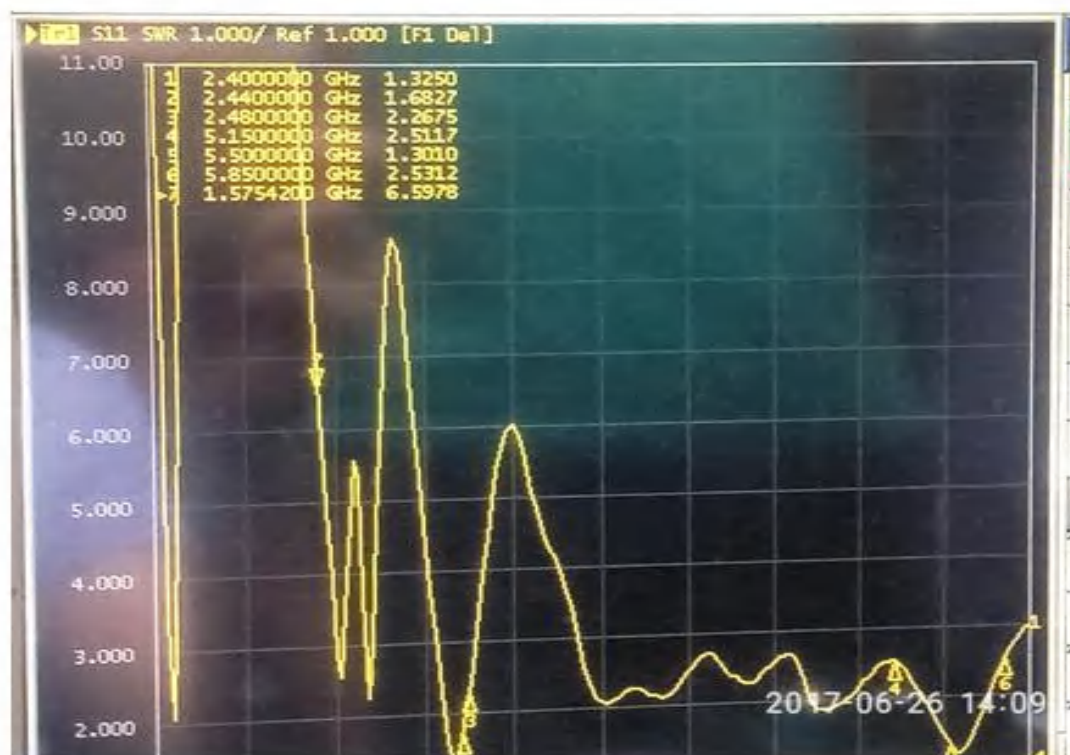

WIFI passive efficiency test data



深圳市诚连电子有限公司

Shen zhen cheng lian electronic co., L T D

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-8.44	-9.02	-9.36	-10.16	-9.60	-10.35	-10.18	-11.05	-11.62	-11.78	-11.53
Gain (dBi)	-3.91	-4.42	-4.38	-5.01	-4.37	-4.80	-4.84	-6.03	-6.69	-6.94	-6.82
Efficiency (%)	14.32	12.52	11.59	9.65	10.96	9.23	9.60	7.85	6.89	6.64	7.03
Directivity (dB)	4.53	4.60	4.98	5.14	5.23	5.54	5.33	5.02	4.92	4.84	4.71
Peak Gain Position (Theta)	79.00	57.00	57.00	57.00	57.00	57.00	58.00	58.00	58.00	58.00	58.00
Peak Gain Position (Phi)	330.00	240.00	240.00	240.00	240.00	240.00	240.00	240.00	240.00	240.00	240.00
Efficiency ThetaPol (%)	8.94	7.62	7.20	5.86	6.75	5.56	5.92	4.82	4.33	4.07	4.31
Efficiency PhiPol (%)	5.38	4.91	4.39	3.79	4.21	3.67	3.68	3.03	2.56	2.57	2.71
Upper Hem. Efficiency (%)	7.81	6.87	6.46	5.32	6.01	5.08	5.41	4.50	4.00	3.87	4.17
Lower Hem. Efficiency (%)	6.51	5.65	5.13	4.32	4.96	4.15	4.19	3.35	2.89	2.77	

Frequency ID	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
Frequency (MHz)	5150.0	5200.0	5250.0	5300.0	5350.0	5400.0	5450.0	5500.0	5550.0	5600.0	5650.0	5700.0	5750.0	5800.0	5850.0
Efficiency (dBi)	-3.88	-3.55	-3.08	-2.34	-3.35	-2.40	-2.87	-2.78	-3.13	-3.39	-3.52	-3.39	-3.85	-4.11	-4.31
Gain (dBi)	2.97	3.32	4.45	5.40	3.38	4.17	3.46	2.79	2.28	2.21	2.48	2.51	1.68	0.98	0.08
Efficiency (%)	40.96	44.14	49.15	58.33	46.25	57.60	51.70	52.75	48.67	45.86	44.50	45.84	41.18	38.77	37.10
Directivity (dB)	6.85	6.87	7.54	7.74	6.73	6.57	6.32	5.57	5.41	5.60	5.99	5.90	5.53	5.09	4.39
Peak Gain Position (Theta)	102.00	104.00	104.00	103.00	133.00	32.00	31.00	96.00	23.00	26.00	24.00	29.00	82.00	84.00	82.00
Peak Gain Position (Phi)	330.00	330.00	330.00	330.00	330.00	240.00	240.00	210.00	210.00	240.00	240.00	240.00	300.00	300.00	300.00
Efficiency ThetaPol (%)	26.61	30.17	32.89	44.38	33.03	43.79	38.38	39.83	37.51	36.05	34.36	35.12	30.53	29.54	27.07
Efficiency PhiPol (%)	14.36	13.97	16.26	13.95	13.22	13.81	13.32	12.92	11.16	9.81	10.13	10.72	10.66	9.23	10.03
Upper Hem. Efficiency (%)	21.52	23.28	26.38	31.09	25.07	30.43	27.26	27.37	25.08	24.06	23.76	25.11	22.92	21.95	21.64
Lower Hem. Efficiency (%)	19.45	20.86	22.77	27.24	21.17	27.17	24.44	25.38	23.59	21.80	20.74	20.73	18.26	16.82	15.46




深圳市诚连电子有限公司

Shen zhen chenglian electronic co., L T D

2400MHz

-3.91dBi

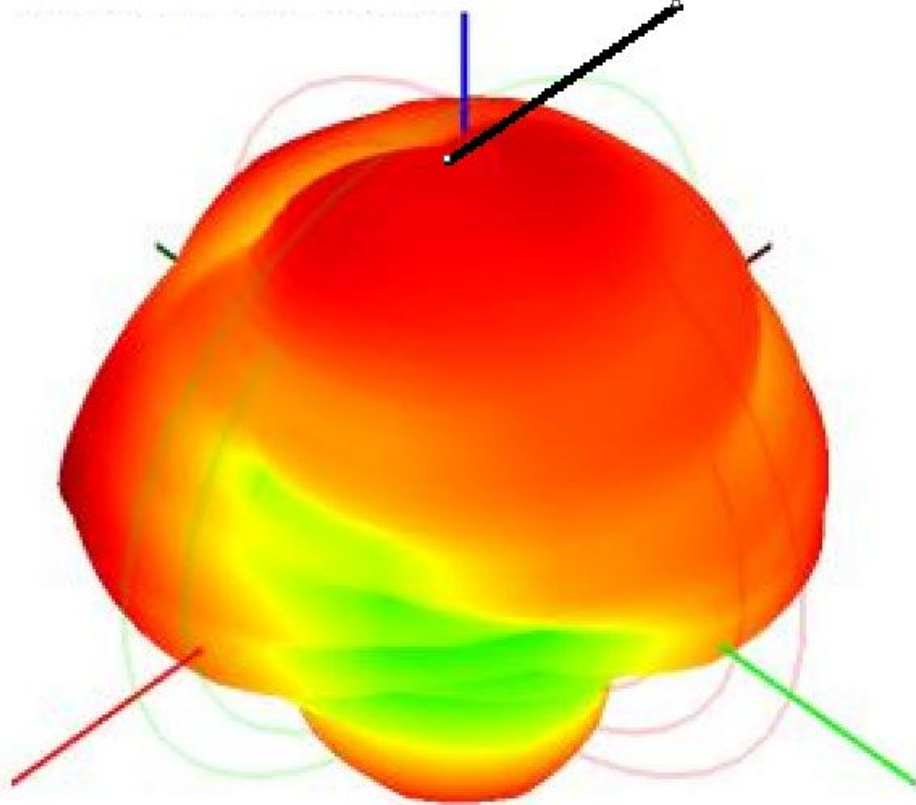




深圳市诚连电子有限公司

Shen zhen chenglian electronic co., L T D

5200MHz

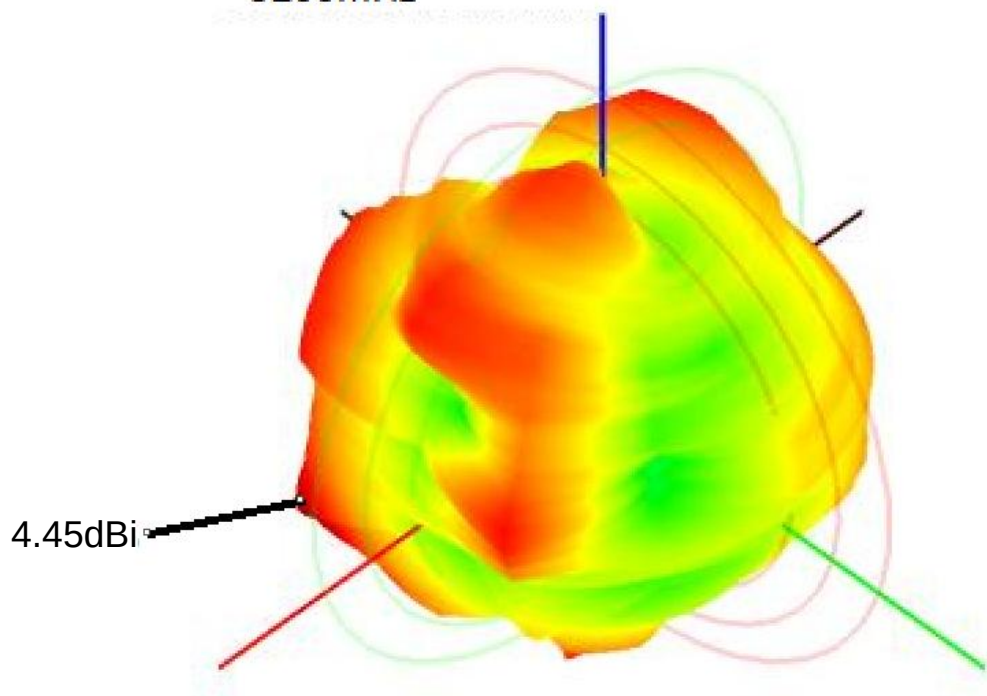

5700MHz

