

Appendix RF test data for BLE

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.123	2.500	84.92	0.71	0.03
		2440	2.124	2.501	84.93	0.71	0.03
		2480	2.124	2.501	84.93	0.71	0.03
2M	SISO	2402	1.065	1.874	56.83	2.45	0.03
		2440	1.065	1.875	56.80	2.46	0.03
		2480	1.065	1.875	56.80	2.46	0.03

1.2 Test Graph


1.2.1 Ant1

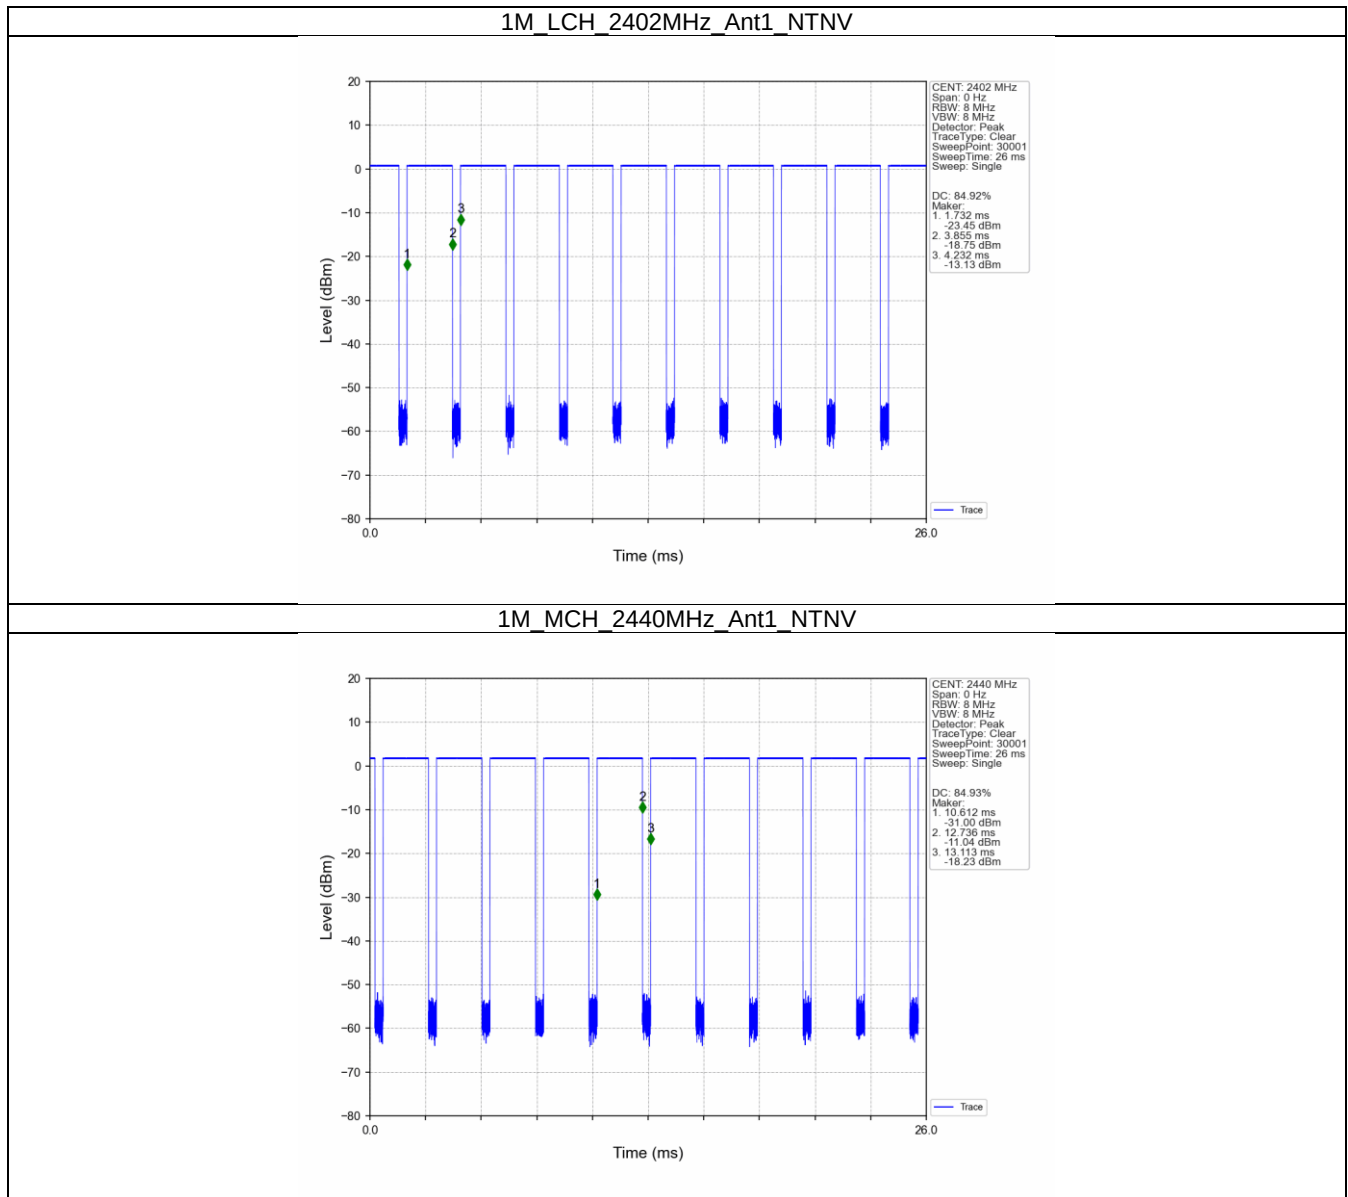


1M_HCH_2480MHz_Ant1_NTNV

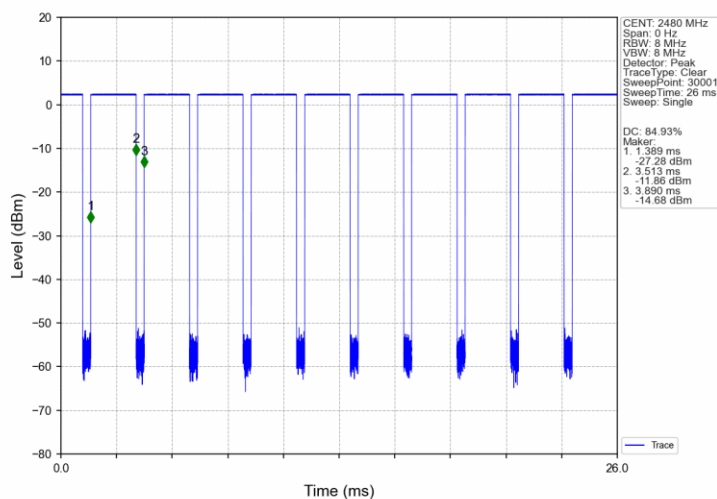


2M_LCH_2402MHz_Ant1_NTNV

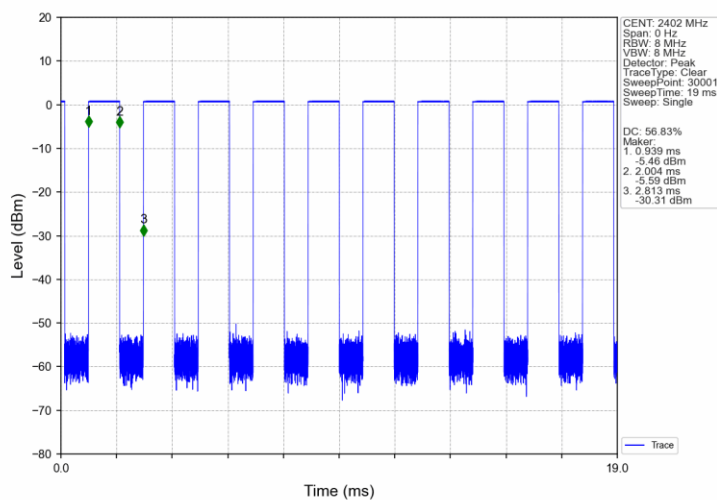

2M_MCH_2440MHz_Ant1_NTNV

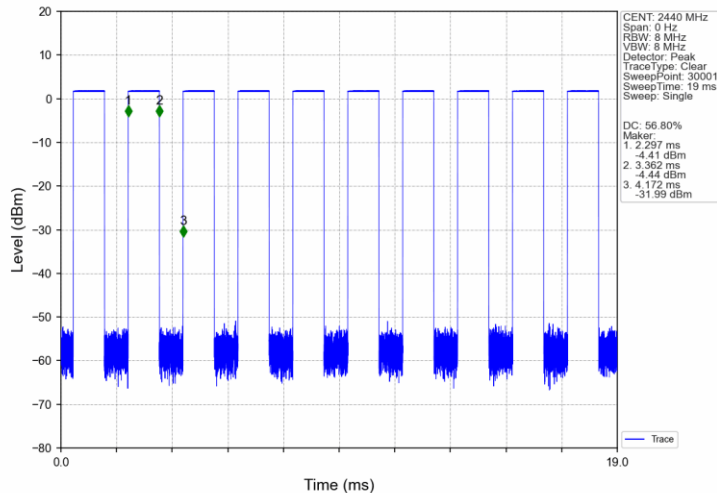

2M_HCH_2480MHz_Ant1_NTNV

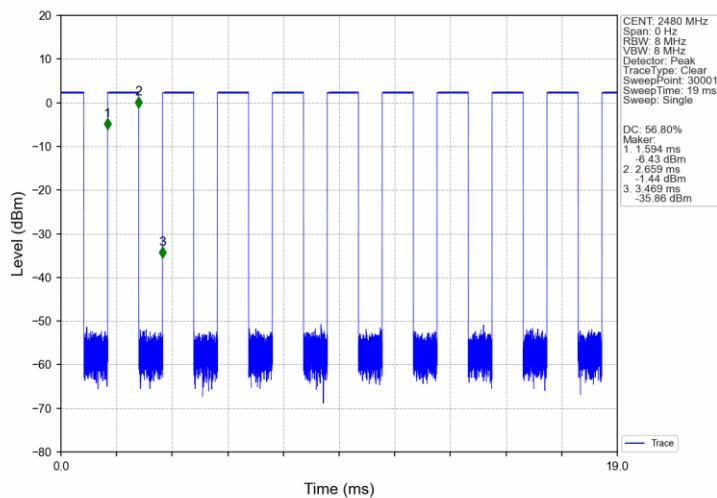

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.027	/	Pass
		2440	1	1.028	/	Pass
		2480	1	1.028	/	Pass
2M	SISO	2402	1	2.065	/	Pass
		2440	1	2.071	/	Pass
		2480	1	2.072	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.667	≥ 0.5	Pass
		2440	1	0.667	≥ 0.5	Pass
		2480	1	0.666	≥ 0.5	Pass
2M	SISO	2402	1	1.204	≥ 0.5	Pass
		2440	1	1.251	≥ 0.5	Pass
		2480	1	1.251	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

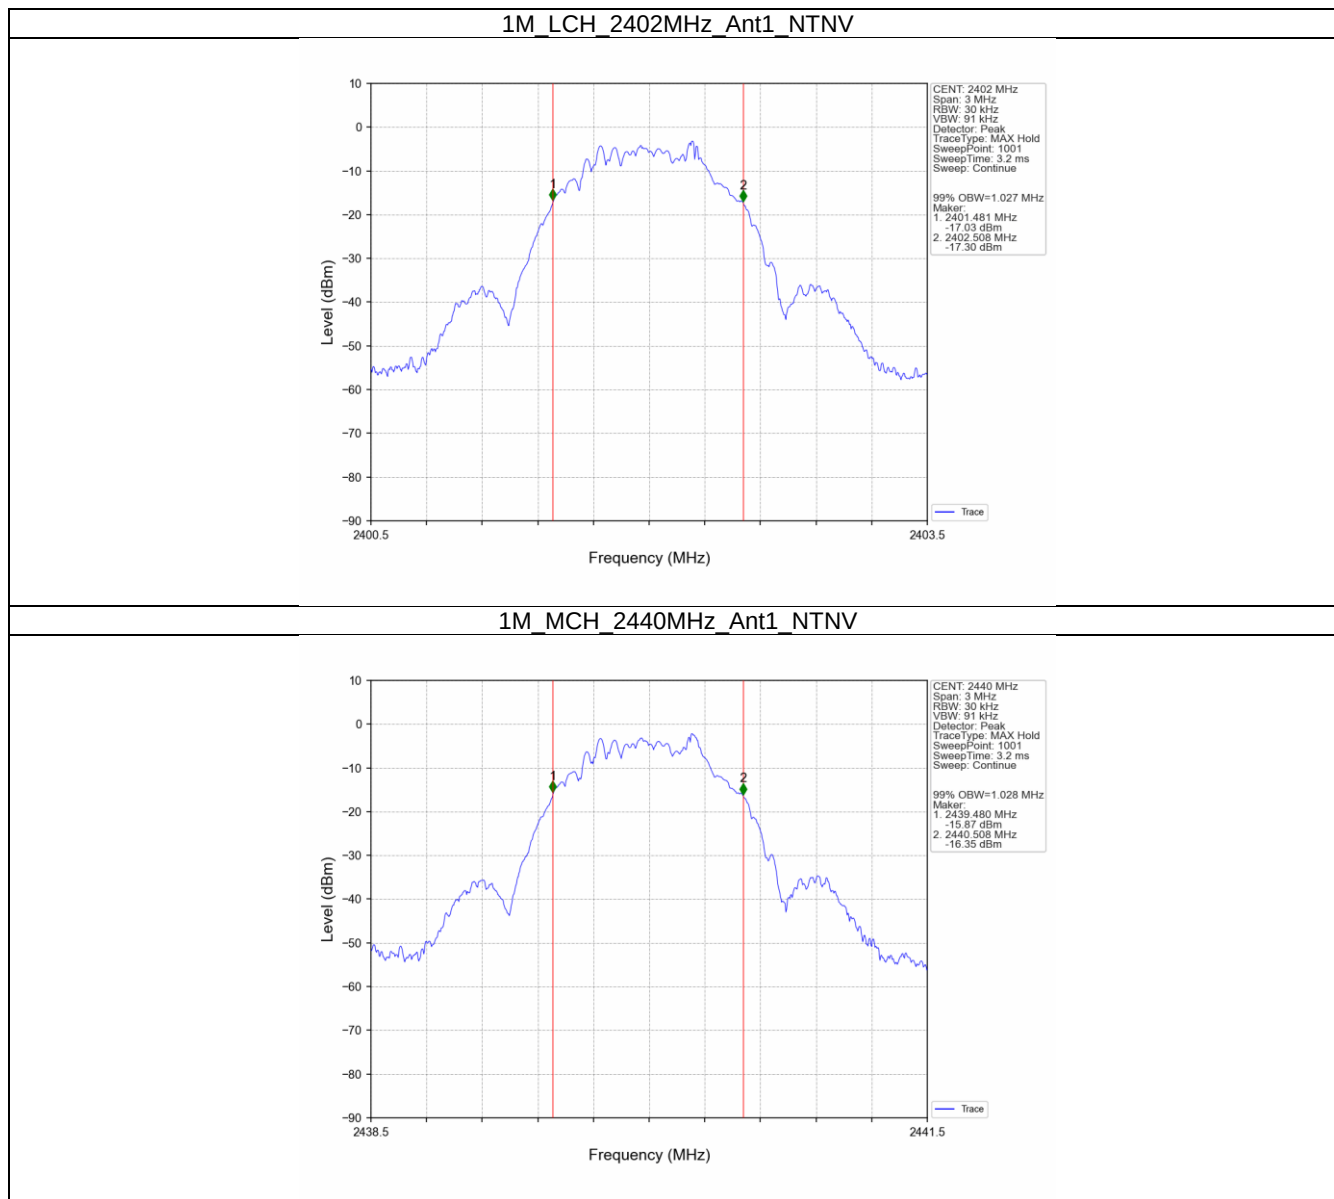


1M_HCH_2480MHz_Ant1_NTNV

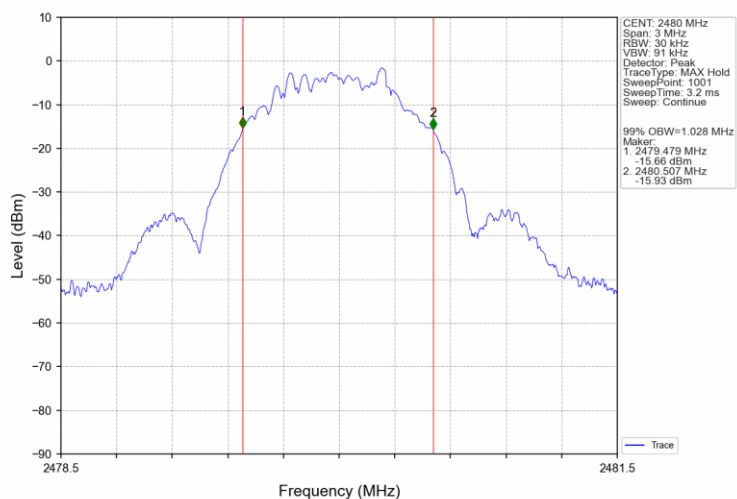


2M_LCH_2402MHz_Ant1_NTNV

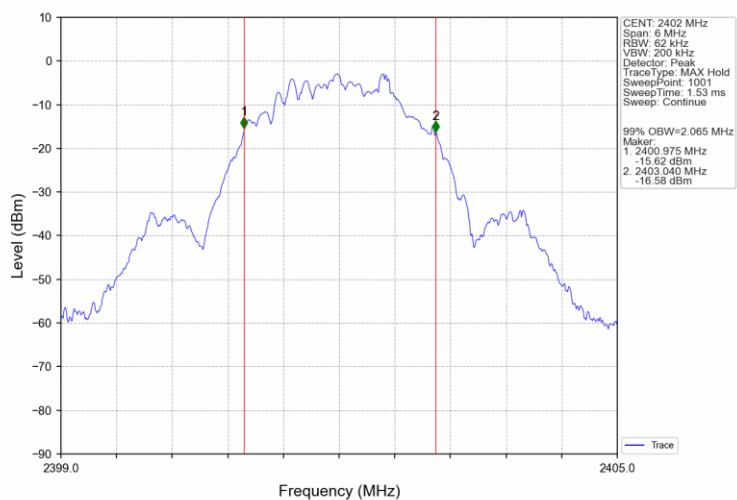

2M_MCH_2440MHz_Ant1_NTNV

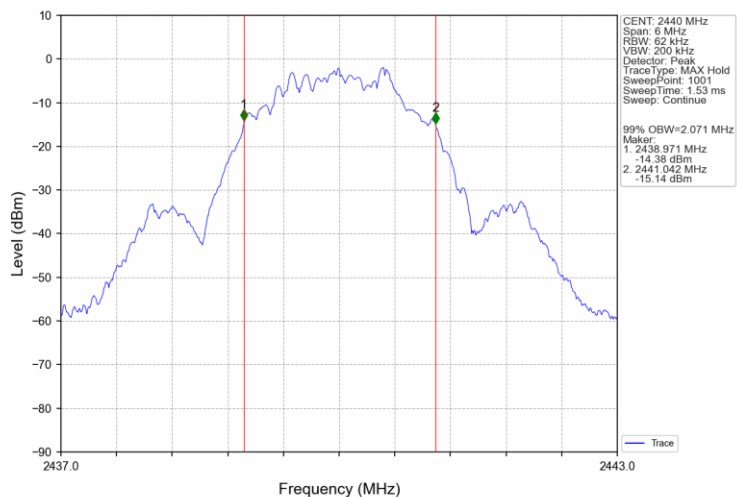


2M_HCH_2480MHz_Ant1_NTNV

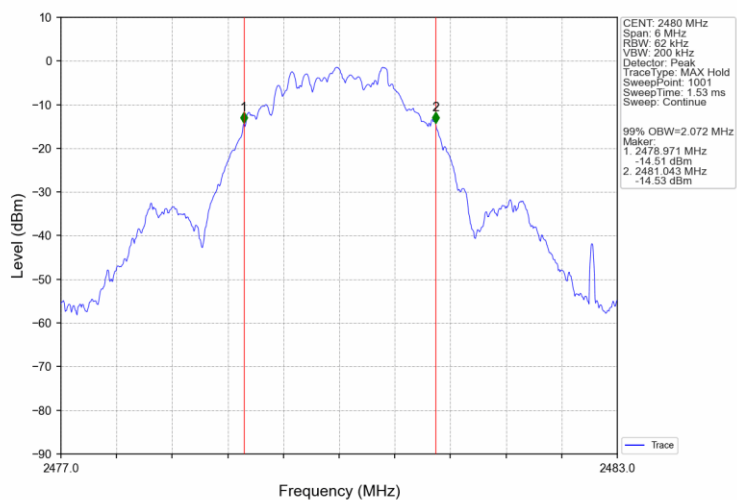


2.2.2 6dB BW


1M_LCH_2402MHz_Ant1_NTNV

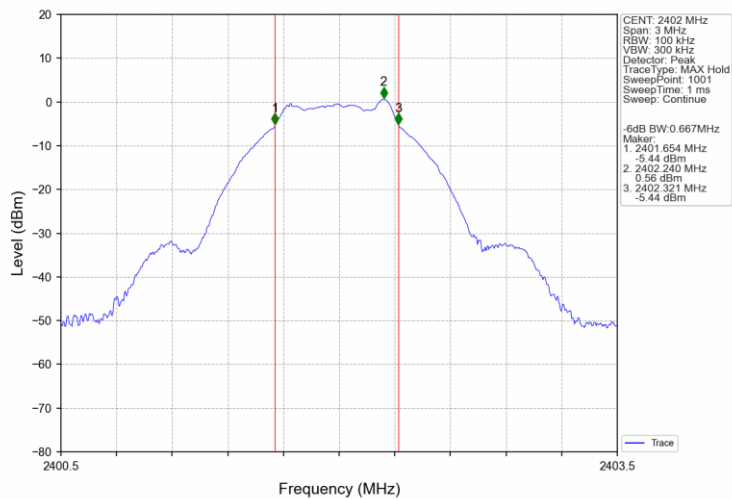


1M_MCH_2440MHz_Ant1_NTNV

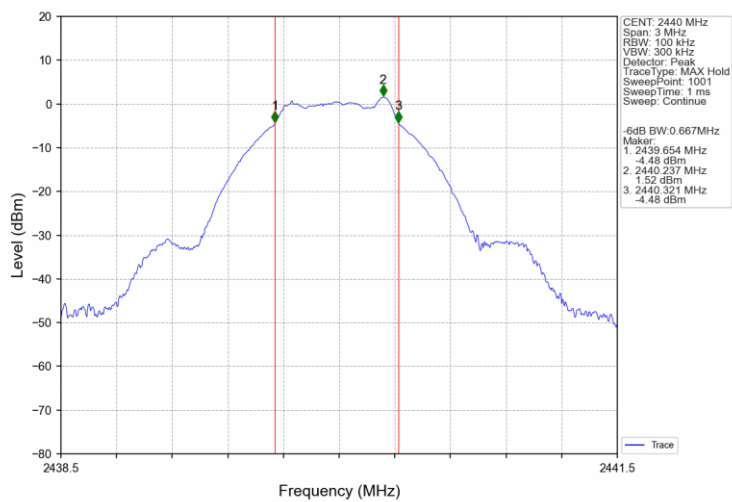


1M_HCH_2480MHz_Ant1_NTNV

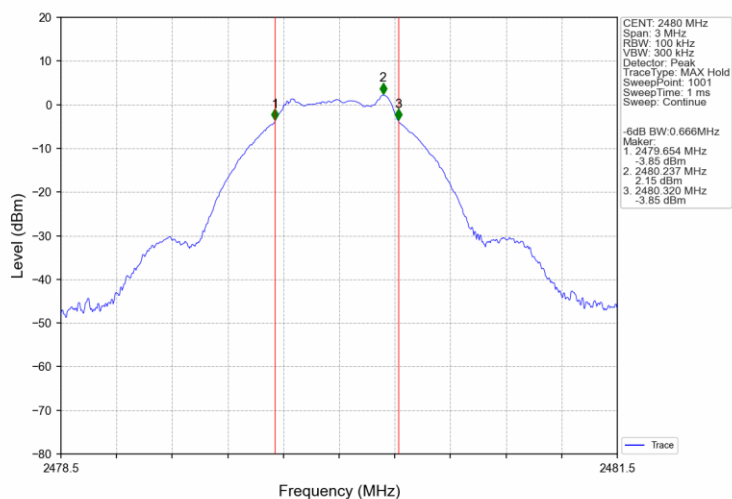


2M_LCH_2402MHz_Ant1_NTNV

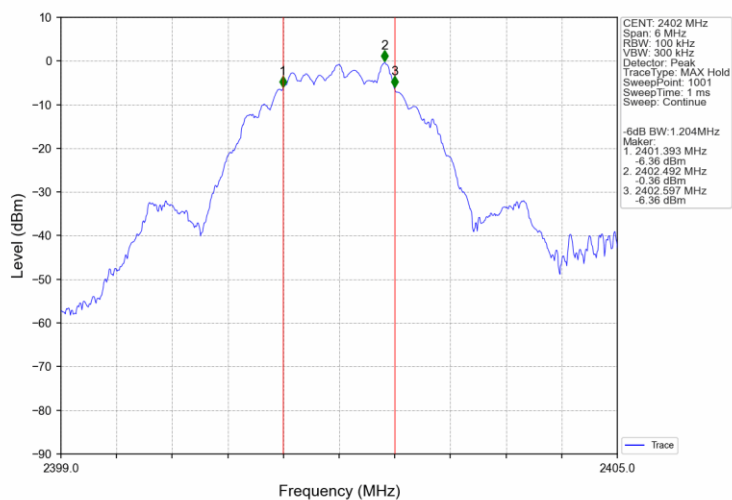

2M_MCH_2440MHz_Ant1_NTNV

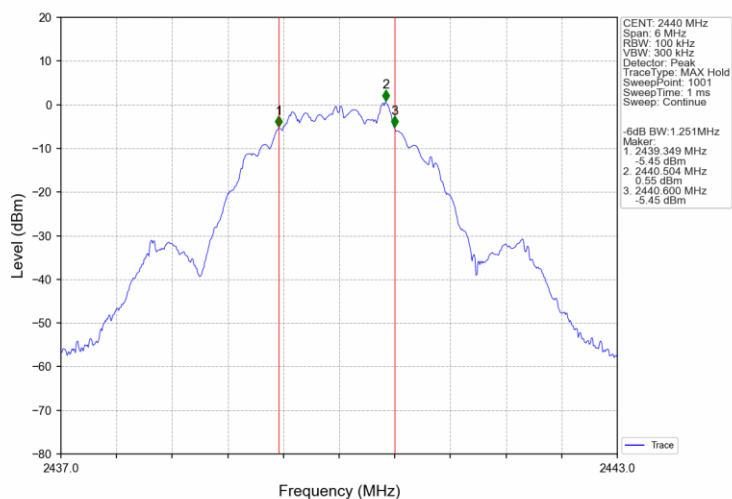

2M_HCH_2480MHz_Ant1_NTNV

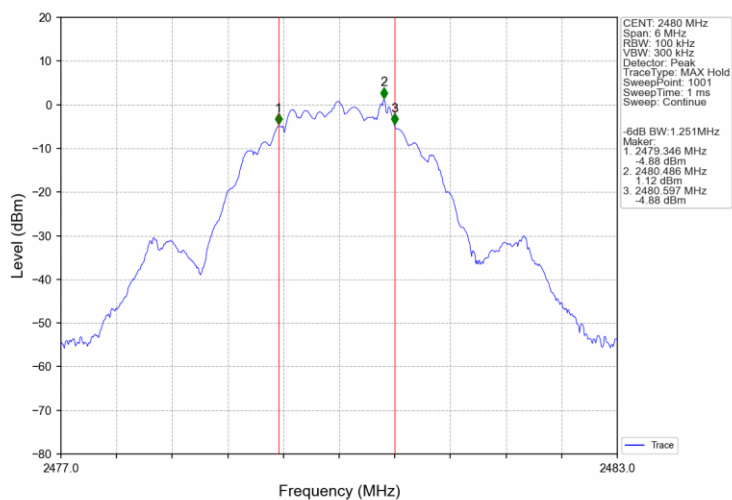

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.71	<=30	Pass
		2440	1.72	<=30	Pass
		2480	2.31	<=30	Pass
2M	SISO	2402	0.76	<=30	Pass
		2440	1.77	<=30	Pass
		2480	2.36	<=30	Pass


Note1: Antenna Gain: 3.87dBi;

3.2 Test Graph


3.2.1 Power

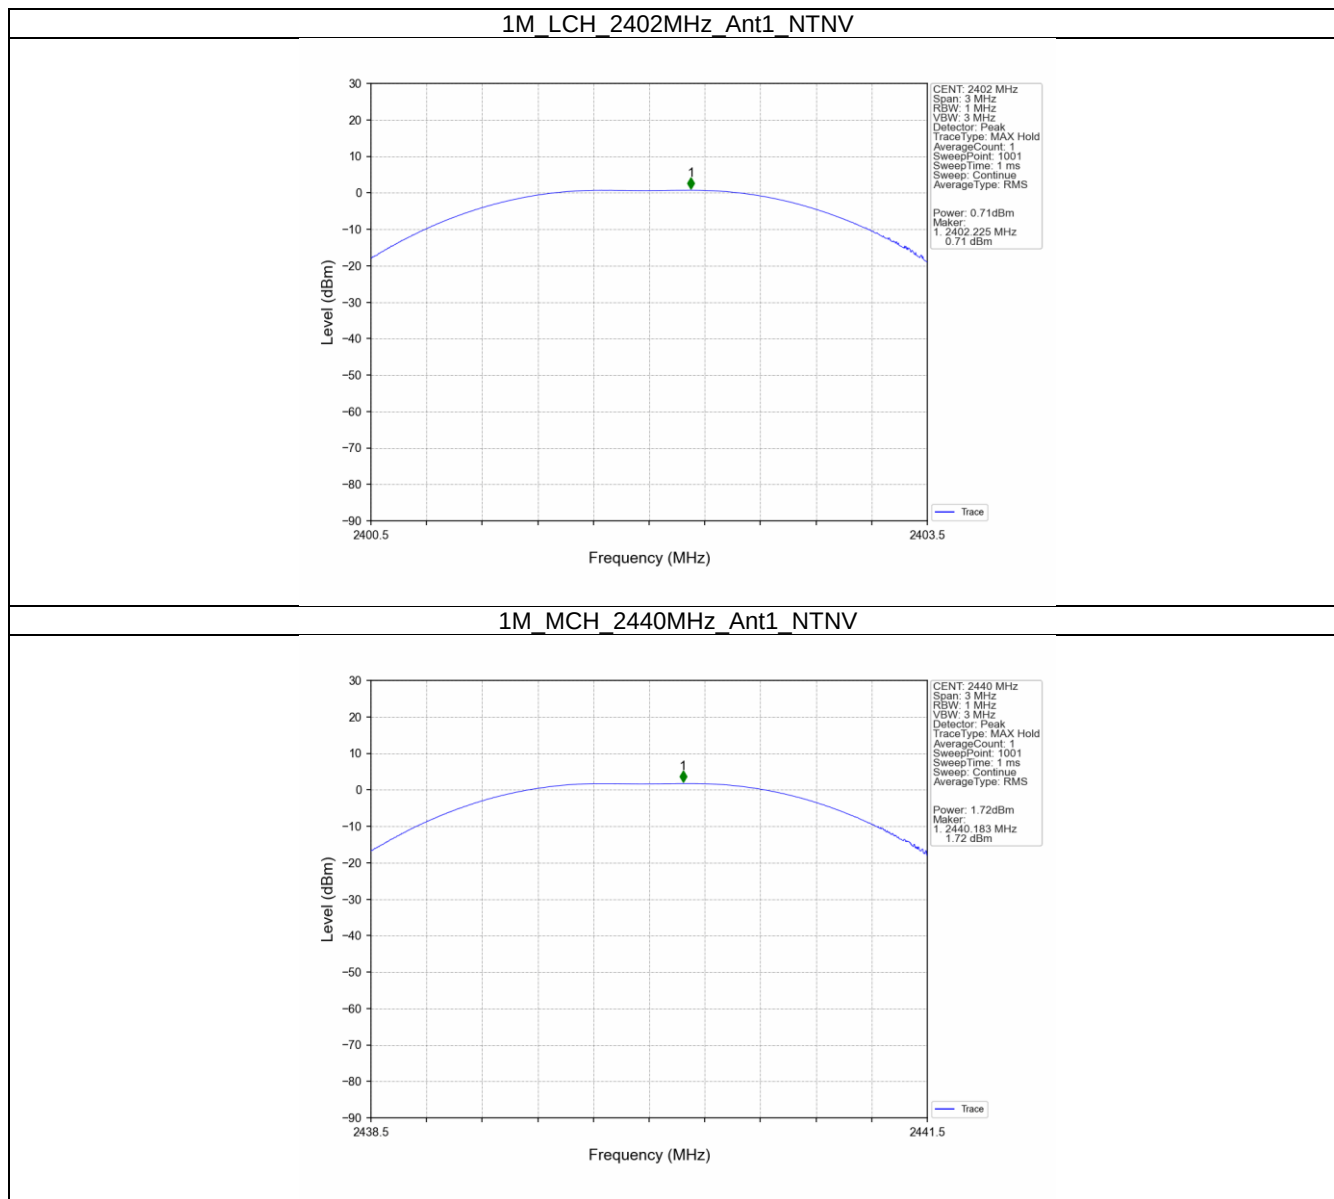


1M_HCH_2480MHz_Ant1_NTNV

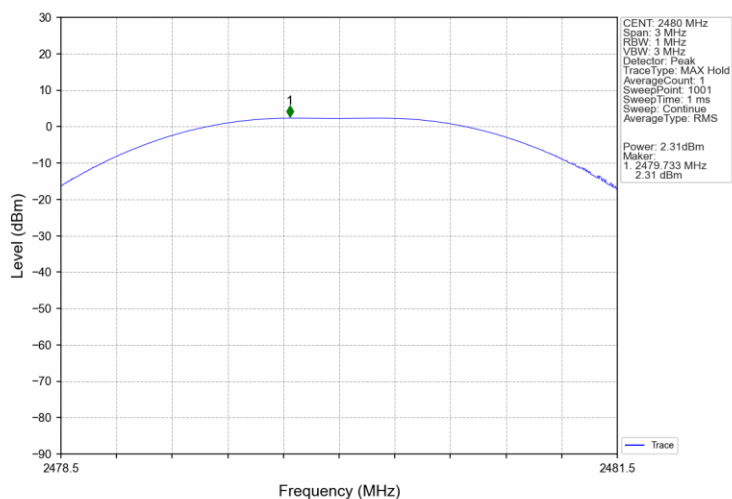


2M_LCH_2402MHz_Ant1_NTNV

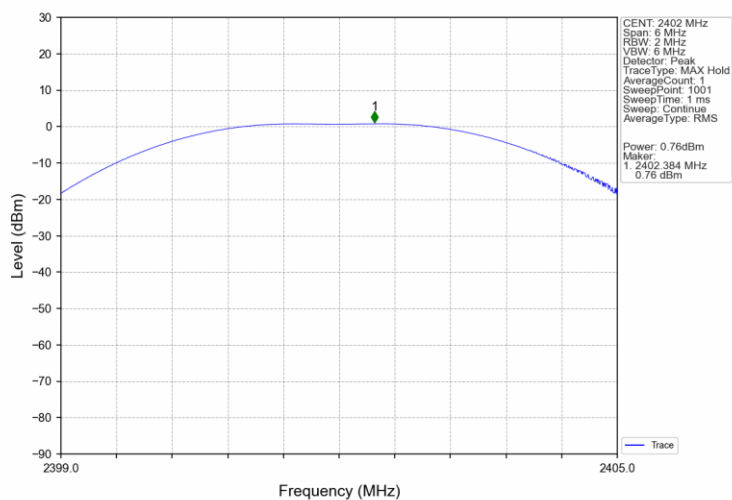

2M_MCH_2440MHz_Ant1_NTNV

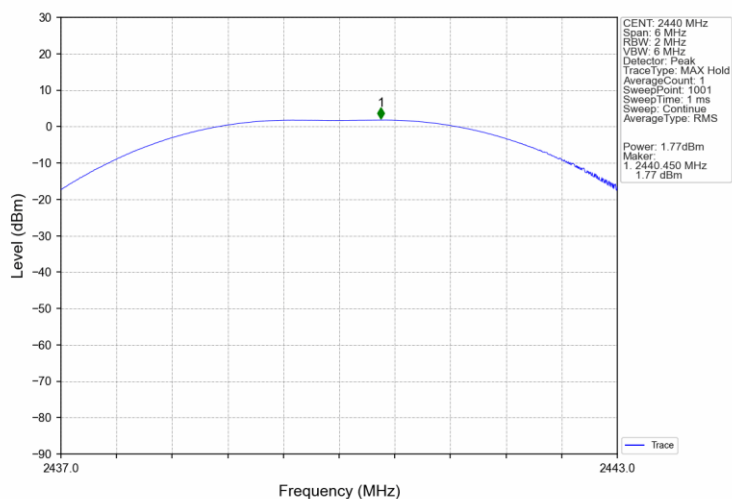

2M_HCH_2480MHz_Ant1_NTNV

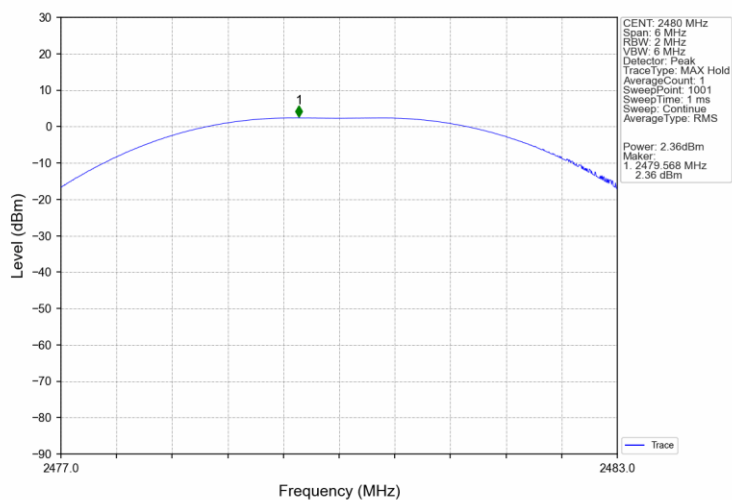

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.55	<=8	Pass
		2440	1.57	<=8	Pass
		2480	2.12	<=8	Pass
2M	SISO	2402	-0.57	<=8	Pass
		2440	0.51	<=8	Pass
		2480	1.06	<=8	Pass


Note1: Antenna Gain: Ant1: 3.87dBi;

4.2 Test Graph


4.2.1 PSD

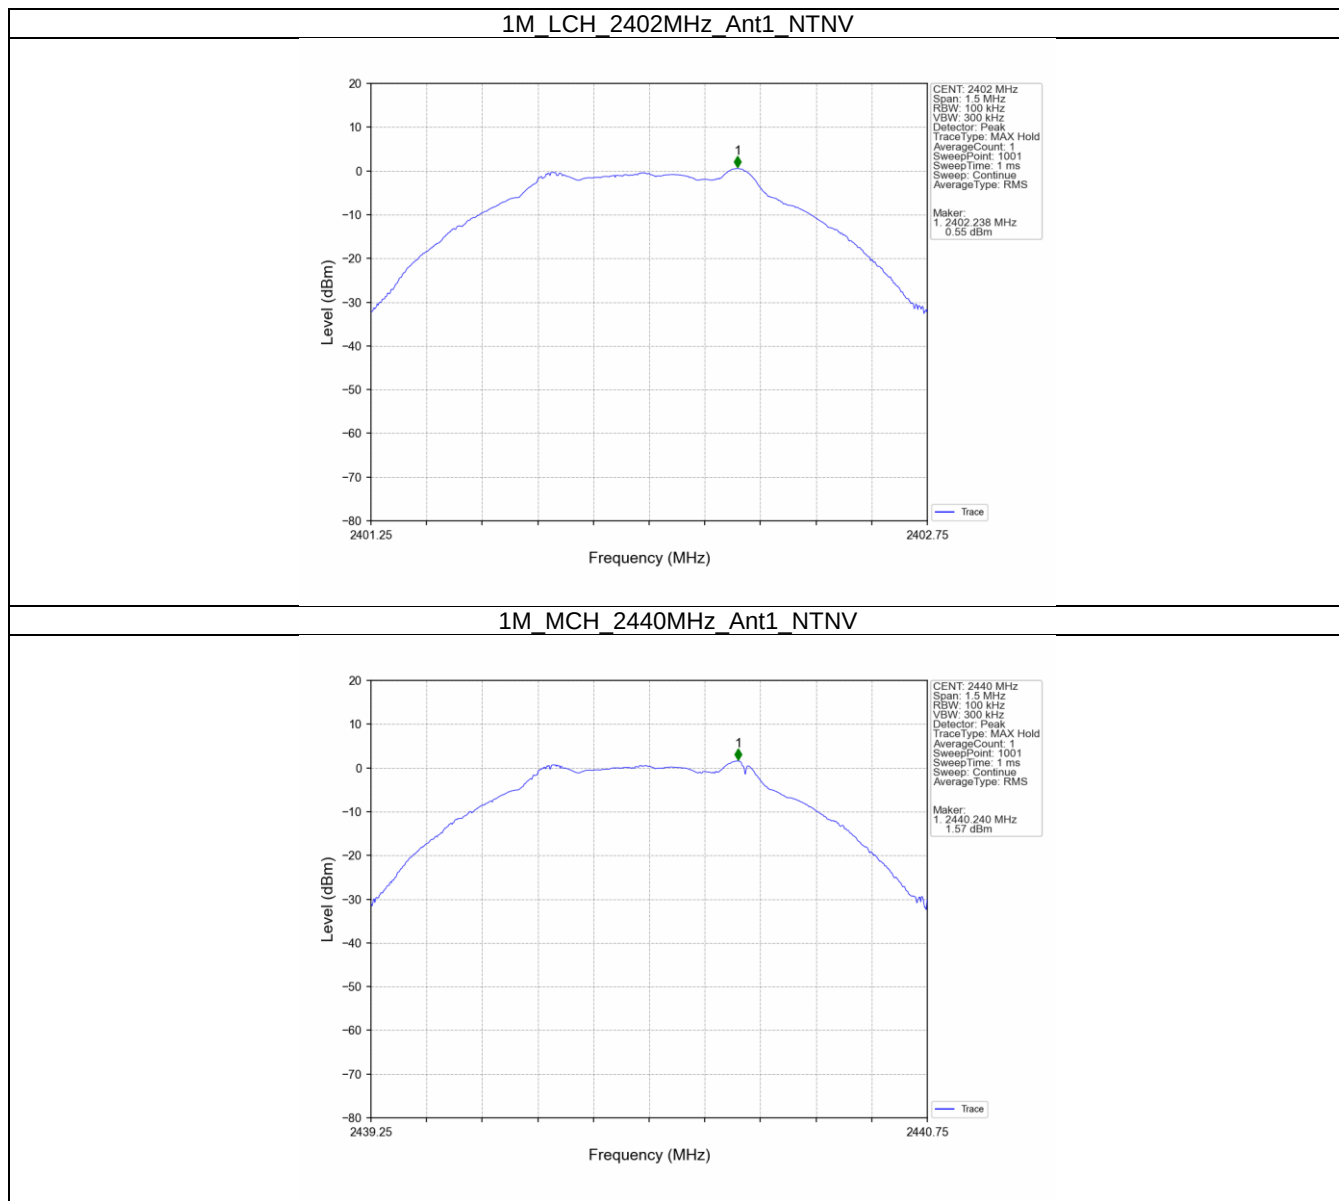


1M_HCH_2480MHz_Ant1_NTNV

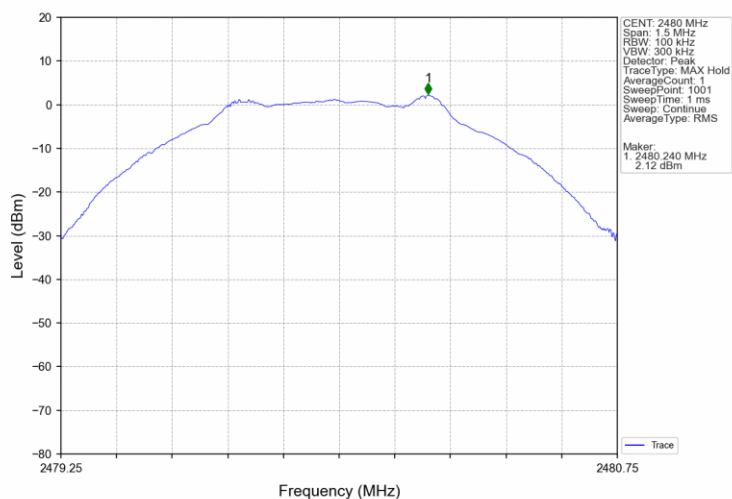


2M_LCH_2402MHz_Ant1_NTNV

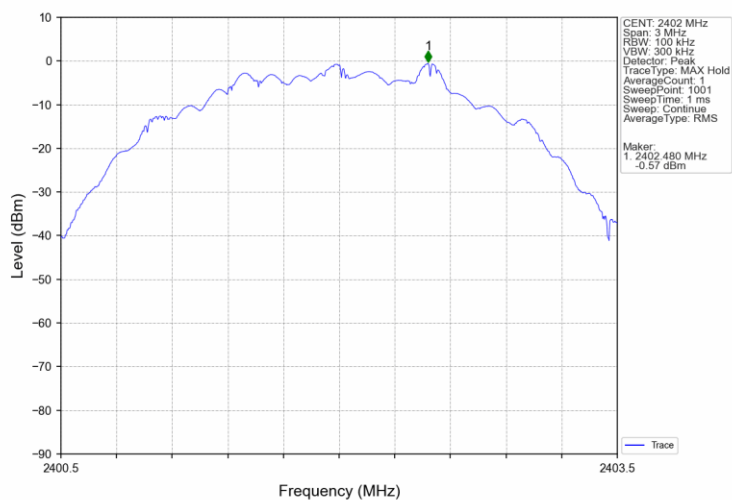


2M_MCH_2440MHz_Ant1_NTNV

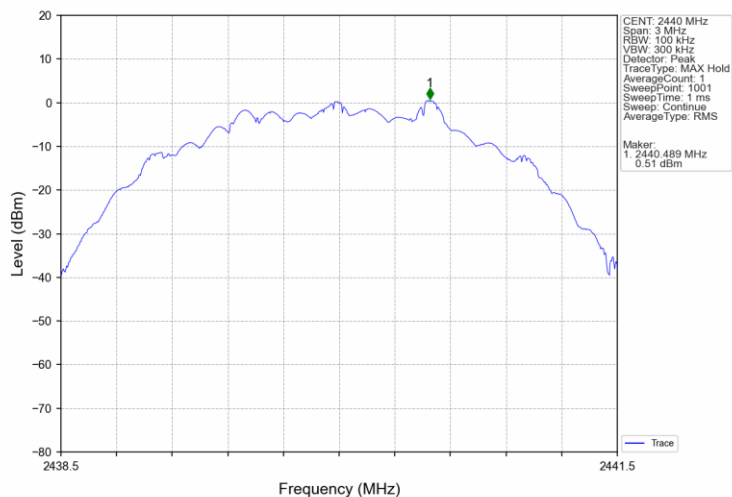

2M_HCH_2480MHz_Ant1_NTNV

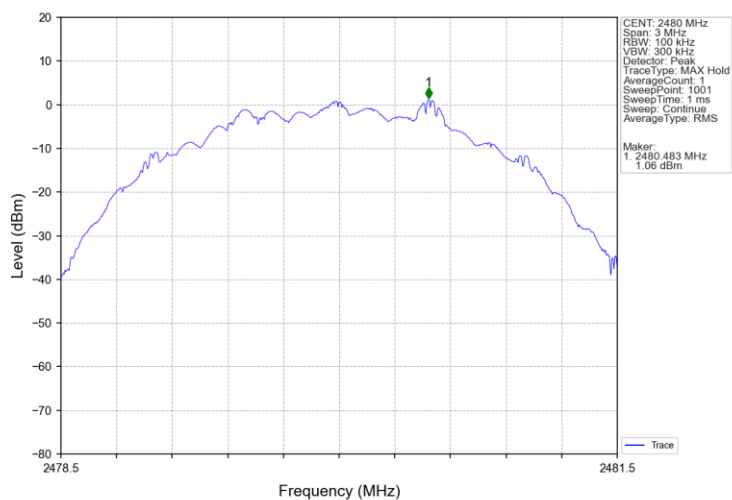




Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	0.53	-19.47	Pass
		2440	1	1.55	-18.45	Pass
		2480	1	2.12	-17.88	Pass
2M	SISO	2402	1	-0.54	-20.54	Pass
		2440	1	0.45	-19.55	Pass
		2480	1	1.05	-18.95	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.2 Test Graph


5.2.1 Ref

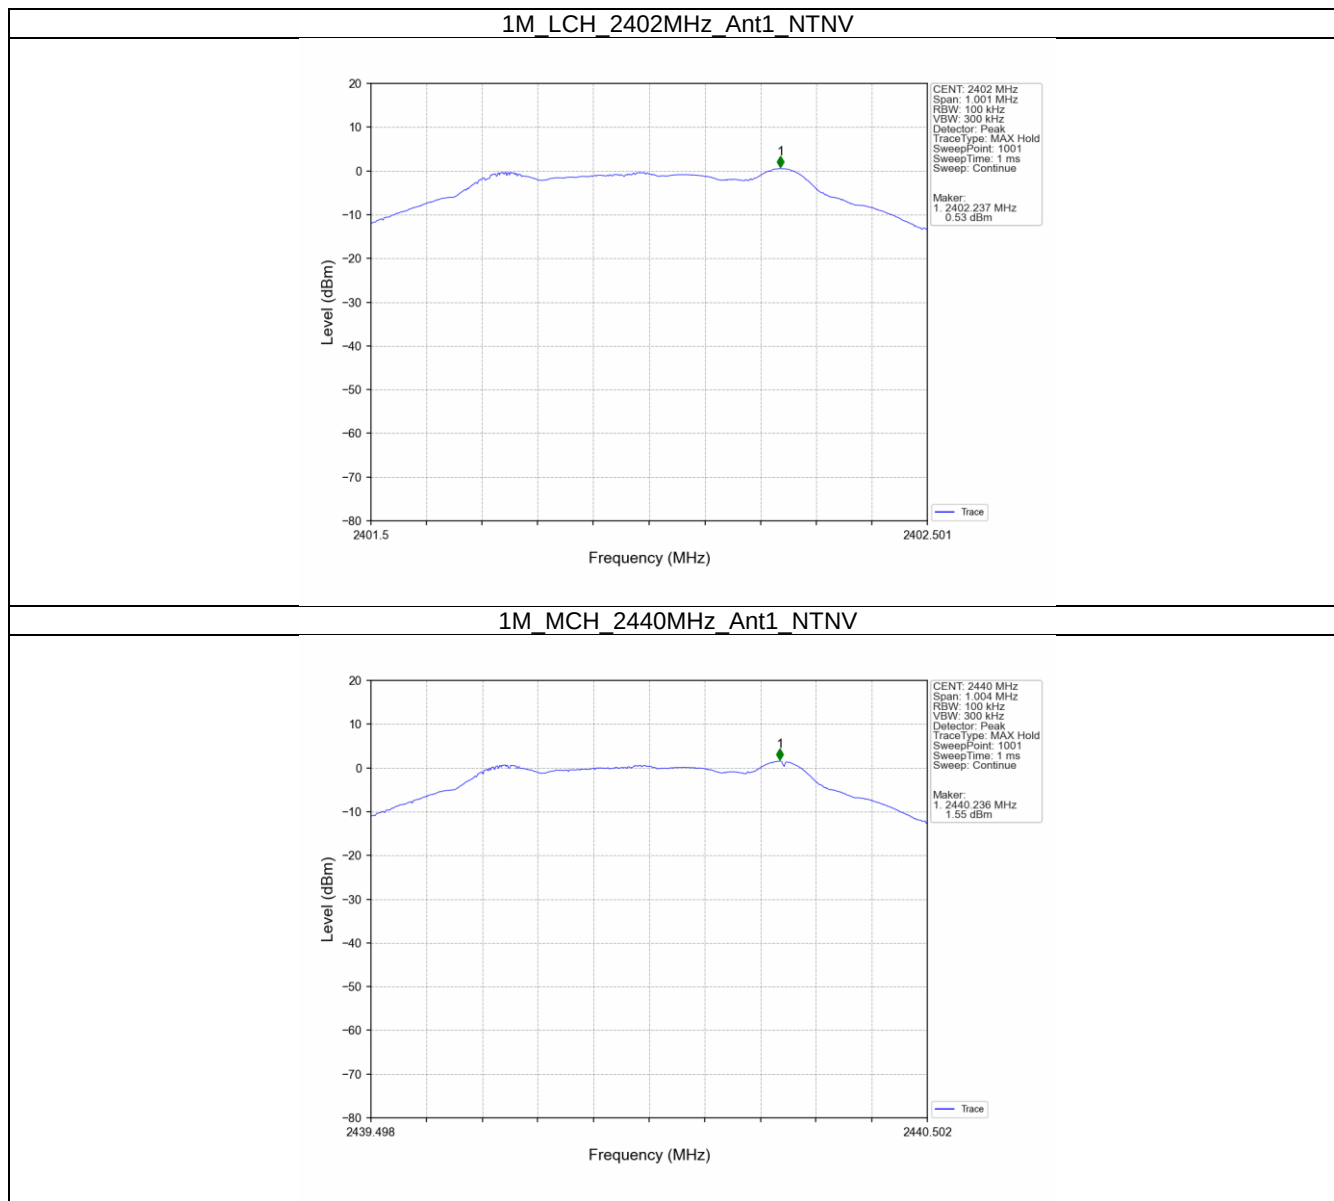


1M_HCH_2480MHz_Ant1_NTNV

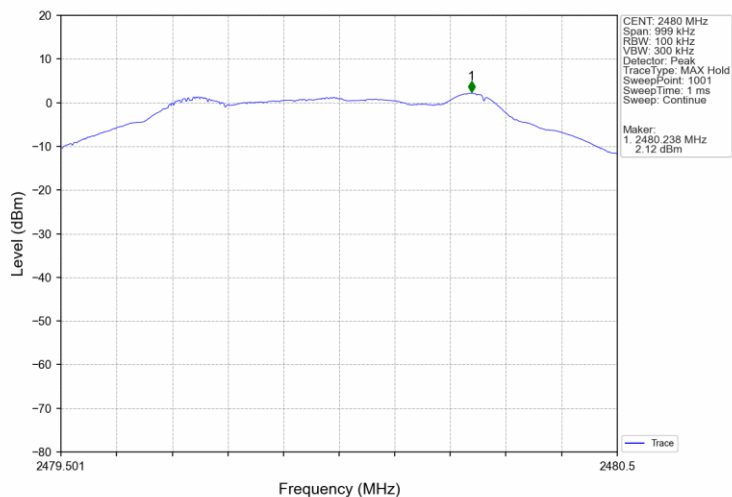


2M_LCH_2402MHz_Ant1_NTNV

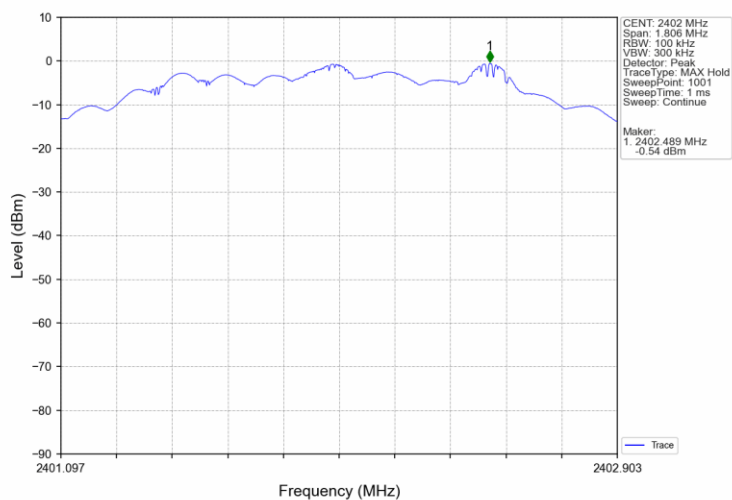

2M_MCH_2440MHz_Ant1_NTNV

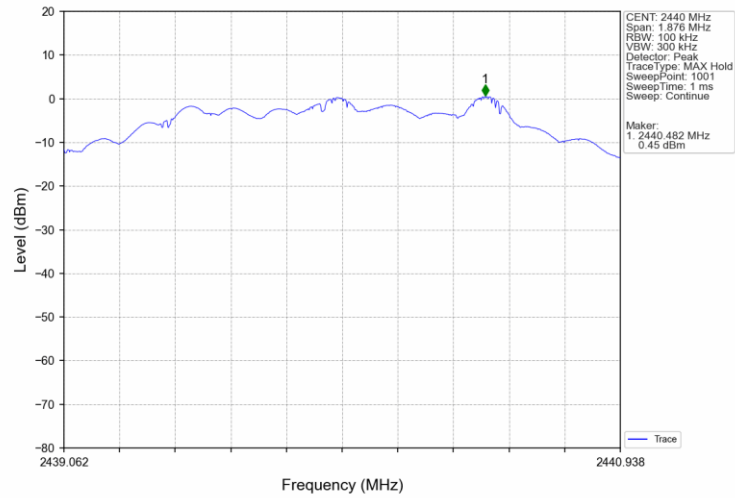


2M_HCH_2480MHz_Ant1_NTNV

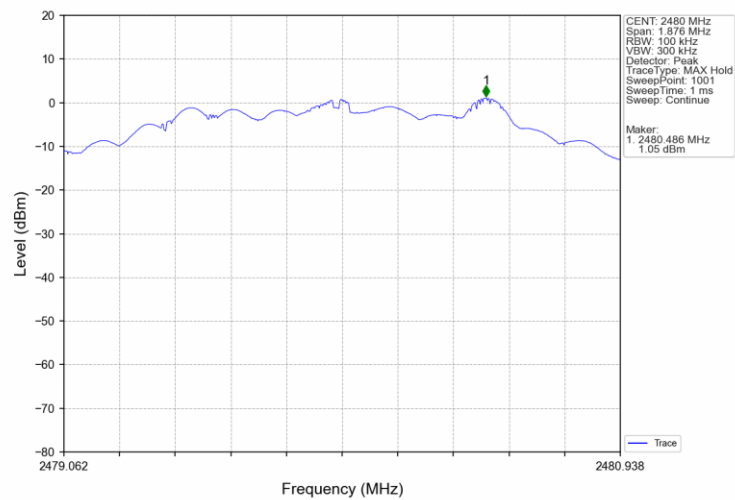


5.2.2 CSE


1M_LCH_2402MHz_Ant1_NTNV

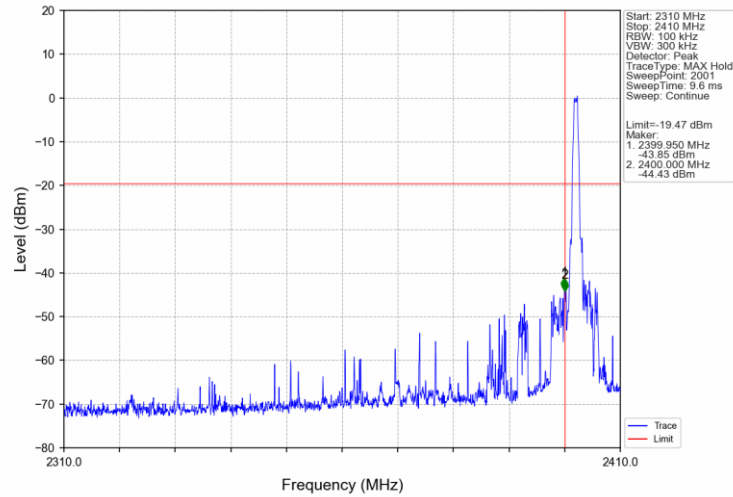


1M_LCH_2402MHz_Ant1_NTNV

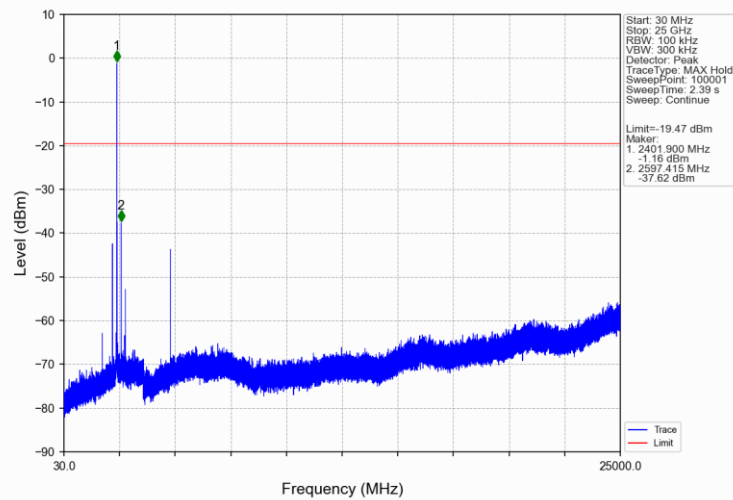


1M_MCH_2440MHz_Ant1_NTNV

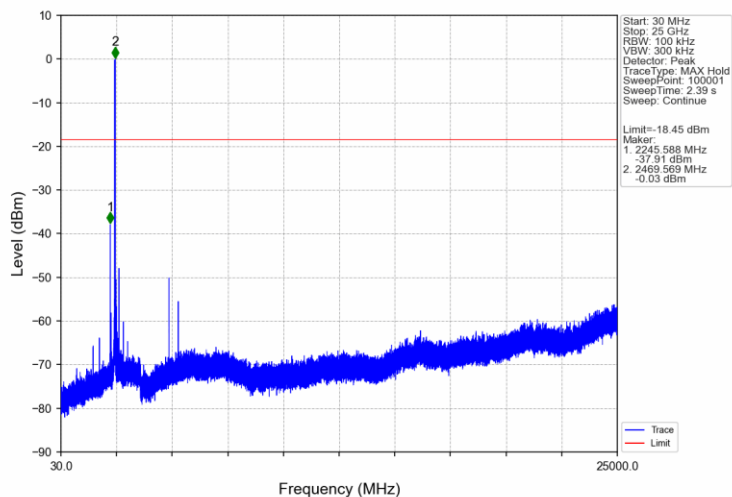


1M_HCH_2480MHz_Ant1_NTNV

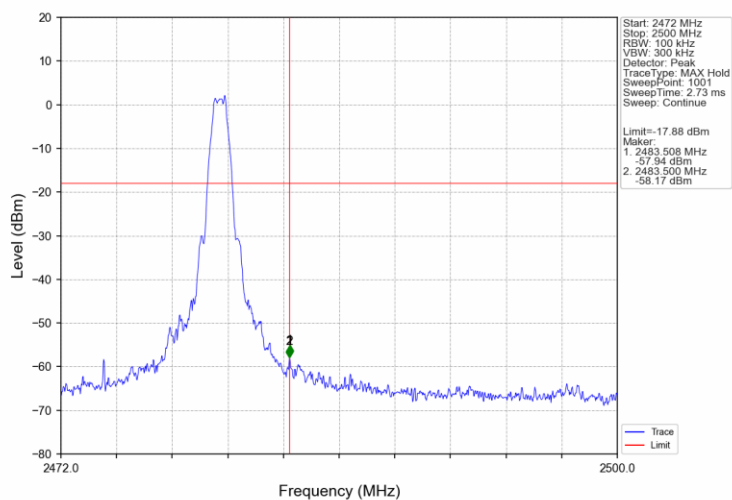


1M_HCH_2480MHz_Ant1_NTNV

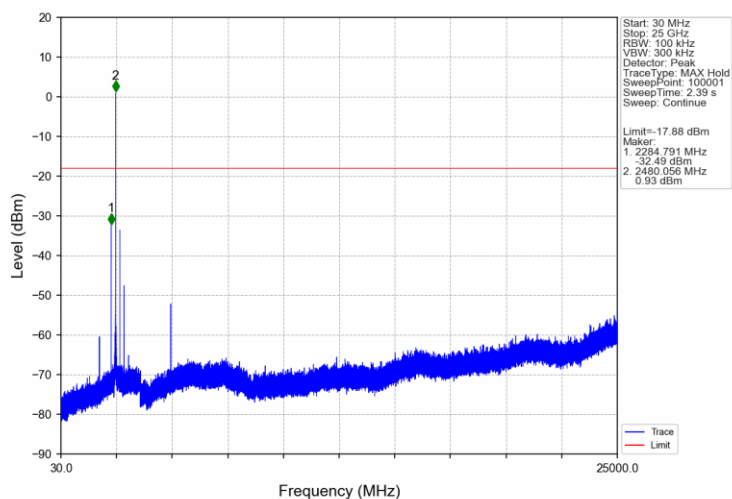


2M_LCH_2402MHz_Ant1_NTNV

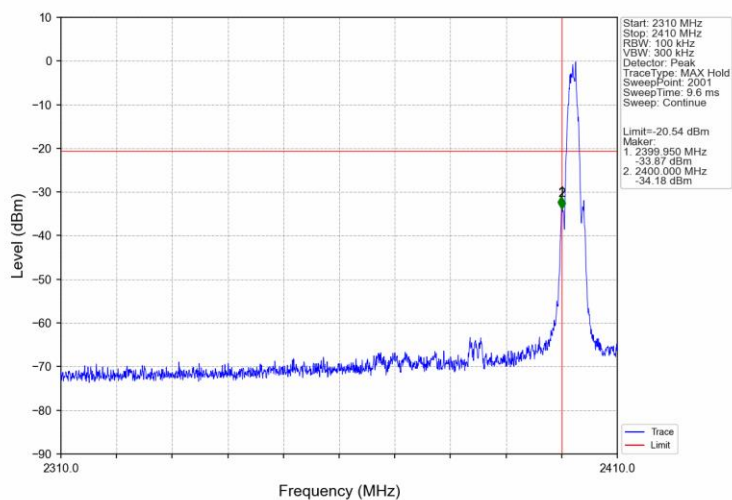


2M_LCH_2402MHz_Ant1_NTNV

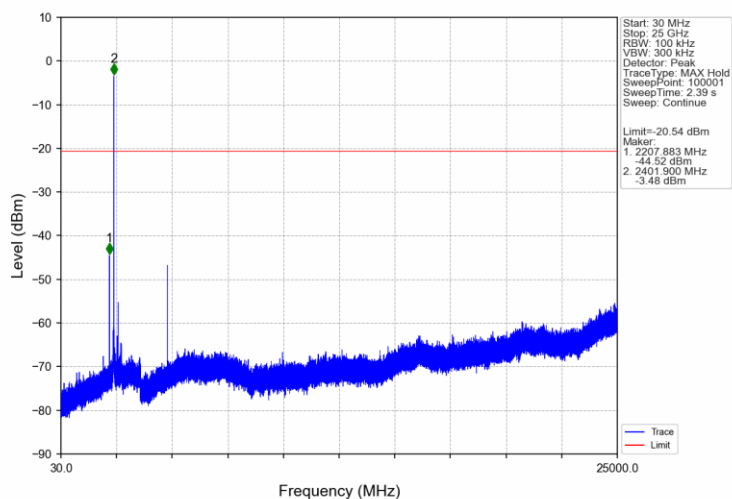


2M_MCH_2440MHz_Ant1_NTNV

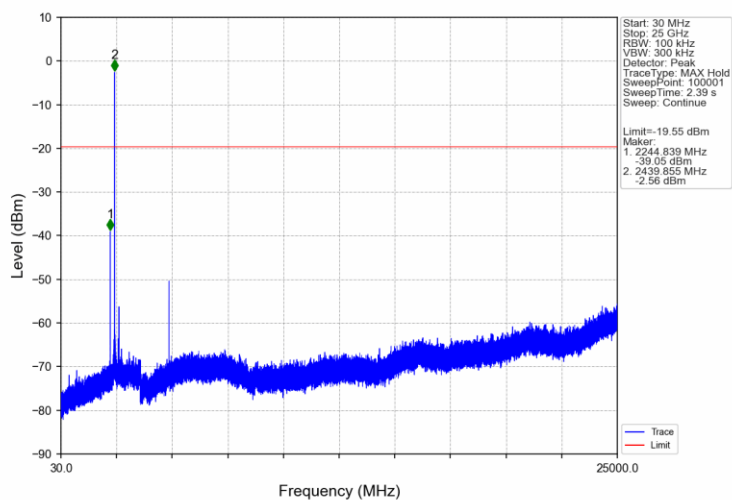

2M_HCH_2480MHz_Ant1_NTNV

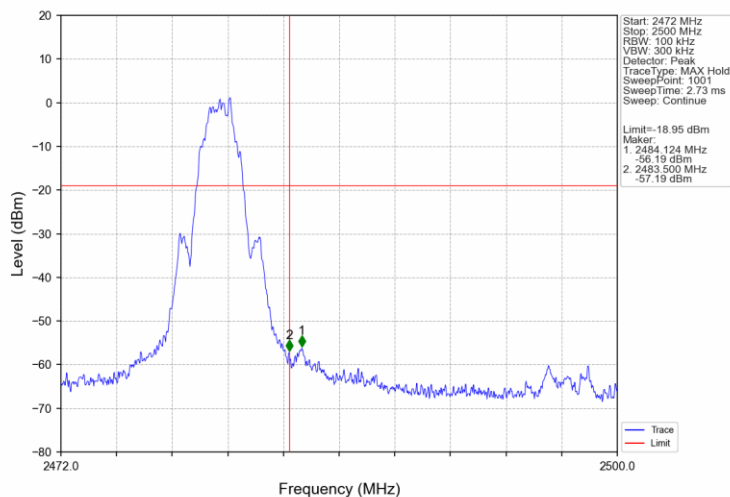

2M_HCH_2480MHz_Ant1_NTNV

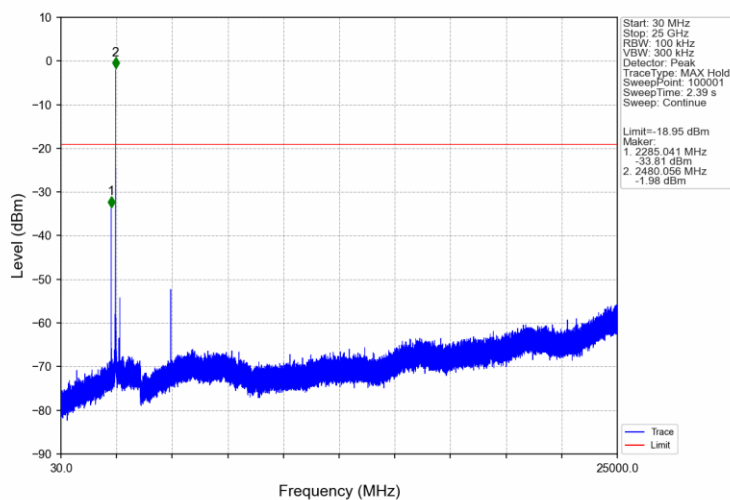



6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0017	2.36

***** End of Report *****