



Band Edge NVNT ac40 5310MHz High Ant1

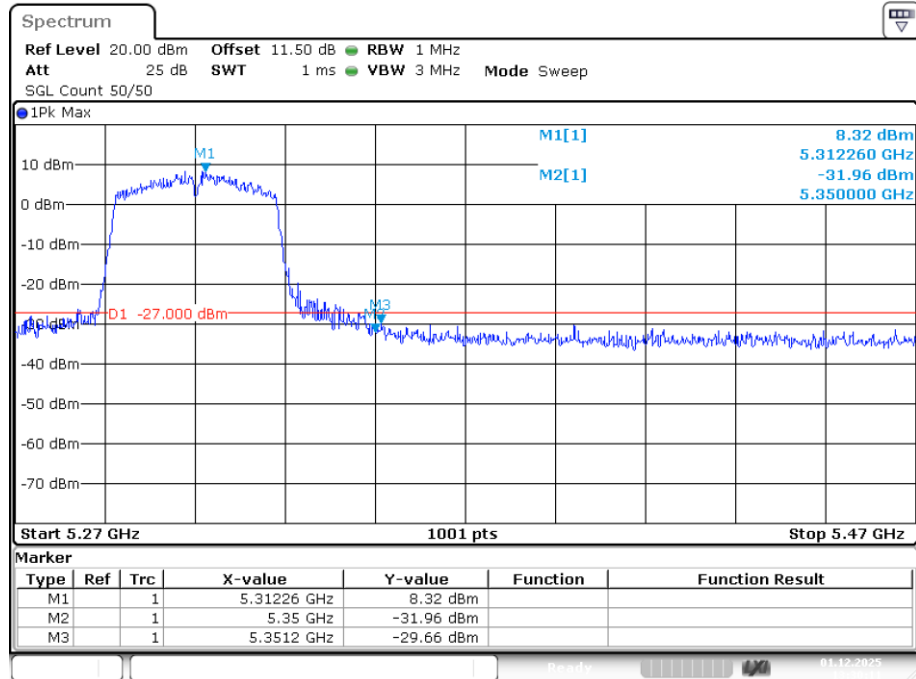


Date: 1.DEC.2025 13:30:11

Band Edge NVNT ax20 5260MHz Low Ant1

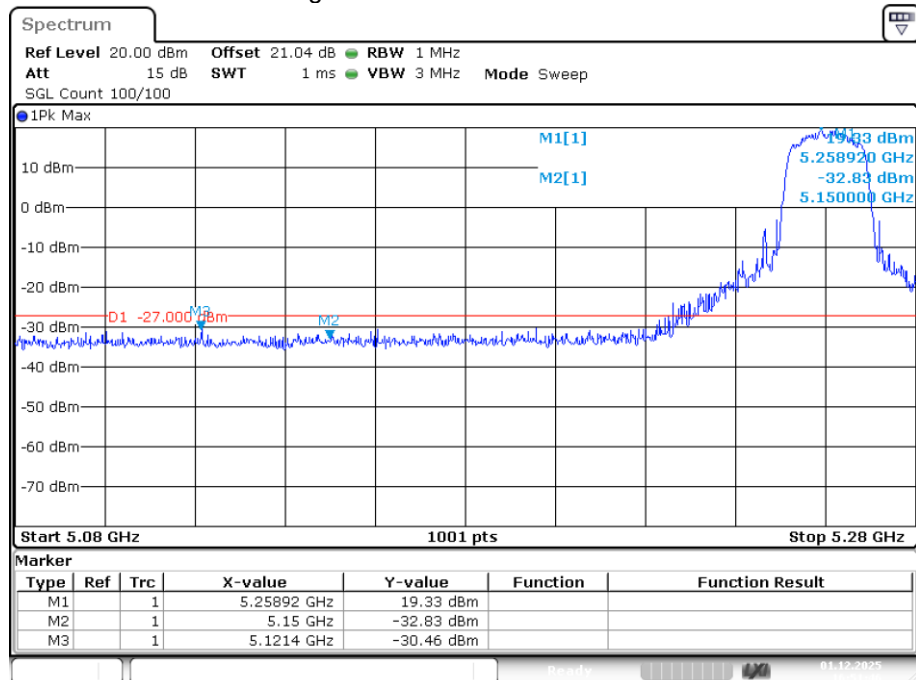


Date: 1.DEC.2025 16:51:47

Band Edge NVNT ax20 5320MHz High Ant1

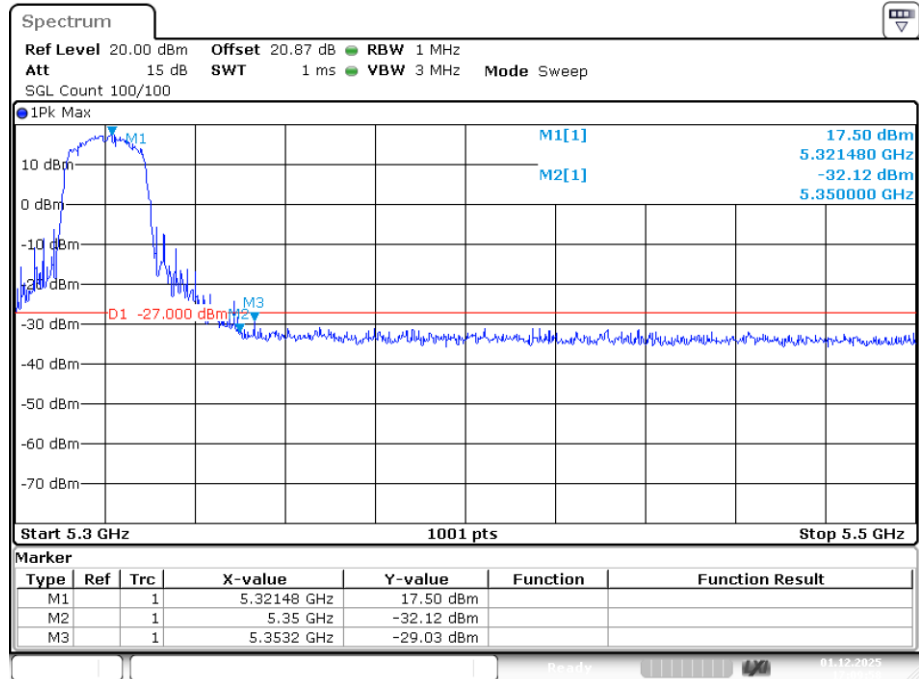


Date: 1.DEC.2025 17:09:58

Band Edge NVNT ax40 5270MHz Low Ant1

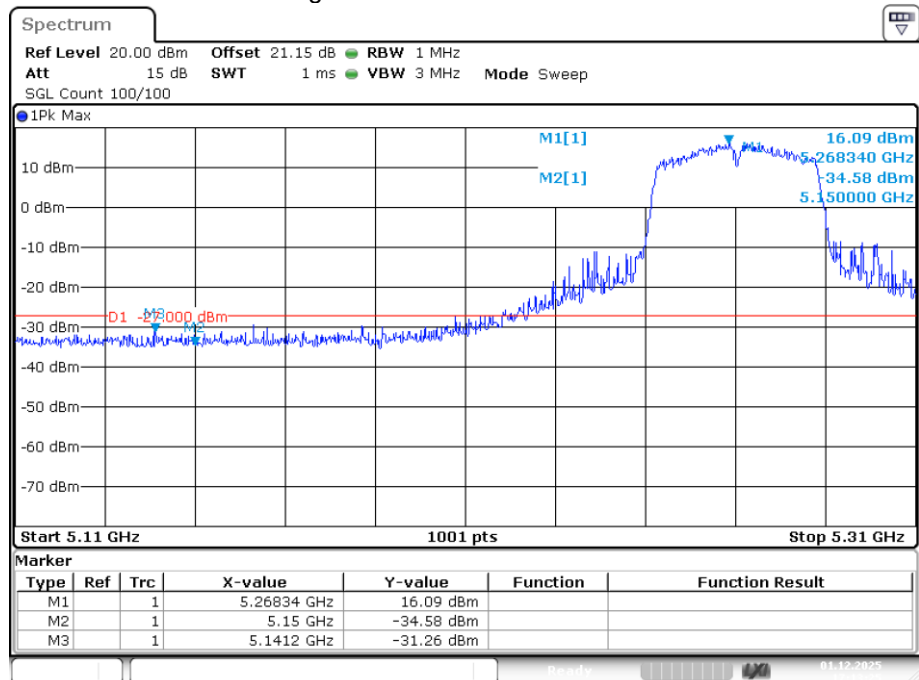


Date: 1.DEC.2025 17:13:25

Band Edge NVNT ax40 5310MHz High Ant1

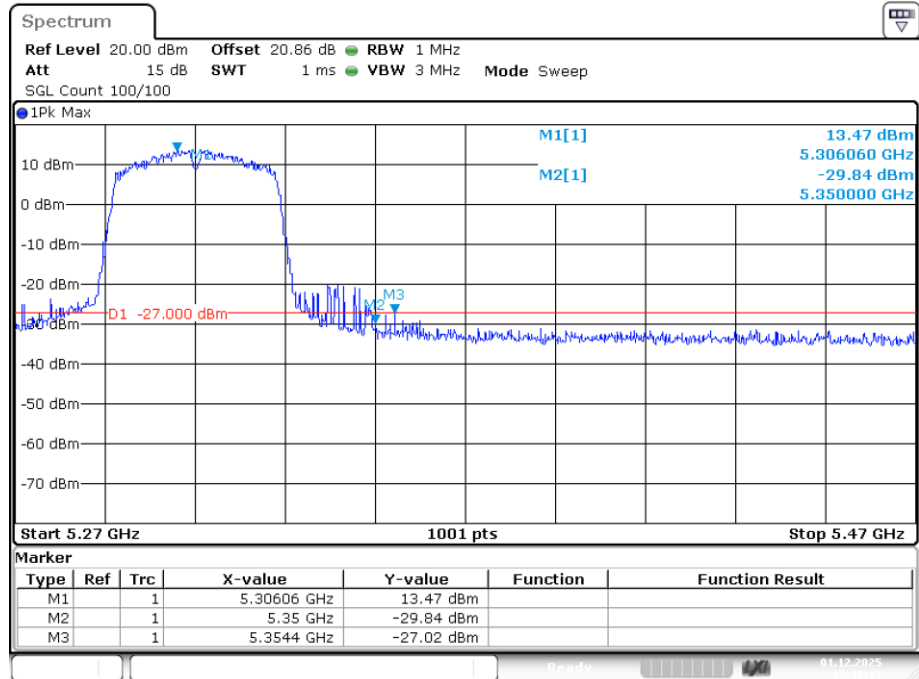


Date: 1.DEC.2025 17:40:17

Band Edge NVNT n20 5260MHz Low Ant1

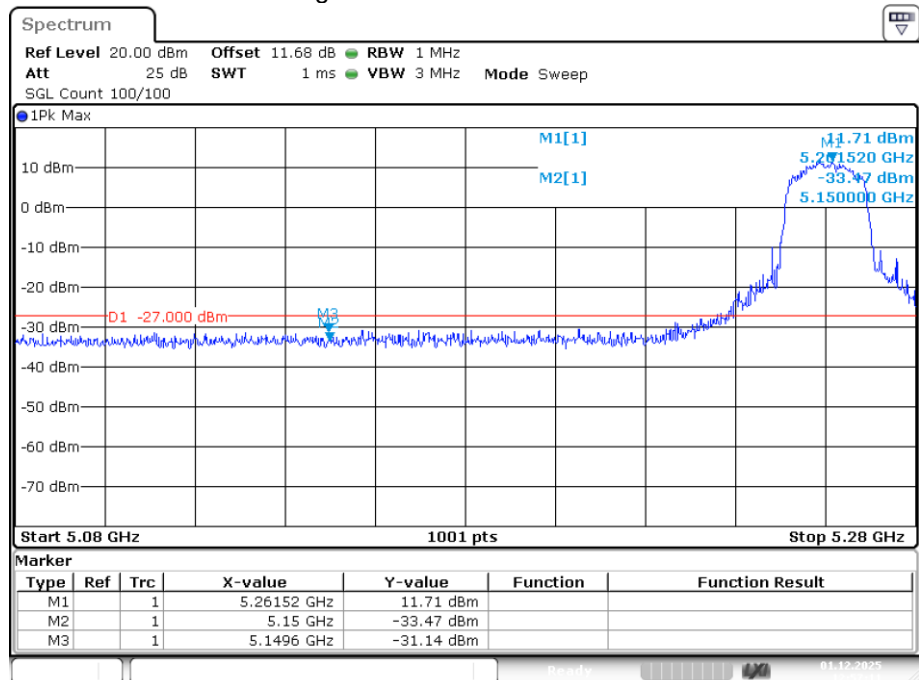


Date: 1.DEC.2025 12:57:11

Band Edge NVNT n20 5320MHz High Ant1

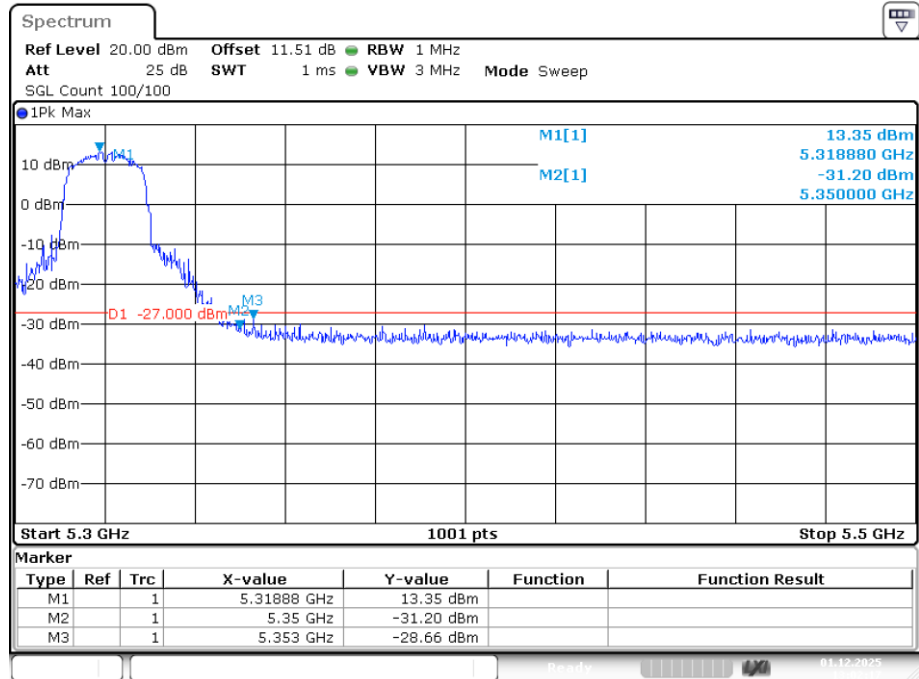


Date: 1.DEC.2025 13:02:17

Band Edge NVNT n40 5270MHz Low Ant1

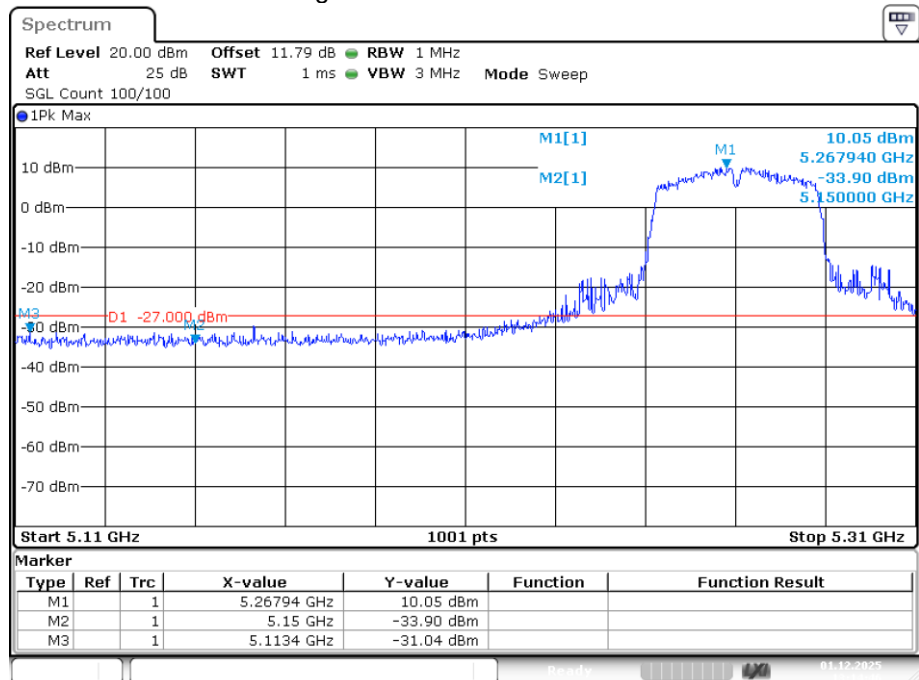

Date: 1.DEC.2025 13:14:46

Band Edge NVNT n40 5310MHz High Ant1

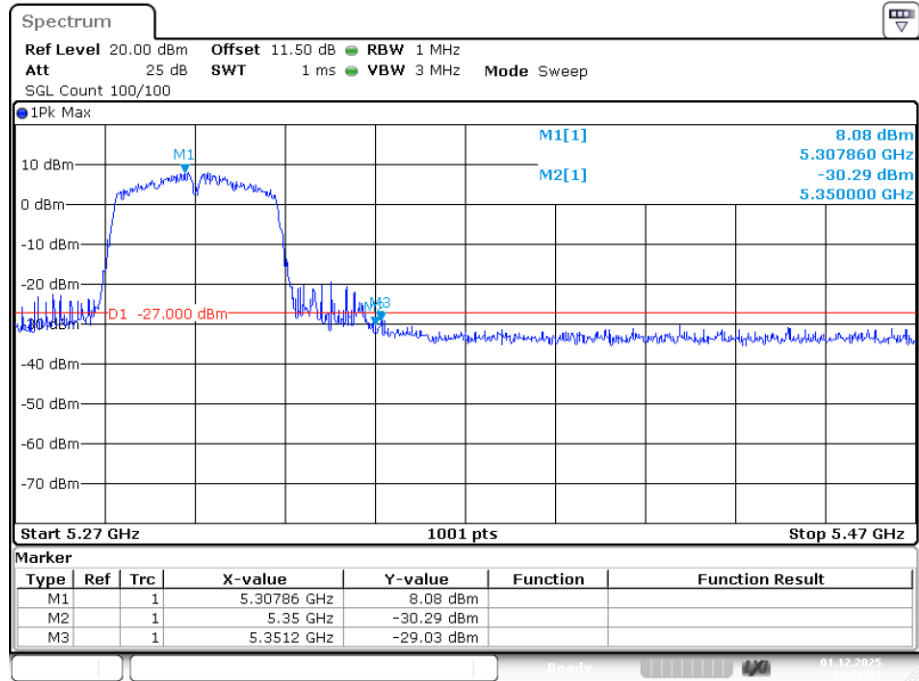


Date: 1.DEC.2025 13:21:32


Band3

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5500	Ant1	-29.64	-27	Pass
NVNT	a	5700	Ant1	-29.88	-27	Pass
NVNT	ac20	5500	Ant1	-30.56	-27	Pass
NVNT	ac20	5700	Ant1	-29.79	-27	Pass
NVNT	ac40	5510	Ant1	-27.06	-27	Pass
NVNT	ac40	5670	Ant1	-29.53	-27	Pass
NVNT	ax20	5500	Ant1	-34.04	-27	Pass
NVNT	ax20	5700	Ant1	-28.58	-27	Pass
NVNT	ax40	5510	Ant1	-27.8	-27	Pass
NVNT	ax40	5670	Ant1	-30.17	-27	Pass
NVNT	n20	5500	Ant1	-30.15	-27	Pass
NVNT	n20	5700	Ant1	-27.09	-27	Pass
NVNT	n40	5510	Ant1	-28.36	-27	Pass
NVNT	n40	5670	Ant1	-30.2	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

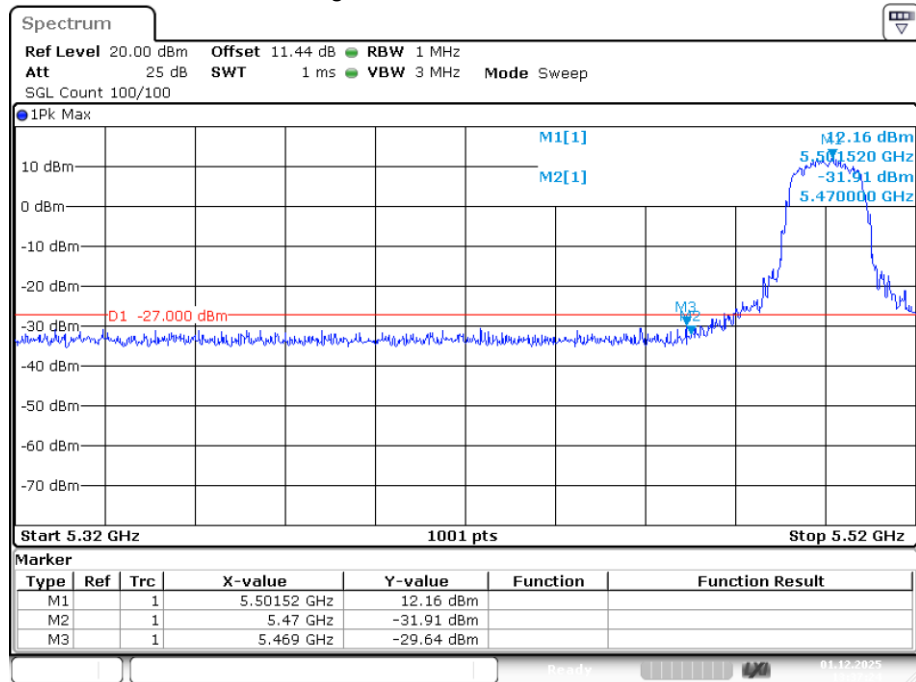
Band Edge NVNT a 5500MHz Low Ant1

Band Edge NVNT a 5700MHz High Ant1

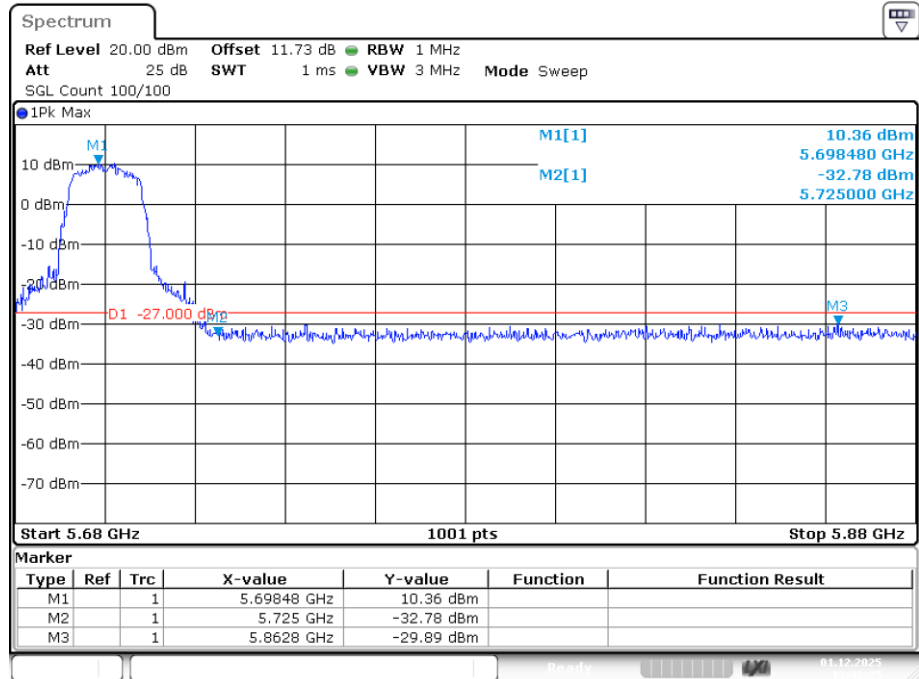


Date: 1.DEC.2025 13:42:24

Band Edge NVNT ac20 5500MHz Low Ant1

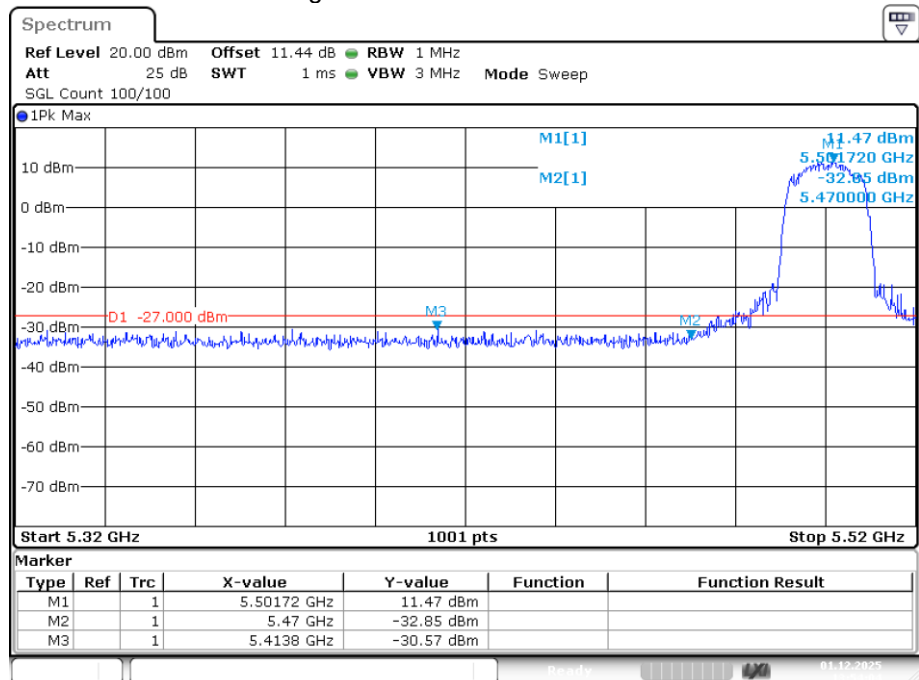


Date: 1.DEC.2025 13:54:04

Band Edge NVNT ac20 5700MHz High Ant1

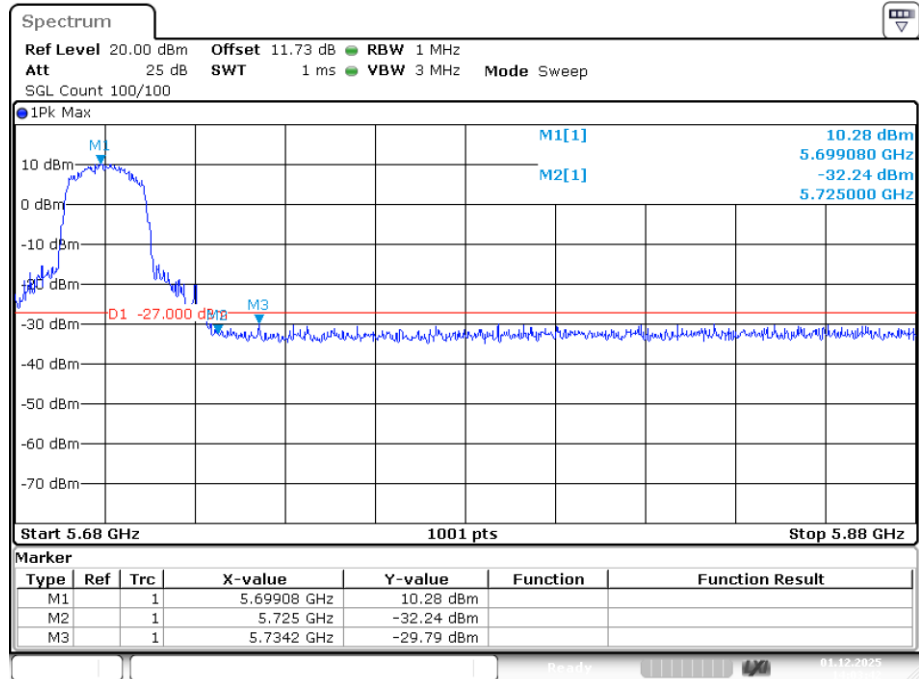


Date: 1.DEC.2025 14:03:42

Band Edge NVNT ac40 5510MHz Low Ant1

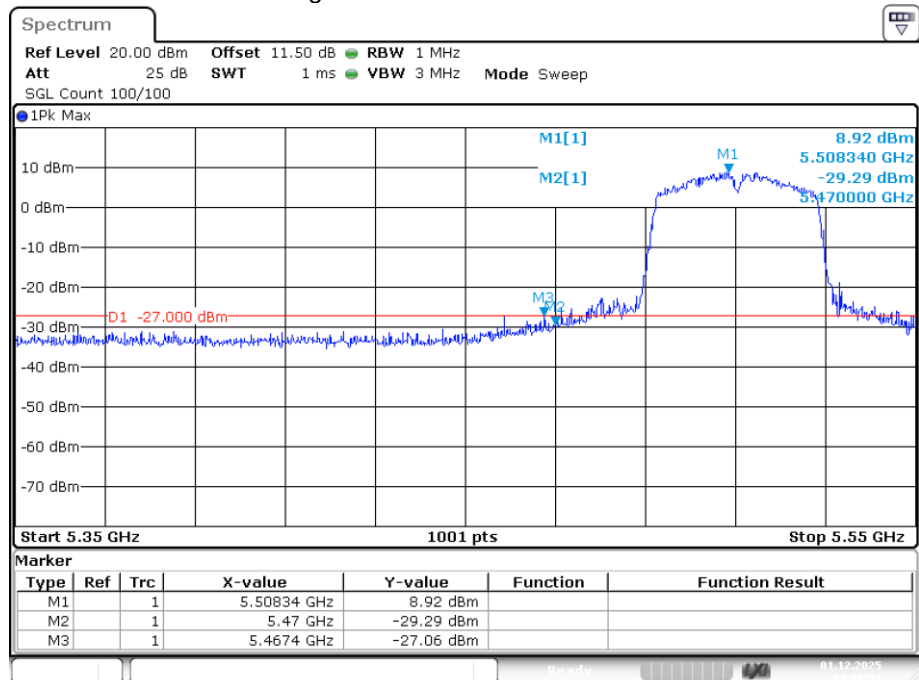


Date: 1.DEC.2025 14:16:51

Band Edge NVNT ac40 5670MHz High Ant1

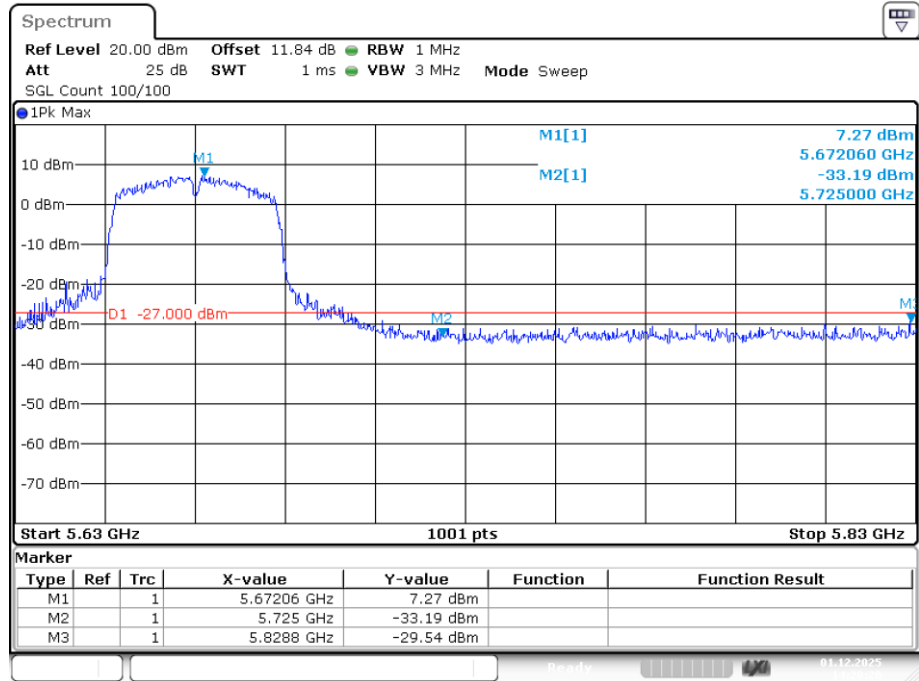


Date: 1.DEC.2025 14:20:20

Band Edge NVNT ax20 5500MHz Low Ant1

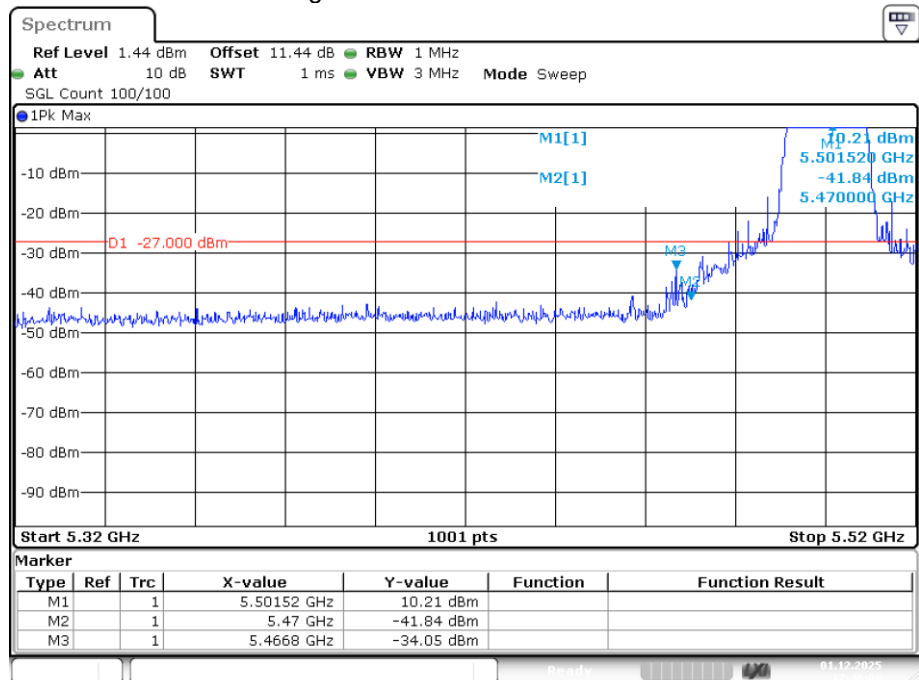


Date: 1.DEC.2025 17:46:09

Band Edge NVNT ax20 5700MHz High Ant1

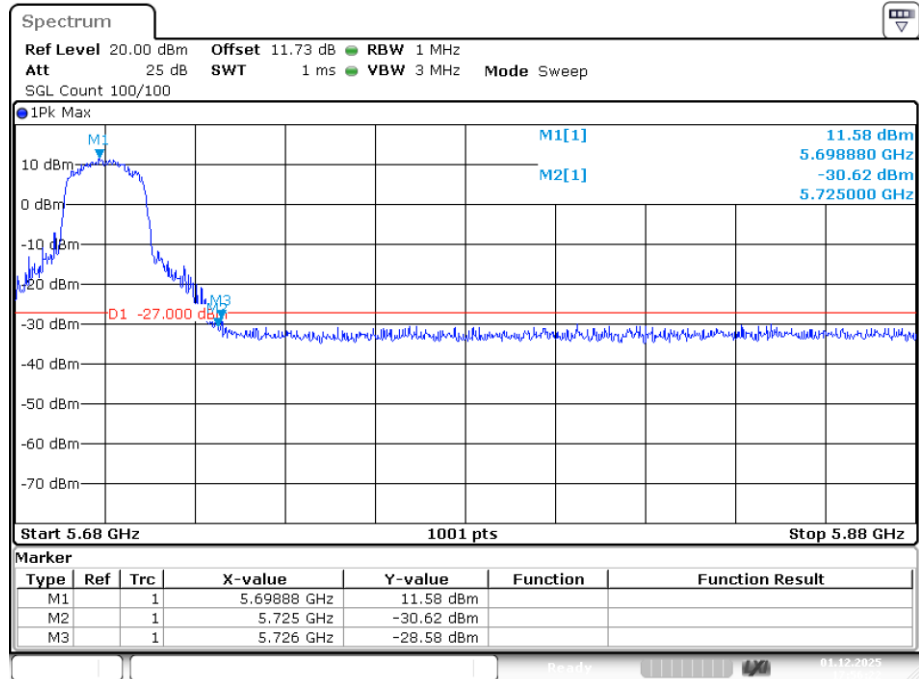


Date: 1.DEC.2025 17:56:21

Band Edge NVNT ax40 5510MHz Low Ant1

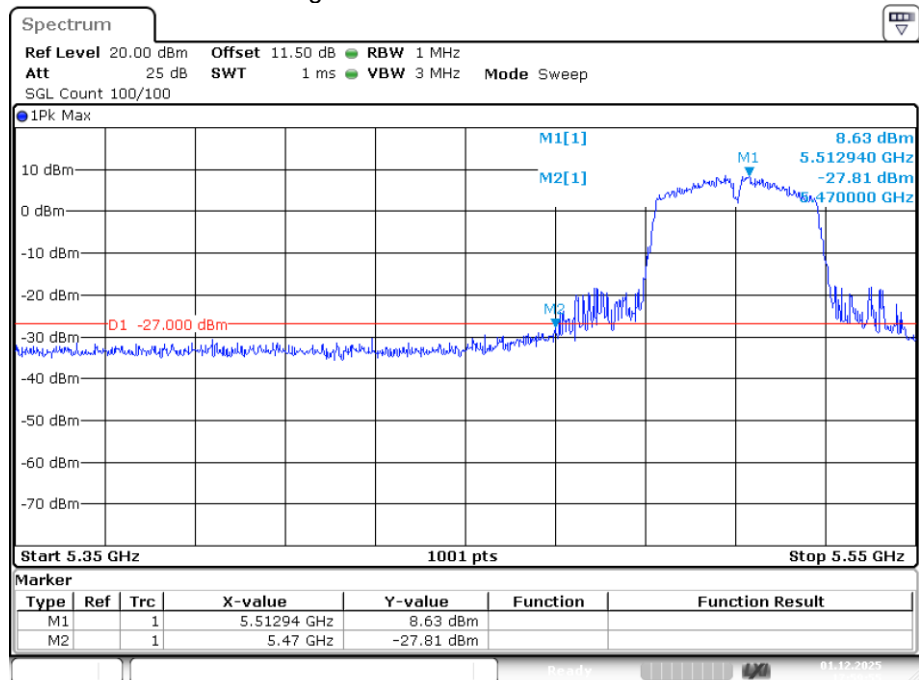


Date: 1.DEC.2025 17:59:54

Band Edge NVNT ax40 5670MHz High Ant1

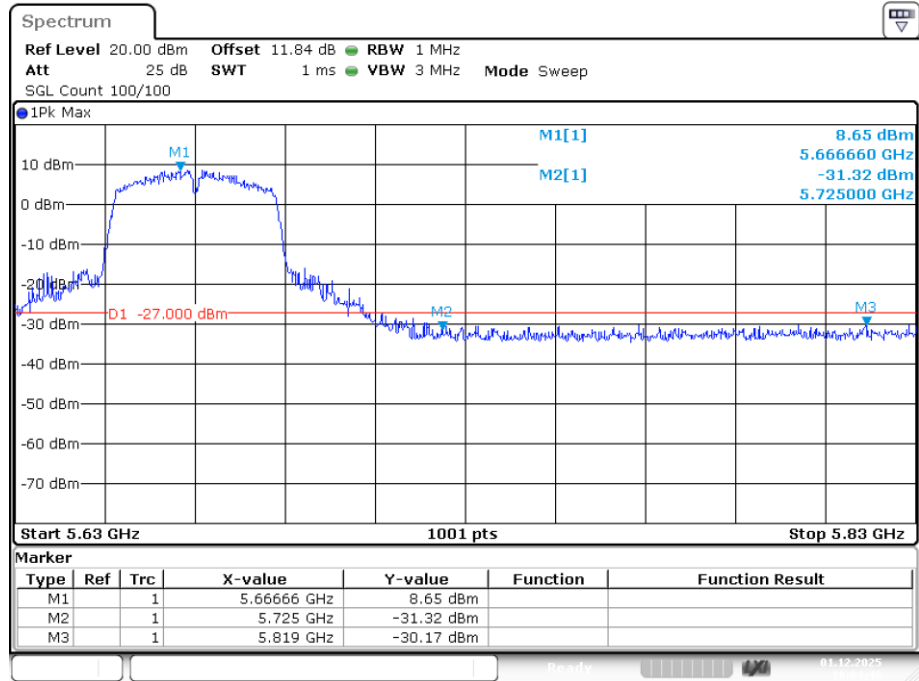


Date: 1.DEC.2025 18:04:48

Band Edge NVNT n20 5500MHz Low Ant1

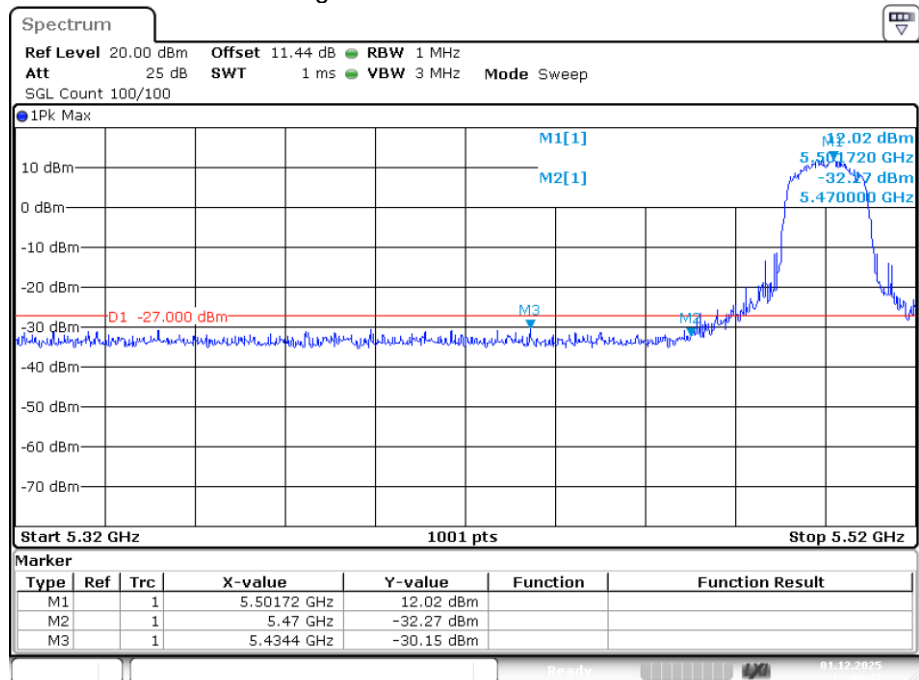


Date: 1.DEC.2025 13:44:47

Band Edge NVNT n20 5700MHz High Ant1

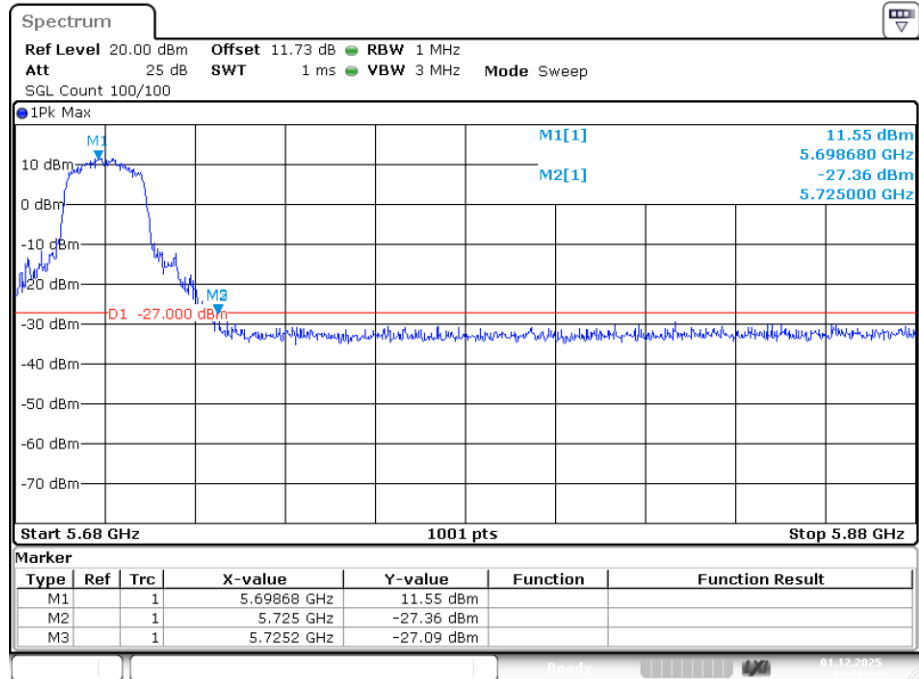


Date: 1.DEC.2025 13:51:00

Band Edge NVNT n40 5510MHz Low Ant1

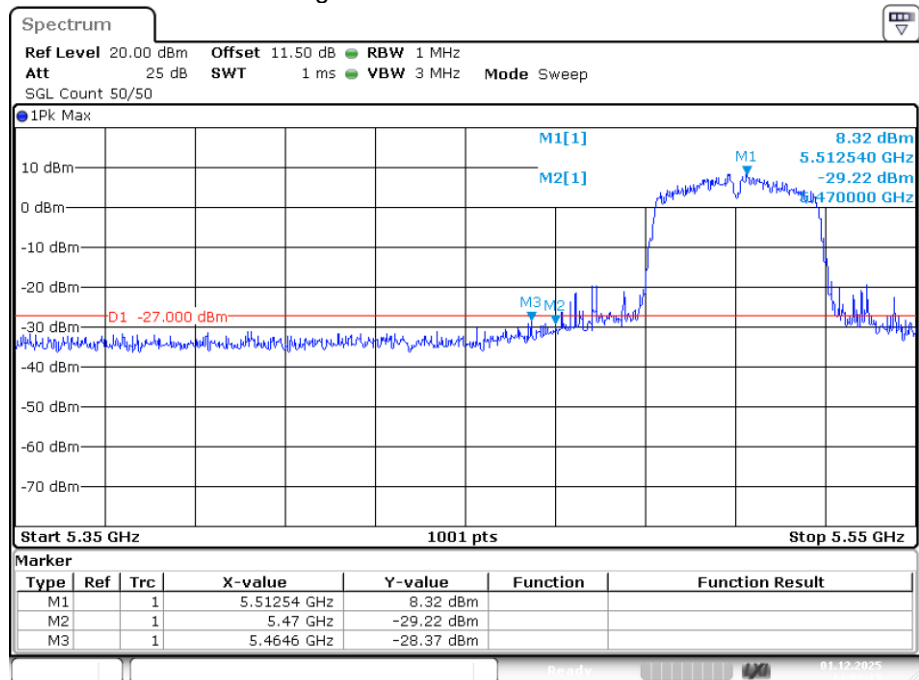

Date: 1.DEC.2025 14:09:15

Band Edge NVNT n40 5670MHz High Ant1

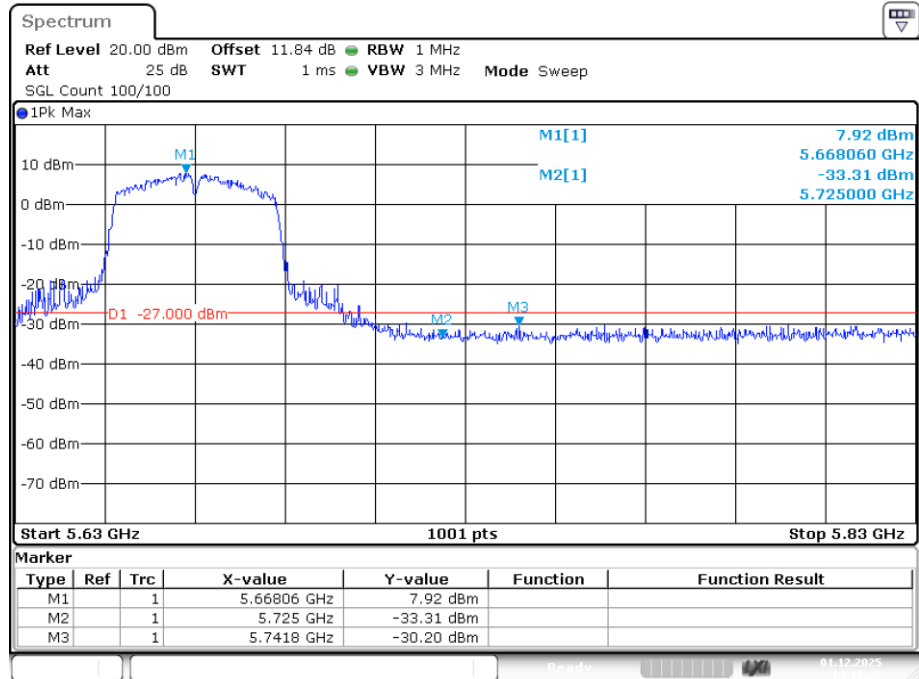


Date: 1.DEC.2025 14:13:22

Band4


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-36.07	-27	Pass
NVNT	a	5825	Ant1	-30.62	-20.64	Pass
NVNT	ac20	5745	Ant1	-30.63	-27	Pass
NVNT	ac20	5825	Ant1	-28.7	14.26	Pass
NVNT	ac40	5755	Ant1	-31.22	14.98	Pass
NVNT	ac40	5795	Ant1	-29.89	13.25	Pass
NVNT	ax20	5745	Ant1	-30.38	-16.05	Pass
NVNT	ax20	5825	Ant1	-30.24	12.24	Pass
NVNT	ax40	5755	Ant1	-31.4	2.16	Pass
NVNT	ax40	5795	Ant1	-30.12	13.30	Pass
NVNT	n20	5745	Ant1	-30.71	7.93	Pass
NVNT	n20	5825	Ant1	-30.27	0.53	Pass
NVNT	n40	5755	Ant1	-30.93	15.66	Pass
NVNT	n40	5795	Ant1	-30.19	-27	Pass

Note: The margin is at least greater than the antenna gain plus the cable loss.

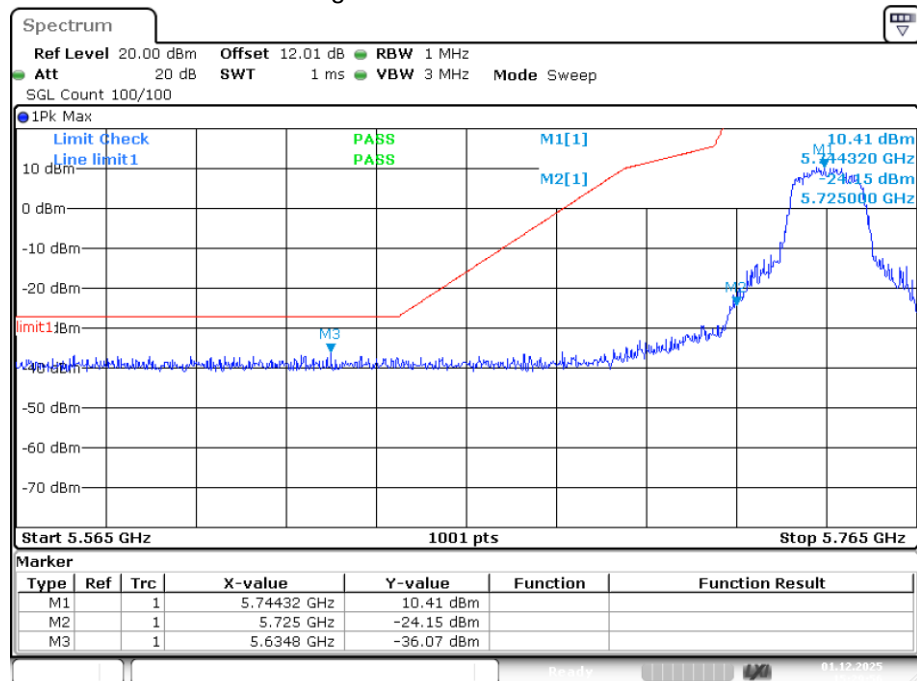Band Edge NVNT a 5745MHz Low Ant1


Date: 1.DEC.2025 15:29:55

Band Edge NVNT a 5825MHz High Ant1

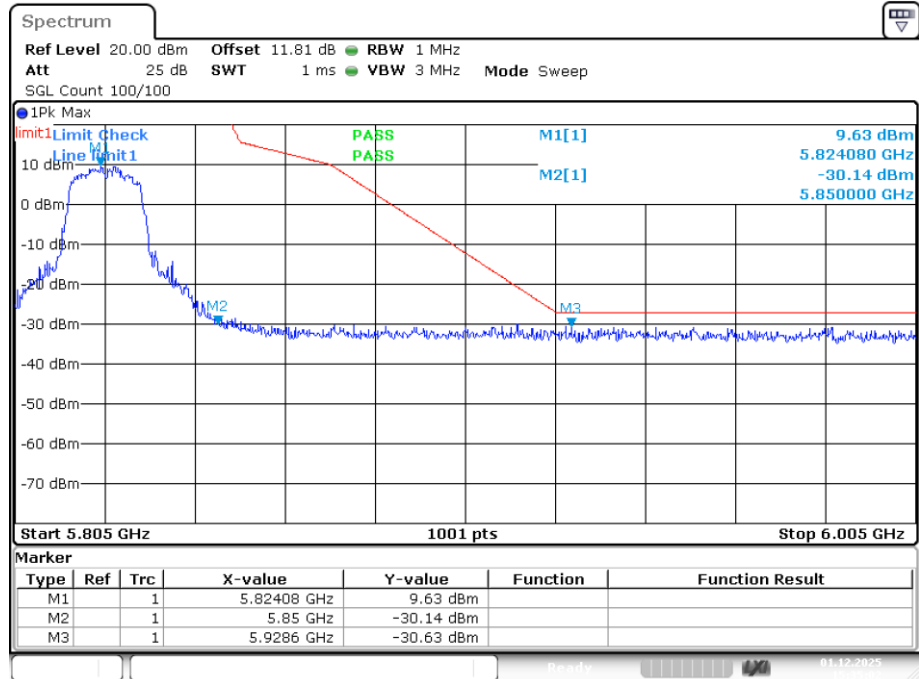


Date: 1.DEC.2025 15:35:02

Band Edge NVNT ac20 5745MHz Low Ant1

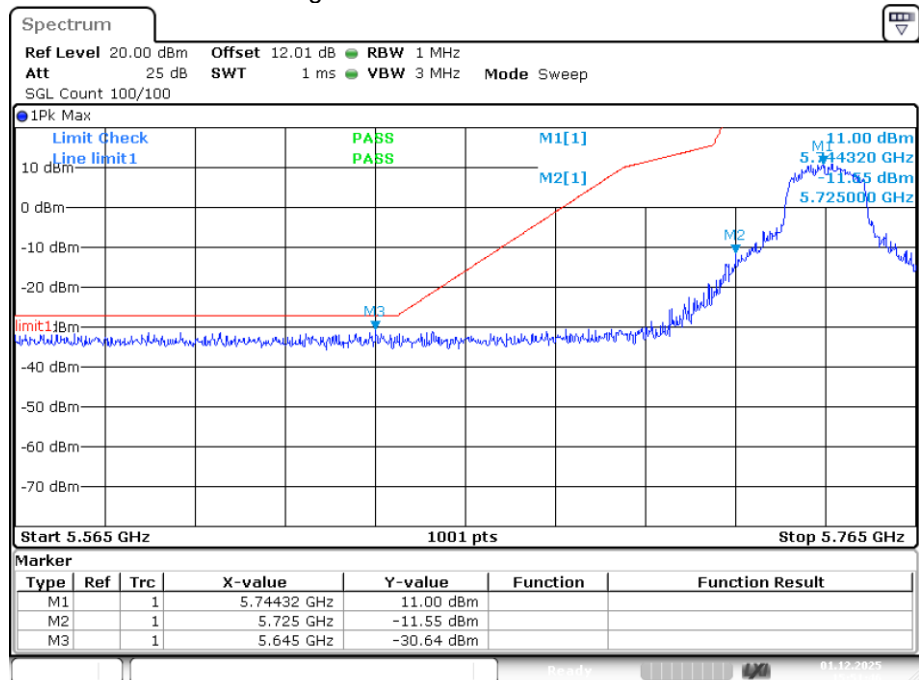


Date: 1.DEC.2025 15:51:45

Band Edge NVNT ac20 5825MHz High Ant1

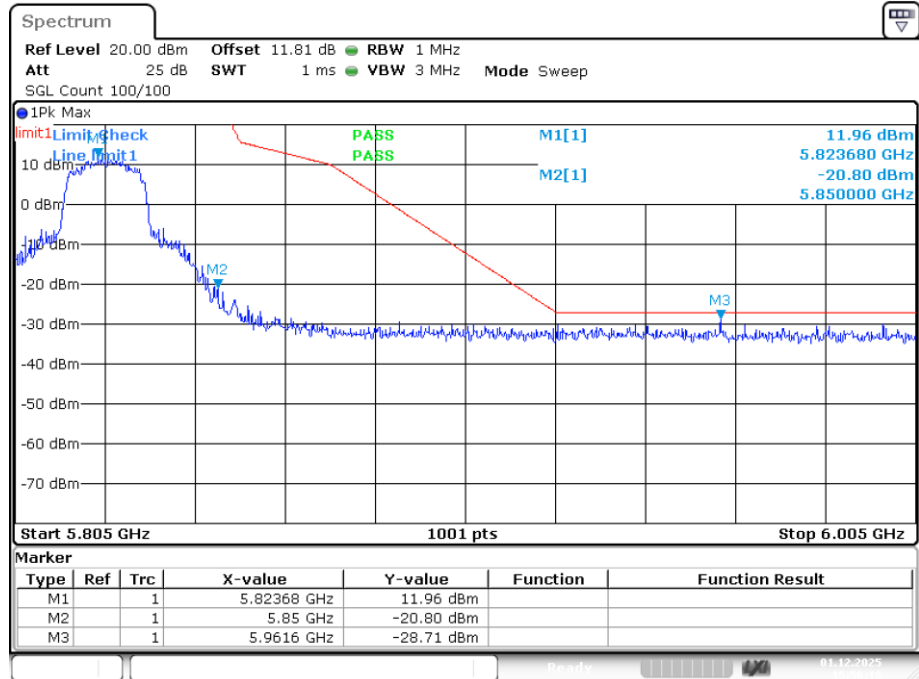


Date: 1.DEC.2025 15:56:19

Band Edge NVNT ac40 5755MHz Low Ant1

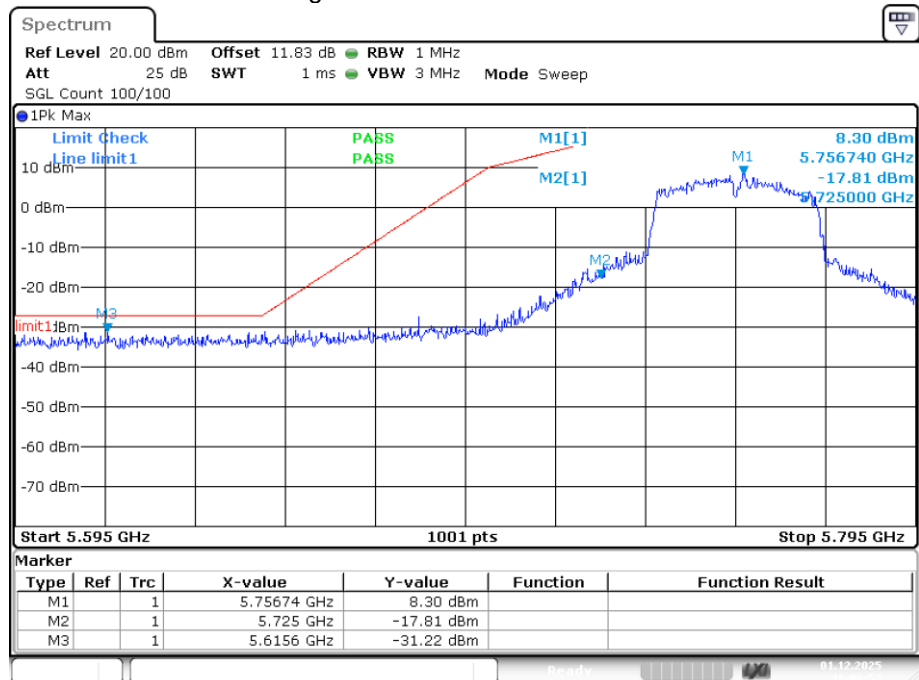


Date: 1.DEC.2025 16:06:56


Band Edge NVNT ac40 5795MHz High Ant1

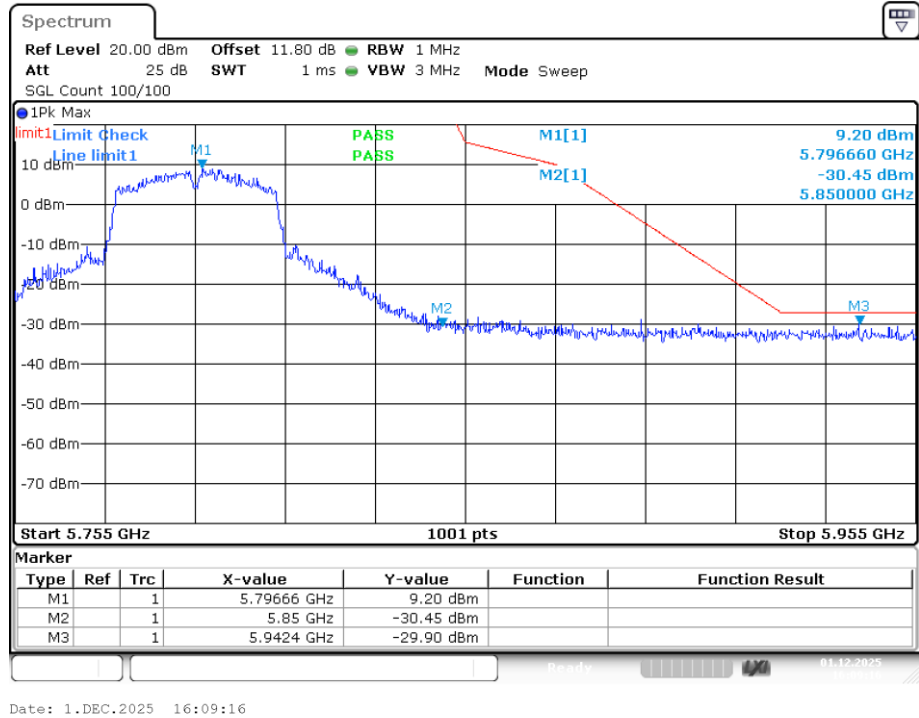

Band Edge NVNT ax20 5745MHz Low Ant1

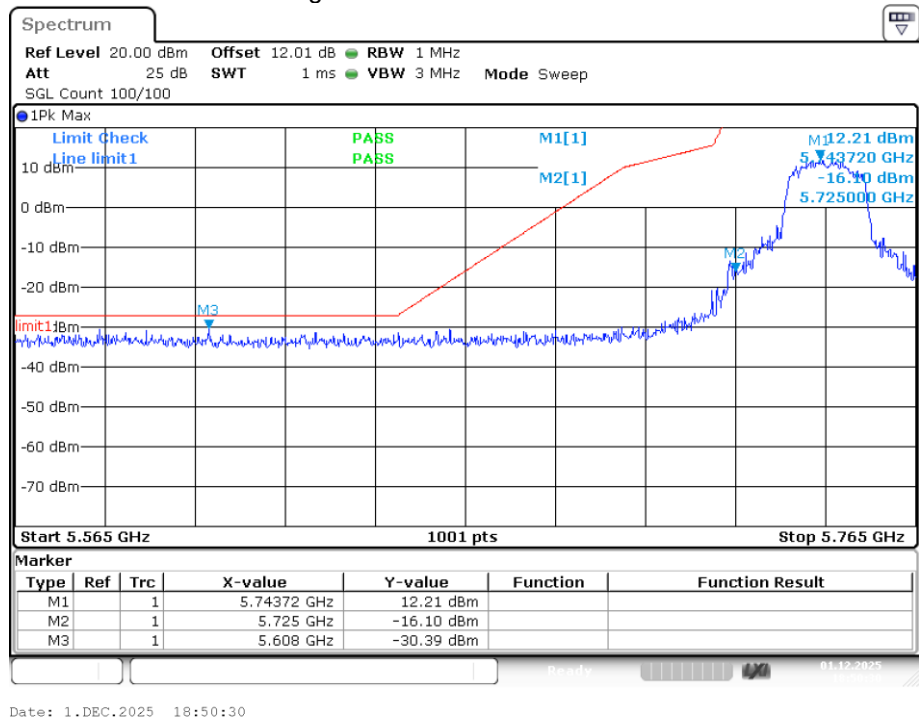


Band Edge NVNT ax20 5825MHz High Ant1

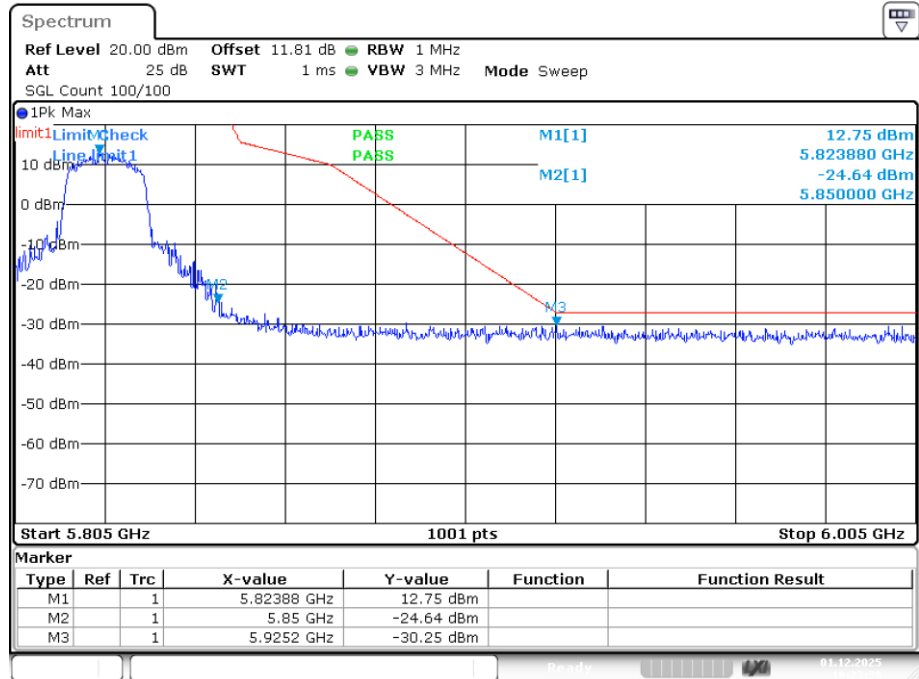


Date: 1.DEC.2025 19:23:38

Band Edge NVNT ax40 5755MHz Low Ant1

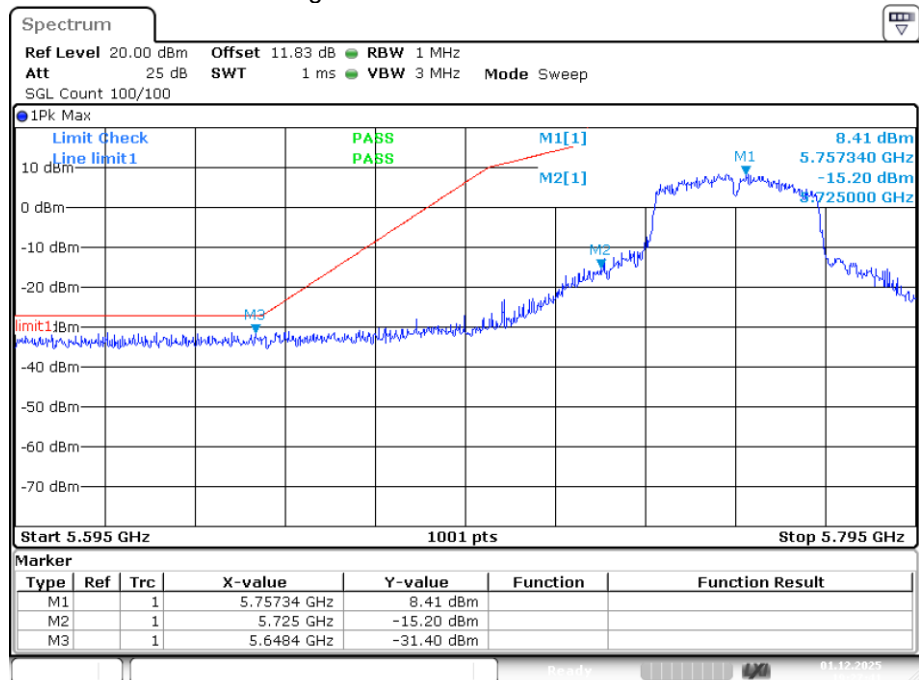


Date: 1.DEC.2025 19:27:41


Band Edge NVNT ax40 5795MHz High Ant1

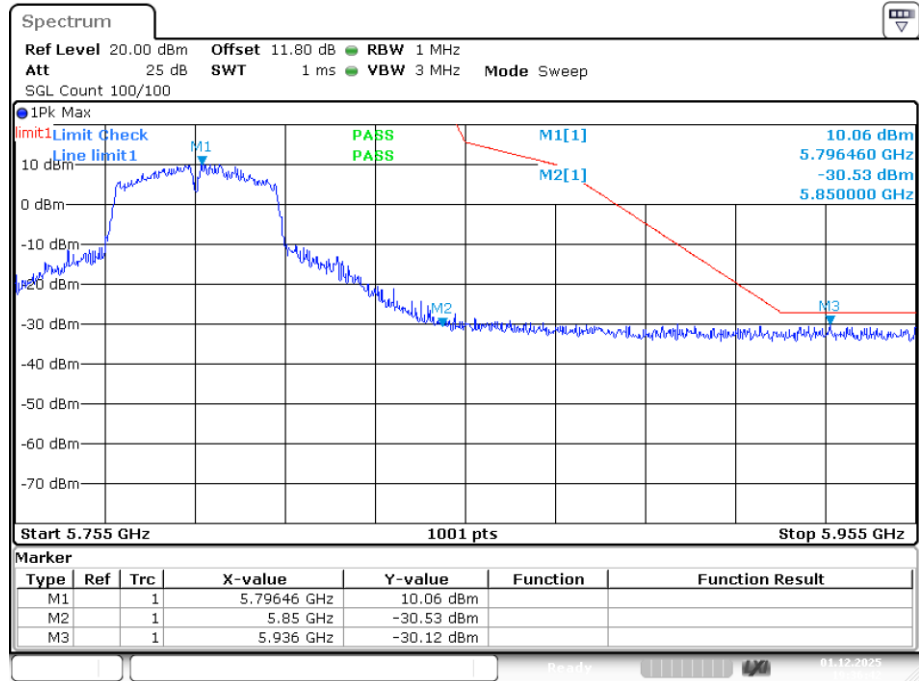

Band Edge NVNT n20 5745MHz Low Ant1

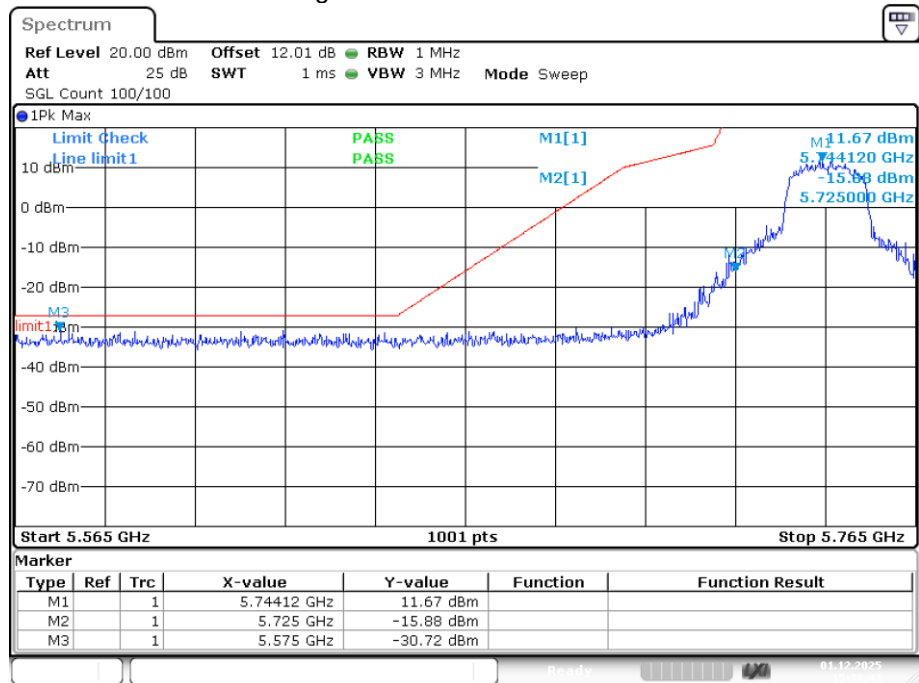


Band Edge NVNT n20 5825MHz High Ant1

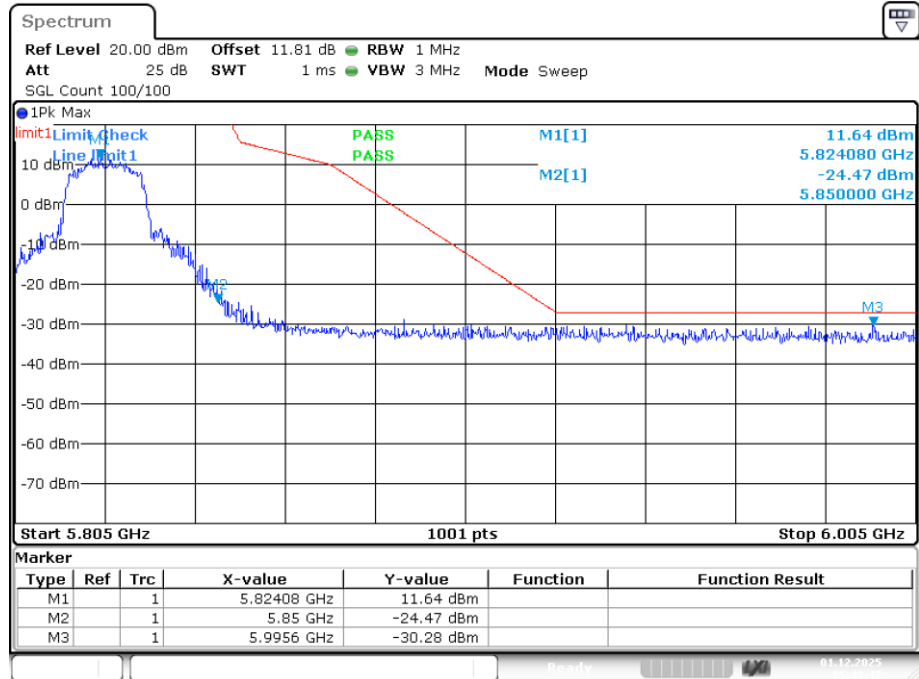


Date: 1.DEC.2025 15:43:47

Band Edge NVNT n40 5755MHz Low Ant1

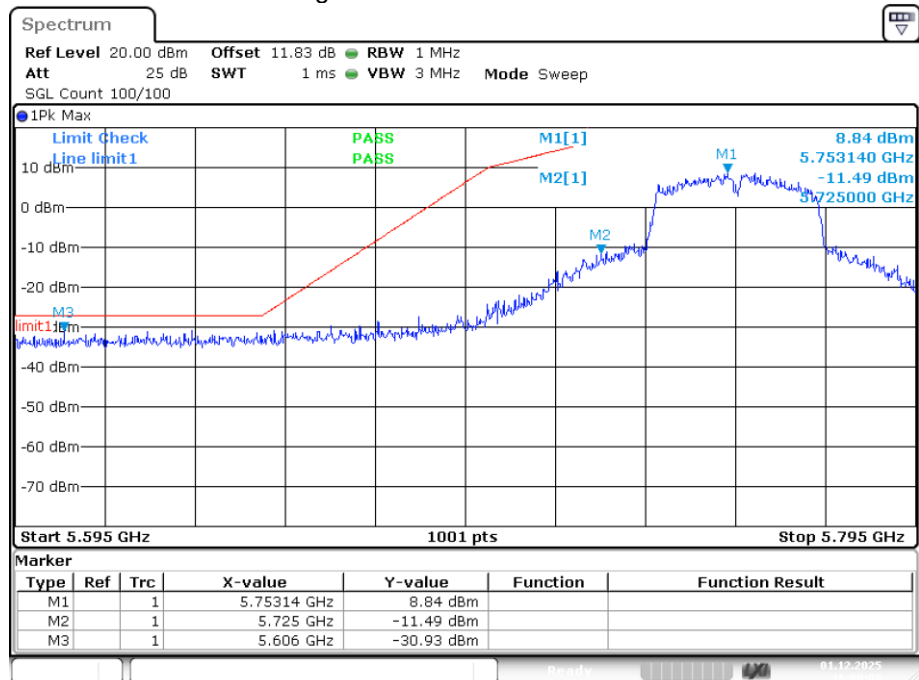

Date: 1.DEC.2025 16:00:07


Band Edge NVNT n40 5795MHz High Ant1

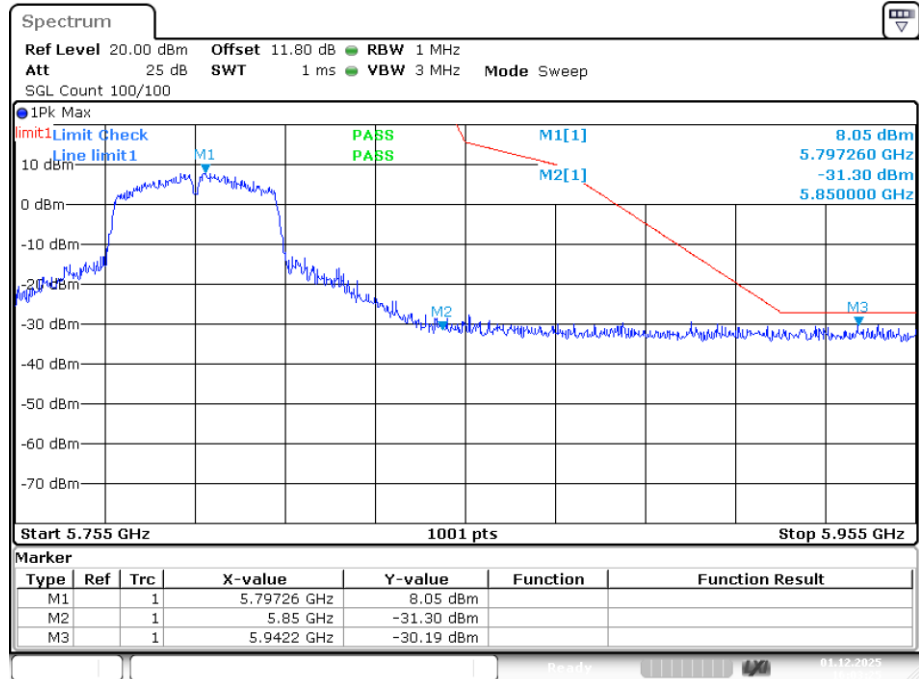



Date: 1.DEC.2025 16:03:25

4.9 Radiated Emission

Test Requirement:	15.205&15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		74.0		Peak Value
			54.0		Average Value
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.				

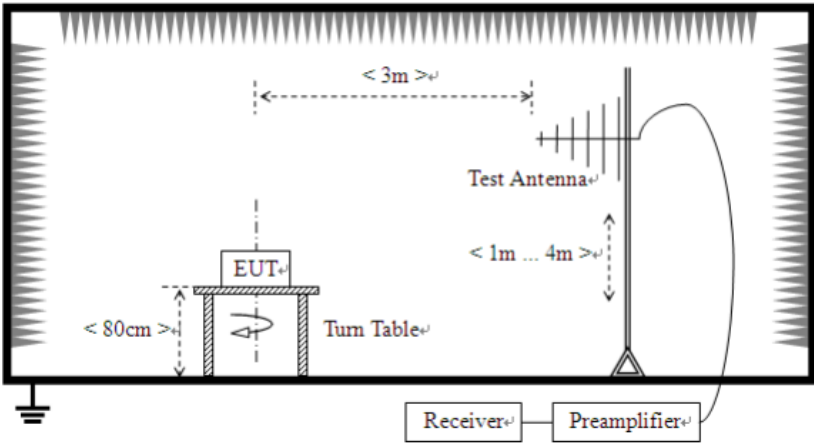	4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	Below 1GHz  Above 1GHz

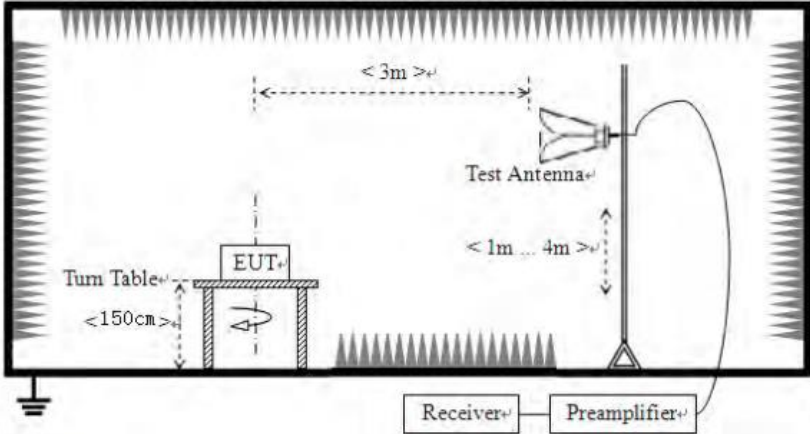	
Test results:	Pass

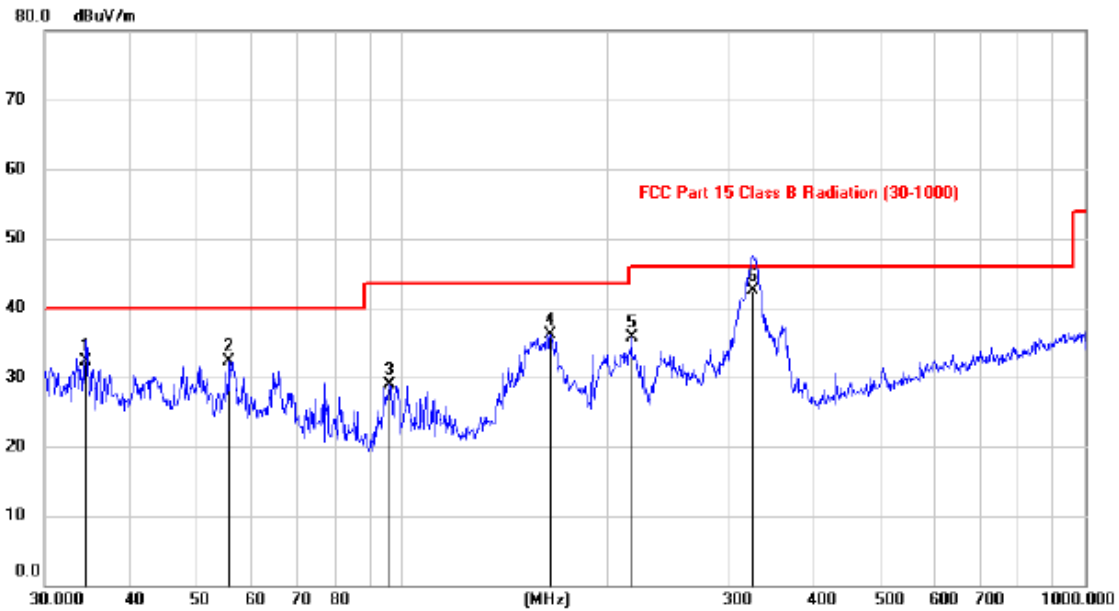ADP-60D24:**Vertical:**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		34.4729	18.64	13.71	32.35	40.00	-7.65	QP		
2		55.8634	18.66	13.57	32.23	40.00	-7.77	peak		
3		95.7734	18.32	10.53	28.85	43.50	-14.65	peak		
4		165.4481	21.65	14.52	36.17	43.50	-7.33	peak		
5		217.2394	24.18	11.55	35.73	46.00	-10.27	peak		
6	*	325.7480	27.76	14.74	42.50	46.00	-3.50	QP		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Horizontal:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		98.3946	24.90	10.75	35.65	43.50	-7.85	peak		
2		162.7247	25.05	14.78	39.83	43.50	-3.67	QP		
3		237.6704	27.42	12.49	39.91	46.00	-6.09	peak		
4	*	329.1160	29.18	14.80	43.98	46.00	-2.02	QP		
5		359.1020	20.56	15.41	35.97	46.00	-10.03	peak		
6		576.6443	12.07	19.74	31.81	46.00	-14.19	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Remark: All modes have been tested, and only worst data of 802.11N mode, Channel 5180MHz was listed in this report.

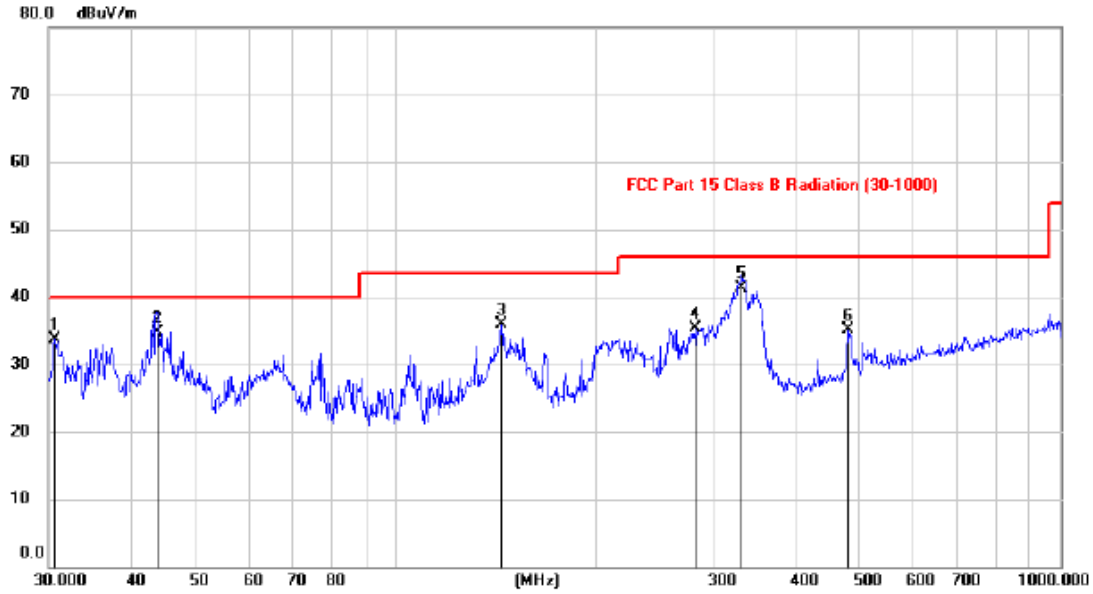2102M-120300E:**Vertical:**

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		30.6522	20.07	13.57	33.64	40.00	-6.36			peak
2		43.7914	20.53	14.23	34.76	40.00	-5.24			QP
3		143.9304	21.25	14.61	35.86	43.50	-7.64			peak
4		282.8859	21.62	13.66	35.28	46.00	-10.72			peak
5	*	331.3546	26.42	14.85	41.27	46.00	-4.73			QP
6		480.0785	17.08	17.95	35.03	46.00	-10.97			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

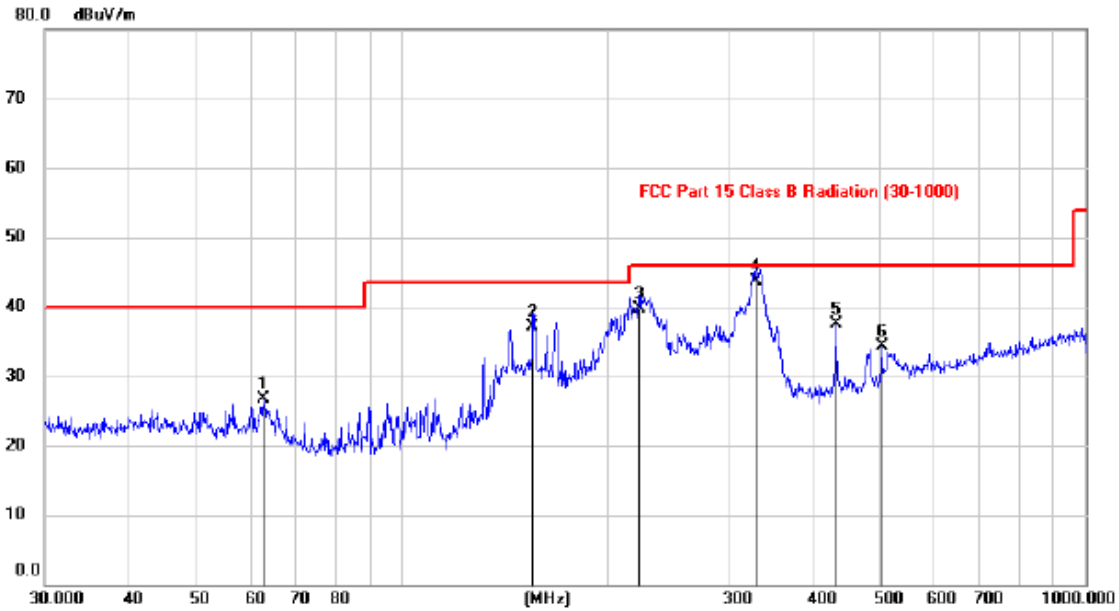Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		62.7386	14.09	12.61	26.70	40.00	-13.30	peak		
2		155.6552	22.06	15.05	37.11	43.50	-6.39	QP		
3		222.2477	27.84	11.87	39.71	46.00	-6.29	QP		
4	*	329.8477	28.94	14.82	43.76	46.00	-2.24	QP		
5		431.7880	20.41	17.12	37.53	46.00	-8.47	peak		
6		503.4100	15.97	18.27	34.24	46.00	-11.76	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of 802.11N mode, Channel 5180MHz was listed in this report.

Above 1GHz (U-NII-1):

802.11a(HT20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.16	51.56	16.29	14.62	32.65	49.82	68.20	-18.38	Vertical
15540.27	47.11	21.83	17.66	34.46	52.14	74.00	-21.86	Vertical
10360.30	53.85	16.29	14.62	32.65	52.11	68.20	-16.09	Horizontal
15540.23	44.91	21.83	17.66	34.46	49.94	74.00	-24.06	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.16	46.13	16.29	14.62	32.65	44.39	54.00	-9.61	Vertical
15540.21	38.61	21.83	17.66	34.46	43.64	54.00	-10.36	Vertical
10360.29	45.61	16.29	14.62	32.65	43.87	54.00	-10.13	Horizontal
15540.15	38.40	21.83	17.66	34.46	43.43	54.00	-10.57	Horizontal

802.11a(HT20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.16	51.42	16.29	14.62	32.65	49.68	68.20	-18.52	Vertical
15600.07	50.25	21.83	17.66	34.46	55.28	74.00	-18.72	Vertical
10400.06	48.53	16.29	14.62	32.65	46.79	68.20	-21.41	Horizontal
15600.06	48.83	21.83	17.66	34.46	53.86	74.00	-20.14	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.31	45.62	16.29	14.62	32.65	43.88	54.00	-10.12	Vertical
15600.06	39.70	21.83	17.66	34.46	44.73	54.00	-9.27	Vertical
10400.02	45.79	16.29	14.62	32.65	44.05	54.00	-9.95	Horizontal
15600.29	37.17	21.83	17.66	34.46	42.20	54.00	-11.80	Horizontal

802.11a(HT20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.29	50.06	16.29	14.62	32.65	48.32	68.20	-19.88	Vertical
15720.17	48.10	21.83	17.66	34.46	53.13	74.00	-20.87	Vertical
10480.15	49.34	16.29	14.62	32.65	47.60	68.20	-20.60	Horizontal
15720.04	48.43	21.83	17.66	34.46	53.46	74.00	-20.54	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.17	45.90	16.29	14.62	32.65	44.16	54.00	-9.84	Vertical
15720.25	37.66	21.83	17.66	34.46	42.69	54.00	-11.31	Vertical
10480.09	44.91	16.29	14.62	32.65	43.17	54.00	-10.83	Horizontal
15720.16	37.28	21.83	17.66	34.46	42.31	54.00	-11.69	Horizontal

802.11n(HT20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.25	51.36	16.29	14.62	32.65	49.62	68.20	-18.58	Vertical
15540.14	48.65	21.83	17.66	34.46	53.68	74.00	-20.32	Vertical
10360.03	46.34	16.29	14.62	32.65	44.60	68.20	-23.60	Horizontal
15540.13	48.08	21.83	17.66	34.46	53.11	74.00	-20.89	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.13	47.06	16.29	14.62	32.65	45.32	54.00	-8.68	Vertical
15540.09	36.08	21.83	17.66	34.46	41.11	54.00	-12.89	Vertical
10360.21	45.30	16.29	14.62	32.65	43.56	54.00	-10.44	Horizontal
15540.26	37.23	21.83	17.66	34.46	42.26	54.00	-11.74	Horizontal

802.11n(HT20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.13	52.18	16.29	14.62	32.65	50.44	68.20	-17.76	Vertical
15600.01	48.10	21.83	17.66	34.46	53.13	74.00	-20.87	Vertical
10400.08	46.30	16.29	14.62	32.65	44.56	68.20	-23.64	Horizontal
15600.29	48.68	21.83	17.66	34.46	53.71	74.00	-20.29	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.19	46.31	16.29	14.62	32.65	44.57	54.00	-9.43	Vertical
15600.22	38.23	21.83	17.66	34.46	43.26	54.00	-10.74	Vertical
10400.27	44.85	16.29	14.62	32.65	43.11	54.00	-10.89	Horizontal
15600.12	36.77	21.83	17.66	34.46	41.80	54.00	-12.20	Horizontal

802.11n(HT20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.20	53.58	16.29	14.62	32.65	51.84	68.20	-16.36	Vertical
15720.09	48.09	21.83	17.66	34.46	53.12	74.00	-20.88	Vertical
10480.19	47.63	16.29	14.62	32.65	45.89	68.20	-22.31	Horizontal
15720.19	48.19	21.83	17.66	34.46	53.22	74.00	-20.78	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.29	47.36	16.29	14.62	32.65	45.62	54.00	-8.38	Vertical
15720.09	36.41	21.83	17.66	34.46	41.44	54.00	-12.56	Vertical
10480.25	43.01	16.29	14.62	32.65	41.27	54.00	-12.73	Horizontal
15720.11	38.03	21.83	17.66	34.46	43.06	54.00	-10.94	Horizontal

802.11ac(VHT20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.23	50.77	16.29	14.62	32.65	49.03	68.20	-19.17	Vertical
15540.19	47.37	21.83	17.66	34.46	52.40	74.00	-21.60	Vertical
10360.01	47.65	16.29	14.62	32.65	45.91	68.20	-22.29	Horizontal
15540.22	48.18	21.83	17.66	34.46	53.21	74.00	-20.79	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.32	46.82	16.29	14.62	32.65	45.08	54.00	-8.92	Vertical
15540.17	39.84	21.83	17.66	34.46	44.87	54.00	-9.13	Vertical
10360.32	45.06	16.29	14.62	32.65	43.32	54.00	-10.68	Horizontal
15540.32	39.90	21.83	17.66	34.46	44.93	54.00	-9.07	Horizontal

802.11ac(VHT20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.25	52.43	16.29	14.62	32.65	50.69	68.20	-17.51	Vertical
15600.17	48.08	21.83	17.66	34.46	53.11	74.00	-20.89	Vertical
10400.19	48.73	16.29	14.62	32.65	46.99	68.20	-21.21	Horizontal
15600.20	45.00	21.83	17.66	34.46	50.03	74.00	-23.97	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.02	45.32	16.29	14.62	32.65	43.58	54.00	-10.42	Vertical
15600.30	38.68	21.83	17.66	34.46	43.71	54.00	-10.29	Vertical
10400.03	43.27	16.29	14.62	32.65	41.53	54.00	-12.47	Horizontal
15600.05	39.13	21.83	17.66	34.46	44.16	54.00	-9.84	Horizontal

802.11ac(VHT20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.27	50.30	16.29	14.62	32.65	48.56	68.20	-19.64	Vertical
15720.04	50.14	21.83	17.66	34.46	55.17	74.00	-18.83	Vertical
10480.19	47.15	16.29	14.62	32.65	45.41	68.20	-22.79	Horizontal
15720.26	48.10	21.83	17.66	34.46	53.13	74.00	-20.87	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.09	44.74	16.29	14.62	32.65	43.00	54.00	-11.00	Vertical
15720.21	37.31	21.83	17.66	34.46	42.34	54.00	-11.66	Vertical
10480.14	43.64	16.29	14.62	32.65	41.90	54.00	-12.10	Horizontal
15720.28	39.19	21.83	17.66	34.46	44.22	54.00	-9.78	Horizontal

802.11ax(HE20) 5180MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.25	53.43	16.29	14.62	32.65	51.69	68.20	-16.51	Vertical
15540.16	50.02	21.83	17.66	34.46	55.05	74.00	-18.95	Vertical
10360.24	49.01	16.29	14.62	32.65	47.27	68.20	-20.93	Horizontal
15540.09	46.94	21.83	17.66	34.46	51.97	74.00	-22.03	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.23	46.11	16.29	14.62	32.65	44.37	54.00	-9.63	Vertical
15540.10	38.23	21.83	17.66	34.46	43.26	54.00	-10.74	Vertical
10360.05	44.59	16.29	14.62	32.65	42.85	54.00	-11.15	Horizontal
15540.11	38.10	21.83	17.66	34.46	43.13	54.00	-10.87	Horizontal

802.11ax(HE20) 5200MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.16	53.10	16.29	14.62	32.65	51.36	68.20	-16.84	Vertical
15600.21	47.67	21.83	17.66	34.46	52.70	74.00	-21.30	Vertical
10400.28	48.88	16.29	14.62	32.65	47.14	68.20	-21.06	Horizontal
15600.18	46.08	21.83	17.66	34.46	51.11	74.00	-22.89	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400.23	45.26	16.29	14.62	32.65	43.52	54.00	-10.48	Vertical
15600.03	36.50	21.83	17.66	34.46	41.53	54.00	-12.47	Vertical
10400.19	44.01	16.29	14.62	32.65	42.27	54.00	-11.73	Horizontal
15600.07	38.40	21.83	17.66	34.46	43.43	54.00	-10.57	Horizontal

802.11ax(HE20) 5240MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.30	50.17	16.29	14.62	32.65	48.43	68.20	-19.77	Vertical
15720.16	50.91	21.83	17.66	34.46	55.94	74.00	-18.06	Vertical
10480.22	48.98	16.29	14.62	32.65	47.24	68.20	-20.96	Horizontal
15720.22	48.33	21.83	17.66	34.46	53.36	74.00	-20.64	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480.11	44.40	16.29	14.62	32.65	42.66	54.00	-11.34	Vertical
15720.27	37.56	21.83	17.66	34.46	42.59	54.00	-11.41	Vertical
10480.25	44.80	16.29	14.62	32.65	43.06	54.00	-10.94	Horizontal
15720.06	37.23	21.83	17.66	34.46	42.26	54.00	-11.74	Horizontal

802.11n(HT40) 5190MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.08	52.18	16.29	14.62	32.65	50.44	68.20	-17.76	Vertical
15570.09	47.39	21.83	17.66	34.46	52.42	74.00	-21.58	Vertical
10380.30	49.06	16.29	14.62	32.65	47.32	68.20	-20.88	Horizontal
15570.26	48.42	21.83	17.66	34.46	53.45	74.00	-20.55	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.07	45.33	16.29	14.62	32.65	43.59	54.00	-10.41	Vertical
15570.10	36.80	21.83	17.66	34.46	41.83	54.00	-12.17	Vertical
10380.21	42.31	16.29	14.62	32.65	40.57	54.00	-13.43	Horizontal
15570.27	39.29	21.83	17.66	34.46	44.32	54.00	-9.68	Horizontal

802.11n(HT40) 5230MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.29	50.31	16.29	14.62	32.65	48.57	68.20	-19.63	Vertical
15690.21	50.66	21.83	17.66	34.46	55.69	74.00	-18.31	Vertical
10460.13	48.42	16.29	14.62	32.65	46.68	68.20	-21.52	Horizontal
15690.00	45.16	21.83	17.66	34.46	50.19	74.00	-23.81	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.21	45.56	16.29	14.62	32.65	43.82	54.00	-10.18	Vertical
15690.24	38.38	21.83	17.66	34.46	43.41	54.00	-10.59	Vertical
10460.09	45.77	16.29	14.62	32.65	44.03	54.00	-9.97	Horizontal
15690.24	38.85	21.83	17.66	34.46	43.88	54.00	-10.12	Horizontal

802.11ac(VHT40) 5190MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.30	52.48	16.29	14.62	32.65	50.74	68.20	-17.46	Vertical
15570.02	50.88	21.83	17.66	34.46	55.91	74.00	-18.09	Vertical
10380.07	48.89	16.29	14.62	32.65	47.15	68.20	-21.05	Horizontal
15570.31	48.44	21.83	17.66	34.46	53.47	74.00	-20.53	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.29	45.43	16.29	14.62	32.65	43.69	54.00	-10.31	Vertical
15570.32	36.86	21.83	17.66	34.46	41.89	54.00	-12.11	Vertical
10380.31	43.74	16.29	14.62	32.65	42.00	54.00	-12.00	Horizontal
15570.07	39.60	21.83	17.66	34.46	44.63	54.00	-9.37	Horizontal

802.11ac(VHT40) 5230MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.07	53.30	16.29	14.62	32.65	51.56	68.20	-16.64	Vertical
15690.27	48.30	21.83	17.66	34.46	53.33	74.00	-20.67	Vertical
10460.29	48.11	16.29	14.62	32.65	46.37	68.20	-21.83	Horizontal
15690.16	47.98	21.83	17.66	34.46	53.01	74.00	-20.99	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.32	46.91	16.29	14.62	32.65	45.17	54.00	-8.83	Vertical
15690.05	39.29	21.83	17.66	34.46	44.32	54.00	-9.68	Vertical
10460.06	44.92	16.29	14.62	32.65	43.18	54.00	-10.82	Horizontal
15690.25	38.45	21.83	17.66	34.46	43.48	54.00	-10.52	Horizontal

802.11ax(HE40) 5190MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.20	53.15	16.29	14.62	32.65	51.41	68.20	-16.79	Vertical
15570.12	49.94	21.83	17.66	34.46	54.97	74.00	-19.03	Vertical
10380.11	49.58	16.29	14.62	32.65	47.84	68.20	-20.36	Horizontal
15570.23	47.84	21.83	17.66	34.46	52.87	74.00	-21.13	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380.25	46.59	16.29	14.62	32.65	44.85	54.00	-9.15	Vertical
15570.05	36.34	21.83	17.66	34.46	41.37	54.00	-12.63	Vertical
10380.31	42.85	16.29	14.62	32.65	41.11	54.00	-12.89	Horizontal
15570.31	38.63	21.83	17.66	34.46	43.66	54.00	-10.34	Horizontal

802.11ax(HE40) 5230MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.09	50.85	16.29	14.62	32.65	49.11	68.20	-19.09	Vertical
15690.26	50.60	21.83	17.66	34.46	55.63	74.00	-18.37	Vertical
10460.13	47.95	16.29	14.62	32.65	46.21	68.20	-21.99	Horizontal
15690.30	47.68	21.83	17.66	34.46	52.71	74.00	-21.29	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460.05	44.35	16.29	14.62	32.65	42.61	54.00	-11.39	Vertical
15690.27	39.45	21.83	17.66	34.46	44.48	54.00	-9.52	Vertical
10460.22	43.28	16.29	14.62	32.65	41.54	54.00	-12.46	Horizontal
15690.23	37.34	21.83	17.66	34.46	42.37	54.00	-11.63	Horizontal

U-NII-2A:

802.11a (HT20) 5260MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.11	52.11	16.29	14.62	32.65	50.37	68.20	-17.83	Vertical
15780.20	47.08	21.83	17.66	34.46	52.11	74.00	-21.89	Vertical
10520.24	50.38	16.29	14.62	32.65	48.64	68.20	-19.56	Horizontal
15780.26	45.30	21.83	17.66	34.46	50.33	74.00	-23.67	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.04	46.47	16.29	14.62	32.65	44.73	54.00	-9.27	Vertical
15780.07	38.34	21.83	17.66	34.46	43.37	54.00	-10.63	Vertical
10520.04	42.64	16.29	14.62	32.65	40.90	54.00	-13.10	Horizontal
15780.20	37.30	21.83	17.66	34.46	42.33	54.00	-11.67	Horizontal

802.11a (HT20) 5280MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.16	50.88	16.29	14.62	32.65	49.14	68.20	-19.06	Vertical
15840.25	49.86	21.83	17.66	34.46	54.89	74.00	-19.11	Vertical
10560.10	47.64	16.29	14.62	32.65	45.90	68.20	-22.30	Horizontal
15840.14	47.10	21.83	17.66	34.46	52.13	74.00	-21.87	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.20	47.87	16.29	14.62	32.65	46.13	54.00	-7.87	Vertical
15840.02	37.13	21.83	17.66	34.46	42.16	54.00	-11.84	Vertical
10560.01	45.53	16.29	14.62	32.65	43.79	54.00	-10.21	Horizontal
15840.25	37.54	21.83	17.66	34.46	42.57	54.00	-11.43	Horizontal

802.11a(HT20) 5320MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.24	52.89	16.29	14.62	32.65	51.15	74.00	-22.85	Vertical
15960.03	46.76	21.83	17.66	34.46	51.79	74.00	-22.21	Vertical
10640.03	55.08	16.29	14.62	32.65	53.34	74.00	-20.66	Horizontal
15960.11	45.97	21.83	17.66	34.46	51.00	74.00	-23.00	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.12	42.62	16.29	14.62	32.65	40.88	54.00	-13.12	Vertical
15960.27	37.22	21.83	17.66	34.46	42.25	54.00	-11.75	Vertical
10640.11	44.81	16.29	14.62	32.65	43.07	54.00	-10.93	Horizontal
15960.20	40.53	21.83	17.66	34.46	45.56	54.00	-8.44	Horizontal

802.11n(HT20) 5260MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.17	50.24	16.29	14.62	32.65	48.50	68.20	-19.70	Vertical
15780.15	46.98	21.83	17.66	34.46	52.01	74.00	-21.99	Vertical
10520.23	50.75	16.29	14.62	32.65	49.01	68.20	-19.19	Horizontal
15780.28	48.01	21.83	17.66	34.46	53.04	74.00	-20.96	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.09	44.71	16.29	14.62	32.65	42.97	54.00	-11.03	Vertical
15780.08	40.12	21.83	17.66	34.46	45.15	54.00	-8.85	Vertical
10520.09	47.65	16.29	14.62	32.65	45.91	54.00	-8.09	Horizontal
15780.28	40.30	21.83	17.66	34.46	45.33	54.00	-8.67	Horizontal

802.11n(HT20) 5280MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.18	48.08	16.29	14.62	32.65	46.34	68.20	-21.86	Vertical
15840.08	47.19	21.83	17.66	34.46	52.22	74.00	-21.78	Vertical
10560.30	52.69	16.29	14.62	32.65	50.95	68.20	-17.25	Horizontal
15840.28	46.36	21.83	17.66	34.46	51.39	74.00	-22.61	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.04	46.23	16.29	14.62	32.65	44.49	54.00	-9.51	Vertical
15840.18	39.69	21.83	17.66	34.46	44.72	54.00	-9.28	Vertical
10560.25	46.59	16.29	14.62	32.65	44.85	54.00	-9.15	Horizontal
15840.23	37.75	21.83	17.66	34.46	42.78	54.00	-11.22	Horizontal

802.11n(HT20) 5320MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.17	49.68	16.29	14.62	32.65	47.94	74.00	-26.06	Vertical
15960.06	48.50	21.83	17.66	34.46	53.53	74.00	-20.47	Vertical
10640.15	54.47	16.29	14.62	32.65	52.73	74.00	-21.27	Horizontal
15960.25	47.62	21.83	17.66	34.46	52.65	74.00	-21.35	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.09	43.39	16.29	14.62	32.65	41.65	54.00	-12.35	Vertical
15960.16	37.13	21.83	17.66	34.46	42.16	54.00	-11.84	Vertical
10640.07	42.50	16.29	14.62	32.65	40.76	54.00	-13.24	Horizontal
15960.26	38.13	21.83	17.66	34.46	43.16	54.00	-10.84	Horizontal

802.11ac(VHT20) 5260MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.19	49.56	16.29	14.62	32.65	47.82	68.20	-20.38	Vertical
15780.00	47.84	21.83	17.66	34.46	52.87	74.00	-21.13	Vertical
10520.30	53.51	16.29	14.62	32.65	51.77	68.20	-16.43	Horizontal
15780.23	45.68	21.83	17.66	34.46	50.71	74.00	-23.29	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.08	42.79	16.29	14.62	32.65	41.05	54.00	-12.95	Vertical
15780.02	39.94	21.83	17.66	34.46	44.97	54.00	-9.03	Vertical
10520.07	46.89	16.29	14.62	32.65	45.15	54.00	-8.85	Horizontal
15780.25	39.89	21.83	17.66	34.46	44.92	54.00	-9.08	Horizontal

802.11ac(VHT20) 5280MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.11	48.40	16.29	14.62	32.65	46.66	68.20	-21.54	Vertical
15840.30	45.83	21.83	17.66	34.46	50.86	74.00	-23.14	Vertical
10560.06	53.12	16.29	14.62	32.65	51.38	68.20	-16.82	Horizontal
15840.12	45.82	21.83	17.66	34.46	50.85	74.00	-23.15	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.18	42.52	16.29	14.62	32.65	40.78	54.00	-13.22	Vertical
15840.19	39.59	21.83	17.66	34.46	44.62	54.00	-9.38	Vertical
10560.25	47.58	16.29	14.62	32.65	45.84	54.00	-8.16	Horizontal
15840.14	37.41	21.83	17.66	34.46	42.44	54.00	-11.56	Horizontal

802.11ac(VHT20) 5320MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.32	49.66	16.29	14.62	32.65	47.92	74.00	-26.08	Vertical
15960.04	45.99	21.83	17.66	34.46	51.02	74.00	-22.98	Vertical
10640.08	55.84	16.29	14.62	32.65	54.10	74.00	-19.90	Horizontal
15960.29	45.85	21.83	17.66	34.46	50.88	74.00	-23.12	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.10	44.30	16.29	14.62	32.65	42.56	54.00	-11.44	Vertical
15960.14	38.63	21.83	17.66	34.46	43.66	54.00	-10.34	Vertical
10640.28	44.01	16.29	14.62	32.65	42.27	54.00	-11.73	Horizontal
15960.19	39.70	21.83	17.66	34.46	44.73	54.00	-9.27	Horizontal

802.11ax(HE20) 5260MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.06	50.66	16.29	14.62	32.65	48.92	68.20	-19.28	Vertical
15780.17	48.52	21.83	17.66	34.46	53.55	74.00	-20.45	Vertical
10520.10	52.28	16.29	14.62	32.65	50.54	68.20	-17.66	Horizontal
15780.12	48.68	21.83	17.66	34.46	53.71	74.00	-20.29	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10520.10	45.65	16.29	14.62	32.65	43.91	54.00	-10.09	Vertical
15780.17	37.85	21.83	17.66	34.46	42.88	54.00	-11.12	Vertical
10520.15	43.72	16.29	14.62	32.65	41.98	54.00	-12.02	Horizontal
15780.24	39.01	21.83	17.66	34.46	44.04	54.00	-9.96	Horizontal

802.11ax(HE20) 5280MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.13	47.43	16.29	14.62	32.65	45.69	68.20	-22.51	Vertical
15840.18	47.50	21.83	17.66	34.46	52.53	74.00	-21.47	Vertical
10560.24	53.85	16.29	14.62	32.65	52.11	68.20	-16.09	Horizontal
15840.29	46.45	21.83	17.66	34.46	51.48	74.00	-22.52	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10560.02	44.80	16.29	14.62	32.65	43.06	54.00	-10.94	Vertical
15840.22	37.30	21.83	17.66	34.46	42.33	54.00	-11.67	Vertical
10560.18	45.07	16.29	14.62	32.65	43.33	54.00	-10.67	Horizontal
15840.08	39.17	21.83	17.66	34.46	44.20	54.00	-9.80	Horizontal

802.11ax(HE20) 5320MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.17	51.08	16.29	14.62	32.65	49.34	74.00	-24.66	Vertical
15960.26	45.07	21.83	17.66	34.46	50.10	74.00	-23.90	Vertical
10640.23	54.81	16.29	14.62	32.65	53.07	74.00	-20.93	Horizontal
15960.20	45.12	21.83	17.66	34.46	50.15	74.00	-23.85	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10640.24	44.14	16.29	14.62	32.65	42.40	54.00	-11.60	Vertical
15960.04	39.78	21.83	17.66	34.46	44.81	54.00	-9.19	Vertical
10640.26	45.09	16.29	14.62	32.65	43.35	54.00	-10.65	Horizontal
15960.14	37.85	21.83	17.66	34.46	42.88	54.00	-11.12	Horizontal

802.11n(HT40) 5270MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.29	50.69	16.29	14.62	32.65	48.95	68.20	-19.25	Vertical
15810.16	47.08	21.83	17.66	34.46	52.11	74.00	-21.89	Vertical
10540.07	54.08	16.29	14.62	32.65	52.34	68.20	-15.86	Horizontal
15810.20	47.92	21.83	17.66	34.46	52.95	74.00	-21.05	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.01	46.12	16.29	14.62	32.65	44.38	54.00	-9.62	Vertical
15810.05	38.34	21.83	17.66	34.46	43.37	54.00	-10.63	Vertical
10540.05	47.21	16.29	14.62	32.65	45.47	54.00	-8.53	Horizontal
15810.32	36.84	21.83	17.66	34.46	41.87	54.00	-12.13	Horizontal

802.11n(HT40) 5310MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.24	50.82	16.29	14.62	32.65	49.08	74.00	-24.92	Vertical
15930.04	45.57	21.83	17.66	34.46	50.60	74.00	-23.40	Vertical
10620.22	54.13	16.29	14.62	32.65	52.39	74.00	-21.61	Horizontal
15930.14	47.87	21.83	17.66	34.46	52.90	74.00	-21.10	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.00	43.61	16.29	14.62	32.65	41.87	54.00	-12.13	Vertical
15930.00	39.28	21.83	17.66	34.46	44.31	54.00	-9.69	Vertical
10620.22	42.24	16.29	14.62	32.65	40.50	54.00	-13.50	Horizontal
15930.21	38.83	21.83	17.66	34.46	43.86	54.00	-10.14	Horizontal

802.11ac(VHT40) 5270MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.31	47.81	16.29	14.62	32.65	46.07	68.20	-22.13	Vertical
15810.27	45.87	21.83	17.66	34.46	50.90	74.00	-23.10	Vertical
10540.31	53.53	16.29	14.62	32.65	51.79	68.20	-16.41	Horizontal
15810.05	45.35	21.83	17.66	34.46	50.38	74.00	-23.62	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.30	43.21	16.29	14.62	32.65	41.47	54.00	-12.53	Vertical
15810.02	38.24	21.83	17.66	34.46	43.27	54.00	-10.73	Vertical
10540.18	46.47	16.29	14.62	32.65	44.73	54.00	-9.27	Horizontal
15810.12	38.76	21.83	17.66	34.46	43.79	54.00	-10.21	Horizontal

802.11ac(VHT40) 5310MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.20	52.76	16.29	14.62	32.65	51.02	74.00	-22.98	Vertical
15930.21	48.23	21.83	17.66	34.46	53.26	74.00	-20.74	Vertical
10620.25	53.17	16.29	14.62	32.65	51.43	74.00	-22.57	Horizontal
15930.31	46.69	21.83	17.66	34.46	51.72	74.00	-22.28	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.04	43.70	16.29	14.62	32.65	41.96	54.00	-12.04	Vertical
15930.29	39.11	21.83	17.66	34.46	44.14	54.00	-9.86	Vertical
10620.30	43.57	16.29	14.62	32.65	41.83	54.00	-12.17	Horizontal
15930.24	38.40	21.83	17.66	34.46	43.43	54.00	-10.57	Horizontal

802.11ax(HE40) 5270MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.28	48.81	16.29	14.62	32.65	47.07	68.20	-21.13	Vertical
15810.08	47.65	21.83	17.66	34.46	52.68	74.00	-21.32	Vertical
10540.18	53.06	16.29	14.62	32.65	51.32	68.20	-16.88	Horizontal
15810.29	45.67	21.83	17.66	34.46	50.70	74.00	-23.30	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10540.29	46.27	16.29	14.62	32.65	44.53	54.00	-9.47	Vertical
15810.31	39.55	21.83	17.66	34.46	44.58	54.00	-9.42	Vertical
10540.09	47.38	16.29	14.62	32.65	45.64	54.00	-8.36	Horizontal
15810.21	39.97	21.83	17.66	34.46	45.00	54.00	-9.00	Horizontal

802.11ax(HE40) 5310MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.09	51.95	16.29	14.62	32.65	50.21	74.00	-23.79	Vertical
15930.03	47.01	21.83	17.66	34.46	52.04	74.00	-21.96	Vertical
10620.16	54.65	16.29	14.62	32.65	52.91	74.00	-21.09	Horizontal
15930.23	45.70	21.83	17.66	34.46	50.73	74.00	-23.27	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10620.18	45.04	16.29	14.62	32.65	43.30	54.00	-10.70	Vertical
15930.04	37.31	21.83	17.66	34.46	42.34	54.00	-11.66	Vertical
10620.29	43.18	16.29	14.62	32.65	41.44	54.00	-12.56	Horizontal
15930.21	37.31	21.83	17.66	34.46	42.34	54.00	-11.66	Horizontal

U-NII 2C:

802.11a(HT20) 5500MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.20	53.49	16.29	14.62	32.65	51.75	74.00	-22.25	Vertical
16500.15	41.60	21.83	17.66	34.46	46.63	68.20	-21.57	Vertical
11000.17	52.48	16.29	14.62	32.65	50.74	74.00	-23.26	Horizontal
16500.06	42.59	21.83	17.66	34.46	47.62	68.20	-20.58	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.22	44.22	16.29	14.62	32.65	42.48	54.00	-11.52	Vertical
16500.15	40.37	21.83	17.66	34.46	45.40	54.00	-8.60	Vertical
11000.25	45.64	16.29	14.62	32.65	43.90	54.00	-10.10	Horizontal
16500.20	36.77	21.83	17.66	34.46	41.80	54.00	-12.20	Horizontal

802.11a(HT20) 5580MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.02	54.42	16.29	14.62	32.65	52.68	74.00	-21.32	Vertical
16740.06	42.26	21.83	17.66	34.46	47.29	68.20	-20.91	Vertical
11160.04	55.74	16.29	14.62	32.65	54.00	74.00	-20.00	Horizontal
16740.06	44.71	21.83	17.66	34.46	49.74	68.20	-18.46	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.00	45.60	16.29	14.62	32.65	43.86	54.00	-10.14	Vertical
16740.24	37.45	21.83	17.66	34.46	42.48	54.00	-11.52	Vertical
11160.26	45.66	16.29	14.62	32.65	43.92	54.00	-10.08	Horizontal
16740.12	38.55	21.83	17.66	34.46	43.58	54.00	-10.42	Horizontal

802.11a(HT20) 5700MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.11	54.98	16.29	14.62	32.65	53.24	74.00	-20.76	Vertical
17100.29	44.42	21.83	17.66	34.46	49.45	68.20	-18.75	Vertical
11400.01	53.98	16.29	14.62	32.65	52.24	74.00	-21.76	Horizontal
17100.06	42.56	21.83	17.66	34.46	47.59	68.20	-20.61	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.11	42.74	16.29	14.62	32.65	41.00	54.00	-13.00	Vertical
17100.26	39.93	21.83	17.66	34.46	44.96	54.00	-9.04	Vertical
11400.20	43.95	16.29	14.62	32.65	42.21	54.00	-11.79	Horizontal
17100.02	40.03	21.83	17.66	34.46	45.06	54.00	-8.94	Horizontal

802.11n(HT20) 5500MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.29	55.85	16.29	14.62	32.65	54.11	74.00	-19.89	Vertical
16500.16	42.03	21.83	17.66	34.46	47.06	68.20	-21.14	Vertical
11000.10	54.95	16.29	14.62	32.65	53.21	74.00	-20.79	Horizontal
16500.07	44.34	21.83	17.66	34.46	49.37	68.20	-18.83	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.05	44.23	16.29	14.62	32.65	42.49	54.00	-11.51	Vertical
16500.07	37.18	21.83	17.66	34.46	42.21	54.00	-11.79	Vertical
11000.31	45.66	16.29	14.62	32.65	43.92	54.00	-10.08	Horizontal
16500.21	39.66	21.83	17.66	34.46	44.69	54.00	-9.31	Horizontal

802.11n(HT20) 5580MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.09	55.27	16.29	14.62	32.65	53.53	74.00	-20.47	Vertical
16740.04	40.81	21.83	17.66	34.46	45.84	68.20	-22.36	Vertical
11160.01	55.93	16.29	14.62	32.65	54.19	74.00	-19.81	Horizontal
16740.29	44.11	21.83	17.66	34.46	49.14	68.20	-19.06	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.30	45.87	16.29	14.62	32.65	44.13	54.00	-9.87	Vertical
16740.23	38.08	21.83	17.66	34.46	43.11	54.00	-10.89	Vertical
11160.06	46.91	16.29	14.62	32.65	45.17	54.00	-8.83	Horizontal
16740.10	39.13	21.83	17.66	34.46	44.16	54.00	-9.84	Horizontal

802.11n(HT20) 5700MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.00	54.02	16.29	14.62	32.65	52.28	74.00	-21.72	Vertical
17100.29	43.05	21.83	17.66	34.46	48.08	68.20	-20.12	Vertical
11400.16	53.56	16.29	14.62	32.65	51.82	74.00	-22.18	Horizontal
17100.02	43.56	21.83	17.66	34.46	48.59	68.20	-19.61	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.31	45.62	16.29	14.62	32.65	43.88	54.00	-10.12	Vertical
17100.02	39.97	21.83	17.66	34.46	45.00	54.00	-9.00	Vertical
11400.19	47.03	16.29	14.62	32.65	45.29	54.00	-8.71	Horizontal
17100.04	37.03	21.83	17.66	34.46	42.06	54.00	-11.94	Horizontal

802.11ac(VHT20) 5500MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.18	54.50	16.29	14.62	32.65	52.76	74.00	-21.24	Vertical
16500.09	42.36	21.83	17.66	34.46	47.39	68.20	-20.81	Vertical
11000.22	55.95	16.29	14.62	32.65	54.21	74.00	-19.79	Horizontal
16500.05	42.61	21.83	17.66	34.46	47.64	68.20	-20.56	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.28	43.31	16.29	14.62	32.65	41.57	54.00	-12.43	Vertical
16500.24	37.72	21.83	17.66	34.46	42.75	54.00	-11.25	Vertical
11000.04	46.00	16.29	14.62	32.65	44.26	54.00	-9.74	Horizontal
16500.02	39.62	21.83	17.66	34.46	44.65	54.00	-9.35	Horizontal

802.11ac(VHT20) 5580MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.27	52.35	16.29	14.62	32.65	50.61	74.00	-23.39	Vertical
16740.31	43.97	21.83	17.66	34.46	49.00	68.20	-19.20	Vertical
11160.14	52.36	16.29	14.62	32.65	50.62	74.00	-23.38	Horizontal
16740.15	42.95	21.83	17.66	34.46	47.98	68.20	-20.22	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.23	45.55	16.29	14.62	32.65	43.81	54.00	-10.19	Vertical
16740.27	40.76	21.83	17.66	34.46	45.79	54.00	-8.21	Vertical
11160.07	45.00	16.29	14.62	32.65	43.26	54.00	-10.74	Horizontal
16740.21	38.49	21.83	17.66	34.46	43.52	54.00	-10.48	Horizontal

802.11ac(VHT20) 5700MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.26	52.73	16.29	14.62	32.65	50.99	74.00	-23.01	Vertical
17100.08	42.89	21.83	17.66	34.46	47.92	68.20	-20.28	Vertical
11400.23	55.98	16.29	14.62	32.65	54.24	74.00	-19.76	Horizontal
17100.10	40.81	21.83	17.66	34.46	45.84	68.20	-22.36	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.01	45.37	16.29	14.62	32.65	43.63	54.00	-10.37	Vertical
17100.17	37.80	21.83	17.66	34.46	42.83	54.00	-11.17	Vertical
11400.15	46.37	16.29	14.62	32.65	44.63	54.00	-9.37	Horizontal
17100.11	37.68	21.83	17.66	34.46	42.71	54.00	-11.29	Horizontal

802.11ax(HE20) 5500MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.26	55.52	16.29	14.62	32.65	53.78	74.00	-20.22	Vertical
16500.27	41.52	21.83	17.66	34.46	46.55	68.20	-21.65	Vertical
11000.27	55.25	16.29	14.62	32.65	53.51	74.00	-20.49	Horizontal
16500.32	42.10	21.83	17.66	34.46	47.13	68.20	-21.07	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11000.09	45.15	16.29	14.62	32.65	43.41	54.00	-10.59	Vertical
16500.15	37.26	21.83	17.66	34.46	42.29	54.00	-11.71	Vertical
11000.05	46.49	16.29	14.62	32.65	44.75	54.00	-9.25	Horizontal
16500.14	37.65	21.83	17.66	34.46	42.68	54.00	-11.32	Horizontal

802.11ax(HE20) 5580MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.11	55.82	16.29	14.62	32.65	54.08	74.00	-19.92	Vertical
16740.12	41.47	21.83	17.66	34.46	46.50	68.20	-21.70	Vertical
11160.29	55.75	16.29	14.62	32.65	54.01	74.00	-19.99	Horizontal
16740.26	42.38	21.83	17.66	34.46	47.41	68.20	-20.79	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11160.20	44.88	16.29	14.62	32.65	43.14	54.00	-10.86	Vertical
16740.19	39.28	21.83	17.66	34.46	44.31	54.00	-9.69	Vertical
11160.25	46.36	16.29	14.62	32.65	44.62	54.00	-9.38	Horizontal
16740.26	36.94	21.83	17.66	34.46	41.97	54.00	-12.03	Horizontal

802.11ax(HE20) 5700MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.18	53.65	16.29	14.62	32.65	51.91	74.00	-22.09	Vertical
17100.09	41.59	21.83	17.66	34.46	46.62	68.20	-21.58	Vertical
11400.08	55.02	16.29	14.62	32.65	53.28	74.00	-20.72	Horizontal
17100.22	43.27	21.83	17.66	34.46	48.30	68.20	-19.90	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11400.24	45.04	16.29	14.62	32.65	43.30	54.00	-10.70	Vertical
17100.24	38.23	21.83	17.66	34.46	43.26	54.00	-10.74	Vertical
11400.19	44.39	16.29	14.62	32.65	42.65	54.00	-11.35	Horizontal
17100.25	37.58	21.83	17.66	34.46	42.61	54.00	-11.39	Horizontal

802.11n(HT40) 5510MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.16	55.92	16.29	14.62	32.65	54.18	74.00	-19.82	Vertical
16530.22	41.78	21.83	17.66	34.46	46.81	68.20	-21.39	Vertical
11020.25	53.04	16.29	14.62	32.65	51.30	74.00	-22.70	Horizontal
16530.18	42.41	21.83	17.66	34.46	47.44	68.20	-20.76	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.15	43.77	16.29	14.62	32.65	42.03	54.00	-11.97	Vertical
16530.30	39.92	21.83	17.66	34.46	44.95	54.00	-9.05	Vertical
11020.17	44.20	16.29	14.62	32.65	42.46	54.00	-11.54	Horizontal
16530.29	38.63	21.83	17.66	34.46	43.66	54.00	-10.34	Horizontal

802.11n(HT40) 5670MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.05	55.89	16.29	14.62	32.65	54.15	74.00	-19.85	Vertical
17010.26	43.73	21.83	17.66	34.46	48.76	68.20	-19.44	Vertical
11340.26	55.75	16.29	14.62	32.65	54.01	74.00	-19.99	Horizontal
17010.31	41.10	21.83	17.66	34.46	46.13	68.20	-22.07	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.32	42.89	16.29	14.62	32.65	41.15	54.00	-12.85	Vertical
17010.12	37.64	21.83	17.66	34.46	42.67	54.00	-11.33	Vertical
11340.12	45.32	16.29	14.62	32.65	43.58	54.00	-10.42	Horizontal
17010.20	38.50	21.83	17.66	34.46	43.53	54.00	-10.47	Horizontal

802.11ac(VHT40) 5510MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.27	55.98	16.29	14.62	32.65	54.24	74.00	-19.76	Vertical
16530.13	40.71	21.83	17.66	34.46	45.74	68.20	-22.46	Vertical
11020.25	54.11	16.29	14.62	32.65	52.37	74.00	-21.63	Horizontal
16530.20	43.72	21.83	17.66	34.46	48.75	68.20	-19.45	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.20	44.15	16.29	14.62	32.65	42.41	54.00	-11.59	Vertical
16530.27	37.40	21.83	17.66	34.46	42.43	54.00	-11.57	Vertical
11020.01	45.62	16.29	14.62	32.65	43.88	54.00	-10.12	Horizontal
16530.18	38.19	21.83	17.66	34.46	43.22	54.00	-10.78	Horizontal

802.11ac(VHT40) 5670MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.28	54.23	16.29	14.62	32.65	52.49	74.00	-21.51	Vertical
17010.31	43.42	21.83	17.66	34.46	48.45	68.20	-19.75	Vertical
11340.08	52.29	16.29	14.62	32.65	50.55	74.00	-23.45	Horizontal
17010.02	41.77	21.83	17.66	34.46	46.80	68.20	-21.40	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.08	44.70	16.29	14.62	32.65	42.96	54.00	-11.04	Vertical
17010.32	40.51	21.83	17.66	34.46	45.54	54.00	-8.46	Vertical
11340.08	45.26	16.29	14.62	32.65	43.52	54.00	-10.48	Horizontal
17010.22	40.25	21.83	17.66	34.46	45.28	54.00	-8.72	Horizontal

802.11ax(HE40) 5510MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.02	54.55	16.29	14.62	32.65	52.81	74.00	-21.19	Vertical
16530.23	41.02	21.83	17.66	34.46	46.05	68.20	-22.15	Vertical
11020.08	53.88	16.29	14.62	32.65	52.14	74.00	-21.86	Horizontal
16530.30	42.42	21.83	17.66	34.46	47.45	68.20	-20.75	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11020.19	44.36	16.29	14.62	32.65	42.62	54.00	-11.38	Vertical
16530.17	39.01	21.83	17.66	34.46	44.04	54.00	-9.96	Vertical
11020.13	47.40	16.29	14.62	32.65	45.66	54.00	-8.34	Horizontal
16530.10	39.20	21.83	17.66	34.46	44.23	54.00	-9.77	Horizontal

802.11ax(HE40) 5670MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.15	53.28	16.29	14.62	32.65	51.54	74.00	-22.46	Vertical
17010.18	41.26	21.83	17.66	34.46	46.29	68.20	-21.91	Vertical
11340.28	55.52	16.29	14.62	32.65	53.78	74.00	-20.22	Horizontal
17010.11	44.01	21.83	17.66	34.46	49.04	68.20	-19.16	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11340.15	44.42	16.29	14.62	32.65	42.68	54.00	-11.32	Vertical
17010.15	39.65	21.83	17.66	34.46	44.68	54.00	-9.32	Vertical
11340.20	45.67	16.29	14.62	32.65	43.93	54.00	-10.07	Horizontal
17010.11	36.59	21.83	17.66	34.46	41.62	54.00	-12.38	Horizontal

U-NII 3:

802.11a(HT20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.01	53.45	16.29	14.62	32.65	51.71	74.00	-22.29	Vertical
17235.03	44.14	21.83	17.66	34.46	49.17	68.20	-19.03	Vertical
11490.12	55.87	16.29	14.62	32.65	54.13	74.00	-19.87	Horizontal
17235.31	40.81	21.83	17.66	34.46	45.84	68.20	-22.36	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.17	43.42	16.29	14.62	32.65	41.68	54.00	-12.32	Vertical
17235.17	37.67	21.83	17.66	34.46	42.70	54.00	-11.30	Vertical
11490.13	46.86	16.29	14.62	32.65	45.12	54.00	-8.88	Horizontal
17235.30	38.77	21.83	17.66	34.46	43.80	54.00	-10.20	Horizontal

802.11a(HT20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.24	55.21	16.29	14.62	32.65	53.47	74.00	-20.53	Vertical
17355.22	41.22	21.83	17.66	34.46	46.25	68.20	-21.95	Vertical
11570.09	53.43	16.29	14.62	32.65	51.69	74.00	-22.31	Horizontal
17355.12	43.34	21.83	17.66	34.46	48.37	68.20	-19.83	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.30	45.70	16.29	14.62	32.65	43.96	54.00	-10.04	Vertical
17355.08	39.48	21.83	17.66	34.46	44.51	54.00	-9.49	Vertical
11570.16	45.73	16.29	14.62	32.65	43.99	54.00	-10.01	Horizontal
17355.11	39.30	21.83	17.66	34.46	44.33	54.00	-9.67	Horizontal

802.11a(HT20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.26	52.27	16.29	14.62	32.65	50.53	74.00	-23.47	Vertical
17475.12	41.15	21.83	17.66	34.46	46.18	68.20	-22.02	Vertical
11650.30	54.97	16.29	14.62	32.65	53.23	74.00	-20.77	Horizontal
17475.08	42.97	21.83	17.66	34.46	48.00	68.20	-20.20	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.09	45.14	16.29	14.62	32.65	43.40	54.00	-10.60	Vertical
17475.10	39.94	21.83	17.66	34.46	44.97	54.00	-9.03	Vertical
11650.08	43.70	16.29	14.62	32.65	41.96	54.00	-12.04	Horizontal
17475.19	38.48	21.83	17.66	34.46	43.51	54.00	-10.49	Horizontal

802.11n(HT20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.07	54.88	16.29	14.62	32.65	53.14	74.00	-20.86	Vertical
17235.29	43.56	21.83	17.66	34.46	48.59	68.20	-19.61	Vertical
11490.30	56.07	16.29	14.62	32.65	54.33	74.00	-19.67	Horizontal
17235.27	41.13	21.83	17.66	34.46	46.16	68.20	-22.04	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.26	42.30	16.29	14.62	32.65	40.56	54.00	-13.44	Vertical
17235.17	38.26	21.83	17.66	34.46	43.29	54.00	-10.71	Vertical
11490.19	45.63	16.29	14.62	32.65	43.89	54.00	-10.11	Horizontal
17235.19	36.63	21.83	17.66	34.46	41.66	54.00	-12.34	Horizontal

802.11n(HT20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.21	52.21	16.29	14.62	32.65	50.47	74.00	-23.53	Vertical
17355.20	41.36	21.83	17.66	34.46	46.39	68.20	-21.81	Vertical
11570.30	53.86	16.29	14.62	32.65	52.12	74.00	-21.88	Horizontal
17355.04	40.96	21.83	17.66	34.46	45.99	68.20	-22.21	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.14	43.24	16.29	14.62	32.65	41.50	54.00	-12.50	Vertical
17355.28	40.29	21.83	17.66	34.46	45.32	54.00	-8.68	Vertical
11570.30	47.00	16.29	14.62	32.65	45.26	54.00	-8.74	Horizontal
17355.00	37.75	21.83	17.66	34.46	42.78	54.00	-11.22	Horizontal

802.11n(HT20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.27	54.78	16.29	14.62	32.65	53.04	74.00	-20.96	Vertical
17475.31	43.82	21.83	17.66	34.46	48.85	68.20	-19.35	Vertical
11650.05	55.54	16.29	14.62	32.65	53.80	74.00	-20.20	Horizontal
17475.10	44.65	21.83	17.66	34.46	49.68	68.20	-18.52	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.17	42.79	16.29	14.62	32.65	41.05	54.00	-12.95	Vertical
17475.21	38.22	21.83	17.66	34.46	43.25	54.00	-10.75	Vertical
11650.05	46.06	16.29	14.62	32.65	44.32	54.00	-9.68	Horizontal
17475.18	36.66	21.83	17.66	34.46	41.69	54.00	-12.31	Horizontal

802.11ac(VHT20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.14	53.72	16.29	14.62	32.65	51.98	74.00	-22.02	Vertical
17235.03	41.88	21.83	17.66	34.46	46.91	68.20	-21.29	Vertical
11490.25	55.10	16.29	14.62	32.65	53.36	74.00	-20.64	Horizontal
17235.32	44.76	21.83	17.66	34.46	49.79	68.20	-18.41	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.25	43.14	16.29	14.62	32.65	41.40	54.00	-12.60	Vertical
17235.00	38.26	21.83	17.66	34.46	43.29	54.00	-10.71	Vertical
11490.20	46.21	16.29	14.62	32.65	44.47	54.00	-9.53	Horizontal
17235.29	39.61	21.83	17.66	34.46	44.64	54.00	-9.36	Horizontal

802.11ac(VHT20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.28	52.86	16.29	14.62	32.65	51.12	74.00	-22.88	Vertical
17355.05	44.36	21.83	17.66	34.46	49.39	68.20	-18.81	Vertical
11570.08	55.34	16.29	14.62	32.65	53.60	74.00	-20.40	Horizontal
17355.23	41.45	21.83	17.66	34.46	46.48	68.20	-21.72	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.20	43.92	16.29	14.62	32.65	42.18	54.00	-11.82	Vertical
17355.07	38.66	21.83	17.66	34.46	43.69	54.00	-10.31	Vertical
11570.04	43.93	16.29	14.62	32.65	42.19	54.00	-11.81	Horizontal
17355.09	40.03	21.83	17.66	34.46	45.06	54.00	-8.94	Horizontal

802.11ac(VHT20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.32	53.28	16.29	14.62	32.65	51.54	74.00	-22.46	Vertical
17475.01	40.77	21.83	17.66	34.46	45.80	68.20	-22.40	Vertical
11650.30	54.32	16.29	14.62	32.65	52.58	74.00	-21.42	Horizontal
17475.24	41.25	21.83	17.66	34.46	46.28	68.20	-21.92	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.21	43.03	16.29	14.62	32.65	41.29	54.00	-12.71	Vertical
17475.24	40.03	21.83	17.66	34.46	45.06	54.00	-8.94	Vertical
11650.02	43.88	16.29	14.62	32.65	42.14	54.00	-11.86	Horizontal
17475.13	38.51	21.83	17.66	34.46	43.54	54.00	-10.46	Horizontal

802.11ax(HE20) 5745MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.08	52.22	16.29	14.62	32.65	50.48	74.00	-23.52	Vertical
17235.06	44.46	21.83	17.66	34.46	49.49	68.20	-18.71	Vertical
11490.04	53.65	16.29	14.62	32.65	51.91	74.00	-22.09	Horizontal
17235.30	43.35	21.83	17.66	34.46	48.38	68.20	-19.82	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11490.08	43.87	16.29	14.62	32.65	42.13	54.00	-11.87	Vertical
17235.04	37.25	21.83	17.66	34.46	42.28	54.00	-11.72	Vertical
11490.05	47.36	16.29	14.62	32.65	45.62	54.00	-8.38	Horizontal
17235.02	37.47	21.83	17.66	34.46	42.50	54.00	-11.50	Horizontal

802.11ax(HE20) 5785MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.09	53.42	16.29	14.62	32.65	51.68	74.00	-22.32	Vertical
17355.20	44.07	21.83	17.66	34.46	49.10	68.20	-19.10	Vertical
11570.00	53.25	16.29	14.62	32.65	51.51	74.00	-22.49	Horizontal
17355.29	43.07	21.83	17.66	34.46	48.10	68.20	-20.10	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11570.06	42.79	16.29	14.62	32.65	41.05	54.00	-12.95	Vertical
17355.31	40.78	21.83	17.66	34.46	45.81	54.00	-8.19	Vertical
11570.18	45.62	16.29	14.62	32.65	43.88	54.00	-10.12	Horizontal
17355.06	40.36	21.83	17.66	34.46	45.39	54.00	-8.61	Horizontal

802.11ax(HE20) 5825MHz

Detector: PK

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.14	54.43	16.29	14.62	32.65	52.69	74.00	-21.31	Vertical
17475.01	44.33	21.83	17.66	34.46	49.36	68.20	-18.84	Vertical
11650.18	54.92	16.29	14.62	32.65	53.18	74.00	-20.82	Horizontal
17475.19	44.07	21.83	17.66	34.46	49.10	68.20	-19.10	Horizontal

Detector: AV

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
11650.08	45.49	16.29	14.62	32.65	43.75	54.00	-10.25	Vertical
17475.20	40.22	21.83	17.66	34.46	45.25	54.00	-8.75	Vertical
11650.17	43.81	16.29	14.62	32.65	42.07	54.00	-11.93	Horizontal
17475.19	37.44	21.83	17.66	34.46	42.47	54.00	-11.53	Horizontal