



REPORT No.: SZ25110265W01

TEST REPORT

APPLICANT : Zhejiang Yongtian Mechanical and
Electrical Manufactured Co., Ltd.

PRODUCT NAME : Wireless remote control

MODEL NAME : YT-RCC-A

BRAND NAME : Yongtian

FCC ID : 2BTQC-YT-RCC-A

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-11-24

TEST DATE : 2025-12-12 to 2026-01-12

ISSUE DATE : 2026-01-12



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Test Standards and Results	4
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna Requirement	6
2.2. The Max Transmission Time	7
2.3. 20 dB Bandwidth	9
2.4. Conducted Emission	11
2.5. Radiated Emission	13
2.6. Restricted Frequency Bands	26
Annex A Test Uncertainty	30
Annex B Testing Laboratory Information	31

Change History		
Version	Date	Reason for change
1.0	2026-01-12	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Zhejiang Yongtian Mechanical and Electrical Manufactured Co., Ltd.
Applicant Address:	No.28, Mingyuan North Road, Economic Development District, Yongkang, Zhejiang, 321300, P. R. China
Manufacturer:	Zhejiang Yongtian Mechanical and Electrical Manufactured Co., Ltd.
Manufacturer Address:	No.28, Mingyuan North Road, Economic Development District, Yongkang, Zhejiang, 321300, P. R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	Wireless remote control
Sample No.:	2#, 4#
Hardware Version:	2.01
Software Version:	ANT01.01.01
Operating Frequency:	433.92MHz
Channel Number:	1
Antenna Type:	Spring Antenna
Antenna Gain:	-11.9dBi

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	15.231(a)(1)	The Max Transmission Time	Dec. 25, 2025	Li Xinpeng	PASS	/
3	15.231(c)	20dB Bandwidth	Dec. 26, 2025	Li Xinpeng	PASS	/
4	15.207	Conducted Emission	N/A	N/A	N/A ^{Note1}	/
5	15.231(b) 15.209(a)	Radiated Emission	Dec. 30, 2025	Zhong Xiangyun	PASS	/
6	15.231(b) 15.205	Restricted Frequency Bands	Jan. 12, 2026	Zhong Xiangyun	PASS	/

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020.

Note 3: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".



1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15–35
Relative Humidity (%):	30–60
Atmospheric Pressure (kPa):	86–106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. The Max Transmission Time

2.2.1. Requirement

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

2.2.2. Test Description

Test Setup:

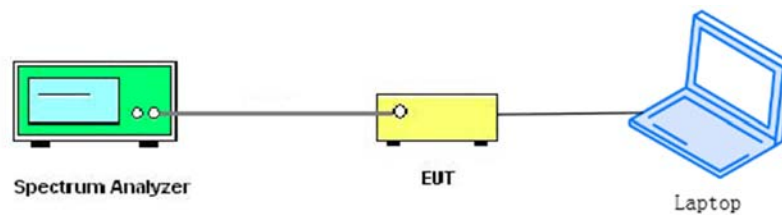

2.2.3. Test Procedure

Set the SPA Center Frequency = Fundamental frequency,
Span = 0 Hz, change the sweep time until get the burst in the screen.
Set EUT as normal operation and press Transmitter button.
Set the SPA View. Delta Mark time.



Frequency (MHz)	The max transmission time (s)	Limit (s)	Verdict
433.92	0.04	≤5	PASS

Agilent Spectrum Analyzer - Swept SA

0.1 T RF 50 Q AC SENSE:INT ALIGN OFF 04:39:07 PM Dec 25, 2025

Marker 1 40.0000 ms PNO: Fast → Trig: Free Run IF Gain: Low Atten: 30 dB Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6 TYPE P NNNNN DET P NNNNN

10 dB/div Ref 20.00 dBm

Log

10.0

0.00

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

Center 433.920000 MHz Res BW 3.0 MHz VBW 3.0 MHz Span 0 Hz Sweep 5.000 s (1001 pts)

MSG STATUS

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr→CF

Mkr→Ref Lvl

More

1 of 2

MORLAB

Tel: 86-755-36698555
Http://www.morlab.cn

Page 8 of 33

2.3. 20 dB Bandwidth


2.3.1. Requirement

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

As the center frequency for the device operating is 433.92 MHz, thus, the 20 dB bandwidth limit is 1085 kHz.

2.3.2. Test Description

Test Setup:

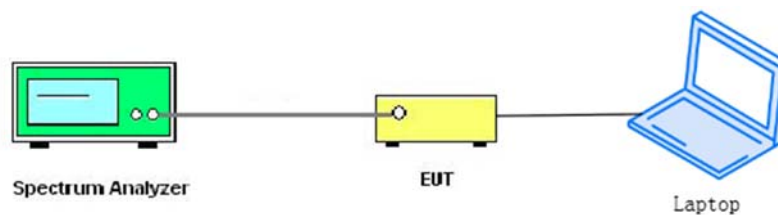

2.3.3. Test Procedure


Set spectrum analyzer's Center Frequency = Fundamental frequency, RBW, VBW and span to applicable value with Peak in max hold, a Peak output reading and 20 db Bandwidth function in spectrum analyzer were taken.



2.3.4. Test Result

Frequency (MHz)	20 dB Bandwidth (kHz)	Limits (MHz)	Verdict
433.92	186.60	≤ 1.085	PASS

Test Plot:

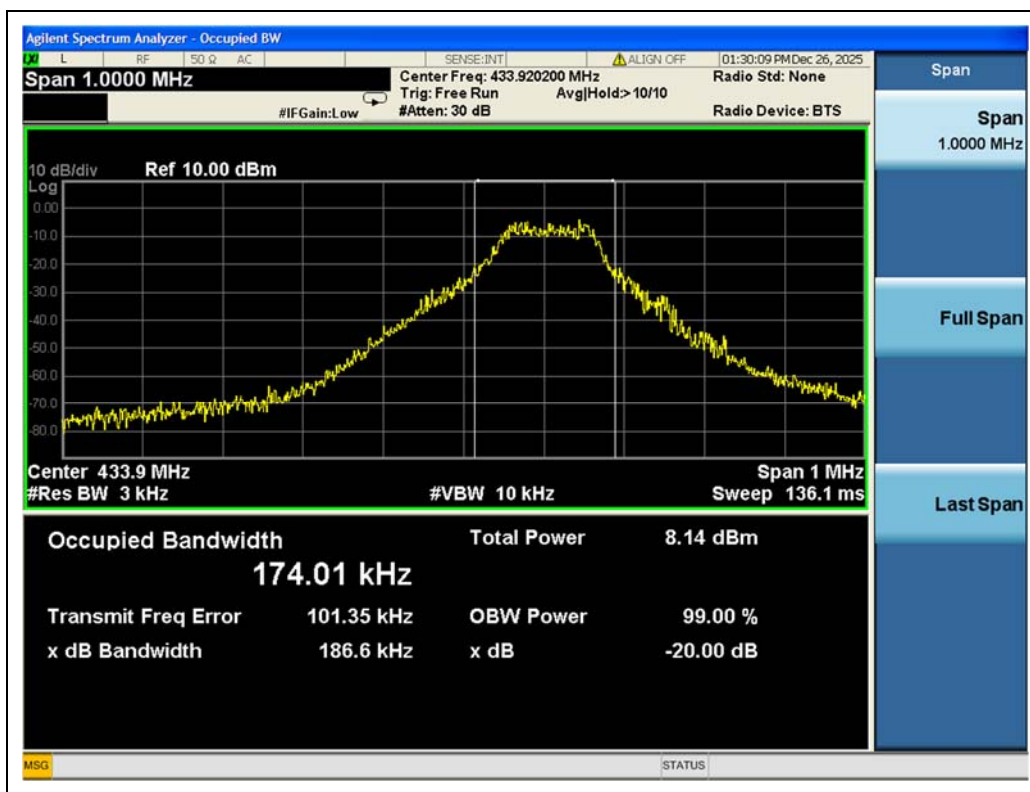

(Bandwidth)

2.4. Conducted Emission

2.4.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15–0.50	66 to 56	56 to 46
0.50–5	56	46
5–30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15–0.50 MHz.

2.4.2. Test Description

Test Setup:

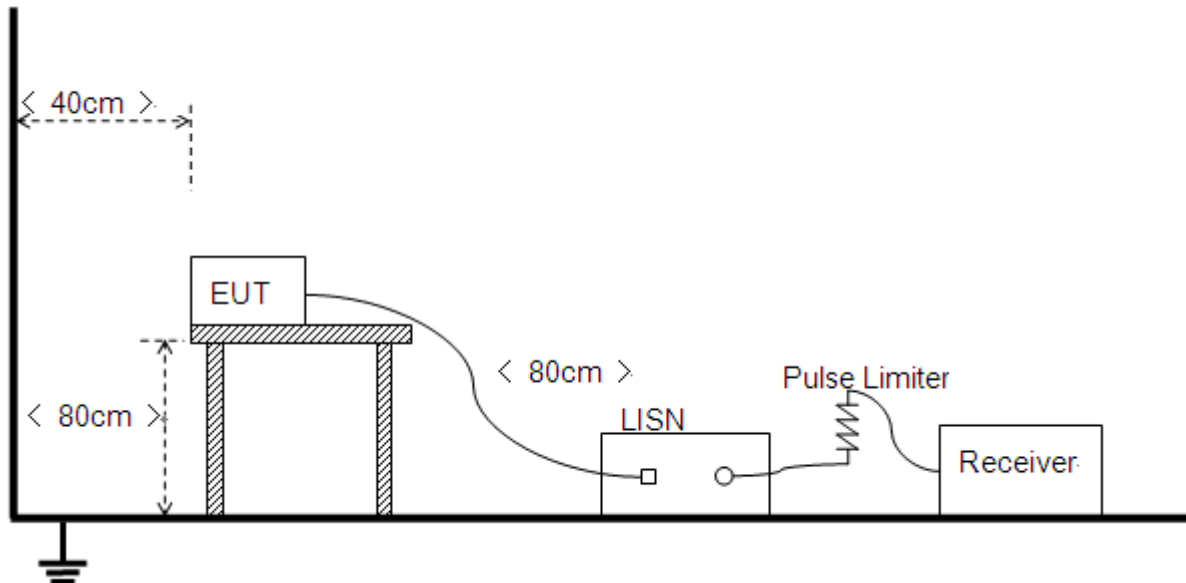

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80 cm from LISN. The set-up and test methods were according to ANSI C63.10.



REPORT No.: SZ25110265W01

2.4.3. Test Result

This test case does not apply this kind of EUT.

2.5. Radiated Emission

2.5.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009–0.490	2400/F (kHz)	300
0.490–1.705	24000/F (kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

FCC Part 15.231(b)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66–40.70	2250	225
70–130	1250	125
130–174	1250 to 3750	125 to 375
174–260	3750	375
260–470	3750 to 12500	375 to 1250
Above 470	12500	1250

Note 1: For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.


Note 2: For above 1000 MHz, limit field strength of harmonics: 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.5.2. Test Description

Test Setup:


- 1) For radiated emissions from 9 kHz to 30 MHz

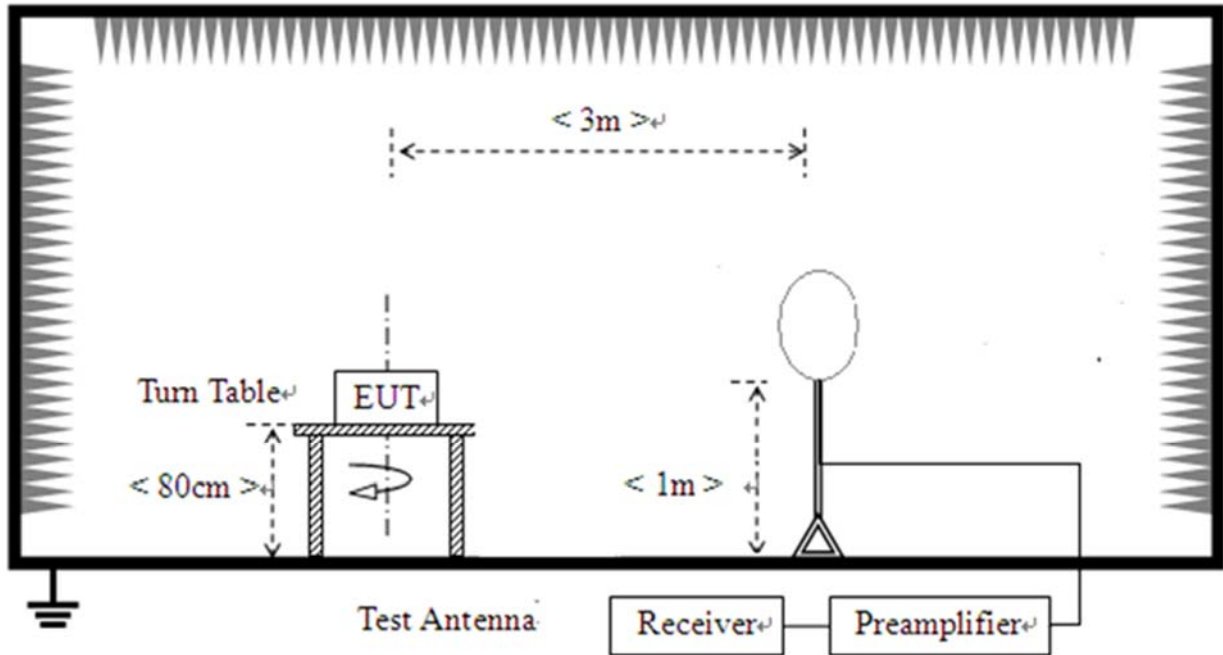

- 2) For radiated emissions from 30 MHz to 1 GHz

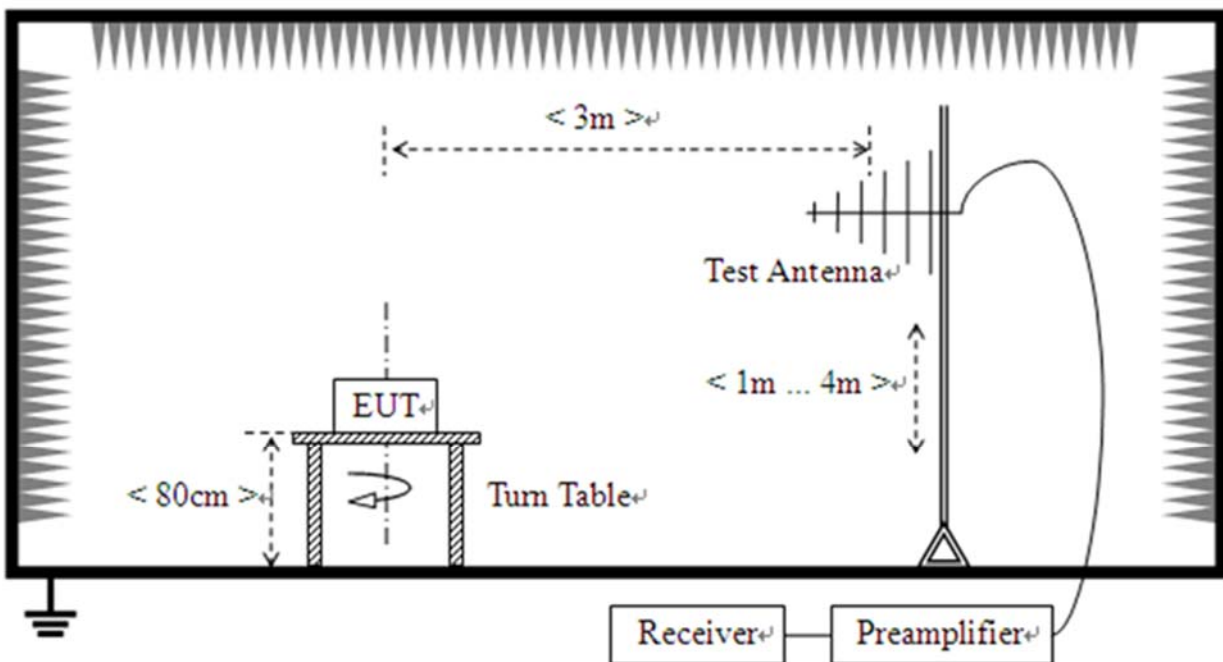

3) For radiated emissions above 1 GHz

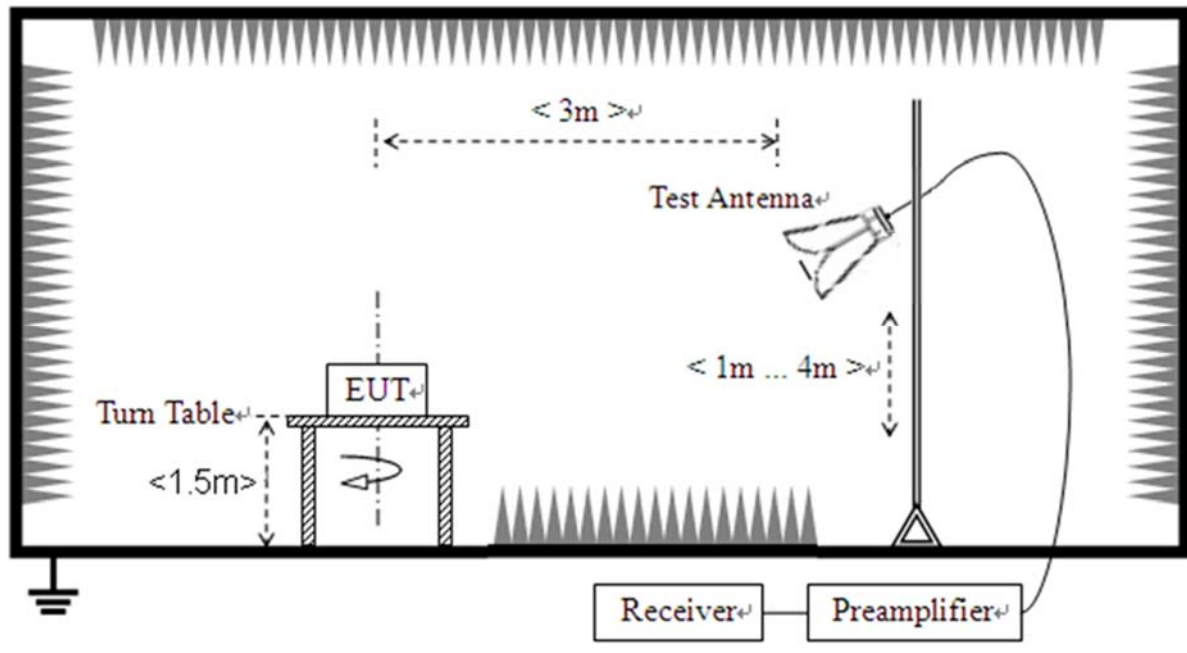

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1 GHz; 1.5 m above the ground plane for measurement above 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30 MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9 kHz to 90 kHz, 110 kHz to 490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, the video band width is set to 3 MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



2.5.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3 m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis (Z axis) test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit was not recorded.





The duty cycle is simply the on-time divided by the period:

Ton (ms):	19.2 ms + 13.7 ms + 21.7ms = 54.60
Ton+Toff (ms):	100
Duty cycle (%):	54.60

Therefore, the average factor is found by $20\log(\text{Duty cycle}) = -5.26 \text{ dB}$

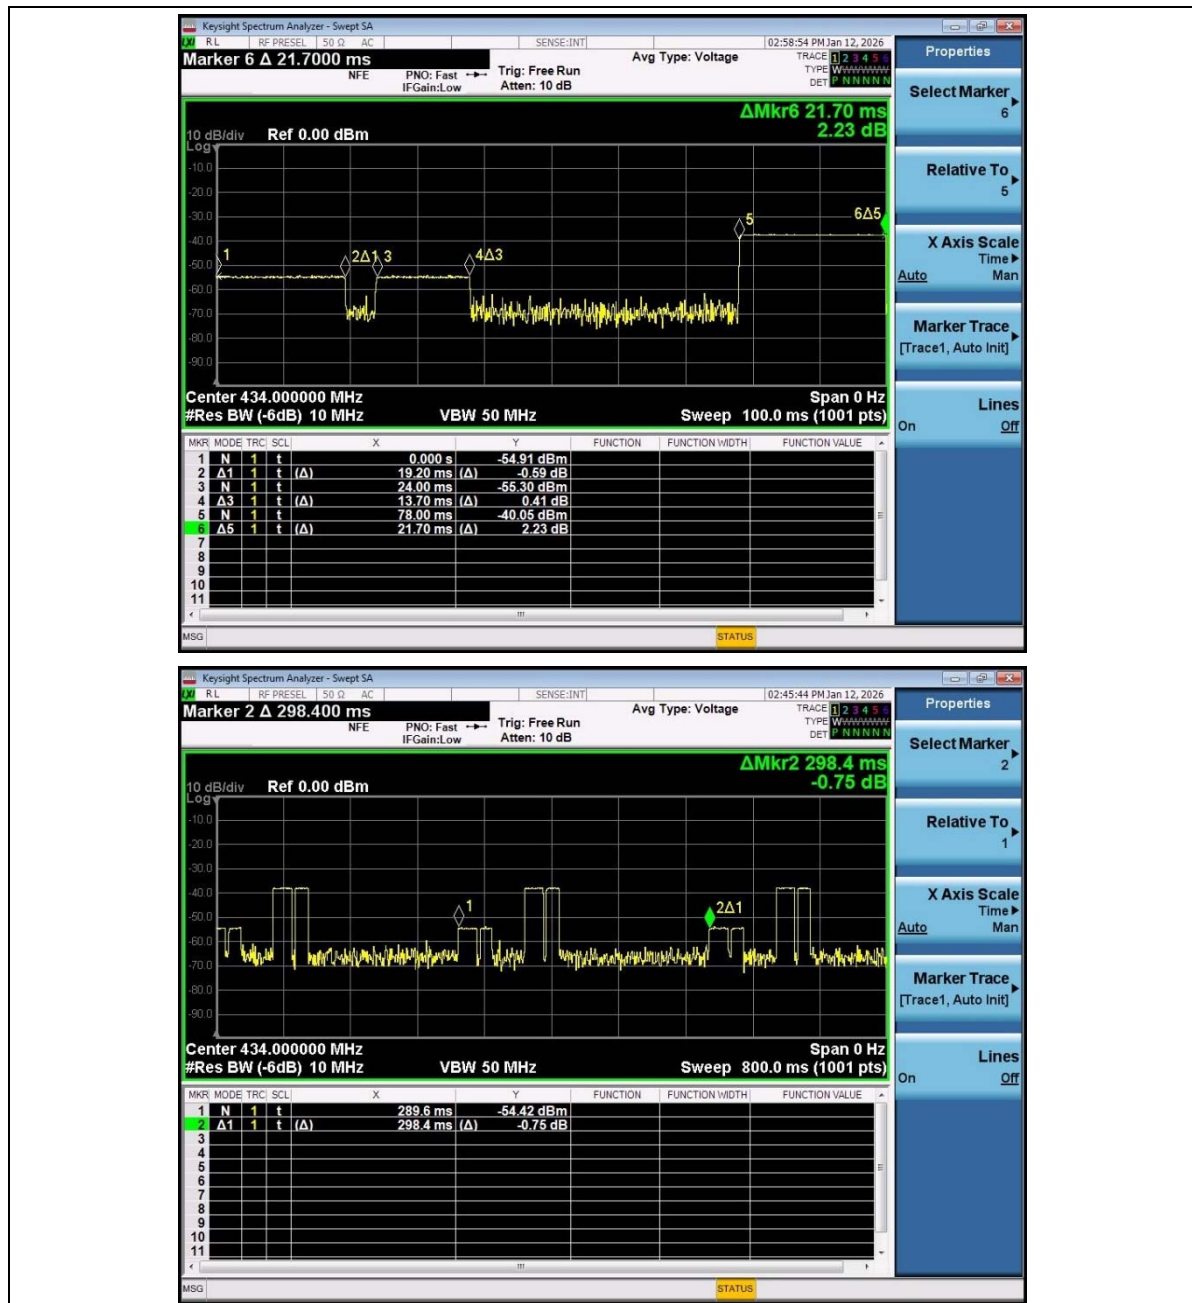

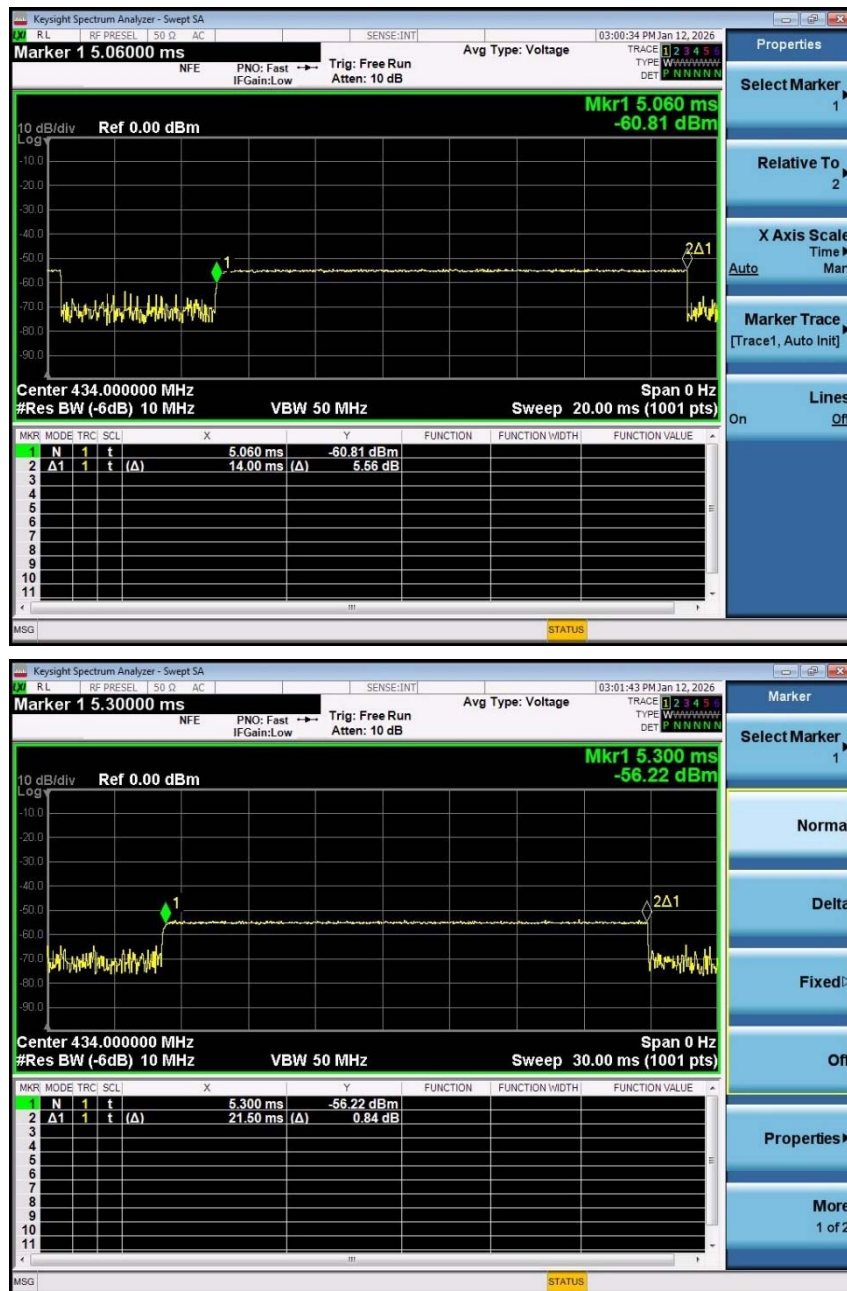


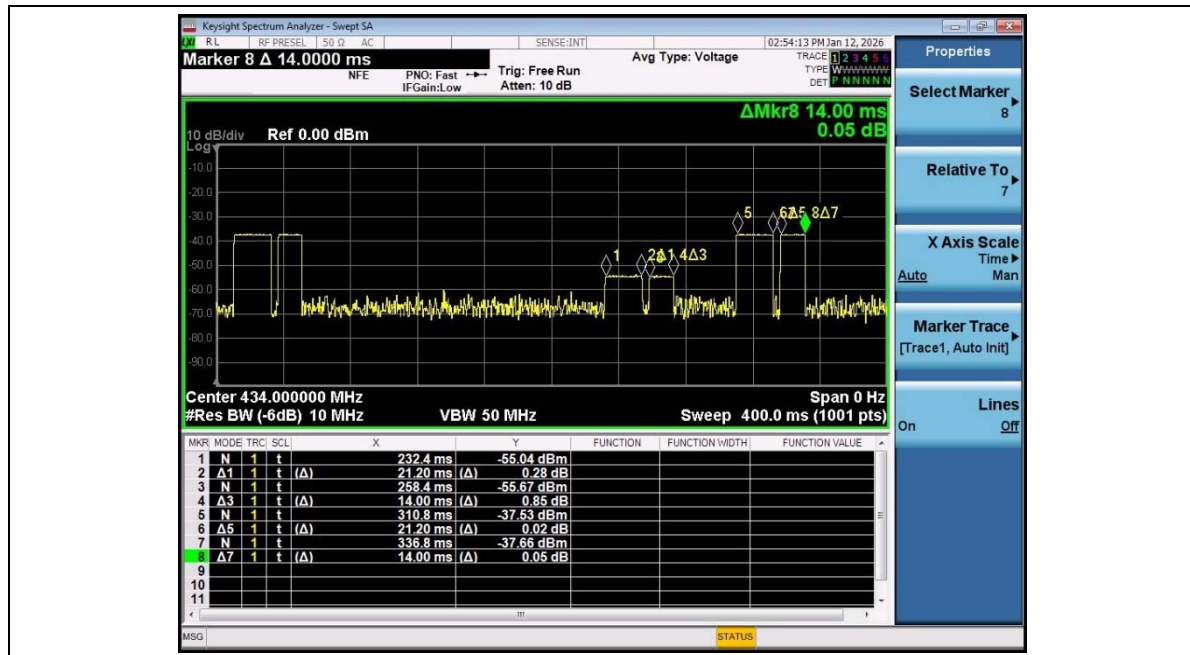


(Duty cycle)

**A. Field strength of fundamental**

Fre. (MHz)	ANT	Receiver Reading U _R (PK) (dBuV)	A _{Factor} (dB@ 3m)	Final Emission _PK (dBuV/m)	Limit-PK (dBμV/m)	AV factor (dB)	Final Emission _AV (dBuV/m)	Limit-AV (dBμV/m)	Verdict
433.92	H	62.47	19.41	81.88	100.83	-5.26	76.62	80.83	PASS
433.92	V	62.97	19.41	82.38	100.83	-5.26	77.12	80.83	PASS

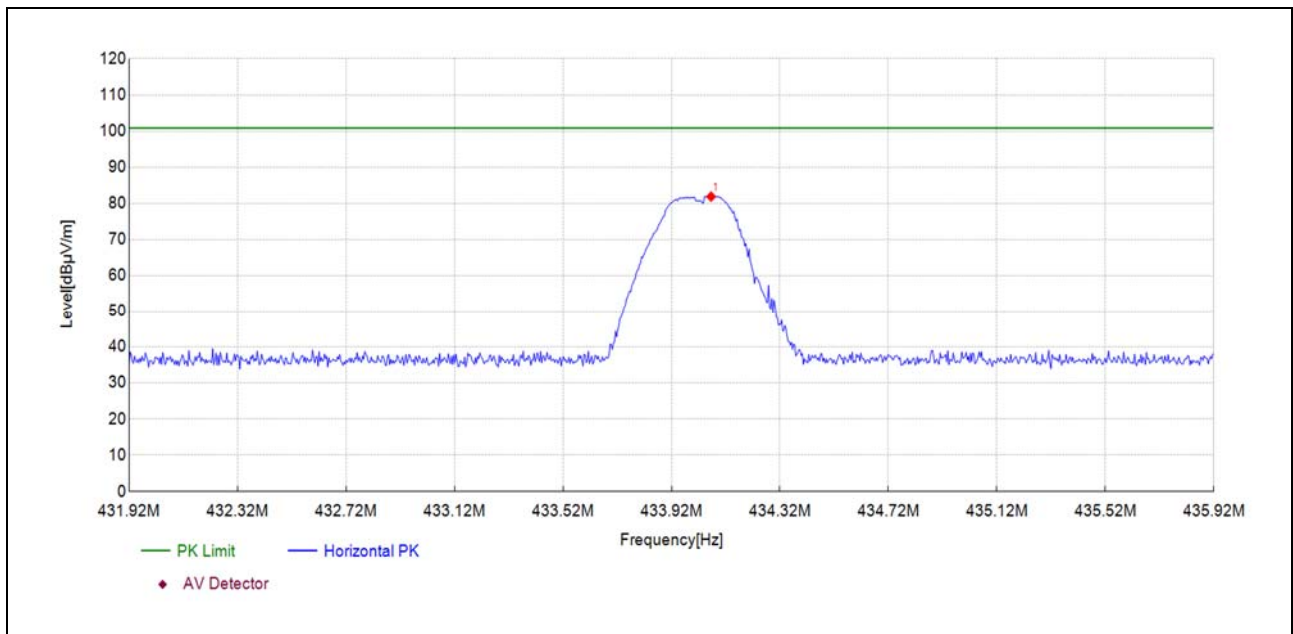
Test Plot:

(Antenna Horizontal)

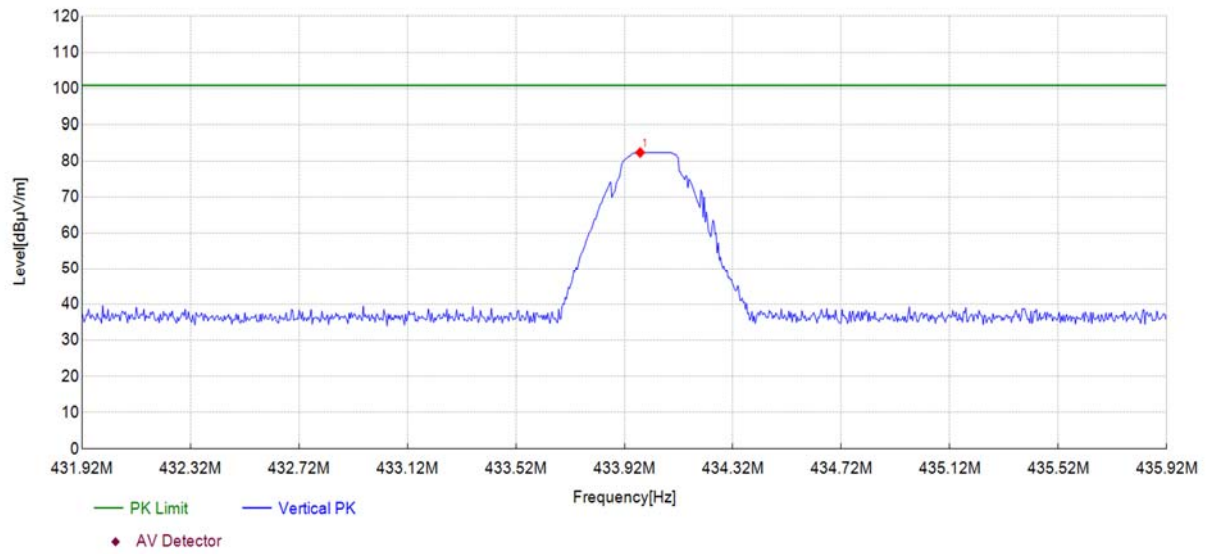


(Antenna Vertical)

B. Radiated emission

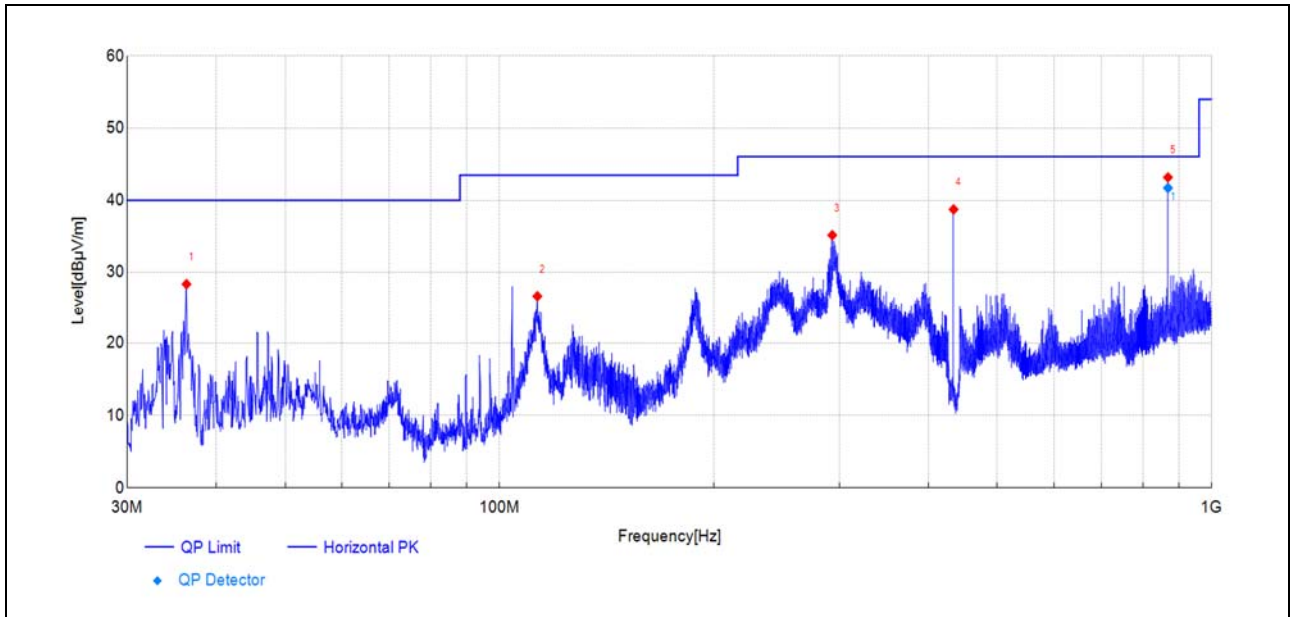


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
36.35	57.8	28.34	-29.490	40.00	11.66	234	PK	Horizontal	PASS
113.04	55.9	26.65	-29.290	43.50	16.85	172	PK	Horizontal	PASS
293.22	61.2	35.16	-26.040	46.00	10.84	11	PK	Horizontal	PASS
434.03	60.6	38.75	-21.890	-	-	265	PK	Horizontal	NA
867.98	55.9	43.21	-12.690	46.00	2.79	81	PK	Horizontal	PASS

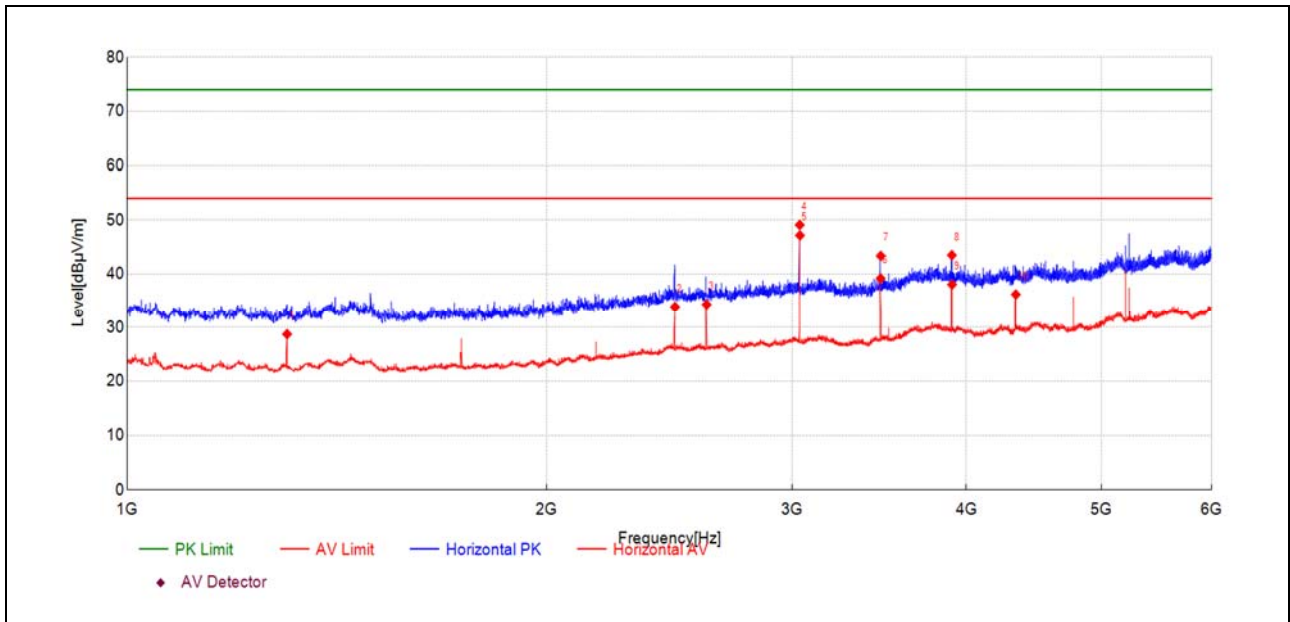


(Antenna Horizontal, 1GHz to 6GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
1302.53	48.7	28.73	-19.950	54.00	25.27	243	AV	Horizontal	PASS
2472.15	47.3	33.89	-13.370	54.00	20.11	9	AV	Horizontal	PASS
2604.66	47.4	34.34	-13.080	54.00	19.66	16	AV	Horizontal	PASS
3037.70	60.6	49.11	-11.500	74.00	24.89	296	PK	Horizontal	PASS
3038.70	58.7	47.16	-11.500	54.00	6.84	296	AV	Horizontal	PASS
3472.25	49.3	39.19	-10.090	54.00	14.81	36	AV	Horizontal	PASS
3472.75	53.5	43.38	-10.100	74.00	30.62	223	PK	Horizontal	PASS
3905.79	51.8	43.51	-8.250	74.00	30.49	62	PK	Horizontal	PASS
3906.79	46.3	38.07	-8.250	54.00	15.93	243	AV	Horizontal	PASS
4340.83	43.4	36.21	-7.200	54.00	17.79	49	AV	Horizontal	PASS

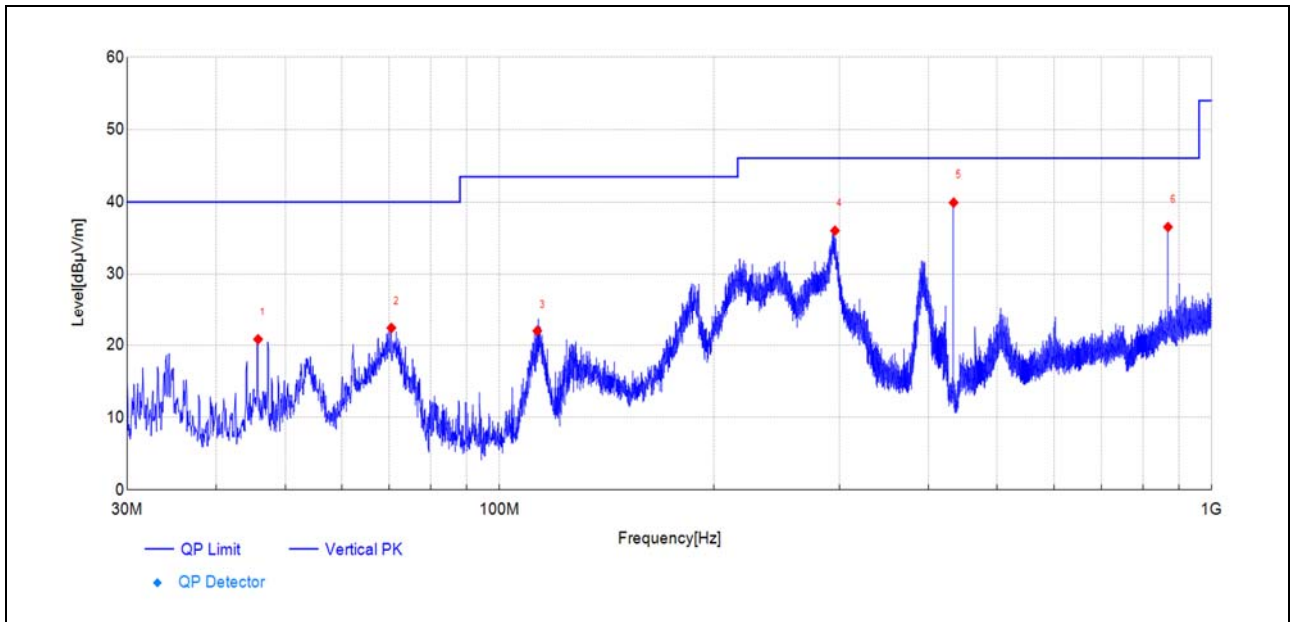

(Antenna Vertical, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
45.81	49.3	20.82	-28.460	40.00	19.18	293	PK	Vertical	PASS
70.50	53.9	22.40	-31.520	40.00	17.60	278	PK	Vertical	PASS
112.99	51.3	21.99	-29.280	43.50	21.51	263	PK	Vertical	PASS
295.79	61.8	36.04	-25.760	46.00	9.96	349	PK	Vertical	PASS
434.07	61.8	39.93	-21.890	-	-	95	PK	Vertical	NA
868.02	49.2	36.55	-12.690	46.00	9.45	354	PK	Vertical	PASS

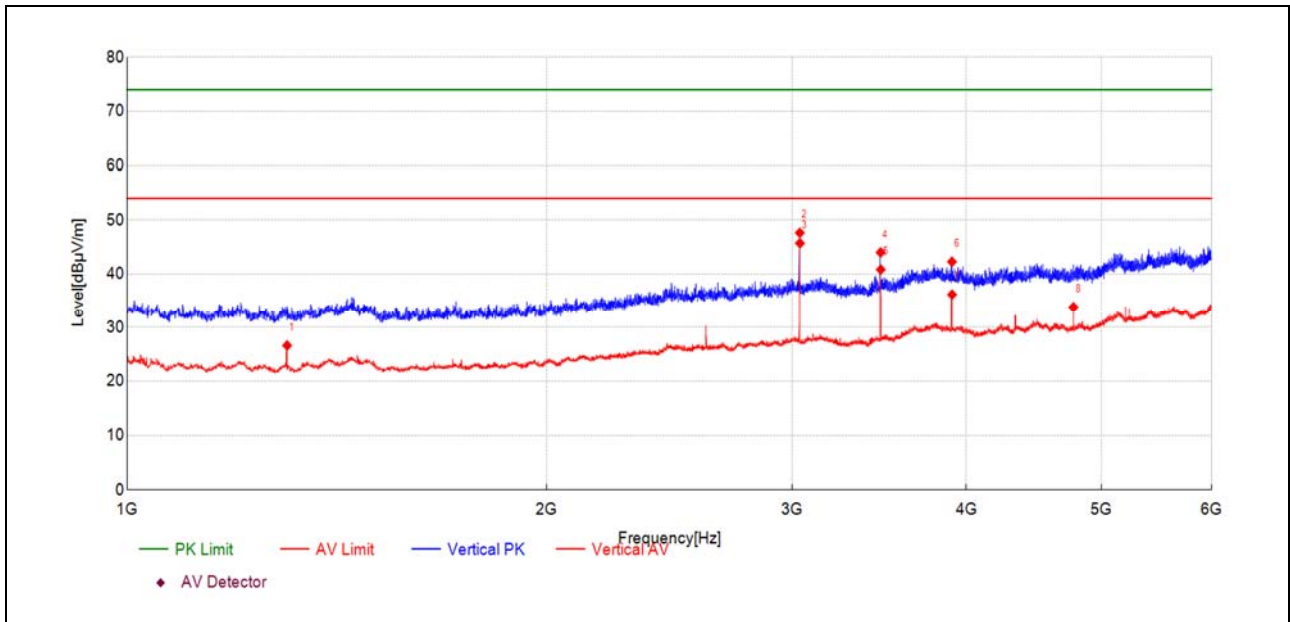

(Antenna Vertical, 1GHz to 6GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
1302.53	46.6	26.62	-19.950	54.00	27.38	297	AV	Vertical	PASS
3038.20	59.2	47.65	-11.500	74.00	26.35	351	PK	Vertical	PASS
3038.70	57.2	45.72	-11.500	54.00	8.28	351	AV	Vertical	PASS
3472.25	54.1	44.02	-10.090	74.00	29.98	224	PK	Vertical	PASS
3472.75	51.0	40.85	-10.100	54.00	13.15	224	AV	Vertical	PASS
3906.29	50.6	42.30	-8.250	74.00	31.70	3	PK	Vertical	PASS
3906.79	44.4	36.18	-8.250	54.00	17.82	3	AV	Vertical	PASS
4774.38	39.7	33.85	-5.830	54.00	20.15	69	AV	Vertical	PASS



2.6. Restricted Frequency Bands


2.6.1. Requirement

Except as shown in paragraph (d) of section 15.205(d), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
1 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3433.92.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41			

2.6.2. Test Description

1) Test Setup

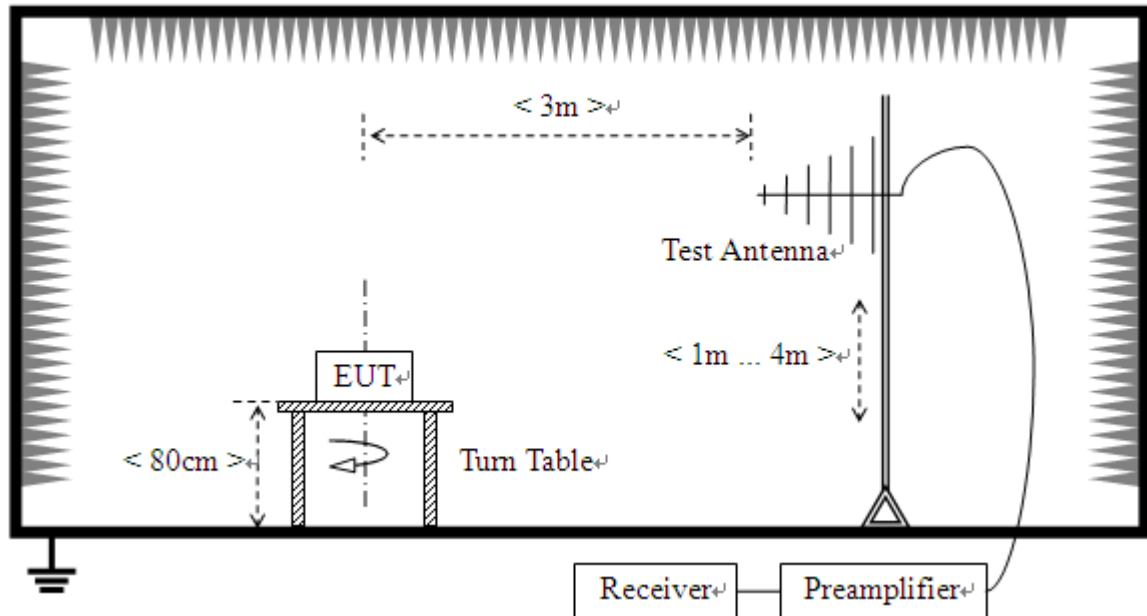


The EUT is located in a 3 m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3 m away from the EUT. Test Antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength.


2.6.3. Test Result

Note: All emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition (Z axis) was recorded in this test report.

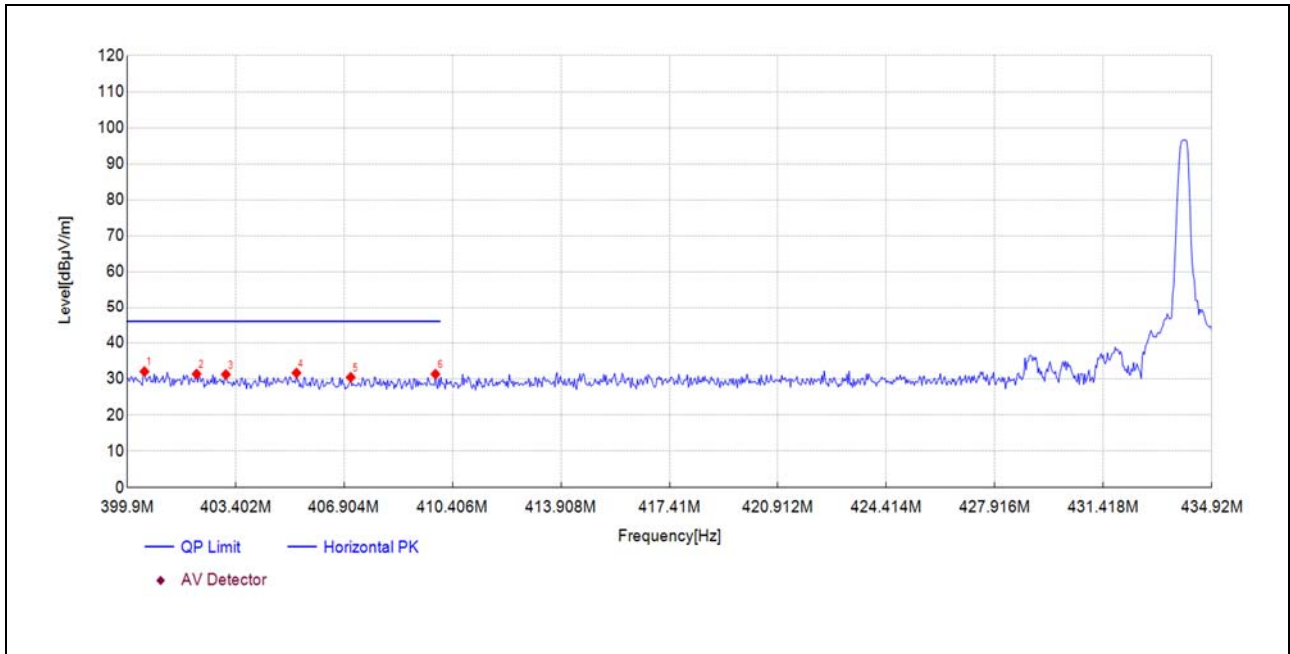

(Antenna Horizontal)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
400.46	12.7	32.07	19.380	46.00	13.93	42	PK	Horizontal	PASS
402.14	12.3	31.38	19.050	46.00	14.62	118	PK	Horizontal	PASS
403.09	12.4	31.25	18.860	46.00	14.75	300	PK	Horizontal	PASS
405.37	13.2	31.65	18.480	46.00	14.35	157	PK	Horizontal	PASS
407.12	12.0	30.46	18.420	46.00	15.54	252	PK	Horizontal	PASS
409.86	13.0	31.33	18.320	46.00	14.67	126	PK	Horizontal	PASS

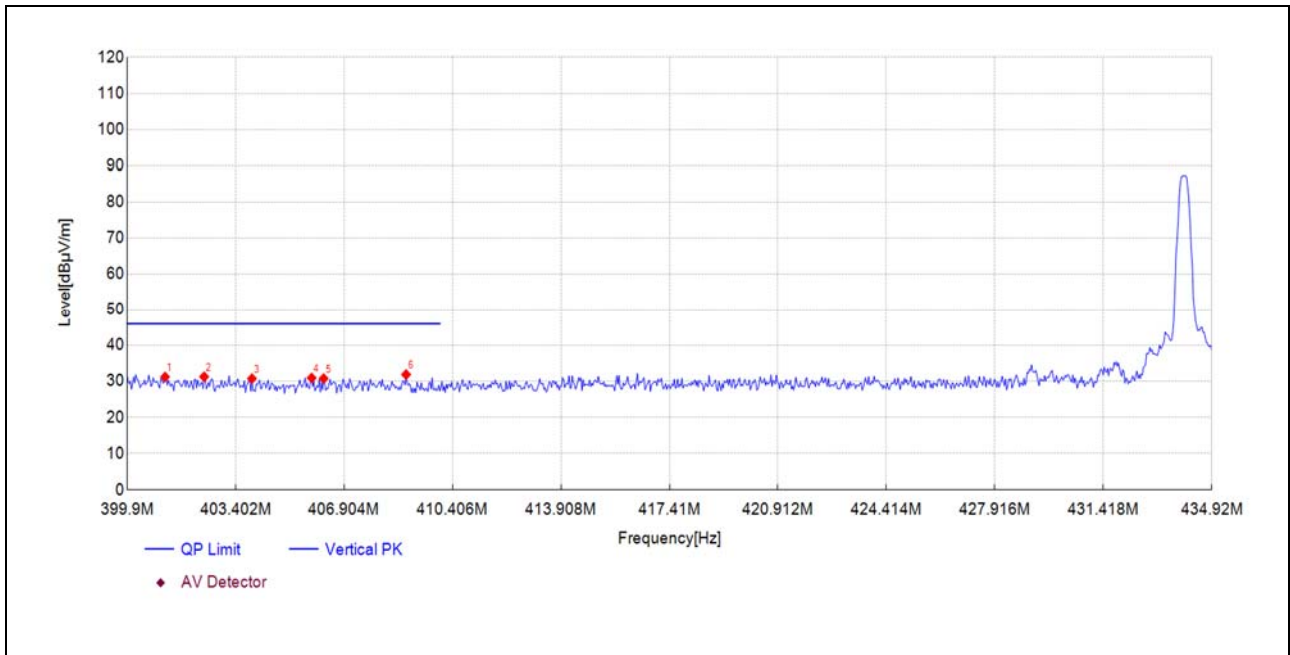

(Antenna Vertical)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Polarity	Verdict
401.13	12.0	31.21	19.240	46.00	14.79	156	PK	Vertical	PASS
402.39	12.3	31.25	19.000	46.00	14.75	136	PK	Vertical	PASS
403.93	12.1	30.74	18.690	46.00	15.26	144	PK	Vertical	PASS
405.86	12.5	30.92	18.460	46.00	15.08	160	PK	Vertical	PASS
406.24	12.3	30.75	18.440	46.00	15.25	306	PK	Vertical	PASS
408.91	13.5	31.86	18.340	46.00	14.14	175	PK	Vertical	PASS

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
20 dB Bandwidth	$\pm 5\%$
Transmission Time	$\pm 5\%$
Radiated Emission	± 2.95 dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipment Utilized

4.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.5.77.0418
JS32-RE	Tonscend	5.0.0

**4.3 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna – Horn	BBHA9170#773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L3802	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L3203	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2025.09.03	2026.09.02
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18

END OF REPORT