

产 品 承 认 书 书
Product Acknowledgement Letter



specification number	HG2026040701
effective date	

customer name	
product type	Wireless charging coil
Honggui material number	43.5 * 0.8 double-slot hole-covered back white adhesive, L = 8MM
Customer Material Number	

【☒新版发行, ☐版本修订】 【本规范含目录共 2页】 【RoHS Compliance Parts】

authorized strength	audit	ratify
Peng Jianji		

安福宏贵电子有限公司
Anfu Honggui Electronics Co., Ltd

江西省吉安市安福县洲湖镇杨梅岭北区新能源产业园2#楼 彭建基: 13907060771
Yangmeilingbei District, Zhoushu Town, Anfu County, Ji'an City, Jiangxi Province. Building 2, New Energy Industrial Park. Peng Jianji: 13907060771

本承认书在客户收到一星期内, 请务必签章返回, 逾期视为生产时按此承认书的标准执行。This acknowledgement form must be signed and returned within one week after the customer receives it. Failure to do so within the specified time will be regarded as following the standards stated in this form during the production process.

【Customer approval】

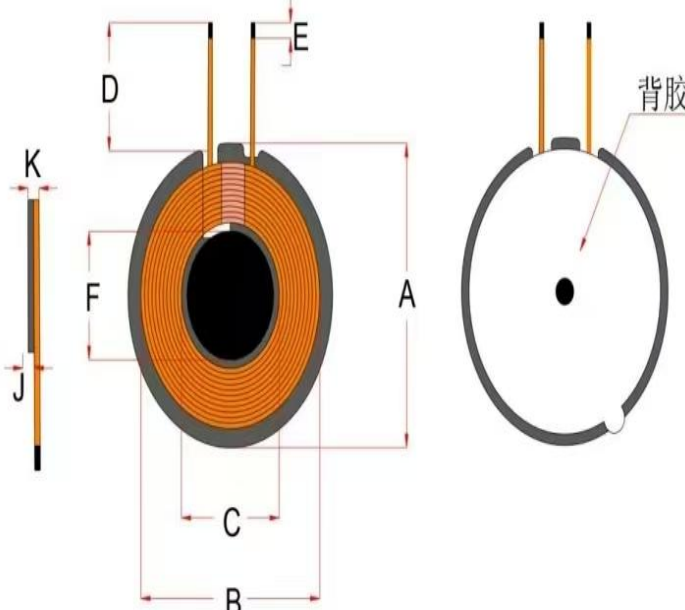
date:

Acknowledgment status: ☐make a clean breast of ☐Conditional approval ☐disallow

ratify	audit	recheck	examine

explain

产品规格书 specification

Huanggui Material Number	43.5 multiplied by 0.8, double-slot, perforated back, white adhesive, length = 8MM	specific ation number	HG2026040701	versions	01
◆、boundary dimension			(unit: mm)		
			A	43.0 ±0.5	
			B	40.0 ±1.5	
			C	18.5 ±0.5	
			D	8.0 ±2	
			E	2.0 ±1	
			F	16*1.3	
			J	0.8 ±0.1	
			K	2.2 ±0.2	
			(1)Wire diameter: 0.07 * 100P copper wire with self-ad		
			(2)Number of turns: 11TS		
			(3)Does the tail line cross over: Ye		
			(4)Coil package with 7mm wide heat-resistant adhesive		
			(5)The coil and the magnetic sheet need to be adhered		
			(6)Magnetic disc back double-sided adhesive tape		
◆、electrical characteristics:					
parameter	specification		test condition	test instrument	
L0	7 ±0.3	μH	100KHz/1V	■TH1816B	
Q	>50	min	100KHz/1V	■TH1816B	
DCR	<70	mΩ	@ 25℃	■CH-502BC	
operating temperature		-40℃~ 125℃			
◆、bill of materials:					
serial number					
1	Trade name	material specification	supplier	remark	
2	magnetic sheet	43.5 * 0.8 - Double-slot with holes	PC95Manganese zinc		
3	copper wire	0.07*100P	Silk-covered self-adhesive copper wire		
4	high-temperature tape	7MM	Environmental protection tape		
5	tin	High-temperature tin bar	Qiandao Environmental Protection Tin		
6	glue	white glues	eco-friendly adhesive		
authorized strength		white glues	Round double-sided adhesive tape		
			audit	ratify	
Peng Jianj					

