TEST REPORT

Test item description:	Mobile Data Termina
FCC ID:	2BTRU-F2
Trademark(s):	N/A
Model/Type reference:	F2, F5, F2-BJ, F5-BJ, F2A, F2B, F5A, F5B
Applicant's name:	Shenzhen Hande Iot Technology Co.,Ltd
Address:	702-3, Building 5, Gonglian Fuji Innovation Park, No. 58 Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen
Manufacturer:	Shenzhen Hande Iot Technology Co.,Ltd
Address:	702-3, Building 5, Gonglian Fuji Innovation Park, No. 58 Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen
Prepared By:	Shenzhen CTB Testing Technology Co., Ltd.
Address:	1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date:	Nov. 17, 2025
Sample tested Date:	Nov. 17, 2025 to Jan. 04, 2026
Issue Date:	Jan. 04, 2026
Report No.:	CTB25111702603RF06
Test Standards	FCC Part 22H & 24E
Test Results	PASS
Remark:	This is GSM radio test report.

Compiled by:	Reviewed by:	Approved by:
Kai Chen	Martin Feng	Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration Page

1. VERSION 3
2. TEST SUMMARY 4
3. MEASUREMENT UNCERTAINTY 5
4. PRODUCT INFORMATION AND TEST SETUP 6
4.1 Product Information 6
4.2 Test Setup Configuration 6
4.3 Support Equipment 6
4.4 Channel List 7
4.5 Test Mode 7
4.6 Test Environment 8
5. TEST FACILITY AND TEST INSTRUMENT USED 9
5.1 Test Facility 9
5.2 Test Instrument Used 9
6. RF OUTPUT POWER 11
6.1 Standard Applicable 11
6.2 Test Procedure 11
6.3 Environmental Conditions 11
6.4 Summary of Test Results/Plots 12
7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER 19
7.1 Standard Applicable 19
7.2 Test Procedure 19
7.3 Environmental Conditions 19
7.4 Summary of Test Results 20
8. EMISSION BANDWIDTH 22
8.1 Standard Applicable 22
8.2 Test Procedure 22
8.3 Environmental Conditions 22
8.4 Summary of Test Results/Plots 23
9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL 37
9.1 Standard Applicable 37
9.2 Test Procedure 37
9.3 Environmental Conditions 37
9.4 Summary of Test Results/Plots 38
10. SPURIOUS RADIATED EMISSIONS 62
10.1 Standard Applicable 62
10.2 Test Procedure 62
10.3 Environmental Conditions 62
10.4 Summary of Test Results/Plots 63
11. FREQUENCY STABILITY 67
11.1 Standard Applicable 67
11.2 Test Procedure 67
11.3 Environmental Conditions 67
11.4 Summary of Test Results/Plots 68
12. EUT TEST PHOTO 79

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB25111702603RF06	Jan. 04, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

FCC Rules	Description of Test Item	Result
§1.1307,§2.1091	RF Exposure	Compliant
§22.913 (a), §24.232 (c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio(PAR) of Transmitter	Compliant
§22.917 (b), §24.238 (b)	Emission Bandwidth	Compliant
§22.917 (a), §24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917 (a), §24.238 (a)	Spurious Radiation Emissions	Compliant
§22.917 (a), §24.238 (a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant

.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10-7

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	F2, F5, F2-BJ, F5-BJ, F2A, F2B, F5A, F5B
Model Description:	All the model are the same circuit and RF module, only the name and appearance are different, used to distinguish between different sales customers. Test sample model: F2
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Max. RF output power:	GSM850: 33.07dBm GSM1900: 30.51dBm WCDMA Band 2: 28.98dBm WCDMA Band 5: 30.62dBm
Type of Modulation:	GMSK, BPSK
Antenna installation:	FPC antenna
Antenna Gain:	GSM850: -1.2dBi GSM1900: 1.92dBi WCDMA Band 2: 1.92dBi WCDMA Band 5: -1.2dBi
Ratings:	DC 5V charging from adapter DC 3.85V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

4.5 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(℃)	23
Low Temperature(℃)	0
High Temperature(℃)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 （E1962B ）	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Micowave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Micowave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 （104489/003）	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22

19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

6. RF OUTPUT POWER

6.1 Standard Applicable

According to §22.913(a)(2),The ERP of mobileand portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

6.2 Test Procedure

Conducted output power test method:



Radiated power test method:

1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2.The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3.The frequency range up to tenth harmonic of the fundamental frequency was investigated.

4.Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

6.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For GSM Mode GSM850

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	31.79	1.5	0	H	1.5	-1.2	29.09	38.45
824.2	31.76	1.5	0	V	1.5	-1.2	29.06	38.45
Middle Channel								
836.6	32.07	1.5	0	H	1.5	-1.2	29.37	38.45
836.6	32.26	1.5	0	V	1.5	-1.2	29.56	38.45
High Channel								
848.8	31.97	1.5	0	H	1.5	-1.2	29.27	38.45
848.8	32.76	1.5	0	V	1.5	-1.2	30.06	38.45

EIRP For GSM Mode PCS1900

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	29.98	1.5	0	H	1.9	1.92	30.00	33
1850.2	29.93	1.5	0	V	1.9	1.92	29.95	33
Middle Channel								
1880	29.05	1.5	0	H	1.9	1.92	29.07	33
1880	29.92	1.5	0	V	1.9	1.92	29.94	33
High Channel								
1909.8	28.89	1.5	0	H	1.9	1.92	28.91	33
1909.8	28.84	1.5	0	V	1.9	1.92	28.86	33

ERP For GPRS Mode GSM850

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	32.17	1.5	0	H	1.5	-1.2	29.47	38.45
824.2	32.41	1.5	0	V	1.5	-1.2	29.71	38.45
Middle Channel								
836.6	32.30	1.5	0	H	1.5	-1.2	29.60	38.45
836.6	32.55	1.5	0	V	1.5	-1.2	29.85	38.45
High Channel								
848.8	32.10	1.5	0	H	1.5	-1.2	29.40	38.45
848.8	32.39	1.5	0	V	1.5	-1.2	29.69	38.45

EIRP For GPRS Mode PCS1900

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	30.48	1.5	0	H	1.9	1.92	30.50	33
1850.2	30.22	1.5	0	V	1.9	1.92	30.24	33
Middle Channel								
1880	29.60	1.5	0	H	1.9	1.92	29.62	33
1880	29.15	1.5	0	V	1.9	1.92	29.17	33
High Channel								
1909.8	28.95	1.5	0	H	1.9	1.92	28.97	33
1909.8	28.45	1.5	0	V	1.9	1.92	28.47	33

ERP For EDGE Mode GSM850

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	28.87	1.5	0	H	1.5	-1.2	26.17	38.45
824.2	28.93	1.5	0	V	1.5	-1.2	26.23	38.45
Middle Channel								
836.6	28.46	1.5	0	H	1.5	-1.2	25.76	38.45
836.6	28.30	1.5	0	V	1.5	-1.2	25.60	38.45
High Channel								
848.8	27.90	1.5	0	H	1.5	-1.2	25.20	38.45
848.8	28.22	1.5	0	V	1.5	-1.2	25.52	38.45

EIRP For EDGE Mode PCS1900

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	26.37	1.5	0	H	1.9	1.92	26.39	33
1850.2	27.25	1.5	0	V	1.9	1.92	27.27	33
Middle Channel								
1880	26.53	1.5	0	H	1.9	1.92	26.55	33
1880	26.73	1.5	0	V	1.9	1.92	26.75	33
High Channel								
1909.8	25.89	1.5	0	H	1.9	1.92	25.91	33
1909.8	26.18	1.5	0	V	1.9	1.92	26.20	33

ERP For WCDMA Mode Band 5

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	30.24	1.5	0	H	1.5	-1.2	27.54	38.45
826.4	29.91	1.5	0	V	1.5	-1.2	27.21	38.45
Middle Channel								
836.6	29.10	1.5	0	H	1.5	-1.2	26.40	38.45
836.6	28.21	1.5	0	V	1.5	-1.2	25.51	38.45
High Channel								
846.6	28.75	1.5	0	H	1.5	-1.2	26.05	38.45
846.6	28.64	1.5	0	V	1.5	-1.2	25.94	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	29.64	1.5	0	H	1.5	-1.2	26.94	38.45
826.4	29.98	1.5	0	V	1.5	-1.2	27.28	38.45
Middle Channel								
836.6	27.96	1.5	0	H	1.5	-1.2	25.26	38.45
836.6	28.60	1.5	0	V	1.5	-1.2	25.90	38.45
High Channel								
846.6	29.18	1.5	0	H	1.5	-1.2	26.48	38.45
846.6	28.90	1.5	0	V	1.5	-1.2	26.20	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	29.50	1.5	0	H	1.5	-1.2	26.80	38.45
826.4	29.24	1.5	0	V	1.5	-1.2	26.54	38.45
Middle Channel								
836.6	28.78	1.5	0	H	1.5	-1.2	26.08	38.45
836.6	28.51	1.5	0	V	1.5	-1.2	25.81	38.45
High Channel								
846.6	28.53	1.5	0	H	1.5	-1.2	25.83	38.45
846.6	28.61	1.5	0	V	1.5	-1.2	25.91	38.45

EIRP For WCDMA Mode Band 2

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	29.85	1.5	0	H	1.9	1.92	29.87	33
1852.4	28.20	1.5	0	V	1.9	1.92	28.22	33
Middle Channel								
1880	27.86	1.5	0	H	1.9	1.92	27.88	33
1880	28.84	1.5	0	V	1.9	1.92	28.86	33
High Channel								
1907.6	26.91	1.5	0	H	1.9	1.92	26.93	33
1907.6	26.50	1.5	0	V	1.9	1.92	26.52	33

EIRP For HSDPA Mode Band 2

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	28.61	1.5	0	H	1.9	1.92	28.63	33
1852.4	28.87	1.5	0	V	1.9	1.92	28.89	33
Middle Channel								
1880	27.62	1.5	0	H	1.9	1.92	27.64	33
1880	28.85	1.5	0	V	1.9	1.92	28.87	33
High Channel								
1907.6	27.79	1.5	0	H	1.9	1.92	27.81	33
1907.6	26.95	1.5	0	V	1.9	1.92	26.97	33

EIRP For HSUPA Mode Band 2

Frequency	Substitude SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	27.72	1.5	0	H	1.9	1.92	27.74	33
1852.4	27.92	1.5	0	V	1.9	1.92	27.94	33
Middle Channel								
1880	27.87	1.5	0	H	1.9	1.92	27.89	33
1880	28.39	1.5	0	V	1.9	1.92	28.41	33
High Channel								
1907.6	26.91	1.5	0	H	1.9	1.92	26.93	33
1907.6	25.84	1.5	0	V	1.9	1.92	25.86	33

Note: Result = Substitude - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM	Low Channel	824.2	32.61	38.45
	Middle Channel	836.6	32.49	38.45
	High Channel	848.8	32.86	38.45
GPRS(1 Slot)	Low Channel	824.2	32.84	38.45
	Middle Channel	836.6	32.73	38.45
	High Channel	848.8	33.07	38.45
EDGE(1 Slot)	Low Channel	824.2	29.21	38.45
	Middle Channel	836.6	28.75	38.45
	High Channel	848.8	28.84	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GSM	Low Channel	1850.2	30.51	33.0
	Middle Channel	1880.0	29.95	33.0
	High Channel	1909.8	29.40	33.0
GPRS(1 Slot)	Low Channel	1850.2	30.48	33.0
	Middle Channel	1880.0	29.89	33.0
	High Channel	1909.8	29.36	33.0
EDGE(1 Slot)	Low Channel	1850.2	27.34	33.0
	Middle Channel	1880.0	27.12	33.0
	High Channel	1909.8	26.20	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	30.62	38.45
	Middle Channel	836.6	29.19	38.45
	High Channel	846.6	29.56	38.45
HSDPA	Low Channel	826.4	29.99	38.45
	Middle Channel	836.6	28.87	38.45
	High Channel	846.6	29.18	38.45
HSUPA	Low Channel	826.4	30.15	38.45
	Middle Channel	836.6	29.02	38.45
	High Channel	846.6	29.36	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	28.98	33.00
	Middle Channel	1880.0	28.64	33.00
	High Channel	1907.6	27.22	33.00
HSDPA	Low Channel	1852.4	28.95	33.00
	Middle Channel	1880.0	28.55	33.00
	High Channel	1907.6	27.14	33.00
HSUPA	Low Channel	1852.4	28.14	33.00
	Middle Channel	1880.0	27.81	33.00
	High Channel	1907.6	26.56	33.00

7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER

7.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

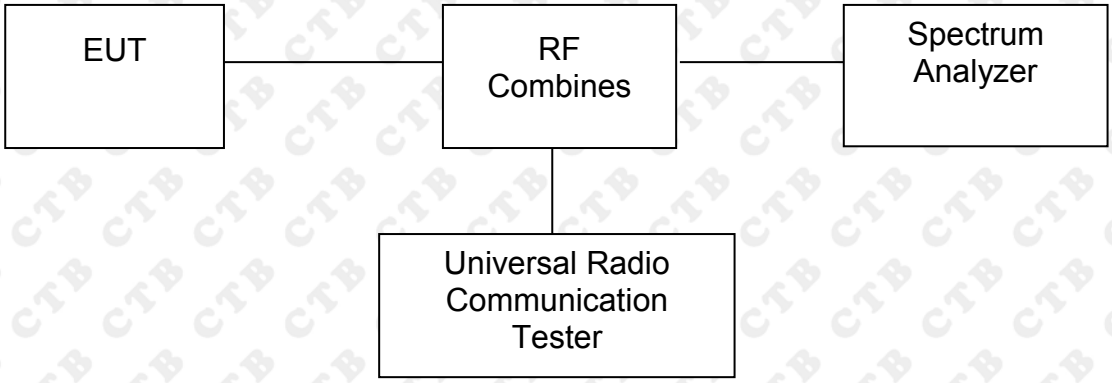

7.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

7.4 Summary of Test Results

Only the worst case was selected to record

For GSM850

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	190	836.6	3.09	13
GPRS(1 Slot)	190	836.6	3.11	13
EDGE(1 Slot)	190	836.6	7.05	13

For PCS 1900

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	512	1850.2	2.76	13
GPRS(1 Slot)	512	1850.2	2.82	13
EDGE(1 Slot)	512	1850.2	5.55	13

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	4182	836.4	1.87	13
HSDPA	4182	836.4	1.86	13
HSUPA	4182	836.4	1.84	13

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	1.85	13
HSDPA	9400	1852.4	1.85	13
HSUPA	9400	1852.4	1.86	13

GSM :

Agilent Spectrum Analyzer - Power Stat CCDF
Center Freq 836.600000 MHz
Center Freq: 836.600000 MHz
Trig: RF Burst
#Atten: 40 dB
Counts:1.00 M/1.00 Mpt
Radio Std: None
Average Power
27.08 dBm
45.31 % at 0dB
10.0 % 4.18 dB
1.0 % 5.11 dB
0.1 % 7.05 dB
0.01 % 7.21 dB
0.001 % 7.26 dB
0.0001 % 7.26 dB
Peak 7.28 dB
34.36 dBm
Gaussian
100 %
10 %
1 %
0.1 %
0.01 %
0.001 %
0.0001 %
0 dB
20 dB
Info BW 510.00 kHz

WCDMA:

Agilent Spectrum Analyzer - Power Stat CCDF
Center Freq 836.400000 MHz
Center Freq: 836.400000 MHz
Trig: Free Run
#Atten: 40 dB
Counts:1.00 M/1.
Radio Std: None
Average Power
29.72 dBm
56.30 % at 0dB
10.0 % 1.11 dB
1.0 % 1.65 dB
0.1 % 1.87 dB
0.01 % 2.00 dB
0.001 % 2.06 dB
0.0001 % 2.11 dB
Peak 2.12 dB
31.84 dBm
Gaussian
100 %
10 %
1 %
0.1 %
0.01 %
0.001 %
0.0001 %
0 dB
20 dB
Info BW 5.0000 MHz

8. EMISSION BANDWIDTH

8.1 Standard Applicable

According to §22.917(b),The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

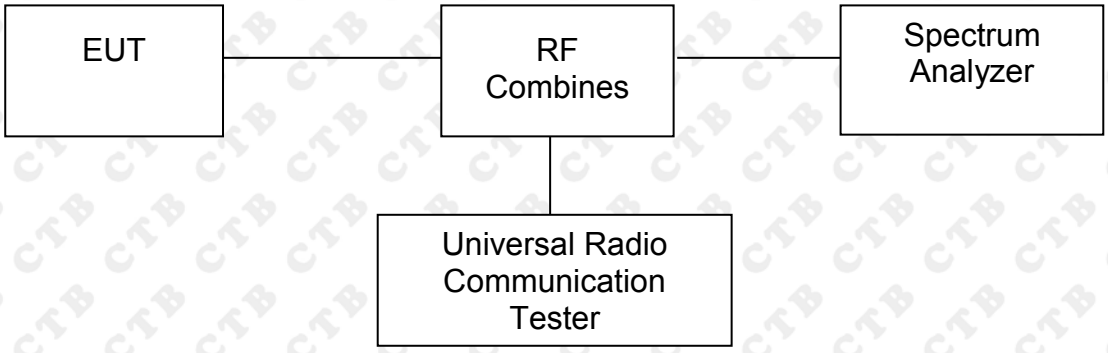

8.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

8.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	243.729	319.446
	190	836.6	248.227	318.236
	251	848.8	244.589	316.192
GPRS	128	824.2	243.987	318.967
	190	836.6	251.422	307.204
	251	848.8	243.312	321.898
EDGE	128	824.2	263.583	329.618
	190	836.6	252.499	313.933
	251	848.8	259.386	328.684

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	245.307	319.723
	661	1880.0	243.387	313.855
	810	1909.8	245.548	315.327
GPRS	512	1850.2	247.855	311.923
	661	1880.0	246.557	320.190
	810	1909.8	238.371	310.287
EDGE	512	1850.2	256.335	323.500
	661	1880.0	249.438	318.721
	810	1909.8	246.125	309.604

For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	4132	826.4	4326.427	6000.000
	4183	836.6	4369.363	6000.000
	4233	846.6	4320.531	5851.938
HSDPA	4132	826.4	4305.460	5968.404
	4183	836.6	4370.462	6000.000
	4233	846.6	4318.111	6000.000
HSUPA	4132	826.4	4341.432	5972.274
	4183	836.6	4376.321	6000.000
	4233	846.6	4293.569	5994.421

For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	9262	1852.4	4370.044	6000.000
	9400	1880.0	4383.989	6000.000
	9538	1907.6	4408.005	6000.000
HSDPA	9262	1852.4	4373.686	6000.000
	9400	1880.0	4375.566	6000.000
	9538	1907.6	4378.696	6000.000
HSUPA	9262	1852.4	4359.585	6000.000
	9400	1880.0	4341.306	6000.000
	9538	1907.6	4353.948	6000.000

For Cellular Band

GSM Low Channel
GSM Middle Channel
GSM High Channel

GPRS Low Channel

GPRS Middle Channel

GPRS High Channel

EDGE Low Channel

EDGE Middle Channel

EDGE High Channel

For PCS Band

GSM Low Channel
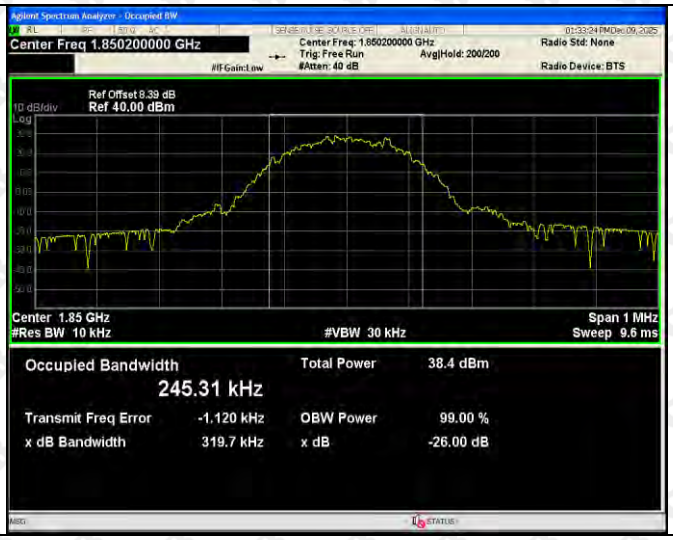
GSM Middle Channel
GSM High Channel

GPRS Low Channel

GPRS Middle Channel

GPRS High Channel

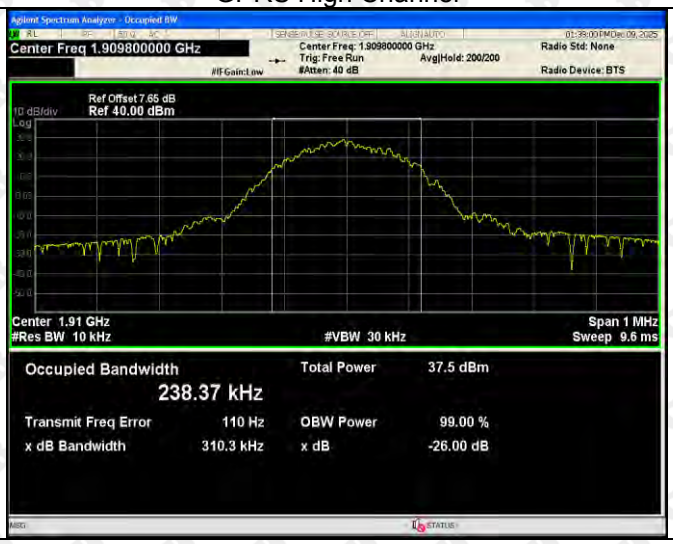

EDGE Low Channel

EDGE Middle Channel

EDGE High Channel

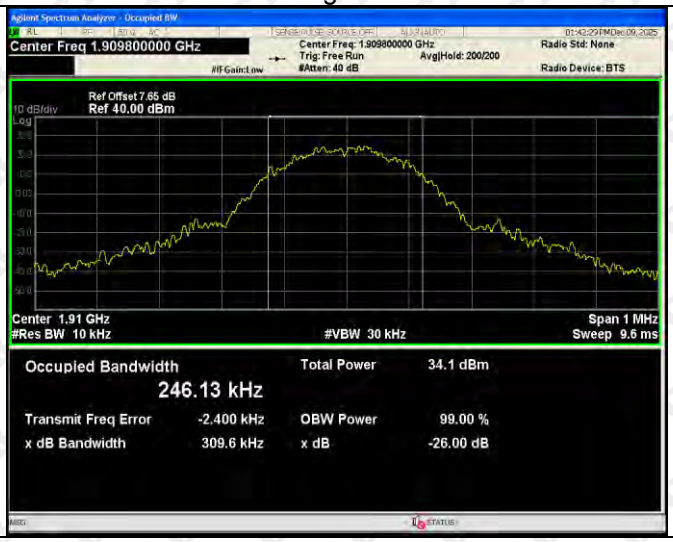

For Band V

WCDMA Low Channel

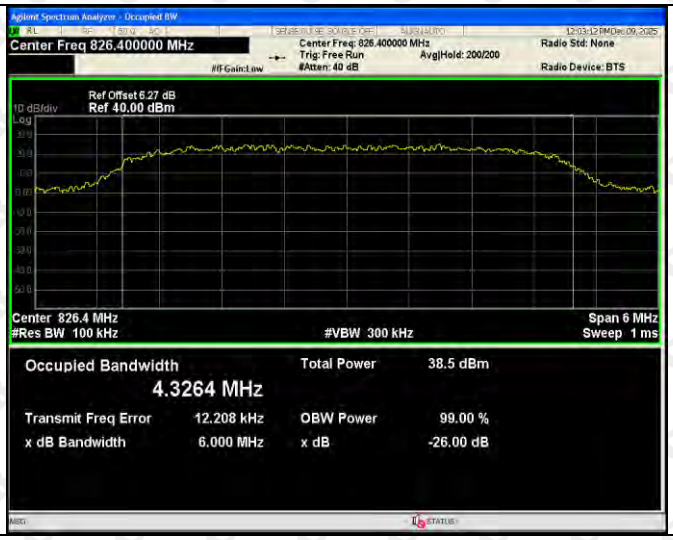

WCDMA Middle Channel

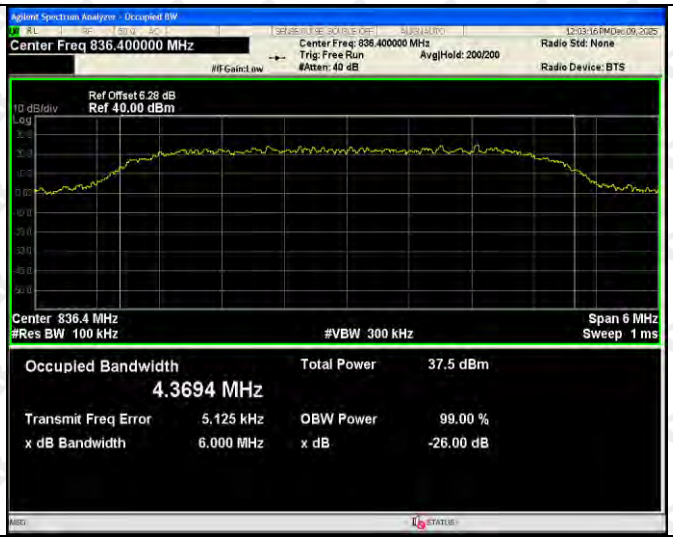

WCDMA High Channel

HSDPA Low Channel

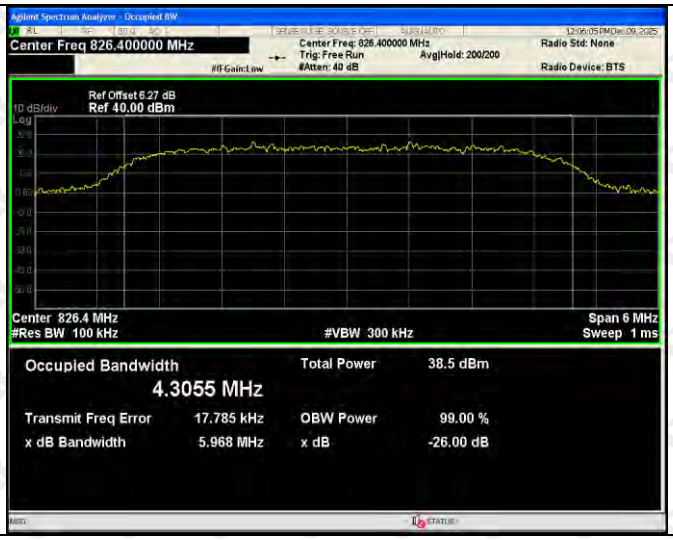

HSDPA Middle Channel

HSDPA High Channel

HSUPA Low Channel

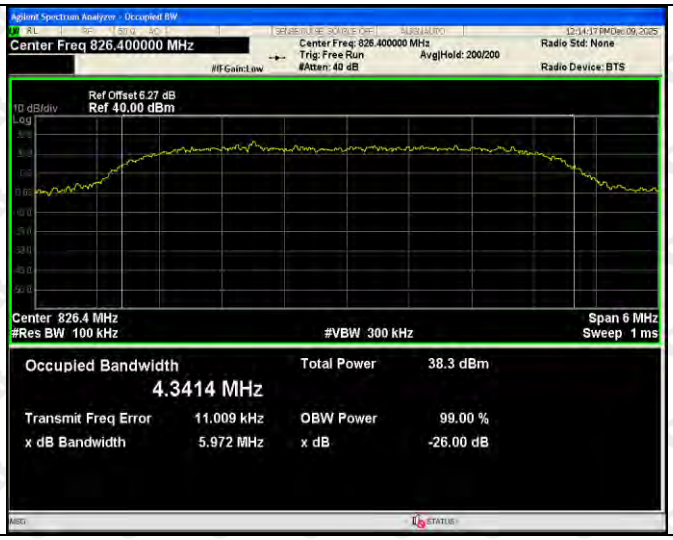

HSUPA Middle Channel

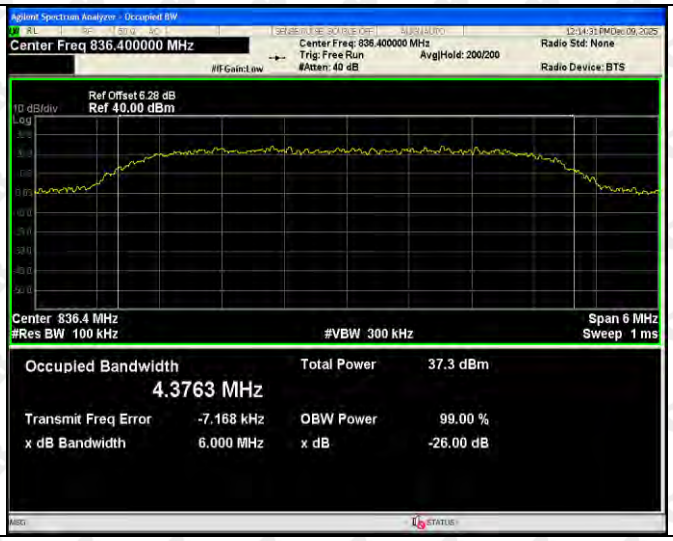

HSUPA High Channel

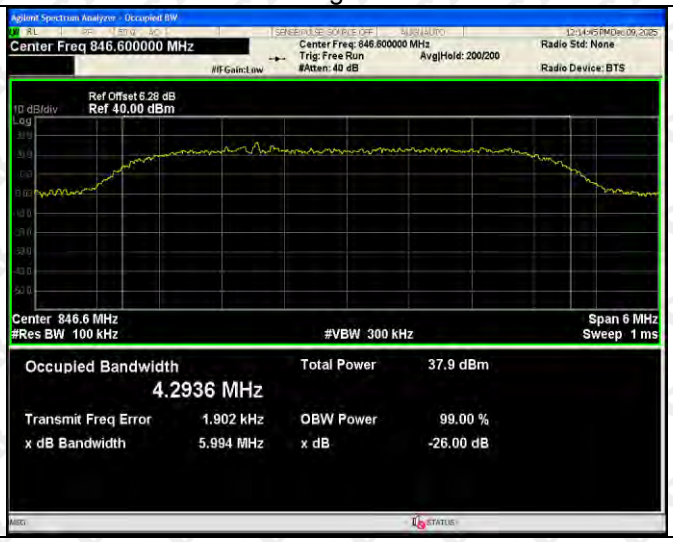

For Band II

WCDMA Low Channel

WCDMA Middle Channel

WCDMA High Channel

HSDPA Low Channel

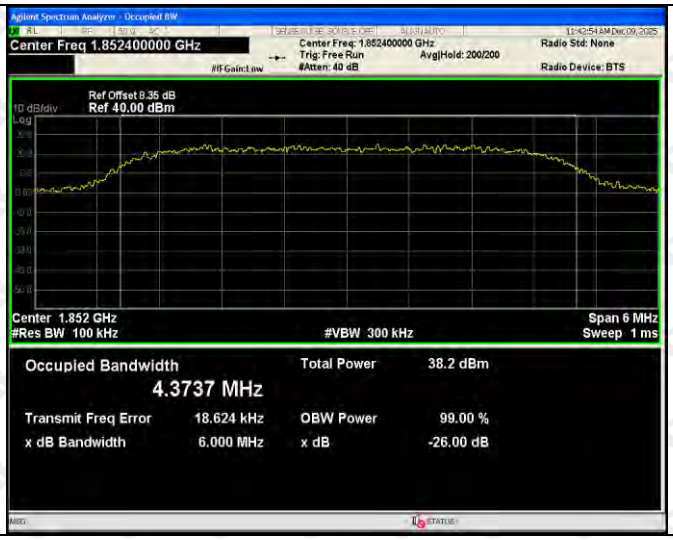

HSDPA Middle Channel

HSDPA High Channel

HSUPA Low Channel

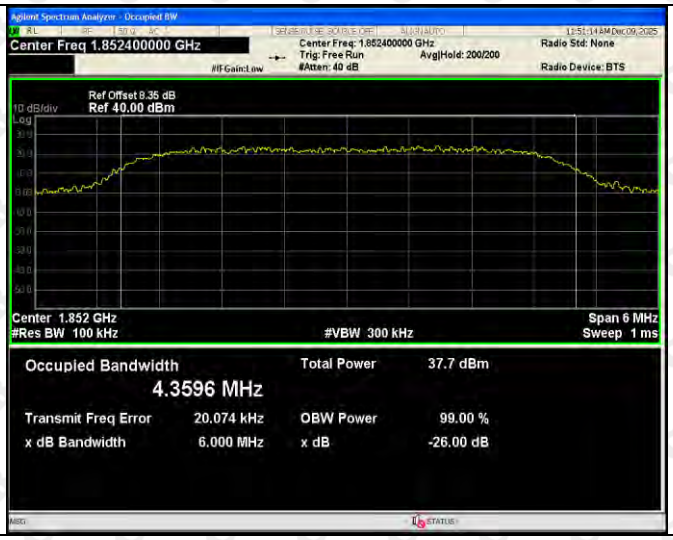

HSUPA Middle Channel

HSUPA High Channel

9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

9.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

9.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

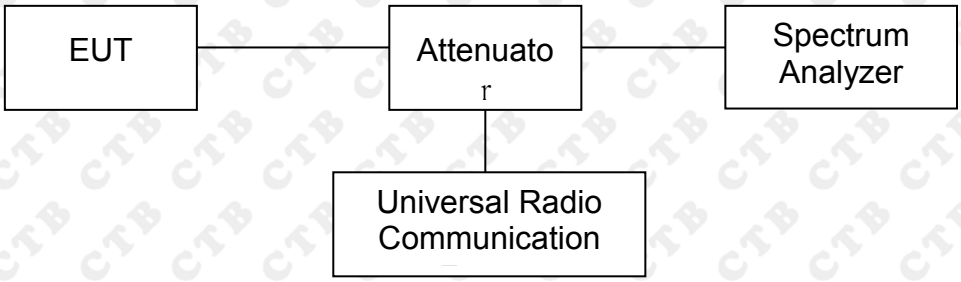

9.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

9.4 Summary of Test Results/Plots

Please refer to the following test plots

For Cellular Band

GSM Low Channel		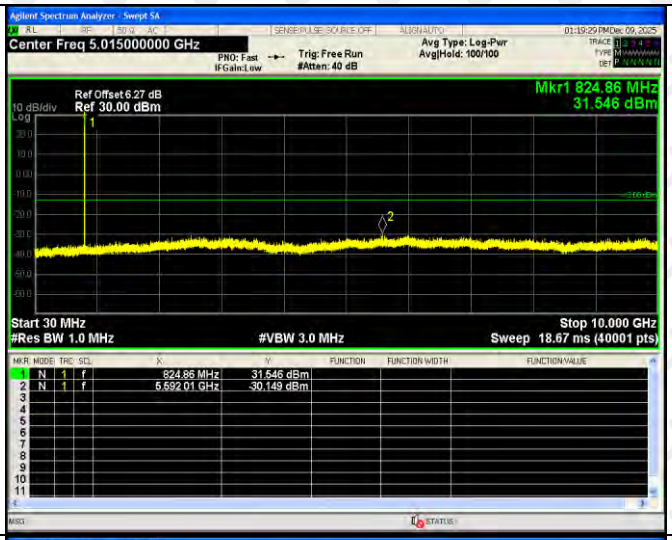
GSM Middle Channel		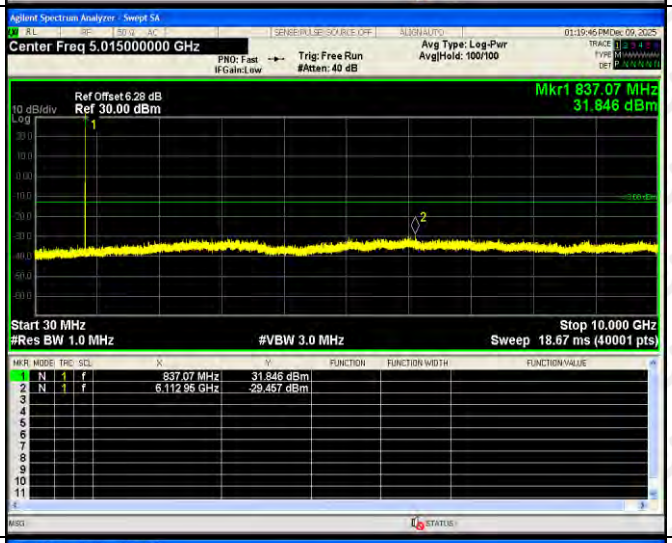
GSM High Channel		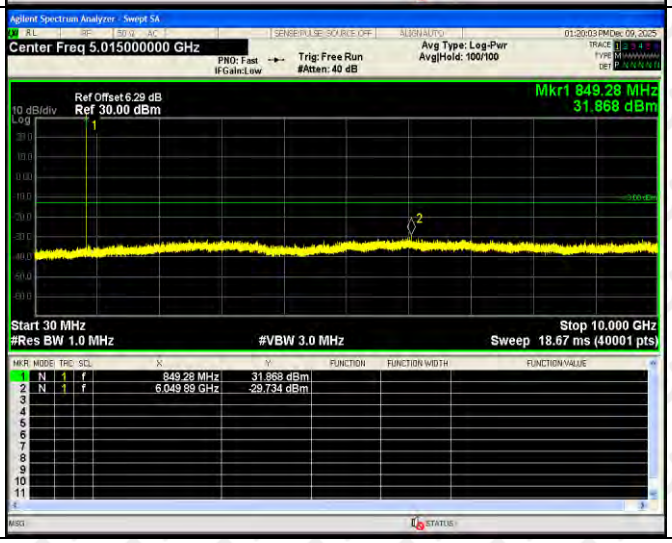

GSM Low Band Emission			
GSM High Band Emission			

GPRS Low Channel		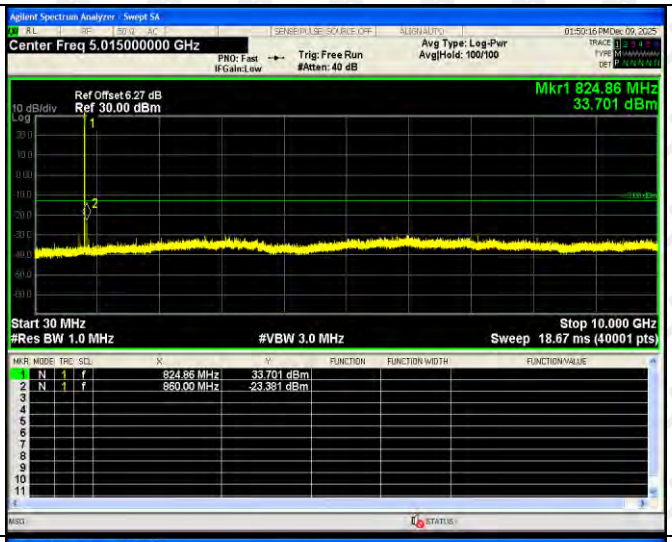	
GPRS Middle Channel		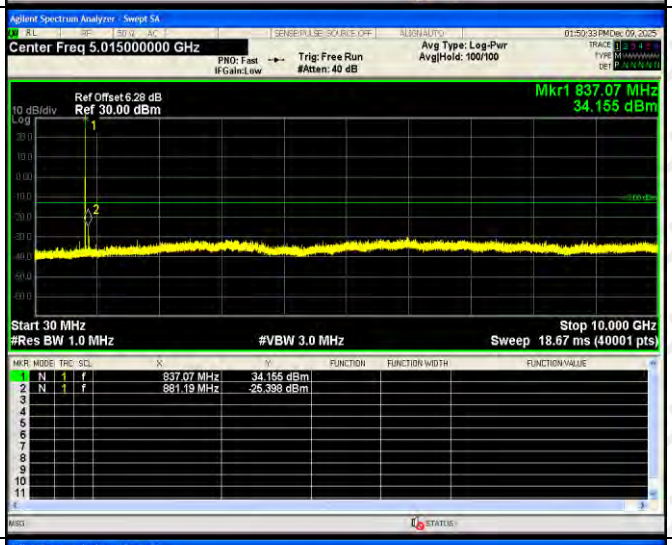	
GPRS High Channel		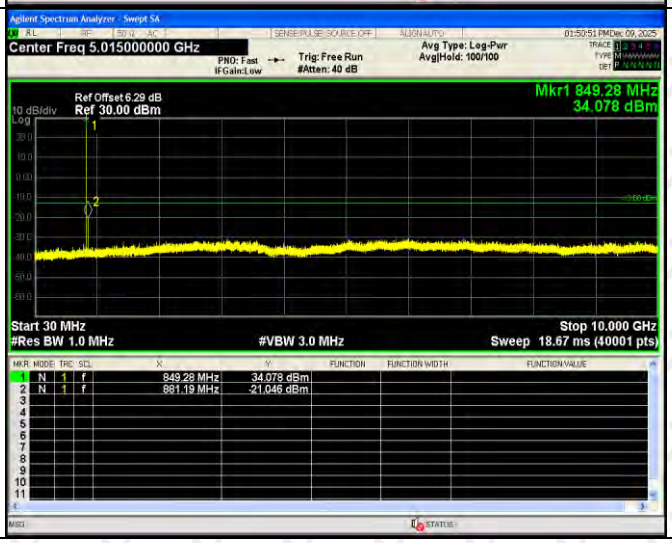	

GPRS Low Band Emission		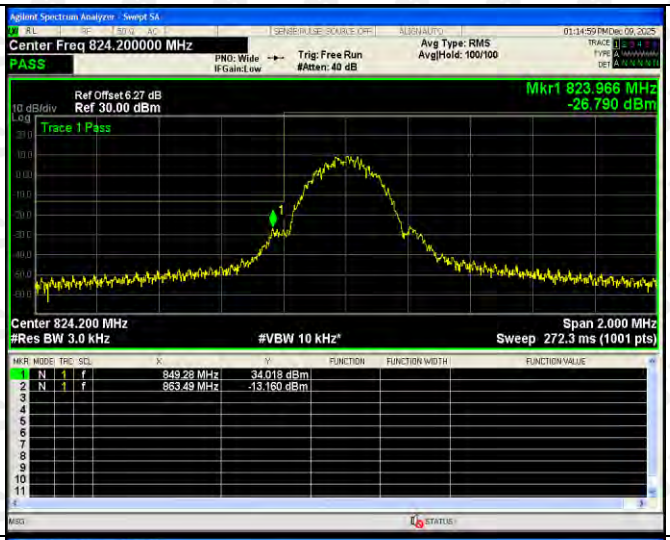	
GPRS High Band Emission		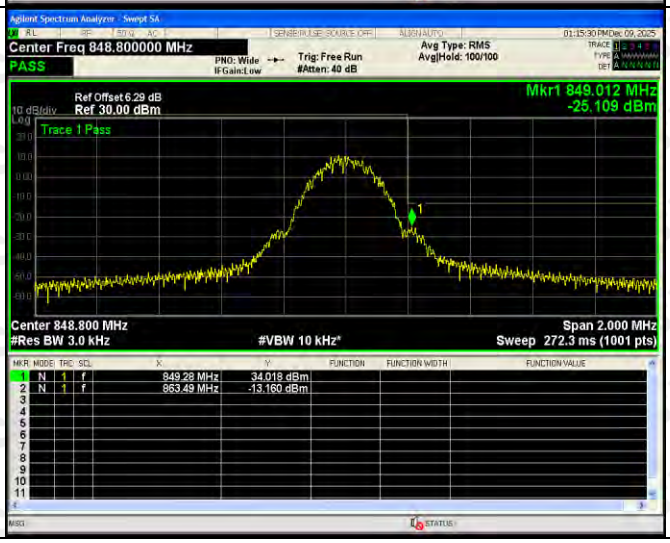	

EDGE Low Channel		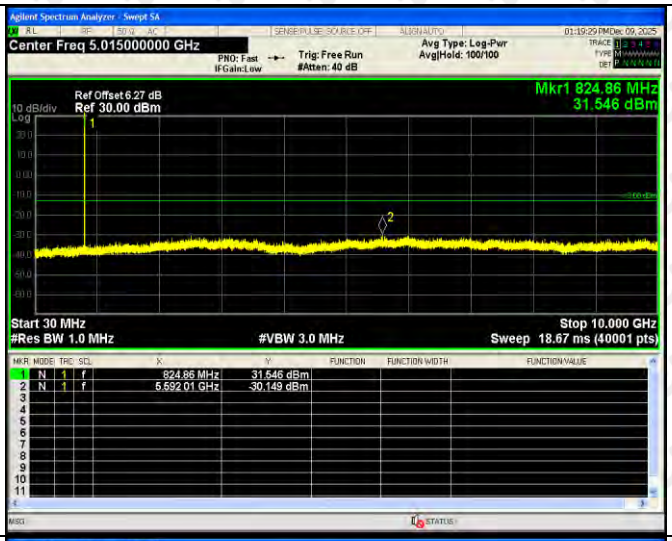	
EDGE Middle Channel		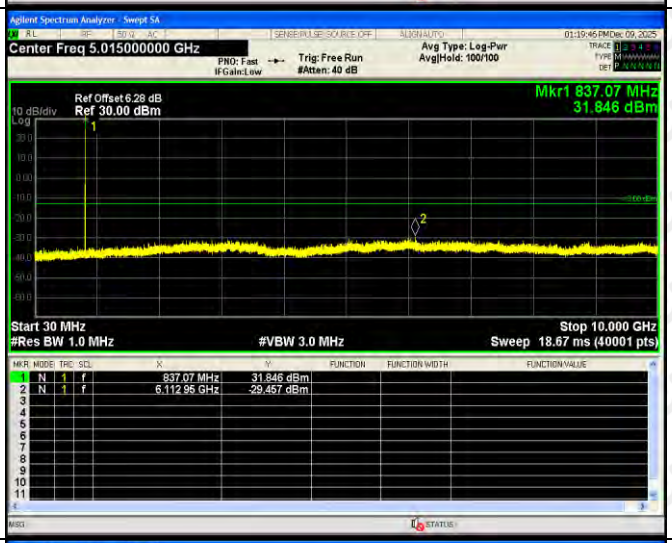	
EDGE High Channel		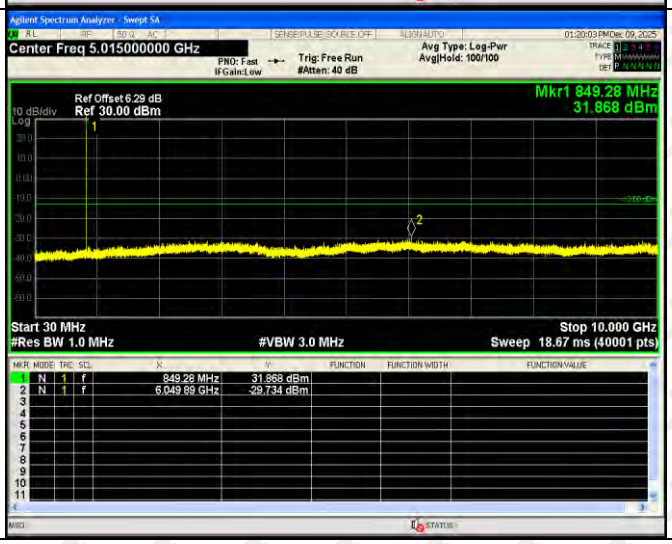	

EDGE Low Band Emission		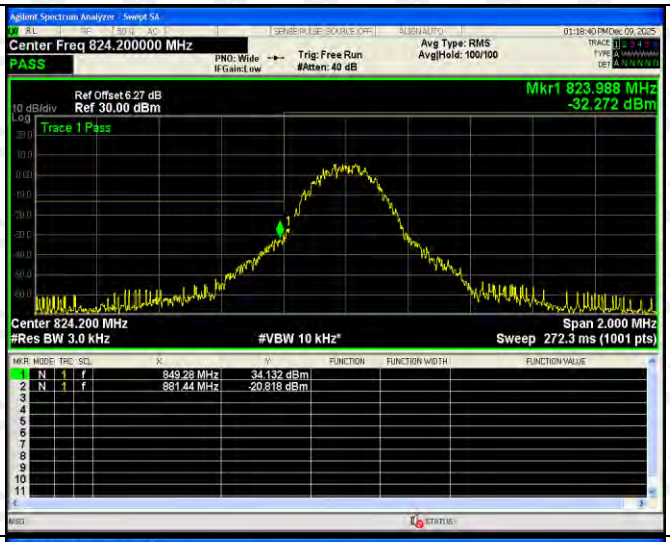	
EDGE High Band Emission		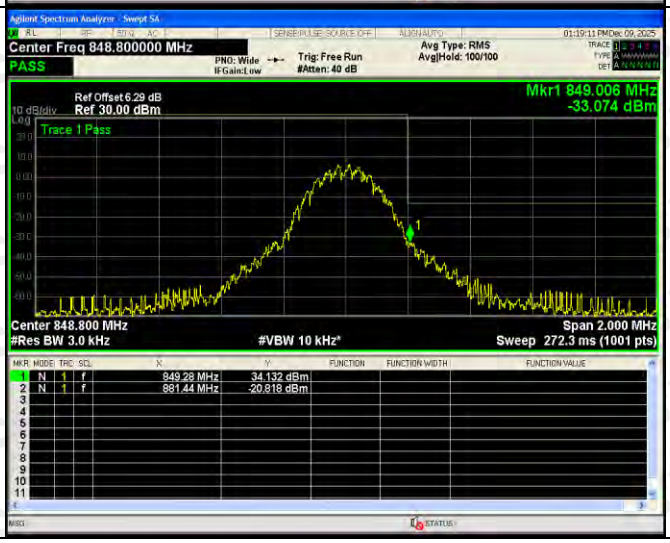	

For PCS Band

GSM Low Channel		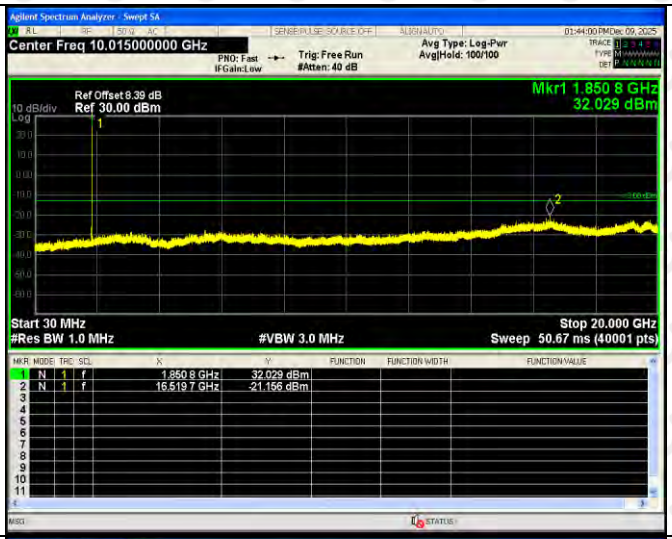
GSM Middle Channel		
GSM High Channel		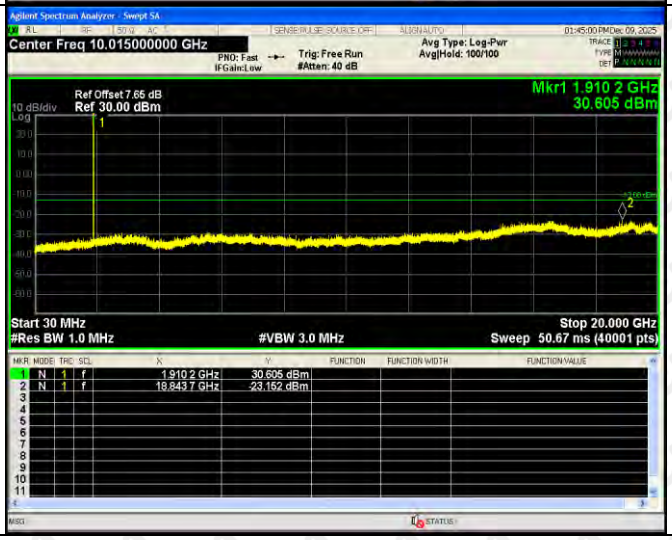

GSM Low Band Emission		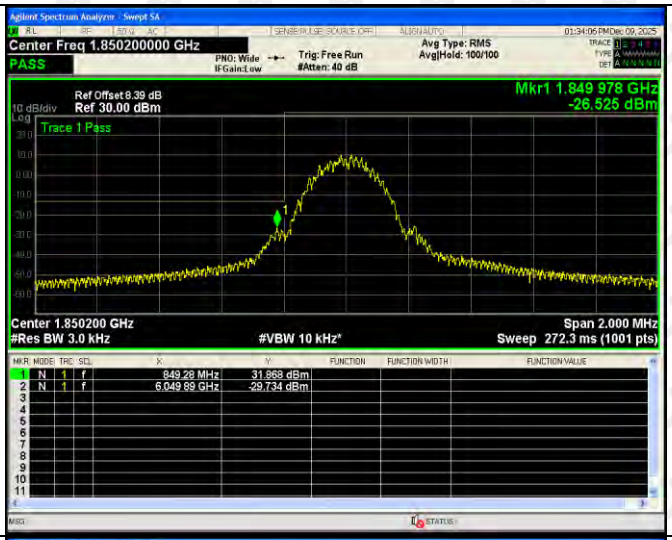	
GSM High Band Emission		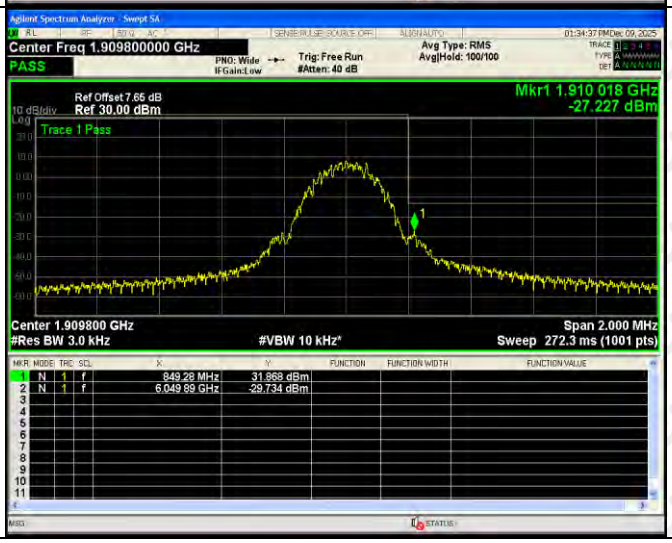	

GPRS Low Channel			
GPRS Middle Channel		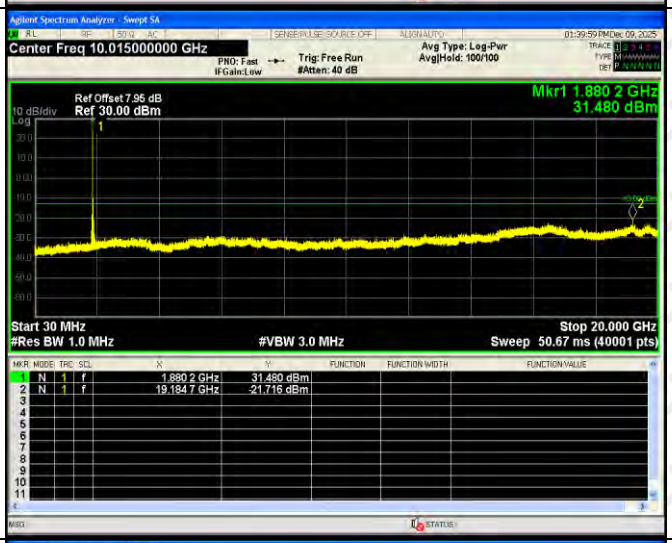	
GPRS High Channel		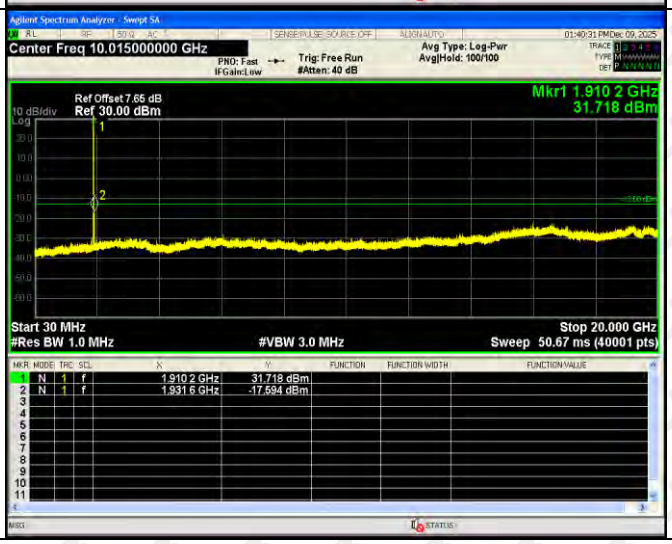	

GPRS Low Band Emission		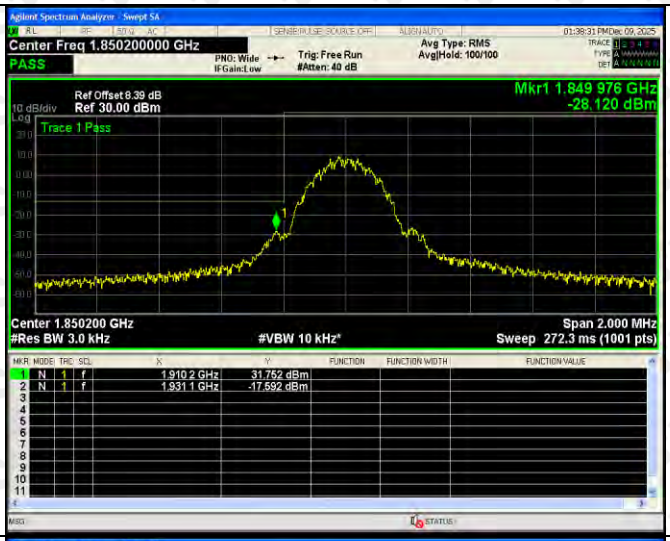	
GPRS High Band Emission		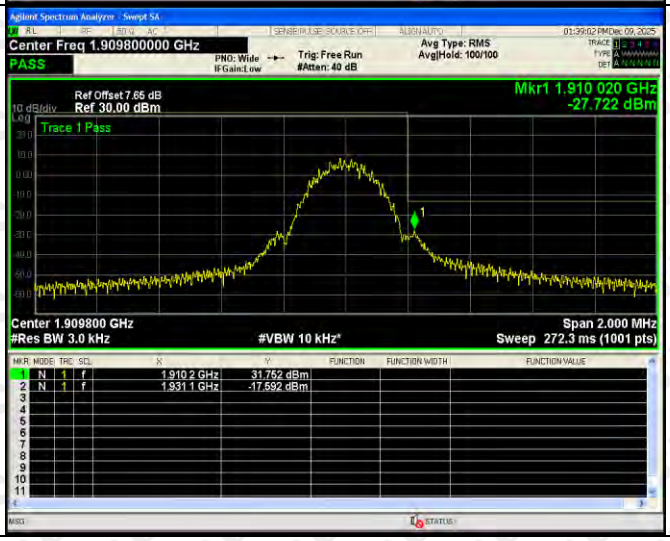	

EDGE Low Channel		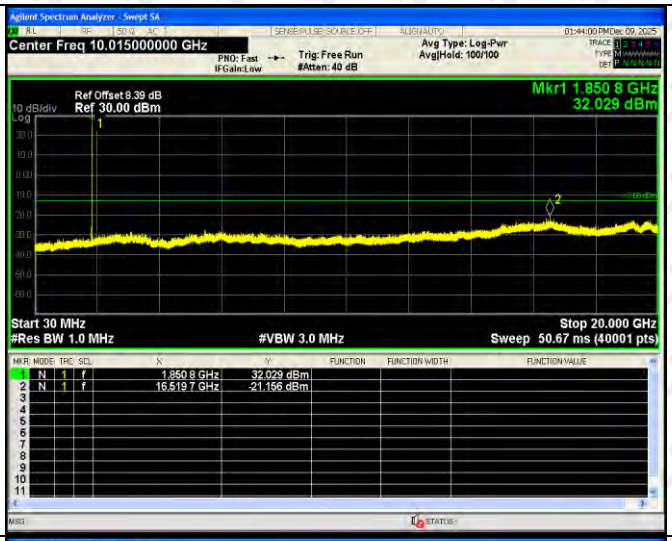	
EDGE Middle Channel			
EDGE High Channel		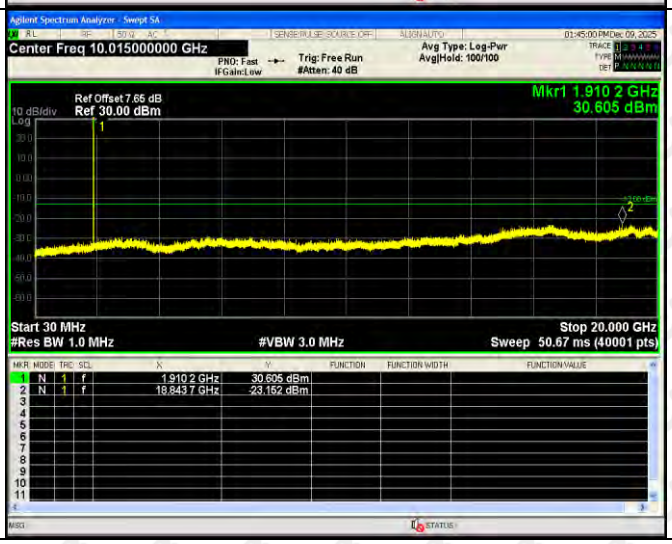	

EDGE Low Band Emission		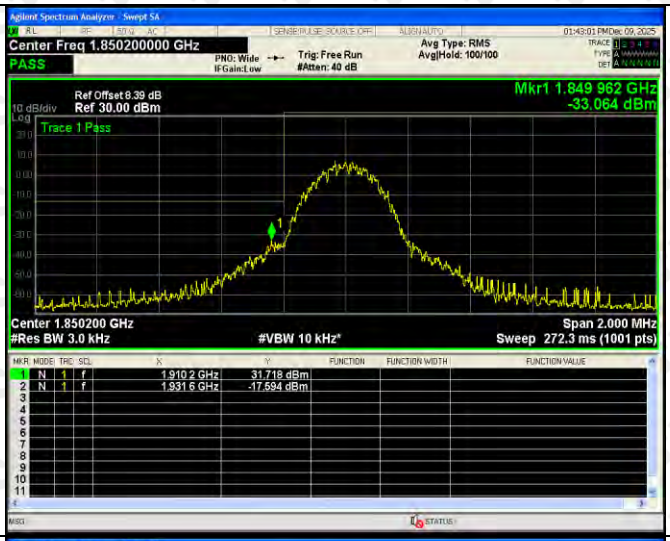	
EDGE High Band Emission		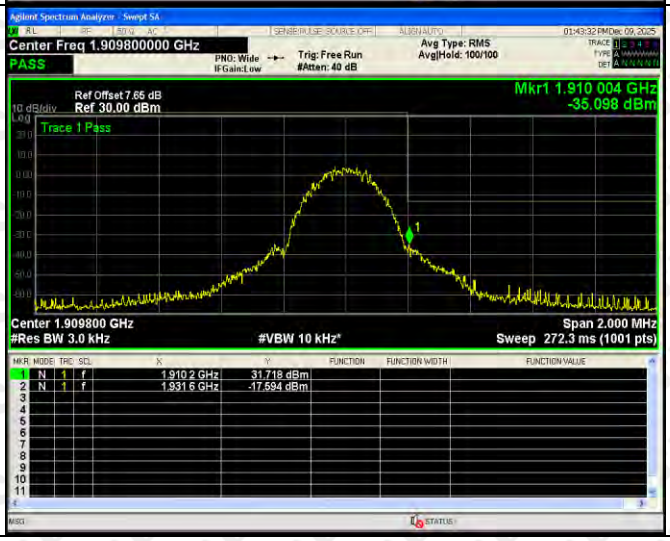	

For Band V

WCDMA Low Channel		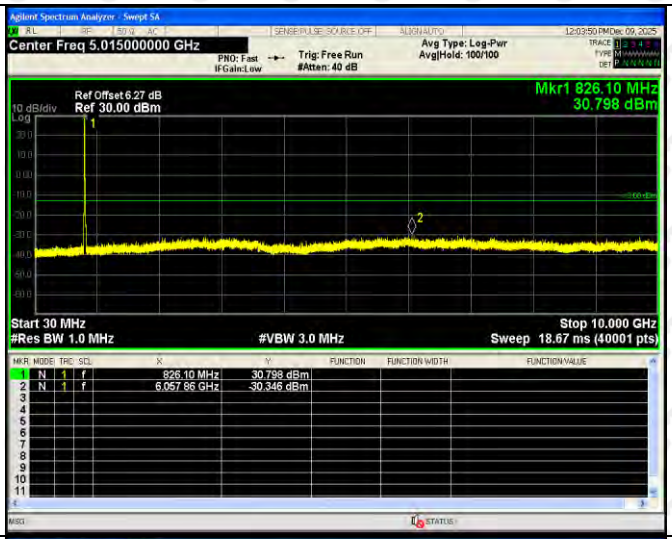	
WCDMA Middle Channel		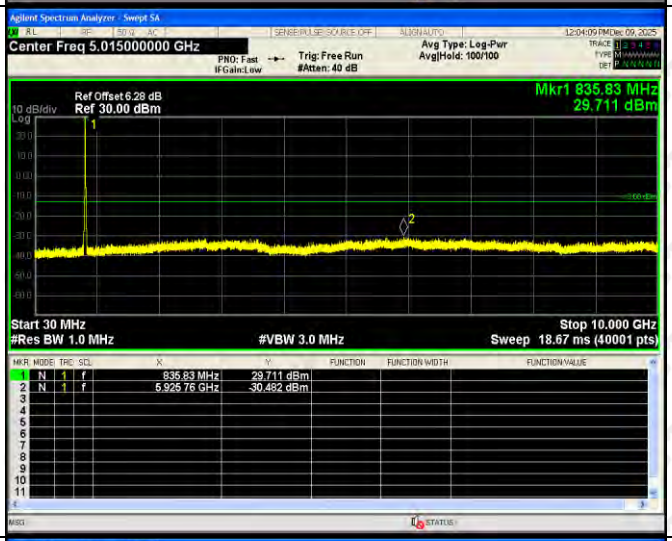	
WCDMA High Channel		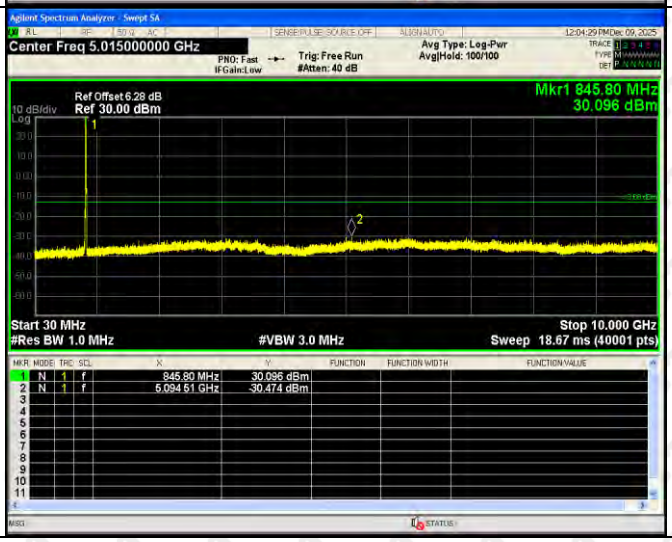	

WCDMA Low Band Spurious Emission			
WCDMA High Band Spurious Emission			

HSDPA Low Channel		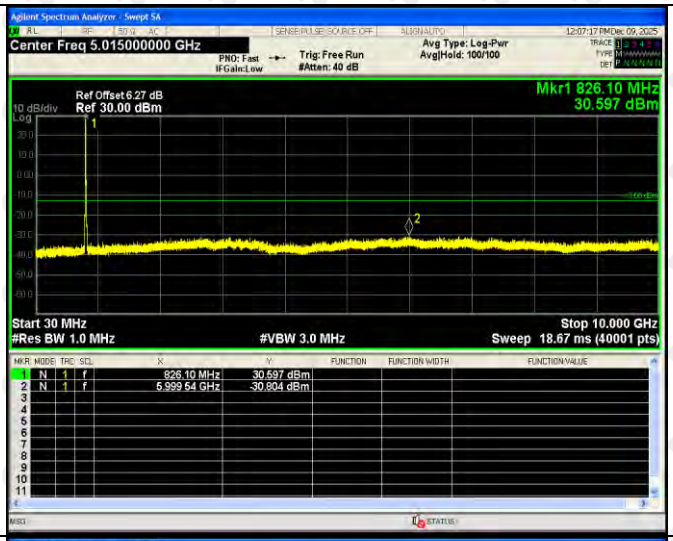	
HSDPA Middle Channel		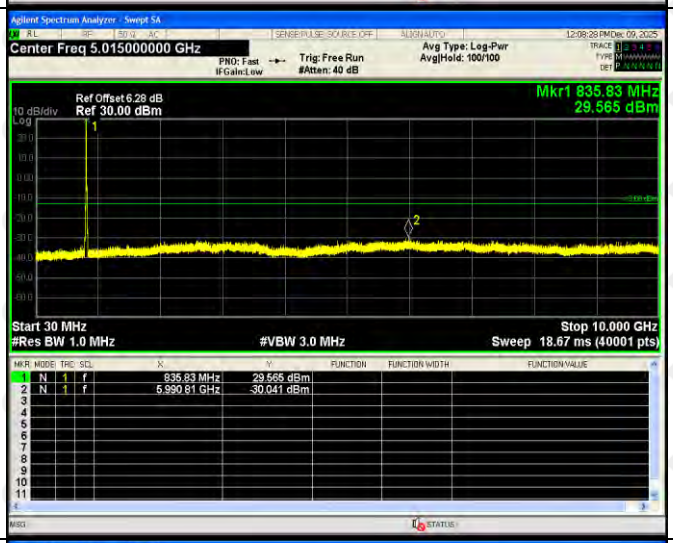	
HSDPA High Channel		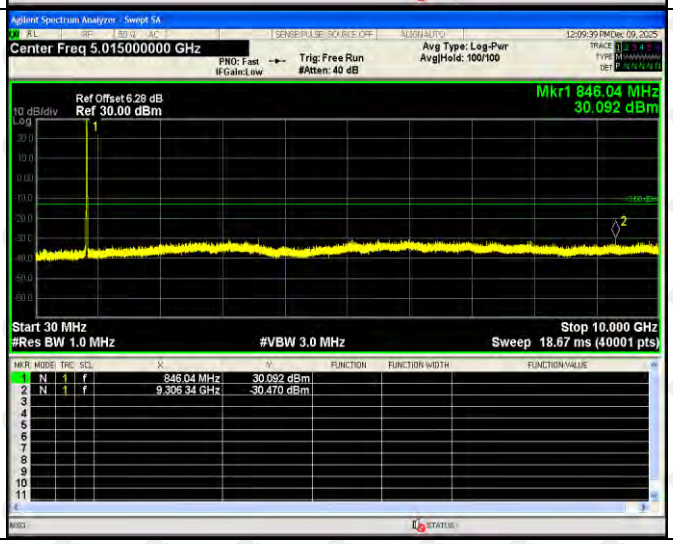	

HSDPA Low Band Spurious Emission		
HSDPA High Band Spurious Emission		

HSUPA Low Channel		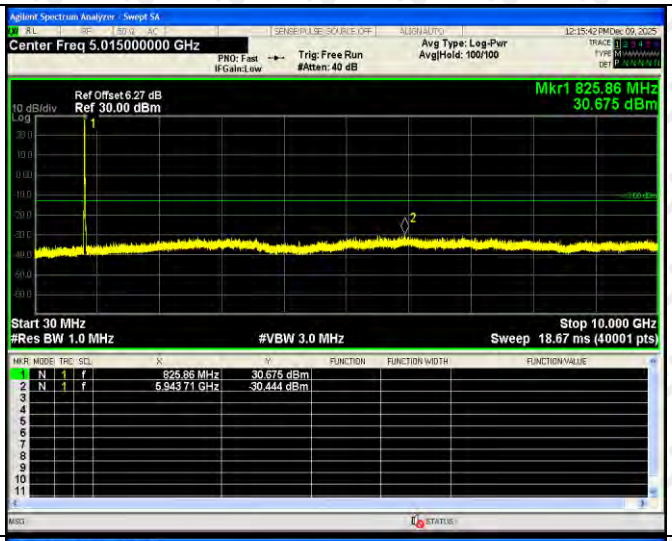	
HSUPA Middle Channel		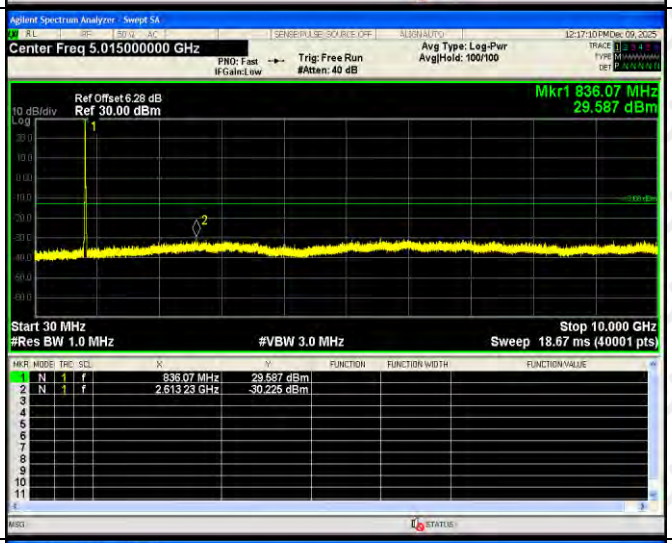	
HSUPA High Channel		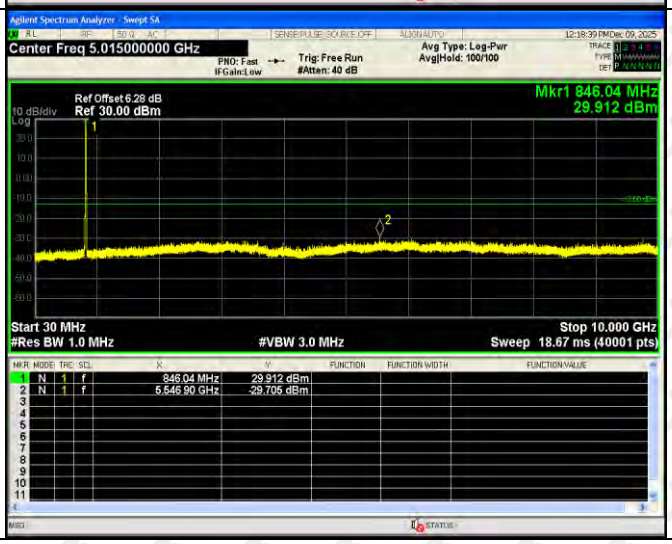	

HSUPA Low Band Spurious Emission			
HSUPA High Band Spurious Emission			

For Band II

WCDMA Low Channel		
WCDMA Middle Channel		
WCDMA High Channel		

WCDMA Low Band Spurious Emission			
WCDMA High Band Spurious Emission			

HSDPA Low Channel			
HSDPA Middle Channel		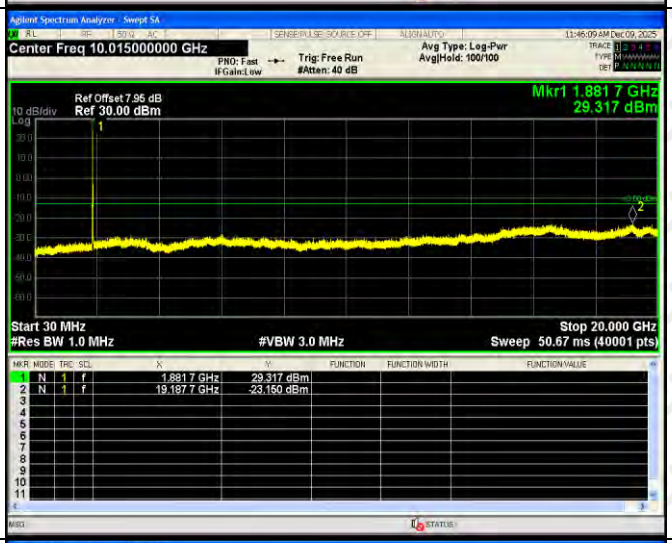	
HSDPA High Channel		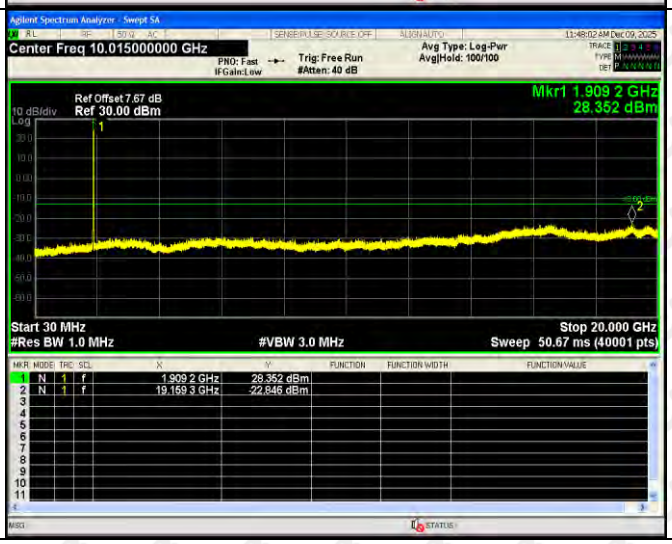	

HSDPA Low Band Spurious Emission			
HSDPA High Band Spurious Emission			

HSUPA Low Channel			
HSUPA Middle Channel		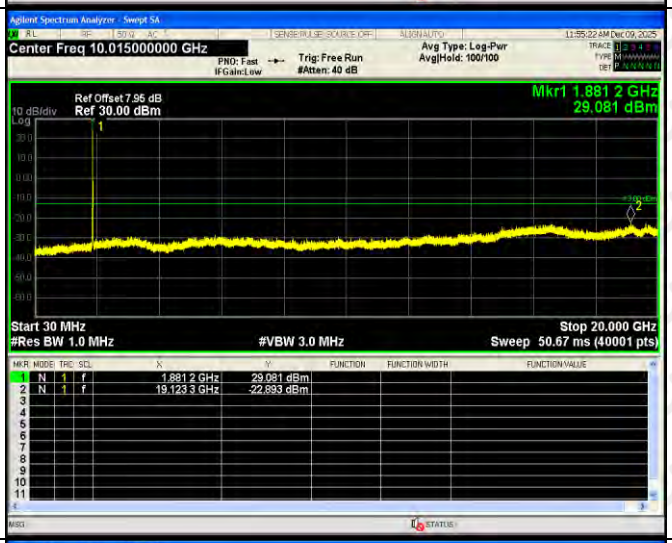	
HSUPA High Channel		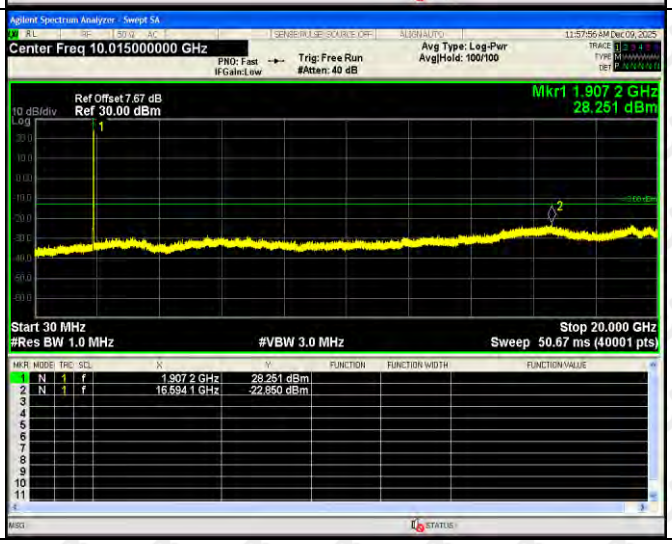	

HSUPA Low Band Spurious Emission			
HSUPA High Band Spurious Emission			

10. SPURIOUS RADIATED EMISSIONS

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

10.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB =43+10 Log_{10} (power out in Watts)

10.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	101 kPa
Test Voltage	DC 3.85V

10.4 Summary of Test Results/Plots

According to the data below, the FCC Part22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes are performed, but only the worst case is recorded in this report.

For Cellular Band_GSM850 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.2MHz)						
40.11	-73.89	3.9	-69.99	-13	-56.99	H
1639.45	-55.36	4.83	-50.53	-13	-37.53	H
2463.76	-50.45	8.08	-42.37	-13	-29.37	H
37.78	-71.48	4.02	-67.46	-13	-54.46	V
1644.27	-53.08	4.48	-48.60	-13	-35.60	V
2471.30	-48.28	8.2	-40.08	-13	-27.08	V
Middle Channel (836.6MHz)						
42.68	-73.88	3.84	-70.04	-13	-57.04	H
1670.83	-55.64	4.62	-51.02	-13	-38.02	H
2509.28	-51.67	8.25	-43.42	-13	-30.42	H
40.16	-74.89	4.25	-70.64	-13	-57.64	V
1671.78	-54.66	4.54	-50.12	-13	-37.12	V
2507.53	-56.69	8.35	-48.34	-13	-29.75	V
High Channel (848.8MHz)						
41.88	-68.78	4.22	-73.00	-13	-60.00	H
1695.76	-56.27	4.87	-61.14	-13	-48.14	H
2540.97	-51.21	8.38	-59.59	-13	-46.59	H
39.74	-71.17	4.02	-75.19	-13	-62.19	V
1697.08	-50.81	4.56	-55.37	-13	-42.37	V
2536.70	-53.84	8.41	-62.25	-13	-49.25	V

For PCS Band_GSM1900 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1850.2MHz)						
39.12	-68.56	4.34	-64.22	-13	-51.22	H
3699.60	-50.11	10.54	-39.57	-13	-26.57	H
5550.03	-53.31	13.37	-39.94	-13	-26.94	H
44.80	-68.59	4.34	-64.25	-13	-51.25	V
3690.86	-54.79	10.54	-44.25	-13	-31.25	V
5550.53	-58.26	13.37	-44.89	-13	-31.89	V
Middle Channel (1880MHz)						
45.94	-68.55	4.02	-64.53	-13	-51.53	H
3756.75	-51.41	10.71	-40.70	-13	-27.70	H
5639.03	-53.52	13.73	-39.79	-13	-26.79	H
38.83	-69.60	4.14	-65.46	-13	-52.46	V
3756.10	-52.89	10.22	-42.67	-13	-29.67	V
5630.73	-56.54	13.16	-43.38	-13	-30.38	V
High Channel (1909.8MHz)						
44.24	-66.60	4.02	-62.58	-13	-49.58	H
3811.01	-53.96	4.9	-49.06	-13	-36.06	H
5722.16	-49.27	8.09	-41.18	-13	-28.18	H
41.82	-63.02	4.25	-58.77	-13	-45.77	V
3816.13	-57.06	4.93	-52.13	-13	-39.13	V
5725.01	-62.69	8.43	-54.26	-13	-41.26	V

For Band 5 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
40.95	-72.71	3.91	-68.80	-13	-55.80	H
1649.11	-49.62	10.56	-39.06	-13	-26.06	H
2478.51	-55.00	13.5	-41.50	-13	-28.50	H
44.92	-66.74	3.93	-62.81	-13	-49.81	V
1647.03	-49.88	10.41	-39.47	-13	-26.47	V
2475.28	-53.16	13.16	-40.00	-13	-27.00	V
Middle Channel (836.6MHz)						
40.31	-69.77	4.02	-65.75	-13	-52.75	H
1668.64	-57.14	4.66	-52.48	-13	-39.48	H
2509.09	-42.68	8.34	-34.34	-13	-21.34	H
39.19	-62.51	4.17	-58.34	-13	-45.34	V
1663.46	-60.56	4.94	-55.62	-13	-42.62	V
2505.06	-59.05	8.19	-50.86	-13	-37.86	V
High Channel (846.6MHz)						
36.43	-68.42	3.87	-64.55	-13	-51.55	H
1692.04	-55.87	4.89	-50.98	-13	-37.98	H
2533.39	-41.85	8.42	-33.43	-13	-20.43	H
45.06	-54.80	3.95	-50.85	-13	-37.85	V
1689.68	-54.96	4.99	-49.97	-13	-36.97	V
2533.30	-62.56	8.12	-54.44	-13	-41.44	V

For Band 2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
40.14	-71.86	4.34	-67.52	-13	-54.52	H
3699.07	-54.86	10.54	-44.32	-13	-31.32	H
5549.68	-57.30	13.37	-43.93	-13	-30.93	H
42.26	-66.85	4.34	-62.51	-13	-49.51	V
3693.15	-51.96	10.54	-41.42	-13	-28.42	V
5549.02	-57.82	13.37	-44.45	-13	-31.45	V
Middle Channel (1880MHz)						
39.25	-72.00	4.02	-67.98	-13	-54.98	H
3757.24	-53.45	10.71	-42.74	-13	-29.74	H
5638.98	-59.67	13.73	-45.94	-13	-32.94	H
36.46	-74.02	4.14	-69.88	-13	-56.88	V
3752.14	-58.89	10.22	-48.67	-13	-35.67	V
5632.43	-58.03	13.16	-44.87	-13	-31.87	V
High Channel (1907.6MHz)						
46.09	-67.32	4.02	-63.30	-13	-50.30	H
3811.59	-63.10	4.9	-58.20	-13	-45.20	H
5720.03	-49.10	8.09	-41.01	-13	-28.01	H
46.19	-57.88	4.25	-53.63	-13	-40.63	V
3819.01	-58.46	4.93	-53.53	-13	-40.53	V
5722.89	-64.14	8.43	-55.71	-13	-42.71	V

Note: Result=Reading+ Correct, Margin= Result- Limit
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listedin the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

11. FREQUENCY STABILITY

11.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

11.2 Test Procedure

According to §2.1055, the following test procedure was performed.
The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.
The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

11.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

11.4 Summary of Test Results/Plots

For Cellular Band GSM Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	8.28	0.00990
40	3.85	9.17	0.01096
30	3.85	9.82	0.01174
20	3.85	9.97	0.01191
10	3.85	9.90	0.01183
0	3.85	10.24	0.01224
-10	3.85	9.97	0.01192
-20	3.85	10.40	0.01243
-30	3.85	10.89	0.01301

For PCS Band GSM Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	12.13	0.00645
40	3.85	12.83	0.00683
30	3.85	13.18	0.00701
20	3.85	12.57	0.00669
10	3.85	13.00	0.00692
0	3.85	13.60	0.00723
-10	3.85	13.72	0.00730
-20	3.85	13.87	0.00738
-30	3.85	14.16	0.00753

For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	8.80	0.01052
40	3.85	9.19	0.01098
30	3.85	9.32	0.01114
20	3.85	9.26	0.01107
10	3.85	10.44	0.01248
0	3.85	10.29	0.01230
-10	3.85	9.96	0.01191
-20	3.85	11.06	0.01322
-30	3.85	11.18	0.01336

For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	12.43	0.00661
40	3.85	12.90	0.00686
30	3.85	12.84	0.00683
20	3.85	12.46	0.00663
10	3.85	12.85	0.00684
0	3.85	14.10	0.00750
-10	3.85	14.10	0.00750
-20	3.85	13.80	0.00734
-30	3.85	14.87	0.00791

For Cellular Band EDGE Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	10.56	0.01262
40	3.85	11.07	0.01323
30	3.85	11.29	0.01349
20	3.85	11.42	0.01365
10	3.85	12.04	0.01440
0	3.85	11.51	0.01376
-10	3.85	12.38	0.01479
-20	3.85	12.89	0.01541
-30	3.85	12.88	0.01540

For PCS Band EDGE Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	-10.47	-0.00557
40	3.85	-9.92	-0.00527
30	3.85	-9.64	-0.00513
20	3.85	-9.48	-0.00504
10	3.85	-9.08	-0.00483
0	3.85	-9.28	-0.00494
-10	3.85	-8.57	-0.00456
-20	3.85	-8.31	-0.00442
-30	3.85	-7.66	-0.00407

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	0.16	0.00020
40	3.85	0.44	0.00052
30	3.85	0.74	0.00088
20	3.85	1.06	0.00126
10	3.85	0.69	0.00083
0	3.85	0.69	0.00083
-10	3.85	0.59	0.00071
-20	3.85	0.71	0.00085
-30	3.85	0.88	0.00105

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	-0.48	-0.00058
40	3.85	0.06	0.00007
30	3.85	0.45	0.00054
20	3.85	-0.08	-0.00010
10	3.85	0.88	0.00105
0	3.85	1.28	0.00153
-10	3.85	0.72	0.00086
-20	3.85	1.69	0.00201
-30	3.85	2.03	0.00243

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	0.34	0.00040
40	3.85	0.86	0.00103
30	3.85	0.72	0.00086
20	3.85	0.76	0.00091
10	3.85	1.69	0.00202
0	3.85	2.02	0.00241
-10	3.85	2.07	0.00248
-20	3.85	2.30	0.00275
-30	3.85	2.23	0.00267

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	0.38	0.00020
40	3.85	-0.24	-0.00013
30	3.85	-0.01	0.00000
20	3.85	0.24	0.00013
10	3.85	0.41	0.00022
0	3.85	1.20	0.00064
-10	3.85	1.23	0.00065
-20	3.85	0.76	0.00040
-30	3.85	0.66	0.00035

For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	-0.26	-0.00014
40	3.85	-0.54	-0.00029
30	3.85	0.42	0.00022
20	3.85	0.88	0.00047
10	3.85	0.37	0.00020
0	3.85	0.63	0.00033
-10	3.85	1.43	0.00076
-20	3.85	2.13	0.00113
-30	3.85	2.44	0.00130

For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.85	4.62	0.00246
40	3.85	4.43	0.00236
30	3.85	5.80	0.00308
20	3.85	5.67	0.00301
10	3.85	5.61	0.00299
0	3.85	6.20	0.00330
-10	3.85	7.02	0.00374
-20	3.85	6.35	0.00338
-30	3.85	7.06	0.00376

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	10.93	0.01306
	3.85	11.00	0.01314
	4.43	11.73	0.01402
Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	14.68	0.00781
	3.85	14.32	0.00761
	4.43	14.55	0.00774
Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	10.59	0.01266
	3.85	10.98	0.01312
	4.43	11.39	0.01361
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	14.30	0.00760
	3.85	14.88	0.00792
	4.43	14.65	0.00779
Reference Frequency(Middle Channel): EDGE 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	12.52	0.01498
	3.85	12.62	0.01510
	4.43	13.31	0.01592
Reference Frequency(Middle Channel): EDGE 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	-7.54	-0.00401
	3.85	-7.74	-0.00412
	4.43	-7.13	-0.00379

Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	1.58	0.00189
	3.85	1.74	0.00208
	4.43	1.20	0.00144
Reference Frequency(Middle Channel): WCDMA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	1.12	0.00065
	3.85	0.46	0.00026
	4.43	1.03	0.00060
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	2.01	0.00107
	3.85	2.43	0.00291
	4.43	3.00	0.00359

Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	1.42	0.00170
	3.85	2.05	0.00245
	4.43	2.14	0.00256
Reference Frequency(Middle Channel): HSDPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	5.64	0.00326
	3.85	6.16	0.00356
	4.43	6.65	0.00384
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	7.39	0.00393
	3.85	6.73	0.00358
	4.43	6.99	0.00372

Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	2.40	0.00287
	3.85	2.43	0.00290
	4.43	3.14	0.00375
Reference Frequency(Middle Channel): HSUPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	5.96	0.00344
	3.85	5.46	0.00315
	4.43	6.42	0.00371
Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.27	8.42	0.00448
	3.85	9.13	0.00485
	4.43	9.71	0.00517

12. EUT TEST PHOTO

Radiated Emission

Below 1G

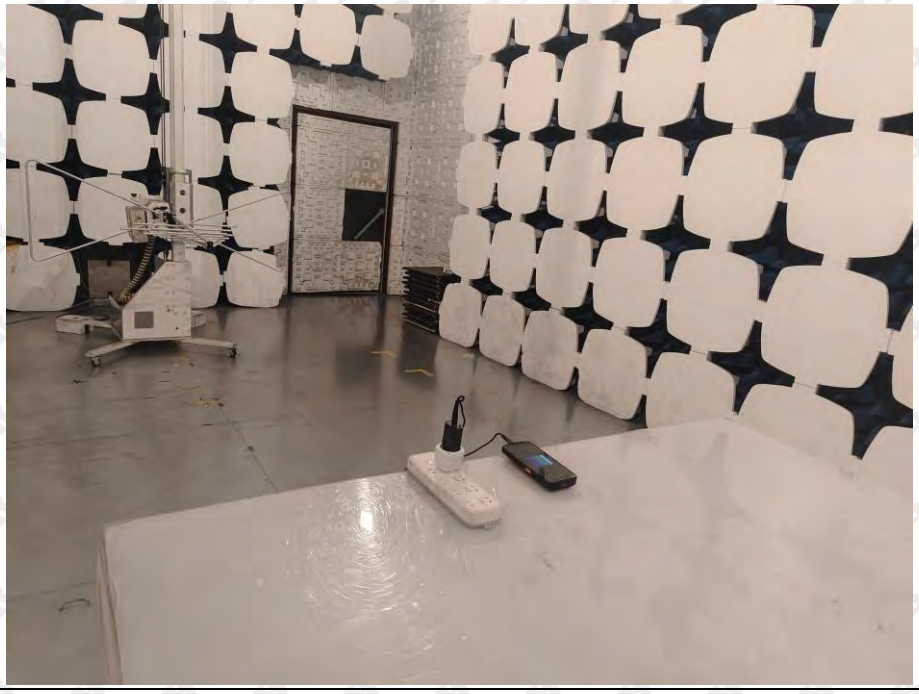

Above 1G

Conducted emission

※※※※※ **END OF REPORT** ※※※※※