

Test Report

Report No. : MTi260601042-0112E2
Date of Issue : 2026-06-29
Applicant : BMX PTE.LTD.
Product : SolidSafe™ Air Titanium Power Bank
Model(s) : B3-10, B3-10-BK, B3-10-GD, B3-10-SI
FCC ID : 2BTRX-B310

Shenzhen Microtest Co., Ltd.

TEST REPORT

Report No.: MTi260601042-0112E2

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	4
1.3	Description of support units	5
2	Measurement uncertainty	5
3	Test facilities and accreditations.....	5
3.1	Test laboratory	5
4	List of test equipment	6
5	Test result	7
5.2	Test setup	8
5.3	Test Procedures.....	8
5.4	Information of test equipment.....	9
5.5	Test results.....	10
	Photographs of the Test Setup.....	18
	Photographs of the EUT	18

TEST REPORT

Report No.: MTi260601042-0112E2

Test Result Certification		
Applicant	BMX PTE.LTD.	
Applicant Address	190 CLEMENCEAU AVENUE, #06-08, SINGAPORE SHOPPING CENTRE, SINGAPORE 239924	
Manufacturer	BMX PTE.LTD.	
Manufacturer Address	190 CLEMENCEAU AVENUE, #06-08, SINGAPORE SHOPPING CENTRE, SINGAPORE 239924	
Factory	Huizhou Hairun Technology Co., LTD	
Factory Address	502, 5th Floor, No.2 Building, No.2 Xinglin Road, Qibu Area of China-Korea Huizhou Industrial Park, Zhongkai High-tech District, Huizhou City, China	
Product description		
Product name	SolidSafe™Air Titanium Power Bank	
Trademark		
Model name	B3-10	
Series Model(s)	B3-10-BK, B3-10-GD, B3-10-SI	
Standards	FCC CFR 47 PART 1, § 1.1310 FCC CFR 47 Part 2.1093	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2026-06-05 to 2026-06-15	
Test Result	Pass	
Prepared by:	Maleah Deng	
Reviewed by:	David Lee	
Approved by:	Lewis Lian	

TEST REPORT

Report No.: MTi260601042-0112E2

1 General Description

1.1 Description of the EUT

Product name:	SolidSafe™Air Titanium Power Bank
Model name:	B3-10
Series Model:	B3-10-BK, B3-10-GD, B3-10-SI
Model difference:	All the models are the same circuit and module, except the model name.
Electrical rating:	Input: USB-C: DC 5V/3A, DC 9V/3A, DC 12V/2.5A, DC 15V/2A(30W Max) USB-C Output: DC 5V/3A, DC 9V3A, DC 10V/2.25A, DC 12V/2.5A, DC 15V/2A(30W Max) Wireless Output: 5W/7.5W/10W/15W/25W USB-C+Wireless Output: 10W+5W(Max 15W) Battery Capacity: 5000mAh(7.7V DC)
Accessories:	Cable: USB-C to USB-C cable 30cm*1
Hardware version:	MS18-QI2.2 ABN-741
Software version:	GPM32FD0338B_0063AE4B
Test sample(s) number:	MTi260601042-01-E001
RF specification:	
Operation frequency:	115-205kHz(5W, 7.5W, 10W); 360kHz(15W MPP, 25W)
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Charging+Wireless Output(5W)
Mode2	Wireless Output(5W)
Mode3	Wireless Output(7.5W)
Mode4	Wireless Output(10W)
Mode5	Wireless Output(15W MPP)
Mode6	Wireless Output(25W)
Mode7	Stand by

TEST REPORT

Report No.: MTi260601042-0112E2

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Mobile phone	S9+	/	Samsung
Mobile phone	iPhone 16 pro max	/	APPLE
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	± 0.7 dB
Electric field measurements(3kHz~10MHz)	± 1.6 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

TEST REPORT

Report No.: MTi260601042-0112E2

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+E3D	3101	2025/9/25	2028/9/24

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.8	2.8	/	/

TEST REPORT

Report No.: MTi260601042-0112E2

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density


Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

TEST REPORT

Report No.: MTi260601042-0112E2

5.2 Test setup

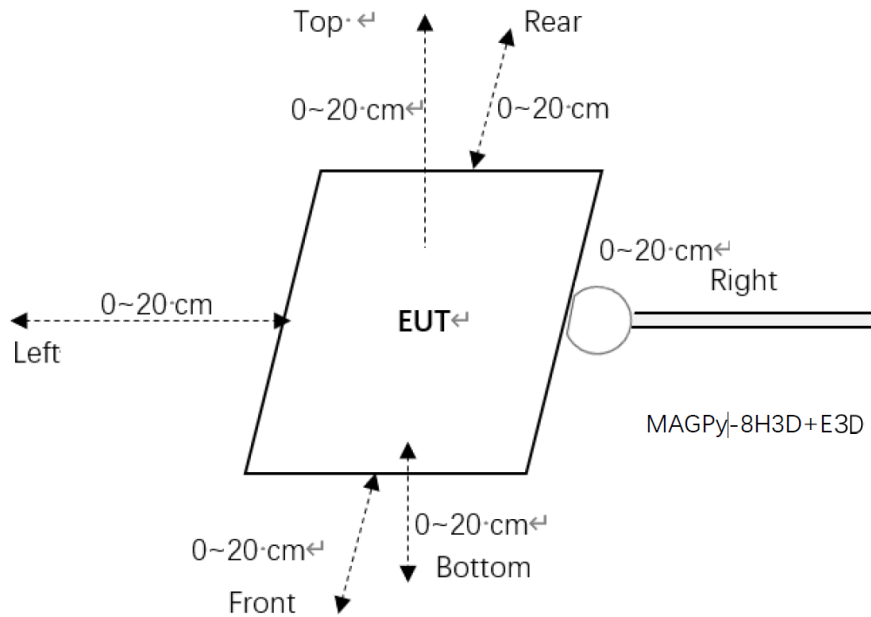

Note: tips mode of the test probe is used for 0cm measurement.


5.3 Test Procedures

a. H-field measurements should be taken 0 cm ~ 20 cm with 2 cm increments from the center of the probe.

The center of the probe to the tip surface of the probe is 18.5 mm, so the directly testing can be performed at the probe center from 2 cm to 20 cm.

To measure the 0 cm H-field, the probe tip mode is used. The total H-field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H-field measured at the top and bottom sensors, H_{top} and H_{bottom} , as well as the normalized H-field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm)

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i$$

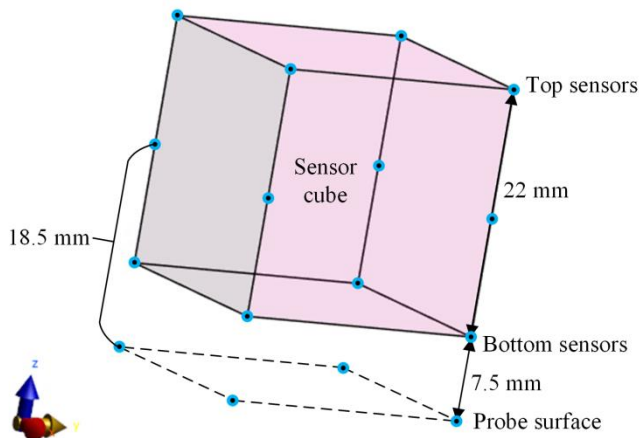

TEST REPORT

Report No.: MTi260601042-0112E2

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+E3D	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

Item	Specification
Test frequency range:	3kHz ~ 10MHz
Probe sensitivity	E-field: 0.08-2000 V/m H-field: 0.1-3200 A/m
Probe level response	E-field: ± 1 dB H-field: ± 1 dB
linearity error	E-field: ± 0.3 dB H-field: ± 0.3 dB
Isotropy	E-field: ± 0.8 dB H-field: ± 0.6 dB

TEST REPORT

Report No.: MTi260601042-0112E2

5.5 Test results

All client power has been assessed (1%, 50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.54	1.63	94.48%
Left	1.05		
Right	0.48		
Front	1.11		
Rear	0.41		
Bottom	1.4		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.73	1.63	69.33%
Left	1.13		
Right	0.77		
Front	0.7		
Rear	1.06		
Bottom	0.22		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.39	1.63	46.63%
Left	0.76		
Right	0.37		
Front	0.35		
Rear	0.67		
Bottom	0.13		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.39	1.63	39.88%
Left	0.65		
Right	0.37		
Front	0.35		
Rear	0.52		
Bottom	0.13		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.08	1.63	9.20%
Left	0.15		
Right	0.09		
Front	0.10		
Rear	0.12		
Bottom	0.04		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.05	1.63	6.75%
Left	0.11		
Right	0.05		
Front	0.06		
Rear	0.05		
Bottom	0.03		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.038	1.63	5.09%
Left	0.083		
Right	0.038		
Front	0.045		
Rear	0.038		
Bottom	0.023		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.024	1.63	3.19%
Left	0.052		
Right	0.024		
Front	0.028		
Rear	0.024		
Bottom	0.014		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.012	1.63	1.66%
Left	0.027		
Right	0.012		
Front	0.014		
Rear	0.012		
Bottom	0.007		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.010	1.63	1.41%
Left	0.023		
Right	0.010		
Front	0.012		
Rear	0.010		
Bottom	0.006		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.005	1.63	0.67%
Left	0.011		
Right	0.005		
Front	0.006		
Rear	0.005		
Bottom	0.003		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.32	1.63	49.08%
Left	0.24		
Right	0.36		
Front	0.8		
Rear	0.16		
Bottom	0.18		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.29	1.63	44.79%
Left	0.22		
Right	0.33		
Front	0.73		
Rear	0.15		
Bottom	0.16		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.22	1.63	33.74%
Left	0.17		
Right	0.25		
Front	0.55		
Rear	0.11		
Bottom	0.12		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.12	1.63	18.40%
Left	0.09		
Right	0.14		
Front	0.30		
Rear	0.06		
Bottom	0.07		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	5.52%
Left	0.03		
Right	0.04		
Front	0.09		
Rear	0.02		
Bottom	0.02		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.019	1.63	3.25%
Left	0.018		
Right	0.024		
Front	0.053		
Rear	0.012		
Bottom	0.015		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.012	1.63	2.02%
Left	0.011		
Right	0.015		
Front	0.033		
Rear	0.008		
Bottom	0.009		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.003	1.63	0.67%
Left	0.004		
Right	0.005		
Front	0.011		
Rear	0.002		
Bottom	0.003		

TEST REPORT

Report No.: MTi260601042-0112E2

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0026	1.63	0.59%
Left	0.0035		
Right	0.0044		
Front	0.0096		
Rear	0.0017		
Bottom	0.0026		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0018	1.63	0.40%
Left	0.0024		
Right	0.0030		
Front	0.0066		
Rear	0.0012		
Bottom	0.0018		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0004	1.63	0.09%
Left	0.0005		
Right	0.0006		
Front	0.0014		
Rear	0.0003		
Bottom	0.0004		

TEST REPORT

Report No.: MTi260601042-0112E2

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

TEST REPORT

Report No.: MTi260601042-0112E2

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****