




Guangdong Gaopuda Group Co., Ltd.

Material Recognition Statement

APPROVAL SHEET

Customer Material Code	3010800515			
Customer Specification Model	43*5.3*0.3 T / 0.25×4 P-12TS (19×39 mm) / Sensitivity: 8.1±10% μH/L -37 mm / Coated with 38 layers of round white adhesive on the coil surface / Double-sided adhesive laver thickness: 4 mm			
Supplier Name	Guangdong Dingzhi Electronic Technology Co., Ltd.			
Supplier Material Name	Wireless Charging Coil			
Supplier Specification Model/Brand	TX-DZ4305.3003-K8.1-L37 (with dual slots) soft magnet			
Manufacturer Seal Field	engineering,	make	quality	approve
Version Number: Change Record:	lipinghui	lipinghui	Liu Yilian	Ma Xiangping
Version: Revision Details:				
Version: Revision Details:				
Version: Revision Details:				
Version: Revision Details:				
Address: First Floor, No.1231 Yingbin Avenue, Longmen County, Huizhou City, Guangdong Province				
TEL: 13147097490				
FAX:				
Shenzhen Jindian High-Tech Co., Ltd.	confirmation	review	review	



Product Specifications sheet



Specification No.	202606011001
Effective date	2026/6/11

Customer Name:	Gaopuda
Product Model	Wireless Charging Coil (Ultra-Thin Model)
DZ Part No.	TX-DZ4305.3003-K8.1-L37 (with dual slots) soft magnet
Customer item No	3010800515

【☒ New issue, ☐ version revision】

【 This specification includes contents and 4 pages in total 】 【 RoHS Compliant Parts 】

organize	Check	Approval
Li ping hui	/	Ma xiangping

Guang Dong Top Wiser Electronic Technology Co., Ltd

Factory address:Address; 1F, 1231 Yingbin Avenue, Longmen County
, Huizhou City, Guangdong Province

Tel: 13147097490

【Within 30 days after the customer receives this acknowledgement, please return it with your signature and seal. If it is overdue, it will be deemed that the production will be carried out according to the standards of this acknowledgement】.

【customer approval】

Date:

Recognition status: ☐ full recognition ☐ conditional recognition ☐ refusal


Approval	Review	Recheck	Check

remark:

Product Specifications sheet

Customer Name:	Gaopuda	item	3010800515
DZ Part No.	DZ4305.3003-K8.1-L37 (with dual slots) soft ma	Specification No.	
Issue/Revision History			
Version	Effective date	Change content / reason	Approval
01	2026/6/11	New specification release	Ma XiangPing
organize		check	approval
Li ping hui		/	Ma XiangPing

Product Specifications sheet

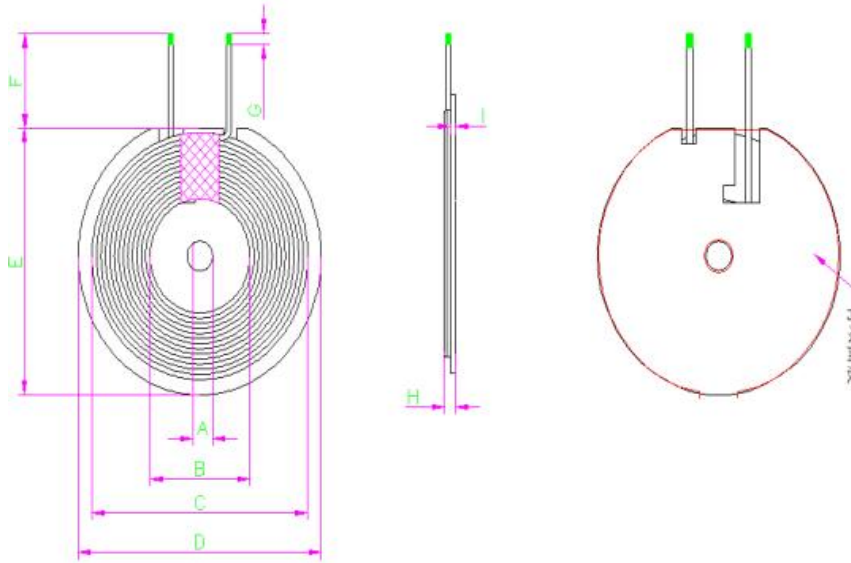Customer Name:	Gaopuda	Customer item No	3010800515		
DZ Part No	X-DZ4305.3003-K8.1-L37 (with dual slots) soft magnet	Specification No	202608018001	Version	01
◆、Overall dimensions 			(unit: mm)		
			A	5.3 ±0.5	
			B	19+/-1mm	
			C	39+1/-1.5mm	
			D	43+0.5/-1mm	
			E	43+0.5/-1mm	
			F	37.0 ±3.0	
			G	3.0 ±2.0	
			H	1.6max (Output Port)	
			I	0.30 ±0.02(Diskthickness)	
			(1) Wire diameter: 0.25*4P Leeds wire		
			(2) Number of windings: 12TS		
			(3) Whether the start and end lines intersect: Yes		
			(4) The coil is wrapped with double layers of 4 mm wide high-temperature adhesive tape.		
			(5) The coil and magnetic plate must be glued to the center.		
			(6) Apply 38 white adhesive to the coil surface		
◆、Electrical characteristics::					
parameter	specification	Test conditions	Test instrument		
L0	8.1 ±10% μH	100KHz/1V	■TH1816B		
Q	>25 min	100KHz/1V	■TH1816B		
DCR	<110 mΩ	@ 25℃	■CH-502BC		
◆、Temperature class:					
operating temperature	-40℃~ 125℃				
◆、list of materials:					
Item	Product Name	Material specification	Supplier	Remark	
1	Magnetic sheet	42.5*5.3*0.3T		soft magnetism	
2	Copper wire	0.25*4P		enameled wire	
3	tin	107H		ROHS	
4	High-strength adhesive tape	Double 4MM		ROHS	
5	application of	Round White Glue		ROHS	
organize		check		approval	
Lipinghui		/		Ma Xiangping	