




Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	12.55	<=30	Pass
NVNT	b	2437	12.5	<=30	Pass
NVNT	b	2462	12.27	<=30	Pass
NVNT	g	2412	11.03	<=30	Pass
NVNT	g	2437	10.87	<=30	Pass
NVNT	g	2462	10.86	<=30	Pass
NVNT	n20	2412	9.58	<=30	Pass
NVNT	n20	2437	9.31	<=30	Pass
NVNT	n20	2462	9.2	<=30	Pass
NVNT	n40	2422	8.35	<=30	Pass
NVNT	n40	2437	8.57	<=30	Pass
NVNT	n40	2452	8.27	<=30	Pass





-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit (MHz)	Verdict
NVNT	b	2412	8.107	≥ 0.5	Pass
NVNT	b	2437	8.115	≥ 0.5	Pass
NVNT	b	2462	8.148	≥ 0.5	Pass
NVNT	g	2412	15.214	≥ 0.5	Pass
NVNT	g	2437	14.281	≥ 0.5	Pass
NVNT	g	2462	13.938	≥ 0.5	Pass
NVNT	n20	2412	15.323	≥ 0.5	Pass
NVNT	n20	2437	15.442	≥ 0.5	Pass
NVNT	n20	2462	15.147	≥ 0.5	Pass
NVNT	n40	2422	32.102	≥ 0.5	Pass
NVNT	n40	2437	27.552	≥ 0.5	Pass
NVNT	n40	2452	29.016	≥ 0.5	Pass

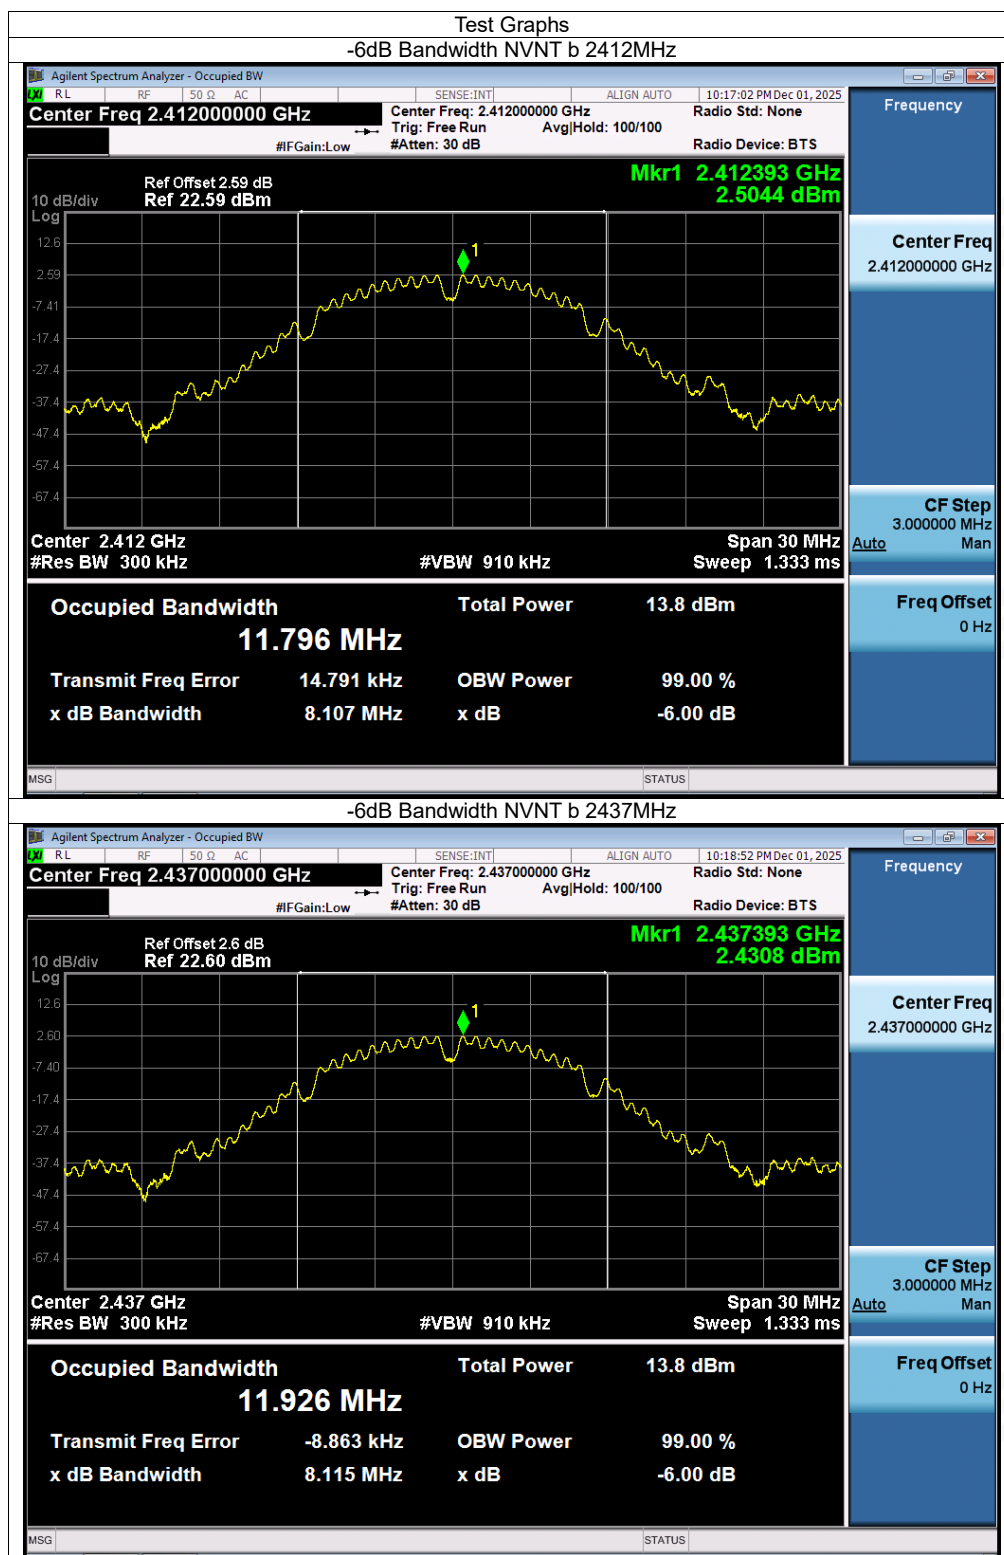


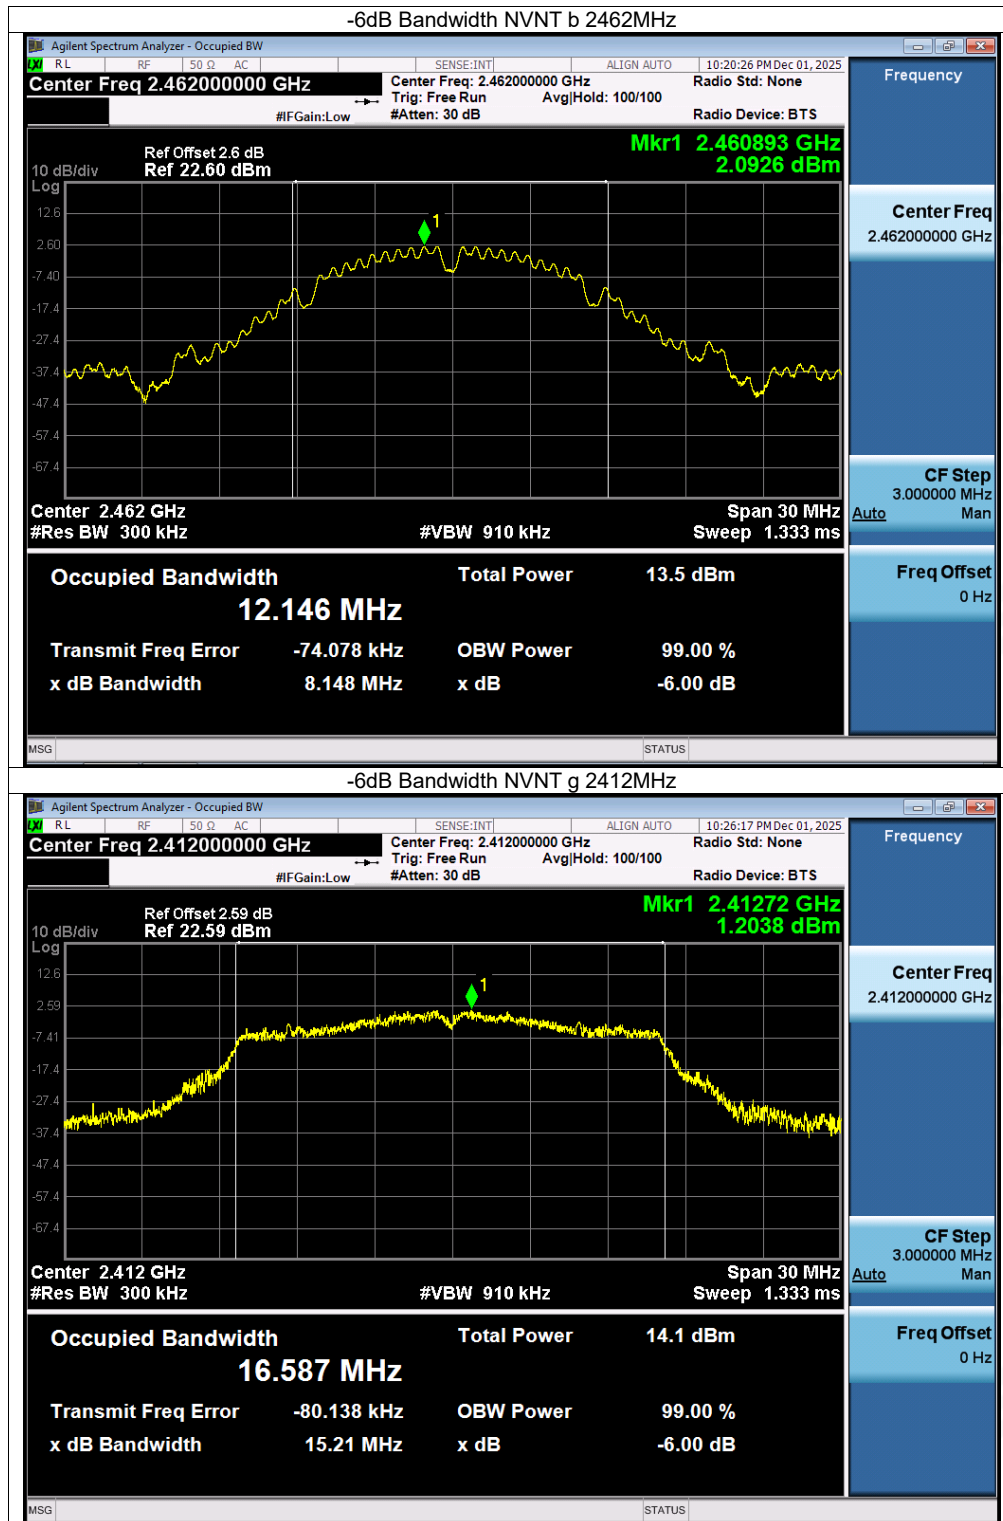

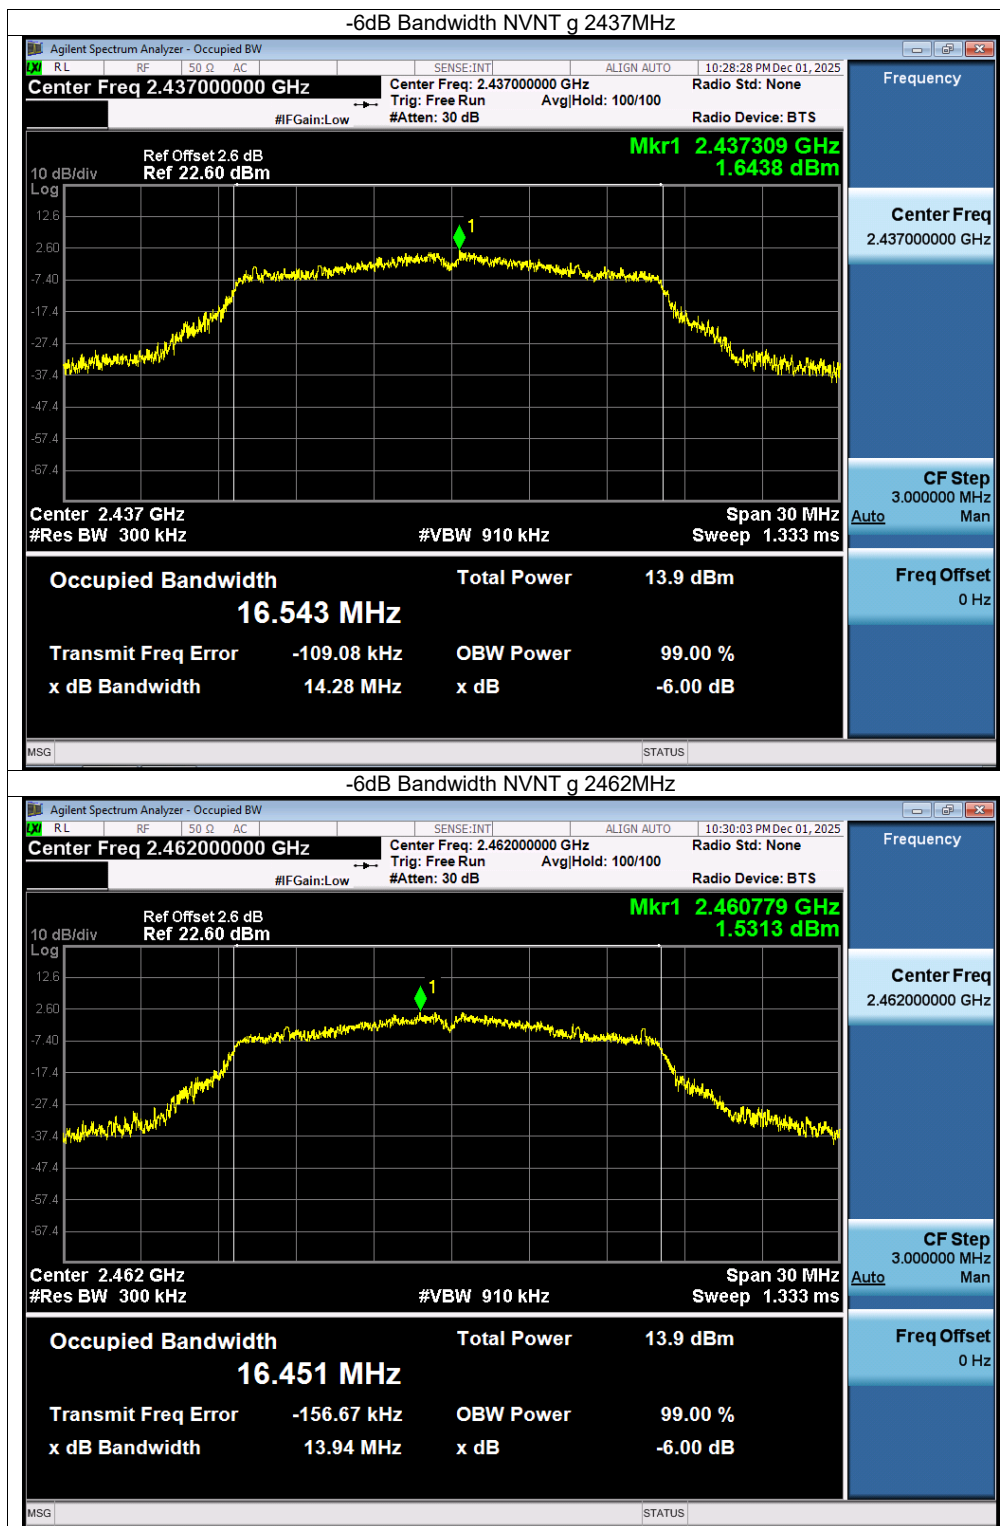

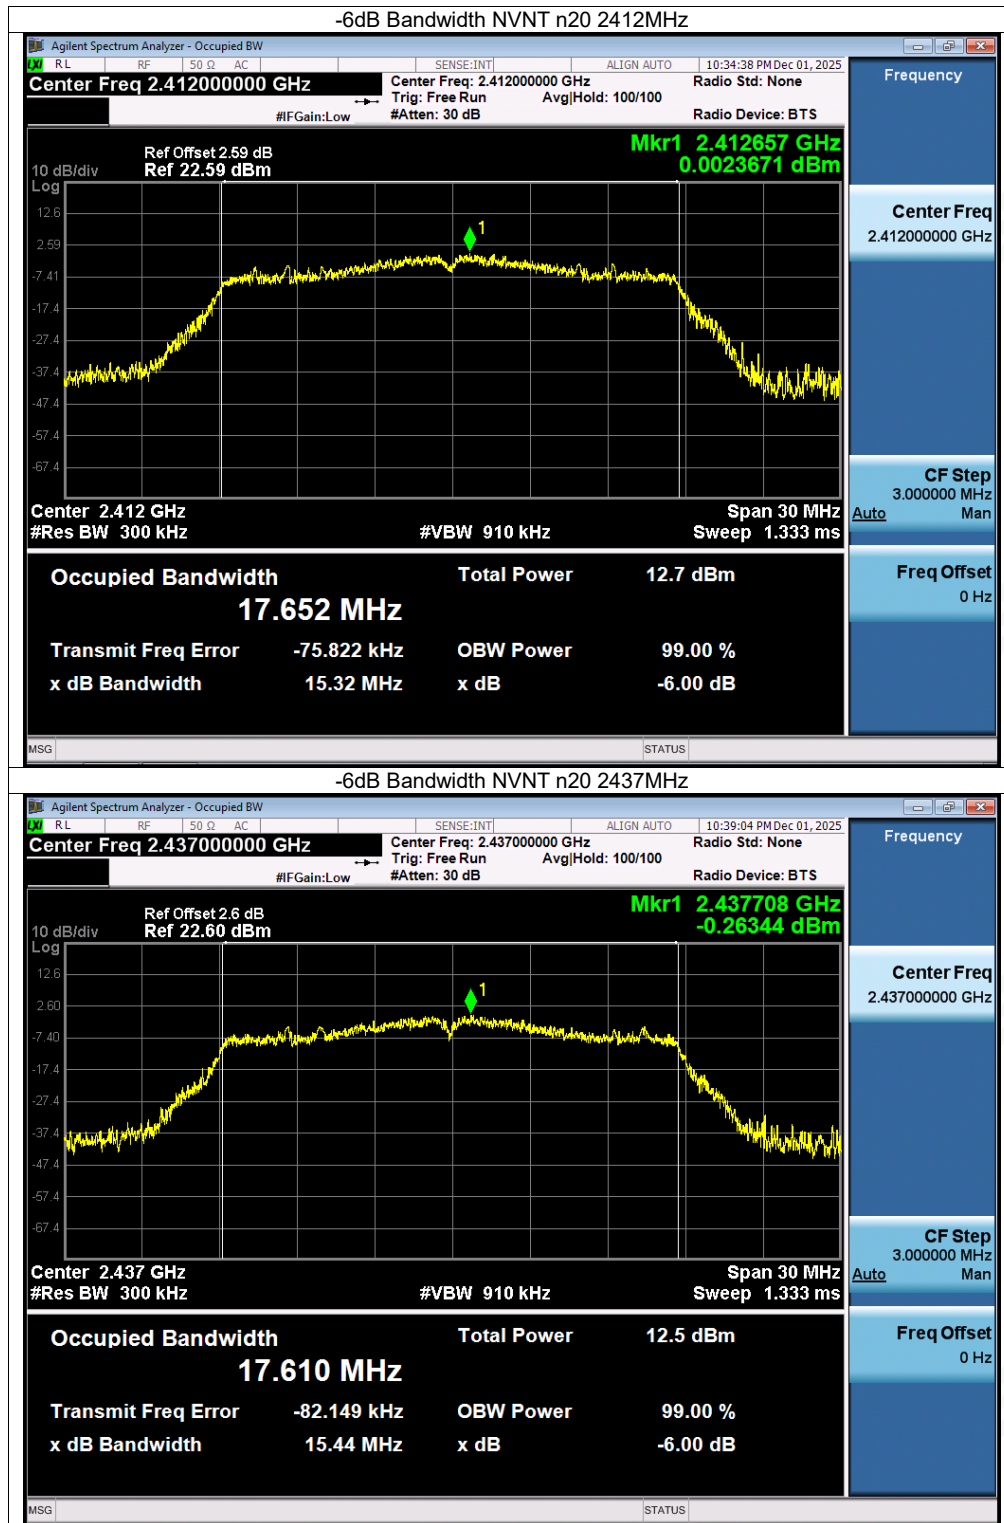

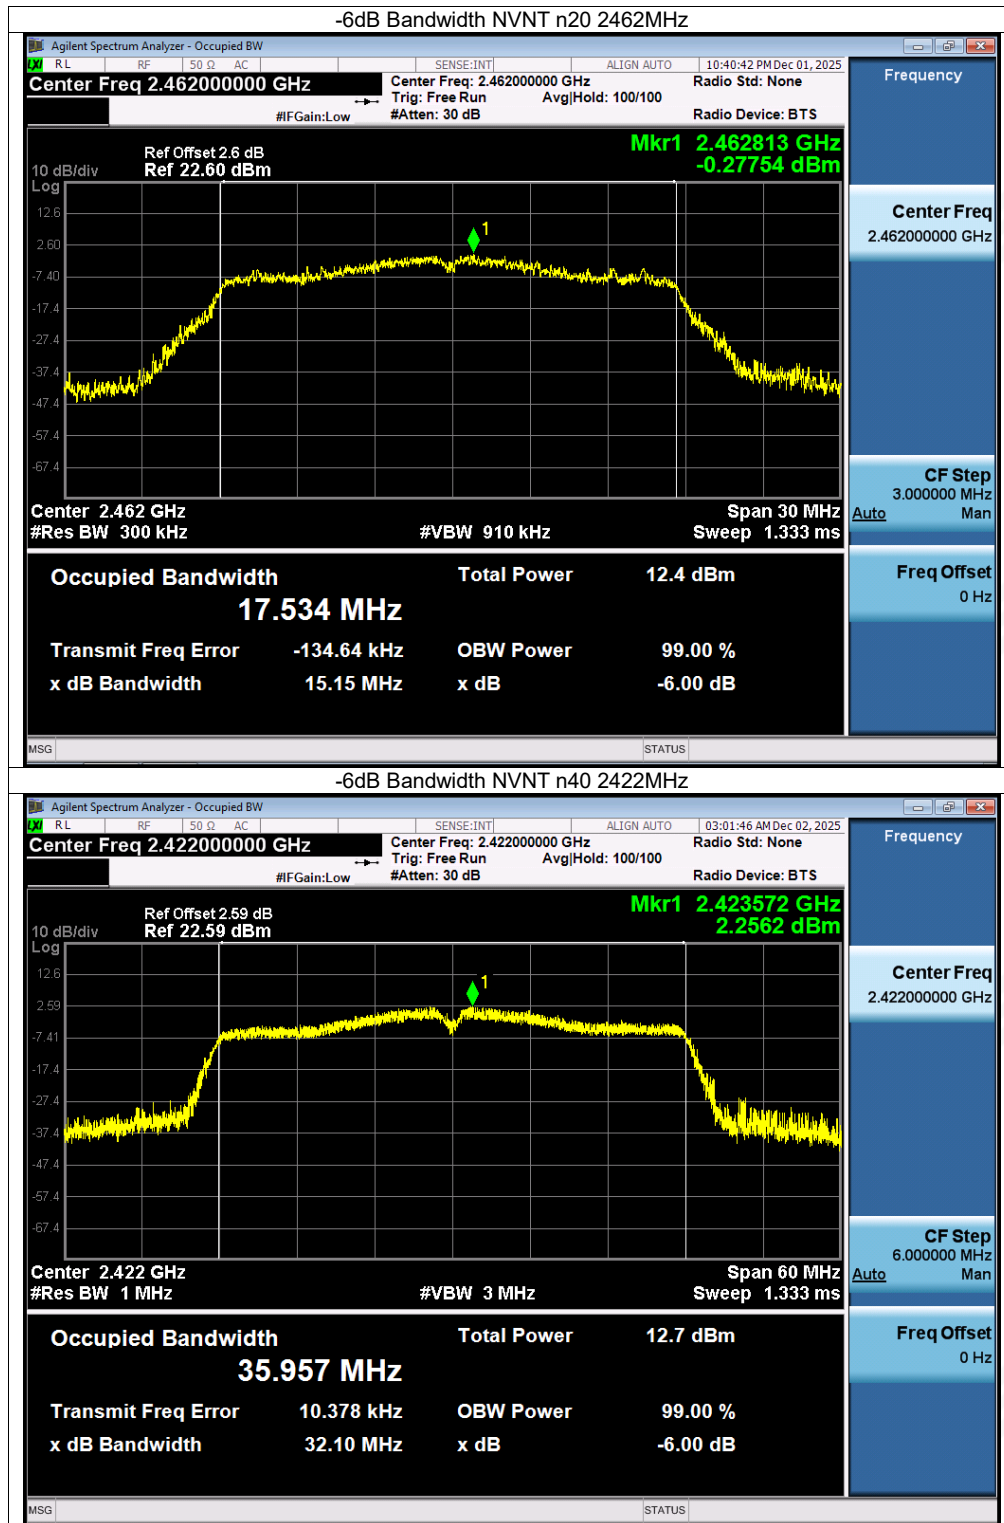

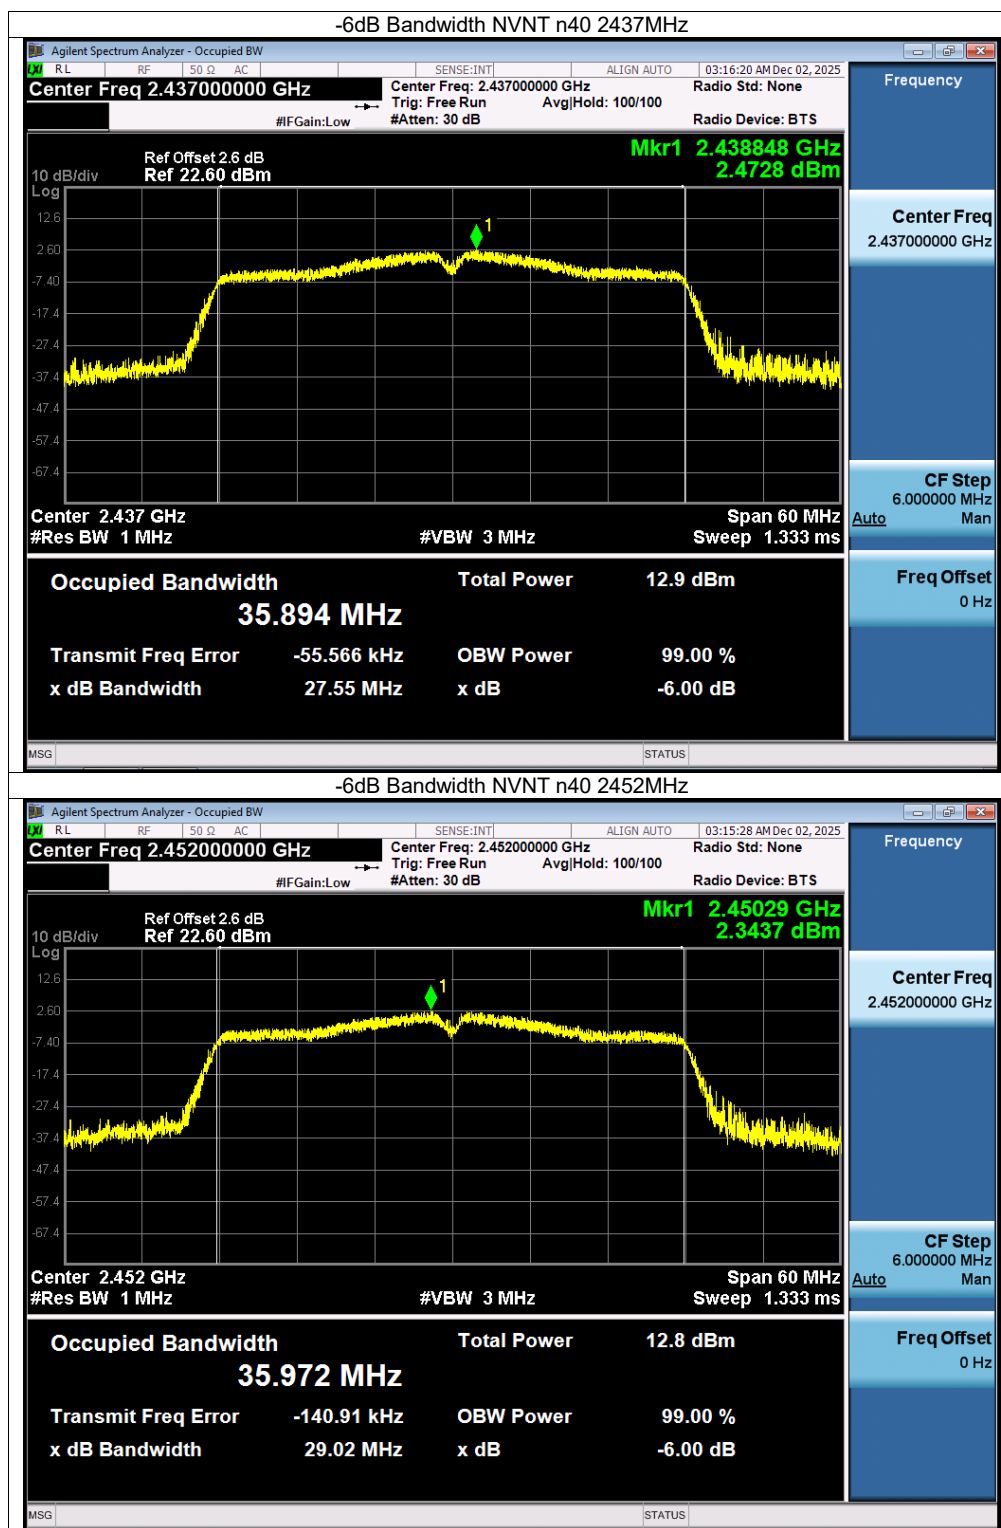





Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	PSD (dBm/10kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	-6.06	-11.29	<=8	Pass
NVNT	b	2437	-6.08	-11.31	<=8	Pass
NVNT	b	2462	-6.03	-11.26	<=8	Pass
NVNT	g	2412	-9.1	-14.33	<=8	Pass
NVNT	g	2437	-9.56	-14.79	<=8	Pass
NVNT	g	2462	-9.12	-14.35	<=8	Pass
NVNT	n20	2412	-9.97	-15.2	<=8	Pass
NVNT	n20	2437	-8.84	-14.07	<=8	Pass
NVNT	n20	2462	-9.67	-14.9	<=8	Pass
NVNT	n40	2422	-12.62	-17.85	<=8	Pass
NVNT	n40	2437	-13.68	-18.91	<=8	Pass
NVNT	n40	2452	-13.75	-18.98	<=8	Pass






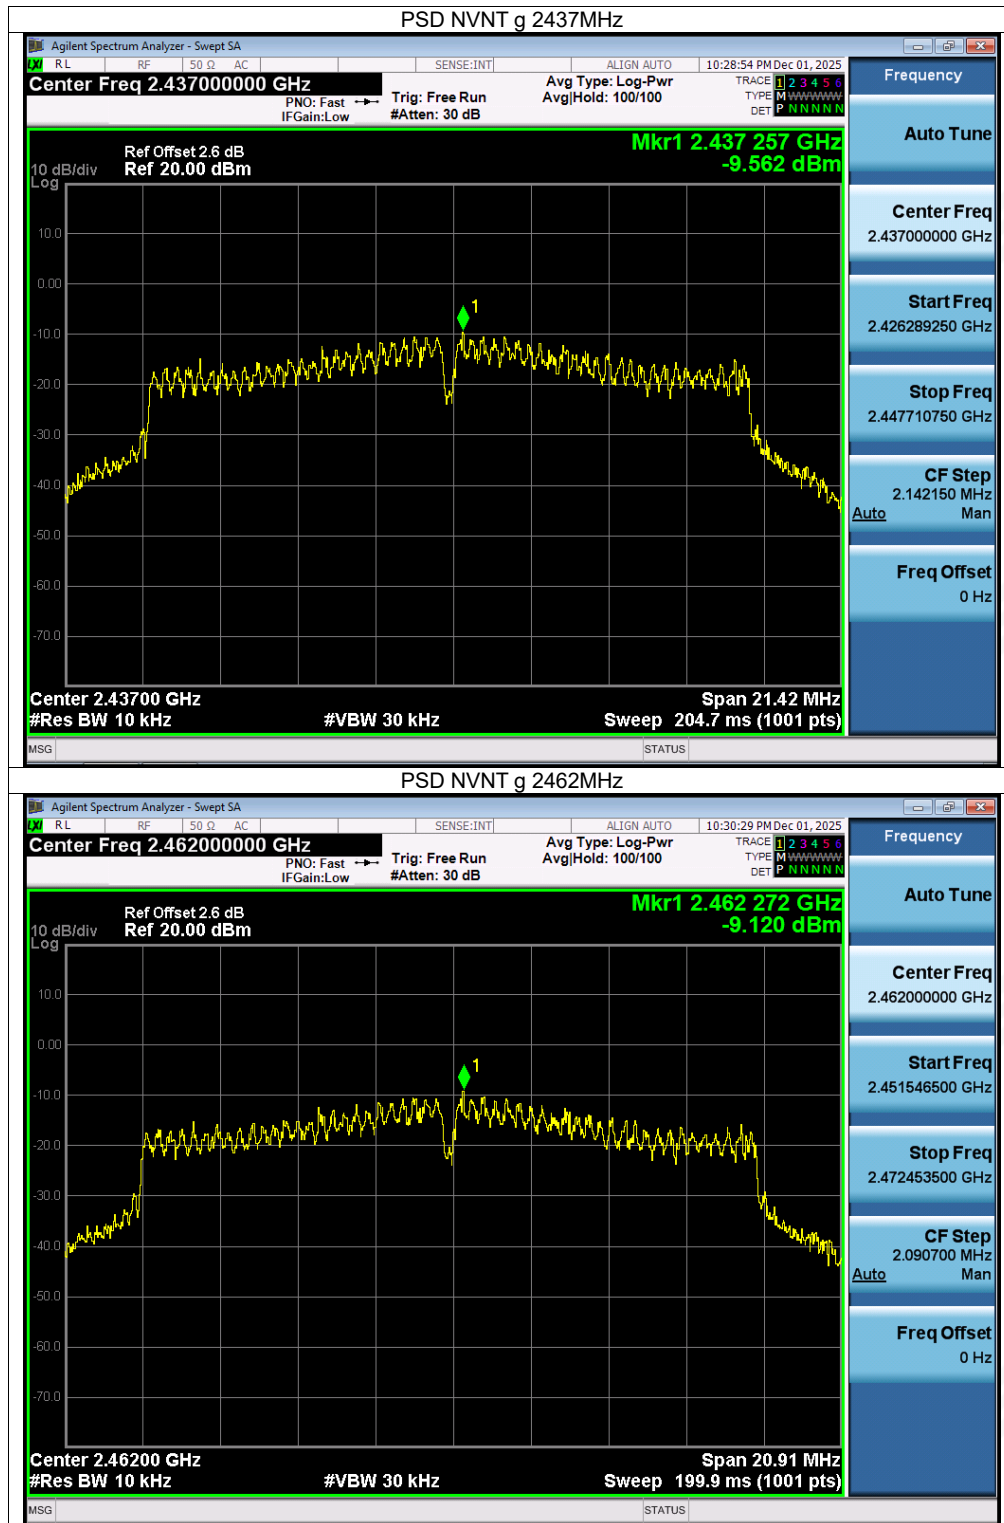

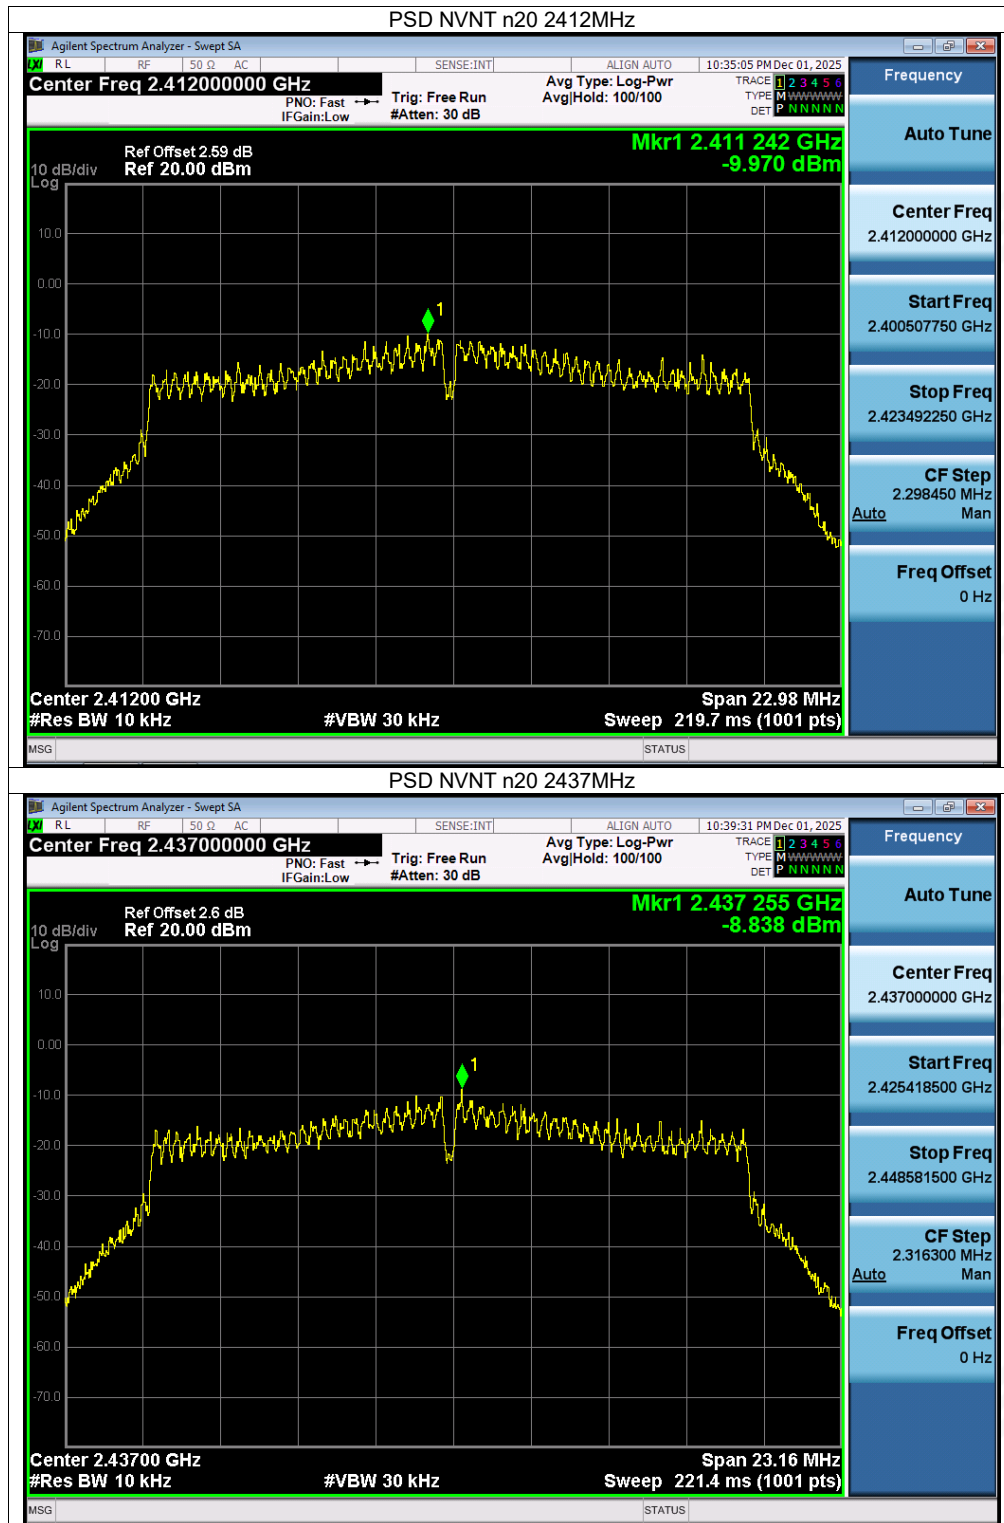

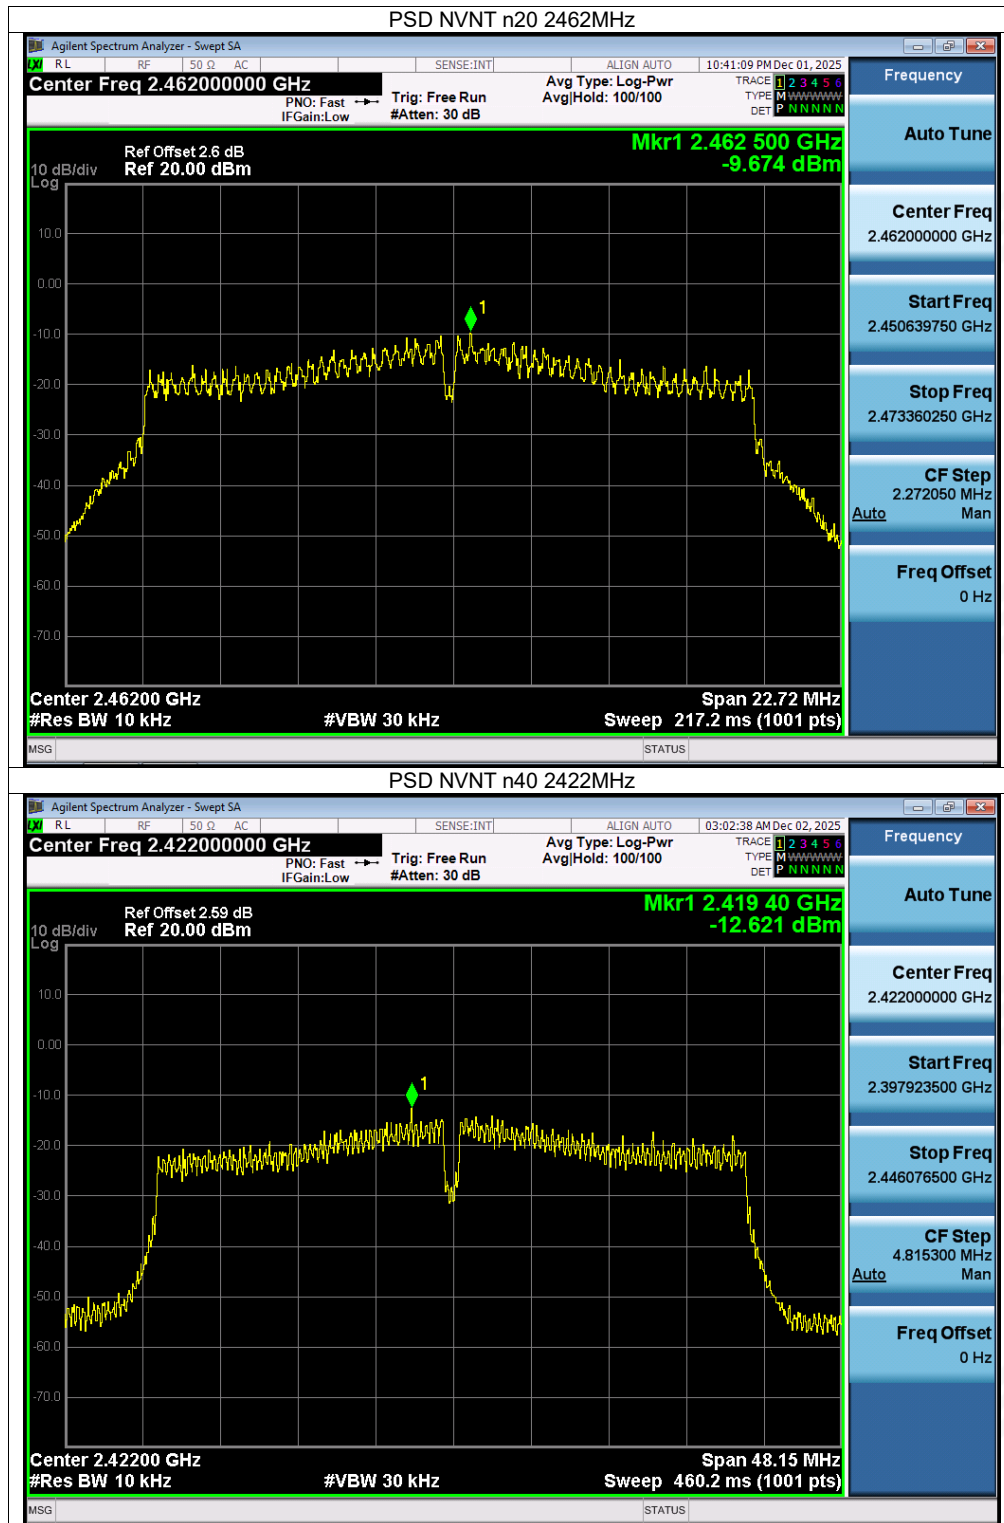


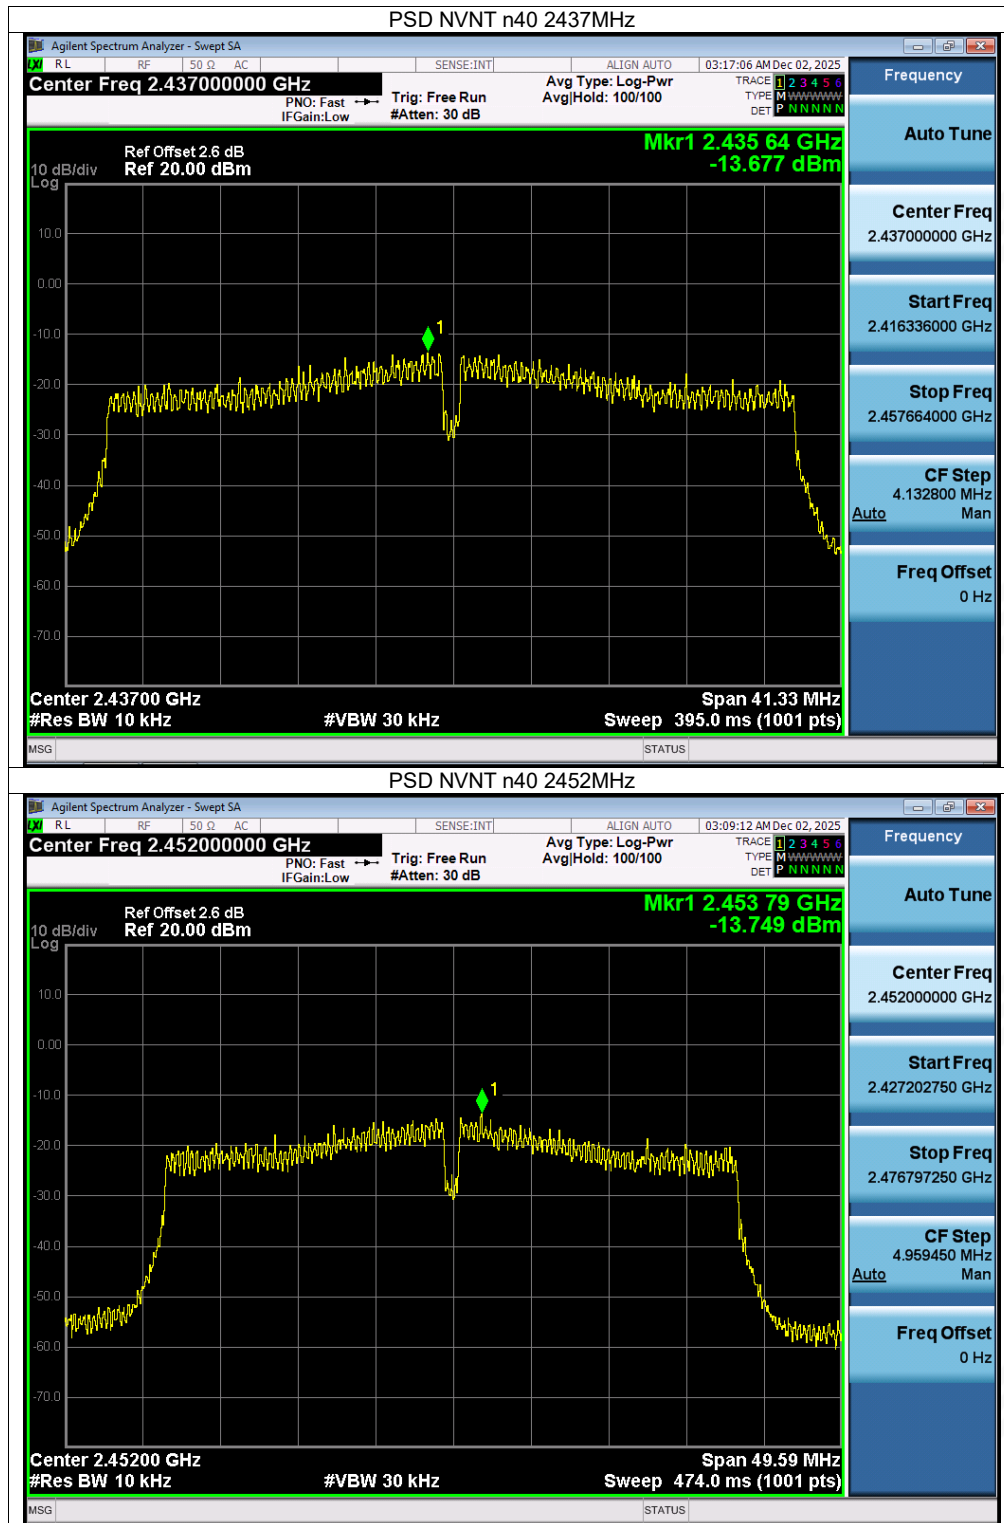






Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-38.74	<=-20	Pass
NVNT	b	2462	-56.47	<=-20	Pass
NVNT	g	2412	-31.26	<=-20	Pass
NVNT	g	2462	-43.87	<=-20	Pass
NVNT	n20	2412	-34.56	<=-20	Pass
NVNT	n20	2462	-48.1	<=-20	Pass
NVNT	n40	2422	-32.76	<=-20	Pass
NVNT	n40	2452	-36.18	<=-20	Pass

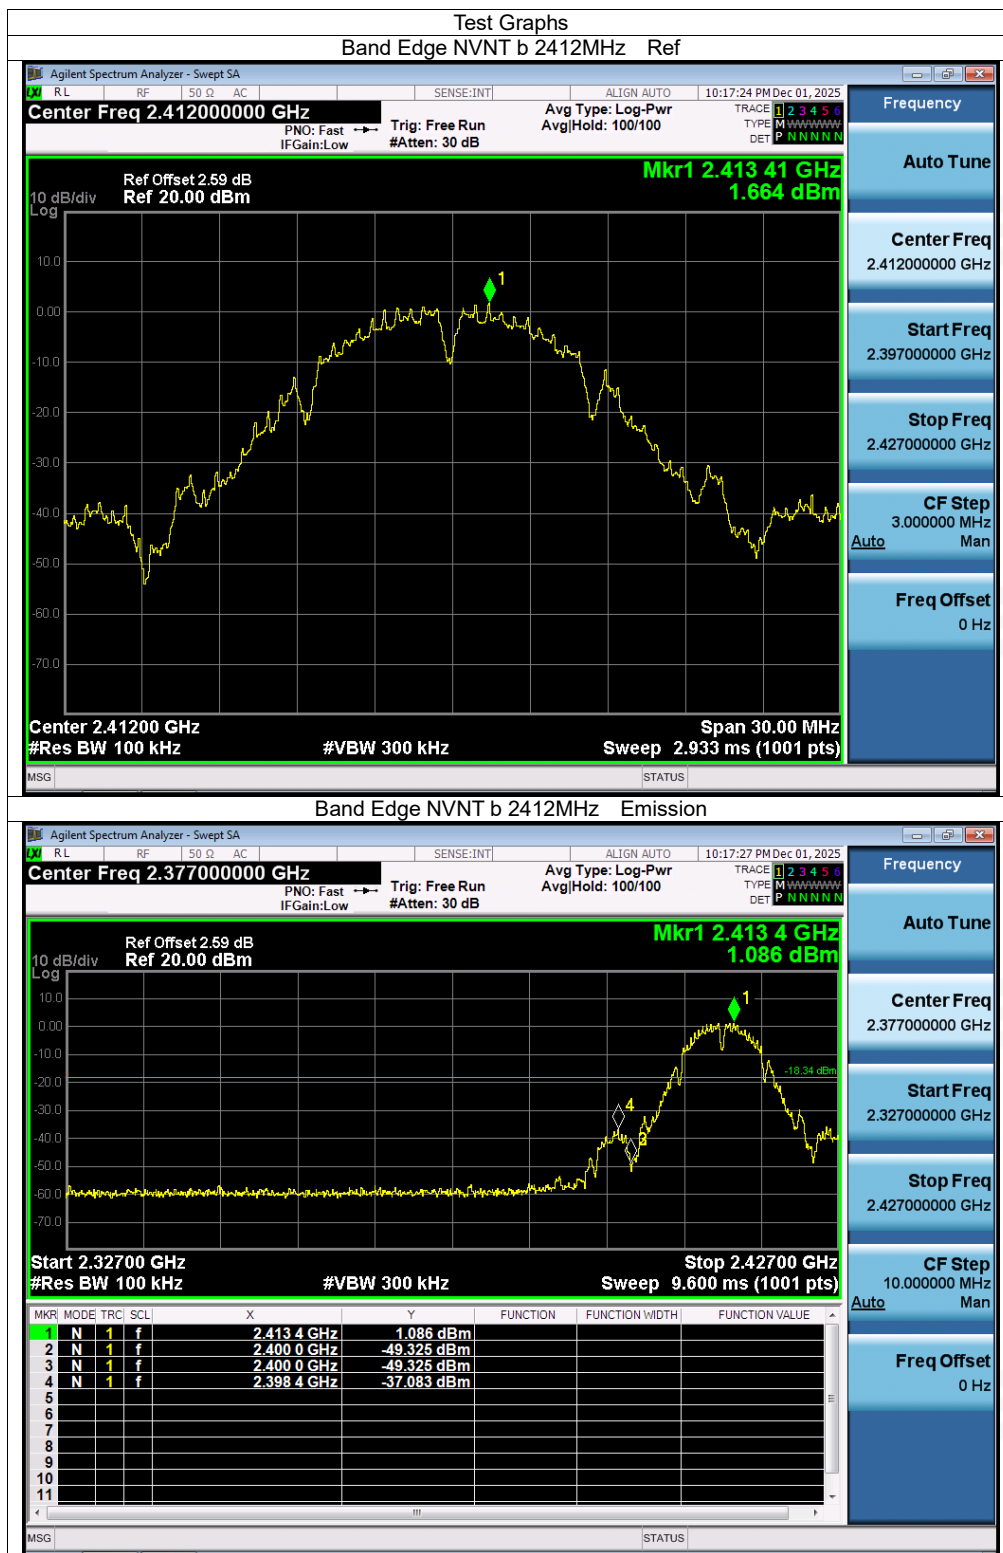

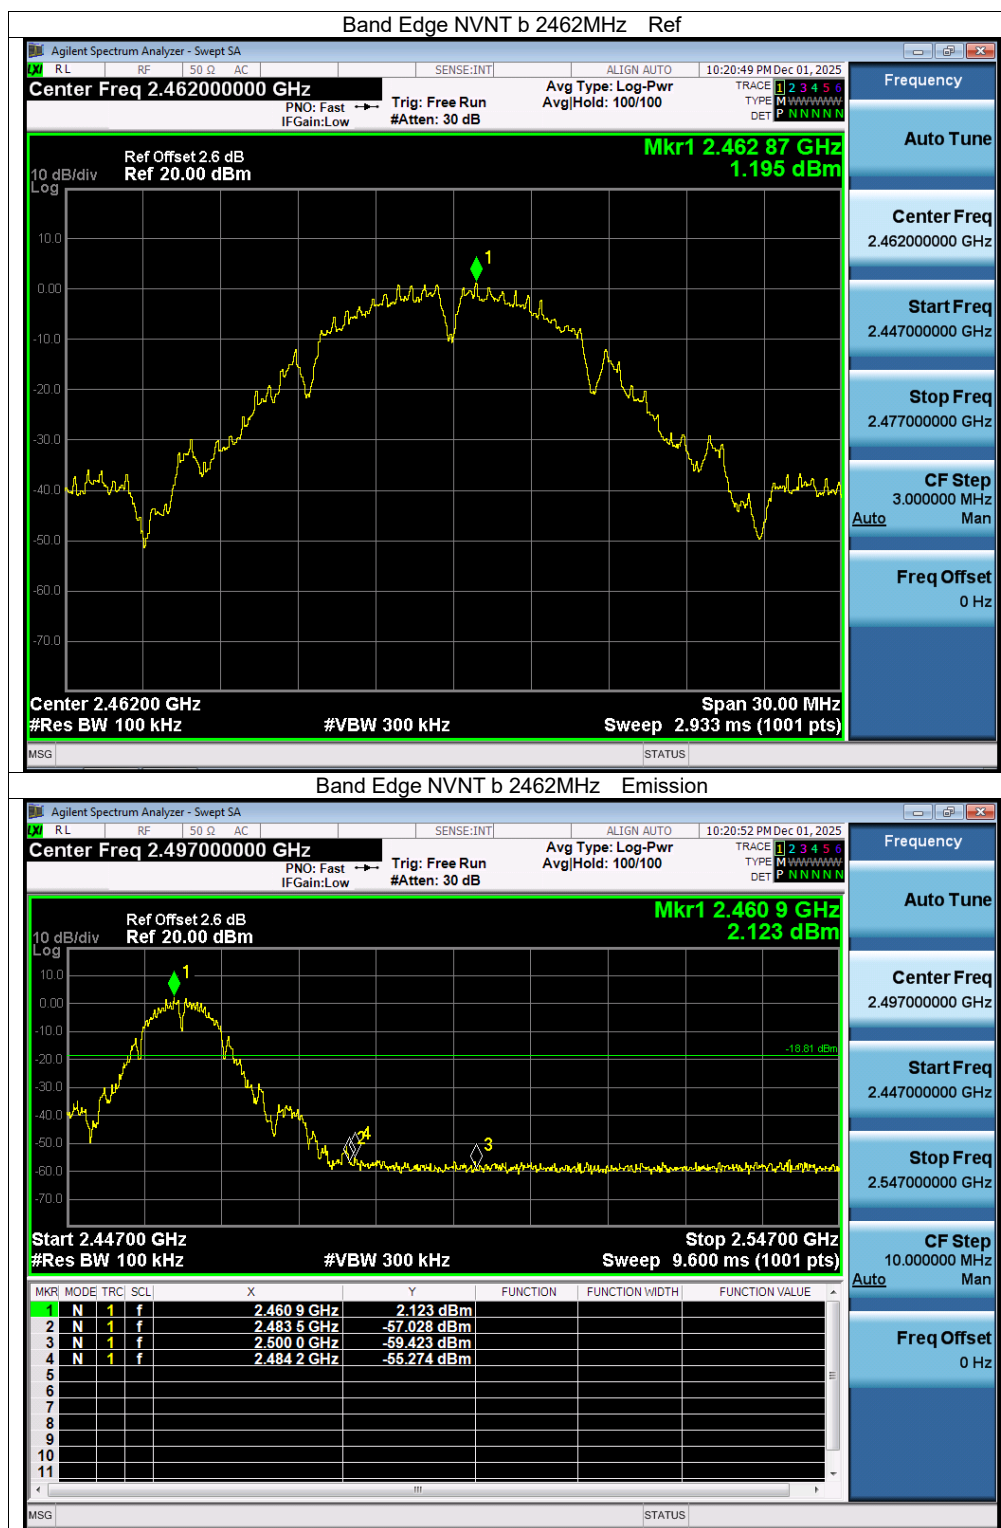


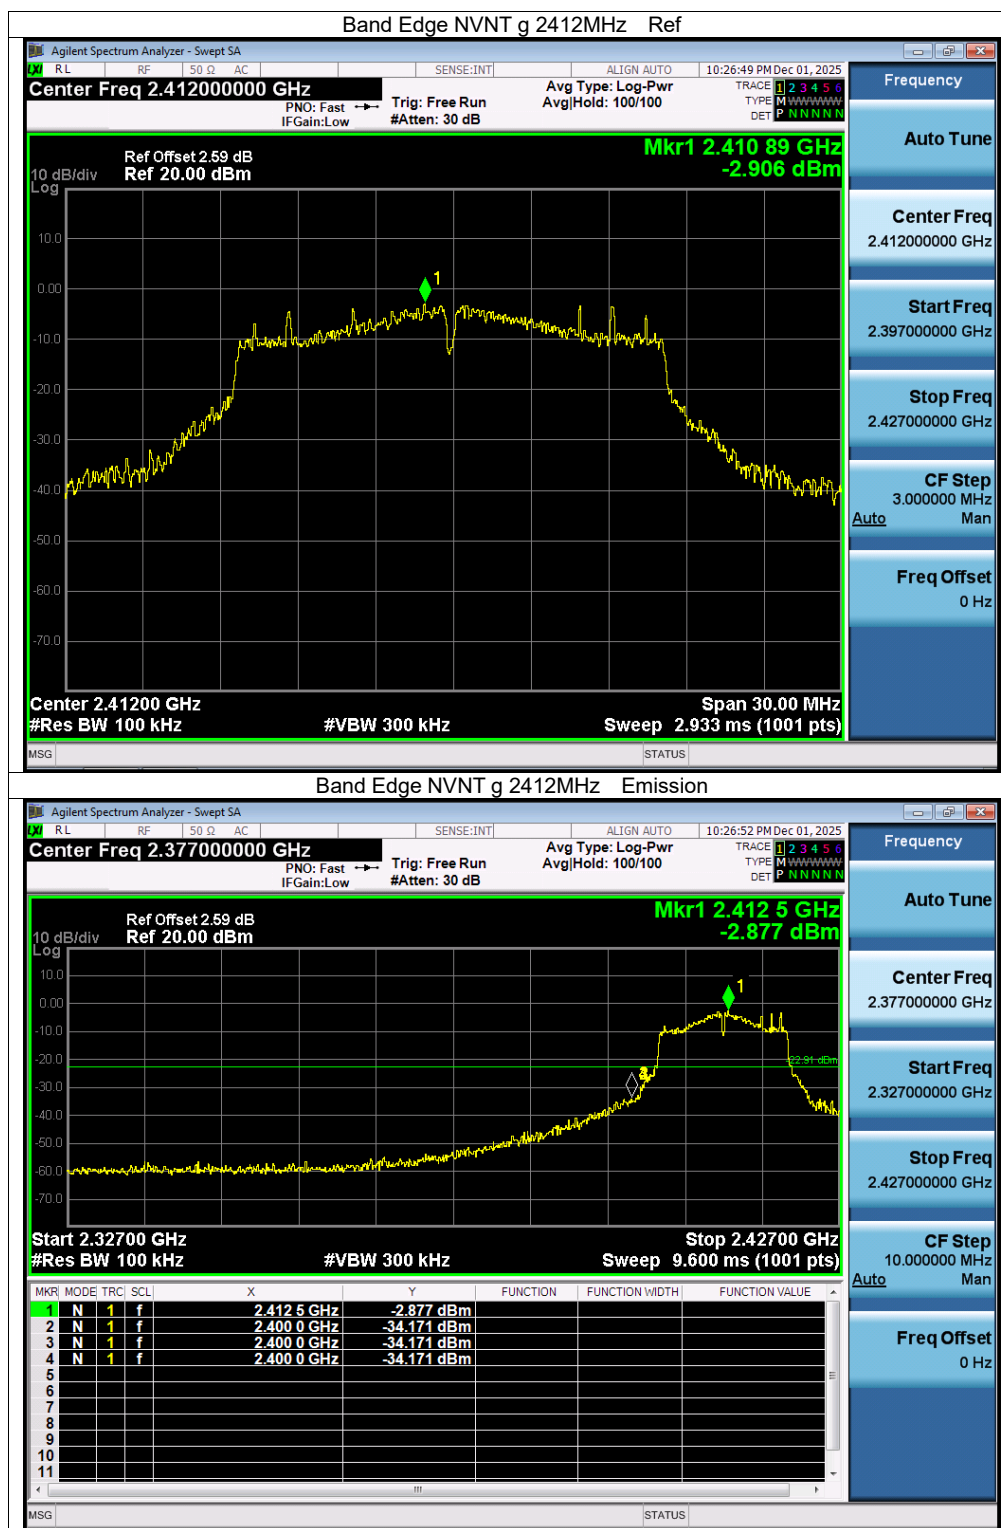

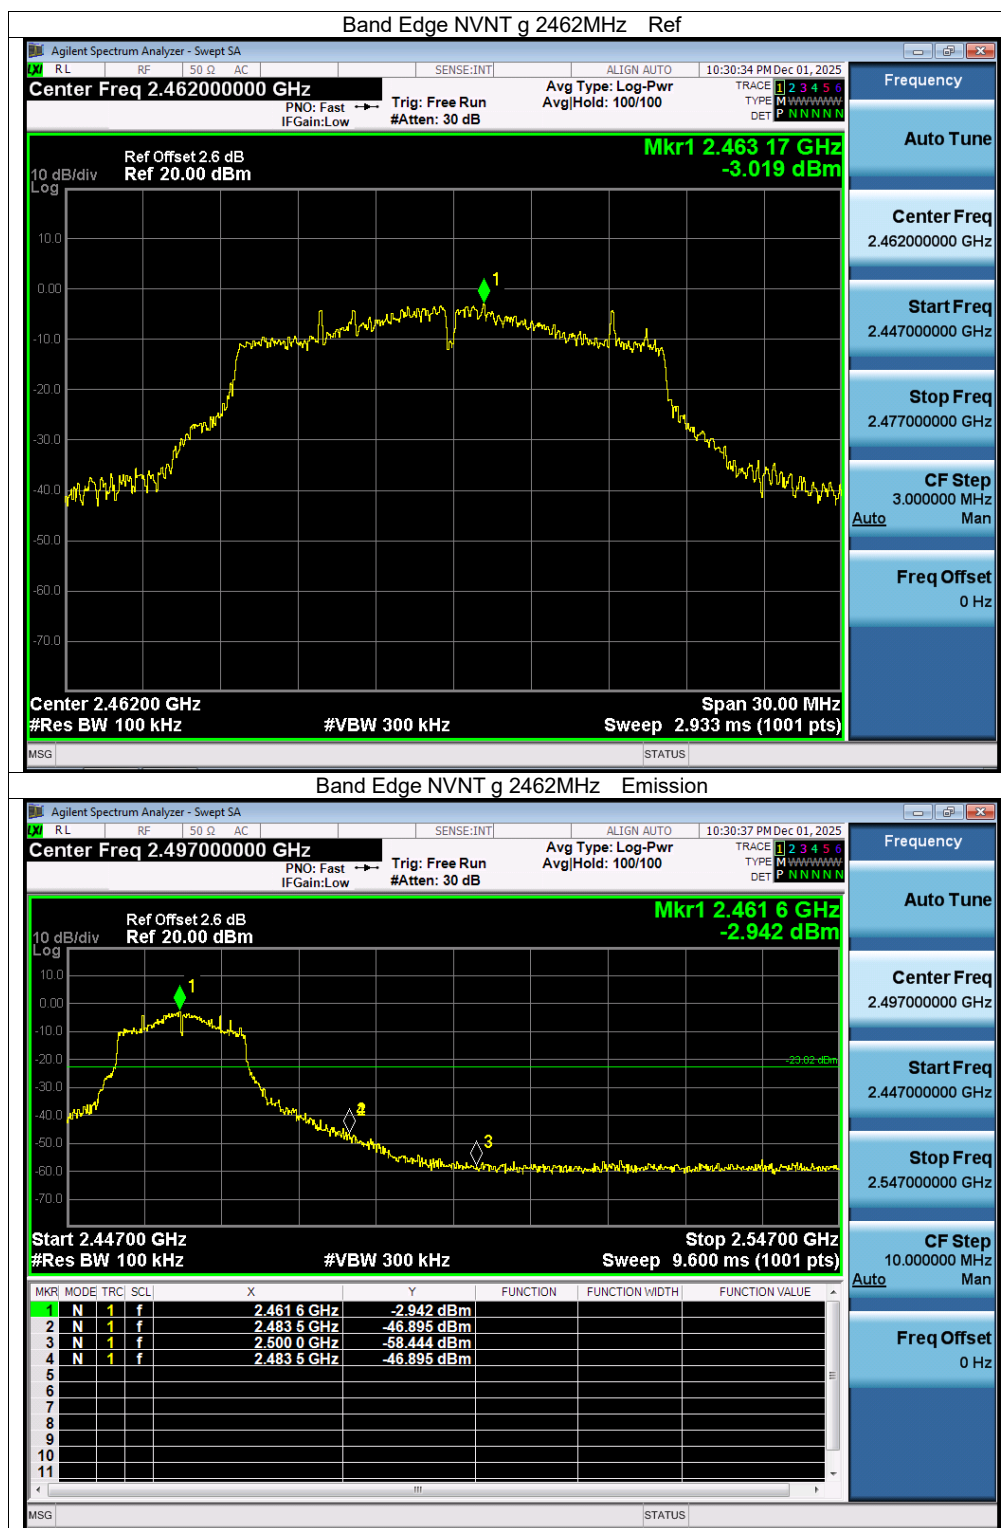





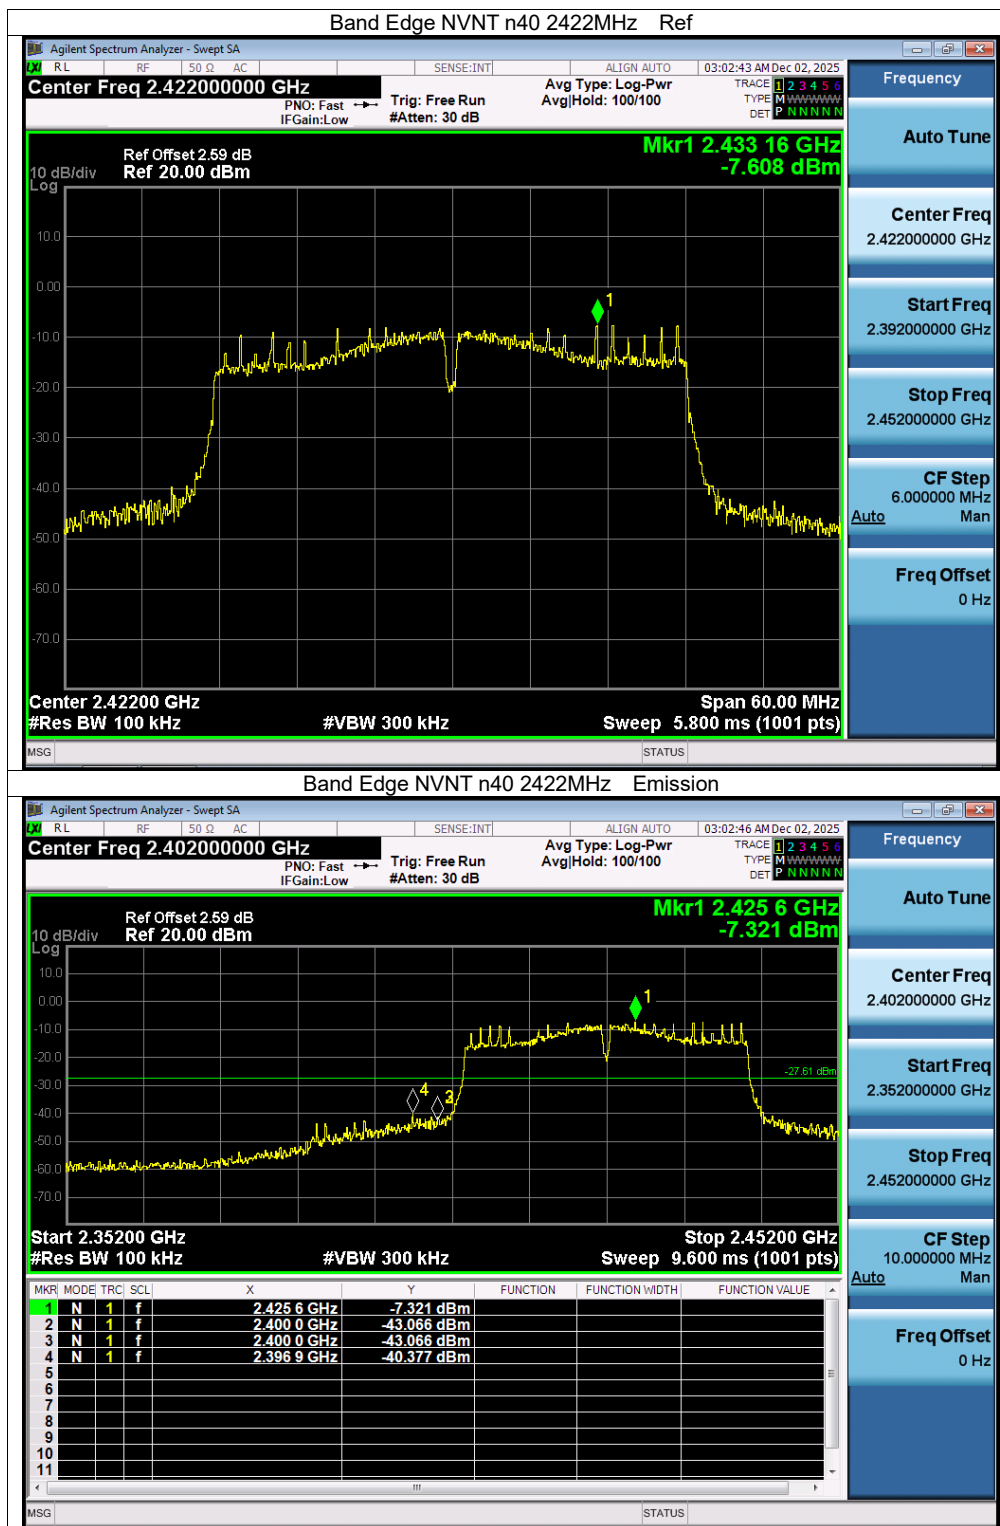








Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-41.37	-20	Pass
NVNT	b	2437	-41.22	-20	Pass
NVNT	b	2462	-39.39	-20	Pass
NVNT	g	2412	-35.88	-20	Pass
NVNT	g	2437	-36.15	-20	Pass
NVNT	g	2462	-36.77	-20	Pass
NVNT	n20	2412	-34.34	-20	Pass
NVNT	n20	2437	-34.83	-20	Pass
NVNT	n20	2462	-34.25	-20	Pass
NVNT	n40	2422	-32.28	-20	Pass
NVNT	n40	2437	-30.22	-20	Pass
NVNT	n40	2452	-31.29	-20	Pass

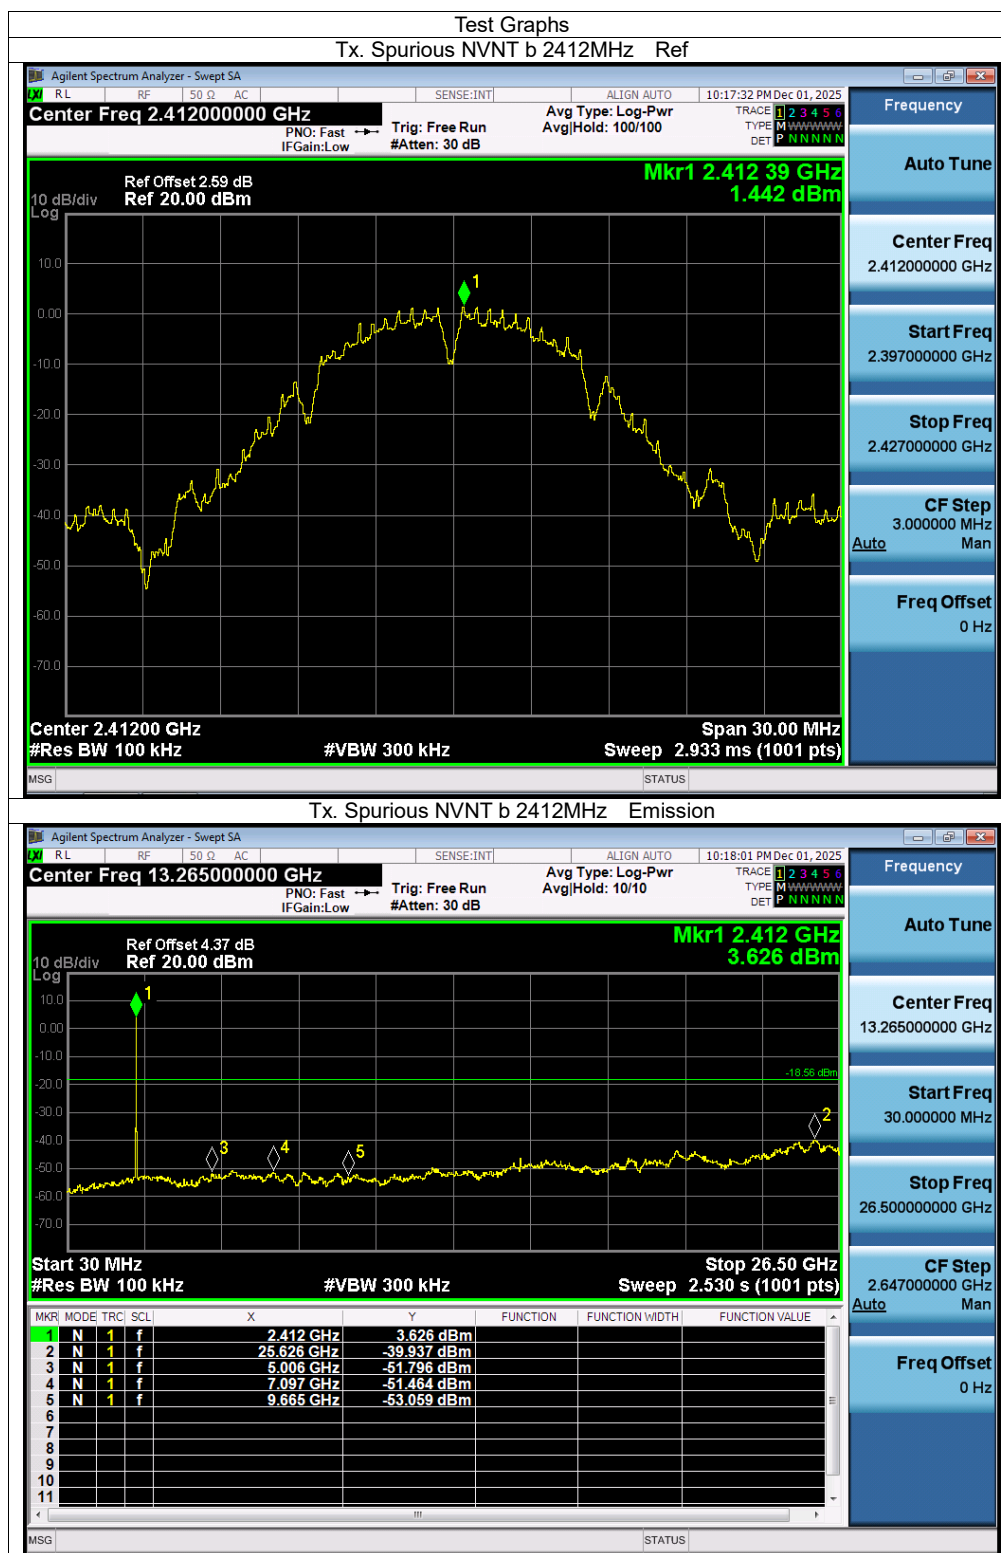


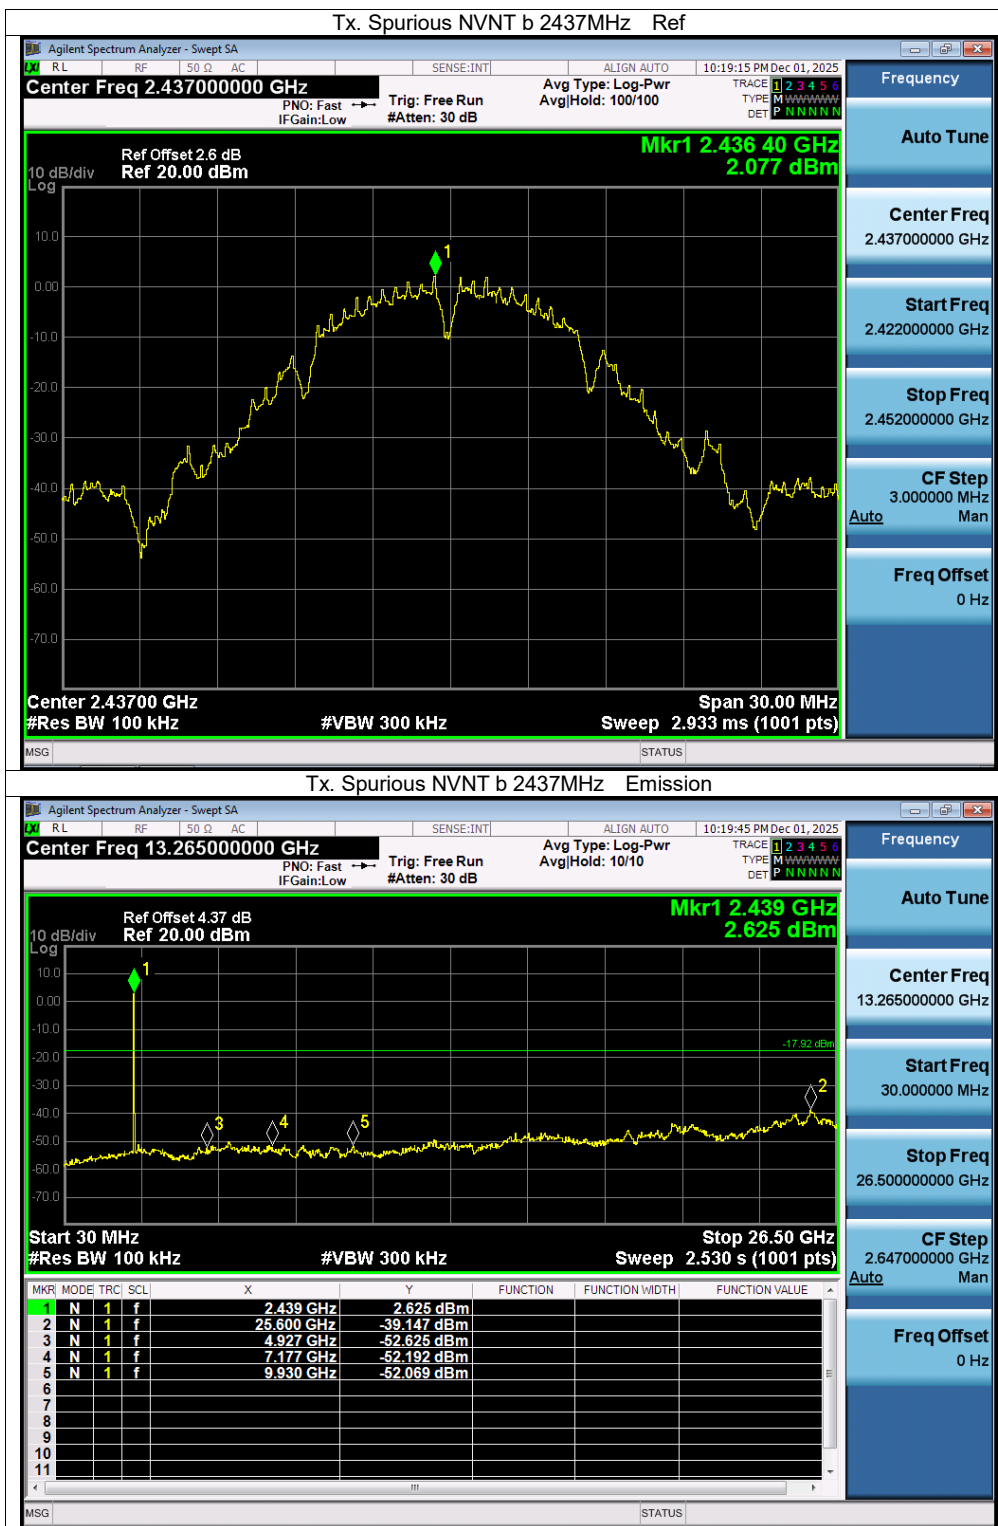




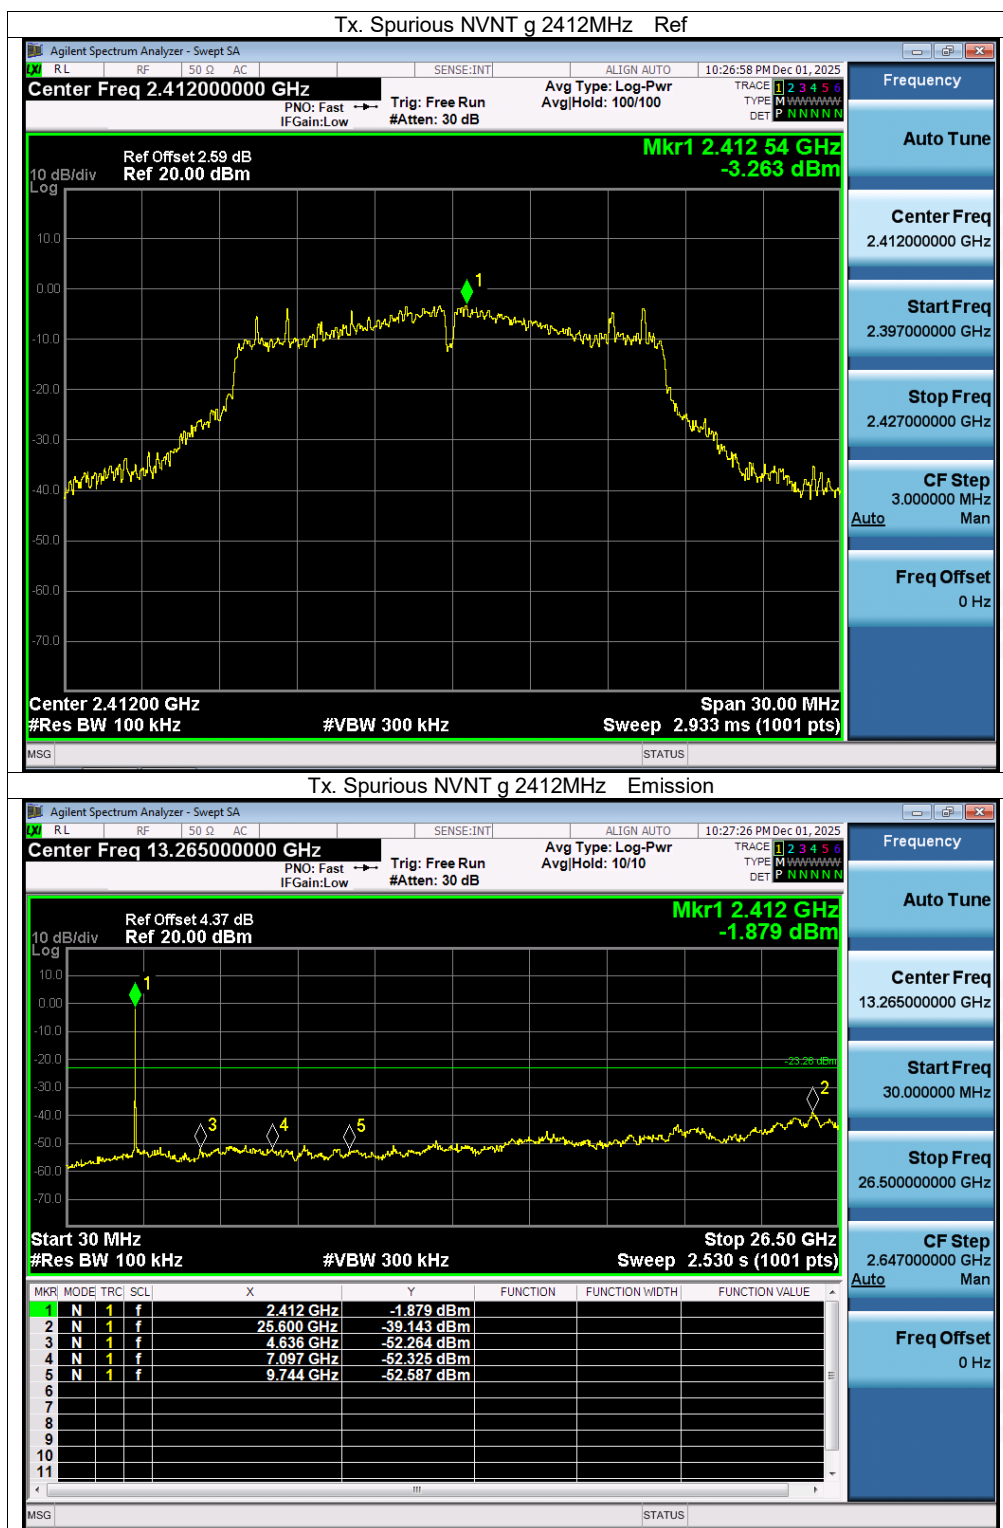




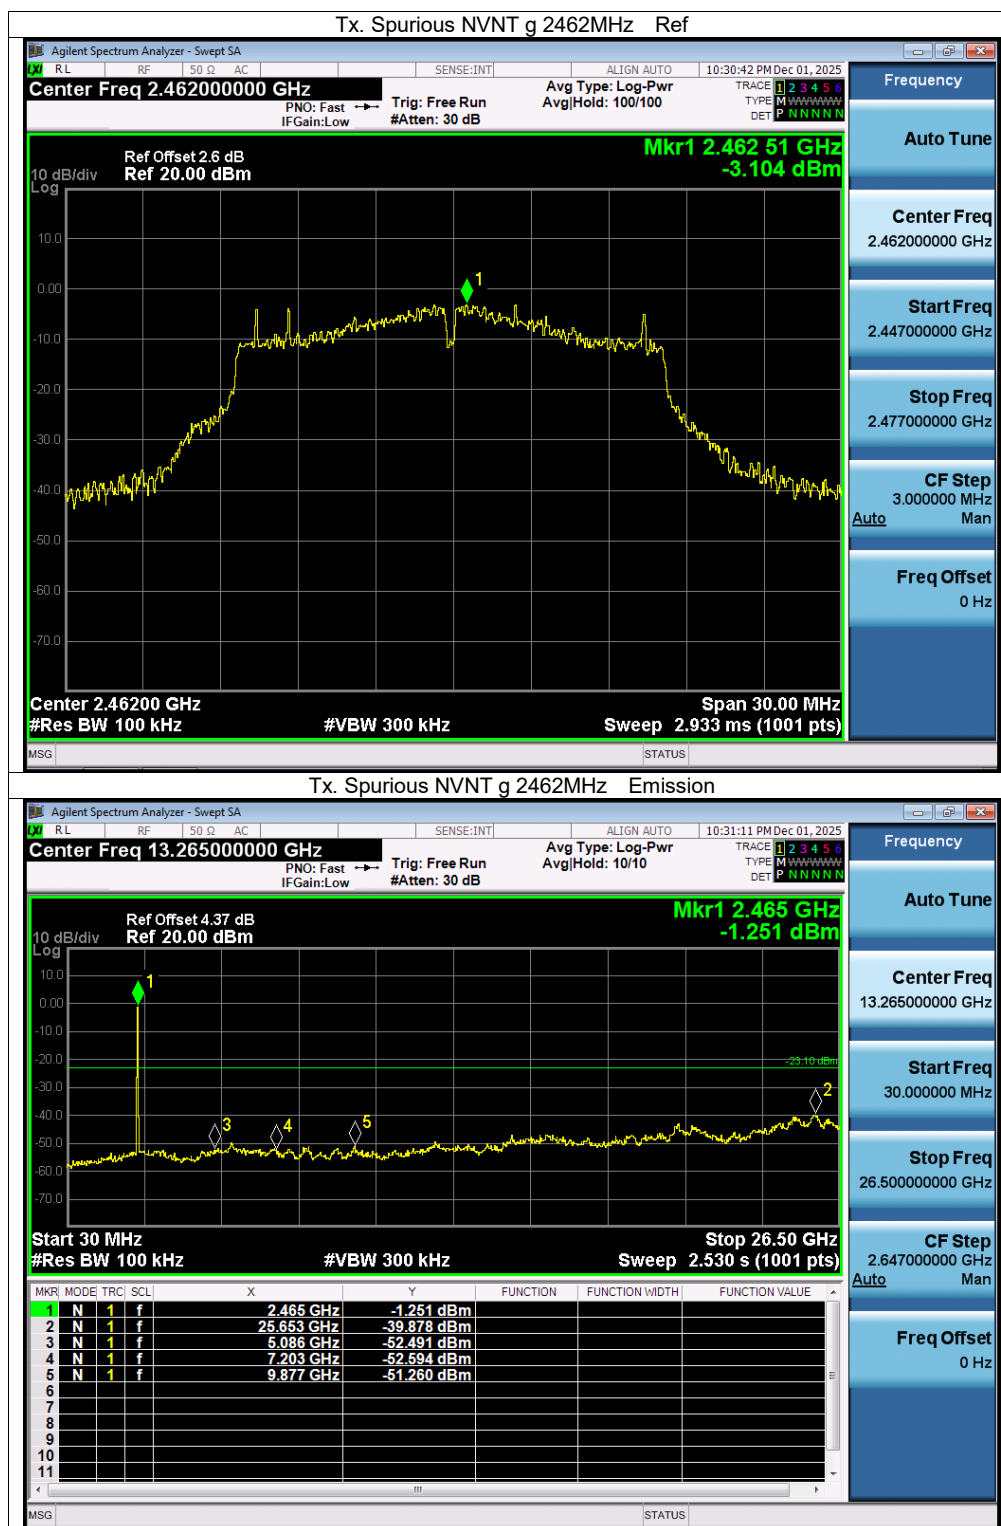





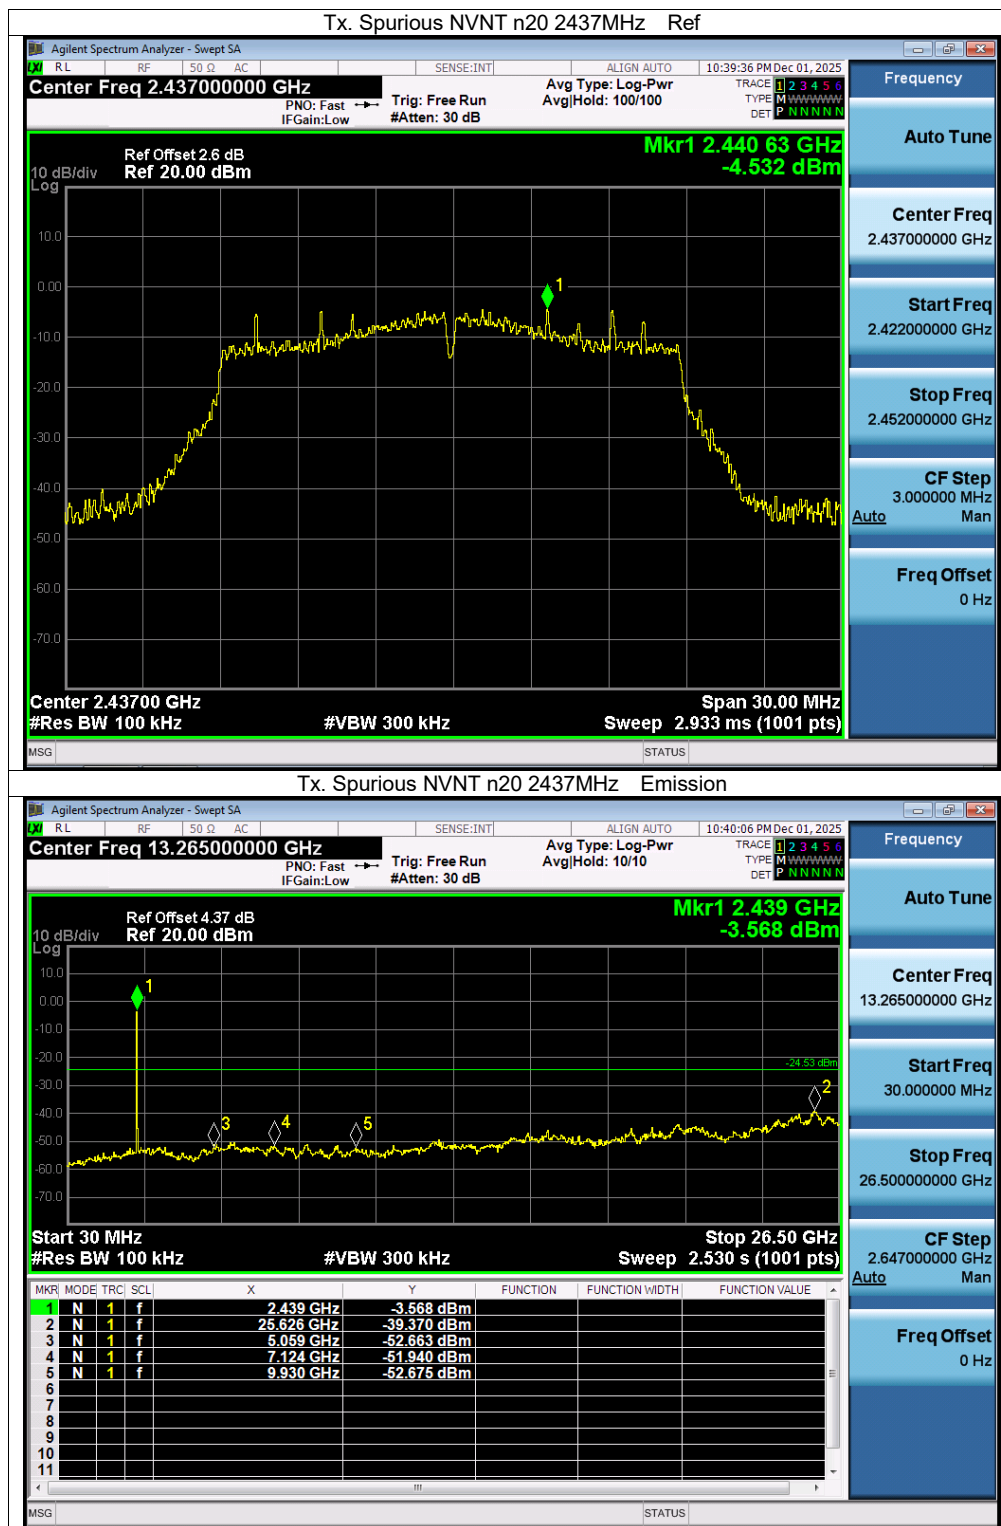



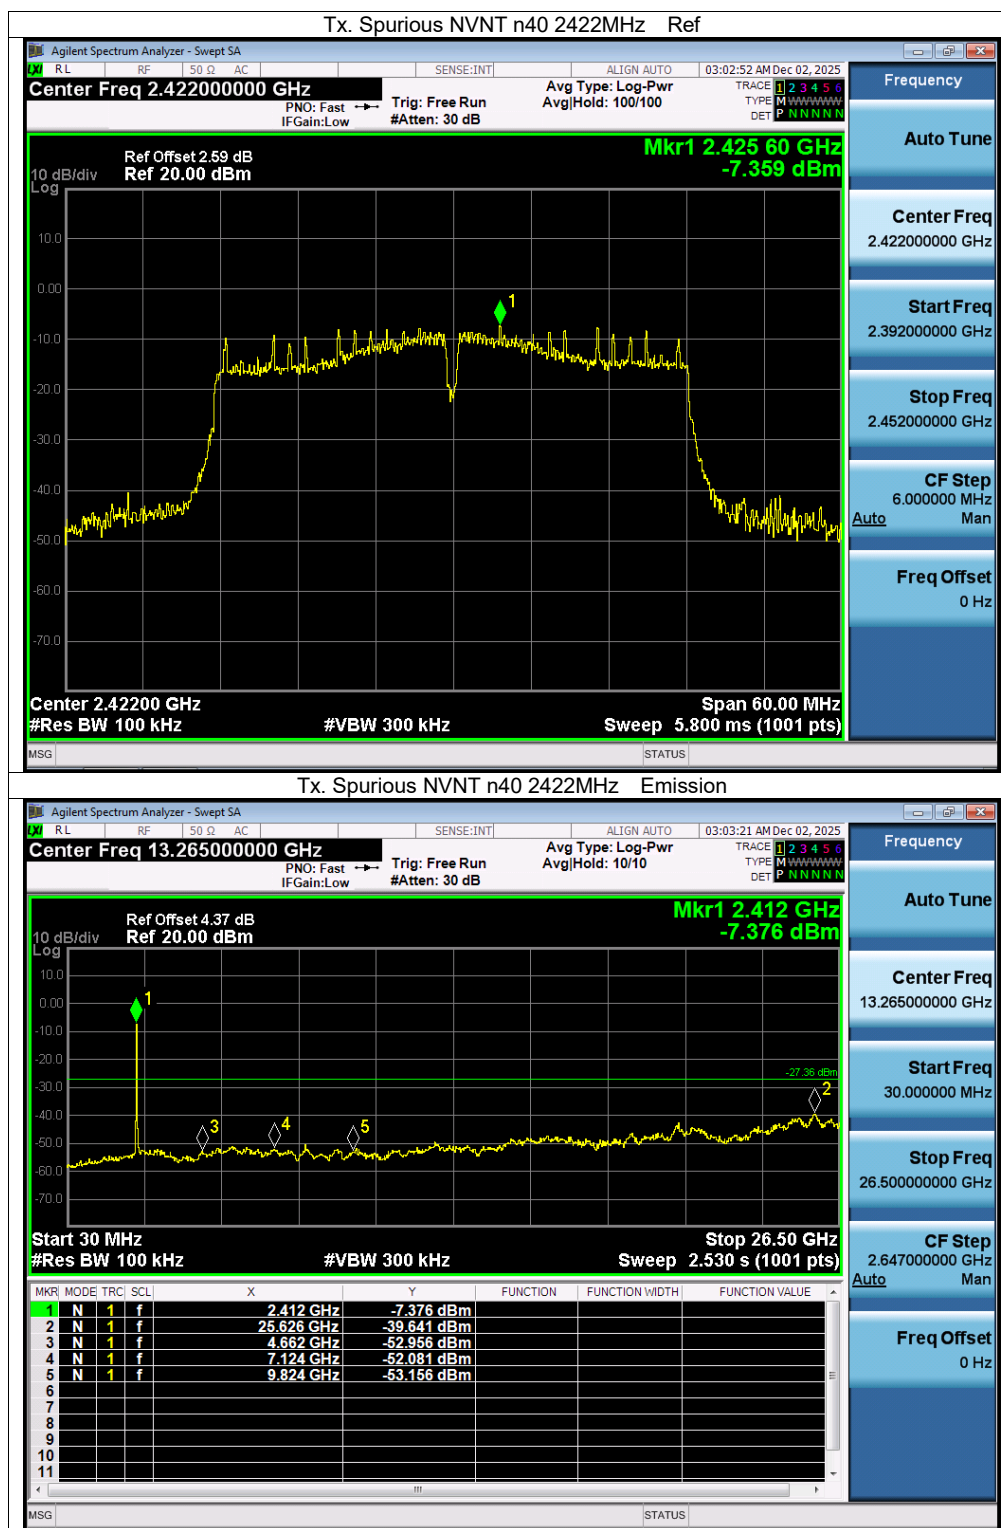

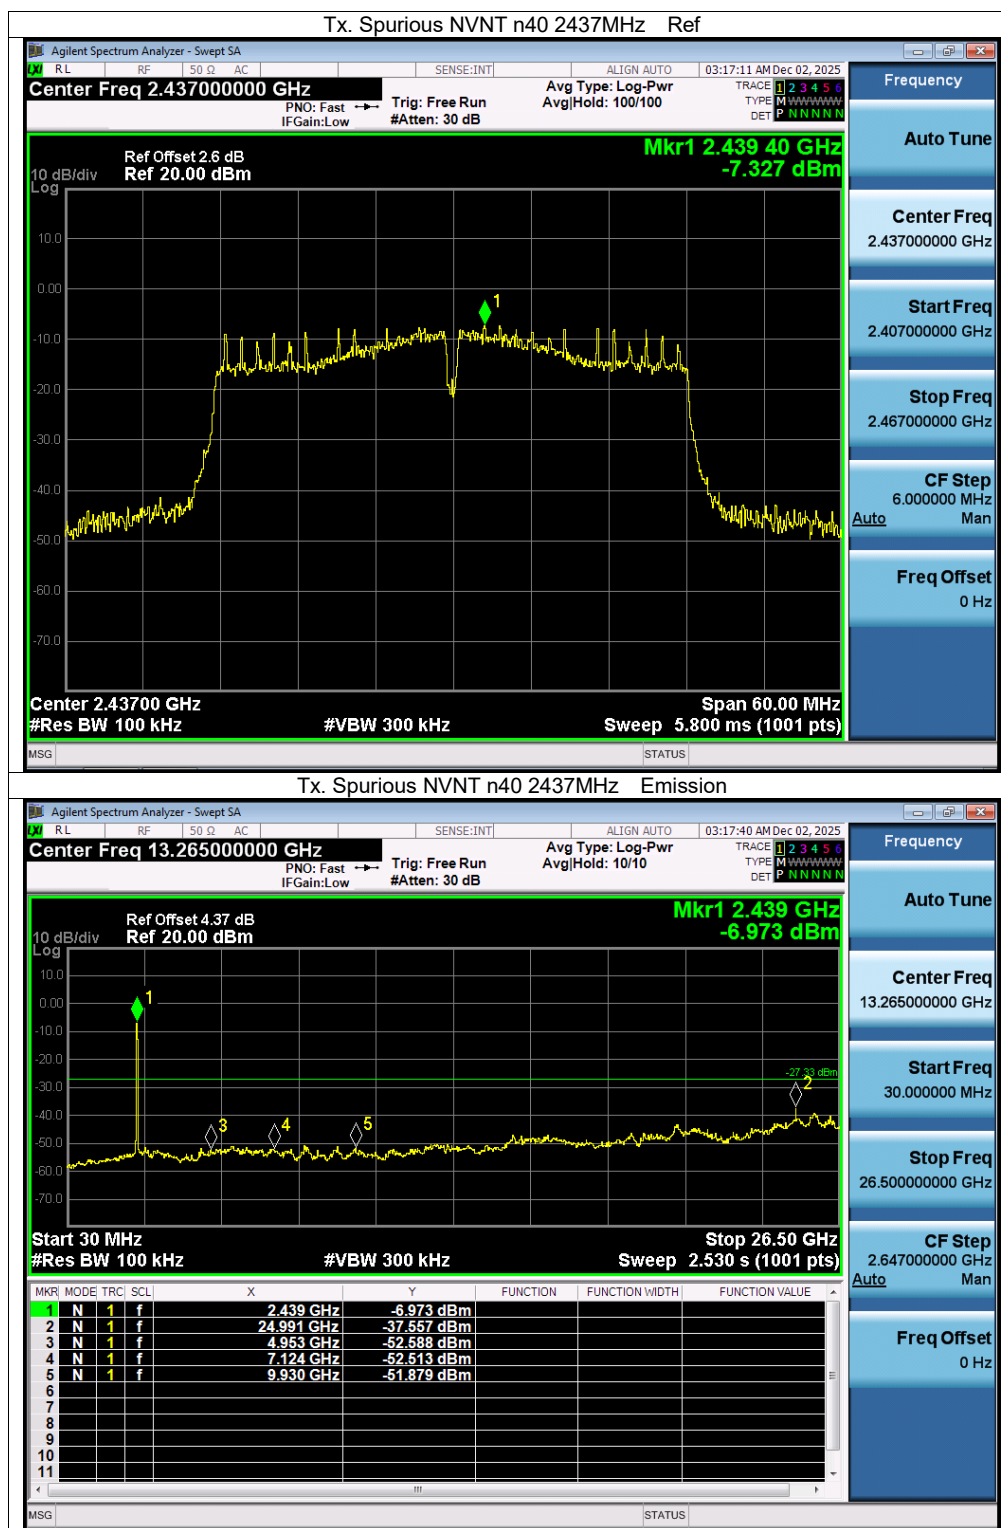

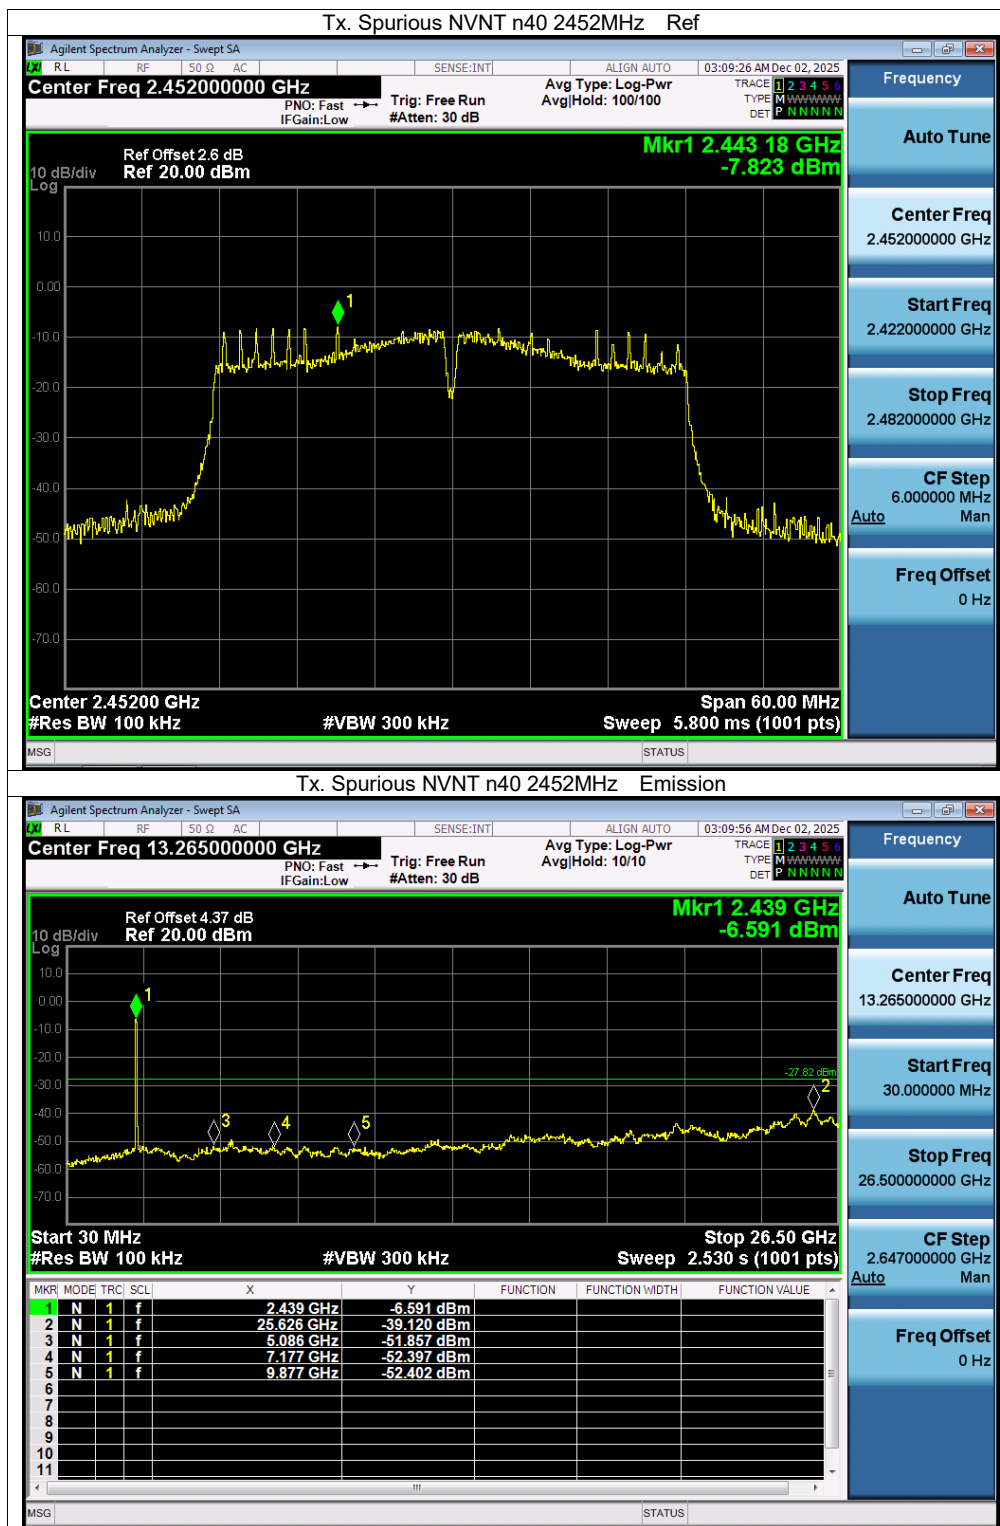



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****