



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,
Bao'an District, Shenzhen, China

TEST REPORT FCC PART 15.407

Report Reference No. : CTA25092602208

FCC ID. : 2BTTP-ZX3300

Compiled by
(position+printed name+signature) . : File administrators Zoey Cao

Supervised by
(position+printed name+signature) . : Project Engineer Ace Chai

Approved by
(position+printed name+signature) . : RF Manager Eric Wang

Date of issue : Nov. 03, 2025

Testing Laboratory Name : Shenzhen CTA Testing Technology Co., Ltd.

Address : Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Zxonic Technology, Inc.

Address : 777 N. First Street, Suite 440 San Jose, CA 95112 6311

Test specification..... :

Standard : FCC Part 15 Subpart E 15.407
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : SOUND LEVEL METER/ANALYZER

Trade Mark..... : ZXONIC

Manufacturer : Zxonic Technology, Inc.

Model/Type reference : ZX3300

Listed Models : N/A

Modulation Type : OFDM

Operation Frequency : From 5180MHz to 5320MHz, 5500MHz to 5700MHz, 5745MHz to 5825MHz

Rating..... : DC 3.6V From battery and DC 9.0V From external circuit

Result..... : PASS

TEST REPORT

Equipment under Test : SOUND LEVEL METER/ANALYZER

Model /Type : ZX3300

Listed Models : N/A

Applicant : **Zxonic Technology, Inc.**

Address : 777 N. First Street, Suite 440 San Jose, CA 95112 6311

Manufacturer : **Zxonic Technology, Inc.**

Address : 777 N. First Street, Suite 440 San Jose, CA 95112 6311

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	TEST STANDARDS	4
2.	SUMMARY	5
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	6
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	EUT operation mode	6
2.6.	Block Diagram of Test Setup	7
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Modifications	7
3.	TEST ENVIRONMENT	8
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Test Description	9
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	10
4.	TEST CONDITIONS AND RESULTS	11
4.1.	AC Power Conducted Emission	11
4.2.	Radiated Emission	20
4.3.	Maximum Conducted Average Output Power	35
4.4.	Power Spectral Density	36
4.5.	6dB Bandwidth	37
4.6.	26dB Bandwidth	38
4.7.	Frequency Stability	39
4.8.	On Time and Duty Cycle	42
4.9.	Antenna Requirement	43
5.	TEST SETUP PHOTOS OF THE EUT	44
6.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	45

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Sep. 28, 2025
Testing commenced on	:	Sep. 28, 2025
Testing concluded on	:	Nov. 03, 2025

2.2. Product Description

Product Name:	SOUND LEVEL METER/ANALYZER
Model/Typereference:	ZX3300
Power supply:	DC 3.6V From battery and DC 9.0V From external circuit
Adapter information:	Model: DSS28-0903000-E Input: AC 100-240V 50/60Hz 1.5A Output: DC 9.0V 3.0A
testing sample ID:	CTA250926022-1# (Engineer sample) CTA250926022-2# (Normal sample)
Hardware version:	1.0.4
Software version:	2.0.3.6
WIFI	
WLAN	Supported 802.11 a/n
Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Operation frequency	IEEE 802.11a:5180-5320MHz,5500-5700MHz,5745-5825MHz IEEE 802.11n HT20: 5180-5320MHz,5500-5700MHz,5745-5825MHz IEEE 802.11n HT40: 5190-5310MHz,5510-5670MHz,5755-5795MHz
Antenna type:	PIFA antenna
Antenna gain:	2 dBi

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	☒ Other (Refer to section 2.2)
----------------------	---

2.4. Short description of the Equipment under Test (EUT)

This is a SOUND LEVEL METER/ANALYZER.

For more details, refer to the user's manual of the EUT.

Test Software Version	Tools software(ADB command)		
Frequency	5180 MHz	5220 MHz	5240 MHz
802.11a	Default	Default	Default
802.11n20	Default	Default	Default
Frequency	5190 MHz	/	5230 MHz
802.11n40	Default	/	Default

Test Software Version	Tools software(ADB command)		
Frequency	5260 MHz	5300 MHz	5320 MHz
802.11a	Default	Default	Default
802.11n20	Default	Default	Default
Frequency	5270 MHz	/	5310 MHz
802.11N40	Default	/	Default

Test Software Version	Tools software(ADB command)		
Frequency	5500 MHz	5580 MHz	5700 MHz
802.11a	Default	Default	Default
802.11n20	Default	Default	Default
Frequency	5510 MHz	5550 MHz	5670 MHz
802.11N40	Default	Default	Default

Test Software Version	Tools software(ADB command)		
Frequency	5745 MHz	5785 MHz	5825 MHz
802.11a	Default	Default	Default
802.11n20	Default	Default	Default
Frequency	5755 MHz	/	5795 MHz
802.11n40	Default	/	Default

2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX.


IEEE 802.11a/n20/n40:

U-NII-1 and U-NII-2A		U-NII-1 and U-NII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		
52	5260	54	5270
56	5280	62	5310
60	5300		
64	5320		

U-NII-2C		U-NII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510
104	5520	110	5550
108	5540	118	5590
112	5560	126	5630
116	5580	134	5670
120	5600		
124	5620		
128	5640		
132	5660		
136	5680		
140	5700		

U-NII-3		U-NII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

2.6. Block Diagram of Test Setup

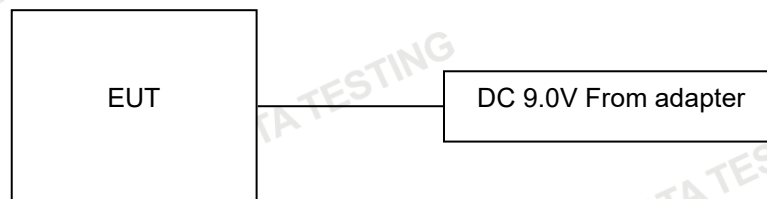

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	PASS
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.02 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Output Peak power	30MHz~18GHz	0.55 dB	(1)
Power spectral density	/	0.57 dB	(1)
Spectrum bandwidth	/	1.1%	(1)
Radiated spurious emission (30MHz-1GHz)	30~1000MHz	4.10 dB	(1)
Radiated spurious emission (1GHz-18GHz)	1~18GHz	4.32 dB	(1)
Radiated spurious emission (18GHz-40GHz)	18-40GHz	5.54 dB	(1)
Time	/	±2%	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2025/08/04	2026/08/03
LISN	R&S	ENV216	CTA-314	2025/07/30	2026/07/29
EMI Test Receiver	R&S	ESPI	CTA-307	2025/07/30	2026/07/29
EMI Test Receiver	R&S	ESCI	CTA-306	2025/07/30	2026/07/29
Spectrum Analyzer	Agilent	N9020A	CTA-301	2025/05/17	2026/05/16
Spectrum Analyzer	Agilent	N9020A	CTA-301	2025/07/30	2026/07/29
Vector Signal generator	Agilent	N5182A	CTA-305	2025/07/30	2026/07/29
Analog Signal Generator	R&S	E4421B	CTA-304	2025/07/30	2026/07/29
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	CTA-302	2025/07/30	2026/07/29
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2025/07/31	2026/07/30
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2023/10/13	2026/10/12
Loop Antenna	Zhinan	ZN30900C	CTA-311	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9170	CTA-346	2025/05/18	2028/05/17
Amplifier	Schwarzbeck	BBV9745	CTA-312	2025/07/30	2026/07/29
Amplifier	Tonscend	TAP-011840	CTA-313	2025/07/30	2026/07/29
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2025/07/30	2026/07/29
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2025/07/30	2026/07/29
Automatic control unit	Tonscend	JS0806-2	CTA-351	2025/07/30	2026/07/29
Amplifier	SKET	LNPA 1840G-50	CTA-345	2025/05/17	2026/05/16
Spectrum analyzer	R&S	FSV40-N	CTA-344	2025/05/17	2026/05/16
Attenuator	XINQY	10dB	N/A	N/A	N/A
Programmable Constant Temperature And Humidity Test Chamber	DONGGUAN JINGYU	HT-H-408	CTA-053	2025/07/30	2026/07/29
EMI Test Software	Tonscend	TS@JS32-RE	5.0.0.2	N/A	N/A
EMI Test Software	Tonscend	TS@JS32-CE	5.0.0.1	N/A	N/A
RF Test Software	Tonscend	TS@JS1120-3	3.1.65	N/A	N/A
RF Test Software	Tonscend	TS@JS1120	3.1.46	N/A	N/A

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

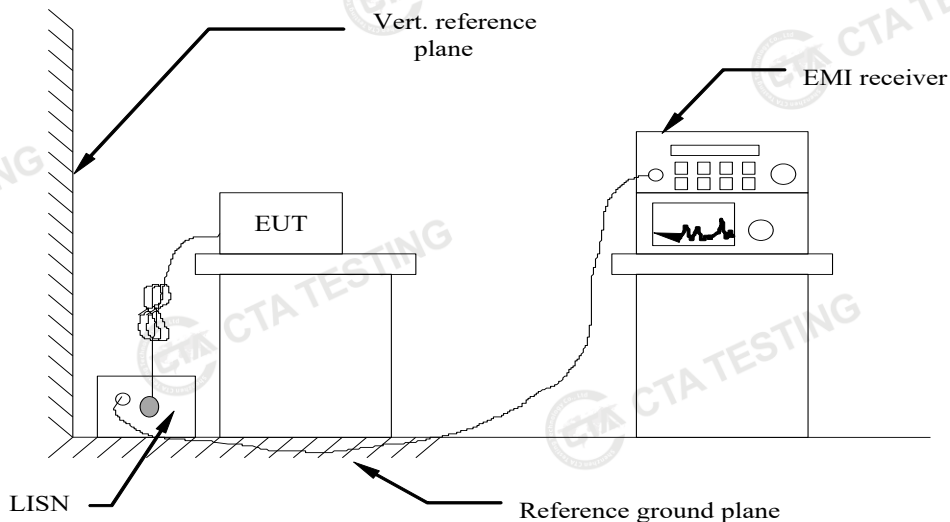

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
- 4 The EUT received DC 12V power from adapter, the adapter received AC 120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

Remark:

1. 1. All modes of 802.11a/n were test at Low, Middle, and High channel; only the worst result of 802.11 a Middle Channel was reported as below:

Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

UNII-1:

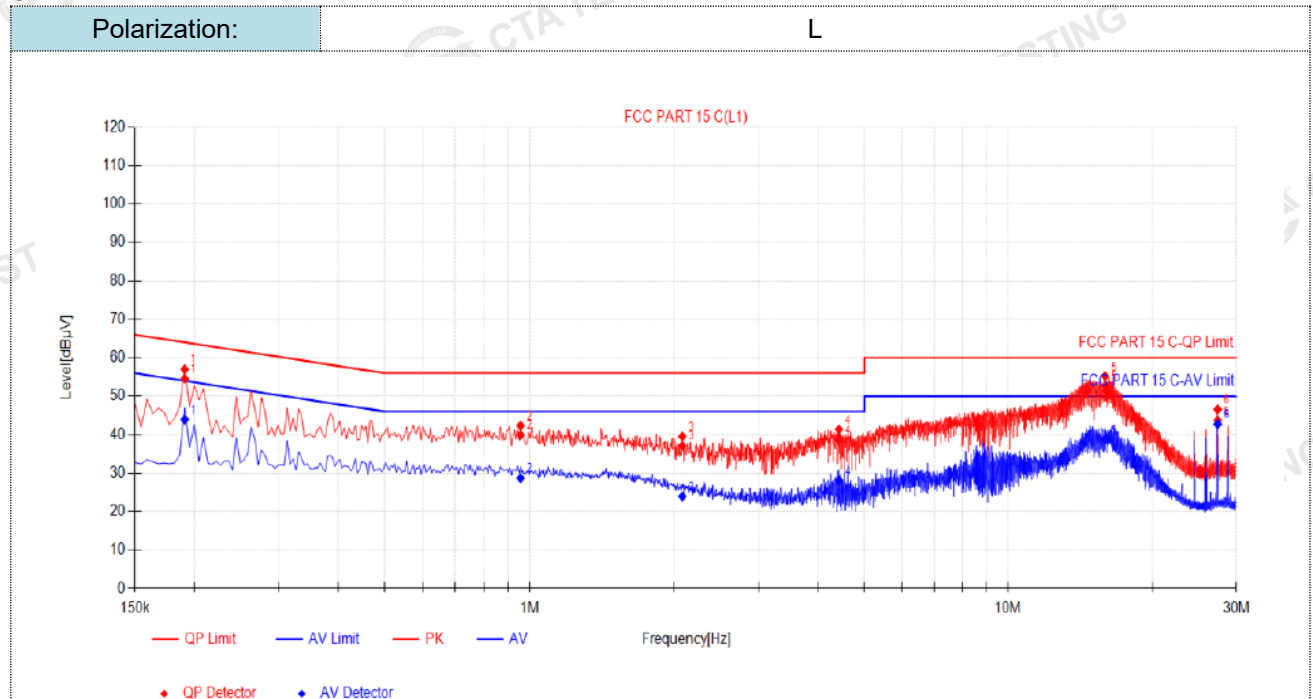

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1905	9.99	44.61	54.60	64.01	9.41	33.97	43.96	54.01	10.05	PASS
2	0.9555	10.42	29.50	39.92	56.00	16.08	18.28	28.70	46.00	17.30	PASS
3	2.0805	10.50	26.61	37.11	56.00	18.89	13.45	23.95	46.00	22.05	PASS
4	4.425	10.80	27.85	38.65	56.00	17.35	17.35	28.15	46.00	17.85	PASS
5	15.945	12.35	40.33	52.68	60.00	7.32	26.41	38.76	50.00	11.24	PASS
6	27.429	13.39	30.32	43.71	60.00	16.29	29.36	42.75	50.00	7.25	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)


2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Polarization:

N

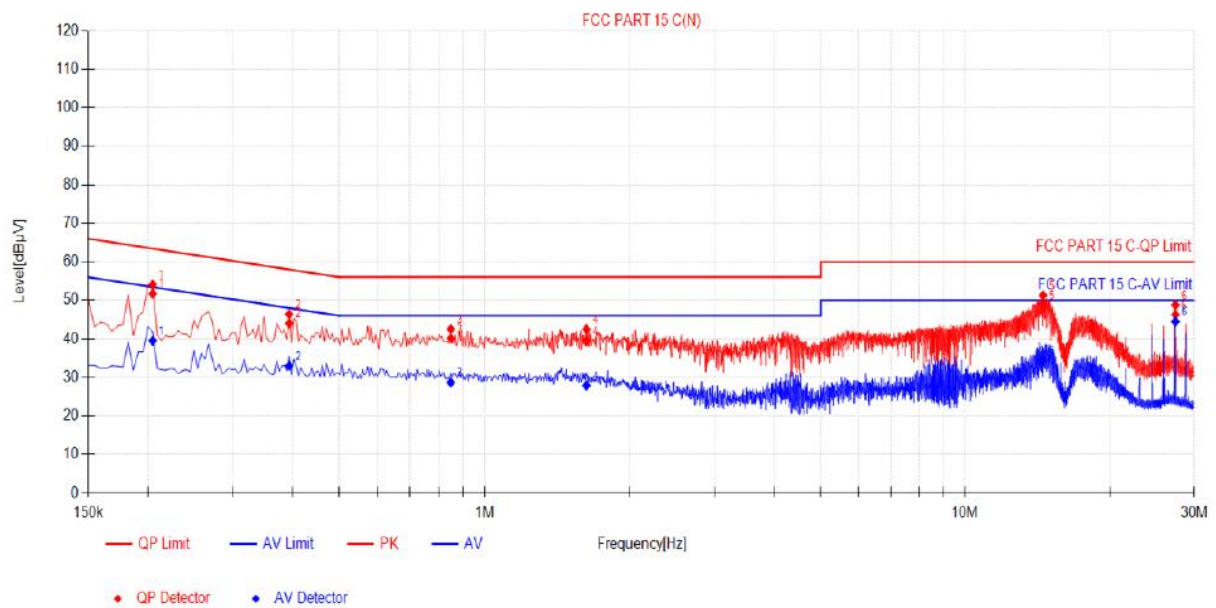

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.204	9.94	41.77	51.71	63.45	11.74	29.56	39.50	53.45	13.95	PASS
2	0.393	10.16	33.85	44.01	58.00	13.99	22.85	33.01	48.00	14.99	PASS
3	0.8475	10.34	29.81	40.15	56.00	15.85	18.36	28.70	46.00	17.30	PASS
4	1.626	10.42	29.12	39.54	56.00	16.46	17.48	27.90	46.00	18.10	PASS
5	14.5185	12.27	36.51	48.78	60.00	11.22	22.19	34.46	50.00	15.54	PASS
6	27.429	13.61	32.66	46.27	60.00	13.73	30.89	44.50	50.00	5.50	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

UNII-2A:

Polarization:

L

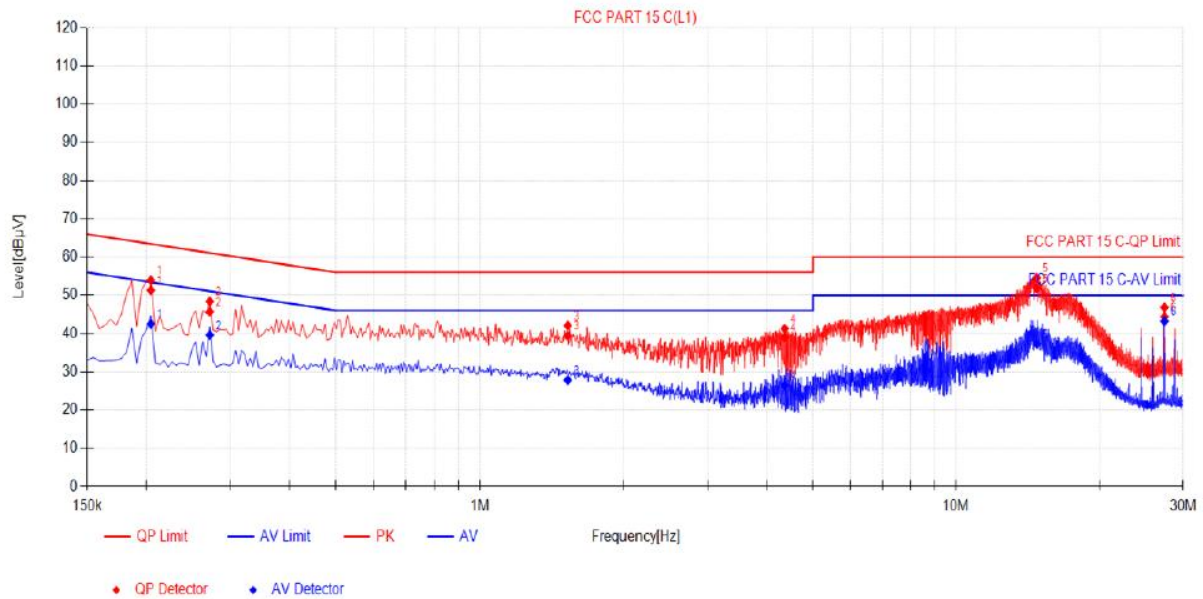

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.204	10.01	41.29	51.30	63.45	12.15	32.52	42.53	53.45	10.92	PASS
2	0.2715	9.80	35.92	45.72	61.07	15.35	29.82	39.62	51.07	11.45	PASS
3	1.527	10.46	28.97	39.43	56.00	16.57	17.37	27.83	46.00	18.17	PASS
4	4.362	10.79	28.22	39.01	56.00	16.99	15.61	26.40	46.00	19.60	PASS
5	14.7525	12.20	39.61	51.81	60.00	8.19	25.10	37.30	50.00	12.70	PASS
6	27.4335	13.39	31.03	44.42	60.00	15.58	29.84	43.23	50.00	6.77	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)


4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

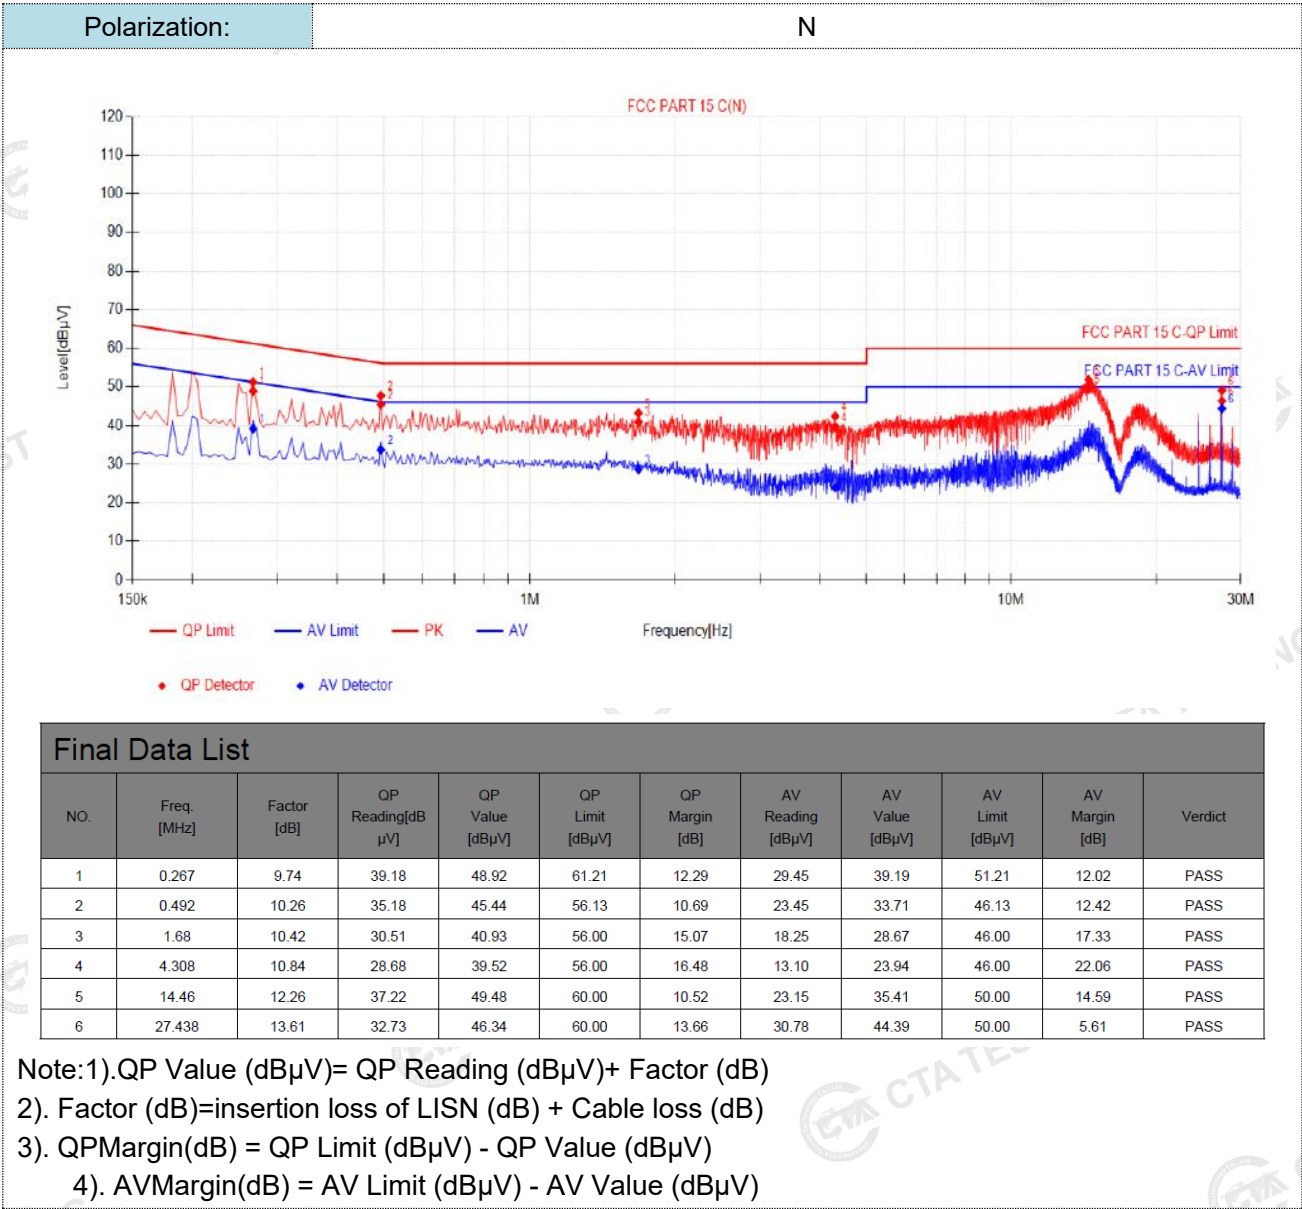

UNII-2C:

Polarization:

L

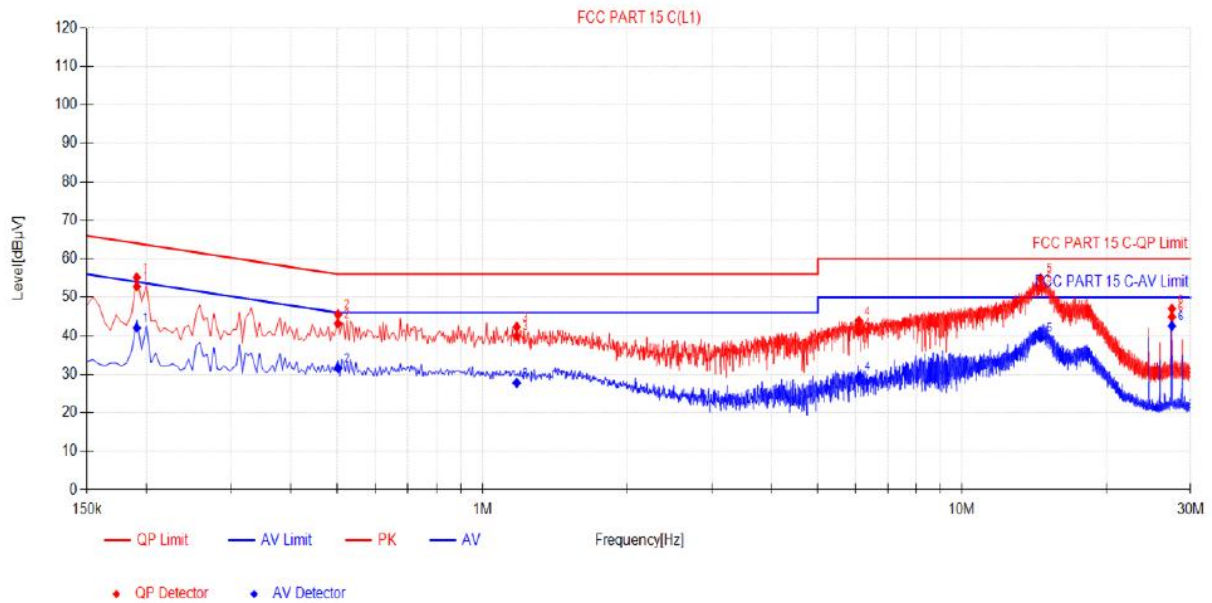

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1905	9.99	42.81	52.80	64.01	11.21	32.08	42.07	54.01	11.94	PASS
2	0.501	10.34	32.85	43.19	56.00	12.81	21.26	31.60	46.00	14.40	PASS
3	1.176	10.43	29.53	39.96	56.00	16.04	17.33	27.76	46.00	18.24	PASS
4	6.09	11.00	30.00	41.00	60.00	19.00	18.55	29.55	50.00	20.45	PASS
5	14.577	12.17	40.31	52.48	60.00	7.52	27.33	39.50	50.00	10.50	PASS
6	27.438	13.39	31.52	44.91	60.00	15.09	29.16	42.55	50.00	7.45	PASS

Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)


2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Polarization:

N

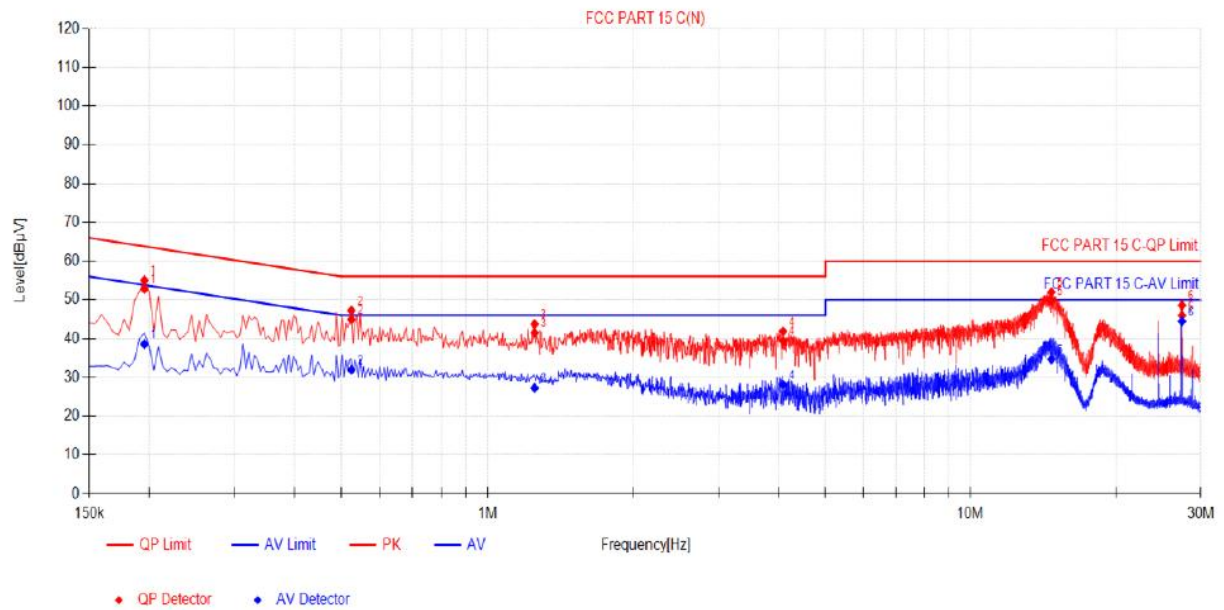

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.195	9.96	42.81	52.77	63.82	11.05	28.61	38.57	53.82	15.25	PASS
2	0.5235	10.26	34.70	44.96	56.00	11.04	21.67	31.93	46.00	14.07	PASS
3	1.248	10.40	31.06	41.46	56.00	14.54	16.89	27.29	46.00	18.71	PASS
4	4.0875	10.81	28.59	39.40	56.00	16.60	17.34	28.15	46.00	17.85	PASS
5	14.6985	12.30	37.36	49.66	60.00	10.34	22.36	34.66	50.00	15.34	PASS
6	27.4425	13.61	32.36	45.97	60.00	14.03	30.87	44.48	50.00	5.52	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

UNII-3:

Polarization:

L

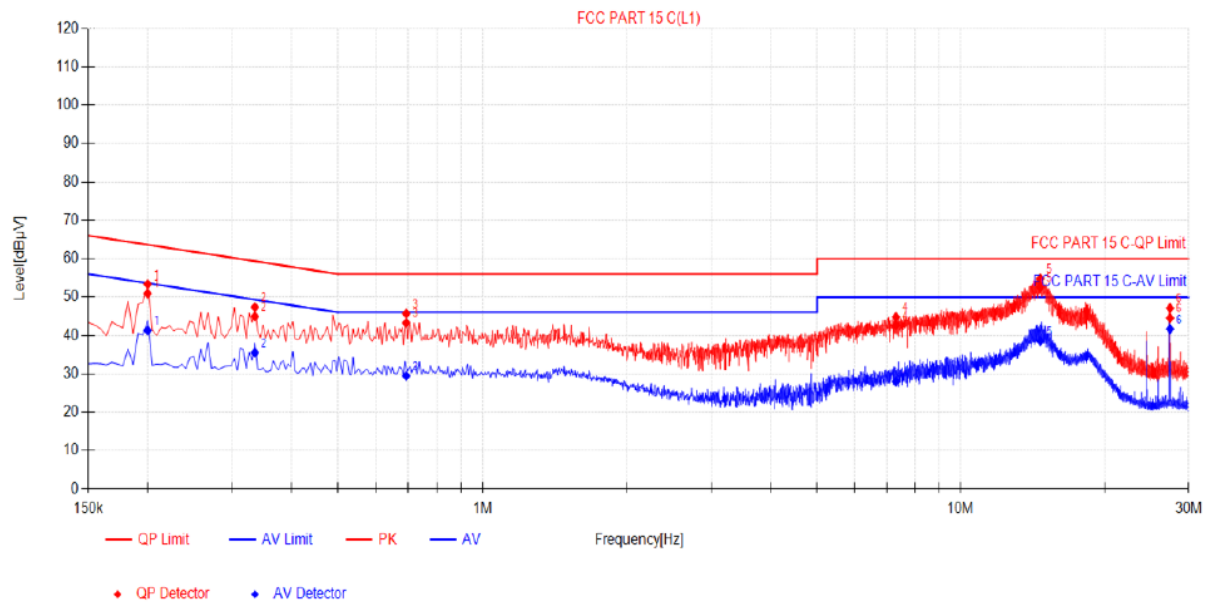

Final Data List



NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1995	10.04	40.87	50.91	63.63	12.72	31.22	41.26	53.63	12.37	PASS
2	0.3345	10.16	34.74	44.90	59.34	14.44	25.34	35.50	49.34	13.84	PASS
3	0.6945	10.41	32.84	43.25	56.00	12.75	19.02	29.43	46.00	16.57	PASS
4	7.3185	11.15	31.49	42.64	60.00	17.36	16.86	28.01	50.00	21.99	PASS
5	14.6625	12.18	40.37	52.55	60.00	7.45	26.37	38.55	50.00	11.45	PASS
6	27.438	13.39	31.14	44.53	60.00	15.47	28.27	41.66	50.00	8.34	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

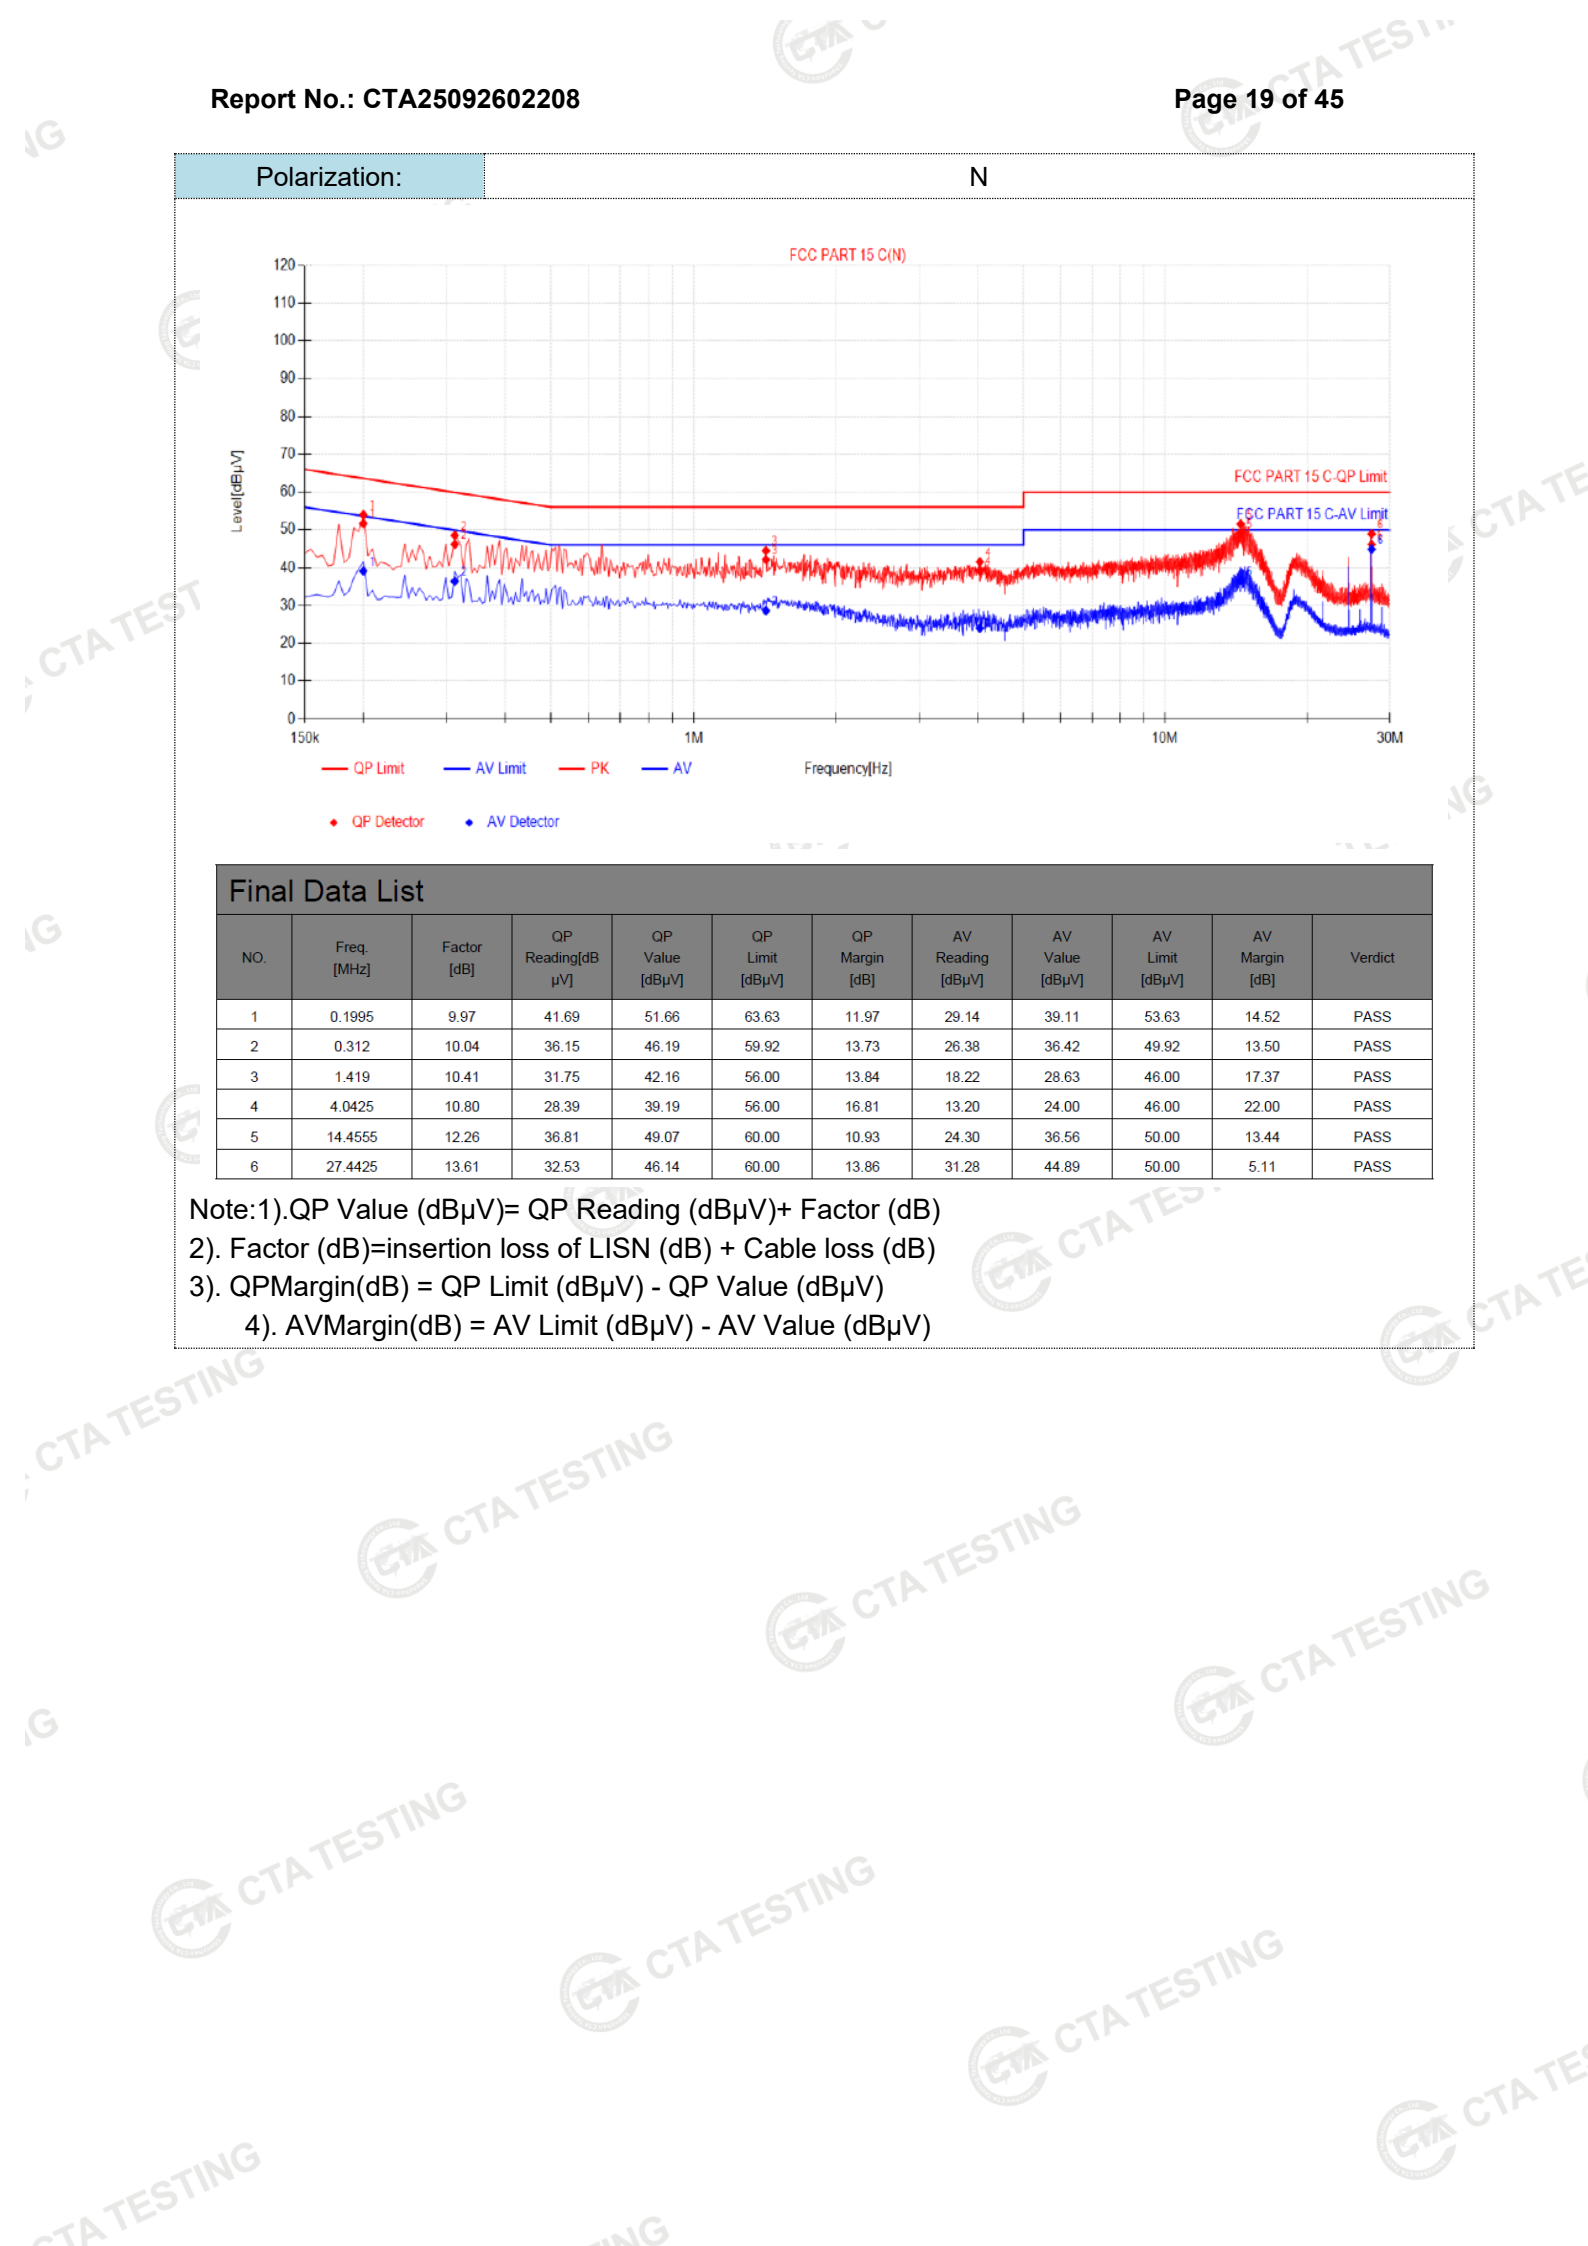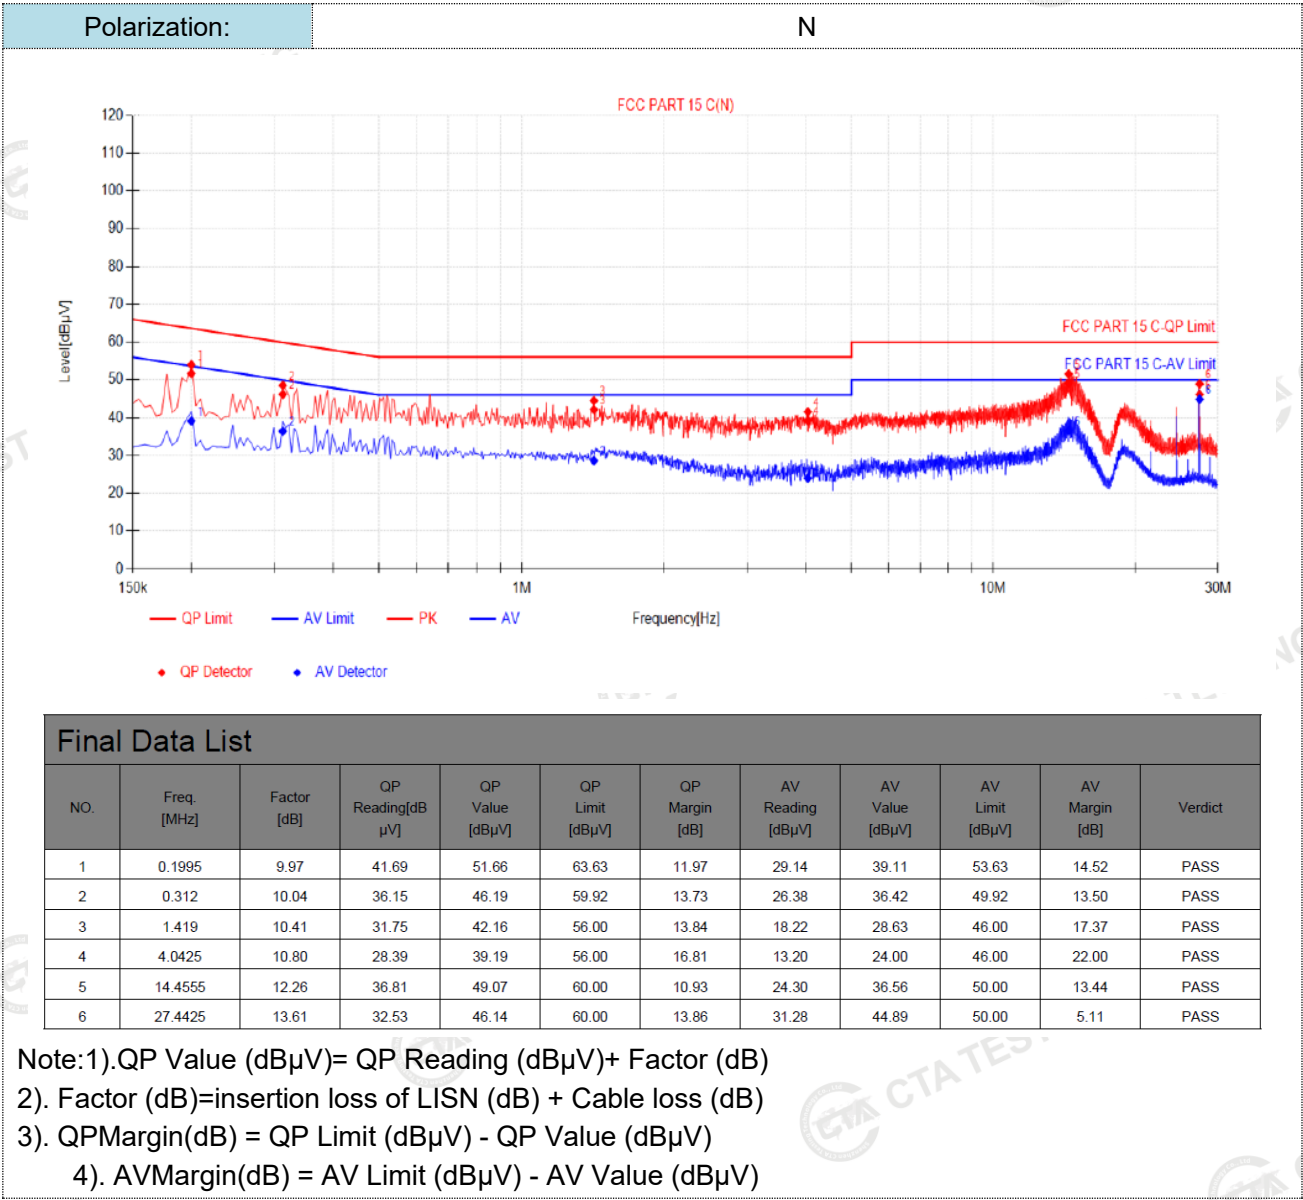

4.2. Radiated Emission

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

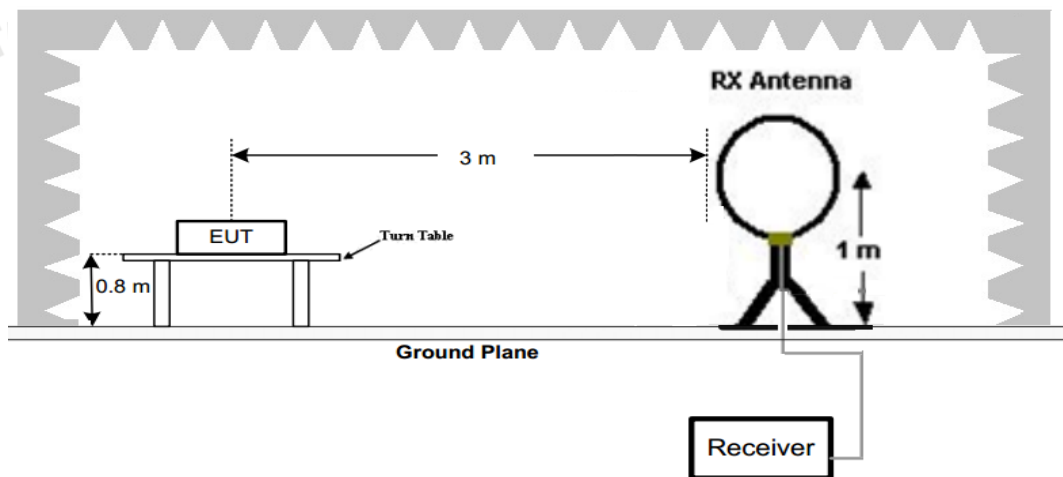


(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

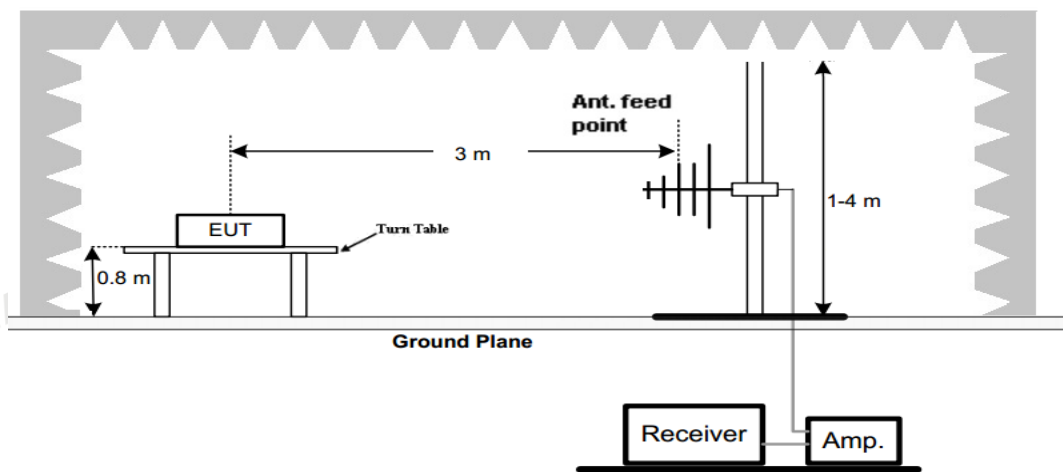

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

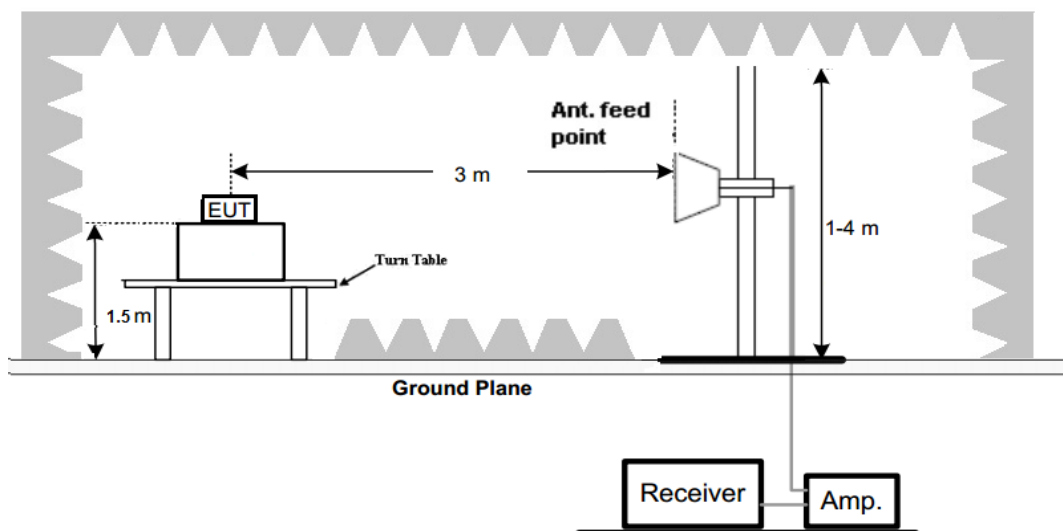

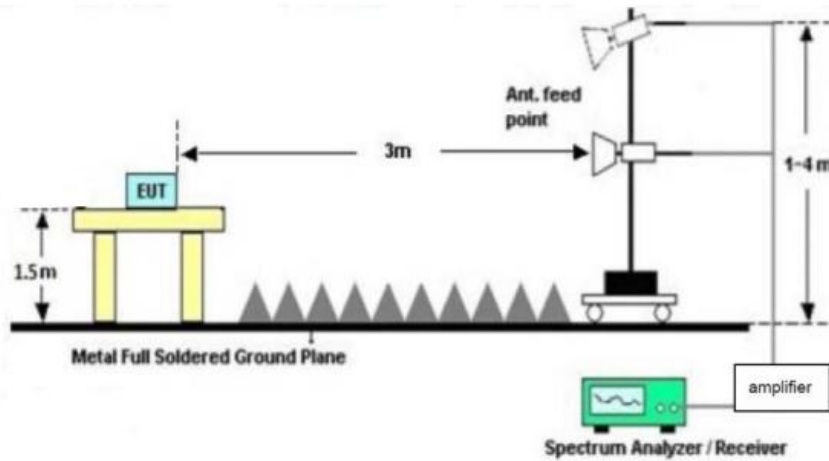

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS


Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All modes of 802.11a/n have been tested for below 1GHz test, only the worst case 802.11a low channel was recorded.
- All modes of 802.11a/n have been tested for above 1GHz test, only the worst case 802.11a was recorded.
- Radiated emission test from 9 KHz to 40GHz harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
- Conducted emission test from 30MHz to 40GHz harmonic of fundamental was verified, and emission margin is greater than 20dB in 27GHz to 40GHz and not recorded in this report.

UNII-1:

For 30MHz-1GHz

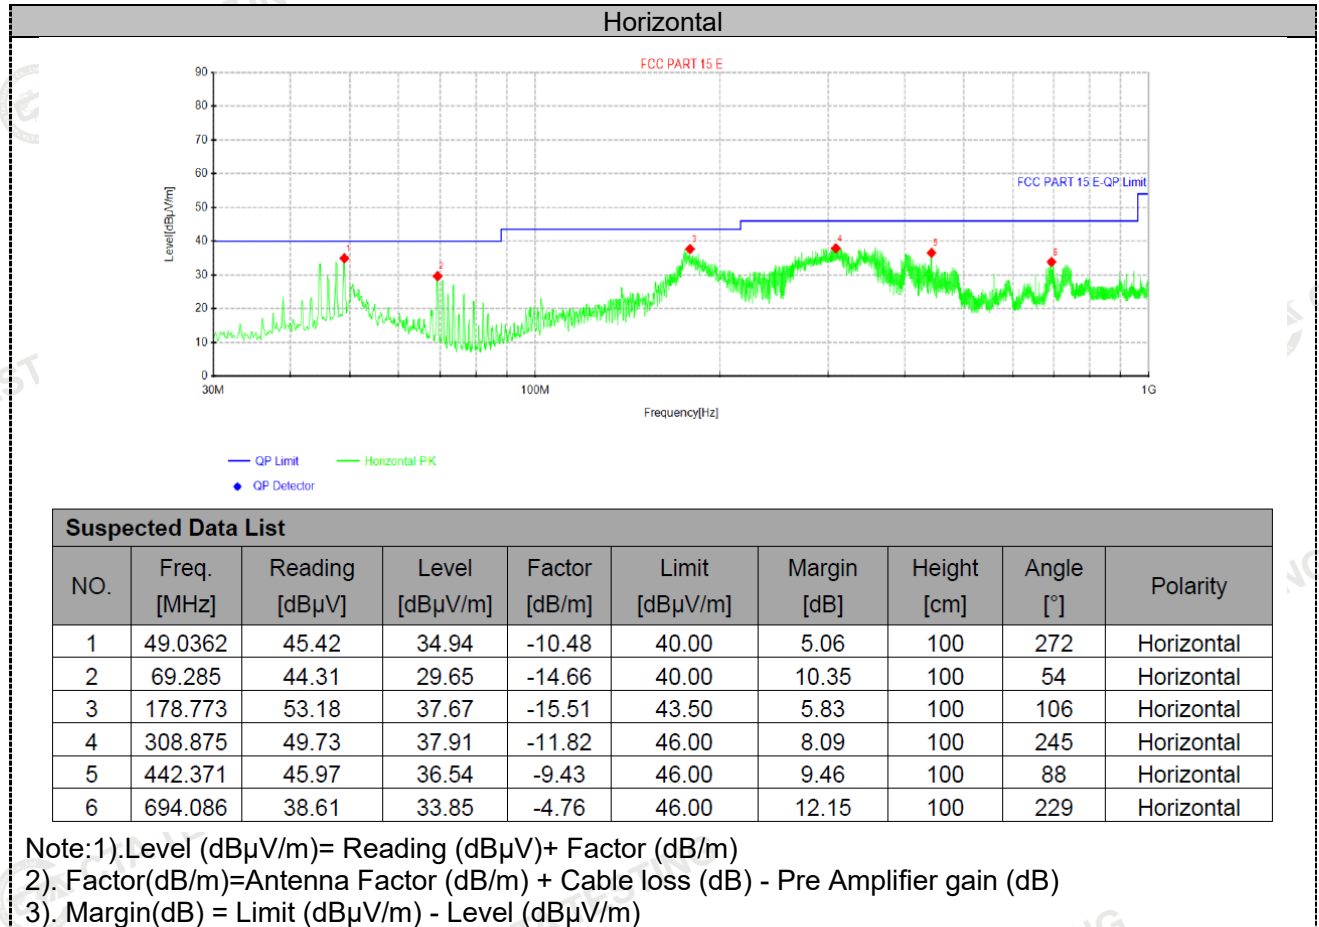


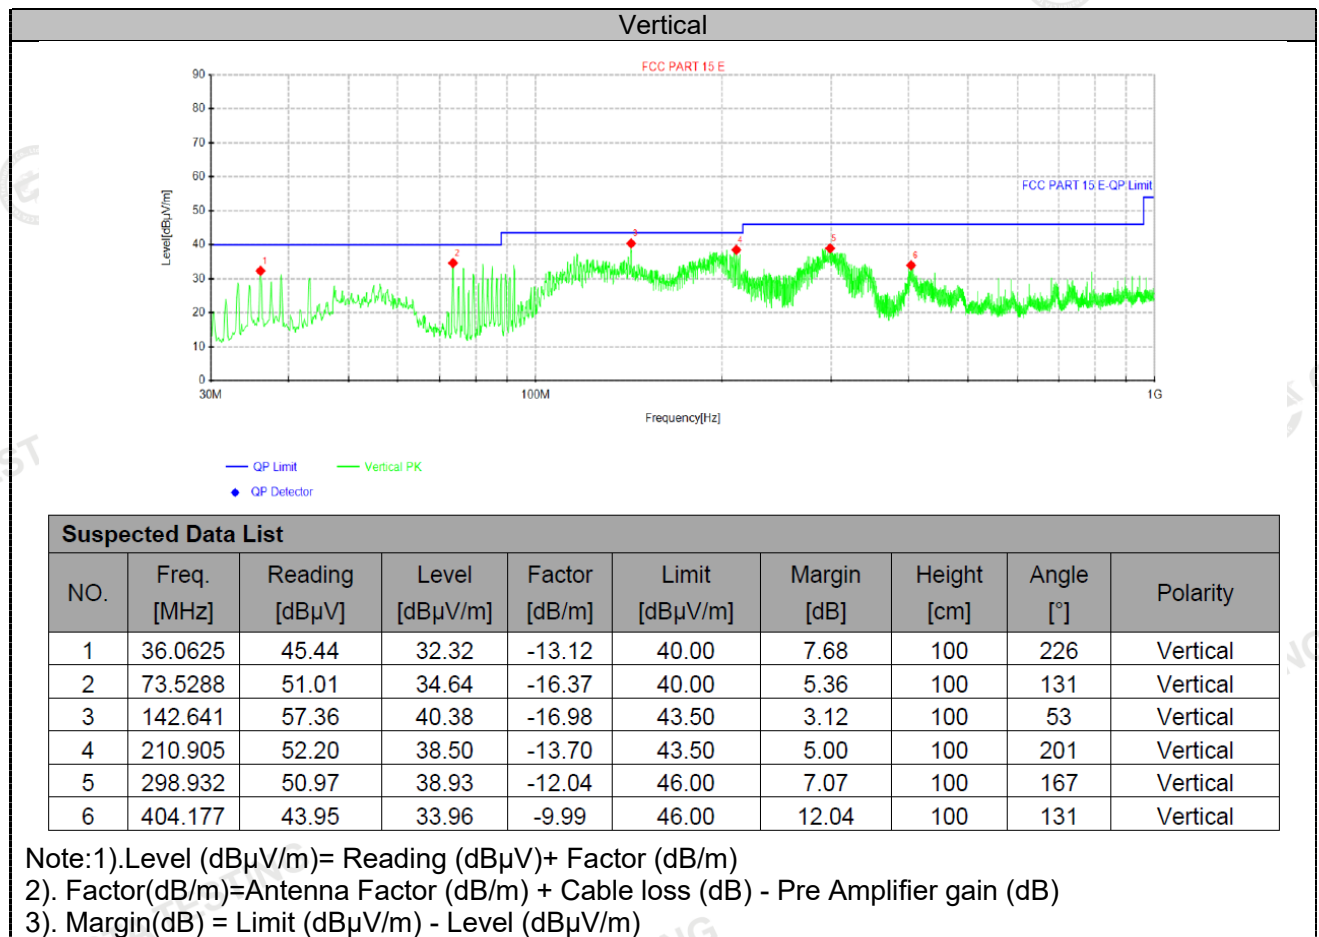

UNII-2A:

For 30MHz-1GHz

Horizontal

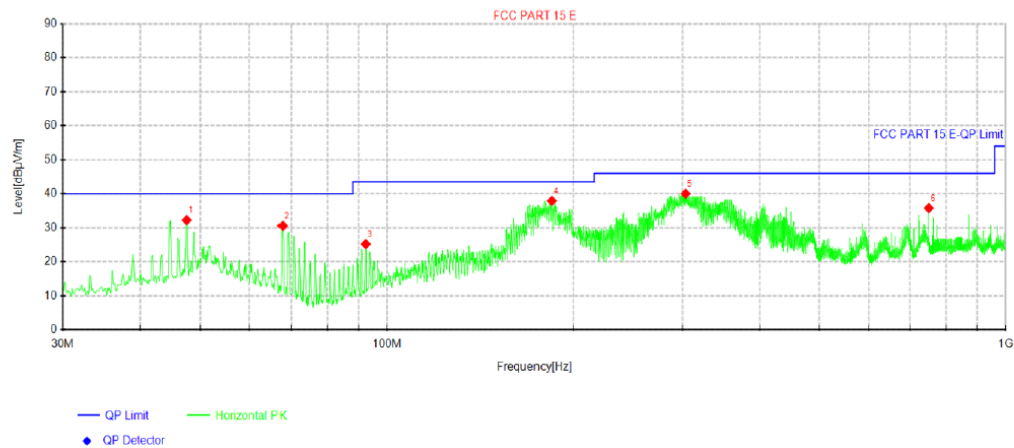



Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	47.5812	42.94	32.25	-10.69	40.00	7.75	100	193	Horizontal
2	67.83	44.61	30.58	-14.03	40.00	9.42	100	3	Horizontal
3	92.3225	39.07	25.20	-13.87	43.50	18.30	100	298	Horizontal
4	184.593	52.73	37.91	-14.82	43.50	5.59	100	123	Horizontal
5	303.54	51.95	40.02	-11.93	46.00	5.98	100	218	Horizontal
6	750.831	39.63	35.78	-3.85	46.00	10.22	100	316	Horizontal

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)


2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

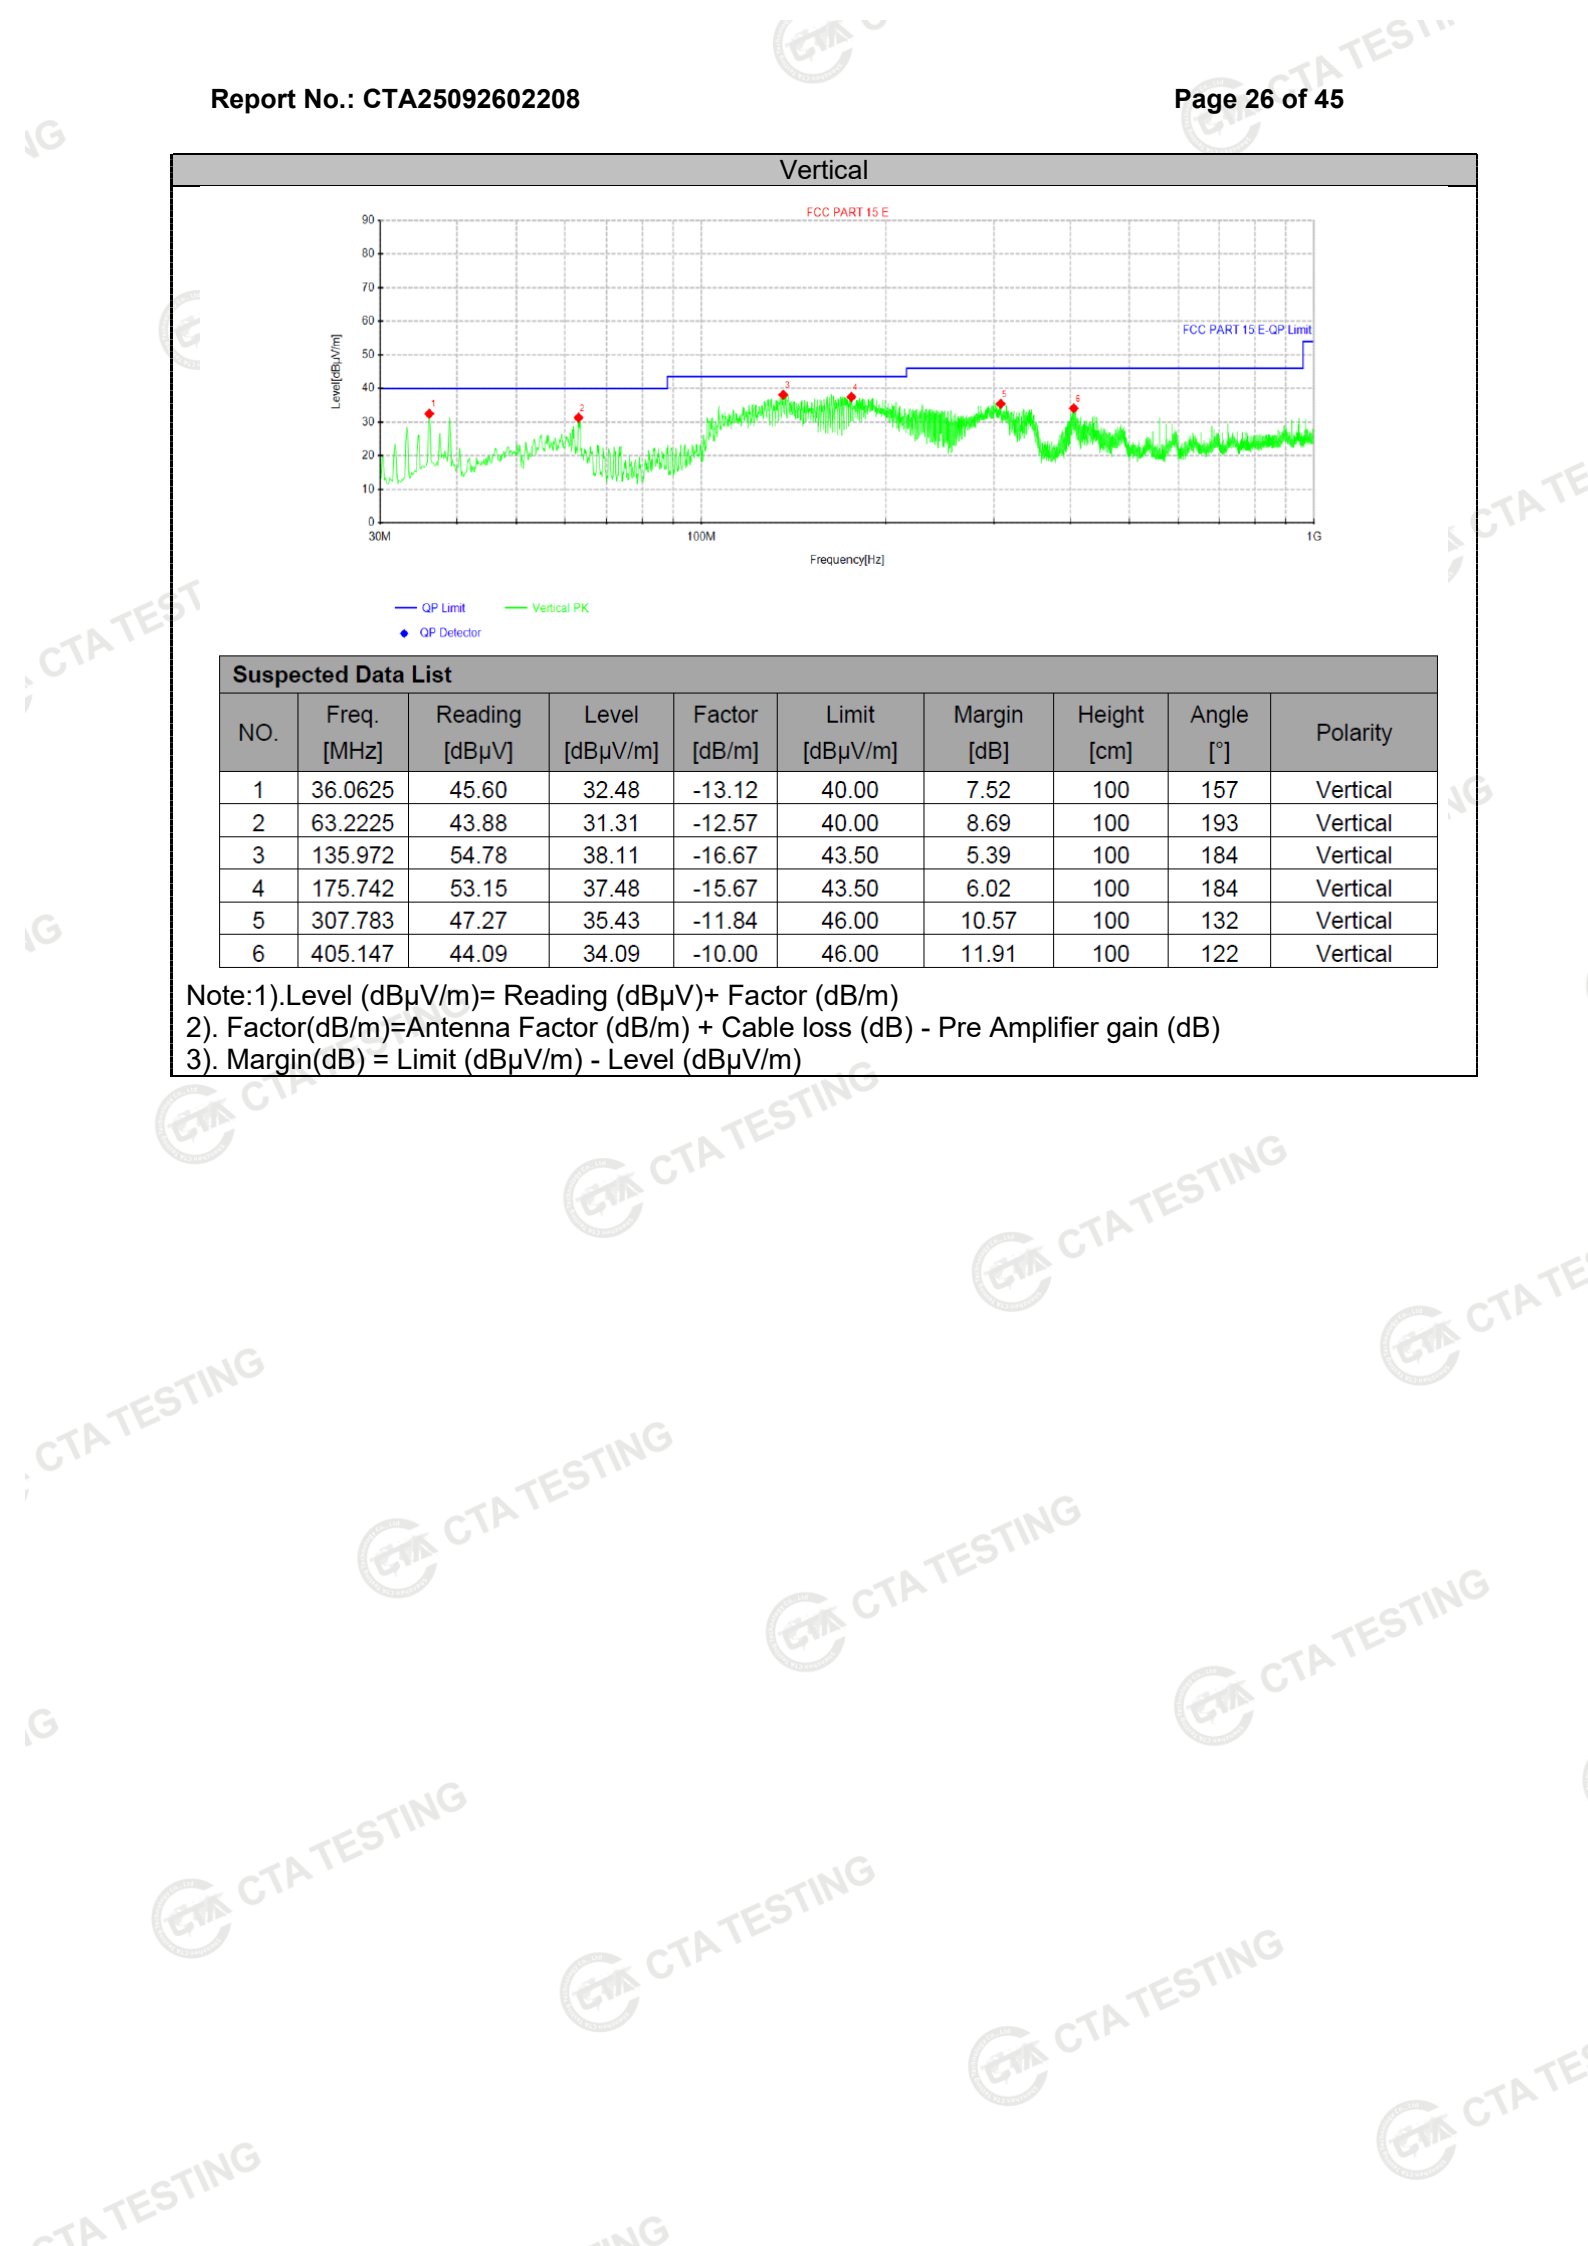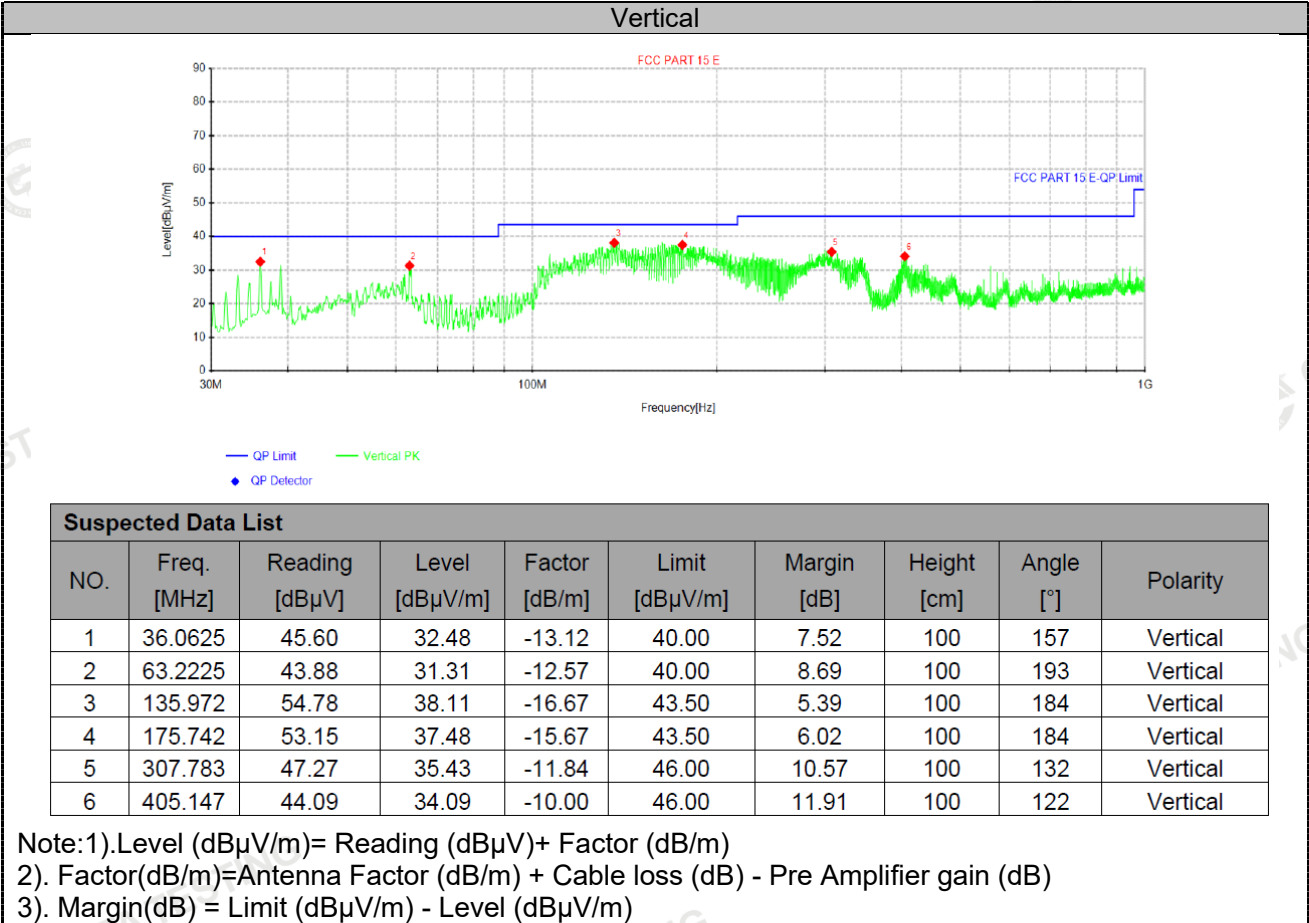

UNII-2C:

For 30MHz-1GHz

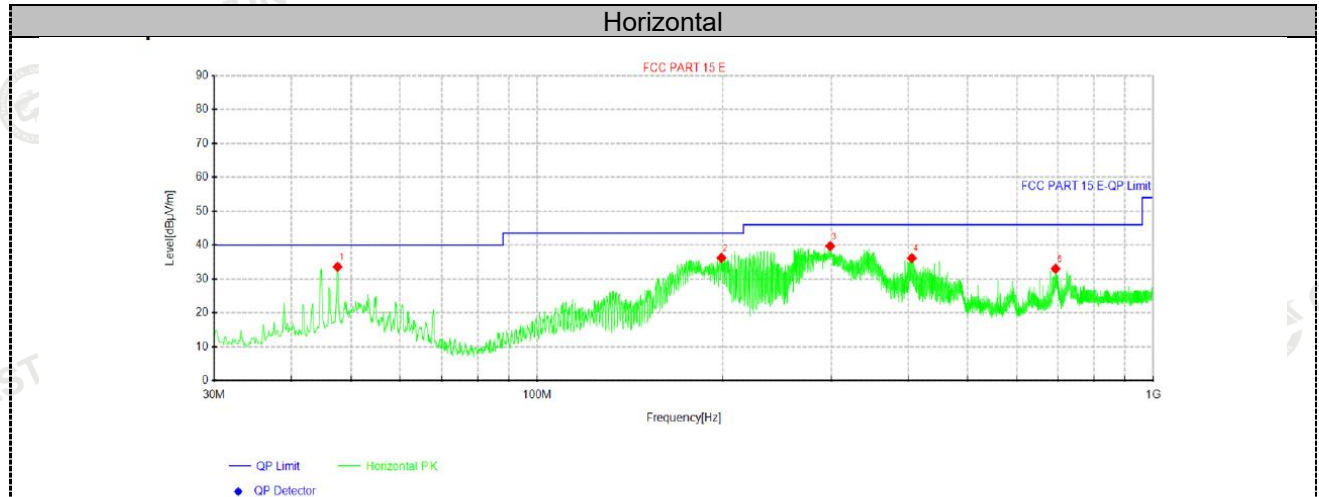


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	47.5812	44.30	33.61	-10.69	40.00	6.39	100	217	Horizontal
2	199.022	49.45	36.24	-13.21	43.50	7.26	100	157	Horizontal
3	298.811	51.74	39.70	-12.04	46.00	6.30	100	71	Horizontal
4	405.39	46.14	36.15	-9.99	46.00	9.85	100	253	Horizontal
5	694.086	37.78	33.02	-4.76	46.00	12.98	100	226	Horizontal

Note: 1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)


2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)


3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

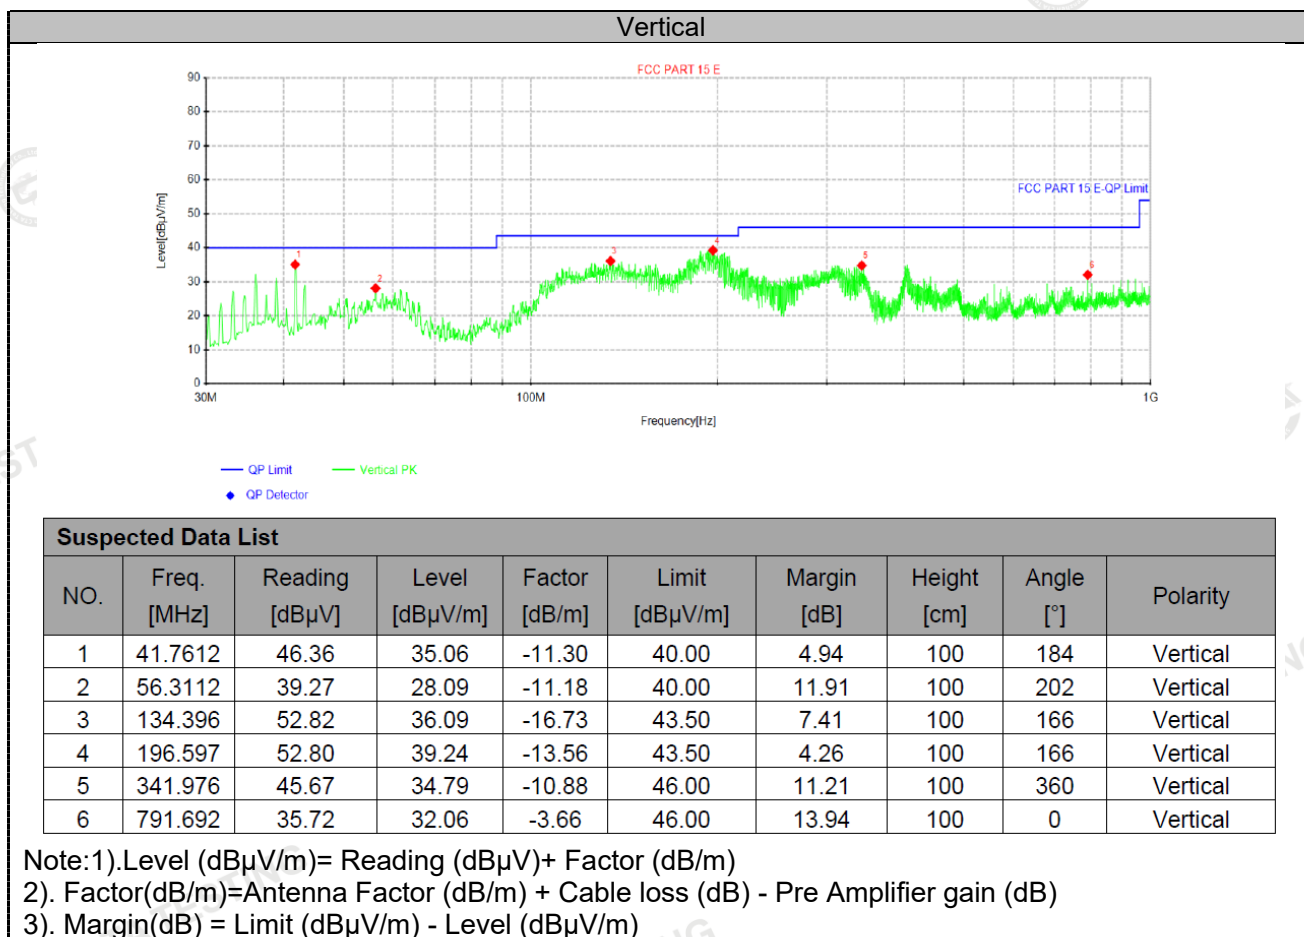

UNII-3:

For 30MHz-1GHz

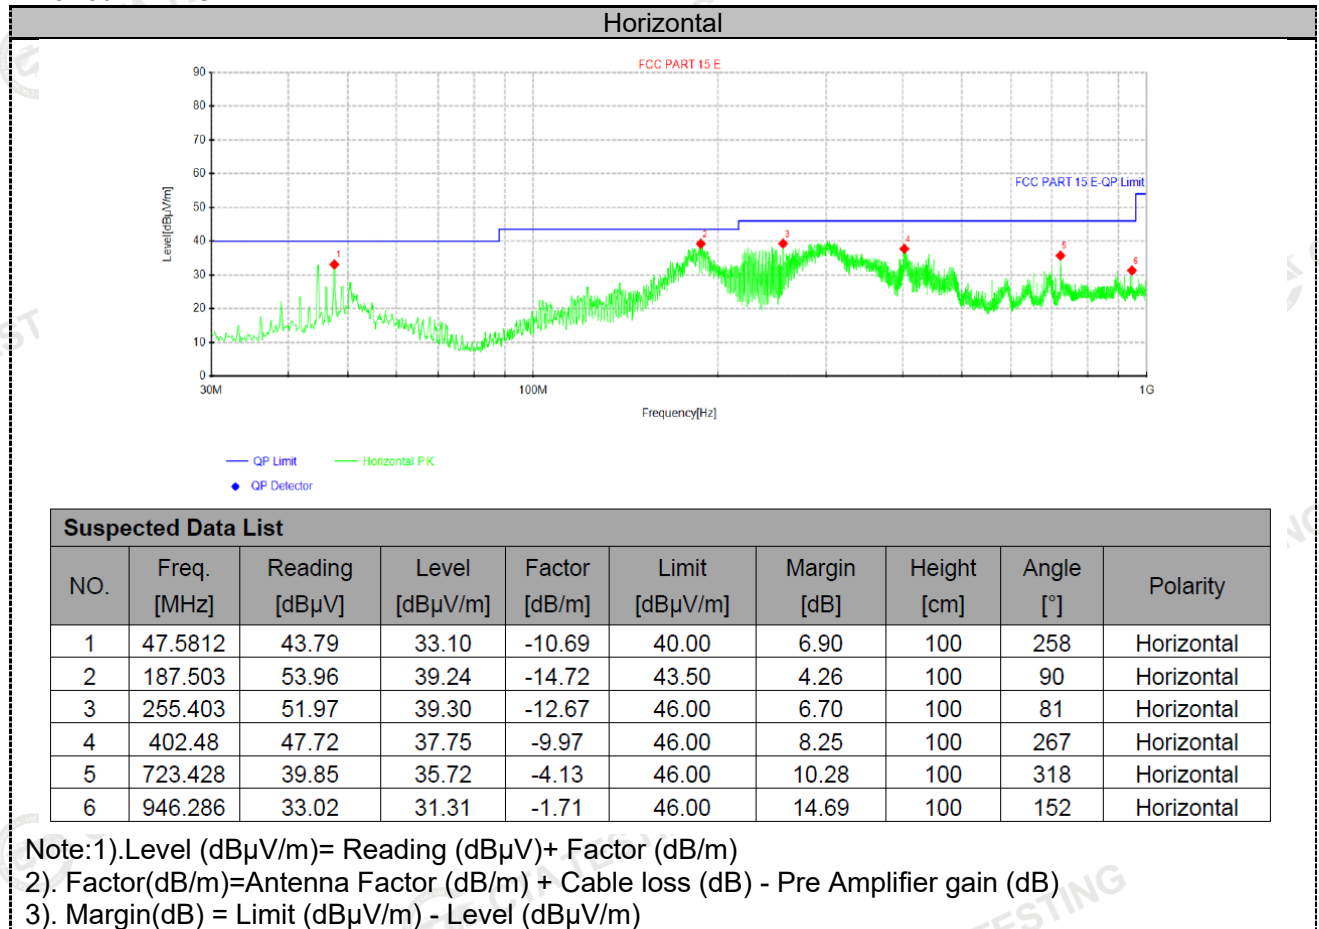

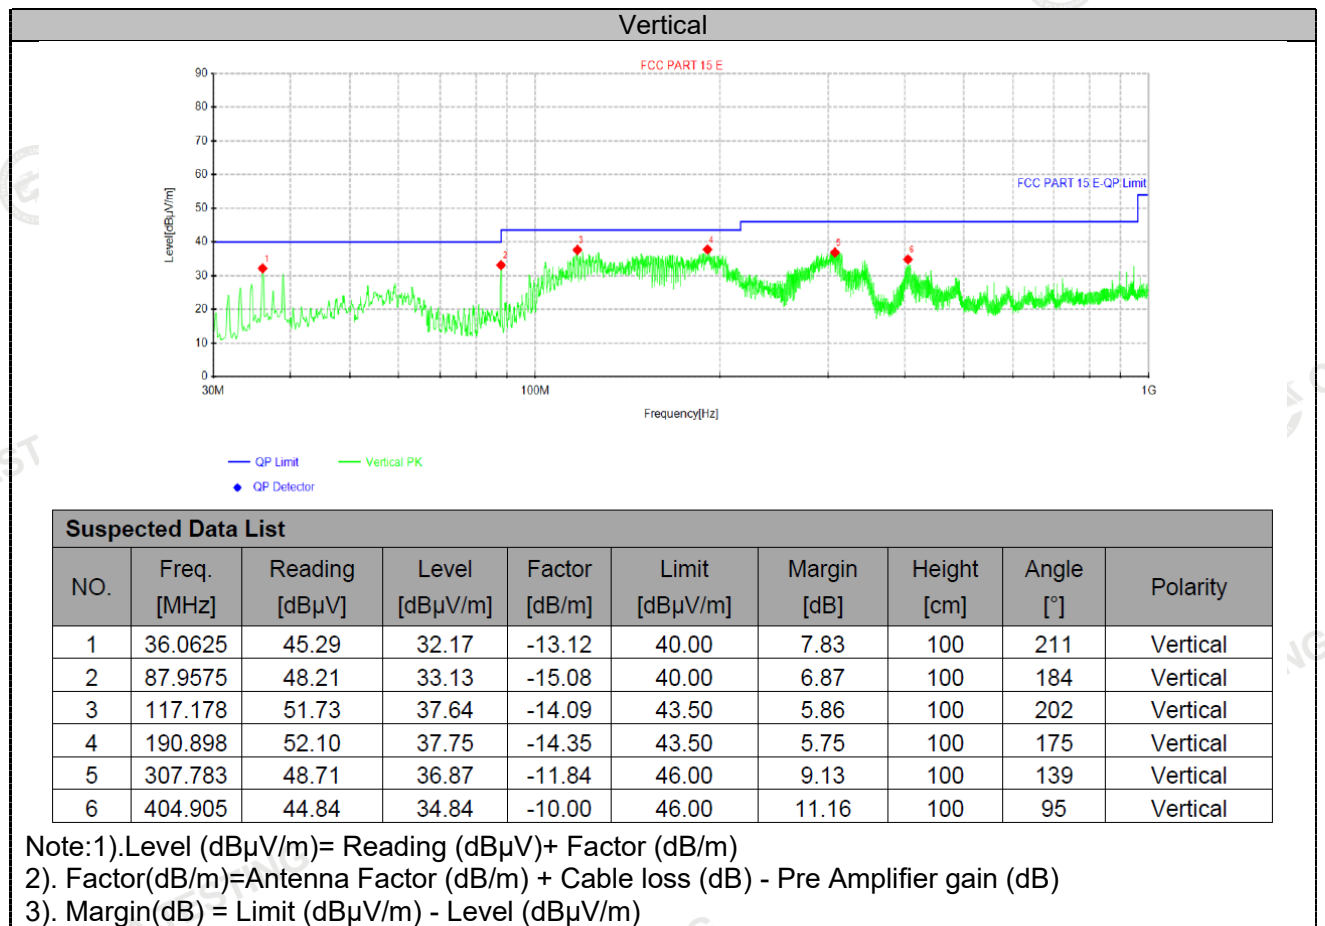

For 1GHz to 40GHz

Note: All 802.11a / 802.11n modes have been tested for above 1GHz test, only the worst case 802.11n was recorded.

5150-5250MHz:**U-NII 1 & 802.11N20 Mode (above 1GHz)**

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
	5150.00	55.71	PK	H	68.30	12.59	59.14	33.04	5.45	41.92	-3.43
36.00	5150.00	48.60	AV	H	54.00	5.40	52.03	33.04	5.45	41.92	-3.43
(5180MHz)	10360.00	53.64	PK	H	68.30	14.66	49.97	38.83	10.12	45.28	3.67
	--	--	AV	H	--	--	--	--	--	--	--
44.00	10440.00	51.83	PK	H	68.30	16.47	48.15	38.85	10.13	45.3	3.68
(5220MHz)	--	--	AV	H	--	--	--	--	--	--	--
48.00	5350.50	49.93	PK	H	68.30	18.37	53.20	32.84	5.97	42.08	-3.27
(5240MHz)	10480.00	52.65	PK	H	68.30	15.65	48.91	38.89	10.19	45.34	3.74
	--	--	AV	H	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
	5150.00	57.52	PK	V	68.30	10.78	60.95	33.04	5.45	41.92	-3.43
36.00	5150.00	48.80	AV	V	54.00	5.20	52.23	33.04	5.45	41.92	-3.43
(5180MHz)	10360.00	51.75	PK	V	68.30	16.55	48.08	38.83	10.12	45.28	3.67
	--	--	--	V	--	--	--	--	--	--	--
44.00	10440.00	52.75	PK	V	68.30	15.55	49.07	38.85	10.13	45.3	3.68
(5220MHz)	--	--	--	V	--	--	--	--	--	--	--
48.00	5350.50	47.78	PK	V	68.30	20.52	51.05	32.84	5.97	42.08	-3.27
(5240MHz)	10480.00	52.73	PK	V	68.30	15.57	48.99	38.89	10.19	45.34	3.74
	--	--	AV	V	--	--	--	--	--	--	--

5260-5320MHz:**U-NII-2A & 802.11N20 Mode (above 1GHz)**

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
	5150	56.70	PK	H	68.30	11.60	60.13	33.04	5.45	41.92	-3.43
52.00	5150	48.63	AV	H	54.00	5.37	52.06	33.04	5.45	41.92	-3.43
(5260MHz)	10520	48.83	PK	H	68.30	19.47	45.07	38.91	10.2	45.35	3.76
	--	--	AV	H	--	--	--	--	--	--	--
60.00	10600	52.93	PK	H	68.30	15.37	49.18	38.92	10.21	45.38	3.75
(5300MHz)	--	--	AV	H	--	--	--	--	--	--	--
	5350	55.78	PK	H	68.30	12.52	59.05	32.84	5.97	42.08	-3.27
64.00	5350	47.70	AV	H	54.00	6.30	50.97	32.84	5.97	42.08	-3.27
(5320MHz)	10640	51.76	PK	H	68.30	16.54	48.00	38.94	10.23	45.41	3.76
	--	--	AV	H	--	--	--	--	--	--	--

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5150	54.55	PK	V	68.30	13.75	57.98	33.04	5.45	41.92	-3.43
36.00	5150	48.65	AV	V	54.00	5.35	52.08	33.04	5.45	41.92	-3.43
(5260MHz)	10520	49.71	PK	V	68.30	18.59	45.95	38.91	10.2	45.35	3.76
	--	--	AV	V	--	--	--	--	--	--	--
60.00	10600	53.84	PK	V	68.30	14.46	50.09	38.92	10.21	45.38	3.75
(5220MHz)	--	--	AV	V	--	--	--	--	--	--	--
48.00	5350.00	54.85	PK	V	68.30	13.45	58.12	32.84	5.97	42.08	-3.27
	5350.00	46.89	AV	V	54.00	7.11	50.16	32.84	5.97	42.08	-3.27
(5320MHz)	10640	51.97	PK	V	68.30	16.33	48.21	38.94	10.23	45.41	3.76
	--	--	AV	V	--	--	--	--	--	--	--

5500-5700MHz:**U-NII-2C & 802.11N20 Mode (above 1GHz)**

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5460	58.44	PK	H	68.30	9.86	61.26	33.39	6.01	42.22	-2.82
100	5460	47.27	AV	H	54.00	6.73	50.09	33.39	6.01	42.22	-2.82
5500MHz	11000	50.67	PK	H	68.30	17.63	46.24	39.12	10.85	45.54	4.43
	--	--	--	--	--	--	--	--	--	--	--
120	11160	53.57	PK	H	68.30	14.73	49.11	39.07	10.87	45.48	4.46
5580MHz	--	--	AV	H	--	--	--	--	--	--	--
140	5855	58.77	PK	H	68.30	9.53	60.96	33.91	6.17	42.27	-2.19
5700MHz	5855	47.96	AV	H	54.00	6.04	50.15	33.91	6.17	42.27	-2.19
	11400	52.66	PK	H	68.30	15.64	48.18	39.05	10.9	45.47	4.48
	--	--	AV	H	--	--	--	--	--	--	--

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5460	56.22	PK	V	68.30	12.08	59.04	33.39	6.01	42.22	-2.82
100	5460	47.38	AV	V	54.00	6.62	50.20	33.39	6.01	42.22	-2.82
5500MHz	11000	50.53	PK	V	68.30	17.77	46.10	39.12	10.85	45.54	4.43
	--	--	--	--	--	--	--	--	--	--	--
120	11160	52.51	PK	V	68.30	15.79	48.05	39.07	10.87	45.48	4.46
5580MHz	--	--	AV	V	--	--	--	--	--	--	--
140	5855	58.92	PK	V	68.30	9.38	61.11	33.91	6.17	42.27	-2.19
5700MHz	5855	50.75	AV	V	54.00	3.25	52.94	33.91	6.17	42.27	-2.19
	11400	52.69	PK	V	68.30	15.61	48.21	39.05	10.9	45.47	4.48
	--	--	PK	V	--	--	--	--	--	--	--

5725-5850MHz:

U-NII 3 & 802.11N20 Mode (above 1GHz)

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	39.83	PK	H	68.30	28.47	42.06	33.20	5.78	41.21	-2.23
	5700.00	41.67	PK	H	105.30	63.63	44.01	33.40	5.93	41.67	-2.34
	5720.00	42.18	PK	H	110.90	68.72	44.96	33.42	6.04	42.24	-2.78
149.00	5725.00	41.30	PK	H	122.30	81.00	44.08	33.42	6.04	42.24	-2.78
(5745MHz)	5850.00	47.63	PK	H	122.30	74.67	50.03	33.90	6.49	42.79	-2.40
	5855.00	45.86	PK	H	110.90	65.04	48.15	33.90	6.74	42.93	-2.29
	5875.00	45.88	PK	H	105.30	59.42	47.98	33.97	7.02	43.09	-2.10
	5925.00	46.42	PK	H	68.30	21.88	48.19	34.17	7.33	43.27	-1.77
149.00	11490.00	53.40	PK	H	68.30	14.90	48.92	39.02	10.91	45.45	4.48
(5745MHz)	--	--	AV	H	--	--	--	--	--	--	--
	5650.00	38.72	PK	H	68.30	29.58	40.95	33.20	5.78	41.21	-2.23
	5700.00	41.94	PK	H	105.30	63.36	44.28	33.40	5.93	41.67	-2.34
157.00	5720.00	42.42	PK	H	110.90	68.48	45.20	33.42	6.04	42.24	-2.78
(5785MHz)	5850.00	46.73	PK	H	122.30	75.57	49.13	33.90	6.49	42.79	-2.40
	5855.00	45.66	PK	H	110.90	65.24	47.95	33.90	6.74	42.93	-2.29
	5875.00	46.06	PK	H	105.30	59.24	48.16	33.97	7.02	43.09	-2.10
	5925.00	46.26	PK	H	68.30	22.04	48.03	34.17	7.33	43.27	-1.77
157.00	11570.00	53.49	PK	H	68.30	14.81	49.04	38.93	10.95	45.43	4.45
(5785MHz)	--	--	AV	H	--	--	--	--	--	--	--
	5650.00	38.99	PK	H	68.30	29.31	41.22	33.20	5.78	41.21	-2.23
	5700.00	41.91	PK	H	105.30	63.39	44.25	33.40	5.93	41.67	-2.34
165.00	5720.00	43.26	PK	H	110.90	67.64	46.04	33.42	6.04	42.24	-2.78
(5825MHz)	5850.00	46.81	PK	H	122.30	75.49	49.21	33.90	6.49	42.79	-2.40
	5855.00	45.85	PK	H	110.90	65.05	48.14	33.90	6.74	42.93	-2.29
	5875.00	46.16	PK	H	105.30	59.14	48.26	33.97	7.02	43.09	-2.10
	5925.00	46.17	PK	H	68.30	22.13	47.94	34.17	7.33	43.27	-1.77
165.00	11650.00	52.68	PK	H	68.30	15.62	48.10	38.83	11.16	45.41	4.58
(5825MHz)	--	--	AV	H	--	--	--	--	--	--	--


Tested	Frequency	Emission	Detector	Antenna	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	38.97	PK	V	68.30	29.33	41.20	33.20	5.78	41.21	-2.23
	5700.00	41.72	PK	V	105.30	63.58	44.06	33.40	5.93	41.67	-2.34
	5720.00	42.40	PK	V	110.90	68.50	45.18	33.42	6.04	42.24	-2.78
149.00	5725.00	44.42	PK	V	122.30	77.88	47.20	33.42	6.04	42.24	-2.78
(5745MHz)	5850.00	45.58	PK	V	122.30	76.72	47.98	33.90	6.49	42.79	-2.40
	5855.00	45.79	PK	V	110.90	65.11	48.08	33.90	6.74	42.93	-2.29
	5875.00	45.94	PK	V	105.30	59.36	48.04	33.97	7.02	43.09	-2.10
	5925.00	46.40	PK	V	68.30	21.90	48.17	34.17	7.33	43.27	-1.77
149.00	11490.00	53.48	PK	V	68.30	14.82	49.00	39.02	10.91	45.45	4.48
(5745MHz)	--	--	AV	V	--	--	--	--	--	--	--
	5650.00	38.89	PK	V	68.30	29.41	41.12	33.20	5.78	41.21	-2.23
	5700.00	41.85	PK	V	105.30	63.45	44.19	33.40	5.93	41.67	-2.34
157.00	5720.00	43.28	PK	V	110.90	67.62	46.06	33.42	6.04	42.24	-2.78
(5785MHz)	5850.00	45.57	PK	V	122.30	76.73	47.97	33.90	6.49	42.79	-2.40
	5855.00	45.79	PK	V	110.90	65.11	48.08	33.90	6.74	42.93	-2.29
	5875.00	46.18	PK	V	105.30	59.12	48.28	33.97	7.02	43.09	-2.10
	5925.00	46.18	PK	V	68.30	22.12	47.95	34.17	7.33	43.27	-1.77
157.00	11570.00	53.61	PK	V	68.30	14.69	49.16	38.93	10.95	45.43	4.45
(5785MHz)	--	--	AV	V	--	--	--	--	--	--	--
	5650.00	39.79	PK	V	68.30	28.51	42.02	33.20	5.78	41.21	-2.23
	5700.00	40.64	PK	V	105.30	64.66	42.98	33.40	5.93	41.67	-2.34
165.00	5720.00	43.39	PK	V	110.90	67.51	46.17	33.42	6.04	42.24	-2.78
(5825MHz)	5850.00	46.78	PK	V	122.30	75.52	49.18	33.90	6.49	42.79	-2.40
	5855.00	45.68	PK	V	110.90	65.22	47.97	33.90	6.74	42.93	-2.29
	5875.00	46.06	PK	V	105.30	59.24	48.16	33.97	7.02	43.09	-2.10
	5925.00	46.19	PK	V	68.30	22.11	47.96	34.17	7.33	43.27	-1.77
165.00	11650.00	52.68	PK	V	68.30	15.62	48.10	38.83	11.16	45.41	4.58
(5825MHz)	--	--	AV	V	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
5. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40,

4.3. Maximum Conducted Average Output Power

TEST CONFIGURATION



TEST PROCEDURE

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Method PM is Measurement using an RF average power sensor. The procedure for this method is as follows:

1. The testing follows the ANSI C63.10 Section 12.4.3
2. The maximum average conducted output power may be measured using a broadband average RF power sensor.
3. The power sensor shall have a video bandwidth that is greater than or equal to the OBW bandwidth and shall use a fast-responding diode detector.

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Fixed: 1 Watt (30dBm) Mobile and portable: 250mW (24dBm)
5250-5350	250mW (24dBm)
5470-5725	250mW (24dBm)
5725-5850	1 Watt (30dBm)
Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)	

For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

TEST RESULTS

Please refer to FCC Appendix RF Test Data for 5GWIFI

Total Output Average power(dBm)= Output Average power(dBm)+ Duty Factor(dB)

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

- Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 500KHz for U-NII 3 band.
- Set the VBW $\geq 3 \times$ RBW.
- Set the span to encompass the entire EBW.
- Detector = Average.
- Sweep time = auto couple.
- Trace mode = Average hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level.

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz
5250-5350	11dBm/MHz
5470-5725	11dBm/MHz
5725-5850	30dBm/500kHz

TEST RESULTS

Please refer to FCC Appendix RF Test Data for 5GWIFI

Total Power Spectral Density (dBm/MHz)= Power Spectral Density (dBm/MHz)+ Duty Factor (dB)

Remark: P.S.D(dBm/500KHz)= P.S.D(dBm/300KHz)+10 log (500 kHz/300KHz)+ Duty Factor (dB).

RBW factor = 10 log (500 KHz / 300 KHz) = 2.22 dB

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT


For Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz

TEST RESULTS

Please refer to FCC Appendix RF Test Data for 5GWIFI

4.6. 26dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The procedure for this method is as follows:

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

LIMIT

No Limits for 26dBc Bandwidth

TEST RESULTS

Please refer to FCC Appendix RF Test Data for 5GWIFI

4.7. Frequency Stability


Standard Applicable

According to FCC §15.407(g) "Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual."

According to FCC §2.1055(a) "The frequency stability shall be measured with variation of ambient temperature as follows:"

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (2) From -20° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.
- (3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

Test Configuration

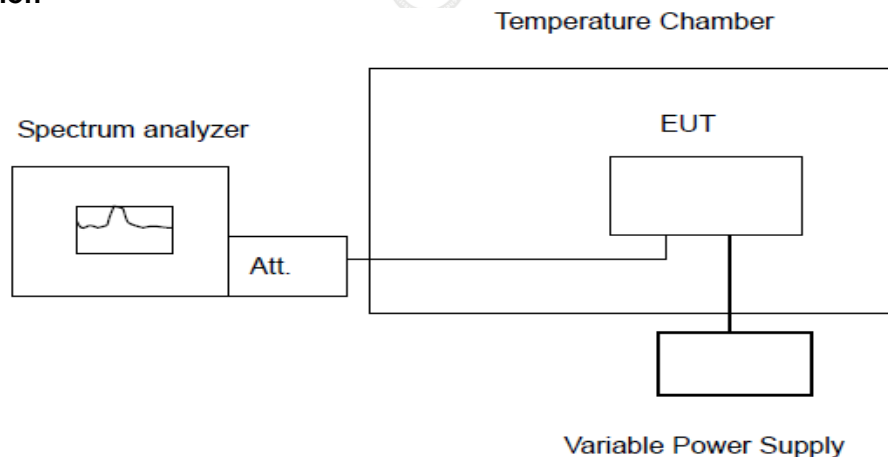

Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 degree operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30° degree. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10° degree increased per stage until the highest temperature of $+50^{\circ}$ degree reached.

Test Results

PASS

Note: Measured all conditions and recorded worst case.

IEEE 802.11N20 Mode / 5180 – 5240 MHz / 5180 MHz

Enviroment Temperature (Degree)	Voltage (Vdc)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	4.18	5179.978232	5150 – 5250	PASS
20	3.42	5179.997731	5150 – 5250	PASS
50	3.80	5179.971643	5150 – 5250	PASS
40	3.80	5179.924979	5150 – 5250	PASS
30	3.80	5179.943188	5150 – 5250	PASS
20	3.80	5179.919211	5150 – 5250	PASS
10	3.80	5179.918366	5150 – 5250	PASS
0	3.80	5179.954339	5150 – 5250	PASS
-10	3.80	5179.946445	5150 – 5250	PASS
-20	3.80	5179.913979	5150 – 5250	PASS
-30	3.80	5179.934682	5150 – 5250	PASS

IEEE 802.11N20 Mod / 5260 – 5320 MHz / 5260 MHz

Enviroment Temperature (Degree)	Voltage (Vdc)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	4.18	5260.010342	5250 – 5350	PASS
20	3.42	5260.034081	5250 – 5350	PASS
50	3.80	5260.093373	5250 – 5350	PASS
40	3.80	5260.085562	5250 – 5350	PASS
30	3.80	5260.012759	5250 – 5350	PASS
20	3.80	5260.062645	5250 – 5350	PASS
10	3.80	5260.022978	5250 – 5350	PASS
0	3.80	5260.071839	5250 – 5350	PASS
-10	3.80	5260.034041	5250 – 5350	PASS
-20	3.80	5260.048051	5250 – 5350	PASS
-30	3.80	5260.092280	5250 – 5350	PASS

IEEE 802.11N20 Mode / 5500 – 5700 MHz / 5500 MHz


Enviroment Temperature (Degree)	Voltage (Vdc)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	4.18	5500.046611	5470 – 5725	PASS
20	3.42	5500.071352	5470 – 5725	PASS
50	3.80	5500.085033	5470 – 5725	PASS
40	3.80	5500.015042	5470 – 5725	PASS
30	3.80	5500.053346	5470 – 5725	PASS
20	3.80	5500.019489	5470 – 5725	PASS
10	3.80	5500.078866	5470 – 5725	PASS
0	3.80	5500.077341	5470 – 5725	PASS
-10	3.80	5500.023938	5470 – 5725	PASS
-20	3.80	5500.052441	5470 – 5725	PASS
-30	3.80	5500.081329	5470 – 5725	PASS

IEEE 802.11N20 Mode / 5745 – 5825 MHz / 5745 MHz

Enviroment Temperature (Degree)	Voltage (Vdc)	Measured Frequency (MHz)	Limit Range (MHz)	Test Results
20	4.18	5744.972033	5725 – 5850	PASS
20	3.42	5744.993562	5725 – 5850	PASS
50	3.80	5744.931011	5725 – 5850	PASS
40	3.80	5744.909371	5725 – 5850	PASS
30	3.80	5744.960191	5725 – 5850	PASS
20	3.80	5744.930588	5725 – 5850	PASS
10	3.80	5744.958679	5725 – 5850	PASS
0	3.80	5744.927235	5725 – 5850	PASS
-10	3.80	5744.921351	5725 – 5850	PASS
-20	3.80	5744.926049	5725 – 5850	PASS
-30	3.80	5744.951761	5725 – 5850	PASS

4.8. On Time and Duty Cycle

TEST CONFIGURATION



Test Procedures

- 1). Set the Centre frequency of the spectrum analyzer to the transmitting frequency;
- 2). Set the span=0MHz, RBW=8MHz, VBW=8MHz, Sweep time=Auto;
- 3). Detector = peak;
- 4). Trace mode = Single hold.

TEST RESULTS

FCC Appendix RF Test Data for 5GWIFI.

4.9. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

Test Result:

The PIFA antenna maximum gain of antenna was 2 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

5. Test Setup Photos of the EUT





6. External and Internal Photos of the EUT

Reference to the test report No. CTA25092602201

.....End of Report.....