

Technical Compliance Statement

FCC Test Report

For the following information**Ref. File No.: C1D2603025**

Product : JMR robot
FCC ID : 2BTU6-JMR
Model No. : JMR
Applicant : Zhejiang Junkong Intelligent Technology Co., Ltd.
Manufacturer : Zhejiang Junkong Intelligent Technology Co., Ltd.
Standards : 47 CFR FCC Part 15 Subpart B
(Class B Limit)

We hereby certify that the above product has been tested by us and complied with the FCC official limits. The product might be marketed in US in accordance with the standard 47 CFR FCC Part 2 and Part 15 Subpart B class B equipment regulations under FCC Rules. The test was performed according to the procedures mentioned in ANSI C63.4-2014.

The test data and results are issued on the test report No. **ACI-F26061**.

Signature



KAMP CHEN / Manager

Date: 2026.04.02

Test Laboratory:

Audix Technology (Shanghai) Co., Ltd.

NVLAP Lab Code : 200371-0

FCC Designation Number : CN5027

Test Firm Registration Number : 954668

Web Site: www.audixtech.com

The statement is based on a single evaluation of samples of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TEST REPORT

On behalf of
Zhejiang Junkong Intelligent Technology Co., Ltd.

JMR robot

Model No.: JMR

Prepared For : Zhejiang Junkong Intelligent Technology Co., Ltd.
Room 401, Building 13, No. 36 Changsheng South Road,
Economic & Technological Development Zone, Jiaxing City,
Zhejiang Province, P.R. China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai, China 200233

Tel: +86-21-64955500



File No. : C1D2603025
Report No. : ACI-F26061
Date of Test : 2026.03.26-27
Date of Report : 2026.04.02

The statement is based on a single evaluation of samples of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

TABLE OF CONTENTS

Description	Page
Test Report	3
1 SUMMARY OF STANDARDS AND RESULTS.....	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Device (EUT)	5
2.2 Description of Test Facility	6
3 CONDUCTED EMISSION TEST	7
3.1 Test Equipment.....	7
3.2 Block Diagram of Test Setup	7
3.3 Conducted Emission Limits [FCC Part 15 Subpart B 15.107(a)]	8
3.4 Test Configuration.....	8
3.5 Operating Condition of EUT	8
3.6 Test Procedures	8
3.7 Test Results	8
4 RADIATED EMISSION TEST.....	11
4.1 Test Equipment.....	11
4.2 Block Diagram of Test Setup	11
4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)].....	12
4.4 Test Configuration.....	12
4.5 Operating Condition of EUT	13
4.6 Test Procedures	13
4.7 Test Results	13
5 MEASUREMENT UNCERTAINTY LIST	18
6 PHOTOGRAPHS	19
6.1 Conducted Emission Test.....	19
6.2 Radiated Emission Test	20
END OF REPORT	25

TEST REPORT

Applicant : Zhejiang Junkong Intelligent Technology Co., Ltd.
 Manufacturer : Zhejiang Junkong Intelligent Technology Co., Ltd.
 EUT Description : JMR robot
 (A) Model No. : Refer to Sec.2.1
 (B) Power Rating : AC 120V/60Hz
 (C) Test Voltage : AC 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B
 AND ANSI C63.4-2014*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT, which was tested in 3m anechoic chamber is in technically compliance with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

Date of Test : 2026.03.26-27 Date of Report : 2026.04.02

Producer :

HUIMIN YAN / Assistant

Review :

LVY LV / Deputy Assistant Manager

AUDIX® For and on behalf of
 Audix Technology (Shanghai) Co., Ltd.

Signatory :

Authorized Signature(s)

KAMP CHEN/Manager

Name of the Responsible Party :

Signature :

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The result is determined according to the decision rules of customer selection in the ASC-403 application service form.

1. According to IEC GUIDE 115 Procedure 2 and ILAC-G8, the uncertainties value is not used in determining the PASS/FAIL results.

2. If the required specification or standard already contains the decision rules, it will be carried out in accordance with the regulations or standard documents or the requirements of the competent units. If the required specification or standard does not contain a decision rule, the same paragraph 1.

3. If your company has a required decision rule, it will be implemented in accordance with the requirements and ISO/IEC Guide 98-4 specifications.

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Referred Rules/Standard	Limit	Results
EMISSION			
Powerline Conducted Emission	47 CFR FCC Part 15 Subpart B AND ANSI C63.4-2014	15.107(a) Class B	Pass
			Margin 6.85dB at 0.151MHz
Radiated Emission (30-1000MHz)	47 CFR FCC Part 15 Subpart B AND ANSI C63.4-2014	15.109(a) Class B	Pass
			Margin 6.94dB at 900.090MHz (Horizontal, 1.00m/60°) ^{Note}
Radiated Emission Measurement (Above 1GHz)	47 CFR FCC Part 15 Subpart B AND ANSI C63.4-2014	15.109(a) Class B	Pass
			Margin 7.12dB at 4808.000MHz
NOTE – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.			

2 GENERAL INFORMATION

2.1 Description of Device (EUT)

Description : JMR robot

Type of EUT : ☐ Production ☒ Pre-product ☐ Pro-type

Date of receipt : 2026.03.16

Model Number : JMR

Working Frequency : >108MHz

Applicant : Zhejiang Junkong Intelligent Technology Co., Ltd.
Room 401, Building 13, No. 36 Changsheng South Road,
Economic & Technological Development Zone, Jiaxing City,
Zhejiang Province, P.R. China

Manufacturer : same as applicant.

Factory : same as applicant.

2.2 Description of Test Facility

Name of Firm	:	Audix Technology (Shanghai) Co., Ltd.
Site Location	:	3F 34Bldg 680 Guiping Rd, Caohejing Hi-Tech Park, Shanghai 200233, China
Test Facilities	:	No. 3 3m Chamber No. 1 Shielded Room
NVLAP Lab Code	:	200371-0
FCC Designation Number	:	CN5027
Test Firm Registration Number	:	954668


3 CONDUCTED EMISSION TEST

3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	AMN	R&S	ESH2-Z5	843890/011	2025/7/3	1 Year
2.	LISN	Kyoritsu	KNW-407	8-1280-5	2026/2/24	1 Year
3.	Fixed Attenuator	SHYL	TTS-1	001	2026/2/24	1 Year
4.	Impedance	/	BNC/50Ohm	002	2026/2/24	1 Year
5.	Test Receiver	R&S	ESCI	101302	2026/2/24	1 Year
6.	CE Cable+Coaxial Switch (0.09-300MHz)	Audix+ ANRITSU	CE Cable+MP59B	CE-SH1-001+ 6200655085	2026/2/24	1 Year
7.	DP Cable+Coaxial Switch (30-300MHz Clamp)	YUANDAO+ ANRITSU	N-J/N-J/RG303 -12M+MP59B	20250214012+ 6200655085	2026/2/24	1 Year
8.	Software	Audix	e3	e3.v9.210616	—————	—————

3.2 Block Diagram of Test Setup

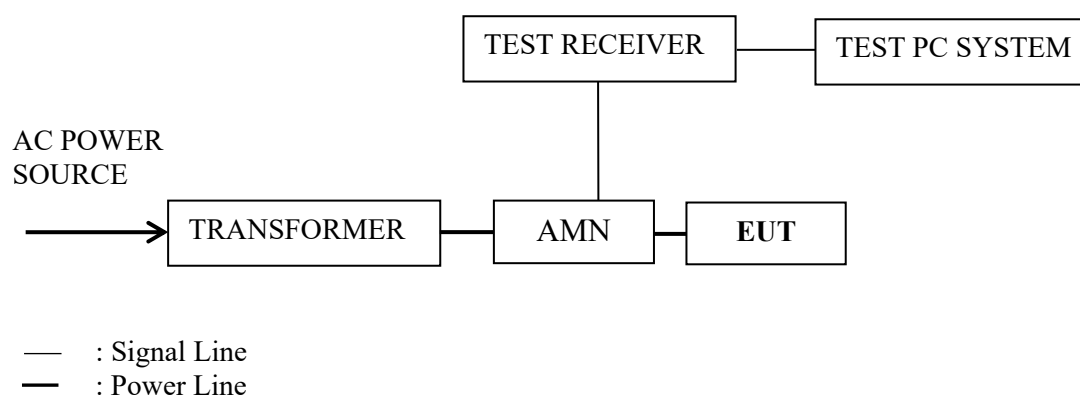

3.3 Conducted Emission Limits [FCC Part 15 Subpart B 15.107(a)]

Frequency Range (MHz)	Limits dB(μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50
NOTE 1 – The lower limit shall apply at the transition frequencies. NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz		

3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of power source.

3.5.3 Start testing on the test mode.

3.6 Test Procedures

The EUT was placed upon a non-metallic table, which is 0.8 m above the horizontal conducting ground plane and 0.4 m from a vertical reference plane. The EUT was connected to the power mains through an Artificial Mains Network (AMN) to provide a 50 Ω coupling impedance for the measuring equipment. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission according to FCC Part 15 (CLASS B) regulations during conducted disturbance test.

The I.F. bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test mode was done on conducted disturbance test and all the test results are listed in Sec. 3.7.

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.


NOTE – “QP” means “Quasi-Peak” values.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,CaoHeJing
 Hi-Tech Park,Shanghai 200233, China
 Tel:+86-21-64955500
 audixaci@audix.com

File: \\Audix-NAS\Test DATA\SH1\Test data-2026\W\WEIKAI\WEIKAI_00005.EMI

Date: 2026-03-27

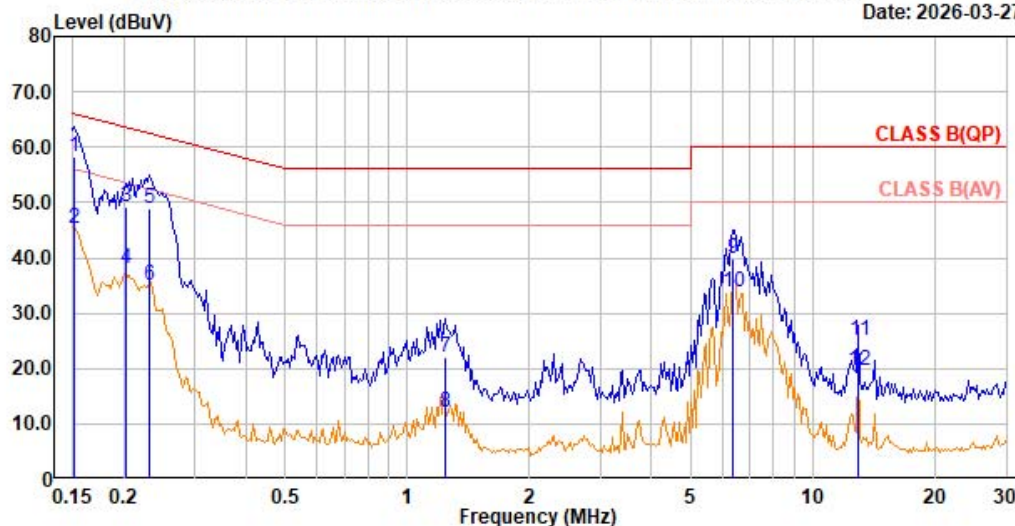

Site no. : Audix (Shanghai) shielded 1 Data no. : 5
 AMN : ESH2-Z5-ADAPTER-2025 Phase : Line
 Limit : CLASS B(QP)
 Env. / Ins. : 22'C 41%RH / ESCI Engineer : Neil
 EUT : JMR robot
 M/N : JMR
 Power Rating : 120V/60Hz
 Test Mode : Operation

	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.151	0.10	0.11	9.50	48.62	58.33	65.92	7.59	QP
2	0.151	0.10	0.11	9.50	35.54	45.25	55.92	10.67	Average
3	0.202	0.10	0.11	9.50	39.55	49.26	63.52	14.26	QP
4	0.202	0.10	0.11	9.50	28.22	37.93	53.52	15.59	Average
5	0.232	0.10	0.11	9.50	39.30	49.01	62.37	13.36	QP
6	0.232	0.10	0.11	9.50	25.28	34.99	52.37	17.38	Average
7	1.246	0.20	0.14	9.50	12.14	21.98	56.00	34.02	QP
8	1.246	0.20	0.14	9.50	2.15	11.99	46.00	34.01	Average
9	6.363	0.40	0.18	9.50	29.83	39.91	60.00	20.09	QP
10	6.363	0.40	0.18	9.50	23.73	33.81	50.00	16.19	Average
11	12.960	0.56	0.21	9.51	14.87	25.15	60.00	34.85	QP
12	12.960	0.56	0.21	9.51	9.36	19.64	50.00	30.36	Average


Remark: 1.Emission Level = AMN Factor + Cable loss + Pulse Att. + Reading.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,CaoHeJing
 Hi-Tech Park,Shanghai 200233, China
 Tel:+86-21-64955500
 audixaci@audix.com

File: \\Audix-NAS\Test DATA\SH1\Test data-2026\W\WEIKAI\WEIKAI_00007.EMI

Date: 2026-03-27

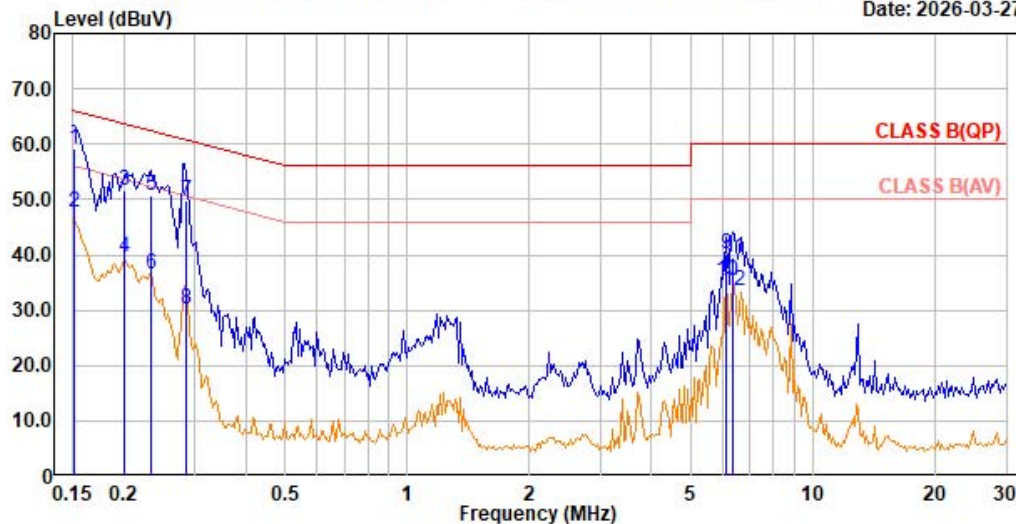

Site no. : Audix (Shanghai) shielded 1 Data no. : 7
 AMN : ESH2-Z5-ADAPTER-2025 Phase : Neutral
 Limit : CLASS B(QP)
 Env. / Ins. : 22°C 41%RH / ESCI Engineer : Neil
 EUT : JMR robot
 M/N : JMR
 Power Rating : 120V/60Hz
 Test Mode : Operation

	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.151	0.10	0.11	9.50	49.36	59.07	65.92	6.85	QP
2	0.151	0.10	0.11	9.50	38.04	47.75	55.92	8.17	Average
3	0.200	0.10	0.11	9.50	41.97	51.68	63.61	11.93	QP
4	0.200	0.10	0.11	9.50	29.94	39.65	53.61	13.96	Average
5	0.235	0.10	0.11	9.50	41.03	50.74	62.28	11.54	QP
6	0.235	0.10	0.11	9.50	26.85	36.56	52.28	15.72	Average
7	0.286	0.10	0.11	9.50	40.07	49.78	60.63	10.85	QP
8	0.286	0.10	0.11	9.50	20.39	30.10	50.63	20.53	Average
9	6.135	0.36	0.18	9.50	30.00	40.04	60.00	19.96	QP
10	6.135	0.36	0.18	9.50	25.35	35.39	50.00	14.61	Average
11	6.363	0.37	0.18	9.50	29.35	39.40	60.00	20.60	QP
12	6.363	0.37	0.18	9.50	23.34	33.39	50.00	16.61	Average

Remark: 1.Emission Level = AMN Factor + Cable loss + Pulse Att. + Reading.


4 RADIATED EMISSION TEST

4.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	101303	2026.02.24	1 Year
2.	Preamplifier	HP	8447D	2944A06849	2026.02.24	1 Year
3.	Preamplifier	HP	8449B	3008A00864	2026.02.24	1 Year
4.	Bi-log Antenna	Schwarz beck	VULB 9168	707+AT-N0637	2025.08.06	1 Year
5.	Spectrum	Agilent	N9010A	MY52221182	2025.07.03	1 Year
6.	Horn Antenna	EMCO	3115	96074878	2025.08.13	1 Year
7.	Horn Antenna	ETS	3116	00062643	2026.01.21	2Year
8.	RE Cable-1m+ Coaxial Switch	HARBOUR+ ANRITSU	RE Cable-1m+ MP59B	RE-1m-00x+ 6200655086	2026.02.24	1 Year
9.	RE Cable-3m+ RE Cable-10m	TIMES+SCHAF FNER	LMR400-NMNM- 3.0M+RG 212U-MIL C 17	20250211-0001 +RE-10m-001	2026.02.24	1 Year
10.	Coaxial Cable(CH.3)	Mini-Circuits	FLC-2FT- SMSM+	21112086	2026.02.24	1 Year
11.	RE Cable-5m	TIMES	SFT205-SMNM- 5.0M	20250211-0001	2026.02.24	1 Year
12.	Software	Audix	e3	e3.v9.210616	--	--

4.2 Block Diagram of Test Setup

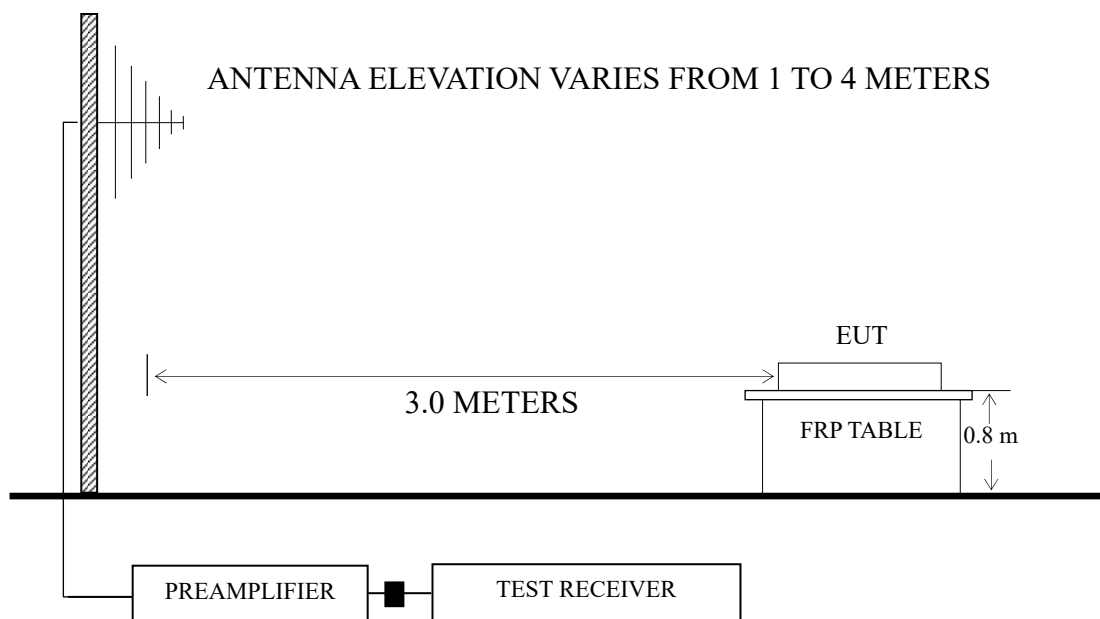

■ : 50 ohm Coaxial Switch

Above 1GHz

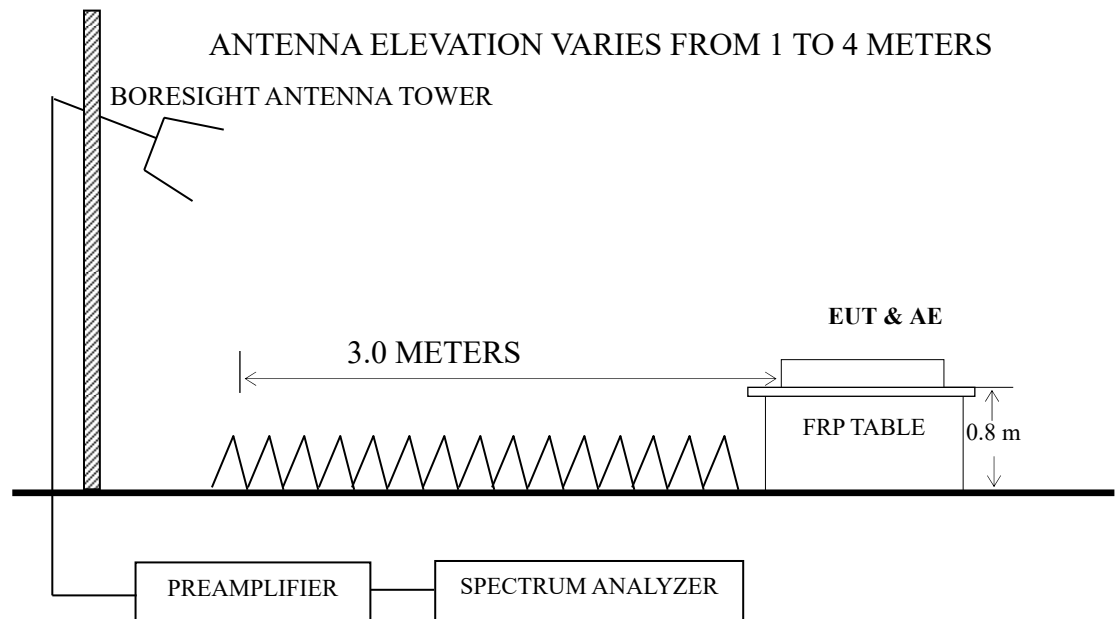

4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)]

Frequency (MHz)	Distance (m)	Field strength limits (μV/m)	
		(μV/m)	dB(μV/m)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB(μV/m) = 20 lg Emission Level (μV/m)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.4.2 meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

4.5 Operating Condition of EUT

- 4.5.1 Setup the EUT as shown in Sec. 3.2.
- 4.5.2 Turn on the power of power source.
- 4.5.3 Start testing on the test mode.

4.6 Test Procedures

The EUT was placed on a FRP turntable that is 0.8 meter above ground. The FRP turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4 requirements during radiated emission test.

The I.F. bandwidth of Test Receiver R&S ESCI was set at 120 kHz and The Spectrum Agilent N9010A was set at 1MHz above 1GHz.

The frequency range from 30 MHz to 1000MHz was checked.

The frequency range from 1 GHz to 6 GHz was checked for the maximum resolution test mode.

The test mode was done on radiated disturbance test and all the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative to the limit is reported. All the emissions not reported below are too low against the FCC limit.


NOTE – All reading are Quasi-Peak values.



Audix Technology (Shanghai) Co., Ltd.
3F #34Bldg. No.680 GuiPing Rd.,CaoHeJing
Hi-Tech Park,Shanghai 200233, China
Tel:+86-21-64955500
audixaci@audix.com

File: \\Audix-NAS\Test DATA\CH3\2026data\W\WEIKAI\WEIKAI_00008.EMI

Date: 2026-03-26

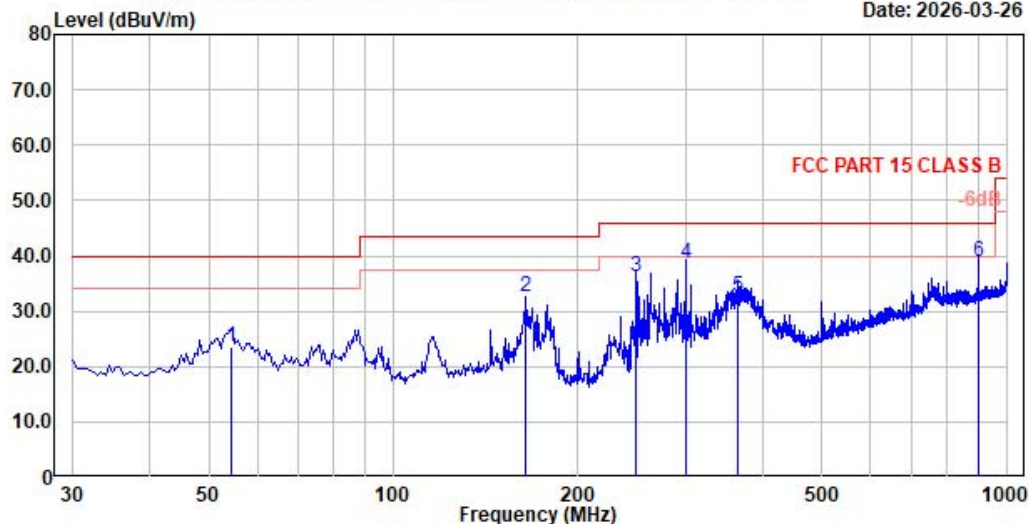

Site no. : Audix (Shanghai) Chamber 3 Data no. : 8
Dis. / Ant. : 3m / VULB 9168-707-2025 Ant. Pol. : Horizontal
Limit : FCC PART 15 CLASS B
Env. / Ins. : 22°C 49%RH / ESCI Engineer : Avalon
EUT : JMR robot
M/N : JMR
Power Rating : 120V/60Hz
Test Mode : Operation

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	19.73	0.88	29.48	32.45	23.58	40.00	16.42	QP
2	164.345	19.37	1.44	29.00	40.70	32.51	43.50	10.99	QP
3	249.195	17.88	1.82	28.85	45.28	36.13	46.00	9.87	QP
4	300.010	19.30	2.05	28.20	45.41	38.56	46.00	7.44	QP
5	365.135	20.71	2.21	28.73	38.50	32.69	46.00	13.31	QP
6	900.090	28.90	3.44	27.50	34.22	39.06	46.00	6.94	QP


Remarks: 1.Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,CaoHeJing
 Hi-Tech Park,Shanghai 200233, China
 Tel:+86-21-64955500
 audixaci@audix.com

File: \\Audix-NAS\Test DATA\CH3\2026data\W\WEIKAI\WEIKAI_00009.EMI

Date: 2026-03-26

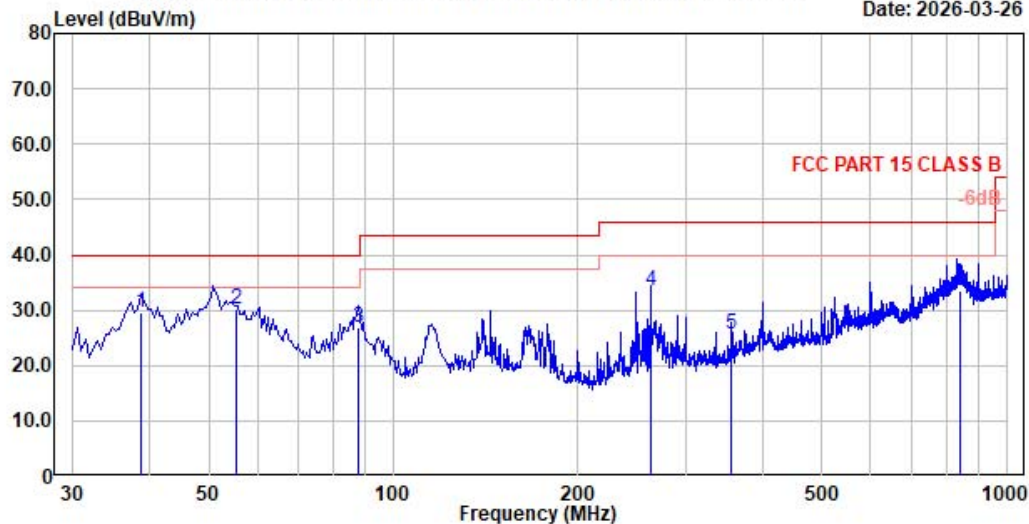

Site no. : Audix (Shanghai) Chamber 3 Data no. : 9
 Dis. / Ant. : 3m / VULB 9168-707-2025 Ant. Pol. : Vertical
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22°C 49%RH / ESCI Engineer : Avalon
 EUT : JMR robot
 M/N : JMR
 Power Rating : 120V/60Hz
 Test Mode : Operation

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	38.730	19.43	0.75	29.55	39.08	29.71	40.00	10.29	Peak
2	55.585	19.74	0.88	29.48	39.17	30.31	40.00	9.69	QP
3	87.715	14.47	1.10	29.44	40.67	26.80	40.00	13.20	Peak
4	262.683	18.01	1.89	28.76	42.41	33.55	46.00	12.45	QP
5	355.990	20.50	2.17	28.71	31.71	25.67	46.00	20.33	QP
6	837.525	28.50	3.42	27.73	29.34	33.53	46.00	12.47	QP


Remarks: 1.Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,CaoHeJing
 Hi-Tech Park,Shanghai 200233, China
 Tel:+86-21-64955500
 audixaci@audix.com

File: \\Audix-NAS\Test DATA\CH3\2026data\W\WEIKAI\WEIKAI_00011.EMI

Date: 2026-03-26

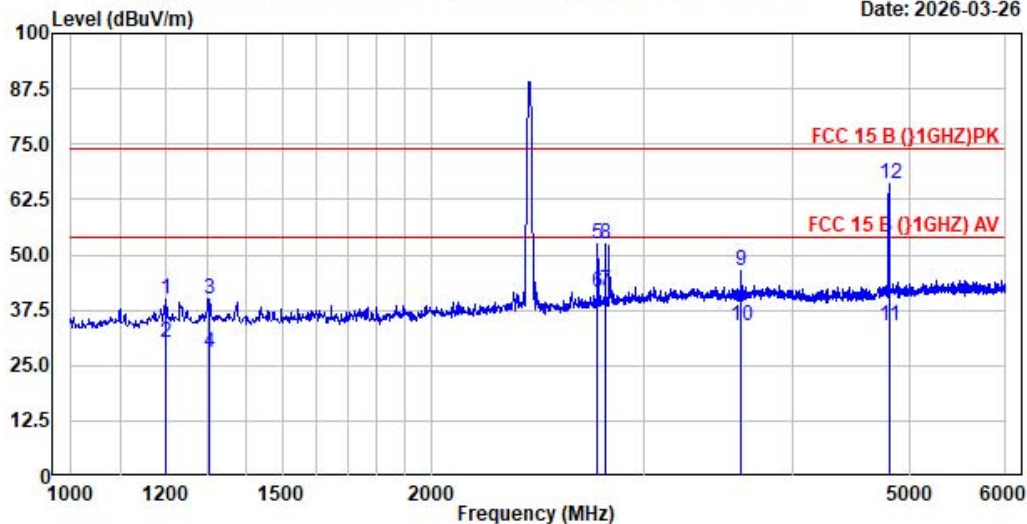

Site no. : Audix (Shanghai) Chamber 3
 Dis. / Ant. : 3m / 3115-2025
 Limit : FCC 15 B (1GHz)PK
 Env. / Ins. : 22°C 49%RH / ESCI
 EUT : JMR robot
 M/N : JMR
 Power Rating : 120V/60Hz
 Test Mode : Operation

Data no. : 11
 Ant. Pol. : Horizontal
 Engineer : Avalon

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1199.750	24.30	1.95	37.14	51.04	40.15	74.00	33.85	Peak
2	1199.750	24.30	1.95	37.14	40.92	30.03	54.00	23.97	Average
3	1303.875	24.81	2.03	37.07	50.35	40.12	74.00	33.88	Peak
4	1303.875	24.81	2.03	37.07	38.21	27.98	54.00	26.02	Average
5	2748.875	28.10	2.92	35.68	57.19	52.53	74.00	21.47	Peak
6	2749.000	28.10	2.92	35.68	46.05	41.39	54.00	12.61	Average
7	2789.000	28.33	2.94	35.63	46.39	42.03	54.00	11.97	Average
8	2789.250	28.34	2.94	35.63	56.68	52.33	74.00	21.67	Peak
9	3618.000	30.54	3.42	35.86	48.22	46.32	74.00	27.68	Peak
10	3618.000	30.54	3.42	35.86	36.01	34.11	54.00	19.89	Average
11	4807.800	32.22	4.10	36.43	34.01	33.90	54.00	20.10	Average
12	4808.000	32.22	4.10	36.43	65.97	65.86	74.00	8.14	Peak


Remarks: 1.Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,CaoHeJing
 Hi-Tech Park,Shanghai 200233, China
 Tel:+86-21-64955500
 audixaci@audix.com

File: \\Audix-NAS\Test DATA\CH3\2026data\W\WEIKAI\WEIKAI_00010.EMI

Date: 2026-03-26

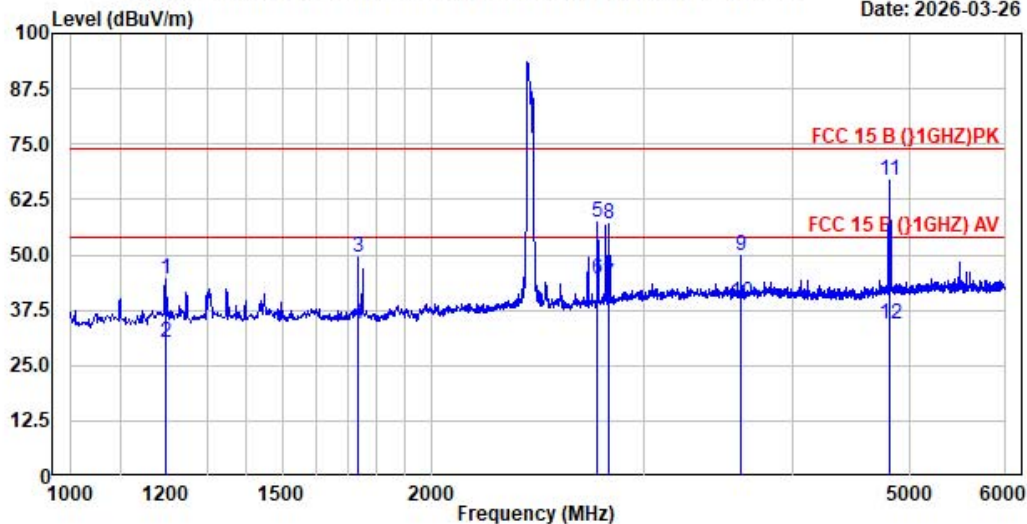

Site no. : Audix (Shanghai) Chamber 3 Data no. : 10
 Dis. / Ant. : 3m / 3115-2025 Ant. Pol. : Vertical
 Limit : FCC 15 B (1GHz)PK
 Env. / Ins. : 22°C 49%RH / ESCI Engineer : Avalon
 EUT : JMR robot
 M/N : JMR
 Power Rating : 120V/60Hz
 Test Mode : Operation

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1199.750	24.30	1.95	37.14	55.40	44.51	74.00	29.49	Peak
2	1199.750	24.30	1.95	37.14	41.02	30.13	54.00	23.87	Average
3	1735.250	25.84	2.32	36.82	57.93	49.27	74.00	24.73	Peak
4	1735.250	25.84	2.32	36.82	42.91	34.25	54.00	19.75	Average
5	2748.875	28.10	2.92	35.68	62.01	57.35	74.00	16.65	Peak
6	2749.000	28.10	2.92	35.68	49.18	44.52	54.00	9.48	Average
7	2808.000	28.42	2.95	35.61	47.65	43.41	54.00	10.59	Average
8	2808.375	28.42	2.95	35.61	61.34	57.10	74.00	16.90	Peak
9	3615.875	30.53	3.42	35.85	51.71	49.81	74.00	24.19	Peak
10	3615.875	30.53	3.42	35.85	41.04	39.14	54.00	14.86	Average
11	4808.000	32.22	4.10	36.43	66.99	66.88	74.00	7.12	Peak
12	4808.000	32.22	4.10	36.43	34.37	34.26	54.00	19.74	Average

Remarks: 1.Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.

5 MEASUREMENT UNCERTAINTY LIST

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.

The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Estimation of Uncertainty for Conduction Emission (Shielded Room-1)	9kHz~150kHz(50Ω/50μH -AMN)	3.74 dB
	150kHz~30MHz(50Ω/50μH -AMN)	3.34 dB
	150kHz~30MHz(50Ω/50μH -AMN-CAT 3)	3.62 dB
	150kHz~30MHz(50Ω/50μH -AMN-CAT 5)	3.60 dB
	150kHz~30MHz(50Ω/50μH -AMN-CAT 6)	4.24 dB
	9kHz~30MHz(VP, considering the effect of mains impedance when compared with AMN)	24.64 dB
	9kHz~30MHz(VP)	2.78 dB
	9kHz~30MHz(CP, considering the effect of AE impedance when compared with AMN)	24.64 dB
	9kHz~30MHz(CP)	2.82 dB
Estimation of Uncertainty for Conduction Emission (Shielded Room-3)	9kHz~150kHz(50Ω/50μH -AMN)	3.74 dB
	150kHz~30MHz(50Ω/50μH -AMN)	3.34 dB
	Disturbance Voltage at the Tuner Asymmetric Ports	2.56 dB
Estimation of Uncertainty for Power Clamp	30MHz~300MHz (Absorbing Clamp)	4.50 dB
Estimation of Uncertainty for CDNE	30MHz~300MHz (CDNE-M210)	3.72 dB
	30MHz~300MHz (CDNE-M310)	3.70 dB
Estimation of Uncertainty for EMF	20kHz~10MHz	1.60 dB
Estimation of Uncertainty for Radiated Emission	30M~200MHz (Vertical)	4.66dB
	30M~200MHz (Horizontal)	4.40dB
	200M~1000MHz (Vertical)	5.25dB
	200M~1000MHz (Horizontal)	4.04dB
	1G~6GHz	4.35dB
	6G~18G Hz	4.40dB
	18G~40G Hz	4.04dB

6 PHOTOGRAPHS

6.1 Conducted Emission Test



FRONT VIEW



BACK VIEW

6.2 Radiated Emission Test



FRONT VIEW OF RADIATED EMISSION



BACK VIEW OF RADIATED EMISSION



APPENDIX

(Photos of EUT)

FIGURE 1
JMR robot (M/N: JMR)
EUT-1



FIGURE 2
JMR robot (M/N: JMR)
EUT-2



FIGURE 3
JMR robot (M/N: JMR)
EUT-3



FIGURE 4
JMR robot (M/N: JMR)
EUT-4



END OF REPORT