




Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-55.94	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.99	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-56.54	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-57.51	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-55.68	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-56.44	-20	Pass




Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

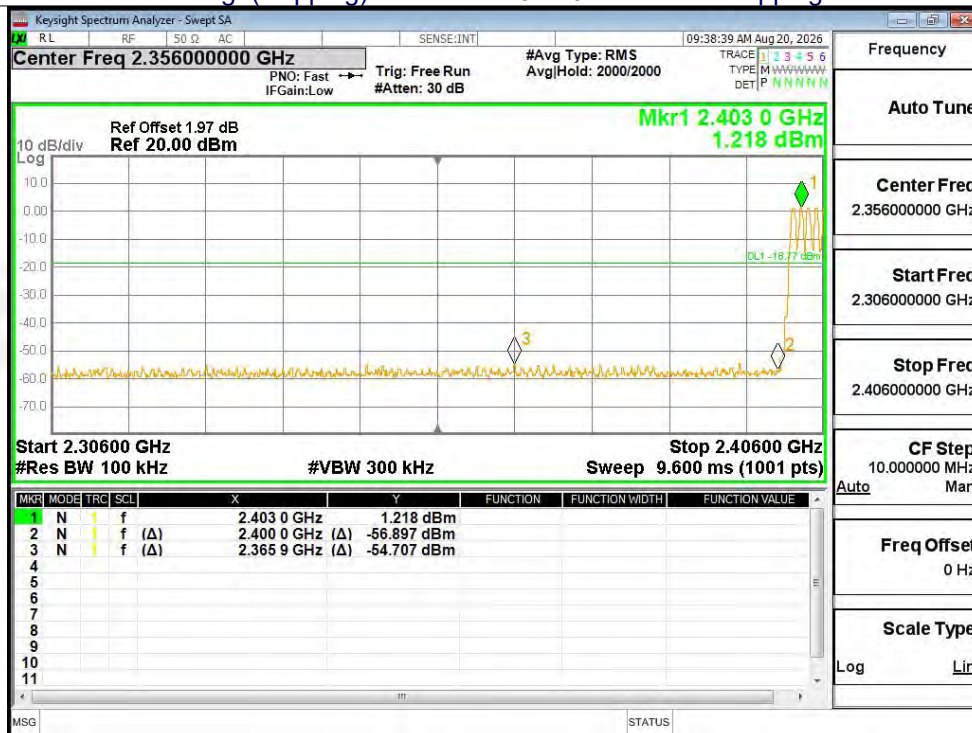

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

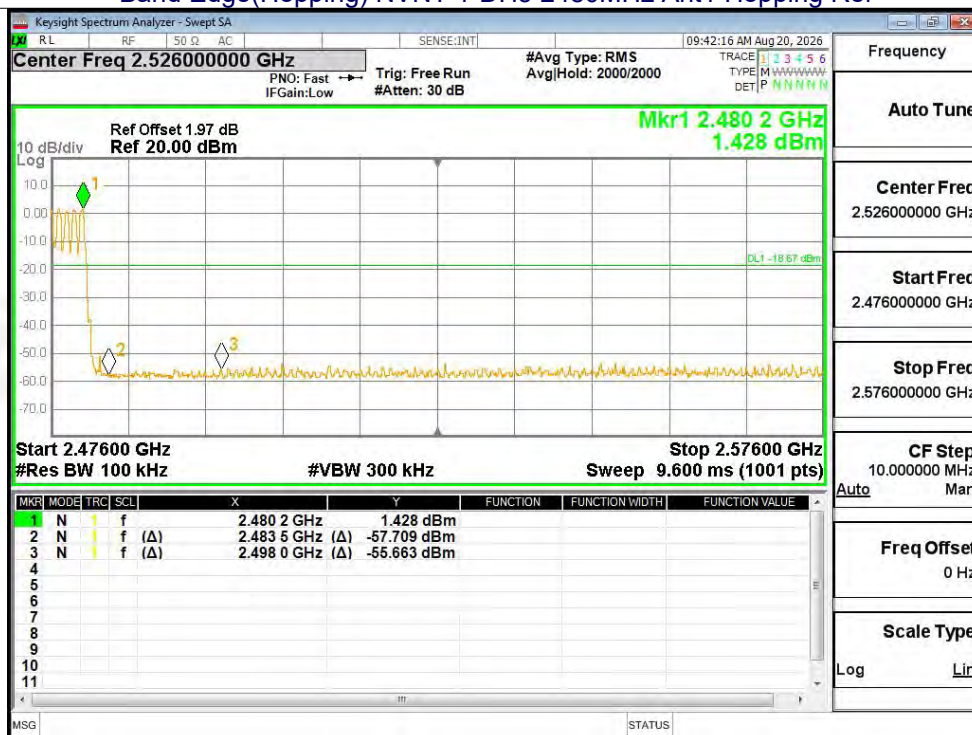

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

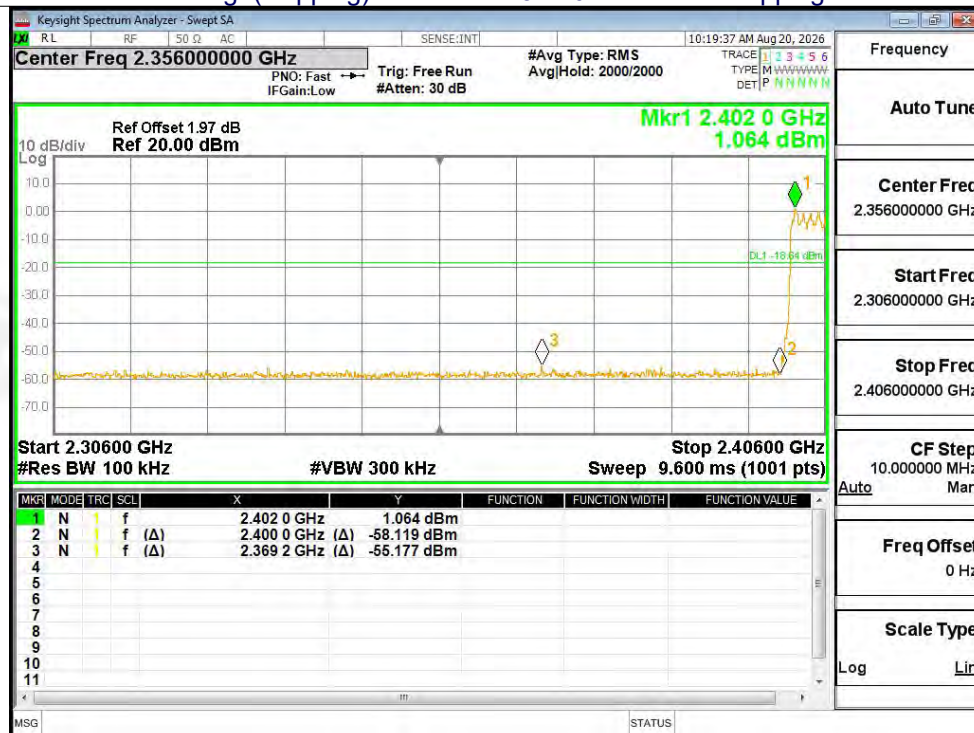

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

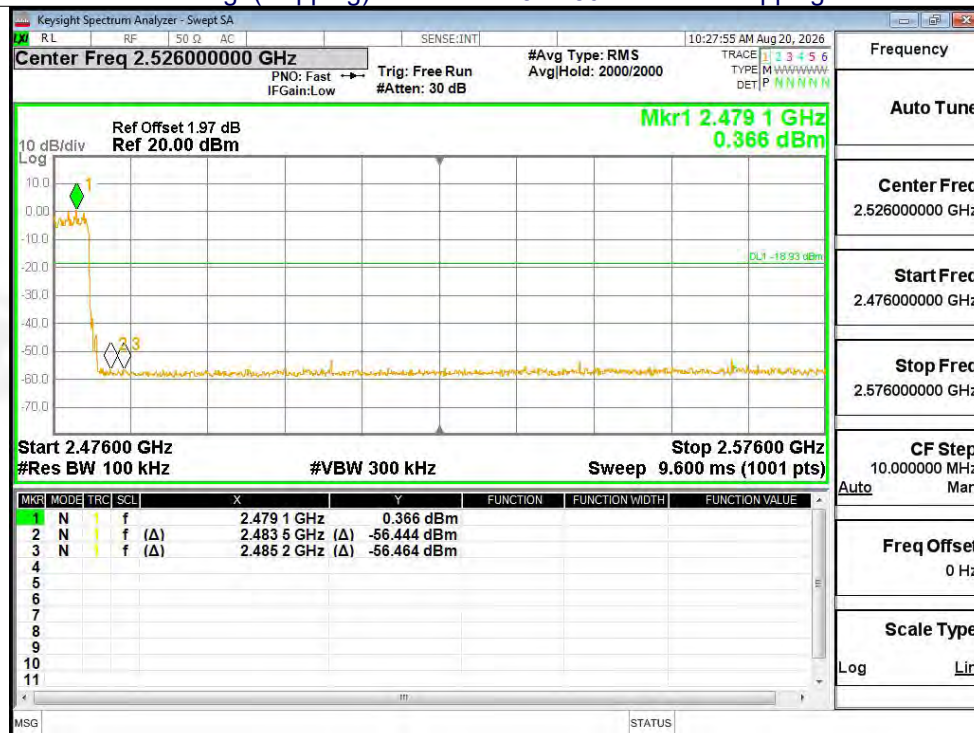

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

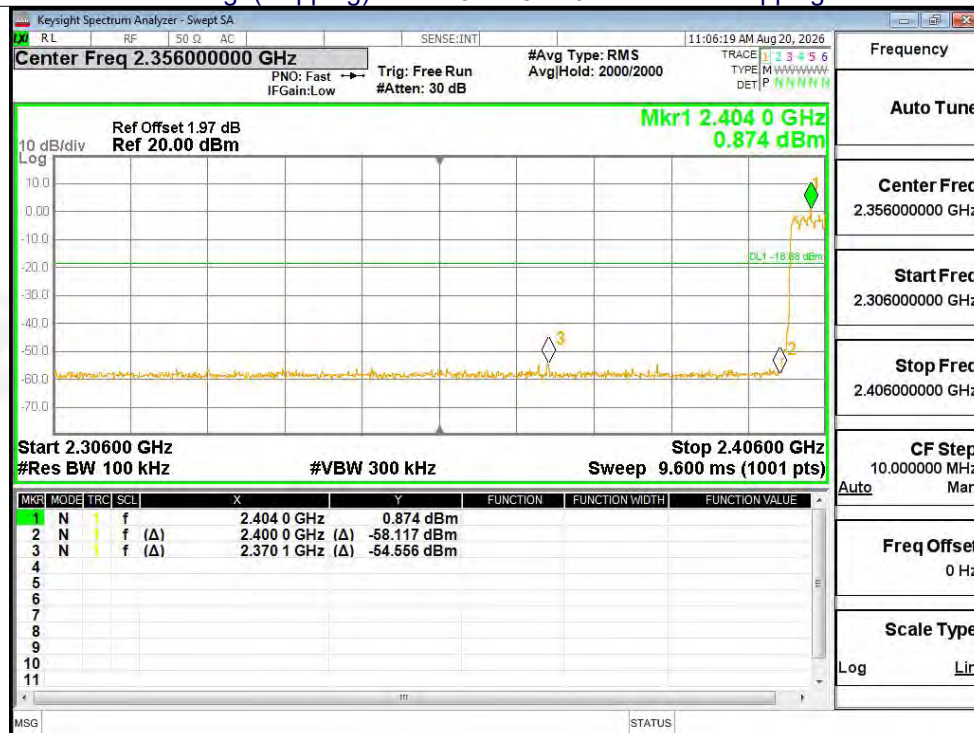

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

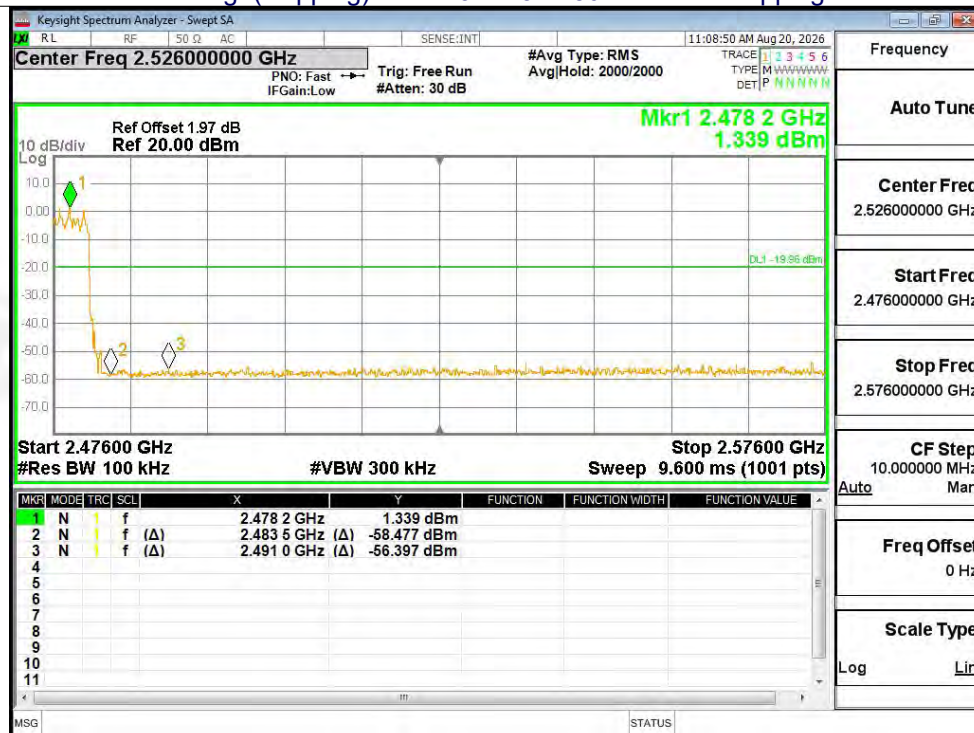


Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission



7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024

7.1 Test Setup

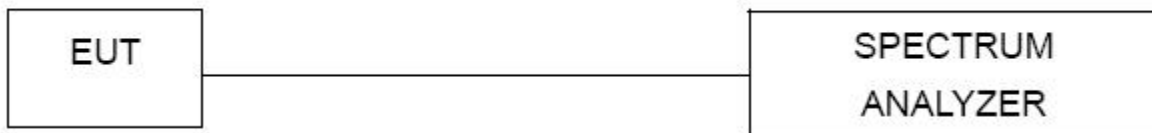

7.2 Limit

N/A

7.3 Test procedure


1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
8. The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30KHz RBW and 100 KHz VBW record the 99% bandwidth.

7.4 DEVIATION FROM STANDARD


No deviation.

7.5 Test Result


Mode	Test channel	20dB Emission Bandwidth (MHz)	99% OBW (MHz)	Result
GFSK	Lowest	0.934	0.862	Pass
	Middle	0.956	0.874	
	Highest	0.942	0.872	
$\pi/4$ -DQPSK	Lowest	1.275	1.184	Pass
	Middle	1.268	1.185	
	Highest	1.303	1.184	
8-DPSK	Lowest	1.294	1.189	Pass
	Middle	1.290	1.208	
	Highest	1.295	1.194	

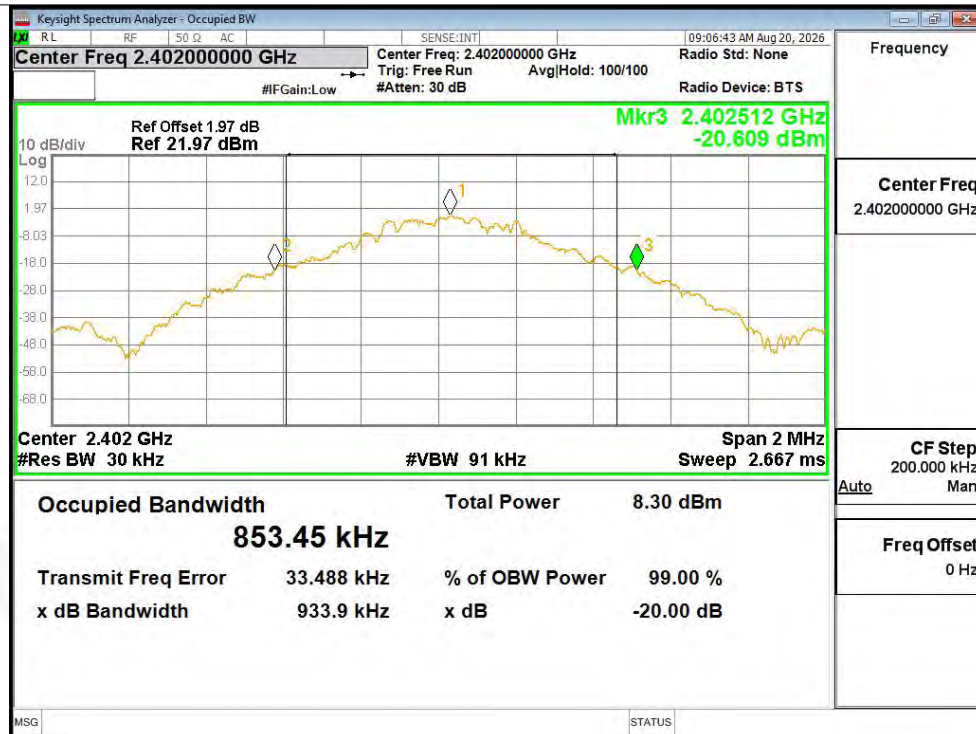


-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

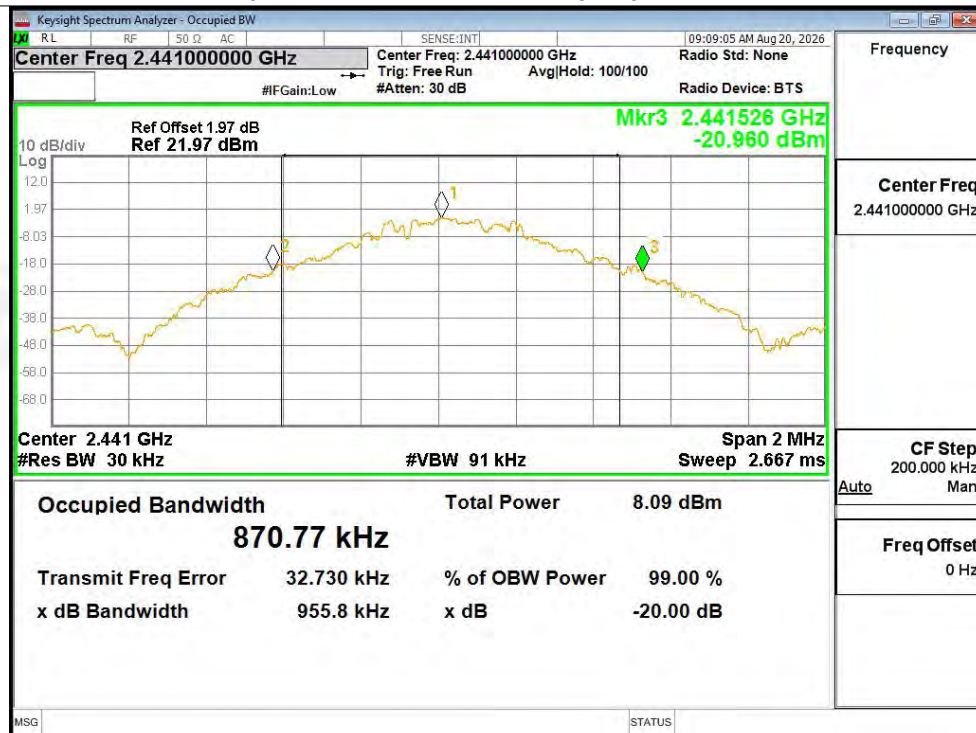


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

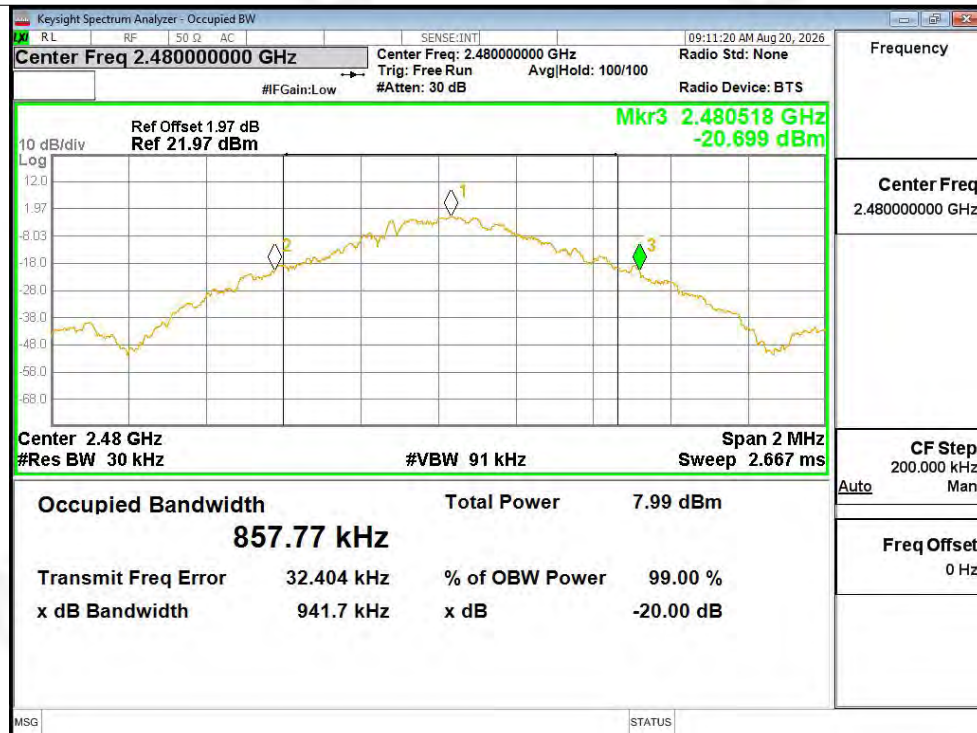


-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

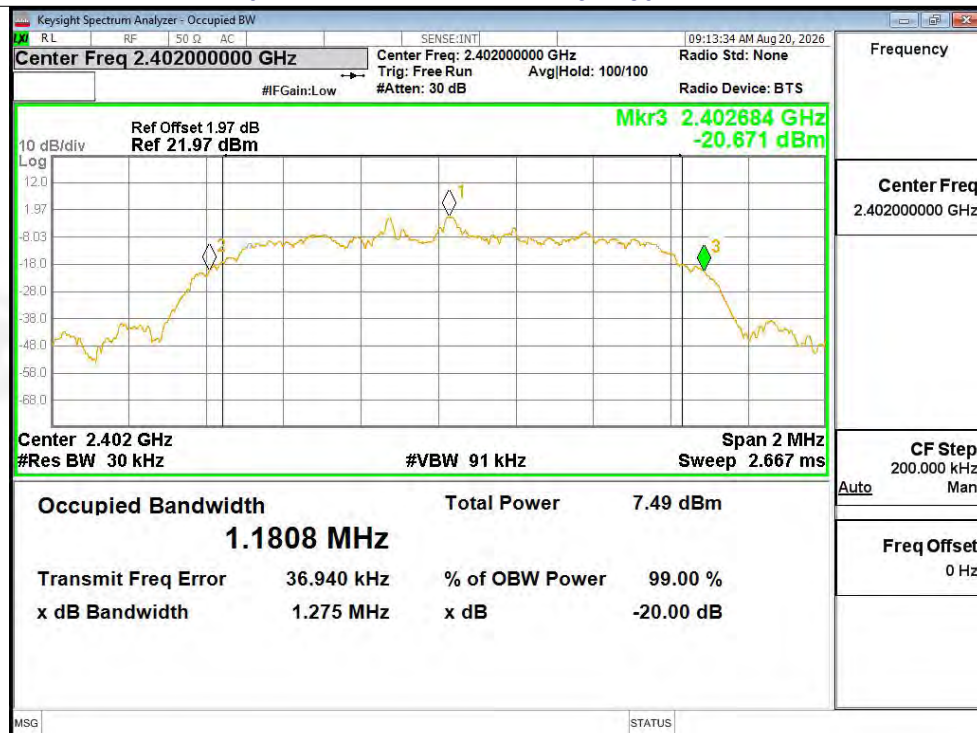


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

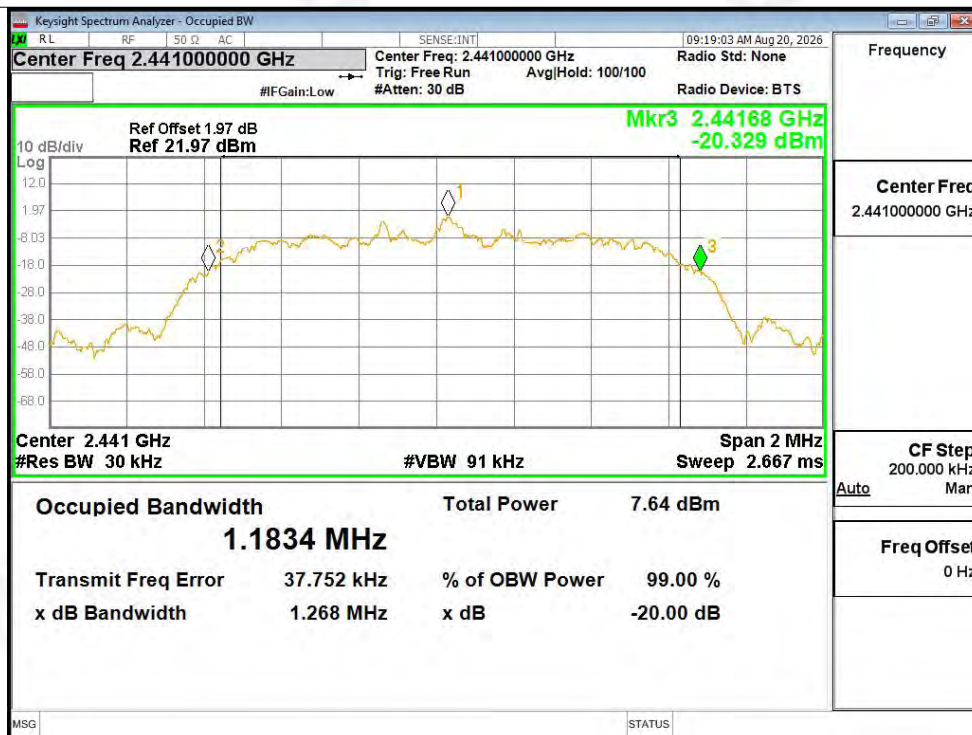


-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

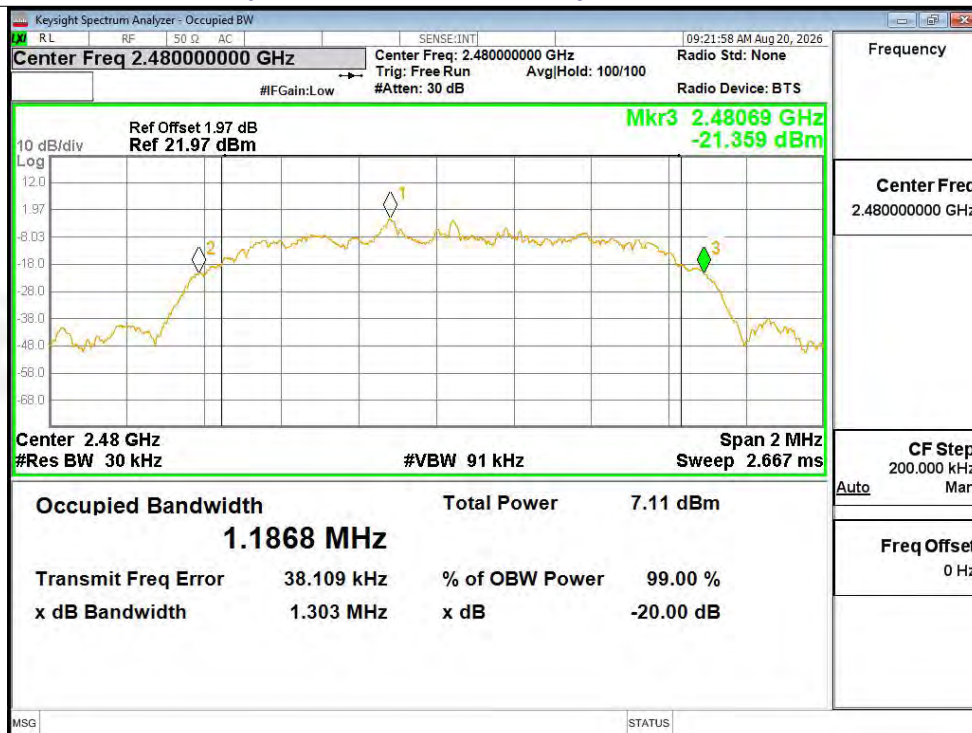


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

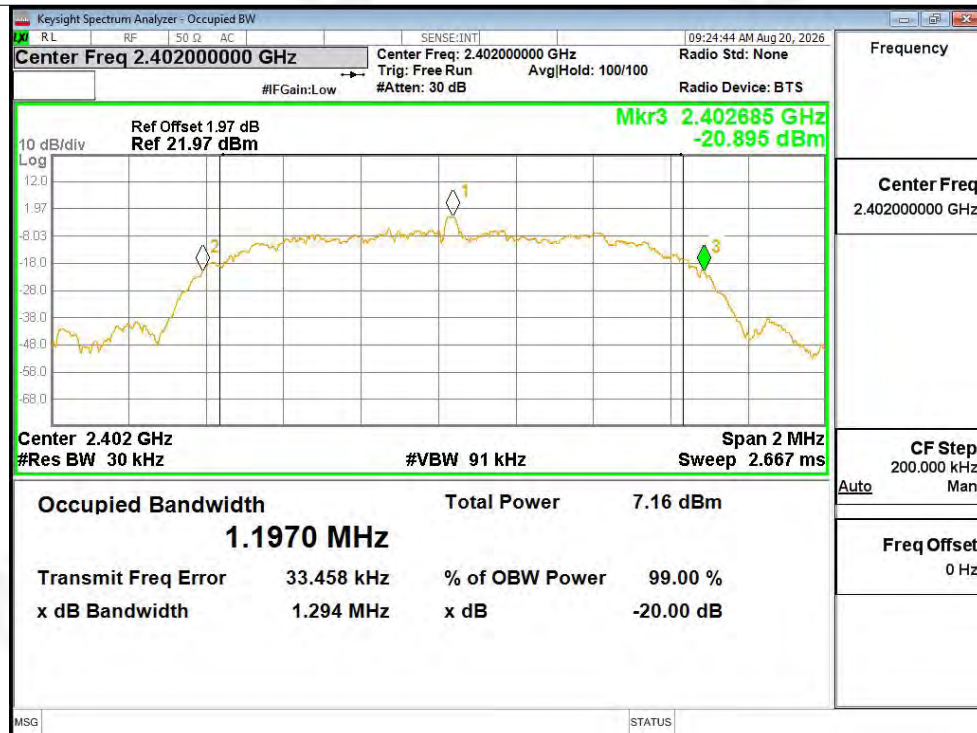


-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

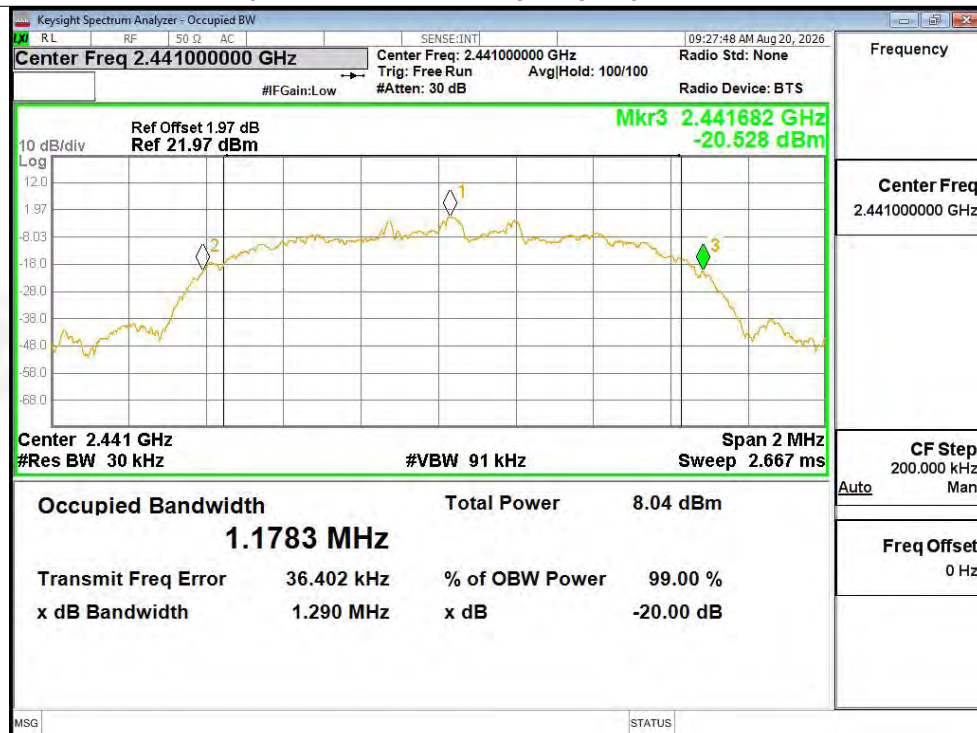


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

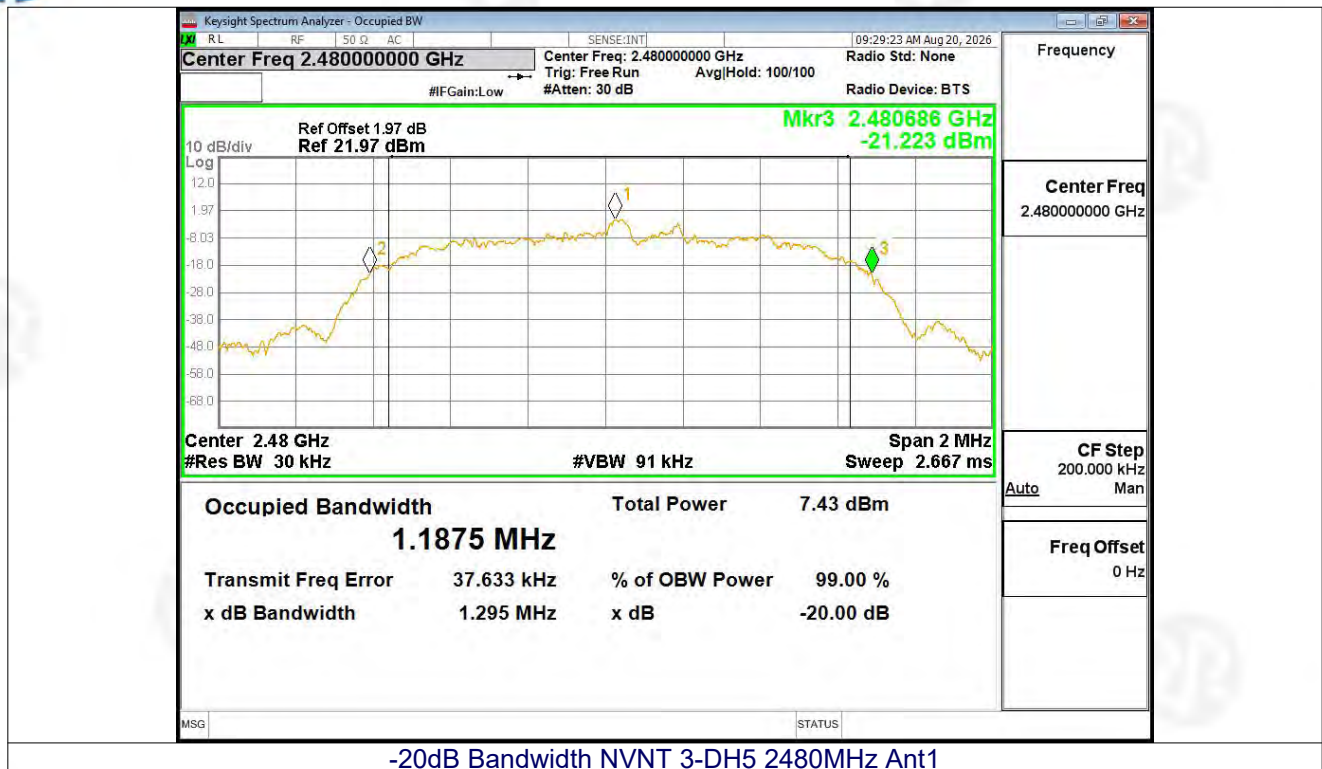


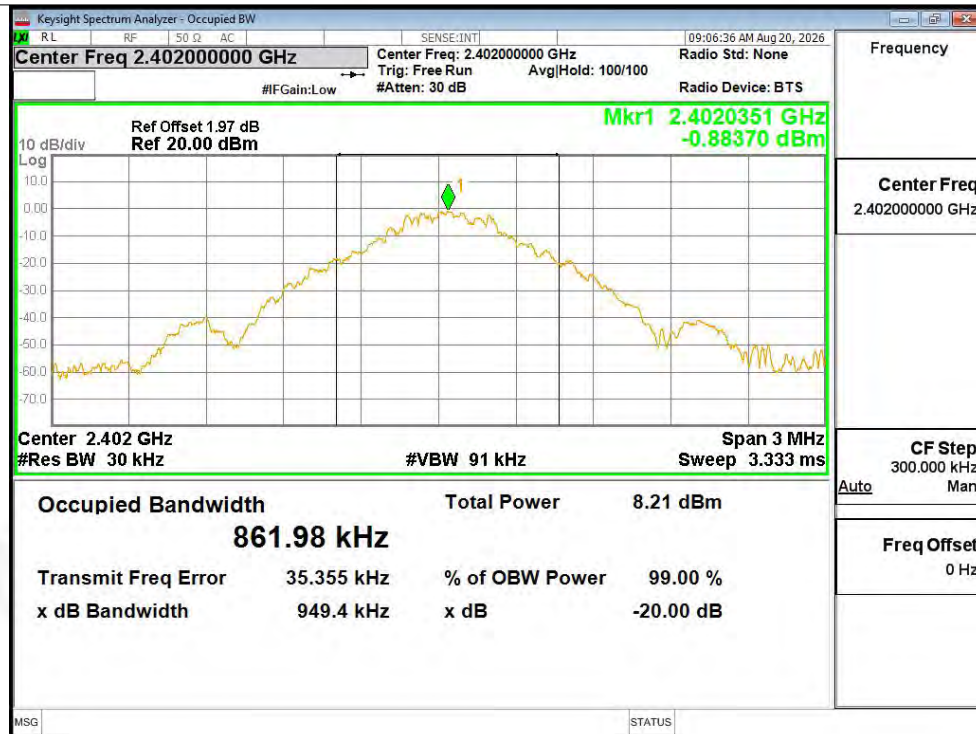


OBW NVNT 1-DH5 2402MHz Ant1

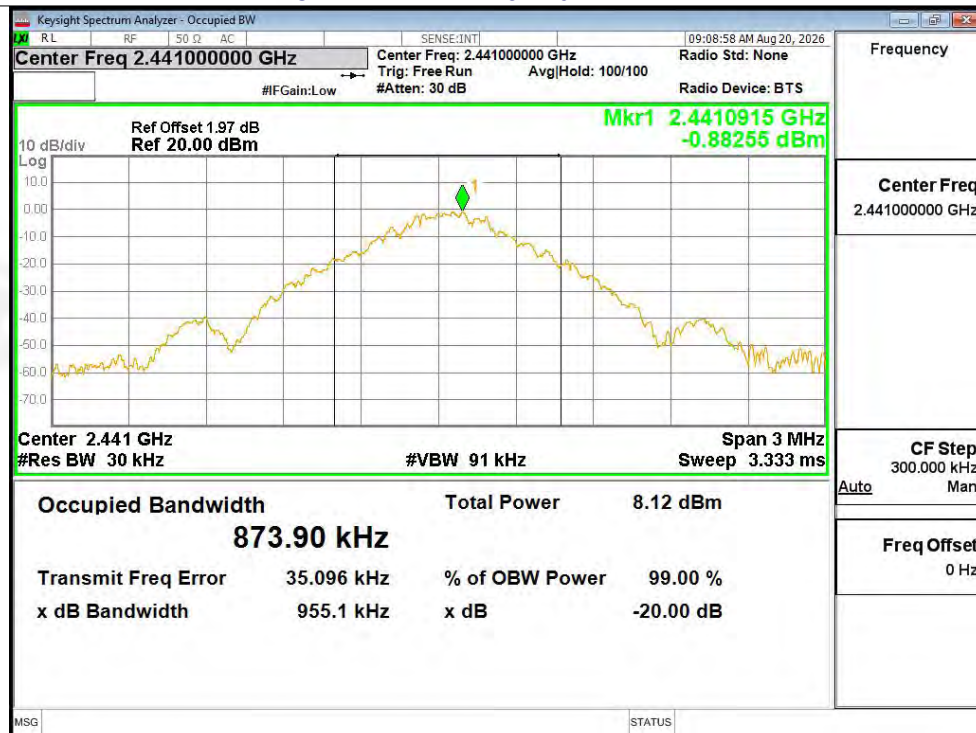


OBW NVNT 1-DH5 2441MHz Ant1

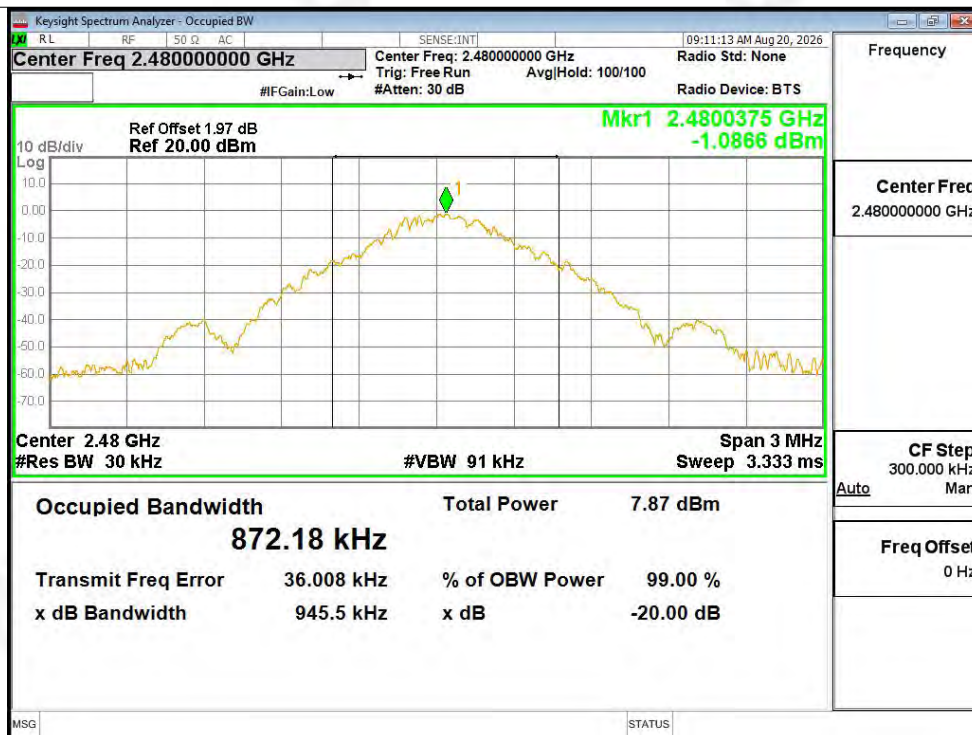


OBW NVNT 1-DH5 2480MHz Ant1

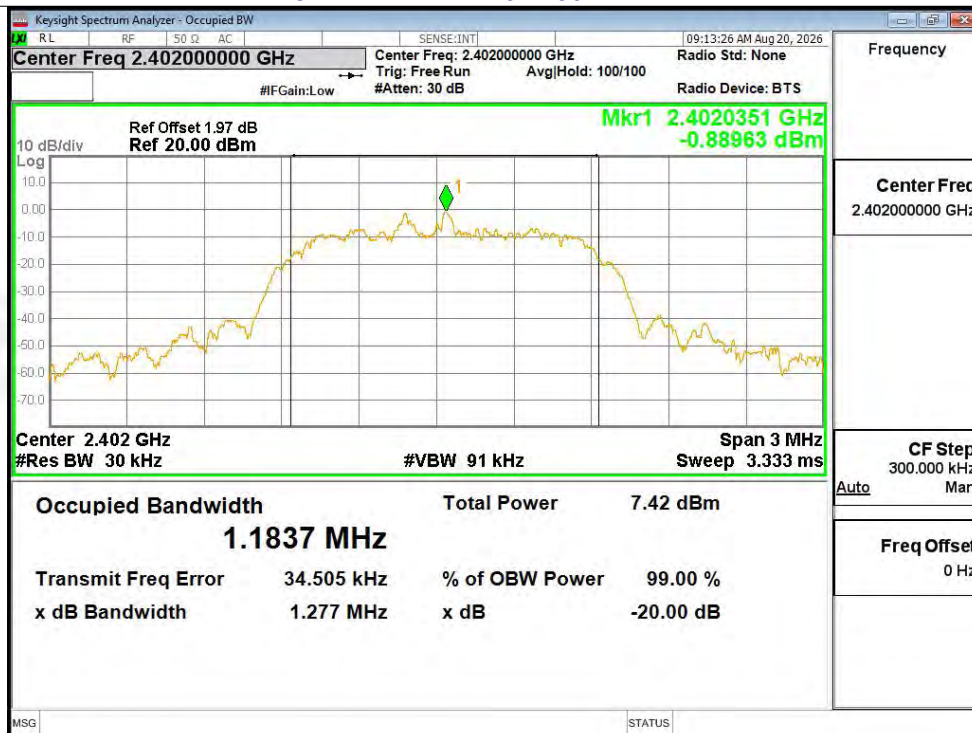


OBW NVNT 2-DH5 2402MHz Ant1

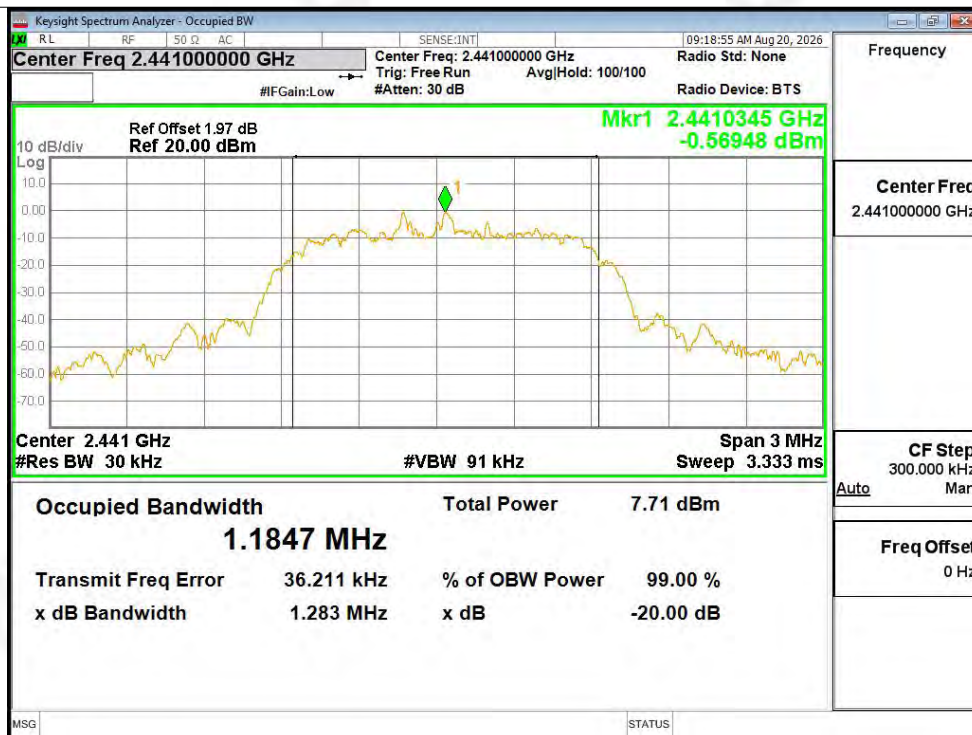


OBW NVNT 2-DH5 2441MHz Ant1

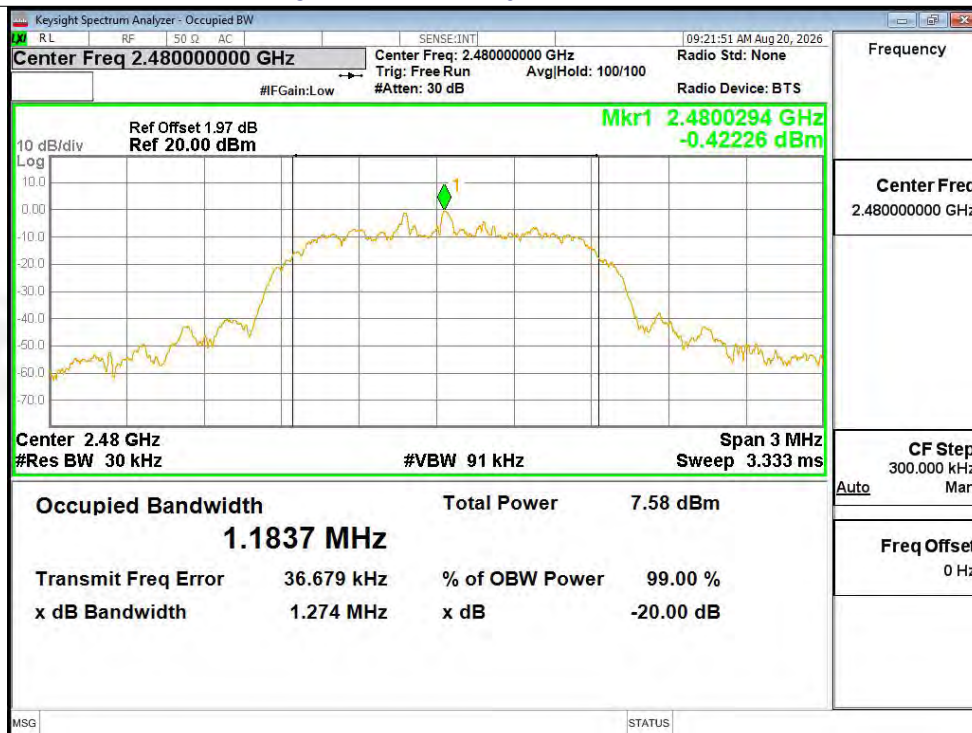


OBW NVNT 2-DH5 2480MHz Ant1

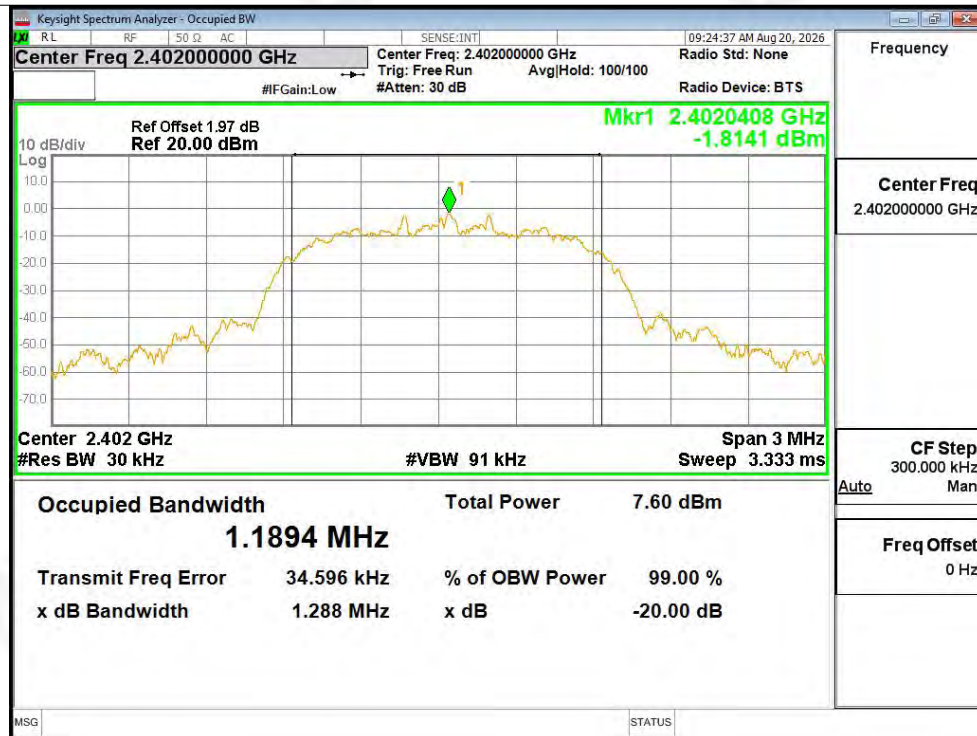

OBW NVNT 3-DH5 2402MHz Ant1

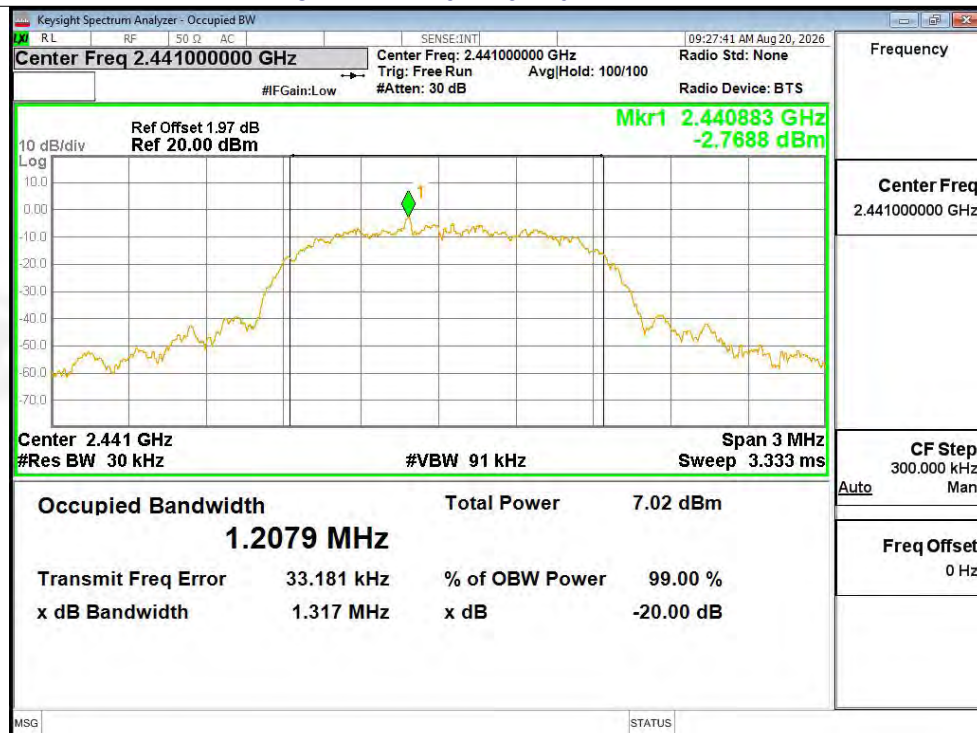

OBW NVNT 3-DH5 2441MHz Ant1

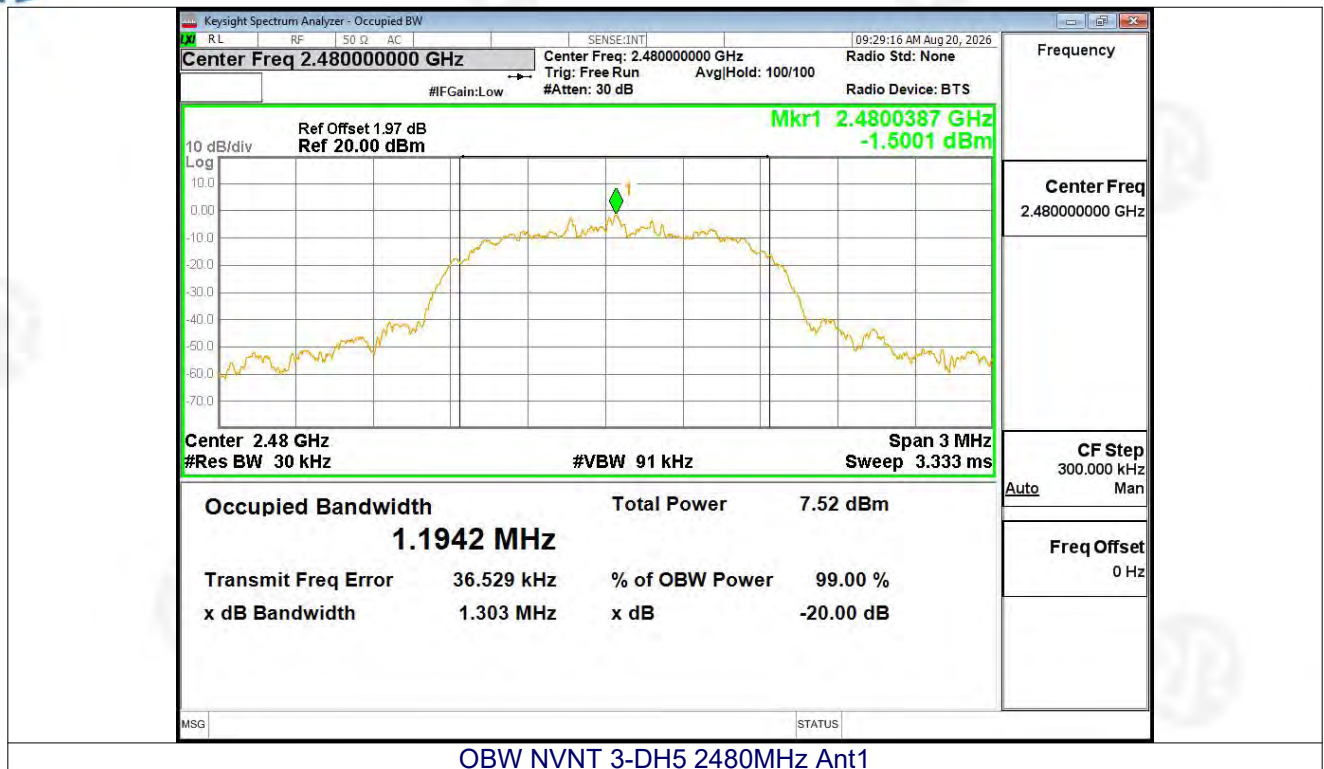




8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Limit:	GFSK:30 dBm $\pi/4$ -DQPSK & 8-DPSK:20.97 dBm

8.1 Block Diagram Of Test Setup

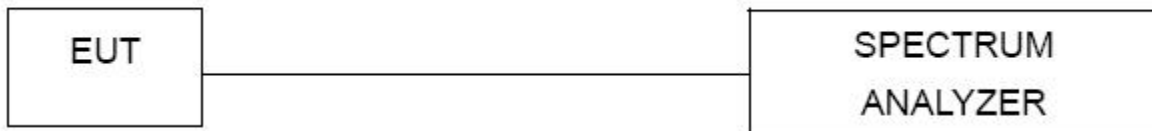

8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD


No deviation.

8.5 Test Result


Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	1.63	21.00	Pass
	Middle	1.9		
	Highest	1.59		
$\pi/4$ -DQPSK	Lowest	2.63	21.00	Pass
	Middle	2.9		
	Highest	2.55		
8-DPSK	Lowest	2.98	21.00	Pass
	Middle	3.26		
	Highest	2.95		



Test plots

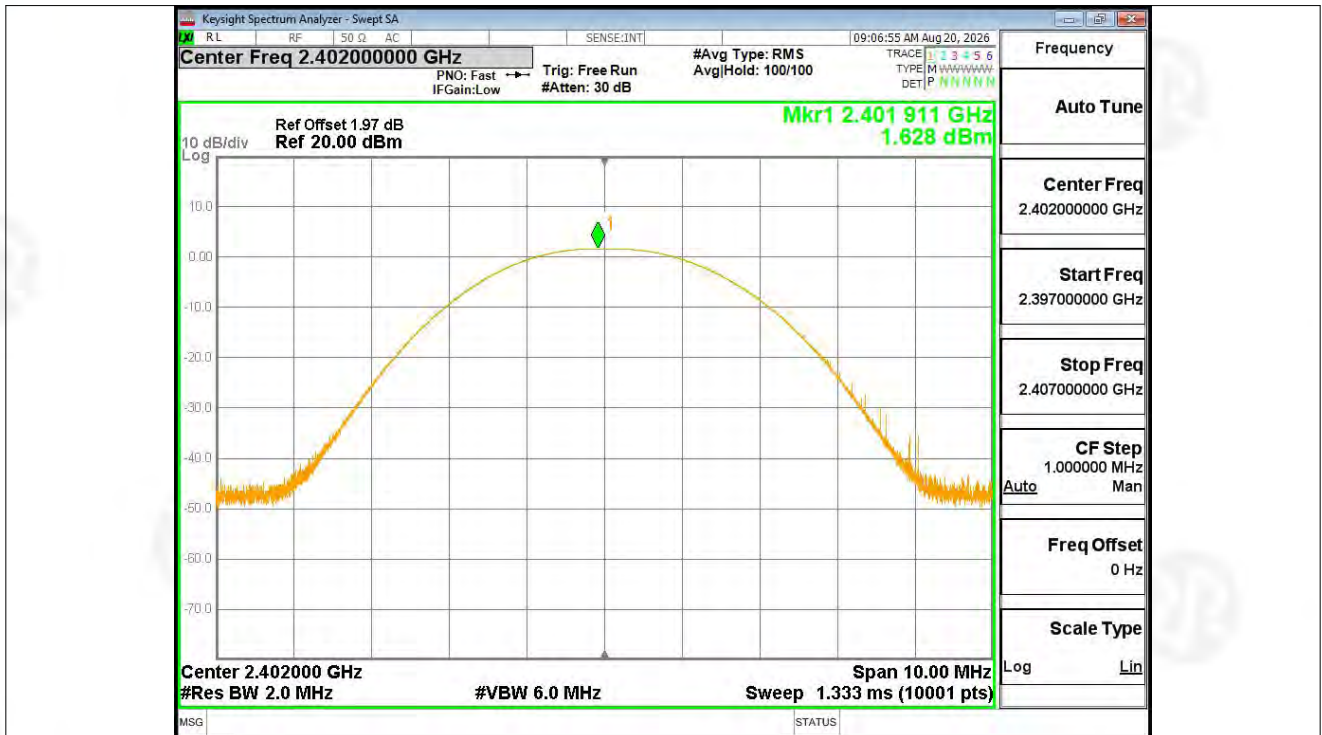

Peak Power NVNT 1-DH5 2402MHz Ant1

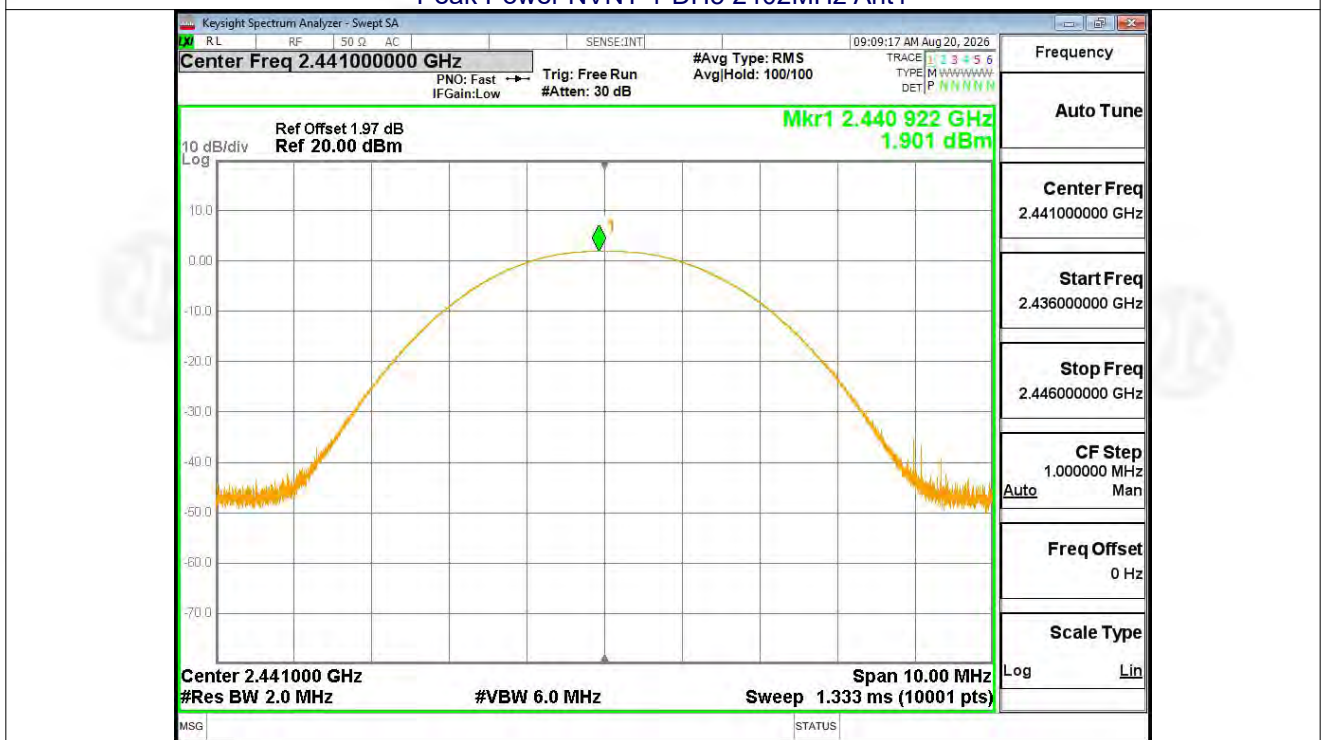


Peak Power NVNT 1-DH5 2441MHz Ant1



Peak Power NVNT 1-DH5 2480MHz Ant1



Peak Power NVNT 2-DH5 2402MHz Ant1

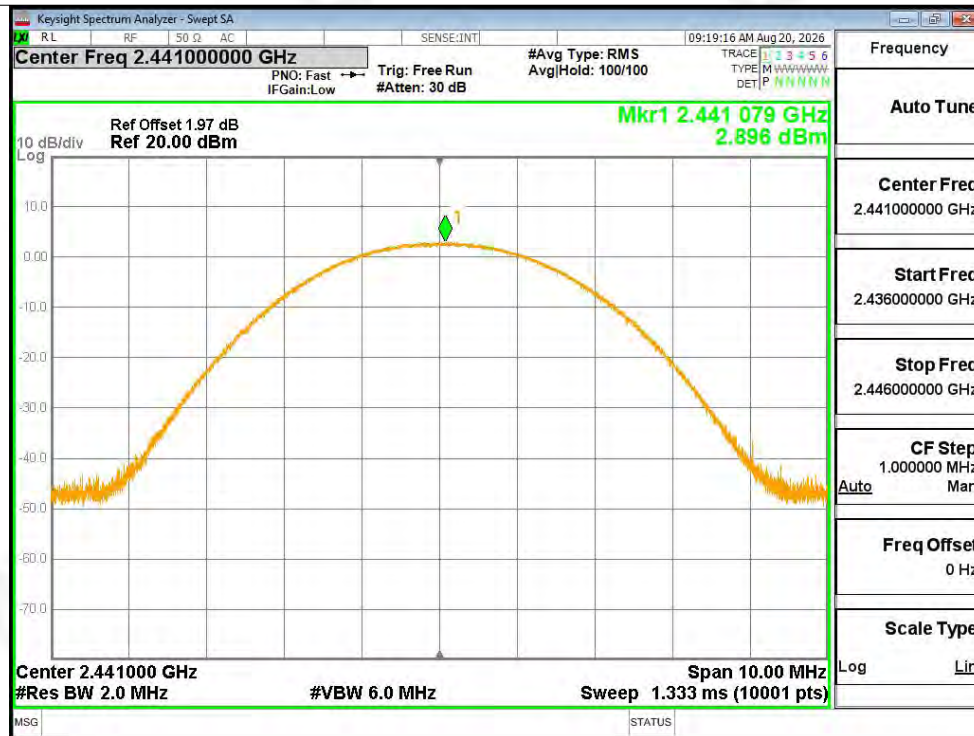


Peak Power NVNT 2-DH5 2441MHz Ant1




Peak Power NVNT 2-DH5 2480MHz Ant1



Peak Power NVNT 3-DH5 2402MHz Ant1

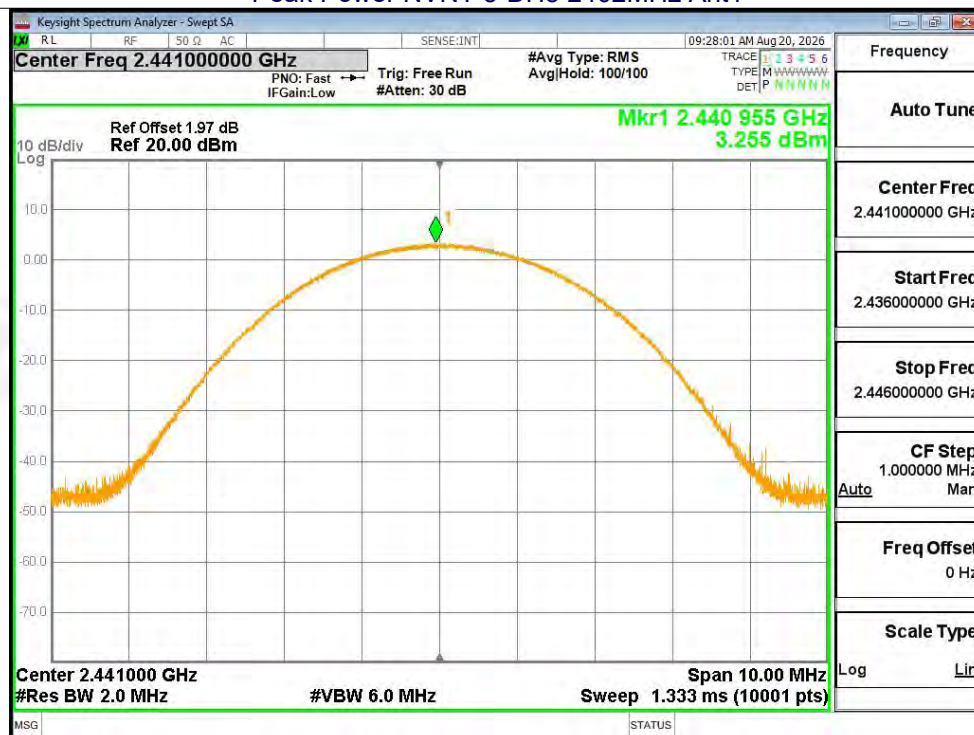

Peak Power NVNT 3-DH5 2441MHz Ant1

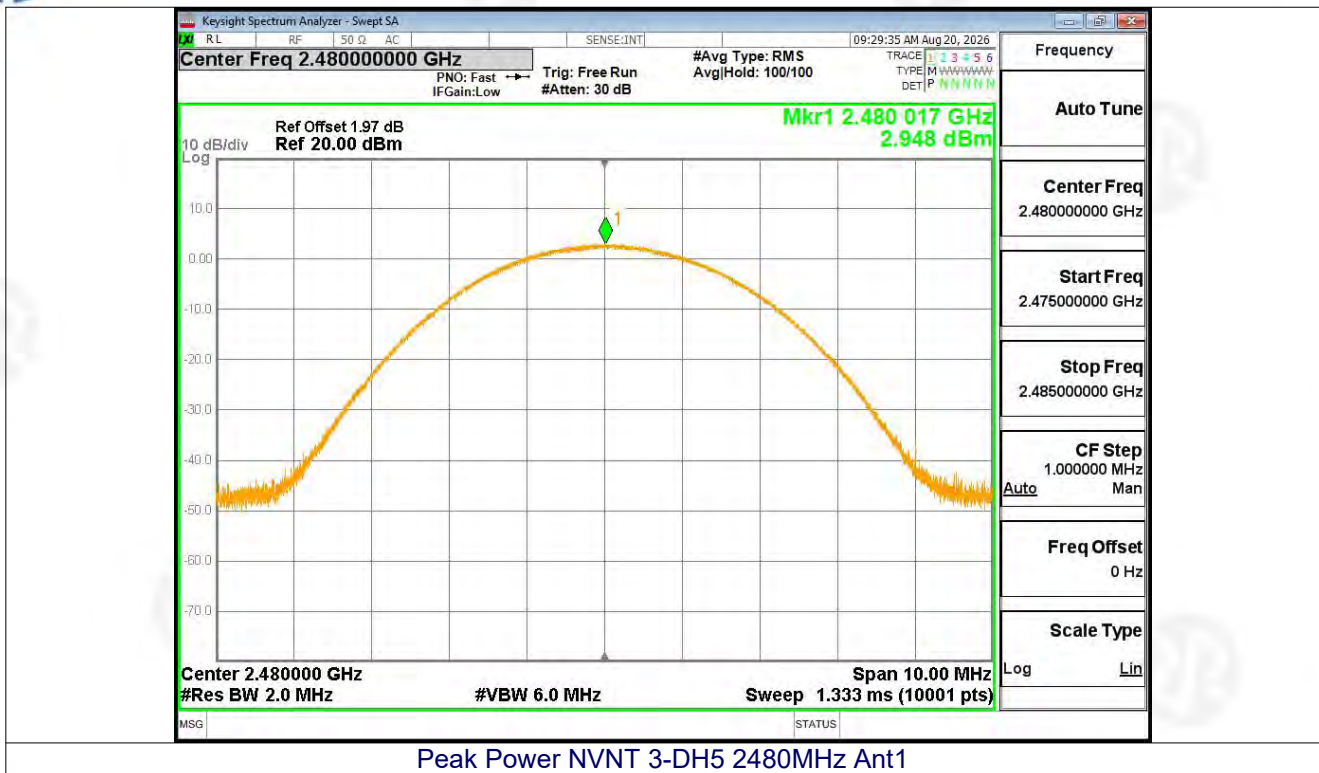




9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Receiver setup:	RBW=300KHz, VBW=300KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup

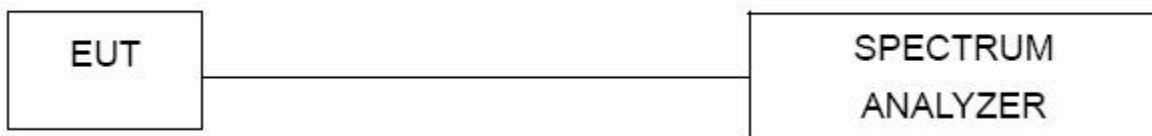

9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300kHz. VBW = 300kHz , Span = 2.0MHz for GFSK, RBW = 100kHz. VBW = 100kHz , Span = 2.6MHz for $\pi/4$ -DQPSK and 8-DPSK. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


9.3 DEVIATION FROM STANDARD

No deviation.




9.4 Test Result


Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
1-DH5	Ant1	2401.886	2403.188	1.302	0.623	Pass
1-DH5	Ant1	2440.864	2441.860	0.996	0.637	Pass
1-DH5	Ant1	2478.868	2480.202	1.334	0.628	Pass
2-DH5	Ant1	2402.061	2403.067	1.006	0.850	Pass
2-DH5	Ant1	2441.092	2442.043	0.952	0.845	Pass
2-DH5	Ant1	2478.892	2479.874	0.983	0.869	Pass
3-DH5	Ant1	2401.889	2403.028	1.139	0.863	Pass
3-DH5	Ant1	2440.866	2442.051	1.186	0.860	Pass
3-DH5	Ant1	2478.863	2480.059	1.196	0.863	Pass

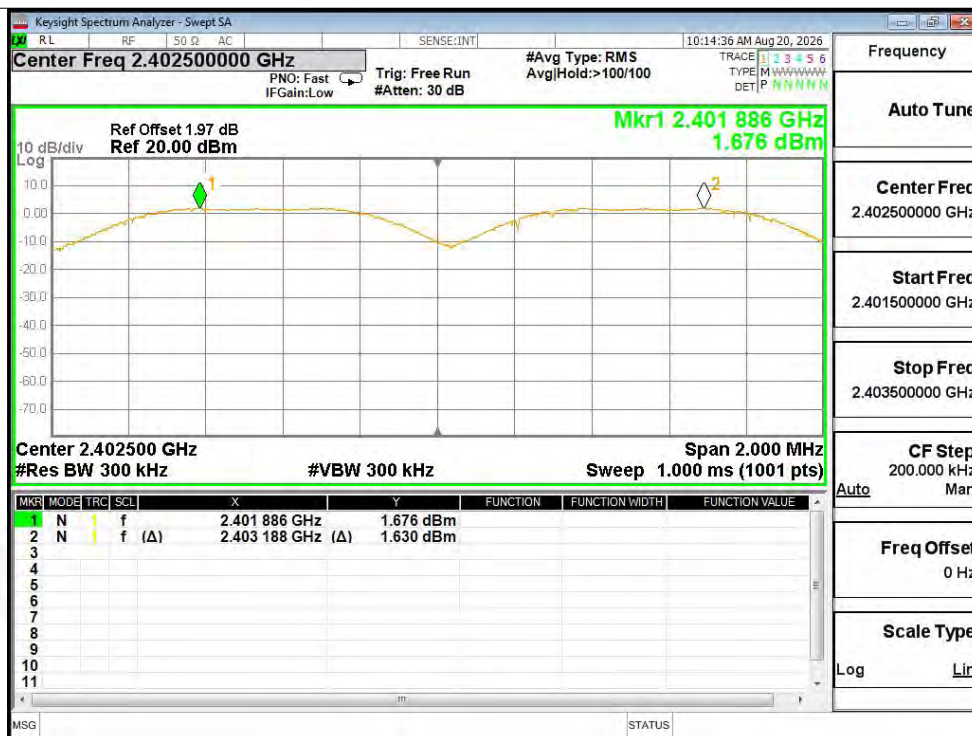


CFS NVNT 1-DH5 2402MHz Ant1

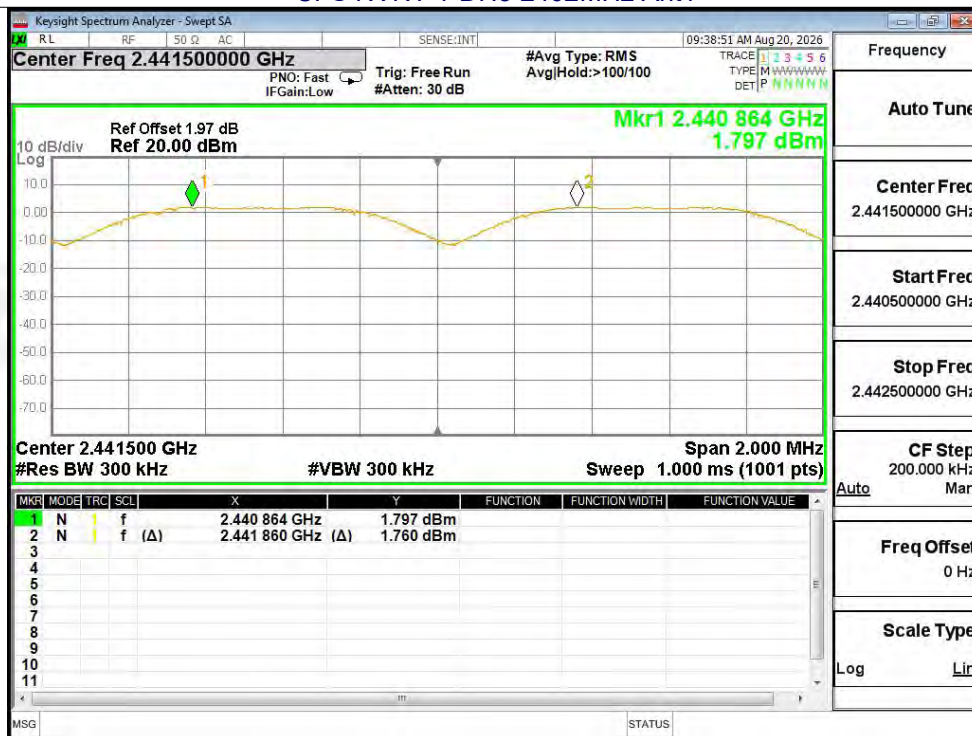

CFS NVNT 1-DH5 2441MHz Ant1

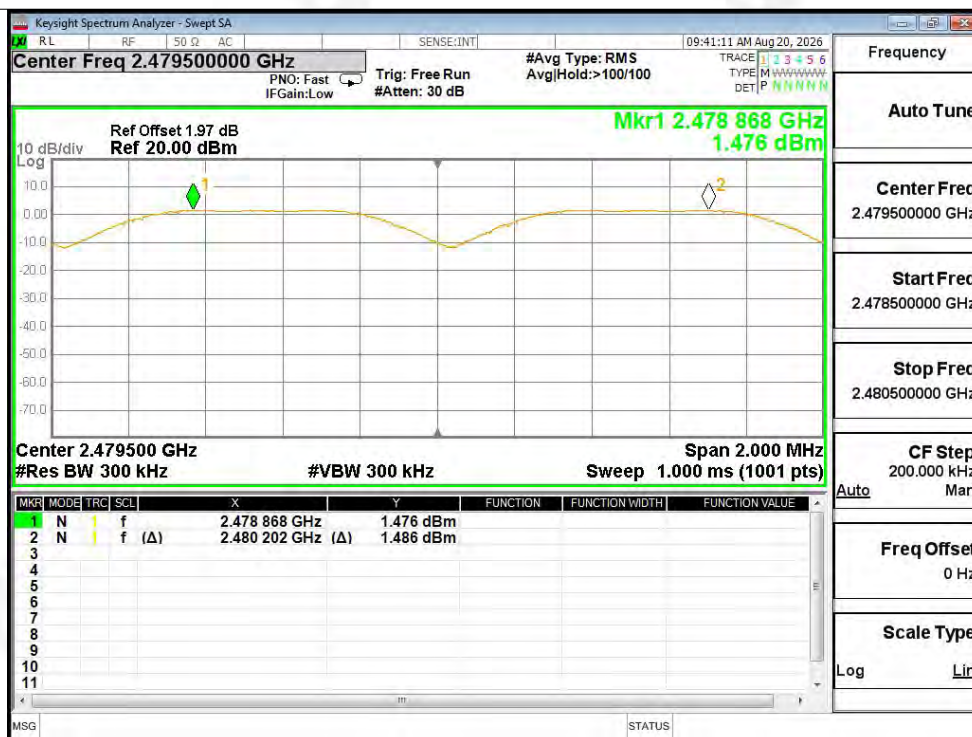


CFS NVNT 1-DH5 2480MHz Ant1

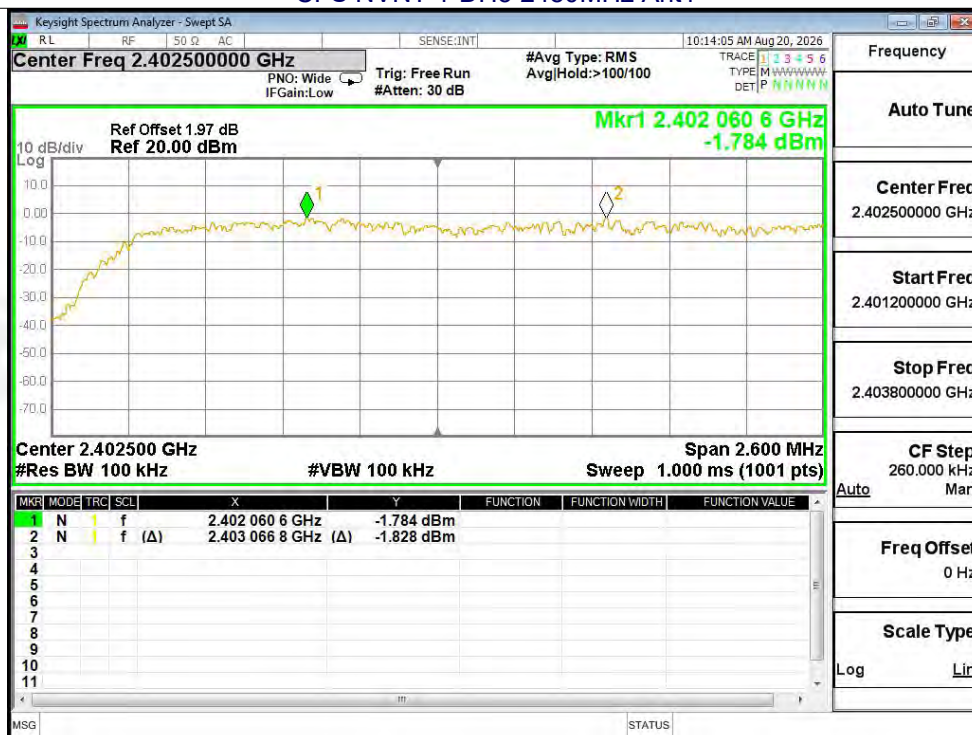

CFS NVNT 2-DH5 2402MHz Ant1



CFS NVNT 2-DH5 2441MHz Ant1

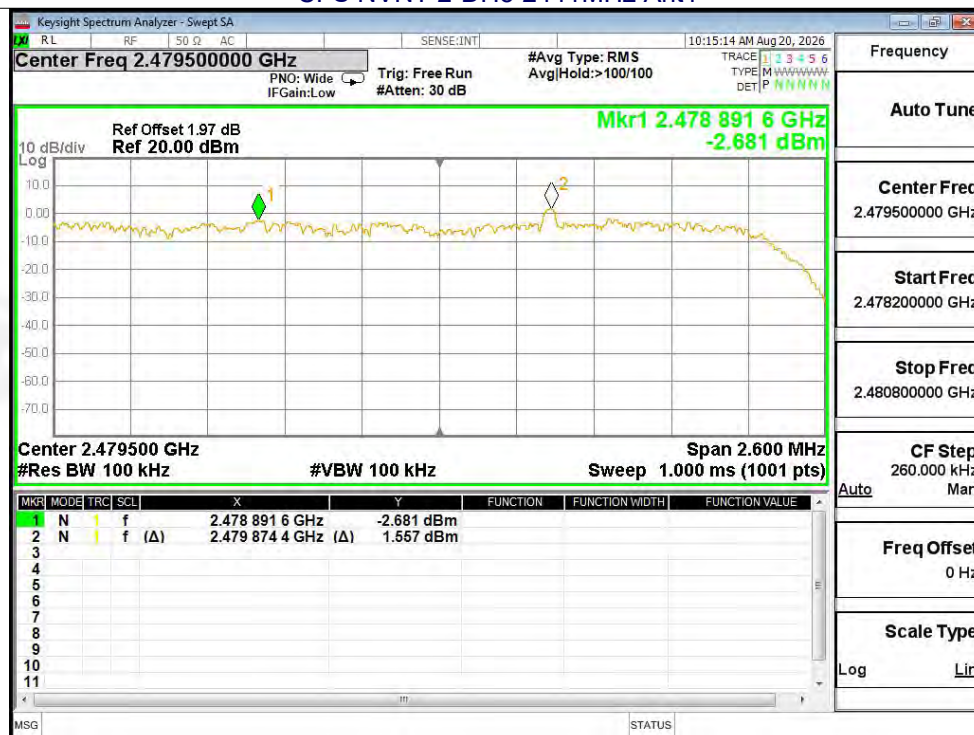


CFS NVNT 2-DH5 2480MHz Ant1



CFS NVNT 3-DH5 2402MHz Ant1



CFS NVNT 3-DH5 2441MHz Ant1

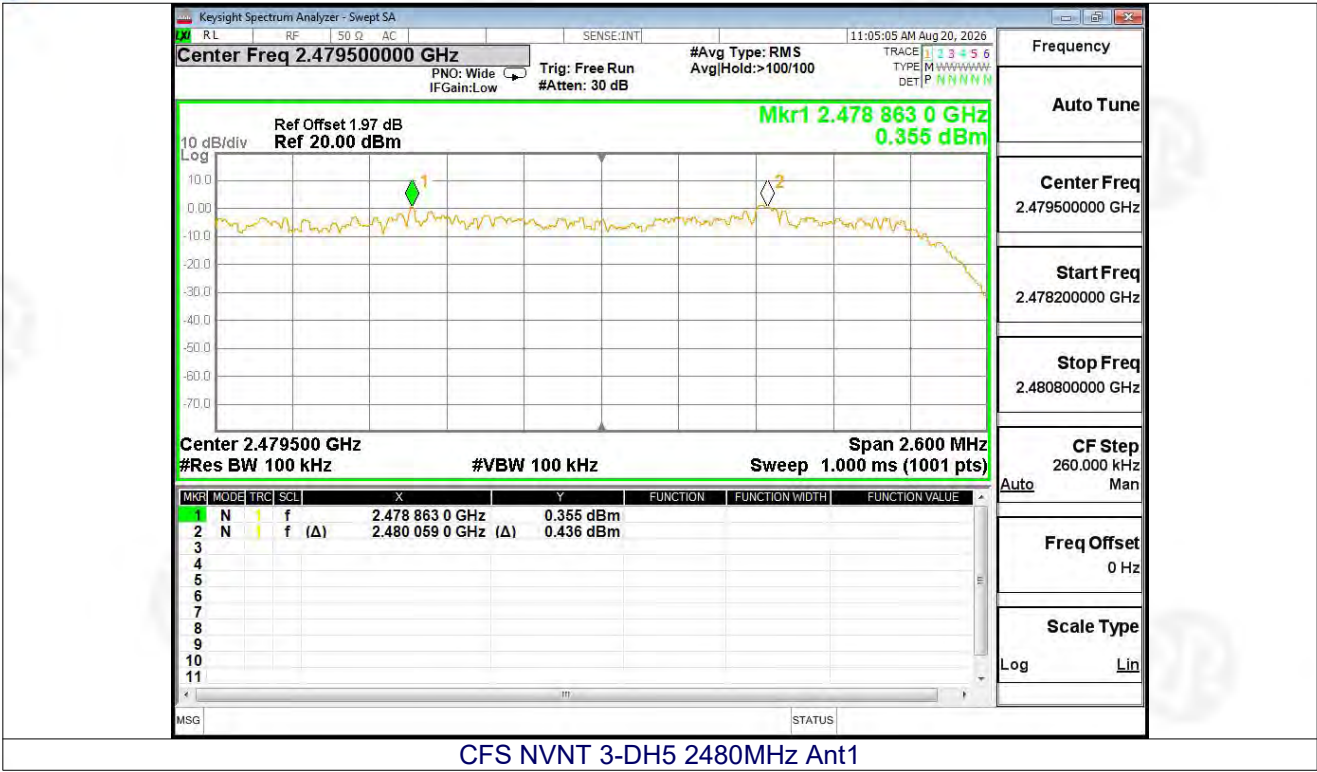



10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD


No deviation.



10.4 Test Result


Mode	Antenna	Hopping Number	Limit	Verdict
1-DH5	Ant1	79	15	Pass
2-DH5	Ant1	79	15	Pass
3-DH5	Ant1	79	15	Pass

Test Plots:
79 Channels in total
GFSK

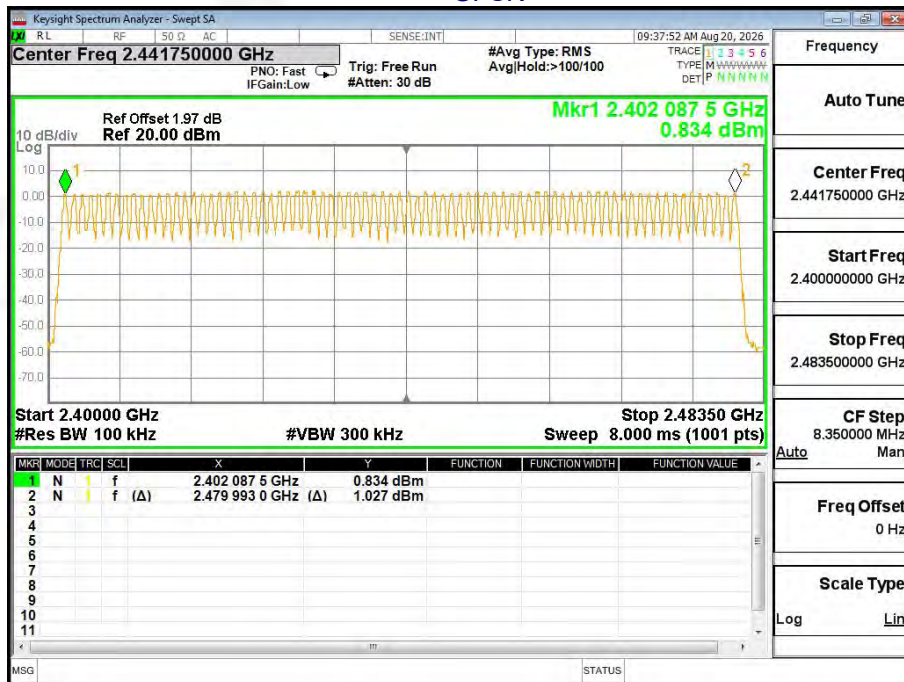




$\pi/4$ -DQPSK

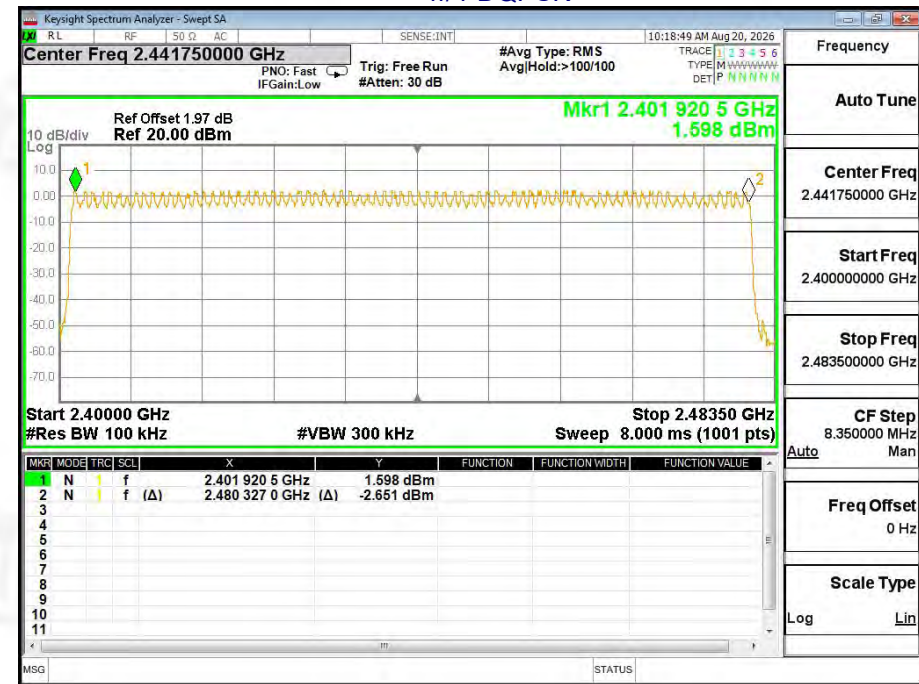

8-DPSK

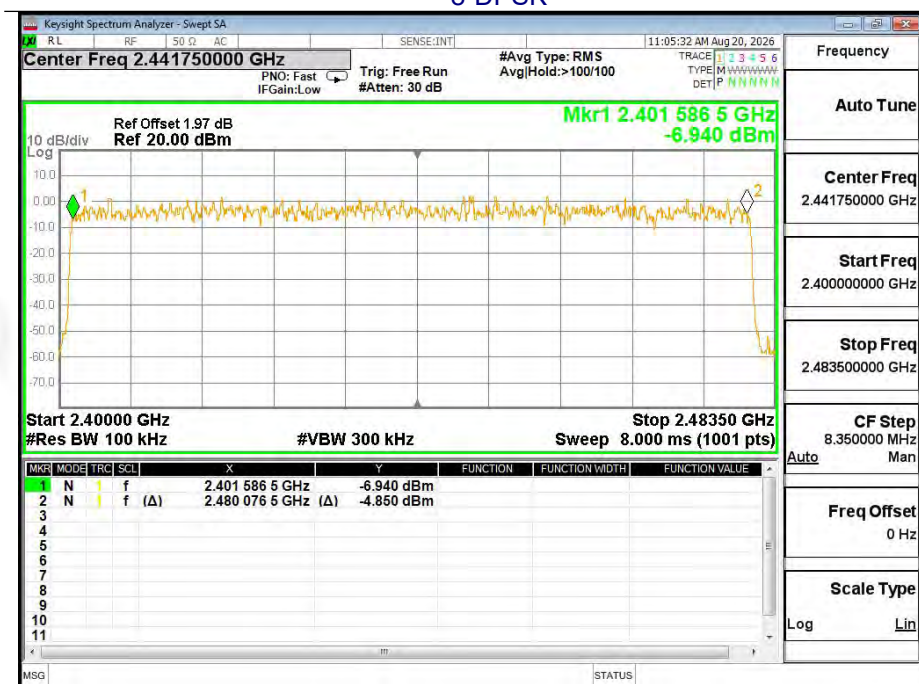



11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10-2020+Cor.1-2023+C63.10a-2024 + Errata to C63.10a-2024
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


11.3 DEVIATION FROM STANDARD

No deviation.




11.4 Test Result

Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	Ant1	0.383	121.028	316	31600	400	Pass
1-DH3	2441	Ant1	1.63	257.54	158	31600	400	Pass
1-DH5	2441	Ant1	2.88	299.52	104	31600	400	Pass
2-DH1	2441	Ant1	0.392	124.656	318	31600	400	Pass
2-DH3	2441	Ant1	1.644	256.464	156	31600	400	Pass
2-DH5	2441	Ant1	2.892	294.984	102	31600	400	Pass
3-DH1	2441	Ant1	0.393	124.188	316	31600	400	Pass
3-DH3	2441	Ant1	1.644	254.82	155	31600	400	Pass
3-DH5	2441	Ant1	2.894	327.022	113	31600	400	Pass

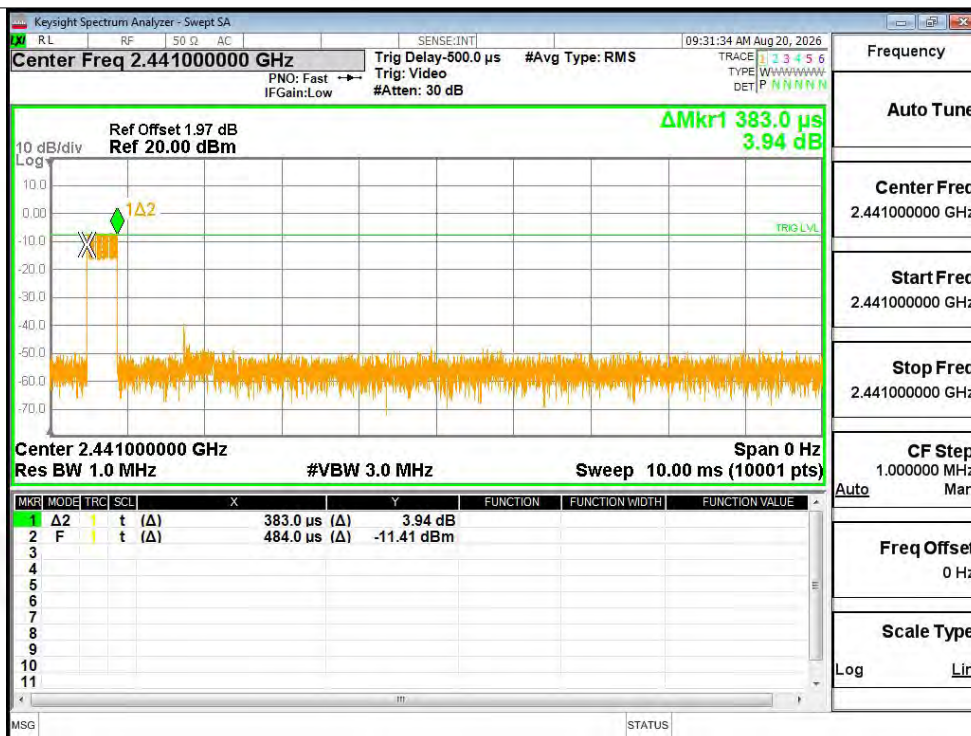


Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

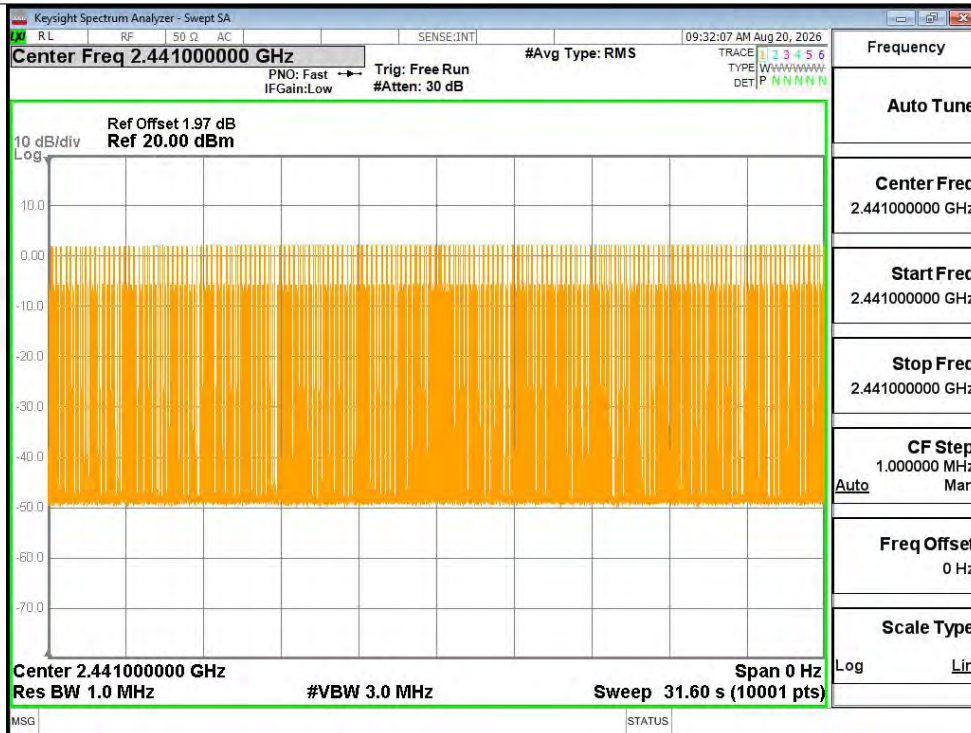


Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated



Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

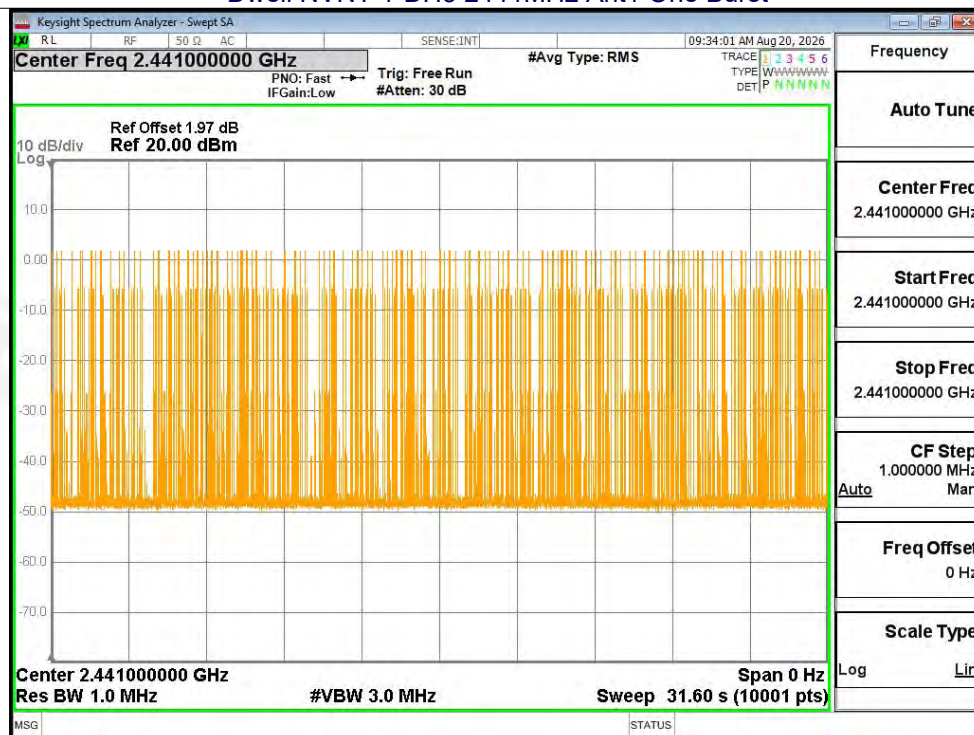


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

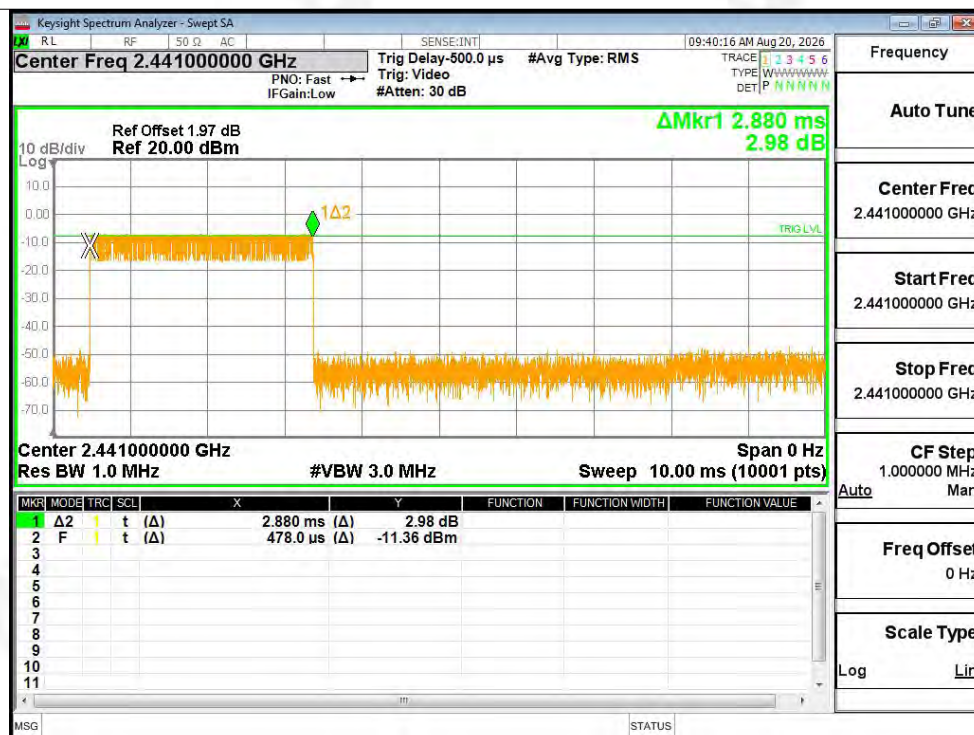







Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

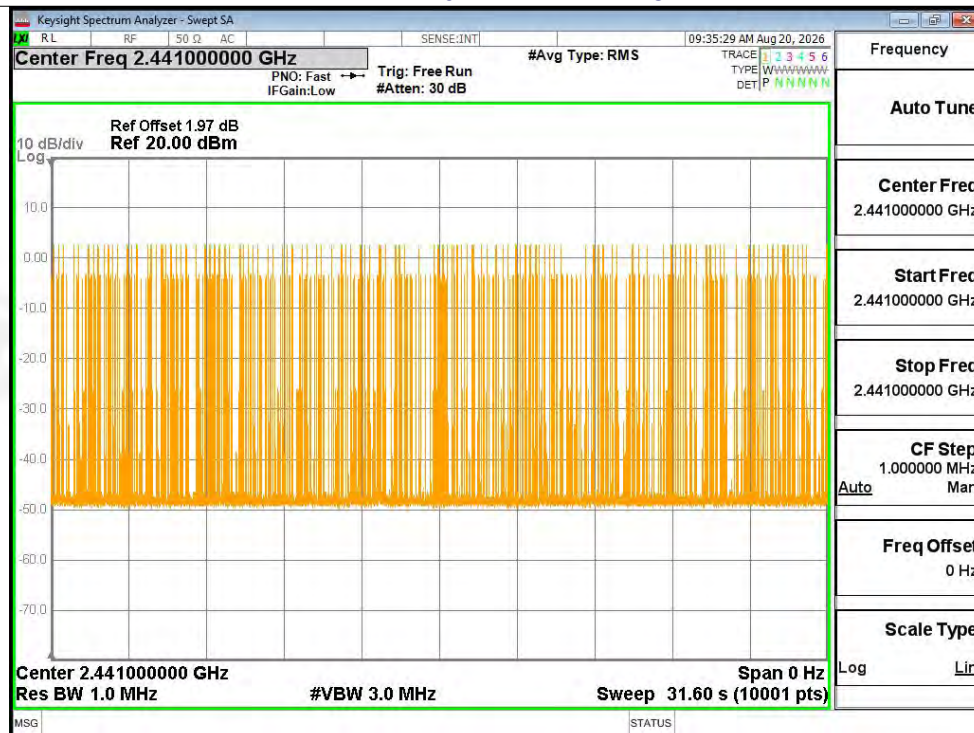

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

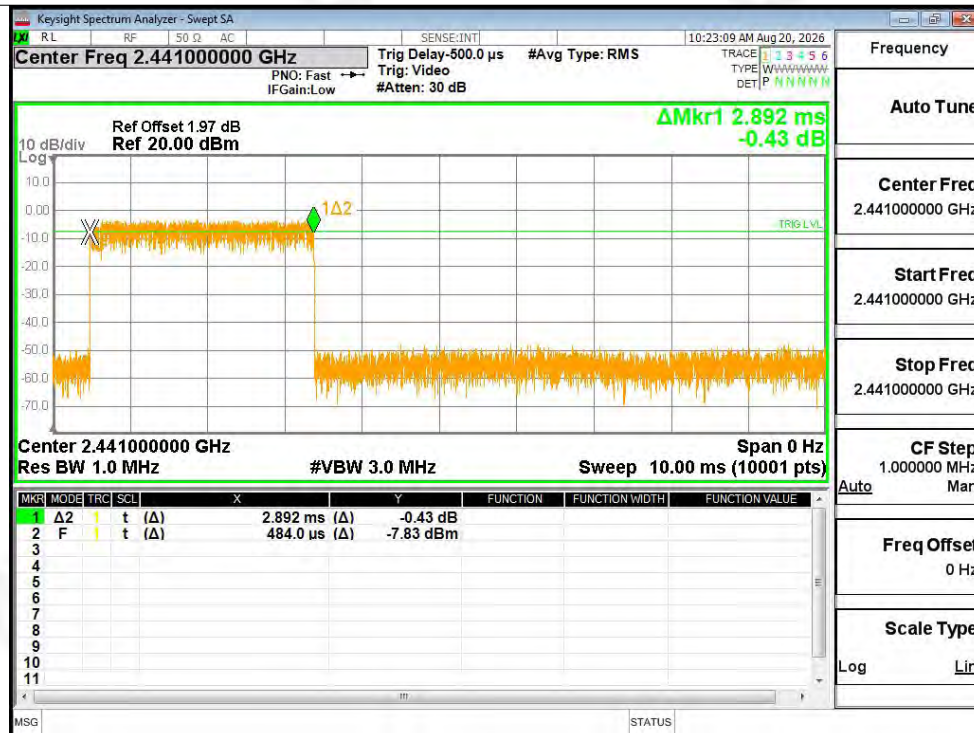


Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

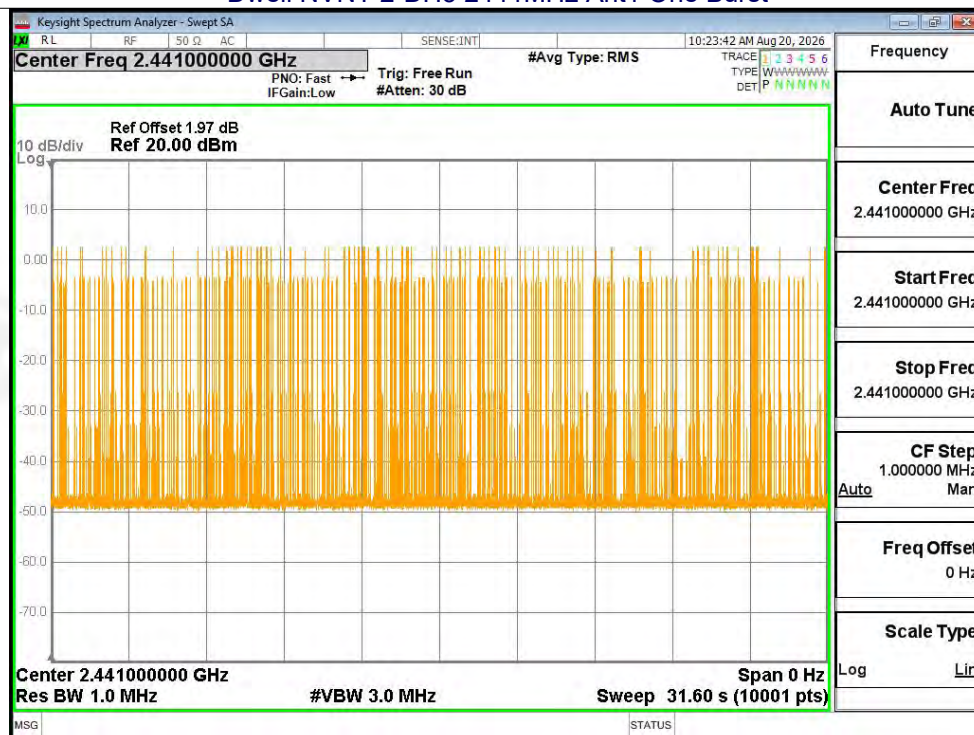


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated




Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

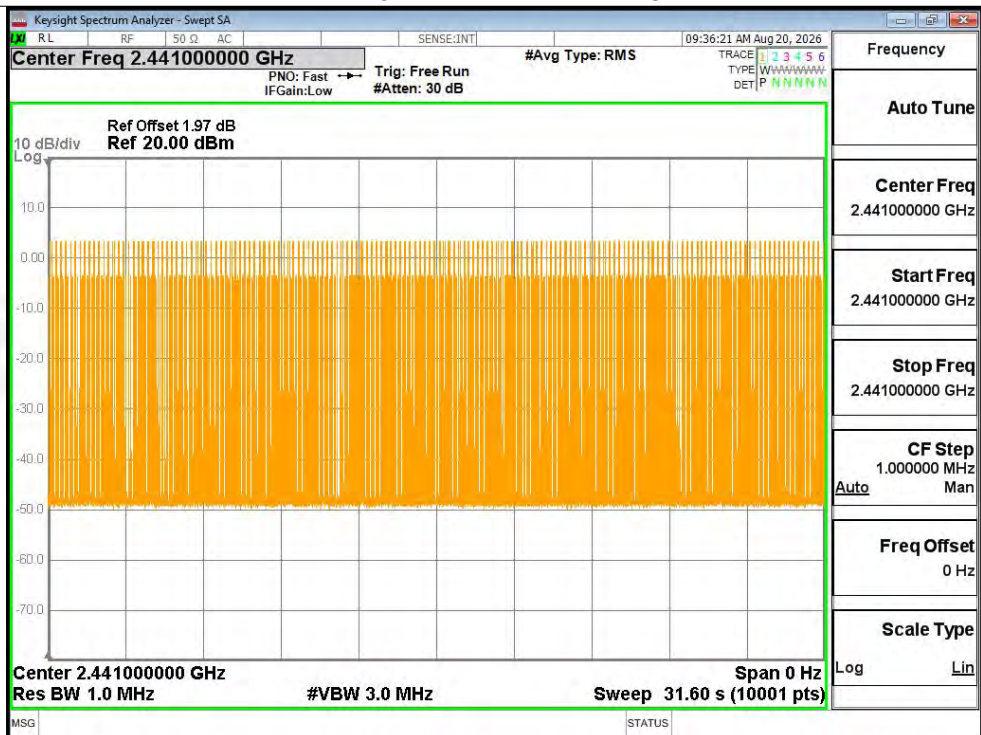


Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

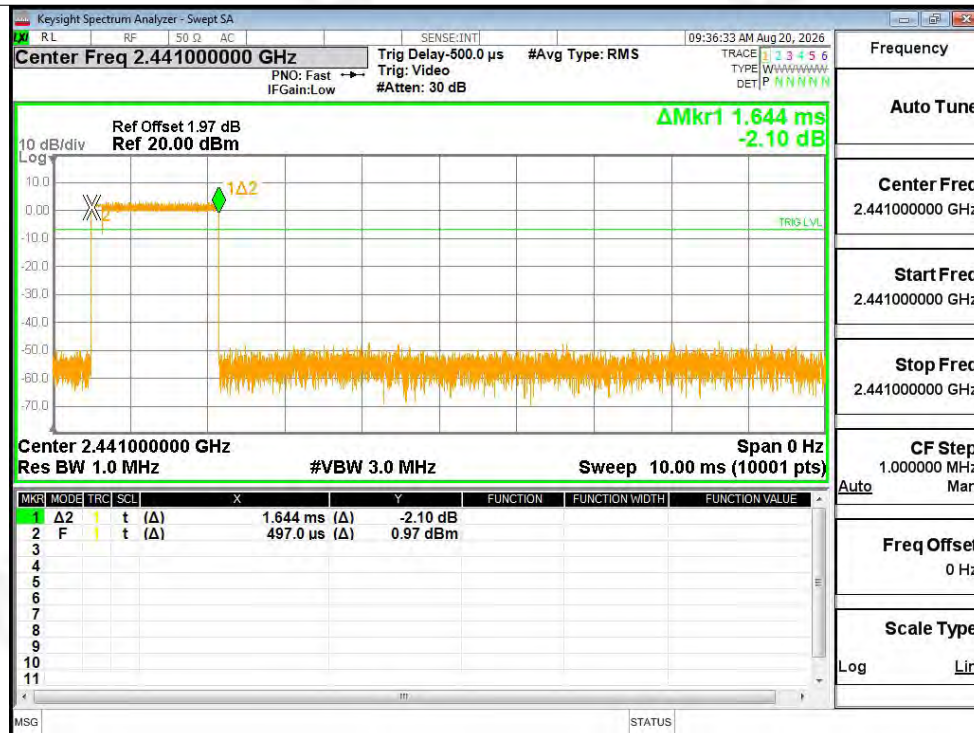


Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

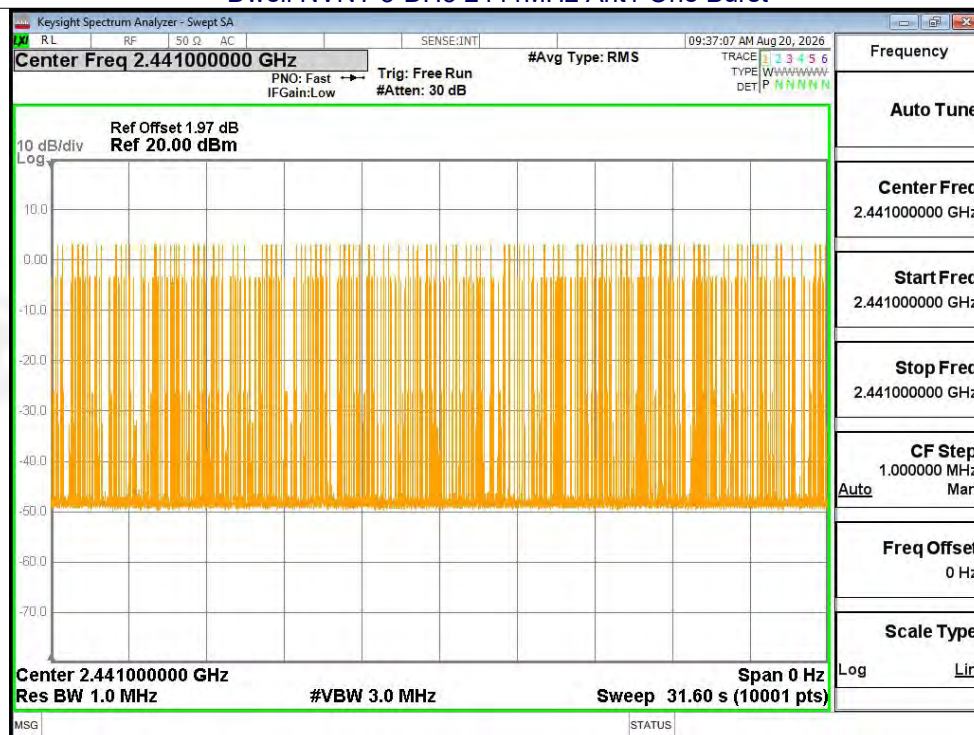

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

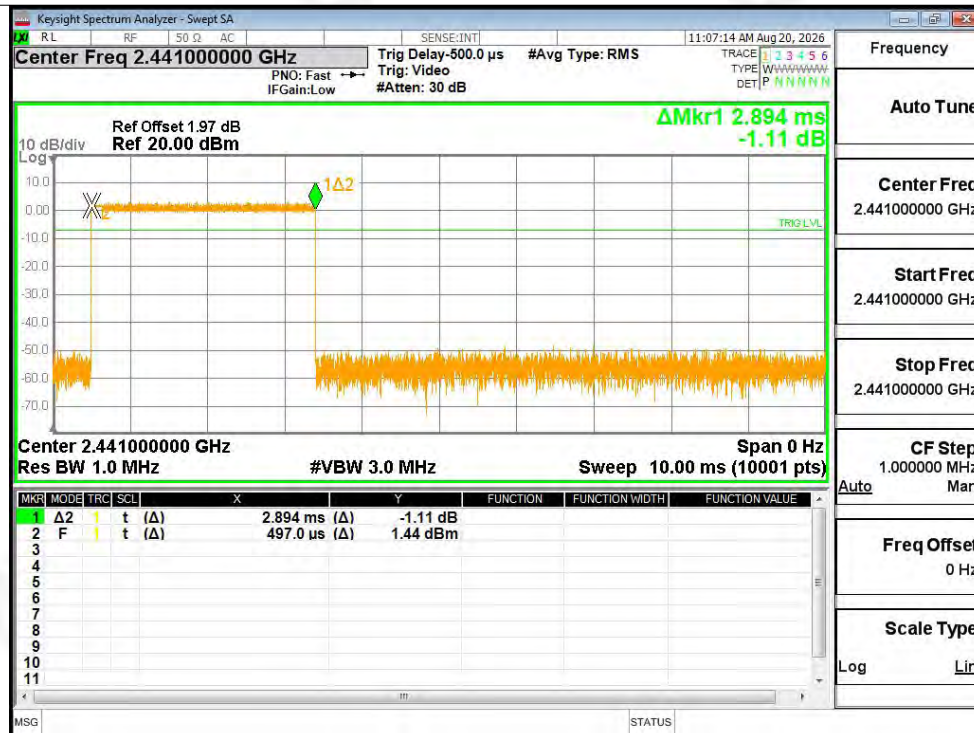

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

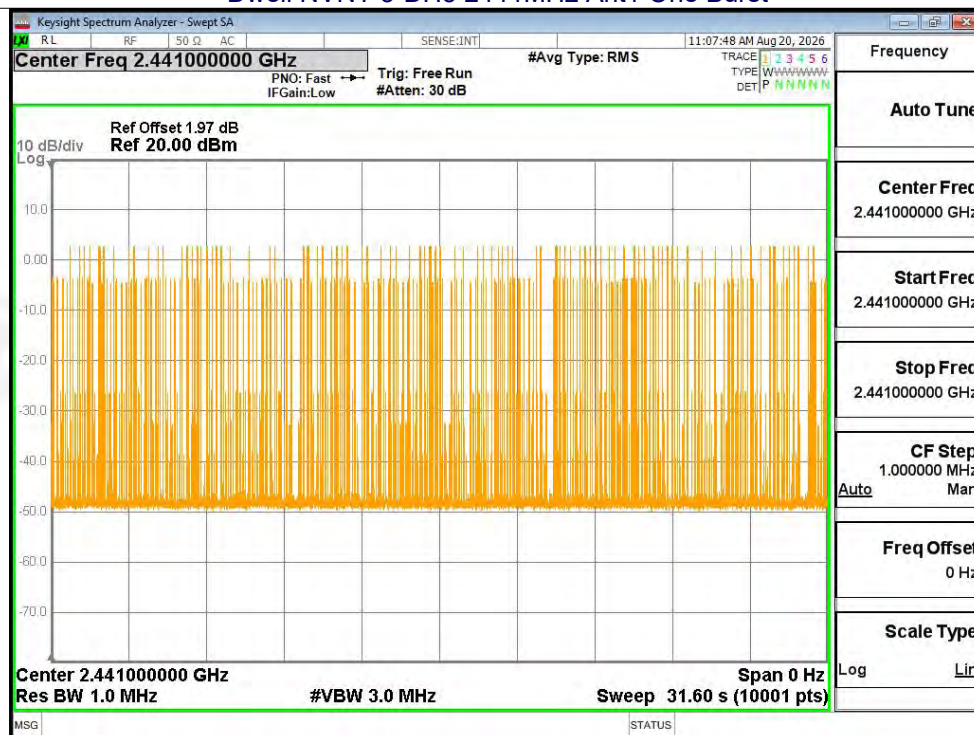

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antennas is 1.7dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****