

EMC Test Report

Report No.: JYTSZ-R01-2600163
Applicant: Suresh Enterprises Inc
Address of Applicant: 2351 NW, 93 Avenue, Doral Florida 33172, United States
Equipment Under Test (EUT)
 Product Name: SMART PHONE
 Model No.: S17Pro Sub
 Trade Mark: Techview
FCC ID: 2BTUE-S17PROSUB
Applicable Standards: FCC CFR Title 47 Part 15B
Date of Sample Receipt: 05 Jun., 2026
Date of Test: 06 Jun., to 01 Jul., 2026
Date of report Issued: 02 Jul., 2026
Test Result: PASS

Project by:	<u>Luol Ding</u>	Date:	<u>02 Jul., 2026</u>
Reviewed by:	<u>Yeto Lang</u>	Date:	<u>02 Jul., 2026</u>
Approved by:	<u>James Wei</u>	Date:	<u>02 Jul., 2026</u>
	Manager		

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	02 Jul., 2026	Original

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Disclaimer.....	4
3.4 Test Mode	4
3.5 Description of Test Auxiliary Equipment	5
3.6 Description of Cable Used.....	5
3.7 Measurement Uncertainty	5
3.8 Additions to, Deviations, or Exclusions from the Method	5
3.9 Laboratory Facility	5
3.10 Laboratory Location.....	6
3.11 Test Instruments List.....	6
4 Measurement Setup and Procedure	7
4.1 Test Setup	7
4.2 Test Procedure	9
5 Test Results.....	10
5.1 Summary	10
5.1.1 Clause and data summary	10
5.1.2 Test Limit.....	10
5.2 Conducted Emission	11
5.3 Radiated Emission	13

3 General Information

3.1 Client Information

Applicant:	Suresh Enterprises Inc
Address:	2351 NW, 93 Avenue, Doral Florida 33172, United States
Manufacturer:	Suresh Enterprises Inc
Address:	2351 NW, 93 Avenue, Doral Florida 33172, United States
Factory:	Suresh Enterprises Inc
Address:	2351 NW, 93 Avenue, Doral Florida 33172, United States

3.2 General Description of E.U.T.

Product Name:	SMART PHONE		
Model No.:	S17Pro Sub		
Power Supply:	Rechargeable Li-ion Battery DC3.87V, 5000mAh		
AC Adapter:	Model: EE-0502000UZ Input: AC100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A		
Frequency Range Within 30MHz-960MHz	GSM 850	Tx: 824 MHz - 849 MHz	Rx: 869 MHz - 894 MHz
	WCDMA B5	Tx: 824 MHz - 849 MHz	Rx: 869 MHz - 894 MHz
	LTE band 5:	Tx: 824 MHz - 849 MHz	Rx: 869 MHz - 894 MHz
	LTE band 12:	Tx: 699 MHz - 716 MHz	Rx: 729 MHz - 746 MHz
	LTE band 17:	Tx: 704 MHz - 716 MHz	Rx: 734 MHz - 746 MHz
Test Sample Condition:	The test samples were provided in good working order with no visible defects.		

3.3 Disclaimer

Disclaimer:
For the information or data provided by the client in this report, the relevant results or conclusions of this report are only made for these data or information. The testing laboratory is not responsible for the authenticity and accuracy of these data or information.

3.4 Test Mode

Operating Mode	Detail Description
PC mode	Keep the EUT in Downloading mode
Charging+Recording mode	Keep the EUT in Charging+Recording mode
Charging+Playing mode	Keep the EUT in Charging+Playing mode(Worst case)
FM mode	Keep the EUT in FM receiver mode(CYY test data)
GPS mode	Keep the EUT in GPS receiver mode
Charging+ GSM 850 Idle mode	Keep the EUT in Charging+ GSM 850 Idle mode(Worst case for CXX)
Charging+ WCDMA B5 Idle mode	Keep the EUT in Charging+ WCDMA B5 Idle mode
Charging+ LTE B5 Idle mode	Keep the EUT in Charging+ LTE B5 Idle mode
Charging+ LTE B12 Idle mode	Keep the EUT in Charging+ LTE B12 Idle mode
Charging+ LTE B17 Idle mode	Keep the EUT in Charging+ LTE B17 Idle mode
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

3.5 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC
HP	Printer	HP LaserJet P1007	VNFP409729	DoC

3.6 Description of Cable Used

Cable Type	Description	Length	From	To
Detached USB Cable	Shielding	1.0m	EUT	PC/Adapter

3.7 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.0 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	2.5 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.7 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.5 dB
Radiated Emission (30MHz ~ 1000MHz) (10m SAC)	4.3 dB

Note: All the measurement uncertainty value were shown with a coverage $k=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.8 Additions to, Deviations, or Exclusions from the Method

No

3.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.10 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.11 Test Instruments List


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	12-09-2025	12-08-2030
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	08-09-2025	08-08-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	12-07-2025	12-06-2026
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-04-2025	12-03-2026
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-04-2025	12-03-2026
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-04-2025	12-03-2026
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-04-2025	12-03-2026
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-14-2026	01-13-2027
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-14-2026	01-13-2027
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	04-29-2026	04-28-2027
LISN	Rohde & Schwarz	ENV432	WXJ005-2	08-08-2025	08-07-2026
LISN	Schwarzbeck	NNLK 8121	XFJ004-02	03-30-2026	03-29-2027
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-08-2025	12-07-2026
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-04-2025	12-03-2026
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-14-2026	01-13-2027
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

4 Measurement Setup and Procedure

4.1 Test Setup


1) Conducted emission measurement:

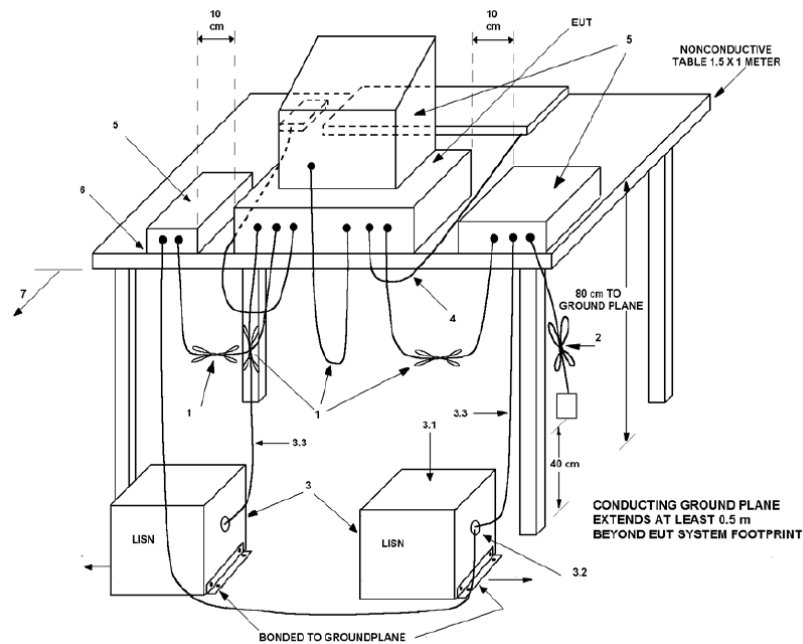


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

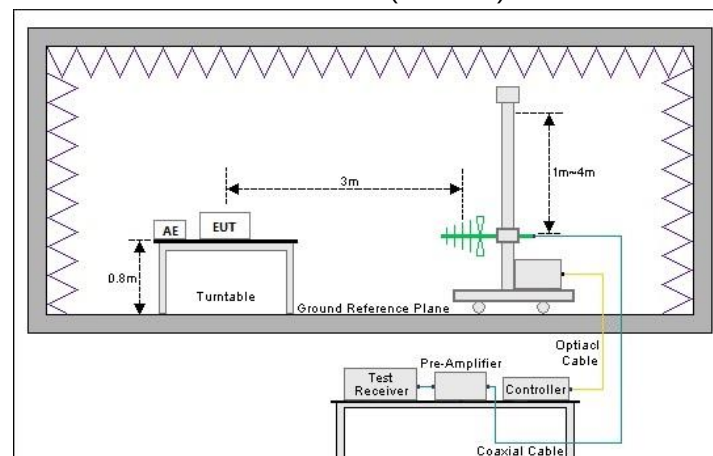

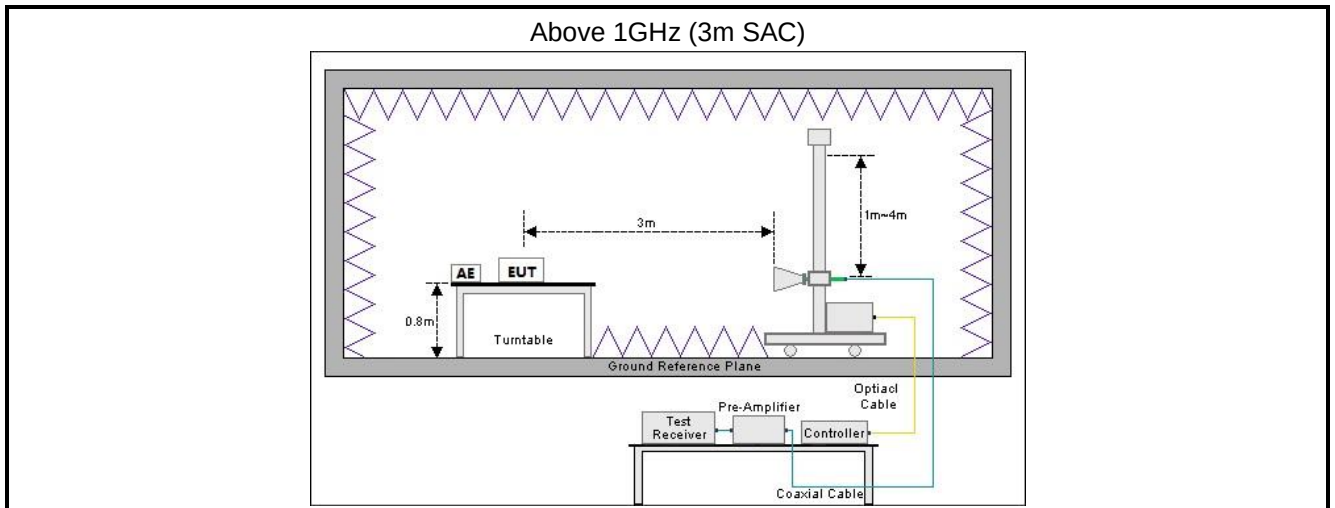

4.2 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary


Test items	Standard clause	Test data	Result
Conducted Emission	Part 15.107	See Section 5.2	Pass
Radiated Emission	Part 15.109	See Section 5.3	Pass
Remark: 1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
Test Method:	ANSI C63.4:2014		

5.1.2 Test Limit

Test items	Limit																																																					
Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Class A Limit (dBμV)</th><th colspan="2">Class B Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>79</td><td>66</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>73</td><td>60</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>73</td><td>60</td><td>60</td><td>50</td></tr><tr><td colspan="5">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.</td></tr><tr><td colspan="5">Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Class A Limit (dBμV)		Class B Limit (dBμV)		Quasi-Peak	Average	Quasi-Peak	Average	0.15 – 0.5	79	66	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	73	60	56	46	5 – 30	73	60	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.					Note 2: The more stringent limit applies at transition frequencies.																							
	Frequency (MHz)		Class A Limit (dBμV)		Class B Limit (dBμV)																																																	
		Quasi-Peak	Average	Quasi-Peak	Average																																																	
	0.15 – 0.5	79	66	66 to 56 Note 1	56 to 46 Note 1																																																	
	0.5 – 5	73	60	56	46																																																	
	5 – 30	73	60	60	50																																																	
	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency.																																																					
Note 2: The more stringent limit applies at transition frequencies.																																																						
Radiated Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Class A Limit (dBμV/m)</th><th colspan="2">Class B Limit (dBμV/m)</th></tr><tr><th>Quasi-Peak @ 3m</th><th>Quasi-Peak @ 10m</th><th>Quasi-Peak @ 3m</th><th>Quasi-Peak @ 10m</th></tr><tr><td>30 – 88</td><td>49.0</td><td>39.0</td><td>40.0</td><td>30.0</td></tr><tr><td>88 – 216</td><td>53.5</td><td>43.5</td><td>43.5</td><td>33.5</td></tr><tr><td>216 – 960</td><td>56.0</td><td>46.0</td><td>46.0</td><td>36.0</td></tr><tr><td>960 – 1000</td><td>60.0</td><td>50.0</td><td>54.0</td><td>44.0</td></tr><tr><td colspan="5">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Class A Limit (dBμV/m) @ 3m</th><th colspan="2">Class B Limit (dBμV/m) @ 3m</th></tr><tr><th>Average</th><th>Peake</th><th>Average</th><th>Peake</th></tr><tr><td>Above 1 GHz</td><td>60.0</td><td>80.0</td><td>54.0</td><td>74.0</td></tr><tr><td colspan="5">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Class A Limit (dBμV/m)		Class B Limit (dBμV/m)		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m	30 – 88	49.0	39.0	40.0	30.0	88 – 216	53.5	43.5	43.5	33.5	216 – 960	56.0	46.0	46.0	36.0	960 – 1000	60.0	50.0	54.0	44.0	Note: The more stringent limit applies at transition frequencies.					Frequency	Class A Limit (dBμV/m) @ 3m		Class B Limit (dBμV/m) @ 3m		Average	Peake	Average	Peake	Above 1 GHz	60.0	80.0	54.0	74.0	Note: The measurement bandwidth shall be 1 MHz or greater.				
	Frequency (MHz)		Class A Limit (dBμV/m)		Class B Limit (dBμV/m)																																																	
		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m																																																	
	30 – 88	49.0	39.0	40.0	30.0																																																	
	88 – 216	53.5	43.5	43.5	33.5																																																	
	216 – 960	56.0	46.0	46.0	36.0																																																	
	960 – 1000	60.0	50.0	54.0	44.0																																																	
	Note: The more stringent limit applies at transition frequencies.																																																					
	Frequency	Class A Limit (dBμV/m) @ 3m		Class B Limit (dBμV/m) @ 3m																																																		
		Average	Peake	Average	Peake																																																	
	Above 1 GHz	60.0	80.0	54.0	74.0																																																	
Note: The measurement bandwidth shall be 1 MHz or greater.																																																						

5.2 Conducted Emission

Product name:	SMART PHONE	Product model:	S17Pro Sub
Test by:	Kiran Zeng	Test mode:	Charging & Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

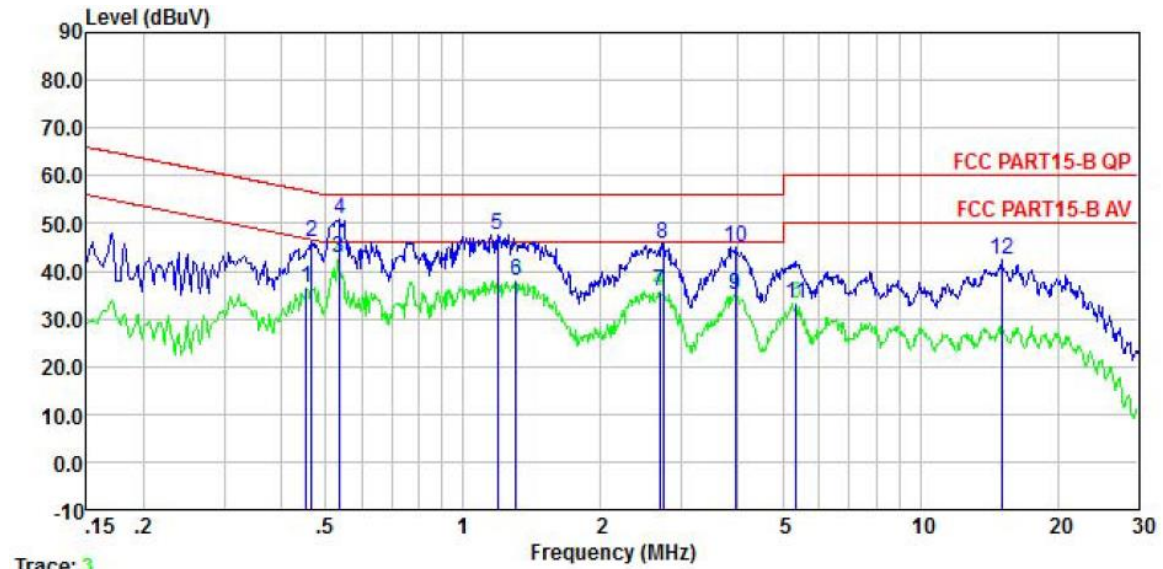


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.454	16.65	10.13	0.00	9.88	0.00	36.66	46.80	-10.14	Average
2	0.466	26.22	10.14	0.00	9.88	0.00	46.24	56.58	-10.34	QP
3	0.535	22.72	10.17	0.00	9.88	0.00	42.77	46.00	-3.23	Average
4	0.538	30.90	10.17	0.00	9.88	0.00	50.95	56.00	-5.05	QP
5	1.191	27.49	10.18	0.00	9.88	0.00	47.55	56.00	-8.45	QP
6	1.303	18.01	10.16	0.00	9.88	0.00	38.05	46.00	-7.95	Average
7	2.692	15.73	10.25	0.00	9.88	0.00	35.86	46.00	-10.14	Average
8	2.736	25.53	10.26	0.00	9.88	0.00	45.67	56.00	-10.33	QP
9	3.943	15.01	10.11	0.00	9.89	0.00	35.01	46.00	-10.99	Average
10	3.943	25.04	10.11	0.00	9.89	0.00	45.04	56.00	-10.96	QP
11	5.362	12.80	10.32	0.00	9.90	0.00	33.02	50.00	-16.98	Average
12	15.066	21.66	10.80	0.00	9.93	0.00	42.39	60.00	-17.61	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	SMART PHONE	Product model:	S17Pro Sub
Test by:	Kiran Zeng	Test mode:	Charging & Recording mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

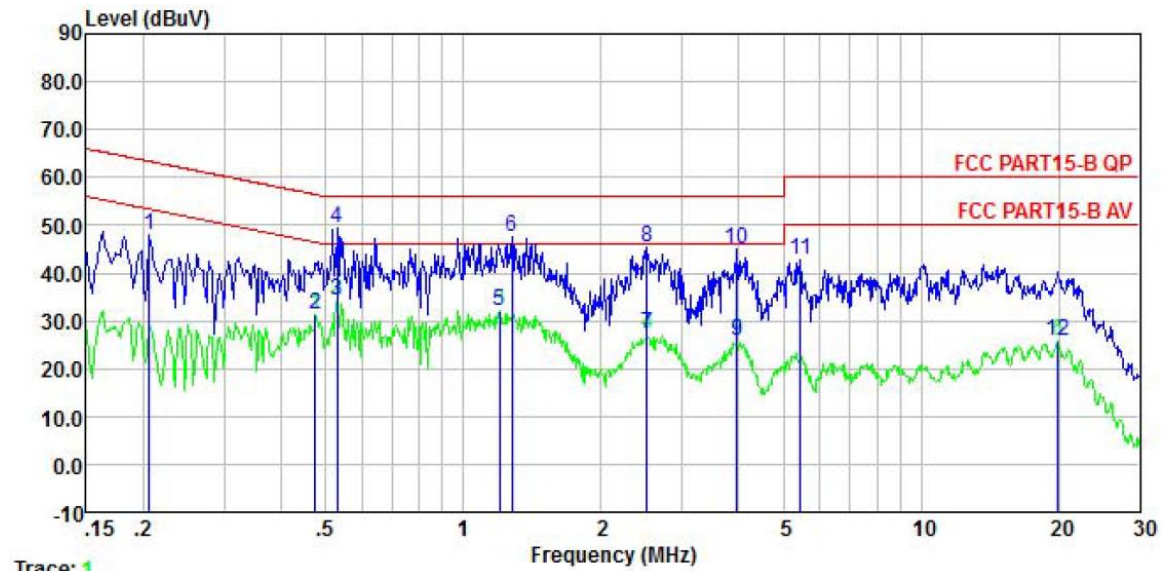

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.206	27.88	10.20	0.00	9.88	0.00	47.96	63.36	-15.40	QP
2	0.474	11.39	10.18	0.00	9.88	0.00	31.45	46.45	-15.00	Average
3	0.529	14.17	10.24	0.00	9.88	0.00	34.29	46.00	-11.71	Average
4	0.529	29.26	10.24	0.00	9.88	0.00	49.38	56.00	-6.62	QP
5	1.197	11.98	10.23	0.00	9.88	0.00	32.09	46.00	-13.91	Average
6	1.276	27.31	10.24	0.00	9.88	0.00	47.43	56.00	-8.57	QP
7	2.513	6.99	10.24	0.00	9.88	0.00	27.11	46.00	-18.89	Average
8	2.513	25.27	10.24	0.00	9.88	0.00	45.39	56.00	-10.61	QP
9	3.964	5.78	10.20	0.00	9.89	0.00	25.87	46.00	-20.13	Average
10	3.964	24.96	10.20	0.00	9.89	0.00	45.05	56.00	-10.95	QP
11	5.447	22.63	10.23	0.00	9.90	0.00	42.76	60.00	-17.24	QP
12	19.950	5.29	10.60	0.00	9.96	0.00	25.85	50.00	-24.15	Average


Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.3 Radiated Emission

Below 1GHz:

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	Charging & Playing mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

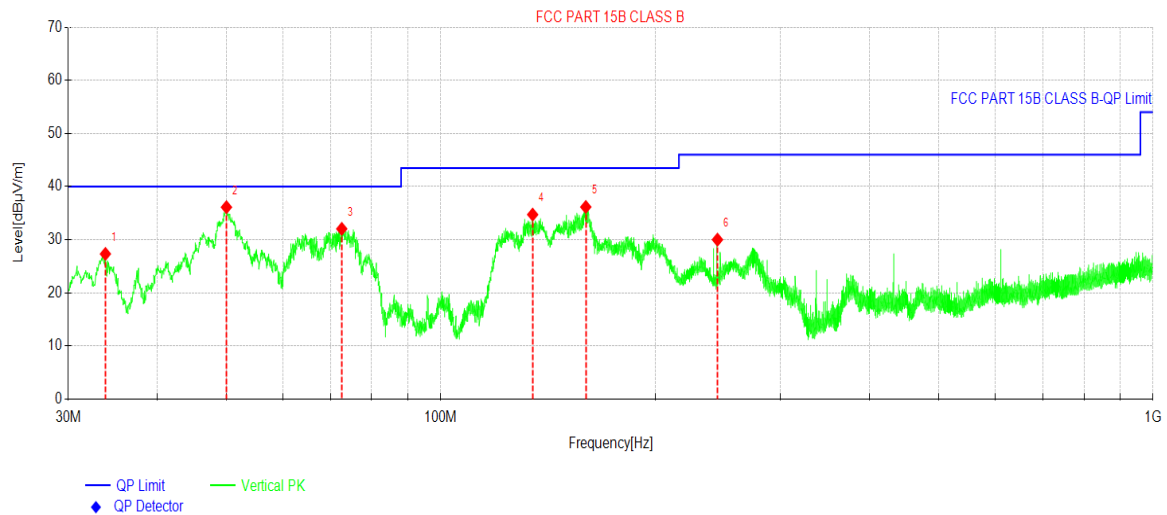


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	33.8317	43.63	-16.30	27.33	40.00	12.67	PK	Vertical
2	50.0315	48.72	-12.60	36.12	40.00	3.88	PK	Vertical
3	72.6336	49.95	-17.91	32.04	40.00	7.96	PK	Vertical
4	134.619	52.65	-17.92	34.73	43.50	8.77	PK	Vertical
5	159.841	53.58	-17.42	36.16	43.50	7.34	PK	Vertical
6	244.671	43.67	-13.66	30.01	46.00	15.99	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	Charging & Playing mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

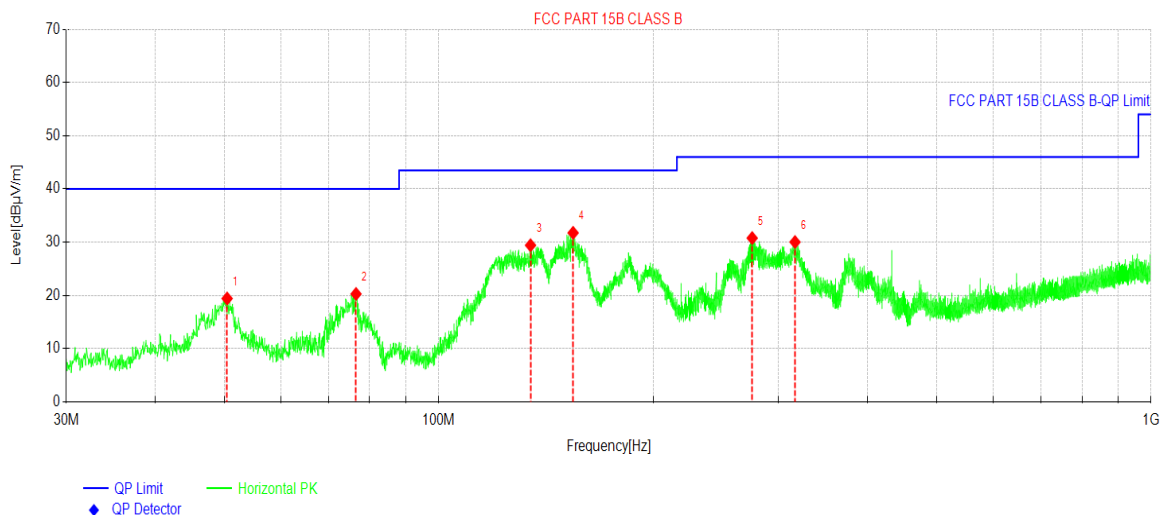


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	50.4680	32.18	-12.76	19.42	40.00	20.58	PK	Horizontal
2	76.5623	38.74	-18.47	20.27	40.00	19.73	PK	Horizontal
3	134.571	47.34	-17.92	29.42	43.50	14.08	PK	Horizontal
4	154.408	49.77	-18.02	31.75	43.50	11.75	PK	Horizontal
5	275.519	44.12	-13.35	30.77	46.00	15.23	PK	Horizontal
6	316.406	42.65	-12.62	30.03	46.00	15.97	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	FM mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

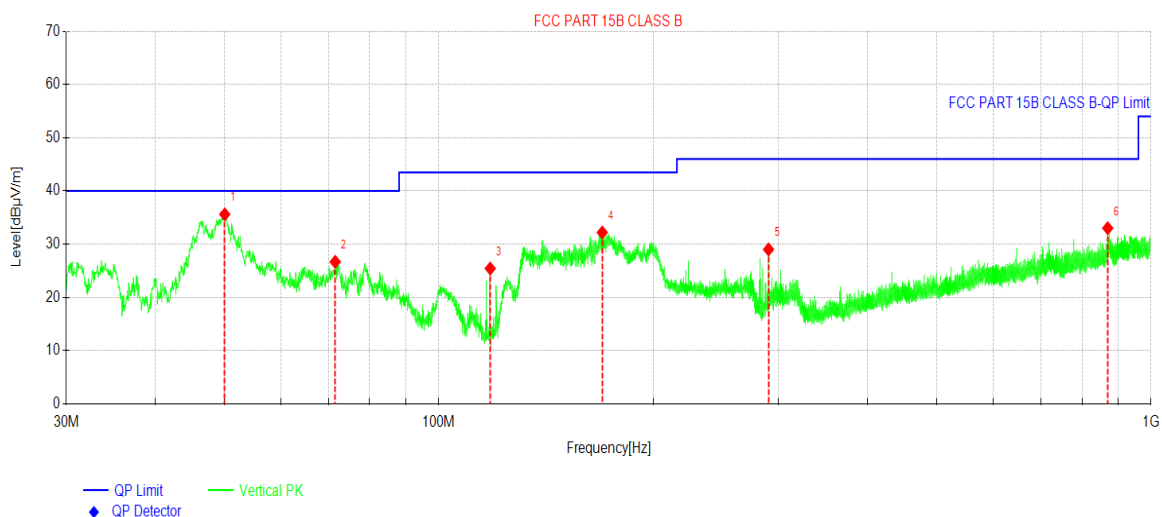


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	50.0800	20.00	15.60	35.60	40.00	4.40	PK	Vertical
2	71.5666	15.87	10.81	26.68	40.00	13.32	PK	Vertical
3	118.1289	13.21	12.22	25.43	43.50	18.07	PK	Vertical
4	169.6870	21.73	10.46	32.19	43.50	11.31	PK	Vertical
5	290.4580	14.24	14.77	29.01	46.00	16.99	PK	Vertical
6	869.4800	6.38	26.63	33.01	46.00	12.99	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	FM mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

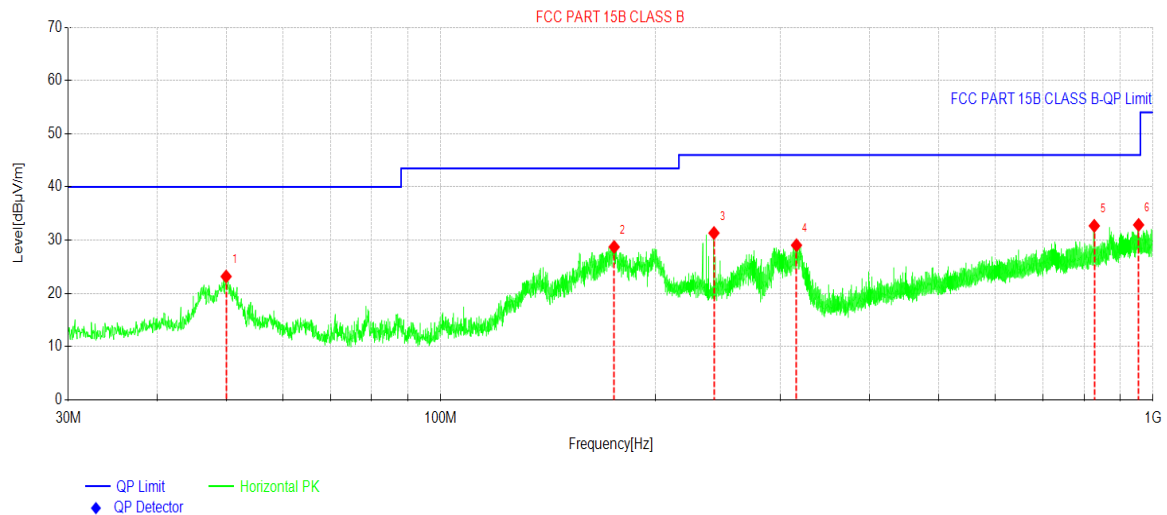


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	49.9830	7.56	15.62	23.18	40.00	16.82	PK	Horizontal
2	175.2163	17.59	11.13	28.72	43.50	14.78	PK	Horizontal
3	241.9071	16.87	14.47	31.34	46.00	14.66	PK	Horizontal
4	315.8733	13.43	15.62	29.05	46.00	16.95	PK	Horizontal
5	827.1859	6.89	25.80	32.69	46.00	13.31	PK	Horizontal
6	954.5532	4.79	28.08	32.87	46.00	13.13	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	Charging & GSM 850 mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

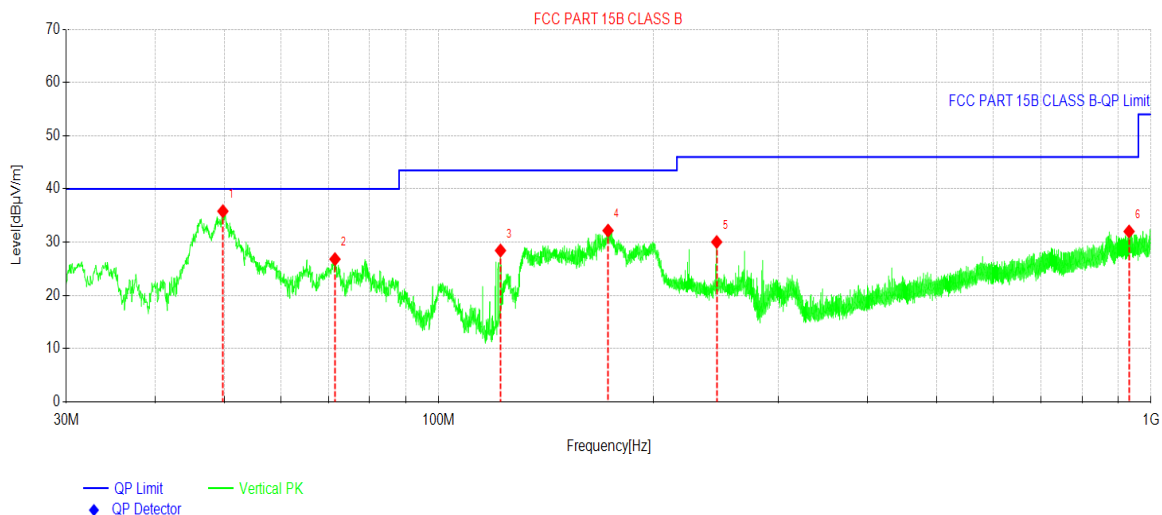


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	49.7890	20.22	15.59	35.81	40.00	4.19	PK	Vertical
2	71.5181	15.98	10.83	26.81	40.00	13.19	PK	Vertical
3	122.1061	16.78	11.65	28.43	43.50	15.07	PK	Vertical
4	172.8881	21.33	10.85	32.18	43.50	11.32	PK	Vertical
5	245.6418	15.37	14.66	30.03	46.00	15.97	PK	Vertical
6	931.6601	4.66	27.35	32.01	46.00	13.99	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	Charging & GSM 850 mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

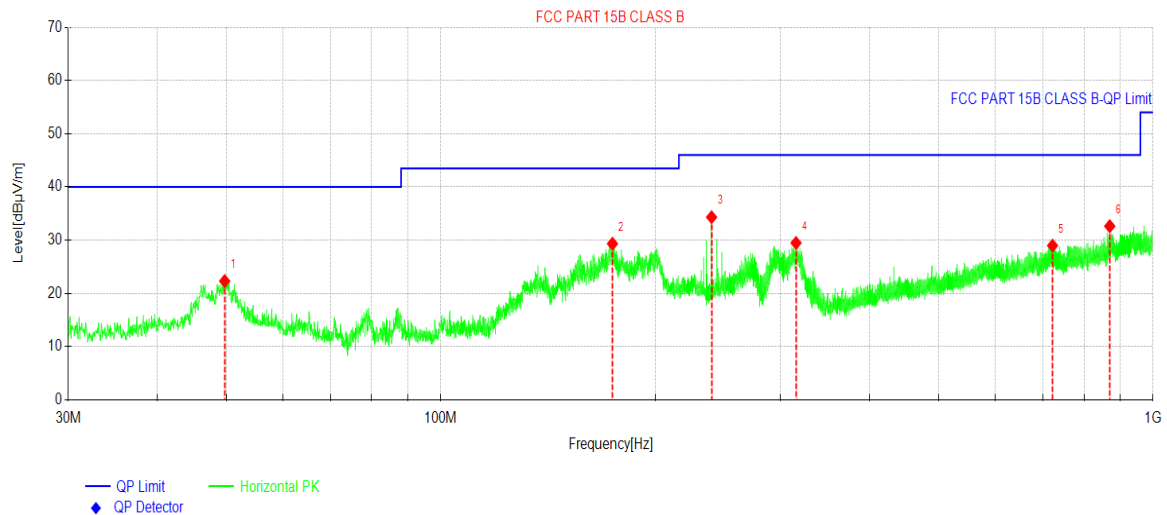

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	49.7405	6.73	15.59	22.32	40.00	17.68	PK	Horizontal
2	174.2462	18.34	11.00	29.34	43.50	14.16	PK	Horizontal
3	240.0640	19.96	14.36	34.32	46.00	11.68	PK	Horizontal
4	315.3883	13.84	15.64	29.48	46.00	16.52	PK	Horizontal
5	722.7601	4.82	24.16	28.98	46.00	17.02	PK	Horizontal
6	869.5285	5.99	26.64	32.63	46.00	13.37	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	Charging&Recording mode
Test Frequency:	1000 MHz ~ 12000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

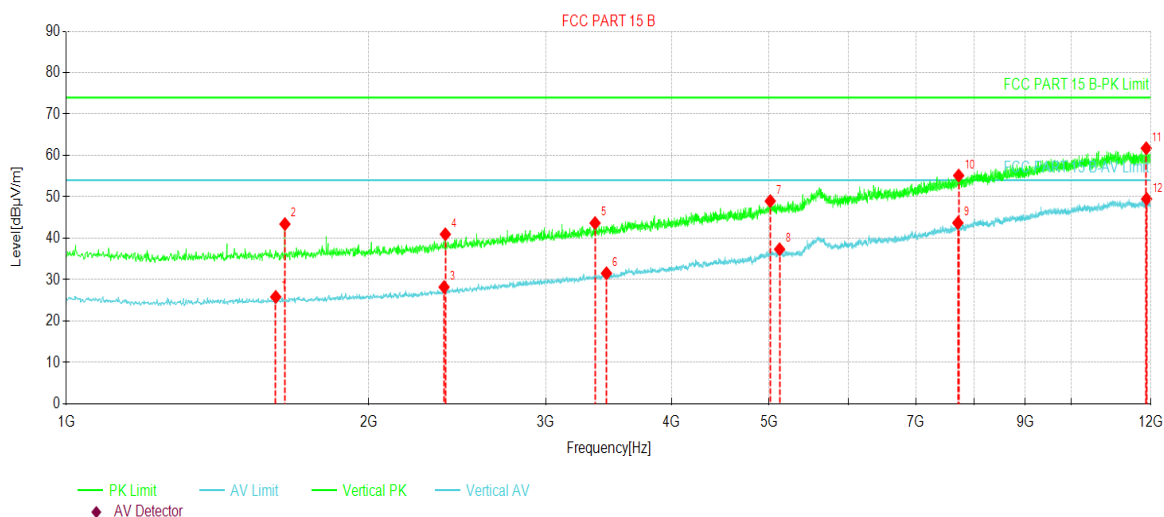


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1616.0000	47.66	25.83	-21.83	54.00	28.17	AV	Vertical
2	1650.3750	65.17	43.42	-21.75	74.00	30.58	PK	Vertical
3	2376.3750	47.89	28.22	-19.67	54.00	25.78	AV	Vertical
4	2383.2500	60.60	40.96	-19.64	74.00	33.04	PK	Vertical
5	3358.1250	59.78	43.67	-16.11	74.00	30.33	PK	Vertical
6	3447.5000	47.27	31.54	-15.73	54.00	22.46	AV	Vertical
7	5016.3750	57.77	48.98	-8.79	74.00	25.02	PK	Vertical
8	5125.0000	45.98	37.34	-8.64	54.00	16.66	AV	Vertical
9	7710.0000	45.03	43.71	-1.32	54.00	10.29	AV	Vertical
10	7723.7500	56.41	55.14	-1.27	74.00	18.86	PK	Vertical
11	11870.7500	56.98	61.73	4.75	74.00	12.27	PK	Vertical
12	11880.3750	44.74	49.49	4.75	54.00	4.51	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. Test Frequency up to 18GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Product Name:	SMART PHONE	Product Model:	S17Pro Sub
Test By:	Kiran Zeng	Test mode:	Charging&Recording mode
Test Frequency:	1000 MHz ~ 12000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

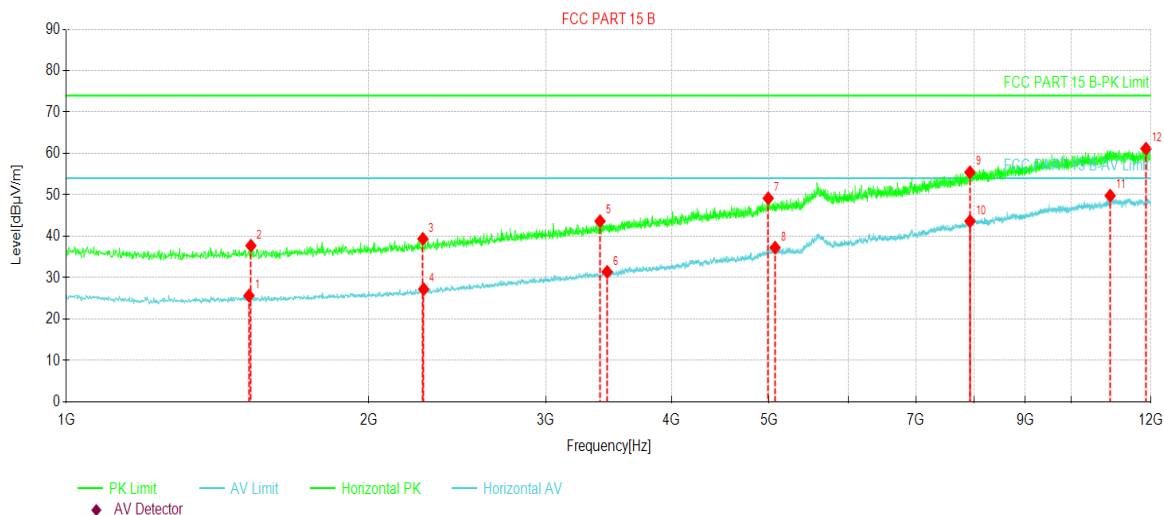

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1519.7500	47.62	25.66	-21.96	54.00	28.34	AV	Horizontal
2	1526.6250	59.66	37.71	-21.95	74.00	36.29	PK	Horizontal
3	2263.6250	59.58	39.37	-20.21	74.00	34.63	PK	Horizontal
4	2267.7500	47.41	27.22	-20.19	54.00	26.78	AV	Horizontal
5	3396.6250	59.63	43.65	-15.98	74.00	30.35	PK	Horizontal
6	3453.0000	47.11	31.40	-15.71	54.00	22.60	AV	Horizontal
7	4993.0000	58.02	49.16	-8.86	74.00	24.84	PK	Horizontal
8	5072.7500	45.96	37.25	-8.71	54.00	16.75	AV	Horizontal
9	7925.8750	56.08	55.44	-0.64	74.00	18.56	PK	Horizontal
10	7927.2500	44.28	43.64	-0.64	54.00	10.36	AV	Horizontal
11	10928.8750	45.19	49.79	4.60	54.00	4.21	AV	Horizontal
12	11863.8750	56.39	61.15	4.76	74.00	12.85	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. Test Frequency up to 18GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

-----End of report-----