



FCC TEST REPORT FOR

Lumistar (Shanghai) Robotics Technology Co., Ltd.

H1 Wristband Controller

Test Model: HYWW001

Prepared for : Lumistar (Shanghai) Robotics Technology Co., Ltd.
Address : Room 340, Building 1, No. 299 Zhongchen Road, Songjiang District, Shanghai

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 26, 2025
Number of tested samples : 2
Sample No. : A251222145-1, A251222145-2
Serial number : Prototype
Date of Test : December 26, 2025 ~ January 28, 2026
Date of Report : January 29, 2026



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**FCC TEST REPORT****FCC CFR 47 PART 15 F(15.519&15.521)****Report Reference No.** : **LCSA12225088EB****Date of Issue**..... : January 29, 2026**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address**..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China**Testing Location/ Procedure**..... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name**..... : **Lumistar (Shanghai) Robotics Technology Co., Ltd.****Address**..... : Room 340, Building 1, No. 299 Zhongchen Road, Songjiang District, Shanghai**Test Specification****Standard**..... : FCC CFR 47 PART 15F(15.519&15.521)**Test Report Form No.**..... : TRF-4-E-224 A/0**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF**..... : Dated 2022-08**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **H1 Wristband Controller****Trade Mark**..... : LUMISTAR**Test Model**..... : HYWW001**Ratings**..... : Please Refer to Page 6**Result** : **PASS****Compiled by:**

Diamond Lu/ Administrators

Supervised by:

Kevin Huang/ RF Manager

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**FCC -- TEST REPORT**

Test Report No. : LCSA12225088EB	<u>January 29, 2026</u> Date of issue
---	--

Test Model.....	: HYWW001
EUT.....	: H1 Wristband Controller
Applicant.....	: Lumistar (Shanghai) Robotics Technology Co., Ltd.
Address.....	: Room 340, Building 1, No. 299 Zhongchen Road, Songjiang District, Shanghai
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Lumistar (Shanghai) Robotics Technology Co., Ltd.
Address.....	: Room 340, Building 1, No. 299 Zhongchen Road, Songjiang District, Shanghai
Telephone.....	: /
Fax.....	: /
Factory.....	: TENMA PRECISION (SHENZHEN) CO., LTD.
Address.....	: 101, BUILDING D, NO. 2 NIKENG 3RD ROAD, XINLAN COMMUNITY, GUANLAN STREET, LONGHUA DISTRICT, SHENZHENCITY, GUANGDONG PROVINCE, CHINA
Telephone.....	: /
Fax.....	: /

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	January 29, 2026	Initial Issue	--



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	7
1.3 External I/O Cable	7
1.4 Description of Test Facility	7
1.5 Statement of the Measurement Uncertainty	7
1.6 Measurement Uncertainty	8
1.7 Description of Test Modes	8
2. TEST METHODOLOGY	9
2.1 EUT Configuration	9
2.2 EUT Exercise	9
2.3 General Test Procedures	9
2.4. Test Sample	9
3. SYSTEM TEST CONFIGURATION	10
3.1 Justification	10
3.2 EUT Exercise Software	10
3.3 Special Accessories	10
3.4 Block Diagram/Schematics	10
3.5 Equipment Modifications	10
3.6 Test Setup	10
4. SUMMARY OF TEST RESULTS	11
5. SUMMARY OF TEST EQUIPMENT	12
6. MEASUREMENT RESULTS	13
6.1. Transmitter Characteristics	13
6.2. Spurious Radiated Emissions	15
6.3. UWB Bandwidth	23
6.4. AC Power Line Conducted Emissions	25
6.5. Antenna Requirement	26
6.6. Peak Emissions within a 50 MHz Bandwidth	27
6.7. Radiated Emissions in GPS Bands	30
7. TEST SETUP PHOTOGRAPHS OF EUT	34
8. EXTERIOR PHOTOGRAPHS OF THE EUT	34
9. INTERIOR PHOTOGRAPHS OF THE EUT	34





1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	:	H1 Wristband Controller
Test Model	:	HYWW001
Ratings	:	Input: 5V $\overline{=}$ 1A Max Battery: 3.87V, 225mAh, 0.871Wh
Hardware Version	:	V1
Software Version	:	V1
Bluetooth	:	
Frequency Range	:	2402MHz-2480MHz
Bluetooth Channel Number	:	40 channels for Bluetooth V5.0 (DTS)
Bluetooth Channel Spacing	:	2MHz for Bluetooth V5.0 (DTS)
Bluetooth Modulation Type	:	GFSK for Bluetooth V5.0 (DTS)
Bluetooth Version	:	V5.0
Antenna Description	:	Ceramic Antenna, 3.12dBi(Max.)
UWB	:	
Frequency Range	:	7700MHz ~ 8300MHz
Channel Number	:	1
Channel Frequency	:	7978MHz
Modulation Type	:	BPM-BPSK
Antenna Description	:	Internal Antenna, 0.9dBi(Max.)

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.





1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
--	--	--

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfills CISPR 16-1-4 according to ANSI C63.10-2020 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.





1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)
Output power	1GHz-40GHz	±0.57dB	(1)
Power Spectral Density	1GHz-40GHz	±1.2dB	(1)
Occupied Channel Bandwidth	1GHz-40GHz	±5%	(1)
Conducted RF Spurious Emission	9kHz-40GHz	±1.80dB	(1)
Emissions in Restricted Bands	1GHz-40GHz	±2.47dB	(1)
Frequency Stability	1GHz-40GHz	±25Hz	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

The EUT works in the X-axis, Y-axis, Z-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)
UWB	7700MHz-8300MHz

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was determined to be TX.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was determined to be TX.





2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2020, FCC CFR PART 15F 15.519,15.521 and FCC CFR PART 15C 15.203,15.207,15.209.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the normal operating mode for Hopping Numbers and Dwell Time test and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.519,15.521 under the FCC Rules Part 15 Subpart F,15.203,15.207,15.209 nder the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions(N/A)

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.1.1 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 of ANSI C63.10-2020.

2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A251222145-1)	Engineer sample – continuous transmit
Sample 2(A251222145-2)	Normal sample – Intermittent transmit





3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmits condition.

3.2 EUT Exercise Software

The system was configured for testing in a continuous transmits condition

3.3 Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.





4. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Test Sample	Result
15.519	Transmitter Characteristics	Sample 1	Compliant
15.209, 15.519(c)	Spurious Radiated Emissions	Sample 1	Compliant
		Sample 2	
15.207	Power Line Conducted	Not Applicable	Not Applicable
15.203	Antenna Requirement	Sample 2	Compliant
15.519 (d)	Radiated Emissions in GPS Bands	Sample 1	Compliant
15.519 (b)	UWB Bandwidth	Sample 1	Compliant
15.519 (e)	Peak Emissions within a 50 MHz Bandwidth	Sample 1	Compliant





5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2025-05-22	2026-05-21
2	Power Sensor	R&S	NRP-Z81	100458	2025-05-22	2026-05-21
3	Power Sensor	R&S	U2021	10057	2025-05-22	2026-05-21
4	Test Software	MWRFTest	MTS 8310	/	N/A	N/A
5	RF Control Unit	MWRFTest	MW100-RFCB	/	2025-11-07	2026-11-06
6	MXA Signal Analyzer	Agilent	N9020A	MY53300304	2025-05-22	2026-05-21
7	DC Power Supply	Agilent	E3642A	N/A	2025-09-27	2026-09-26
8	EMI Test Software	Farad	EZ-EMC	Ver. EMC-CON 3A1.1+	N/A	N/A
9	3m Semi Anechoic Chamber	Maorui	966	/	2023-10-12	2026-10-11
10	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2024-07-13	2027-07-12
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2024-07-13	2027-07-12
15	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2024-07-30	2027-07-29
16	EMI Test Receiver	R&S	ESR 7	101181	2025-05-22	2026-05-21
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2025-05-22	2026-05-21
18	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2025-09-27	2026-09-26
19	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2025-09-27	2026-09-26
20	6dB Attenuator	/	100W/6dB	1172040	2025-05-22	2026-05-21
21	3dB Attenuator	/	2N-3dB	/	2025-09-28	2026-09-27
22	EMI Test Receiver	R&S	ESPI	101940	2025-05-22	2026-05-21
23	Artificial Mains	R&S	ENV216	101479	2025-05-23	2026-05-22
24	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2025-05-22	2026-05-21
25	EMI Test Software	Farad	EZ-EMC	Ver. EMC-CON 3A1.1+	N/A	N/A
26	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A
27	Pulse Limiter	R&S	ESH3-Z2	102750	2025-05-23	2026-05-22



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



6. MEASUREMENT RESULTS


6.1. Transmitter Characteristics

6.1.1 Limit

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

6.1.2. Test result:

Emissions of the EUT, only at the beginning with associated receiver (Normal mode)

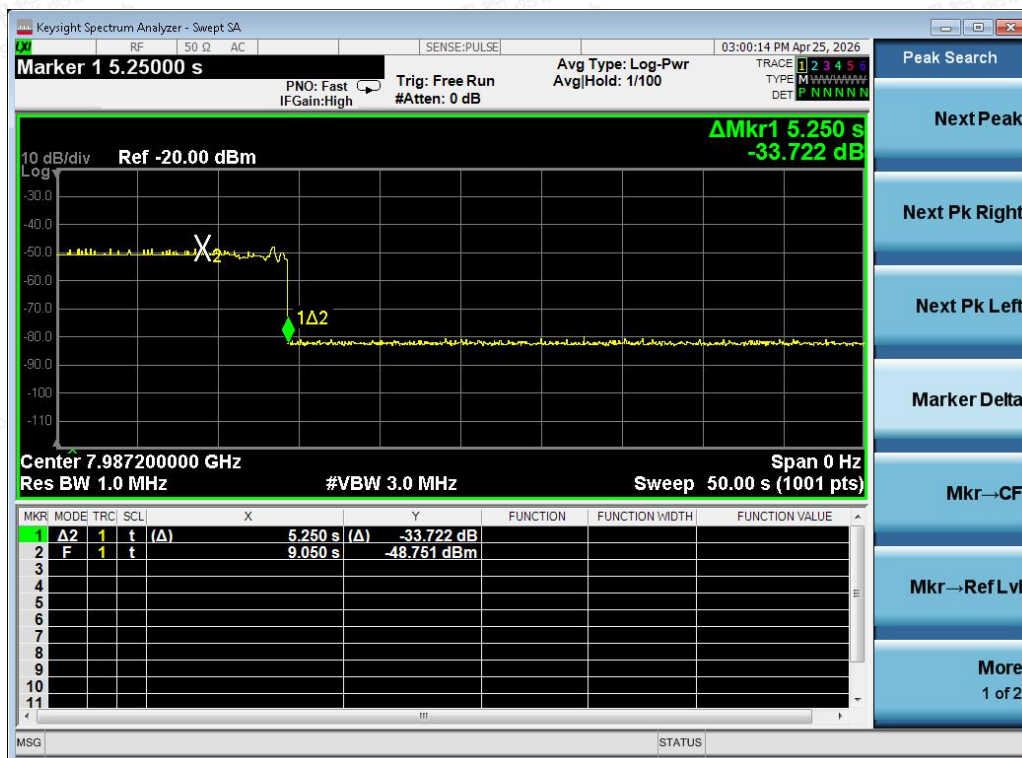


Marker X2: indicates the time when the associated receiver is switched off.

Marker 1Δ2: EUT and the associated receiver end UWB link.

→Approximately 5.25 seconds after the associated receiver is switched off, the EUT stops the transmission.

Result : PASS

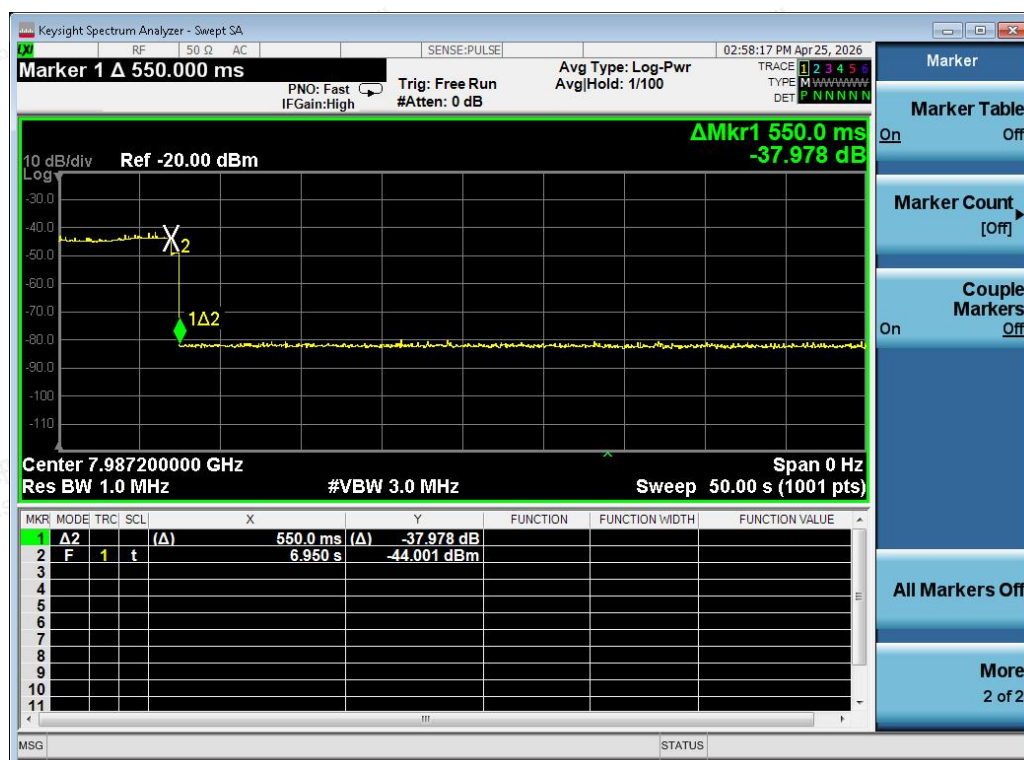

**EUT ends the UWB link (Normal mode)**

Marker X2: indicates the time when the EUT is switched off.

Marker 1Δ2: EUT and the associated receiver end UWB link.

→ Approximately 6.95 seconds after the associated receiver is switched off, the EUT stops the transmission.

Result : PASS





6.2. Spurious Radiated Emissions

6.2.1. Standard Applicable

47 CFR Part 15F Section 15.519(c)&47 CFR Part 15F Section 15.209;

6.2.2. Limit

The radiated limits of FCC 15.209 are shown below. The limits specified are at 3 meters. The limits are quasi-peak for emissions below 1 GHz.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The radiated limits of FCC 15.519c are shown below. The limits specified are at 3 meters.

Frequency (MHz)	EIRP in dBm	E-Field(dBuV/m)	Distance(m)
960-1610	-75.3	20.00	3
1610-1990	-63.3	32.00	3
1990-3100	-61.3	34.00	3
3100-10600	-41.3	54.00	3
Above 10600	-61.3	34.00	3

Note: Relate EIRP to field strength at a specified measurement distance of 3 m:

$$E(\text{dB}\mu\text{V/m}) = \text{EIRP}(\text{dBm}) + 95.3$$

6.2.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna height is 1.0 meter.

--- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.





3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 0.5 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected





emissions that were found during the premeasurements with Peak and Average detector.


--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

Measuring Instruments and Setting


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

6.2.4. Test Setup Layout

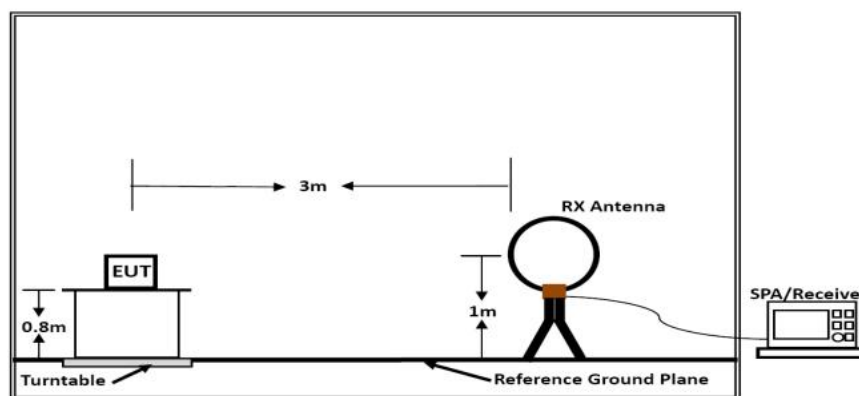


Below 30MHz

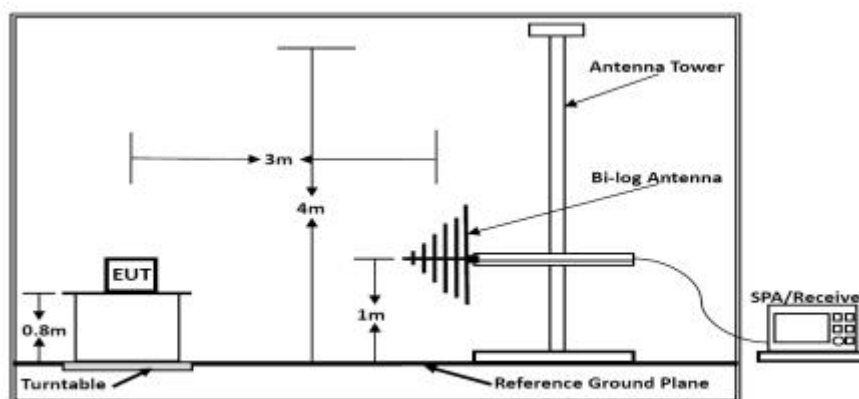

Below 1GHz



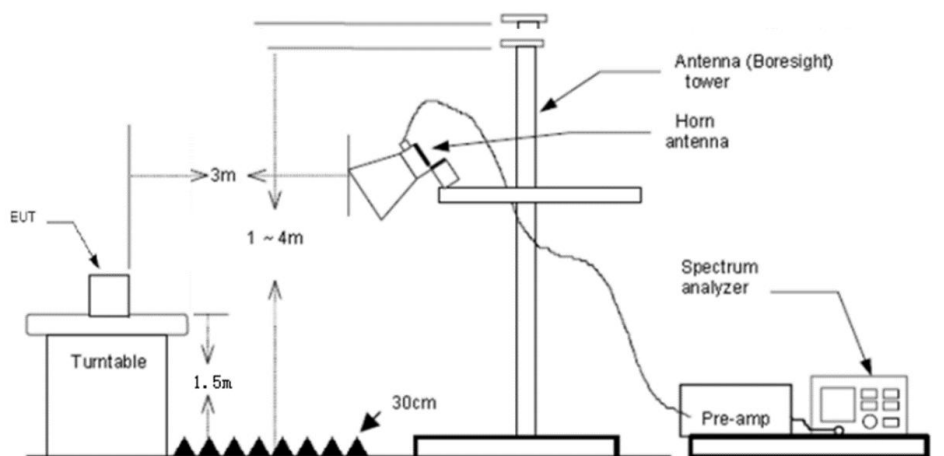

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

6.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.2.6. Test Result

Temperature	23.8℃	Humidity	52.1%
Test Engineer	Jerry Chu	Configurations	

Freq. (MHz)	Level (dBUV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions for 30MHz below which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor.


6.2.7. Results of Radiated Emissions (30 MHz~1 GHz)

Temperature	23.8℃	Humidity	52.1%
Test Engineer	Jerry Chu	Configurations	

PASS.

The test data please refer to following page.

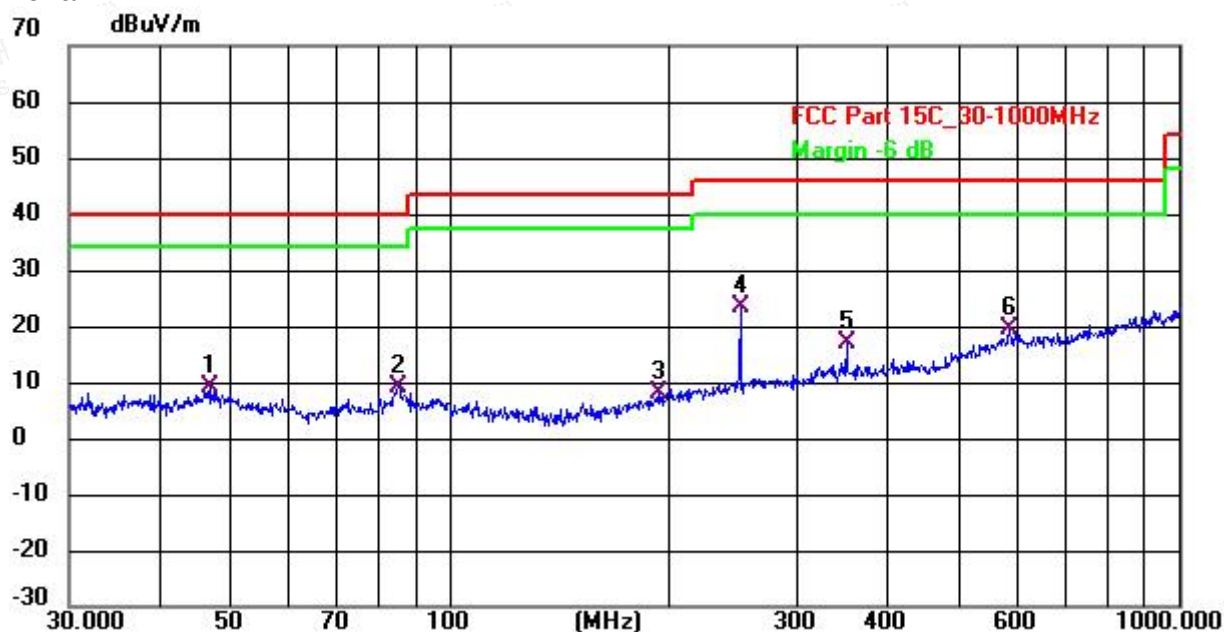


**Horizontal**

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		46.9947	26.59	-17.57	9.02	40.00	-30.98	QP
2		84.9993	30.17	-21.16	9.01	40.00	-30.99	QP
3		193.7727	28.18	-20.29	7.89	43.50	-35.61	QP
4	*	250.3011	41.26	-17.84	23.42	46.00	-22.58	QP
5		350.4767	31.02	-14.14	16.88	46.00	-29.12	QP
6		584.7894	29.06	-9.73	19.33	46.00	-26.67	QP





Vertical

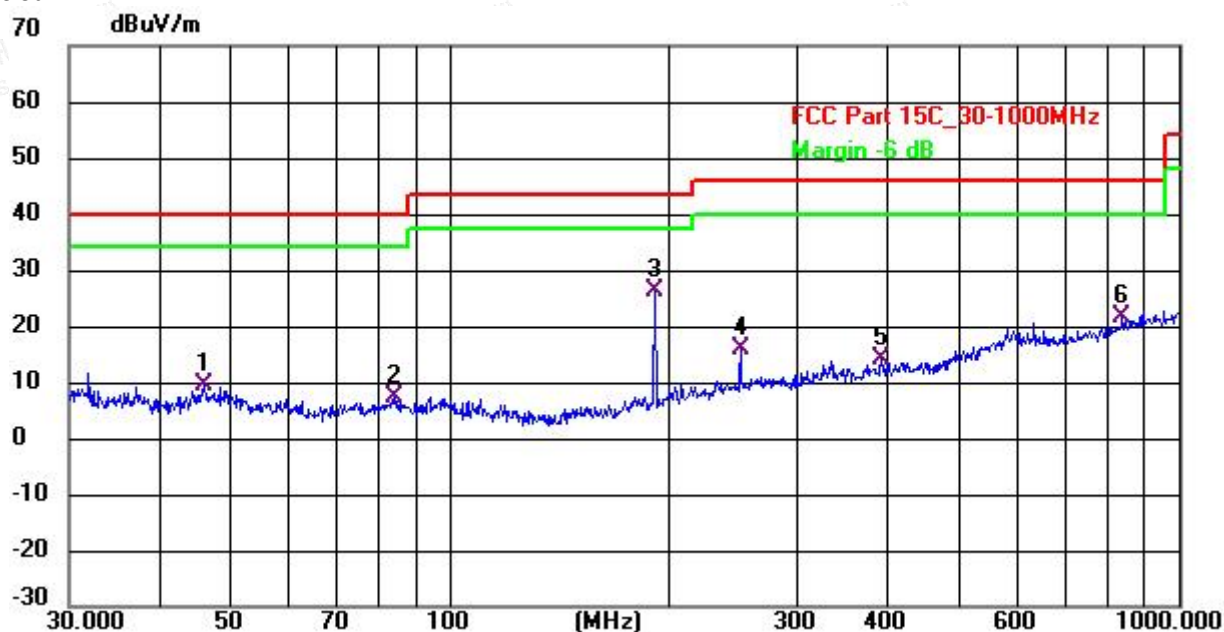

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1		46.0162	27.51	-18.12	9.39	40.00	-30.61	QP
2		84.1100	28.03	-20.85	7.18	40.00	-32.82	QP
3	*	191.0738	45.53	-19.26	26.27	43.50	-17.23	QP
4		250.3011	32.30	-16.45	15.85	46.00	-30.15	QP
5		390.7225	28.72	-14.65	14.07	46.00	-31.93	QP
6		836.2443	29.35	-7.74	21.61	46.00	-24.39	QP

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report UWB mode (8000MHz).
- 2). Emission level (dBuV/m) = $20 \log$ Emission level ($\mu\text{V/m}$).
- 3). Level = Reading + Factor, Margin = Level - Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



5.8.8. Results for Radiated Emissions (960MHz – 40GHz)

Note: All the modes have been tested and recorded worst mode in the report.

Channel 7978 MHz-Horizontal

Freq MHz	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
1164.1	14.42	20.00	-5.58	Average	Horizontal
1732.5	25.88	32.00	-6.12	Average	Horizontal
3052.2	26.77	34.00	-7.23	Average	Horizontal
9631.2	40.88	54.00	-13.12	Average	Horizontal
15633.4	27.26	34.00	-6.74	Average	Horizontal

Channel 7978 MHz-Vertical

Freq MHz	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
1164.1	15.22	20.00	-4.78	Average	Vertical
1732.5	26.34	32.00	-5.66	Average	Vertical
3052.3	25.49	34.00	-8.51	Average	Vertical
9631.3	42.33	54.00	-11.67	Average	Vertical
15633.4	28.57	34.00	-5.43	Average	Vertical

Notes:

- 1). Measuring frequencies from 9 KHz ~ 40 GHz, at least have 20dB margin found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz ~ 40 GHz were made with an instrument using average detector mode.
- 3). Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Scan from 9kHz to 40GHz, The disturbance above 18GHz was very low, and the above emissions were the highest point could be found when testing, so only the above emissions had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

Factor = Antenna Factor + Cable Loss - Preamp Factor is considered.





6.3. UWB Bandwidth

6.3.1. Standard Applicable

47 CFR Part 15F Section 15.519 (b);


6.3.2. Limit

A UWB transmitter is defined as an intentional radiator that, at any point in time, has a fractional bandwidth equal or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth. The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M . Center frequency. The center frequency, f_C , equals $(f_H + f_L)/2$. Fractional bandwidth. The fractional bandwidth equals $2(f_H - f_L)/(f_H + f_L)$. Per section 15.519(b), the UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10600 MHz.

6.3.3. Test Procedures

The UWB bandwidth was measured with a spectrum analyzer while the EUT was operating in continuous transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency. The analyzer was set to resolution bandwidth of 1 MHz and a video bandwidth of 3 MHz.

6.3.4. Test Setup Layout

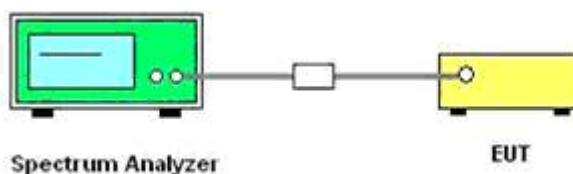

6.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

6.3.6. Test Result

Temperature	23.5°C	Humidity	52.2%
Test Engineer	Jerry Chu	Atmospheric Pressure	1010 mbar

Frequency (MHz)	FL (MHz)	FH (MHz)	10dB Bandwidth(MHz)	Limit (MHz)	Results
7978	7705	8251	546	3100 MHz -10600 MHz	PASS



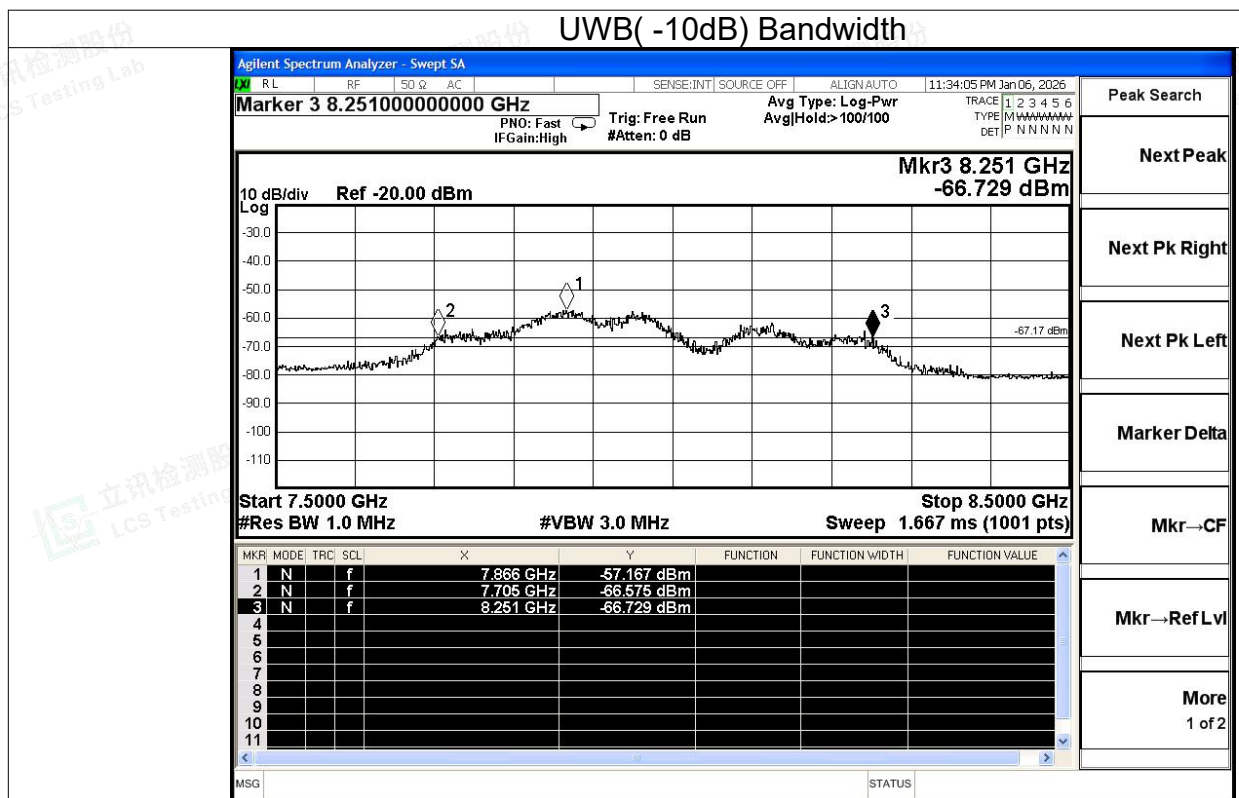



6.4. AC Power Line Conducted Emissions


6.4.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.4.2 Block Diagram of Test Setup

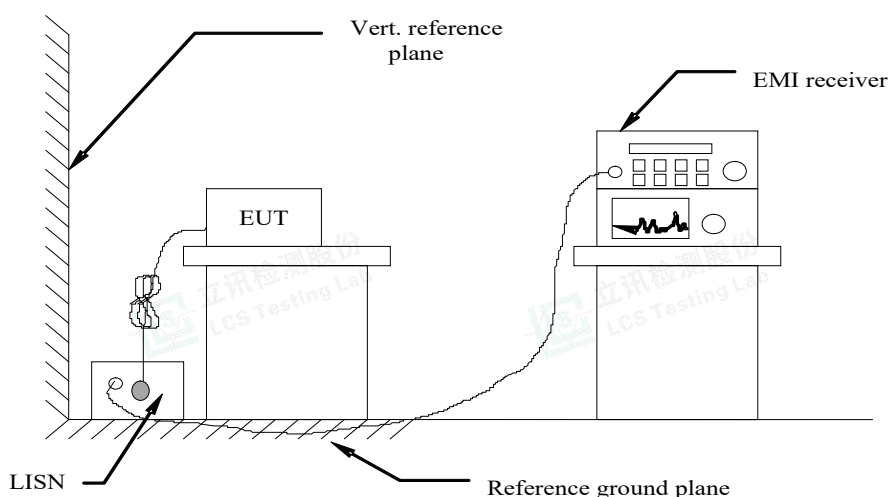

6.4.3 Test Results

Not Applicable.





6.5. Antenna Requirement

6.5.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.5.2 Antenna Connected Construction

6.5.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.5.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 0.9dBi(Max), and the antenna is Internal Antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details, meet 15.203 antenna requirement.





6.6. Peak Emissions within a 50 MHz Bandwidth

6.6.1. Standard Applicable

47 CFR Part 15F Section 15.519 (e);


6.6.2. Limit

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP. The EUT was evaluated to determine compliance with FCC 15.519(e) following the procedures described in FCC Section 15.521.

6.3.3. Test Procedures

The EUT was placed on a non-conductive table 1.5 meters above the ground plane. The table was centered on a rotating turntable at a distance of 3 meter from the measurement antenna. The measurements made over the intentionally radiating frequency range of the EUT, from 3100 MHz to 10600 MHz, were maximized using a spectrum analyzer with peak detector capabilities. A spectrum analyzer was used for the final measurement utilizing a peak detector at the frequency with the largest amplitude. The spectrum analyzer did not support the prescribed resolution bandwidth of 50 MHz. However, when a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in 47 CFR Part 15, Subpart F. The resolution bandwidth for the measurement was set to 8 MHz. The measurement was centered on the frequency at which the highest radiated emission occurred, fM. The video bandwidth was 8 MHz. Since a resolution bandwidth other than 50 MHz was used, the peak EIRP limit has to be adjusted by the resolution bandwidth ratio of $20 \log (RBW/50)$ dB, where RBW is the resolution bandwidth used for the measurement expressed in MHz.

6.6.4. Test Setup Layout

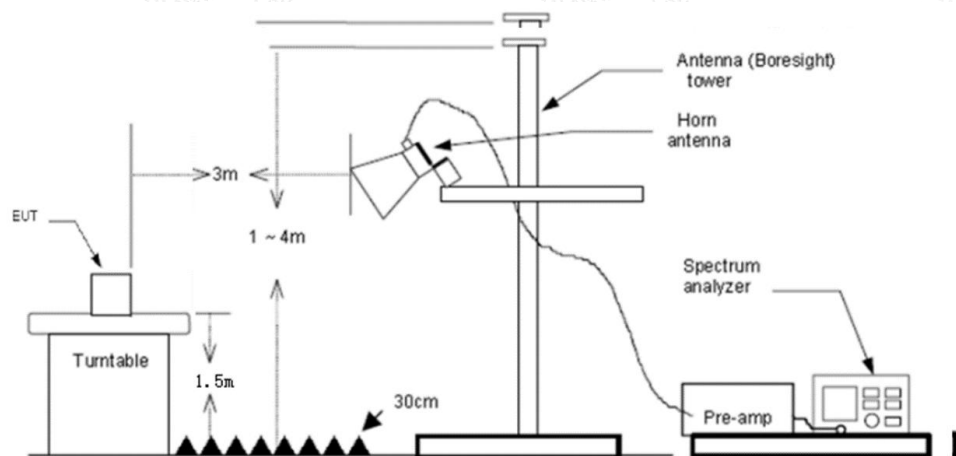

6.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

6.6.6. Test Result

Temperature	23.9℃	Humidity	52.1%
Test Engineer	Jerry Chu	Atmospheric Pressure	1010 mbar



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Frequency Range in MHz	Limit EIRP in dBm (within 50 MHz)	calculated Fieldstrength at 3 m in dBμV/m
3100~10600	0	95.3


Frequency Range in MHz	Calculated Fieldstrength at 3m in dBμV/m	EIRP dBm/8MHz (Note1)	EIRP dBm/50MHz (Note2)	Pol/Phase
3100~10600	63.49	-31.81	-15.89	Horizontal
3100~10600	60.26	-35.04	-19.12	Vertical

Note1: According procedures for measuring **ultra-wideband devices**, **10.3.9 Determination of EIRP**
EIRP(dBm) = E(dBμV/m) – 95.3 at a specified measurement distance of 3 m

Note 2: According to §15.521(g) If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed.

Test Plot as follows


Note: With the reference level offset of -9.54 dB the measurement is referenced to the calculated limit at 3m.

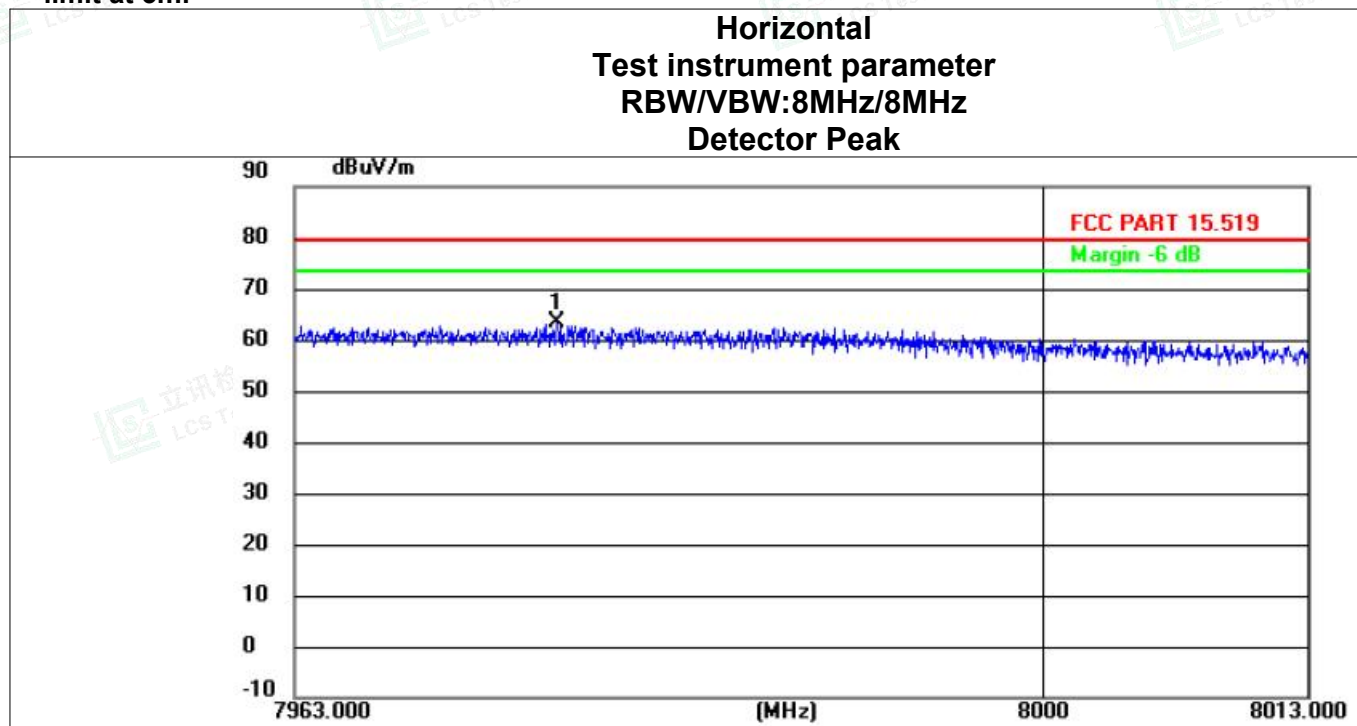



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	7975.9500	60.41	3.08	63.49	79.38	-15.89	peak

Vertical
Test instrument parameter
RBW/VBW:8MHz/8MHz
Detector Peak

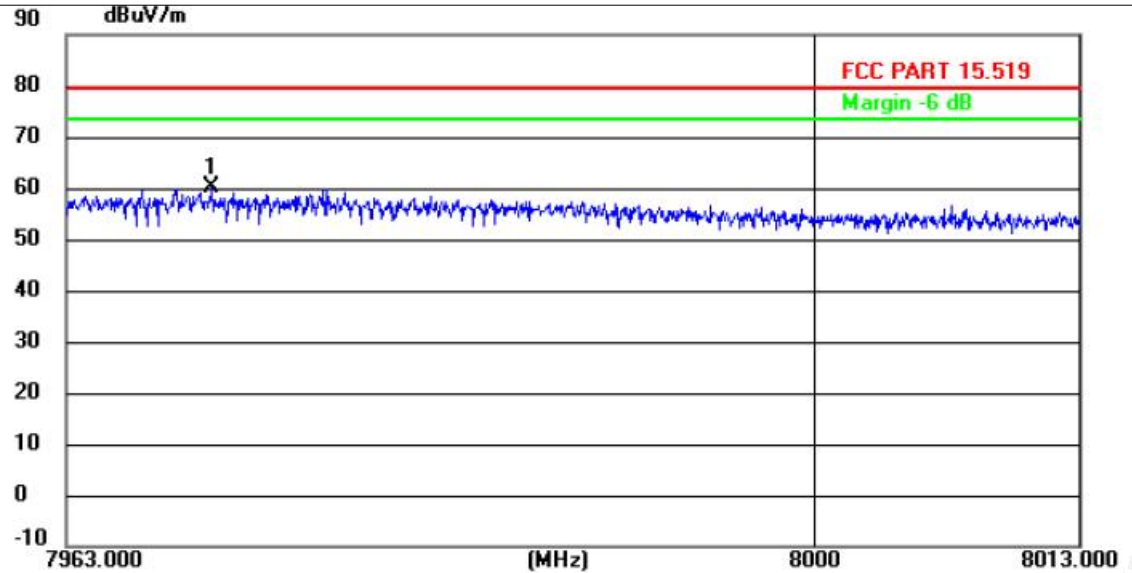

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	7970.2000	57.24	3.02	60.26	79.38	-19.12	peak





6.7. Radiated Emissions in GPS Bands

6.7.1. Standard Applicable

47 CFR Part 15F Section 15.519 (d);

6.7.2. Limit

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:


Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

Frequency Range in MHz	EIRP in dBm	calculated Fieldstrength at 3 m in dB μ V/m
1164-1240	-85.3	10
1559-1610	-85.3	10

6.3.3. Test Procedures

The EUT was placed on a non-conductive table 1.5 meters above the ground plane. The table was centered on a rotating turntable at a distance of 3 meters from the measurement antenna. The measurements made over the frequency range from 1164 MHz to 1240 MHz and from 1559 MHz to 1610 MHz were maximized using a spectrum analyzer with RMS detector capabilities. A RBW of 10 kHz and VBW of 10 kHz with a suitable averaging time were used for these measurements.

6.7.4. Test Setup Layout

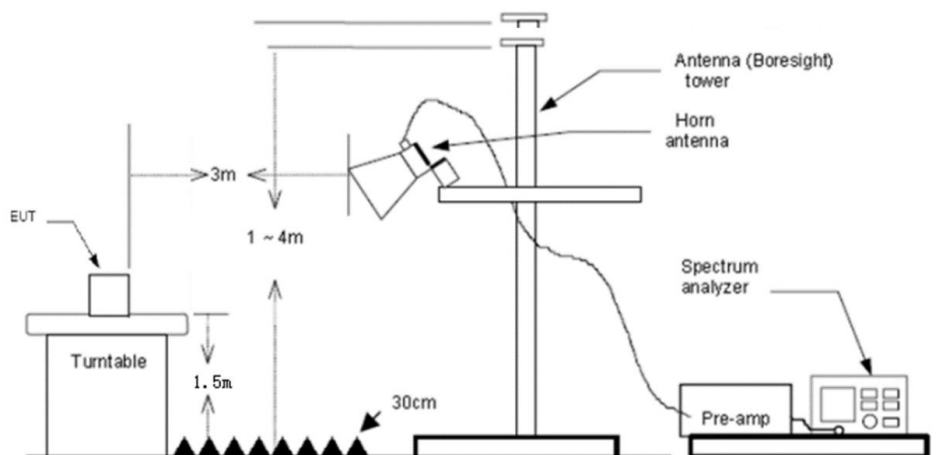

6.7.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.






6.7.6. Test Result

Temperature	23.9℃	Humidity	52.1%
Test Engineer	Jerry Chu	Atmospheric Pressure	1010 mbar

RBW/VBW:10KHz/10KHz

Detector: RMS

Frequency Range 1164~1240 MHz RBW=10KHz/VBW=10KHz-Horizontal

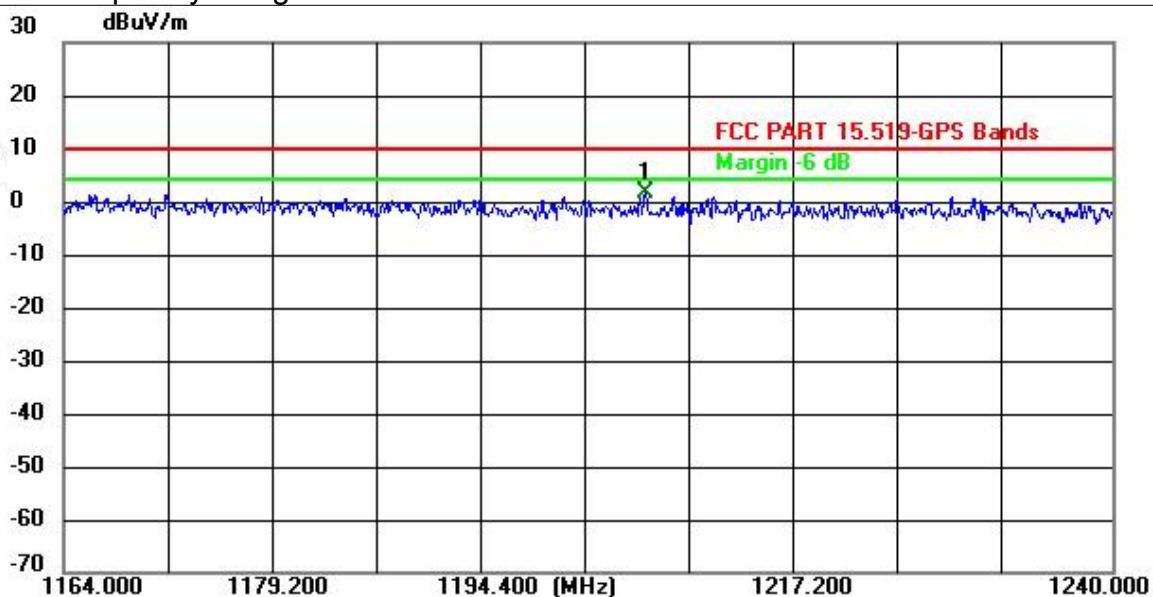


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	1206.1800	16.65	-15.20	1.45	10.00	-8.55	AVG

Frequency Range 1164~1240 MHz RBW=10KHz/VBW=10KHz-Vertical




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

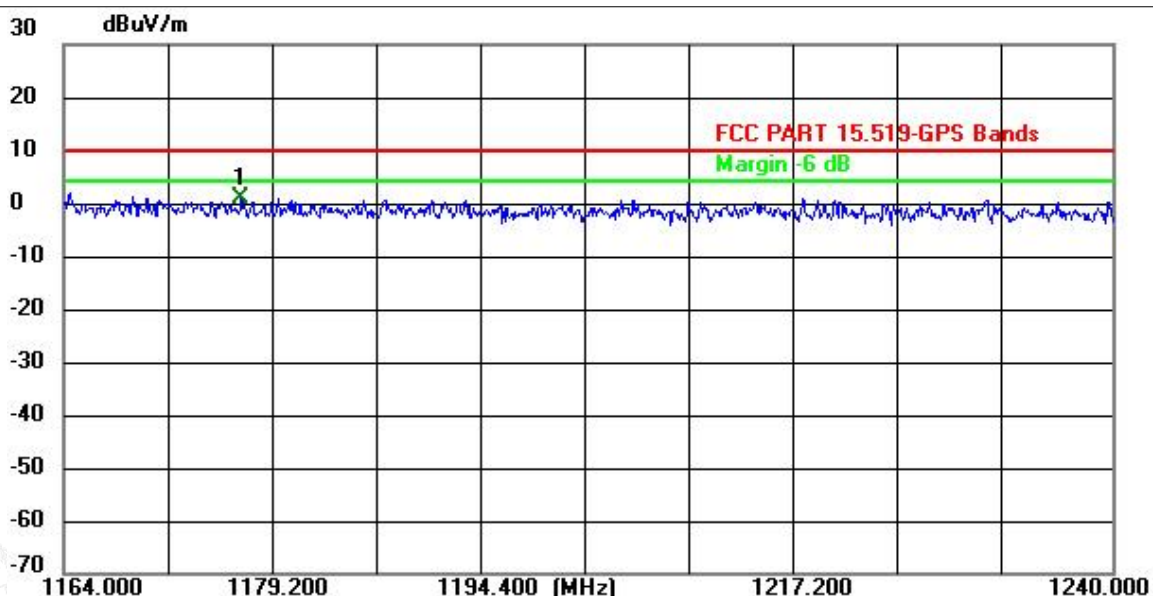

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	1176.8440	16.24	-15.24	1.00	10.00	-9.00	AVG


Frequency Range 1559~1610MHz RBW=10KHz/VBW=10KHz-Horizontal

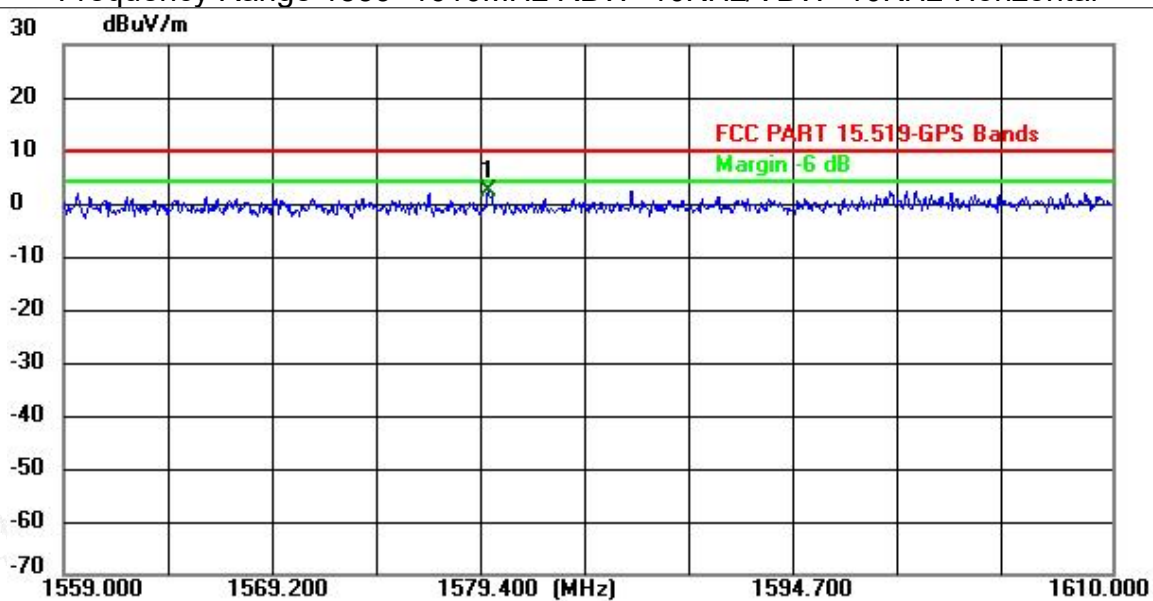

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	1579.6550	17.09	-14.67	2.42	10.00	-7.58	AVG

Frequency Range 1559~1610MHz RBW=10KHz/VBW=10KHz- Vertical



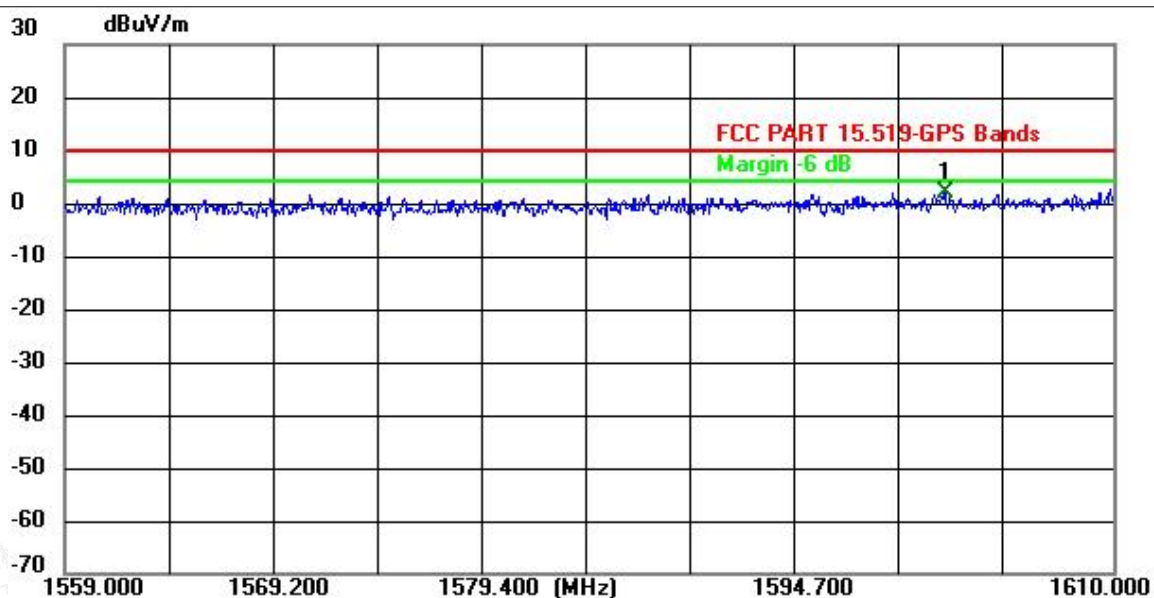

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	1601.8400	16.60	-14.61	1.99	10.00	-8.01	AVG





7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----

