

1.6X0.8X0.8 (mm) WiFi/Bluetooth Ceramic Chip Antenna

(YF1608B1) Engineering Specification

1. Product Number

YF 1608 D1 P 2G45

1 2 3 4 5



(1)Product Type	Chip Antenna
(2)Size Code	1.6x0.8x0.8mm
(3)Type Code	D1
(4)Packing	Plastic Packaging
(5)Frequency	2.45GHz

2. Feature

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : Amy Designed by : Andy Checked by : Simon Approved by : Liu Honggang

TITLE: 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification

DOCUMENT
NO.

YF1608D1P2G45

REV.
A

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

Yingfeng chip antenna series are specially designed for WiFi/Bluetooth applications. Based on yingfeng proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications (50 x 40 mm² ground plane)

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		1.6x0.8x0.8	mm
Working Frequency		2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polarization		Linear Polarization	
Gain	Peak	2.5 (typical)	dBi
	Efficiency	75 (typical)	%



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : Amy Designed by : Andy Checked by : Simon Approved by : Liu Hong gang

TITLE: 1.6x 0.8 x0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification


DOCUMENT NO.

YF1608D1P2G45


REV.
A

5-2. Return Loss & VSWR

Return Loss (S_{11})

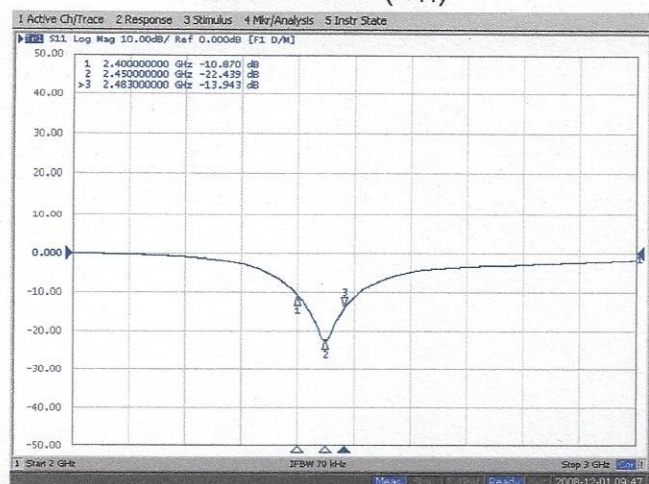

VSWR(S_{11})

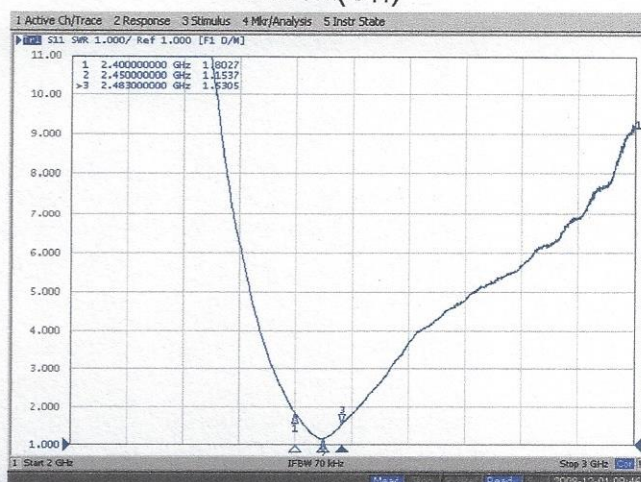


6. Antenna Dimensions & Test Board (unit: mm)

a. Antenna Dimensions


Applications

1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications

Dimensions (Unit: mm)



(Top View)



(Bottom View)



(Side View)

No.	Terminal Name
1	Feeding/GND
2	GND/Feeding

Symbols	L	W	T	A
Dimensions	1.60 ± 0.20	0.80 ± 0.20	0.80 ± 0.20	0.30 ± 0.10

Unit: mm



深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by: Amy Designed by: Andy Checked by: Simon Approved by: Liudonggang

TITLE: 1.6x 0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification





DOCUMENT NO.

YF1608D1P2G45

REV.
A

7. Radiation Pattern (50 x 40 mm² ground plane)

7-1. 3D Gain Pattern @ 2442 MHz

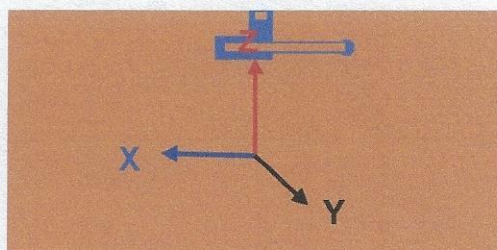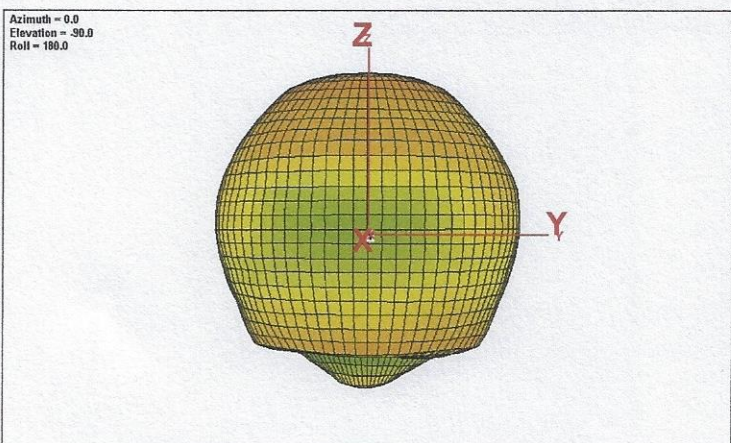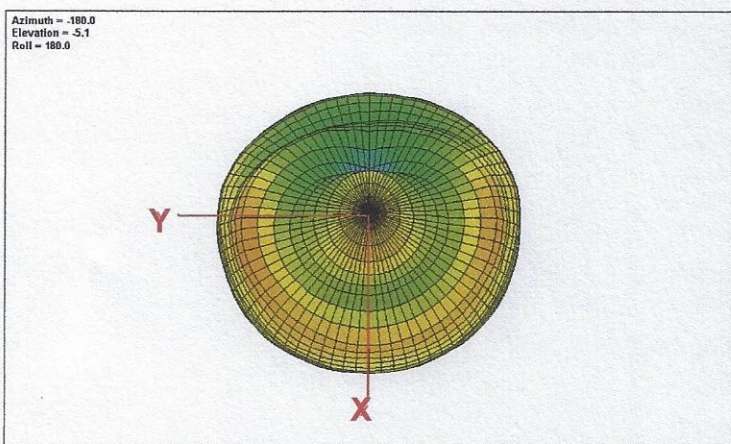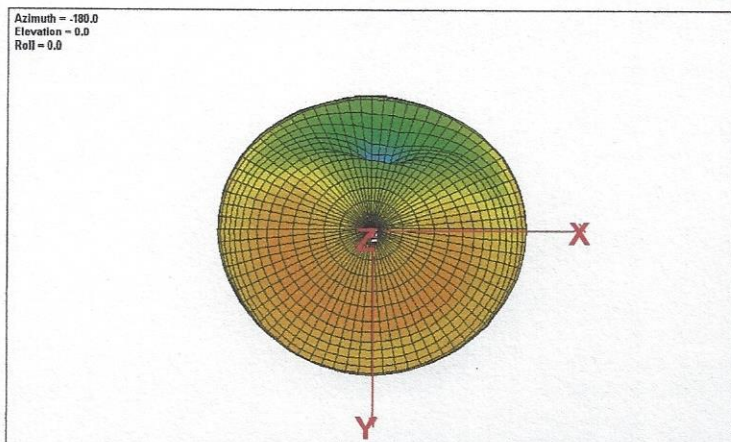

深圳市迎丰天线技术有限公司

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by: Amy

Designed by: Andy

Checked by: Simon

Approved by: Hu Jiaqiang

TITLE: 1.6x 0.8 x 0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification

DOCUMENT NO.

YF1608D1P2G45


REV.

A

7-2. 3D Efficiency Table

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency (dB)	-1.4	-1.0	-0.9	-0.7	-0.7	-0.8	-0.9	-1.1	-1.2	-1.3	-1.4
Efficiency (%)	72.8	73.7	74.3	74.4	75.5	75.0	74.0	73.6	73.1	72.6	71.5
Gain (dBi)	2.1	2.2	2.3	2.4	2.5	2.5	2.4	1.8	1.7	1.6	1.4

7-3. 3D Efficiency vs. Frequency

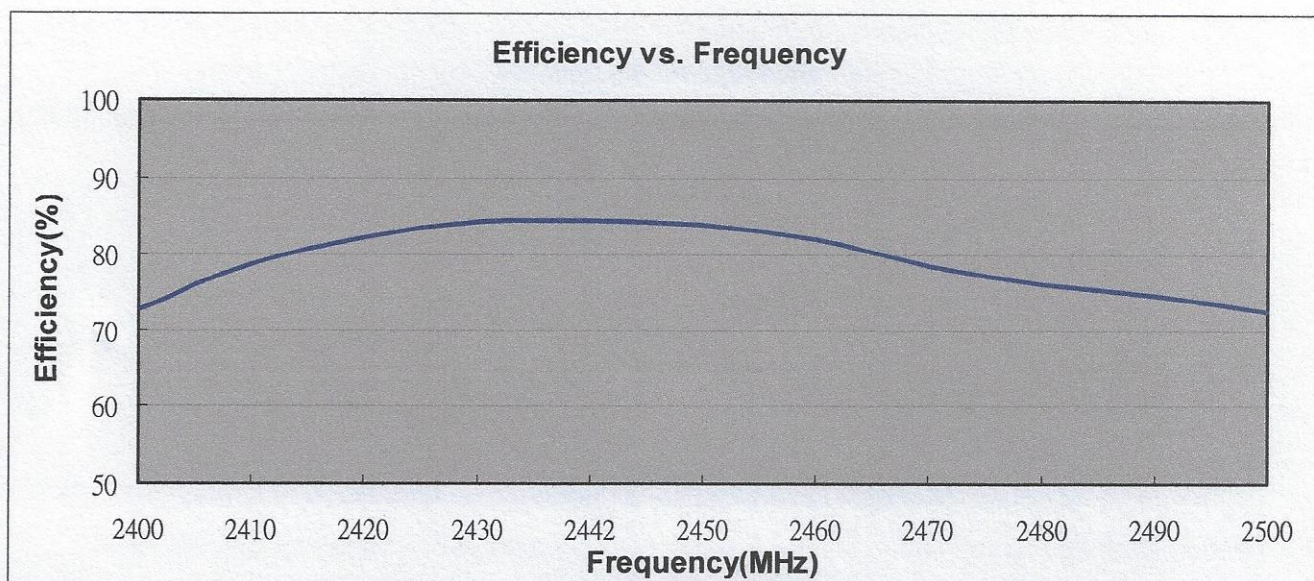

8. Layout Guide

a. Solder Land Pattern:

Land pattern for soldering (gray marking areas) is as shown below. Depending on Customer's requirement, matching circuit as shown below is also recommended.



深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by: *Amy* Designed by: *Andy* Checked by: *Simon* Approved by: *Hing-ong gong*



TITLE: 1.6x 0.8x0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification

DOCUMENT NO.

YF1608D1P2G45

REV.
A

Evaluation Board and Matching Circuits

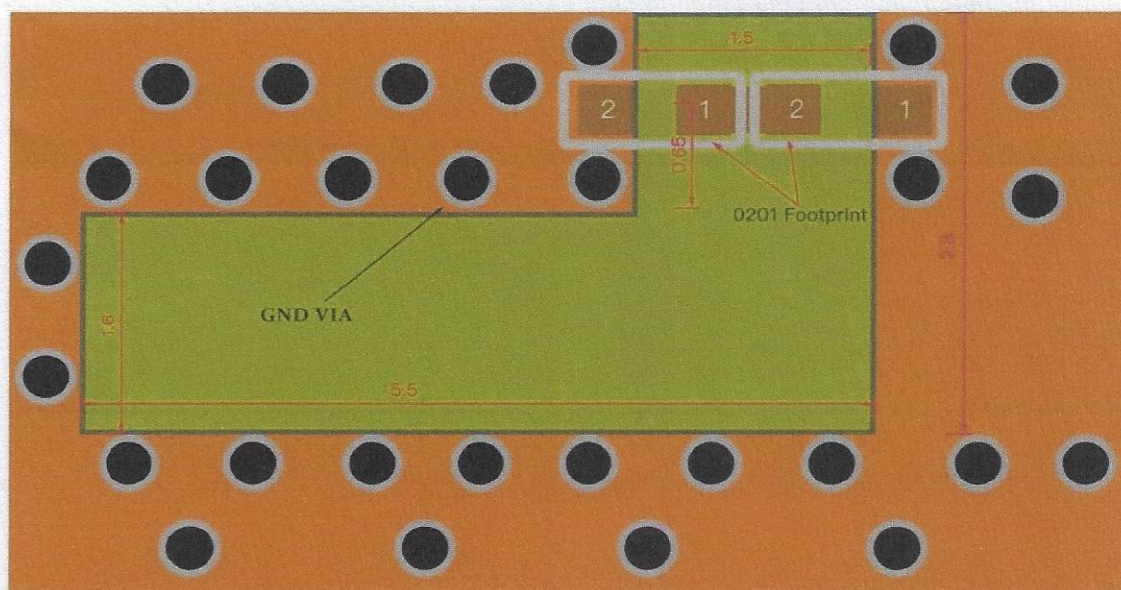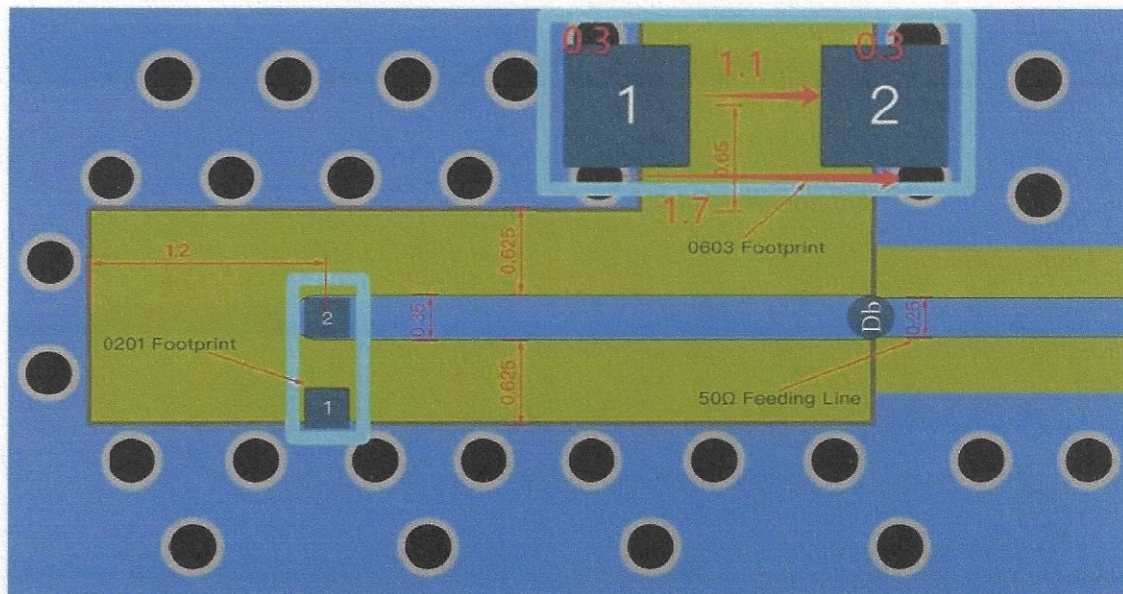

深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD


Prepared by: Amy Designed by: Andy Checked by: Simon Approved by: Huorong Gao

TITLE: 1.6x0.8x0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification

DOCUMENT NO.

YF1608D1P2G45


REV.
A

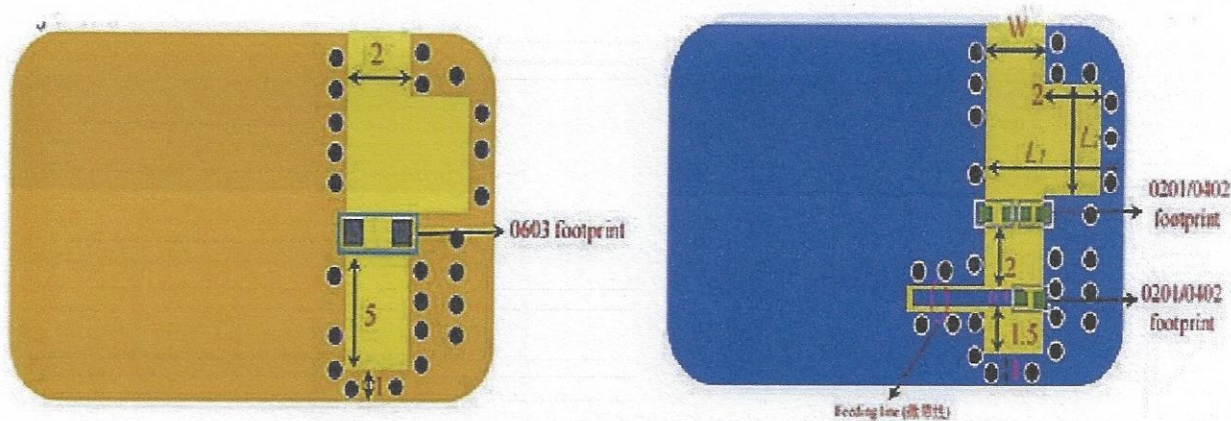

Bottom View

Unit : mm

c. Fine tuning element vs. Center frequency

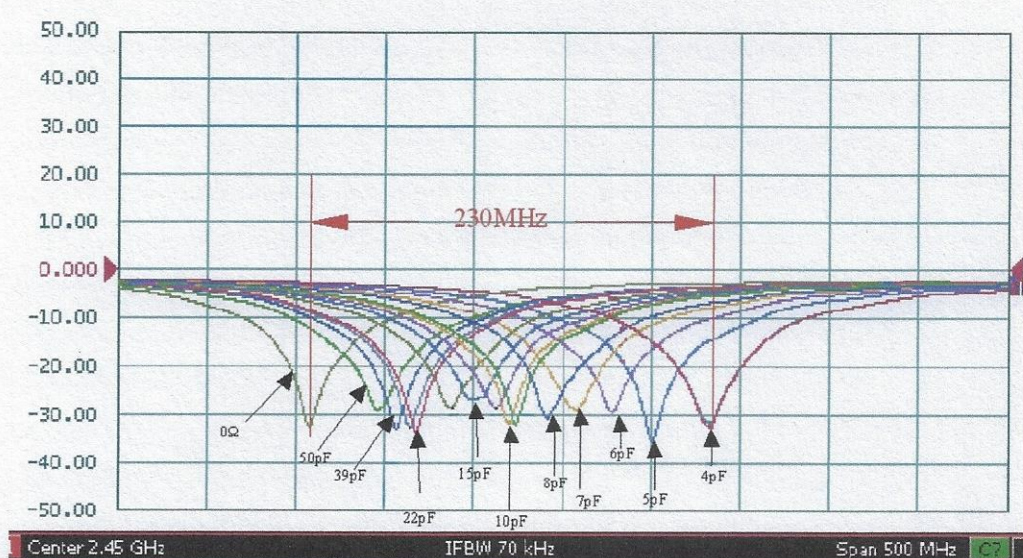

深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : Amy Designed by : Andy Checked by : Simon Approved by : Linronggang

TITLE: 1.6x 0.8x0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification


DOCUMENT NO.

YF1608D1P2G45

REV.
A

9. Soldering Conditions

a. Typical Soldering Profile for Lead-free Process

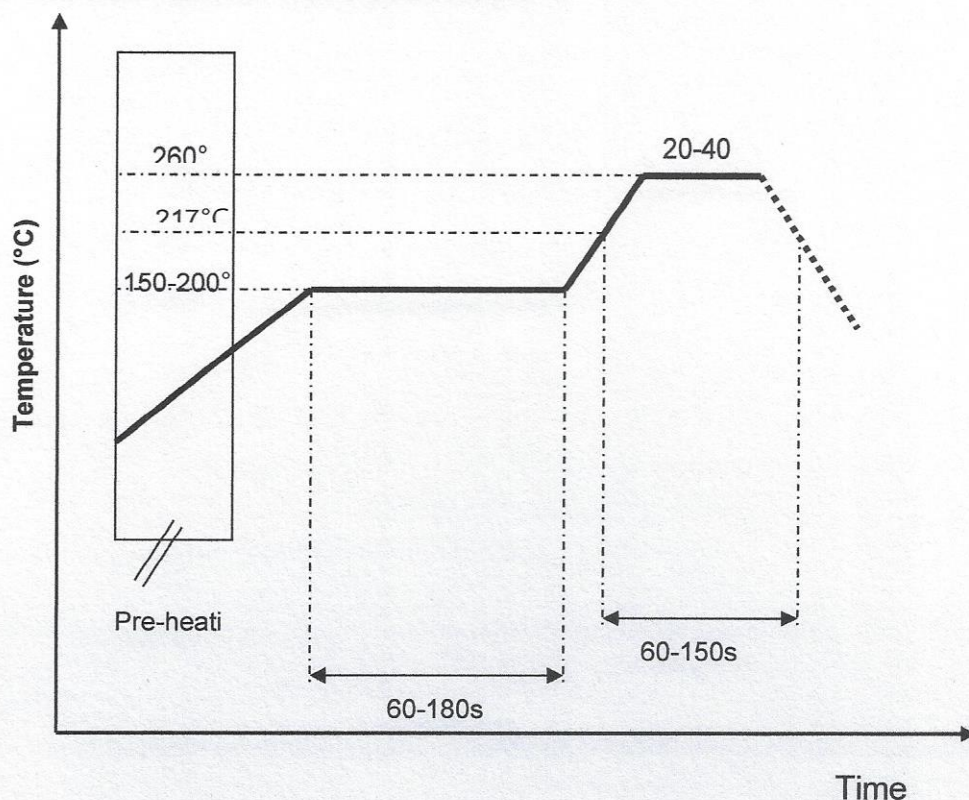

Packing

- (1) Quantity/Reel: 4000 pcs/Reel
- (2) Plastic tape:



深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by: *Andy* Designed by: *Andy* Checked by: *Simon* Approved by: *fire long gang*


TITLE: 1.6x 0.8 x 0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification

DOCUMENT NO.

YF1608D1P2G45

REV.
A


Dimensions of paper taping

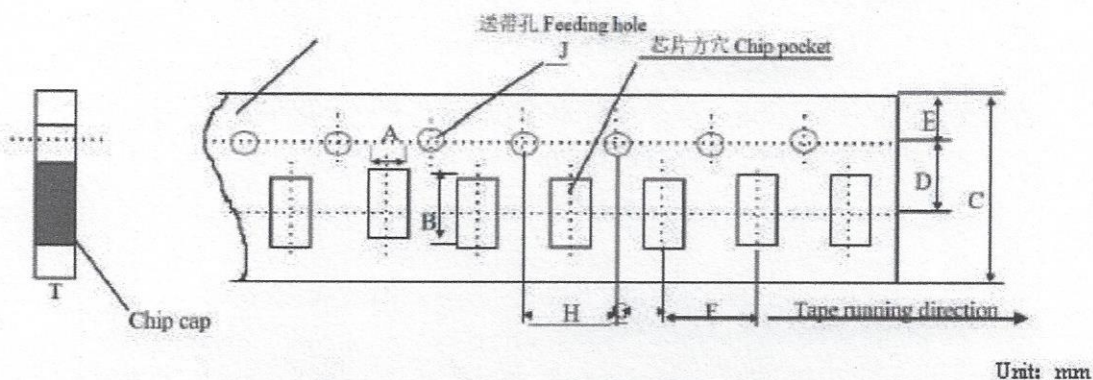

代号 Code 纸带规格 papersize	A	B	C	D*	E	F	G*	H	J	T
尺寸	1.10 ±0.10	1.90 ±0.10	8.00 ±0.10	3.50 ±0.05	1.75 ±0.10	4.00 ±0.10	2.00 ±0.10	4.00 ±0.10	1.50 0+0.10	1.10 Max

Reel (4000 pcs/Reel)

EMBOSED TAPING

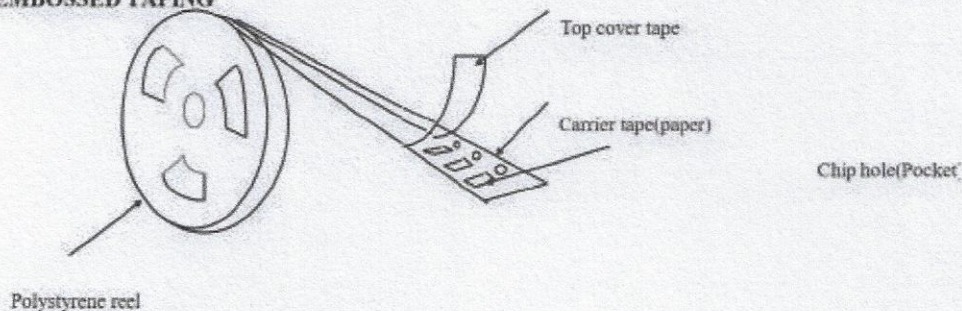

Storage Period

The guaranteed period for solderability is 6 months (Under deliver package condition).
Temperature: 5~40°C /Relative Humidity: 20~70%



深圳市迎丰天线技术有限公司
SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by: Amy Designed by: Andy Checked by: Simon Approved by: Linrong gang

TITLE: 1.6x 0.8x 0.8(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF1608B1) Engineering Specification

DOCUMENT NO.

YF1608D1P2G45

REV.
A