

Appendix A of data


A1.Maximum Peak Conducted Output Power

Test Result


Modulation	Packet Type	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	Result
GFSK	DH5	0	0.93	1.24	≤21	PASS
		39	1.76	1.50		PASS
		78	1.27	1.34		PASS
π/4DQPSK	2-DH5	0	-0.22	0.95		PASS
		39	1.10	1.29		PASS
		78	0.73	1.18		PASS
8DPSK	3-DH5	0	-0.02	0.99		PASS
		39	1.61	1.45		PASS
		78	1.94	1.56		PASS

Test Graphs




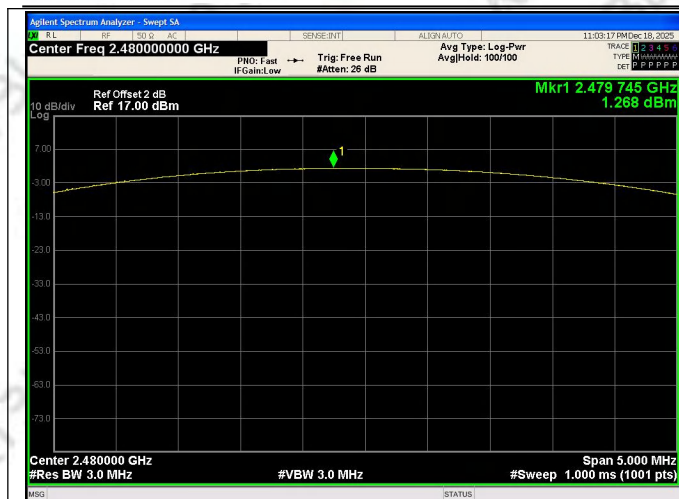


Peak Output Power
GFSK_Channel 78

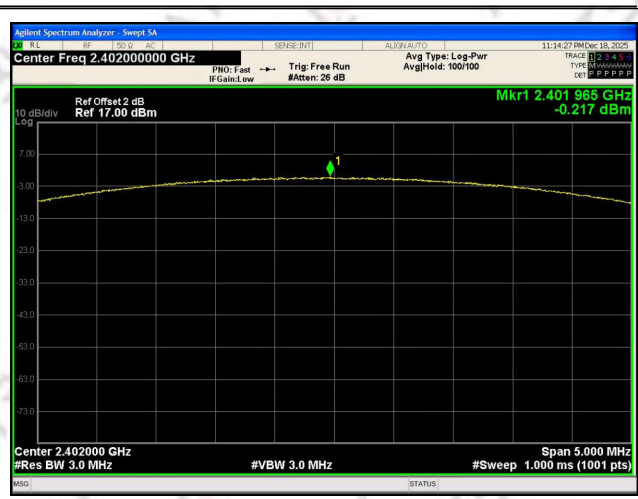


Peak Output Power
 $\pi/4$ DQPSK_Channel 0

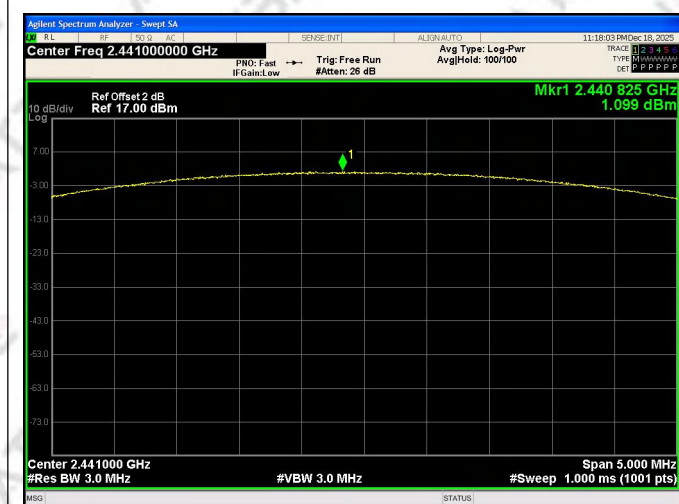


Peak Output Power
 $\pi/4$ DQPSK_Channel 39

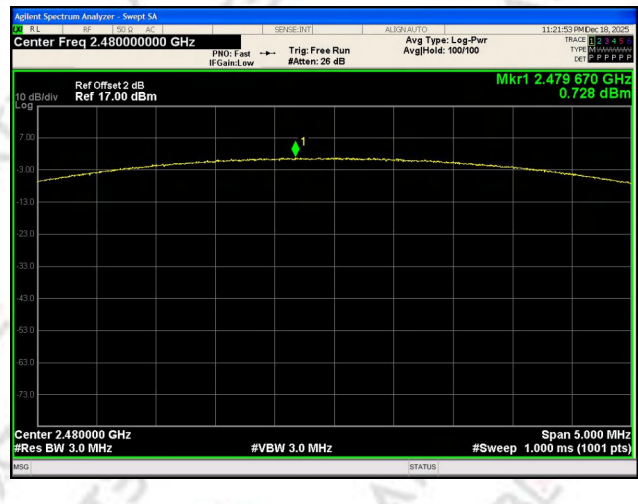


Peak Output Power
 $\pi/4$ DQPSK_Channel 78

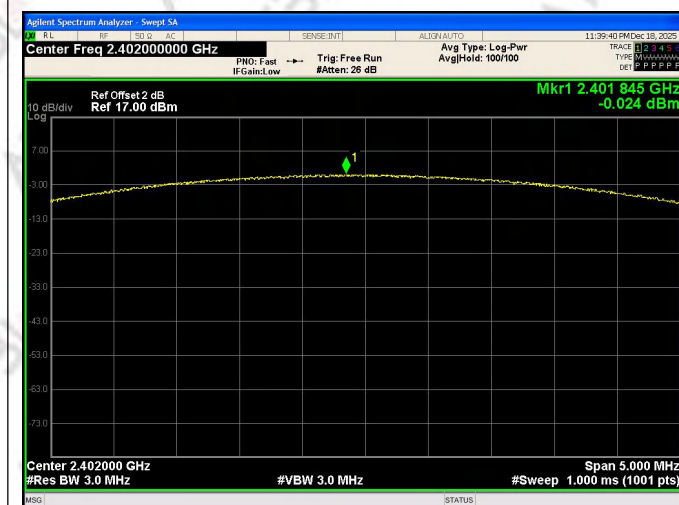

Peak Output Power
8DPSK_Channel 0

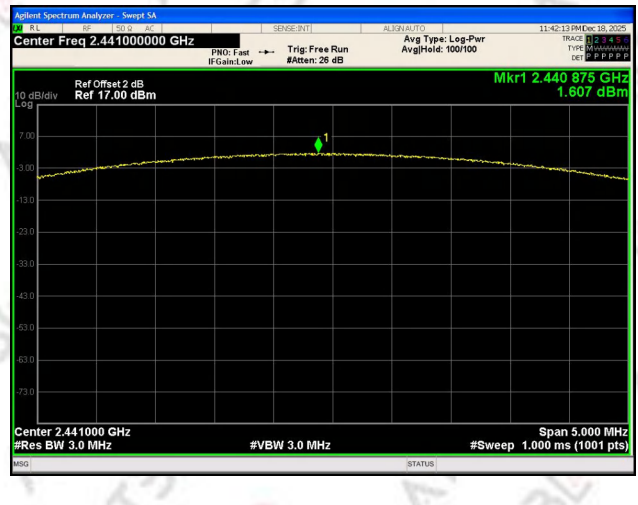

Peak Output Power
8DPSK_Channel 39

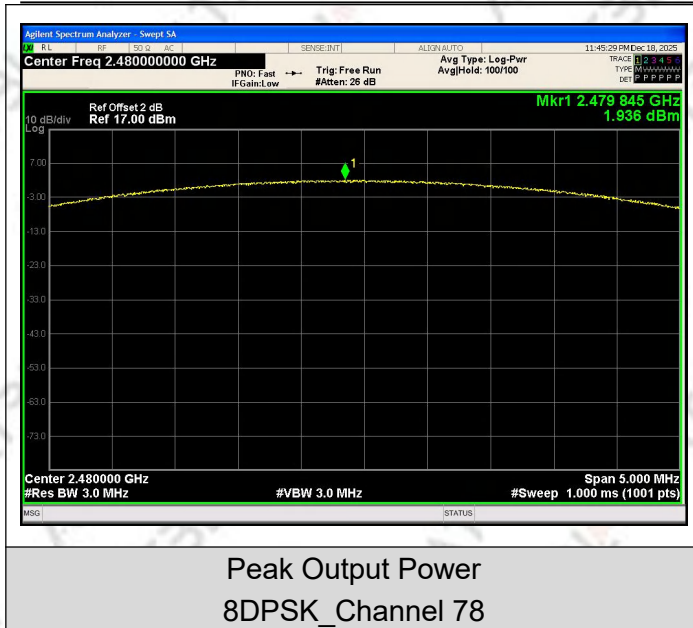


A2.Number of Hopping Frequencies


Test Result

Modulation	Packet	Number of Hopping Channel	Limit	Result
GFSK	DH5	79	15	PASS
$\pi/4$ DQPSK	2-DH5	79	15	PASS
8DPSK	3-DH5	79	15	PASS


Test Graphs

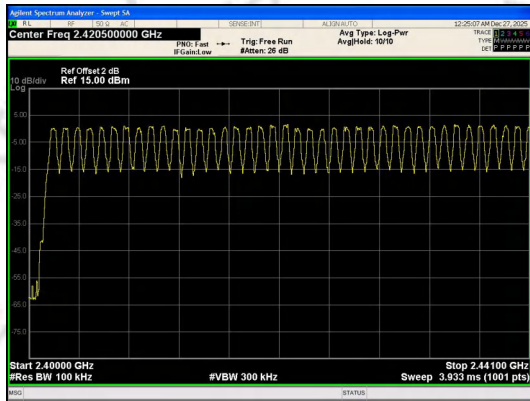


Low End Spectrum Channel Hopping Plot
GFSK

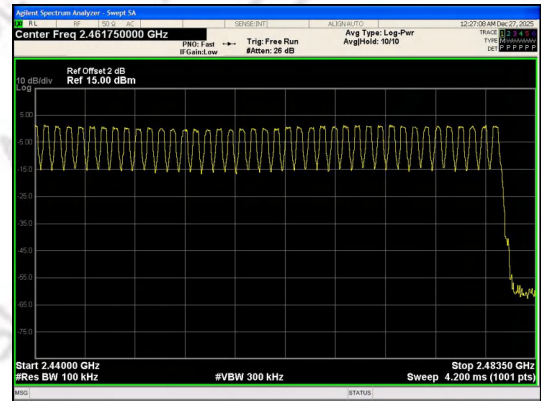


High End Spectrum Channel Hopping Plot
GFSK

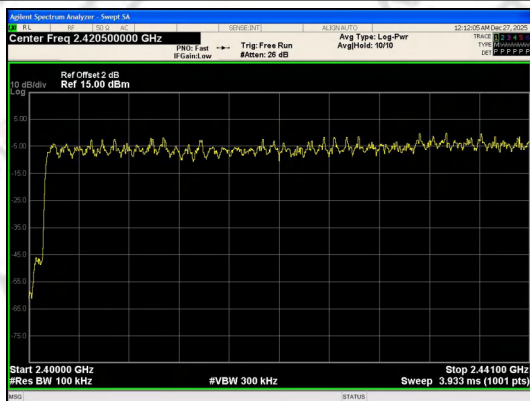


Low End Spectrum Channel Hopping Plot
 $\pi/4$ DQPSK

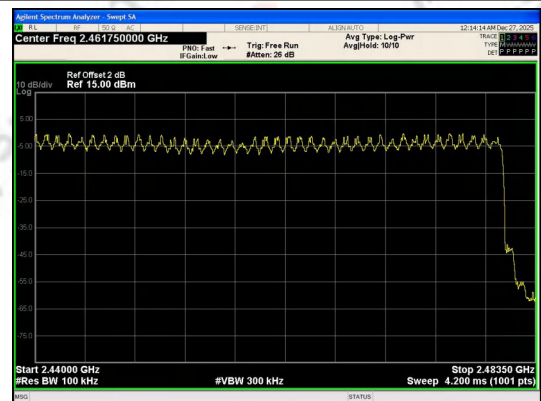

High End Spectrum Channel Hopping Plot
 $\pi/4$ DQPSK

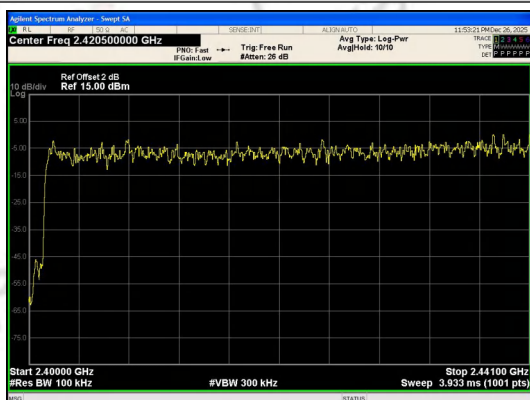

Low End Spectrum Channel Hopping Plot
8DPSK

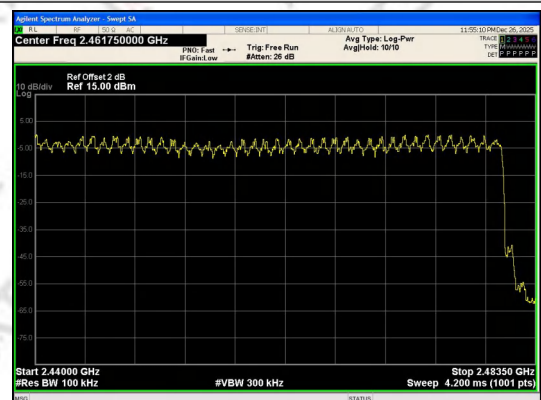

High End Spectrum Channel Hopping Plot
8DPSK


A3.Duty Cycle and Dwell Time

Duty Cycle


Test Result

Modulation	Packets	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
GFSK	DH5	0	2.908	3.748	77.59	0.7759	1.1019
		39	2.908	3.748	77.59	0.7759	1.1019
		78	2.908	3.748	77.59	0.7759	1.1019
$\pi/4$ DQPSK	2-DH5	0	2.898	3.748	77.32	0.7732	1.1171
		39	2.898	3.748	77.32	0.7732	1.1171
		78	2.896	3.748	77.27	0.7727	1.1199
8DPSK	3-DH5	0	2.896	3.748	77.27	0.7727	1.1199
		39	2.896	3.748	77.27	0.7727	1.1199
		78	2.896	3.748	77.27	0.7727	1.1199


Test Graphs

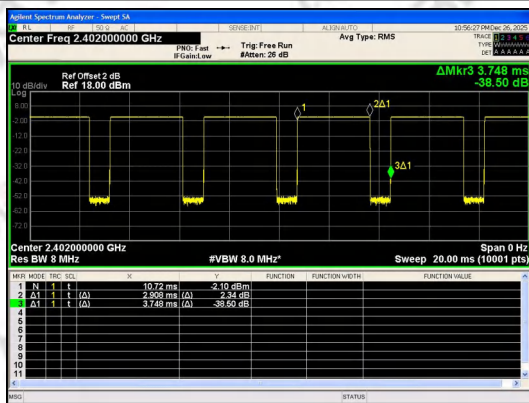

GFSK(DH5)_Channel 0



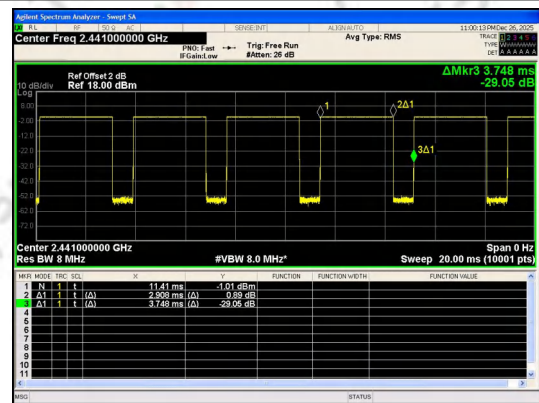


GFSK(DH5)_Channel 39

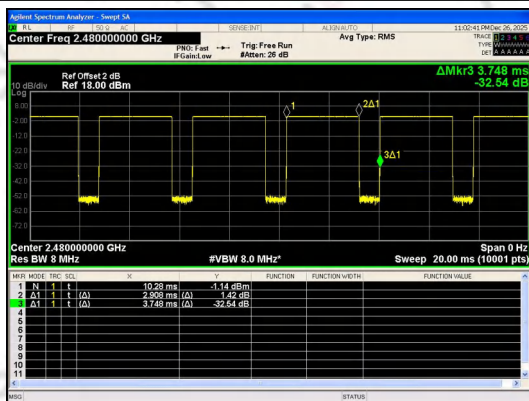


GFSK(DH5)_Channel 78



 $\pi/4$ DQPSK(2-DH5)_Channel 0

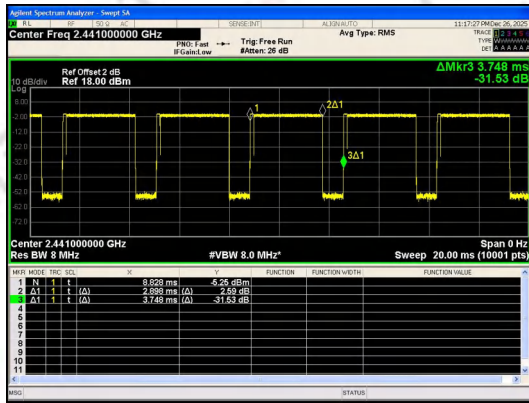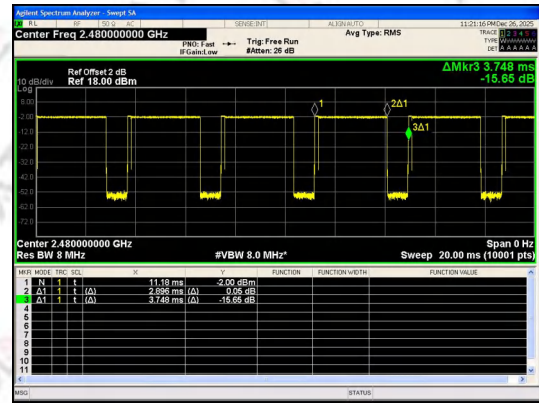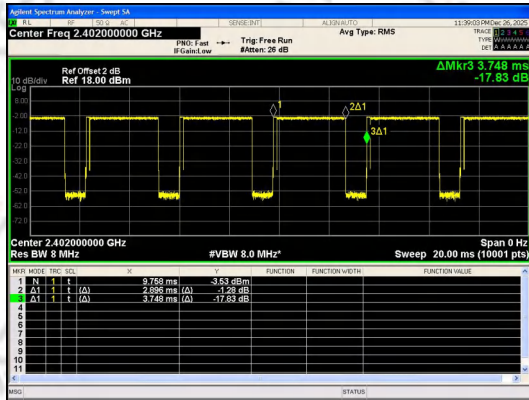
 $\pi/4$ DQPSK(2-DH5)_Channel 39

 $\pi/4$ DQPSK(2-DH5)_Channel 78

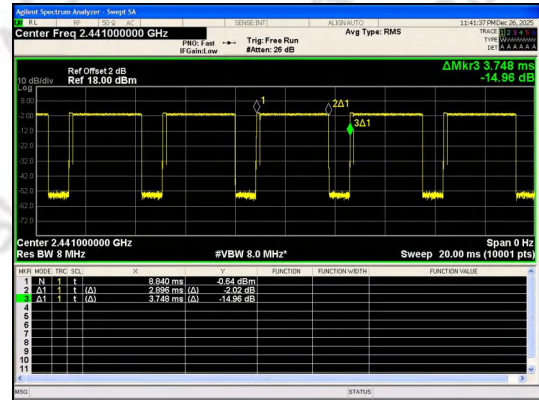
8DPSK(3-DH5)_Channel 0

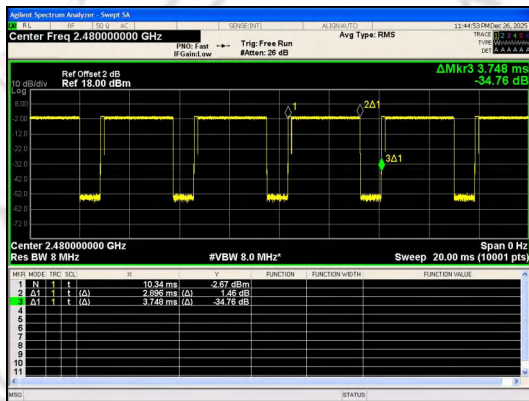

8DPSK(3-DH5)_Channel 39



8DPSK(3-DH5)_Channel 78




Dwell Time


Test Result

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH5	Hopping	2.912	108	314.5	< 400	PASS
$\pi/4$ DQPSK	2-DH5		2.896	109	315.66		PASS
8DPSK	3-DH5		2.896	92	266.43		PASS


Note: Dwell time=Pulse time(ms)*Number of Pulses in 31.6 seconds

Test Graphs

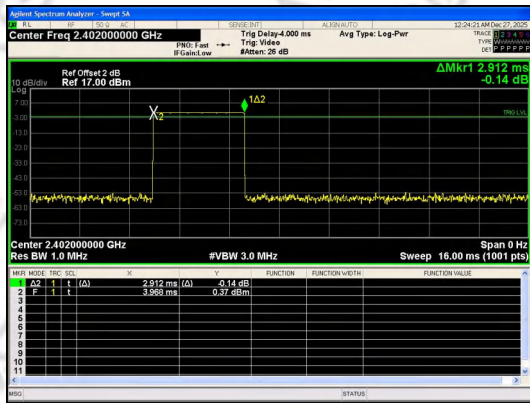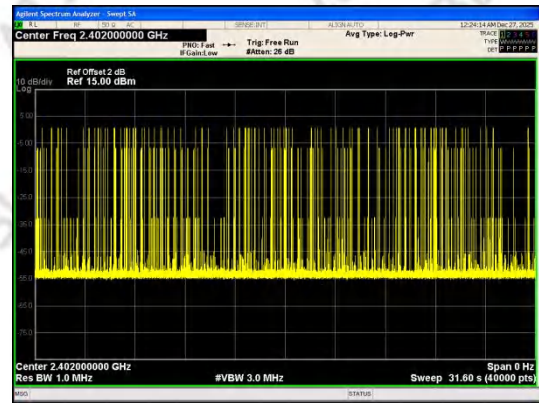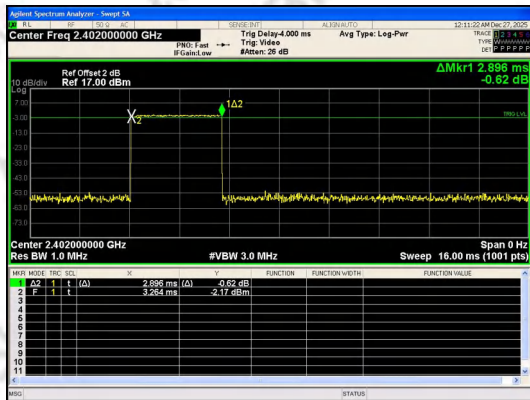
Pulse Width
GFSK_DH5

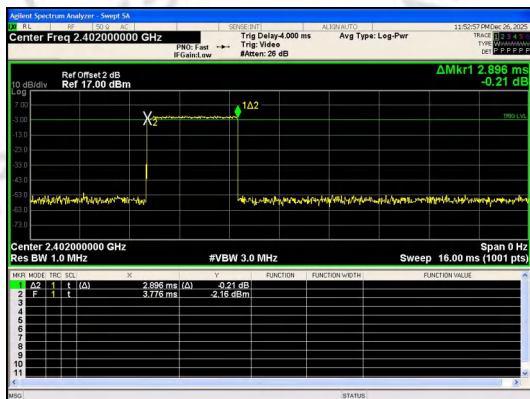Number of Pulses in 31.6 seconds
GFSK_DH5

Pulse Width
 $\pi/4$ DQPSK_2-DH5

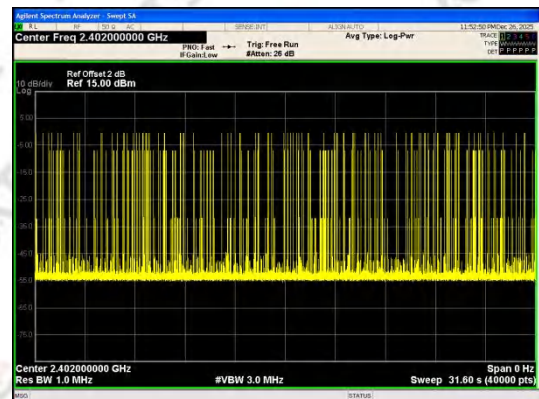Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK_2-DH5


Pulse Width



Number of Pulses in 31.6 seconds

8DPSK_3-DH5


8DPSK_3-DH5


A4.20dB Bandwidth

Test Result

Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	0.94040
	39	2441 MHz	0.95350
	78	2480 MHz	1.0130
$\pi/4$ DQPSK	0	2402 MHz	1.2850
	39	2441 MHz	1.3170
	78	2480 MHz	1.2830
8DPSK	0	2402 MHz	1.2980
	39	2441 MHz	1.2980
	78	2480 MHz	1.2970


Test Graphs

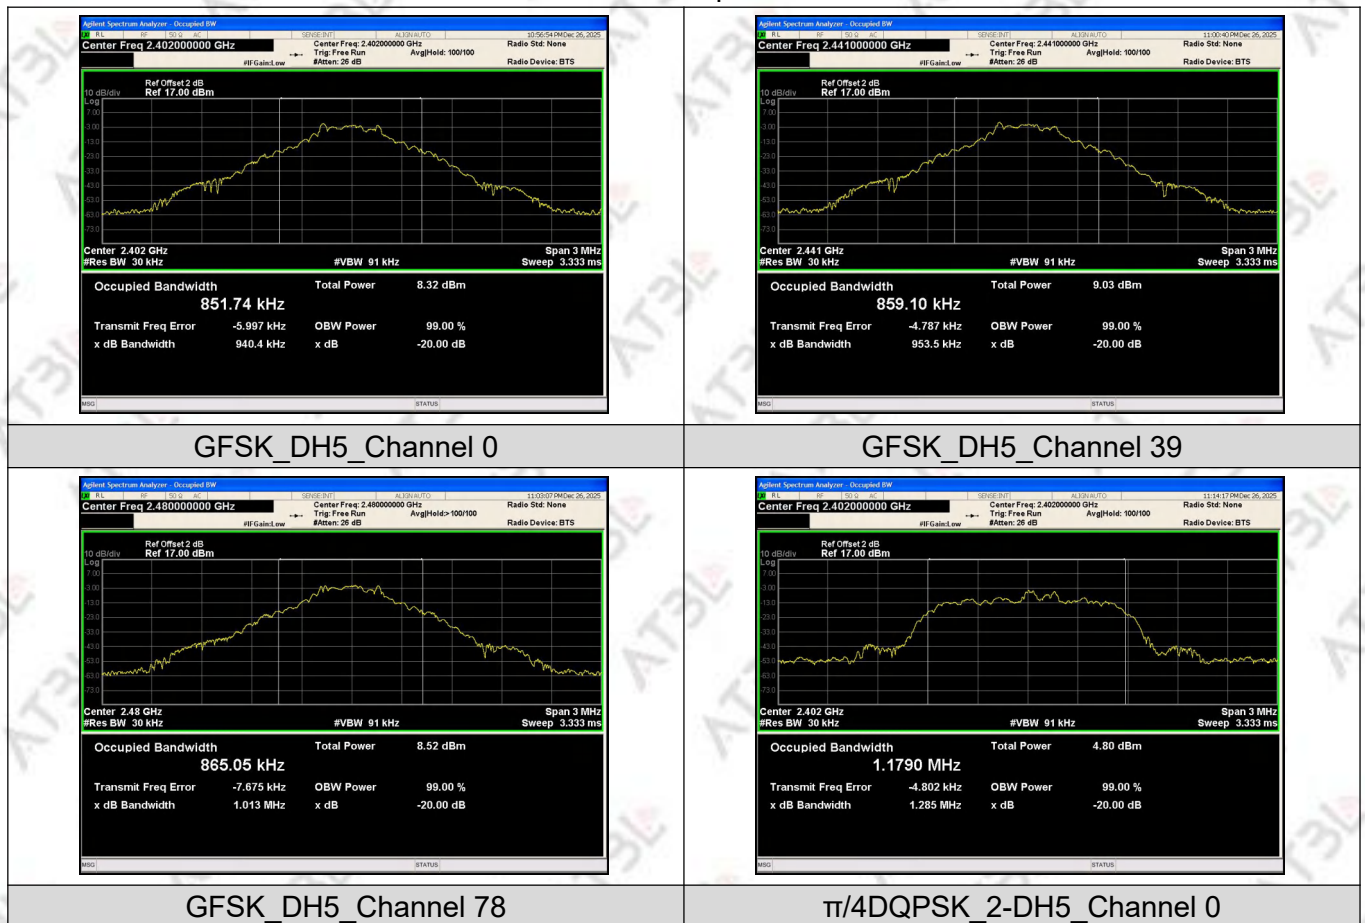

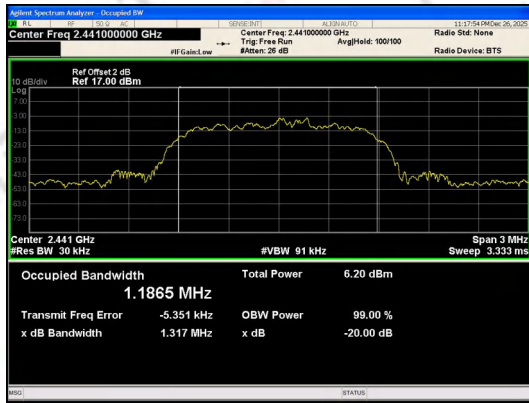
 $\pi/4$ DQPSK_2-DH5_Channel 39

 $\pi/4$ DQPSK_2-DH5_Channel 78


8DPSK_3-DH5_Channel 0

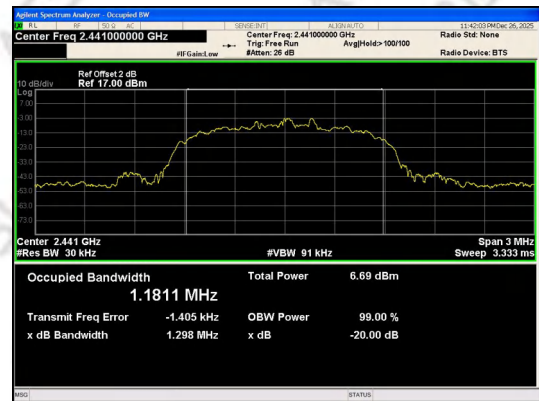

8DPSK_3-DH5_Channel 39




8DPSK_3-DH5_Channel 78

A5.Carrier Frequencies Separation

Test Result

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Minimum Limit (MHz)	Result
GFSK	DH5	2439.8419	2441.1554	1.3135	0.626	PASS
$\pi/4$ DQPSK	2-DH5	2439.9964	2440.9961	0.9997	0.856	PASS
8DPSK	3-DH5	2440.1659	2441.1569	0.9910	0.864	PASS

Test Graphs

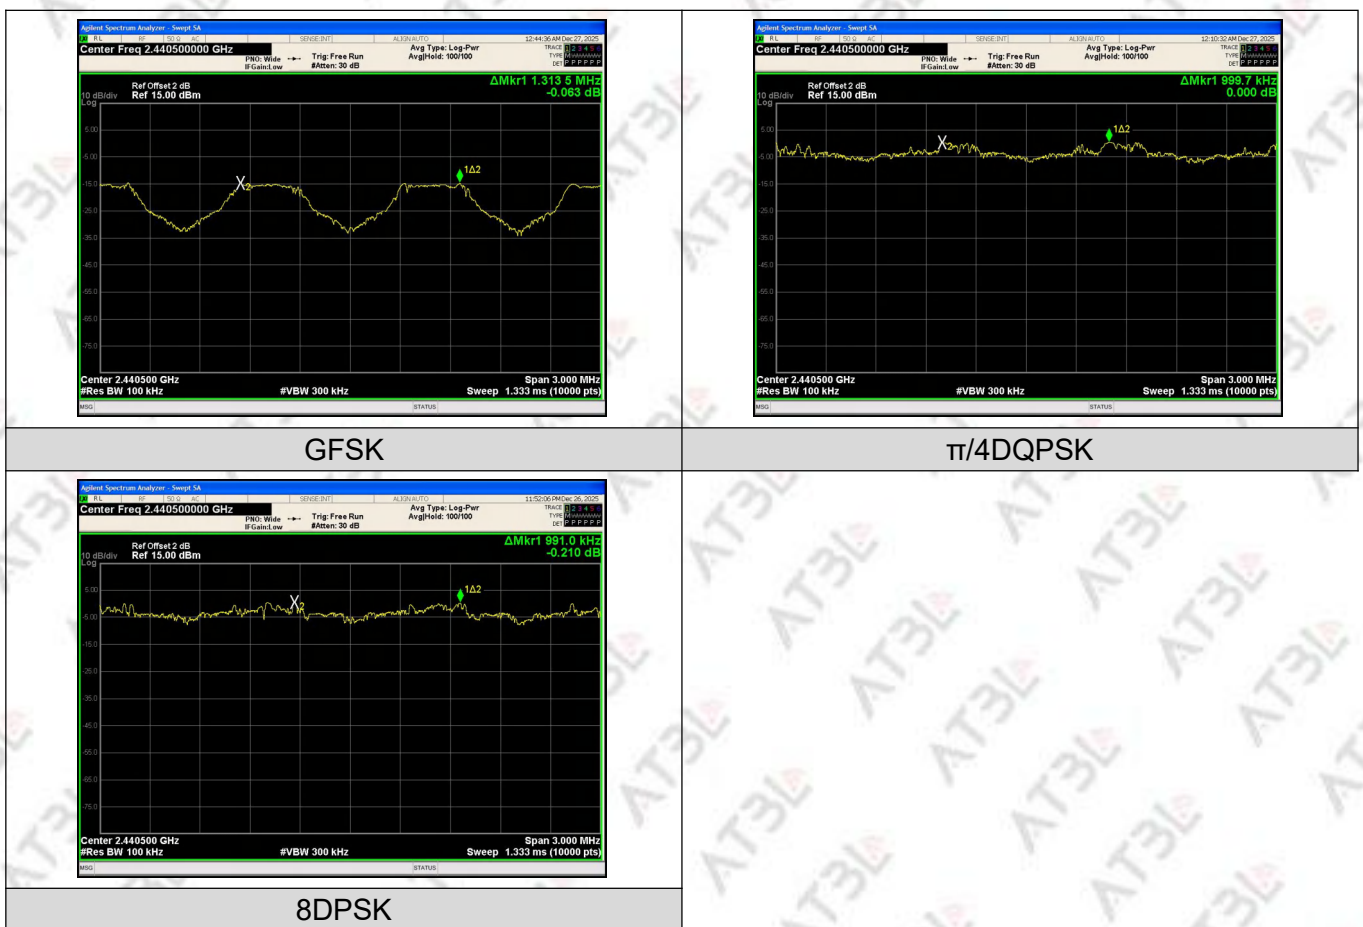

A6.Conducted Band Edge and Conducted Spurious Emission

Test Result
Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2397.12	-59.822	-19.3	-40.522	PASS
			2400.00	-61.703	-19.3	-42.403	PASS
			4803.60	-64.026	-19.3	-44.726	PASS
			7206.40	-65.603	-19.3	-46.303	PASS
			9607.90	-67.271	-19.3	-47.971	PASS
			24939.4	-49.868	-19.3	-30.568	PASS
		39	4882.30	-64.372	-18.43	-45.942	PASS
			7323.11	-64.000	-18.43	-45.570	PASS
			9763.93	-66.004	-18.43	-47.574	PASS
			24834.0	-49.638	-18.43	-31.208	PASS
		78	2483.50	-61.635	-18.92	-42.715	PASS
			4960.33	-63.372	-18.92	-44.452	PASS
			7439.22	-64.018	-18.92	-45.098	PASS
			9919.99	-65.106	-18.92	-46.186	PASS
π/4DQPSK	2-DH5	0	2400.00	-59.157	-22.45	-36.707	PASS
			4804.26	-65.006	-22.45	-42.556	PASS
			7206.38	-65.353	-22.45	-42.903	PASS
			9607.24	-66.459	-22.45	-44.009	PASS
			24918.2	-50.075	-22.45	-27.625	PASS
		39	4881.67	-63.538	-21.05	-42.489	PASS
			7322.49	-63.852	-21.05	-42.802	PASS
			9763.31	-65.696	-21.05	-44.646	PASS
			24958.2	-49.657	-21.05	-28.607	PASS
		78	2483.50	-60.080	-21.28	-38.800	PASS
			4959.70	-63.807	-21.28	-42.527	PASS
			7439.22	-64.181	-21.28	-42.901	PASS
			9919.99	-66.637	-21.28	-45.357	PASS
			24807.7	-50.166	-21.28	-28.886	PASS
8DPSK	3-DH5	0	2400.00	-58.465	-22.32	-36.145	PASS
			4804.26	-65.041	-22.32	-42.721	PASS
			7205.13	-65.181	-22.32	-42.861	PASS
			9607.24	-64.068	-22.32	-41.748	PASS
			24917.0	-49.566	-22.32	-27.245	PASS
		39	4881.67	-65.894	-20.36	-45.534	PASS
			7323.11	-64.936	-20.36	-44.576	PASS
			9763.31	-65.381	-20.36	-45.021	PASS
			24840.2	-50.148	-20.36	-29.788	PASS

		78	2483.50	-61.941	-20.34	-41.601	PASS
			4959.08	-64.540	-20.34	-44.200	PASS
			7439.85	-65.412	-20.34	-45.072	PASS
			9919.37	-64.639	-20.34	-44.299	PASS
			24710.3	-49.147	-20.34	-28.807	PASS
Note: input compensation coefficient (dB)= Cable Loss (dB)							

Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	Hopping	2379.49	-59.883	-19.27	-40.613	PASS
			2400.00	-60.649	-19.27	-41.379	PASS
			2483.50	-60.579	-18.63	-41.949	PASS
π/4DQPSK	2-DH5		2400.00	-58.721	-22.89	-35.831	PASS
			2483.50	-61.512	-21.07	-40.442	PASS
8DPSK	3-DH5		2342.53	-59.671	-22.04	-37.631	PASS
			2400.00	-59.991	-22.04	-37.951	PASS
			2483.50	-61.490	-20.21	-41.280	PASS
Note: input compensation coefficient (dB)= Cable Loss (dB)							


Test Graphs Non-Hopping




In-Band Reference Level
GFSK_DH5_Channel 0




In-Band Reference Level
 $\pi/4$ DQPSK_2-DH5_Channel 0

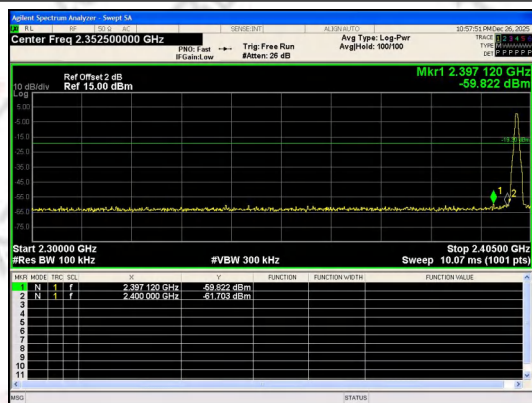


Out Of Band Emission
GFSK_DH5_Channel 0

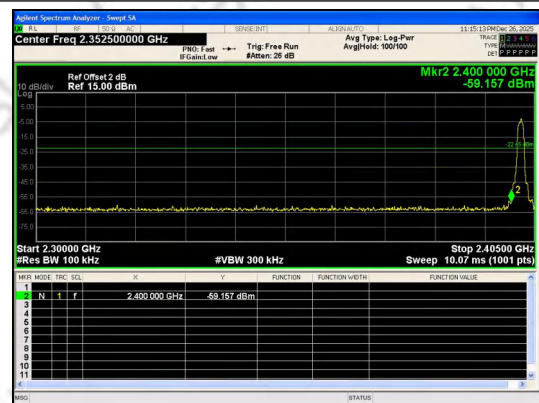

Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 0

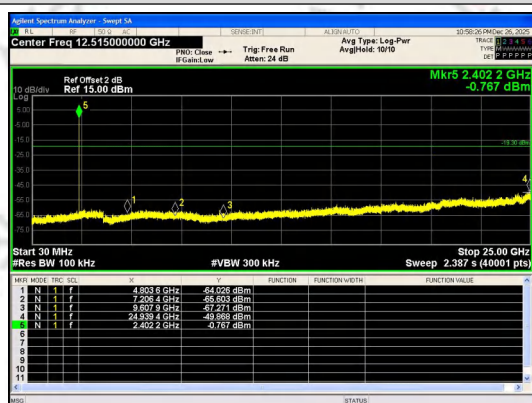

30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 0

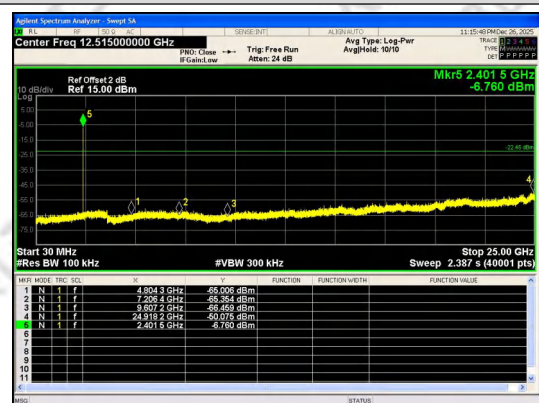


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 0



In-Band Reference Level
GFSK_DH5_Channel 39




In-Band Reference Level
 $\pi/4$ DQPSK_2-DH5_Channel 39

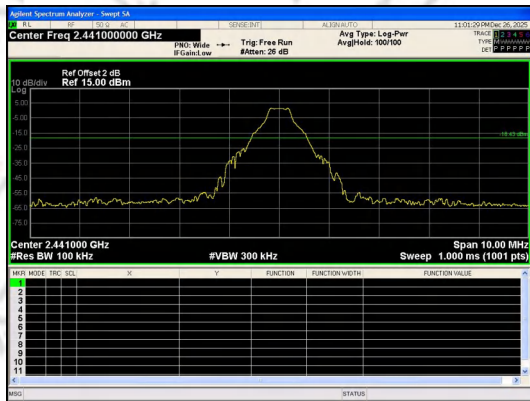


Out Of Band Emission
GFSK_DH5_Channel 39



Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 39

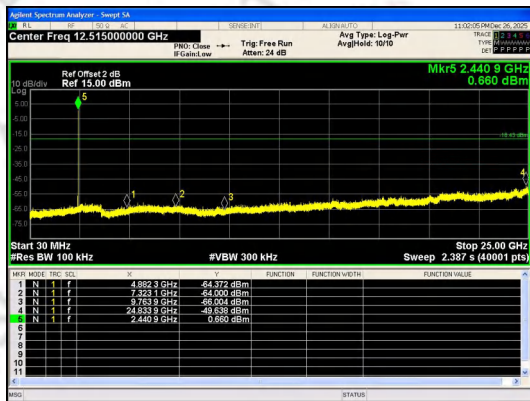


30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 39

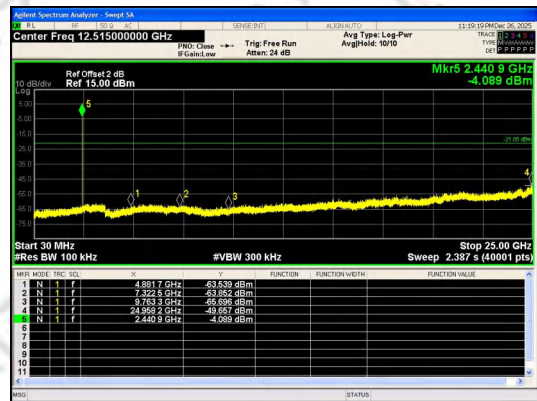


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 39




In-Band Reference Level GFSK_DH5_Channel 78

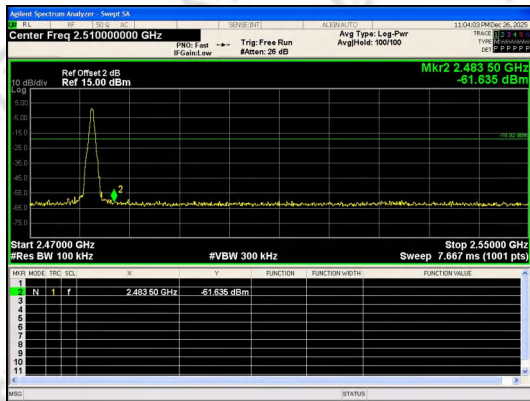


In-Band Reference Level $\pi/4$ DQPSK_2-DH5_Channel 78

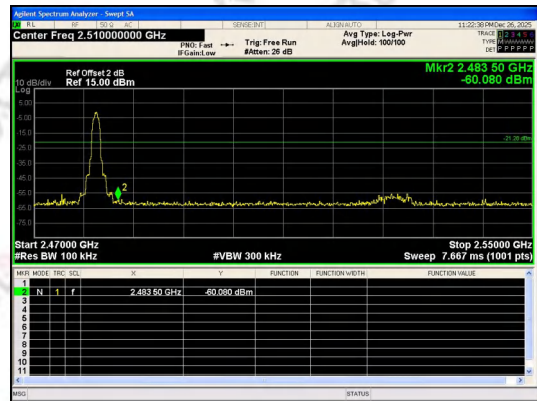

Out Of Band Emission GFSK_DH5_Channel 78

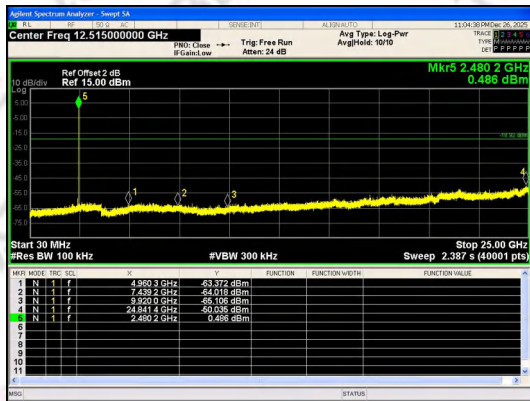


Out Of Band Emission $\pi/4$ DQPSK_2-DH5_Channel 78

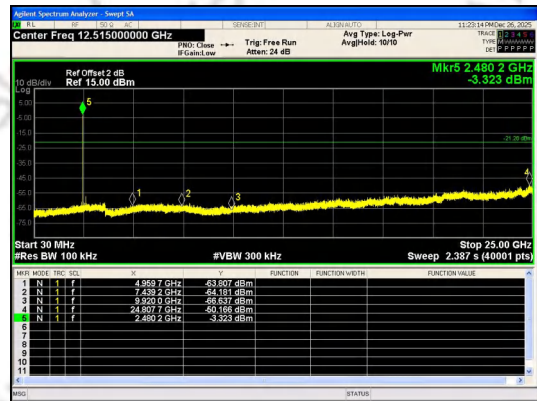


30.0 MHz - 25000.0 MHz GFSK_DH5_Channel 78

30.0 MHz - 25000.0 MHz $\pi/4$ DQPSK_2-DH5_Channel 78


Hopping

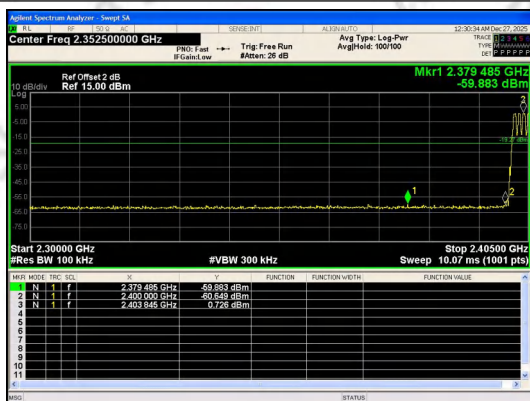

Out Of Band Emission(Left) GFSK_DH5_Channel Hopping

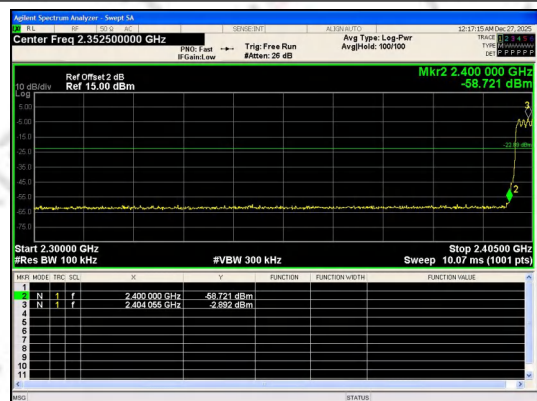

Out Of Band Emission(Left) $\pi/4$ DQPSK_2-DH5_Channel Hopping

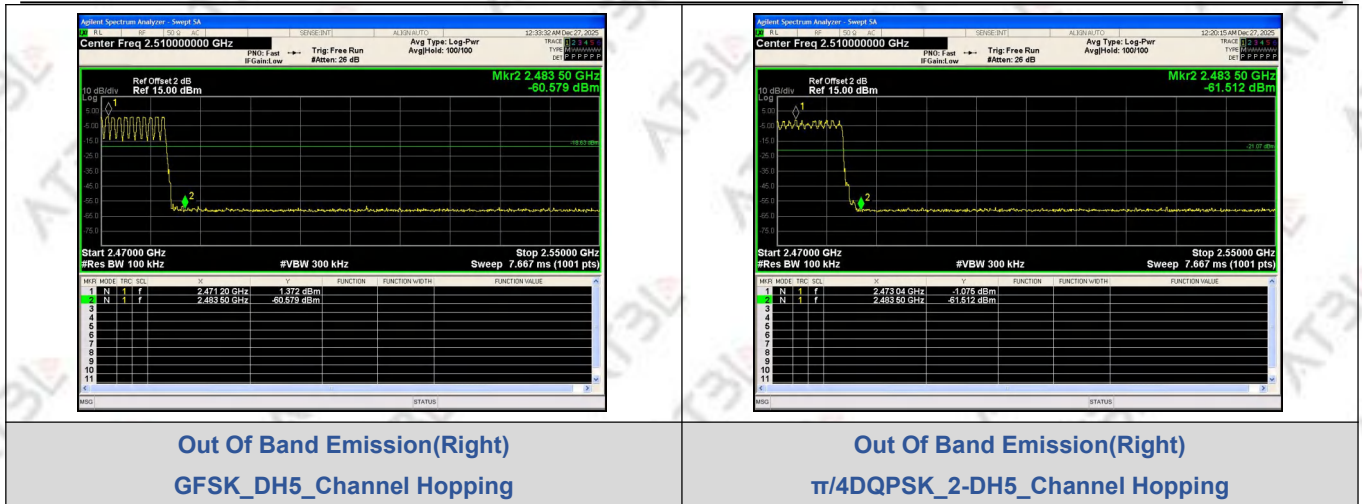

A7.Radiated Spurious Emission and Restricted Band


For 9 kHz ~ 30 MHz


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

For 30 MHz ~ 1 GHz:

Note:

- 1.All modes have been tested, only worst mode(3DH5_2480MHz) was recorded in the test report.
- 2.Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

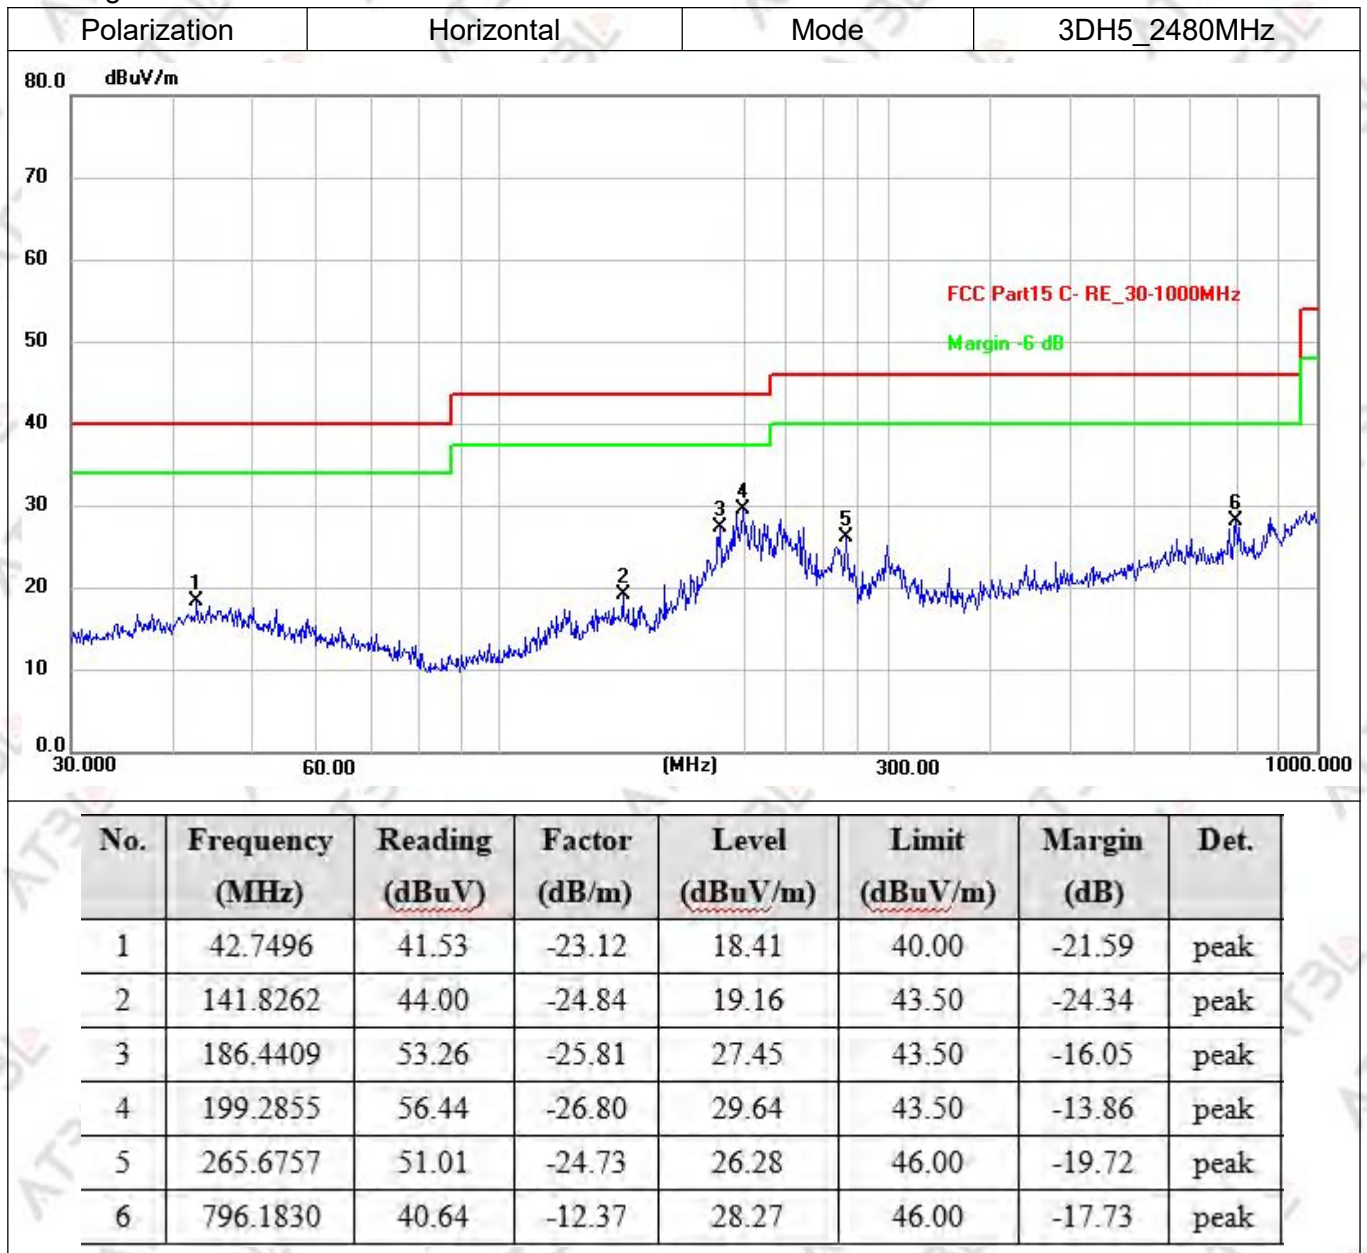

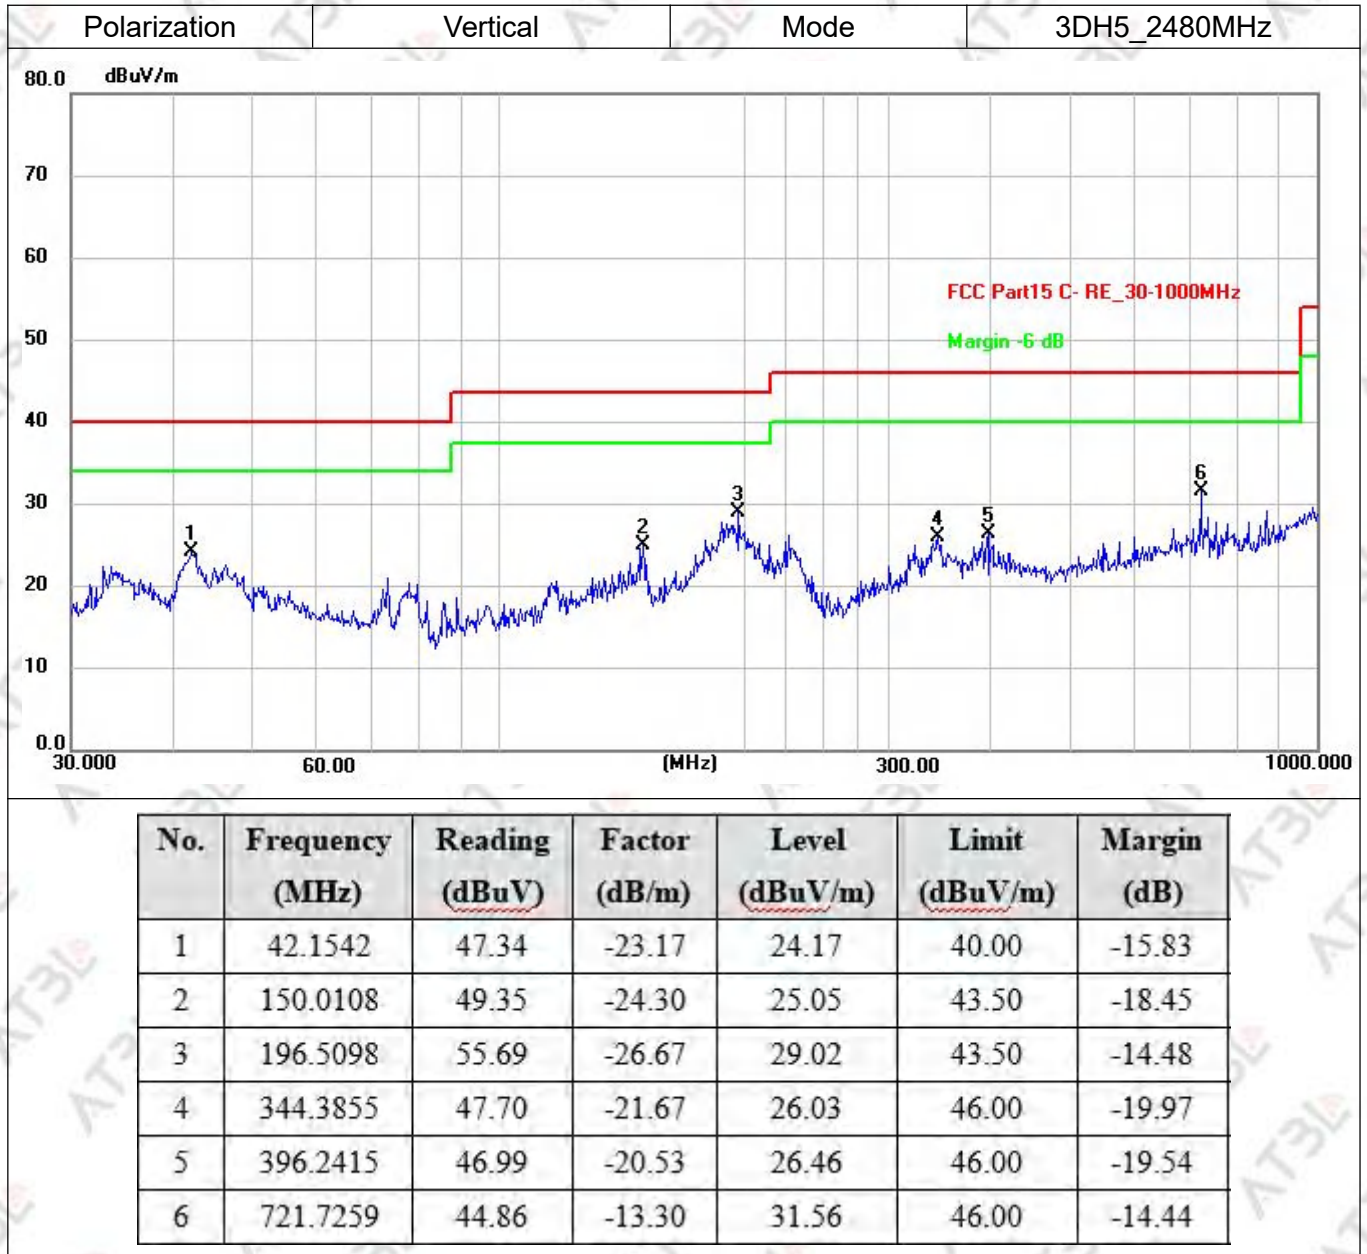

For 1 GHz ~ 18GHz:

Note:

1. In frequency ranges 18 ~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
2. We used the filter to test and the main frequency was filtered out.
3. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
4. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
5. The emission levels of other frequencies were less than 20dB margin against the limit.
6. Margin value = Emission level-Limit value.
7. All modes have been tested, only worst mode(DH5 and 3DH5) was recorded in the test report.

Test Mode: DH5							
Test Channel:Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4804.000	58.97	-1.34	57.63	74	-16.37	peak	Pass
4804.000	49.82	-1.34	48.48	54	-5.52	AV	Pass
7206.000	48.01	5.26	53.27	74	-20.73	peak	Pass
7206.000	35.92	5.26	41.18	54	-12.82	AV	Pass
Test Channel:Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4804.000	59.65	-1.34	58.31	74	-15.69	peak	Pass
4804.000	49.87	-1.34	48.53	54	-5.47	AV	Pass
7206.000	48.69	5.26	53.95	74	-20.05	peak	Pass
7206.000	36.88	5.26	42.14	54	-11.86	AV	Pass
Test Channel:Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4882.000	58.95	-1.12	57.83	74	-16.17	peak	Pass
4882.000	48.96	-1.12	47.84	54	-6.16	AV	Pass
7323.000	47.01	5.65	52.66	74	-21.34	peak	Pass
7323.000	35.45	5.65	41.10	54	-12.90	AV	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4882.000	59.18	-1.12	58.06	74	-15.94	peak	Pass
4882.000	49.61	-1.12	48.49	54	-5.51	AV	Pass
7323.000	47.97	5.65	53.62	74	-20.38	peak	Pass
7323.000	36.17	5.65	41.82	54	-12.18	AV	Pass
Test Channel:Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.000	58.53	-0.7	57.83	74	-16.17	peak	Pass

4960.000	48.83	-0.61	48.22	54	-5.78	AV	Pass
7440.000	48.03	5.97	54.00	74	-20.00	peak	Pass
7440.000	36.08	5.97	42.05	54	-11.95	AV	Pass
Test Channel:Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.000	59.45	-0.7	58.75	74	-15.25	peak	Pass
4960.000	49.13	-0.61	48.52	54	-5.48	AV	Pass
7440.000	48.16	5.97	54.13	74	-19.87	peak	Pass
7440.000	36.34	5.97	42.31	54	-11.69	AV	Pass

Test Mode: 3DH5							
Test Channel:Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4804.000	57.85	-1.34	56.51	74	-17.49	peak	Pass
4804.000	49.34	-1.34	48.00	54	-6.00	AV	Pass
7206.000	48.06	5.26	53.32	74	-20.68	peak	Pass
7206.000	36.57	5.26	41.83	54	-12.17	AV	Pass
Test Channel:Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4804.000	51.69	-10.95	40.74	74	-33.26	peak	Pass
4804.000	40.87	-10.95	29.92	54	-24.08	AV	Pass
7206.000	50.26	-10.86	39.4	74	-34.6	peak	Pass
7206.000	40.22	-10.86	29.36	54	-24.64	AV	Pass
Test Channel:Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4882.000	57.81	-1.12	56.69	74	-17.31	peak	Pass
4882.000	48.48	-1.12	47.36	54	-6.64	AV	Pass
7323.000	47.96	5.65	53.61	74	-20.39	peak	Pass
7323.000	36.26	5.65	41.91	54	-12.09	AV	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4882.000	57.94	-1.12	56.82	74	-17.18	peak	Pass
4882.000	49.48	-1.12	48.36	54	-5.64	AV	Pass
7323.000	47.96	5.65	53.61	74	-20.39	peak	Pass
7323.000	36.41	5.65	42.06	54	-11.94	AV	Pass
Test Channel:Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.000	57.81	-0.7	57.11	74	-16.89	peak	Pass
4960.000	48.83	-0.61	48.22	54	-5.78	AV	Pass
7440.000	48.10	5.97	54.07	74	-19.93	peak	Pass
7440.000	36.04	5.97	42.01	54	-11.99	AV	Pass
Test Channel:Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.000	58.04	-0.7	57.34	74	-16.66	peak	Pass
4960.000	48.98	-0.61	48.37	54	-5.63	AV	Pass
7440.000	48.22	5.97	54.19	74	-19.81	peak	Pass
7440.000	36.76	5.97	42.73	54	-11.27	AV	Pass

Test Result of Restricted Band

Note:

All modes have been tested, only worst case(DH5 and 3DH5)mode was recorded in the test report.


Test Mode: DH5							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	50.22	-10.95	39.27	74	-34.73	peak	Pass
2310.000	40.37	-10.95	29.42	54	-24.58	AV	Pass
2390.000	48.17	-10.86	37.31	74	-36.69	peak	Pass
2390.000	37.62	-10.86	26.76	54	-27.24	AV	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	50.26	-10.95	39.31	74	-34.69	peak	Pass
2310.000	40.69	-10.95	29.74	54	-24.26	AV	Pass
2390.000	48.64	-10.86	37.78	74	-36.22	peak	Pass
2390.000	37.89	-10.86	27.03	54	-26.97	AV	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	48.96	-10.34	38.62	74	-35.38	peak	Pass
2483.500	39.83	-10.34	29.49	54	-24.51	AV	Pass
2500.000	47.79	-10.24	37.55	74	-36.45	peak	Pass
2500.000	36.52	-10.24	26.28	54	-27.72	AV	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	49.69	-10.34	39.35	74	-34.65	peak	Pass
2483.500	40.50	-10.34	30.16	54	-23.84	AV	Pass
2500.000	48.35	-10.24	38.11	74	-35.89	peak	Pass
2500.000	37.41	-10.24	27.17	54	-26.83	AV	Pass


Test Mode: 3DH5							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	51.09	-10.95	40.14	74	-33.86	peak	Pass
2310.000	40.45	-10.95	29.50	54	-24.50	AV	Pass
2390.000	48.28	-10.86	37.42	74	-36.58	peak	Pass
2390.000	38.20	-10.86	27.34	54	-26.66	AV	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	51.23	-10.95	40.28	74	-33.72	peak	Pass
2310.000	41.33	-10.95	30.38	54	-23.62	AV	Pass
2390.000	48.75	-10.86	37.89	74	-36.11	peak	Pass
2390.000	38.24	-10.86	27.38	54	-26.62	AV	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	50.31	-10.34	39.97	74	-34.03	peak	Pass
2483.500	40.65	-10.34	30.31	54	-23.69	AV	Pass
2500.000	47.64	-10.24	37.40	74	-36.60	peak	Pass
2500.000	36.45	-10.24	26.21	54	-27.79	AV	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	51.19	-10.34	40.85	74	-33.15	peak	Pass
2483.500	40.94	-10.34	30.60	54	-23.40	AV	Pass
2500.000	47.96	-10.24	37.72	74	-36.28	peak	Pass
2500.000	37.34	-10.24	27.10	54	-26.90	AV	Pass

A8.AC Power-Line Conducted Emission

Note:

- 1.All modes have been tested, only worst case(3DH5_2480MHz)mode was recorded in the test report.
- 2.Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

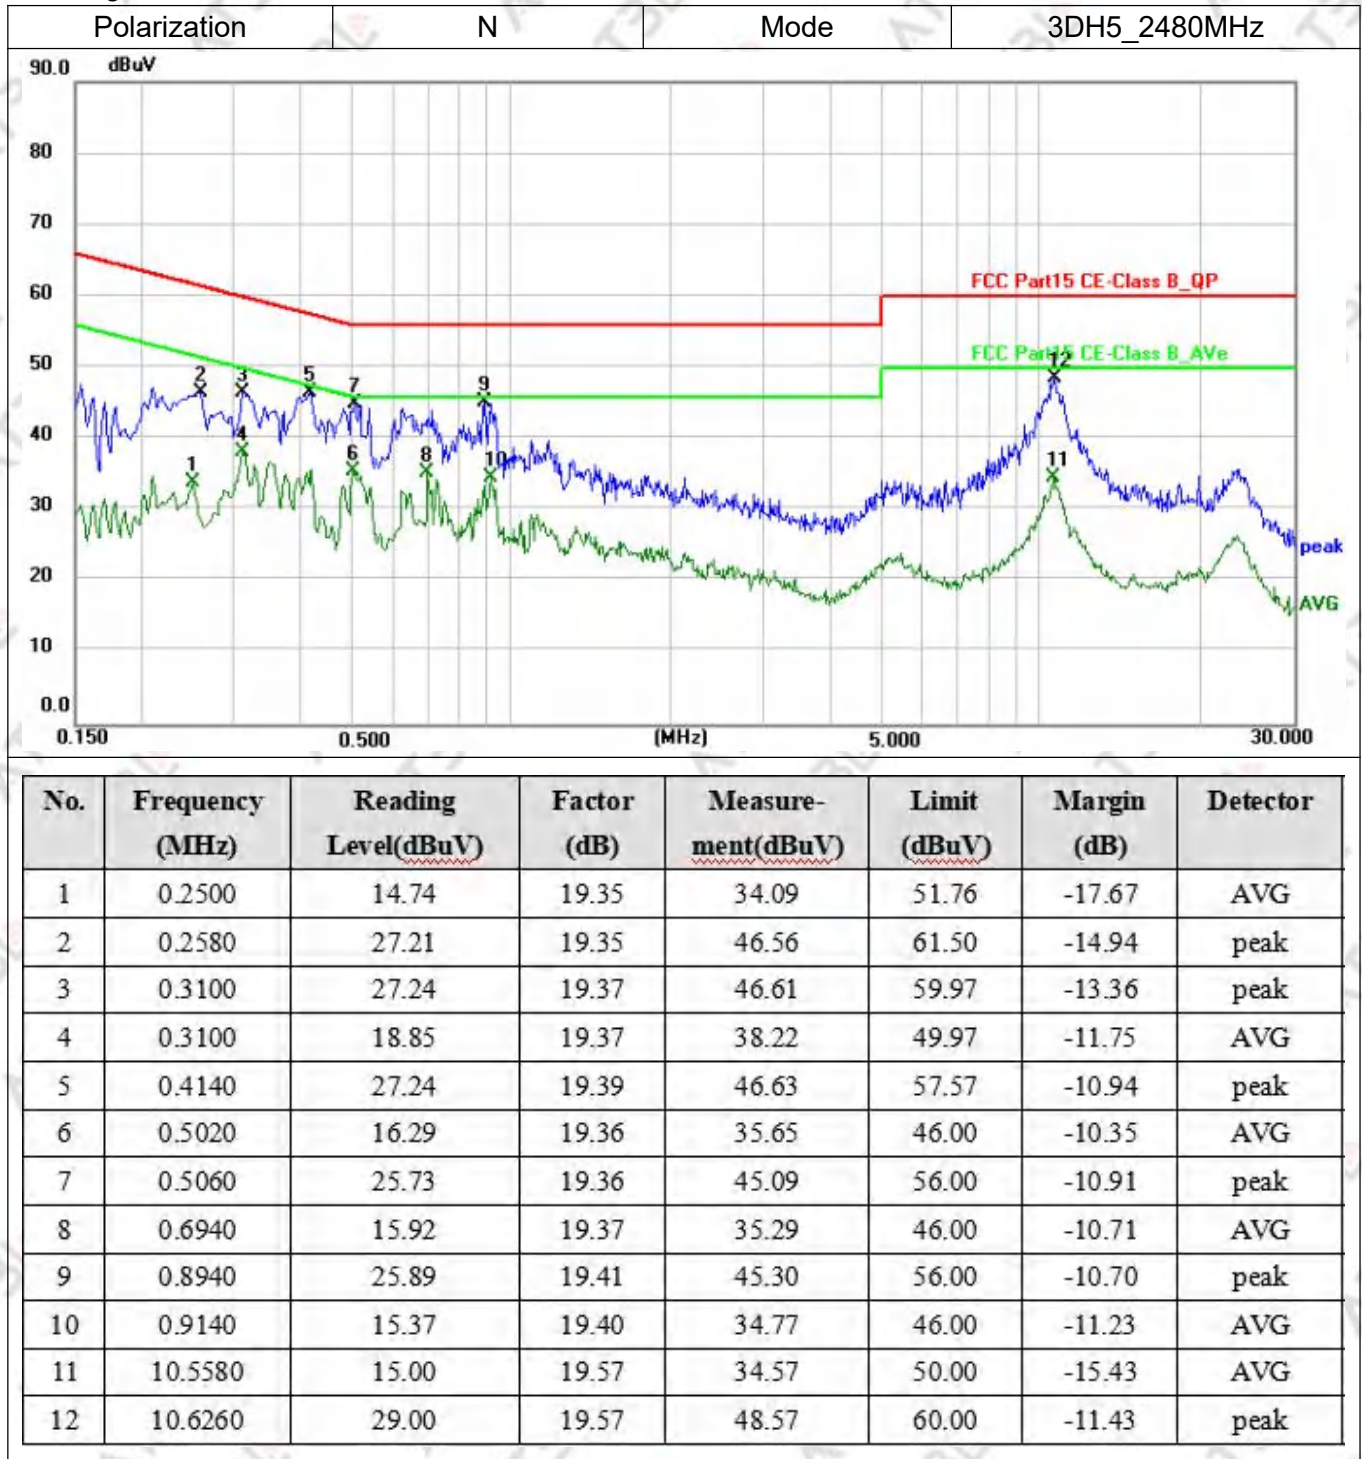

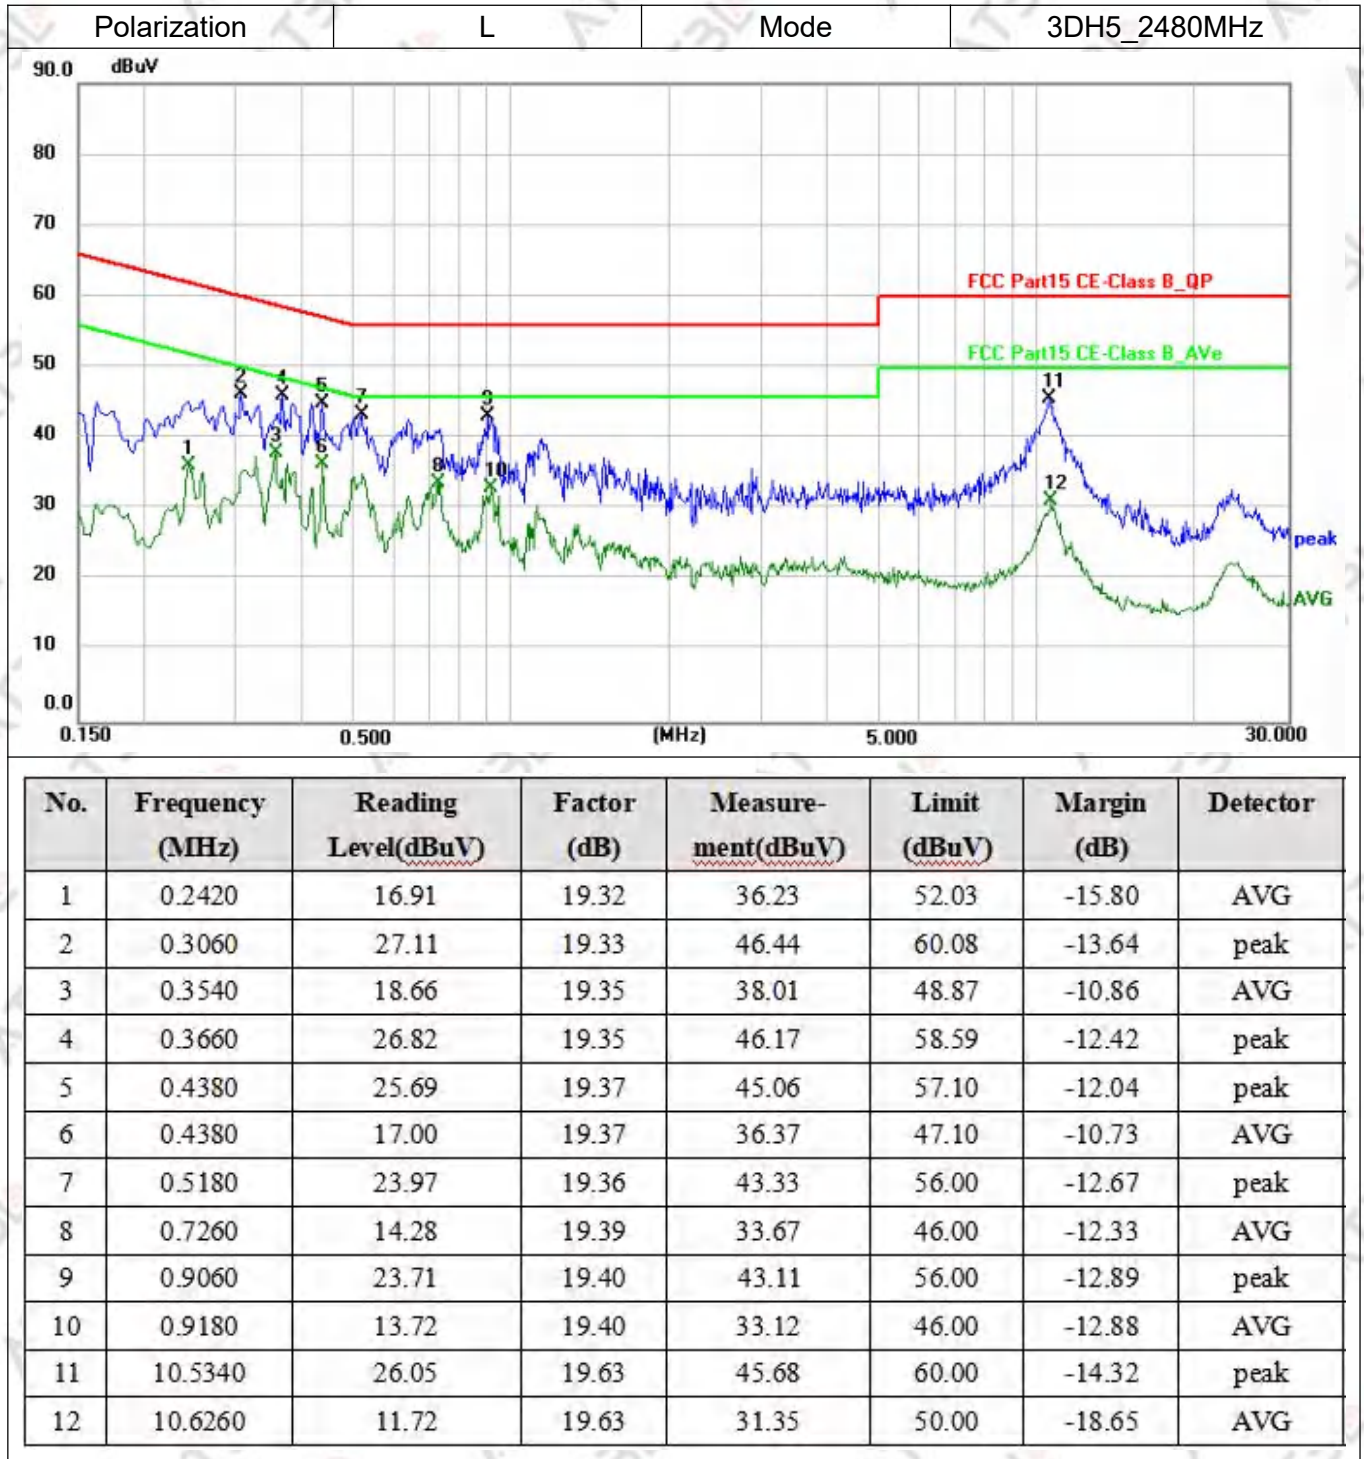

*****END*****